

### Conducted Power of LTE Band 7 (dBm)

| Bandwidth | Modulation | RB size | RB offset | Target MPR | Channel | Channel | Channel |
|-----------|------------|---------|-----------|------------|---------|---------|---------|
|           |            |         |           |            | 20825   | 21100   | 21375   |
| 15MHz     | QPSK       | 1       | 0         | 0          | 23.00   | 23.21   | 23.62   |
|           |            |         | 37        | 0          | 23.13   | 23.34   | 23.64   |
|           |            |         | 74        | 0          | 22.90   | 23.43   | 23.45   |
|           |            | 37      | 0         | 1          | 22.21   | 22.80   | 22.58   |
|           |            |         | 16        | 1          | 22.16   | 22.75   | 22.58   |
|           |            |         | 35        | 1          | 22.41   | 22.73   | 22.69   |
|           |            | 75      | 0         | 1          | 22.46   | 22.70   | 22.53   |
|           | 16QAM      | 1       | 0         | 1          | 22.07   | 22.33   | 22.19   |
|           |            |         | 37        | 1          | 22.16   | 22.48   | 22.42   |
|           |            |         | 74        | 1          | 22.10   | 22.69   | 22.33   |
|           |            | 37      | 0         | 2          | 22.33   | 22.74   | 22.59   |
|           |            |         | 16        | 2          | 22.36   | 22.63   | 22.47   |
|           |            |         | 35        | 2          | 22.37   | 22.76   | 22.51   |
|           |            | 75      | 0         | 2          | 21.31   | 21.73   | 21.56   |
| Bandwidth | Modulation | RB size | RB offset | Target MPR | Channel | Channel | Channel |
|           |            |         |           |            | 20850   | 21100   | 21350   |
| 20MHz     | QPSK       | 1       | 0         | 0          | 22.92   | 23.96   | 23.26   |
|           |            |         | 49        | 0          | 23.18   | 23.39   | 23.44   |
|           |            |         | 99        | 0          | 23.04   | 23.31   | 23.28   |
|           |            | 50      | 0         | 1          | 22.10   | 22.25   | 22.43   |
|           |            |         | 25        | 1          | 21.97   | 22.29   | 22.43   |
|           |            |         | 49        | 1          | 21.97   | 22.57   | 22.55   |
|           |            | 100     | 0         | 1          | 22.01   | 22.47   | 22.48   |
|           | 16QAM      | 1       | 0         | 1          | 21.89   | 22.24   | 22.24   |
|           |            |         | 49        | 1          | 22.12   | 22.58   | 22.57   |
|           |            |         | 99        | 1          | 22.01   | 22.35   | 22.44   |
|           |            | 50      | 0         | 2          | 21.98   | 22.39   | 22.48   |
|           |            |         | 25        | 2          | 21.93   | 22.28   | 22.43   |
|           |            |         | 49        | 2          | 22.06   | 22.68   | 22.57   |
|           |            | 100     | 0         | 2          | 21.13   | 21.66   | 21.59   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



| Conducted Power of LTE Band 12(dBm) |            |         |           |            |              |         |         |
|-------------------------------------|------------|---------|-----------|------------|--------------|---------|---------|
| Bandwidth                           | Modulation | RB size | RB offset | Target MPR | Channel      | Channel | Channel |
|                                     |            |         |           |            | 23017        | 23095   | 23173   |
| 1.4MHz                              | QPSK       | 1       | 0         | 0          | 23.97        | 23.88   | 23.79   |
|                                     |            |         | 3         | 0          | 24.04        | 23.98   | 23.91   |
|                                     |            |         | 5         | 0          | 23.94        | 23.91   | 23.81   |
|                                     |            | 3       | 0         | 0          | 24.06        | 24.01   | 23.89   |
|                                     |            |         | 2         | 0          | <b>24.07</b> | 24.00   | 23.88   |
|                                     |            |         | 3         | 0          | 24.04        | 24.02   | 23.90   |
|                                     |            | 6       | 0         | 1          | 23.00        | 22.95   | 22.79   |
|                                     | 16QAM      | 1       | 0         | 1          | 23.10        | 23.03   | 22.72   |
|                                     |            |         | 3         | 1          | 23.26        | 23.21   | 22.86   |
|                                     |            |         | 5         | 1          | 23.05        | 23.07   | 22.71   |
|                                     |            | 3       | 0         | 1          | 23.03        | 23.99   | 23.84   |
|                                     |            |         | 2         | 1          | 23.04        | 23.98   | 23.84   |
|                                     |            |         | 3         | 1          | 23.01        | 23.01   | 23.87   |
|                                     |            | 6       | 0         | 2          | 22.06        | 21.86   | 21.83   |
| Bandwidth                           | Modulation | RB size | RB offset | Target MPR | Channel      | Channel | Channel |
|                                     |            |         |           |            | 23025        | 23095   | 23165   |
| 3MHz                                | QPSK       | 1       | 0         | 0          | 23.91        | 23.83   | 23.78   |
|                                     |            |         | 7         | 0          | 23.83        | 23.83   | 23.89   |
|                                     |            |         | 14        | 0          | 23.86        | 23.70   | 23.85   |
|                                     |            | 8       | 0         | 1          | 22.91        | 22.77   | 22.86   |
|                                     |            |         | 4         | 1          | 22.87        | 22.79   | 22.86   |
|                                     |            |         | 7         | 1          | 22.89        | 22.67   | 22.79   |
|                                     |            | 15      | 0         | 1          | 22.93        | 22.89   | 22.85   |
|                                     | 16QAM      | 1       | 0         | 1          | 23.18        | 23.02   | 22.79   |
|                                     |            |         | 7         | 1          | 23.10        | 23.02   | 22.84   |
|                                     |            |         | 14        | 1          | 23.08        | 22.95   | 22.75   |
|                                     |            | 8       | 0         | 2          | 22.89        | 22.90   | 22.56   |
|                                     |            |         | 4         | 2          | 22.87        | 22.88   | 22.52   |
|                                     |            |         | 7         | 2          | 22.82        | 22.91   | 22.84   |
|                                     |            | 15      | 0         | 2          | 21.97        | 21.62   | 21.81   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



| Conducted Power of LTE Band 12(dBm) |            |         |           |            |         |         |         |
|-------------------------------------|------------|---------|-----------|------------|---------|---------|---------|
| Bandwidth                           | Modulation | RB size | RB offset | Target MPR | Channel | Channel | Channel |
|                                     |            |         |           |            | 23035   | 23095   | 23155   |
| 5MHz                                | QPSK       | 1       | 0         | 0          | 23.98   | 23.92   | 23.93   |
|                                     |            |         | 13        | 0          | 24.05   | 24.05   | 24.00   |
|                                     |            |         | 24        | 0          | 23.94   | 23.90   | 23.84   |
|                                     |            | 12      | 0         | 1          | 22.95   | 23.11   | 22.95   |
|                                     |            |         | 6         | 1          | 22.92   | 23.07   | 22.95   |
|                                     |            |         | 13        | 1          | 23.10   | 22.95   | 22.95   |
|                                     |            | 25      | 0         | 1          | 23.06   | 23.02   | 22.96   |
|                                     | 16QAM      | 1       | 0         | 1          | 23.00   | 23.18   | 22.96   |
|                                     |            |         | 13        | 1          | 23.06   | 23.30   | 22.99   |
|                                     |            |         | 24        | 1          | 23.04   | 23.15   | 22.87   |
|                                     |            | 12      | 0         | 2          | 22.95   | 23.06   | 22.95   |
|                                     |            |         | 6         | 2          | 22.96   | 23.05   | 22.94   |
|                                     |            |         | 13        | 2          | 23.13   | 22.91   | 22.95   |
|                                     |            | 25      | 0         | 2          | 22.13   | 22.06   | 22.11   |
| Bandwidth                           | Modulation | RB size | RB offset | Target MPR | Channel | Channel | Channel |
|                                     |            |         |           |            | 23060   | 23095   | 23130   |
| 10MHz                               | QPSK       | 1       | 0         | 0          | 23.42   | 23.08   | 22.91   |
|                                     |            |         | 25        | 0          | 23.85   | 24.06   | 23.43   |
|                                     |            |         | 49        | 0          | 22.63   | 23.63   | 23.85   |
|                                     |            | 25      | 0         | 1          | 22.69   | 22.49   | 22.52   |
|                                     |            |         | 13        | 1          | 22.67   | 23.08   | 22.93   |
|                                     |            |         | 25        | 1          | 22.94   | 21.55   | 22.05   |
|                                     |            | 50      | 0         | 1          | 22.61   | 22.69   | 22.81   |
|                                     | 16QAM      | 1       | 0         | 1          | 22.86   | 21.92   | 21.83   |
|                                     |            |         | 25        | 1          | 22.07   | 23.91   | 22.40   |
|                                     |            |         | 49        | 1          | 22.40   | 24.13   | 22.17   |
|                                     |            | 25      | 0         | 2          | 22.39   | 24.54   | 21.75   |
|                                     |            |         | 13        | 2          | 22.60   | 24.37   | 21.84   |
|                                     |            |         | 25        | 2          | 22.11   | 23.96   | 21.87   |
|                                     |            | 50      | 0         | 2          | 21.17   | 22.36   | 21.67   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



| Conducted Power of LTE Band 17(dBm) |            |         |           |            |              |         |         |
|-------------------------------------|------------|---------|-----------|------------|--------------|---------|---------|
| Bandwidth                           | Modulation | RB size | RB offset | Target MPR | Channel      | Channel | Channel |
|                                     |            |         |           |            | 23755        | 23790   | 23825   |
| 5MHz                                | QPSK       | 1       | 0         | 0          | 23.99        | 23.96   | 23.91   |
|                                     |            |         | 13        | 0          | <b>24.08</b> | 24.01   | 23.97   |
|                                     |            |         | 24        | 0          | 23.92        | 23.90   | 23.84   |
|                                     |            | 12      | 0         | 1          | 23.05        | 23.05   | 22.94   |
|                                     |            |         | 6         | 1          | 22.95        | 23.01   | 22.95   |
|                                     |            |         | 13        | 1          | 22.88        | 22.90   | 22.93   |
|                                     |            | 25      | 0         | 1          | 22.94        | 22.96   | 22.94   |
|                                     | 16QAM      | 1       | 0         | 1          | 23.24        | 23.00   | 22.94   |
|                                     |            |         | 13        | 1          | 23.29        | 23.02   | 22.95   |
|                                     |            |         | 24        | 1          | 23.15        | 22.88   | 22.85   |
|                                     |            | 12      | 0         | 2          | 23.00        | 23.05   | 22.90   |
|                                     |            |         | 6         | 2          | 22.99        | 22.98   | 22.90   |
|                                     |            |         | 13        | 2          | 22.89        | 22.88   | 22.92   |
|                                     |            | 25      | 0         | 2          | 21.96        | 22.03   | 21.99   |
| Bandwidth                           | Modulation | RB size | RB offset | Target MPR | Channel      | Channel | Channel |
|                                     |            |         |           |            | 23780        | 23790   | 23800   |
| 10MHz                               | QPSK       | 1       | 0         | 0          | 23.04        | 23.25   | 23.12   |
|                                     |            |         | 25        | 0          | 23.58        | 22.70   | 23.21   |
|                                     |            |         | 49        | 0          | 23.63        | 23.53   | 22.83   |
|                                     |            | 25      | 0         | 1          | 22.62        | 22.19   | 22.84   |
|                                     |            |         | 13        | 1          | 21.91        | 21.97   | 21.86   |
|                                     |            |         | 25        | 1          | 22.38        | 22.52   | 21.53   |
|                                     |            | 50      | 0         | 1          | 22.96        | 22.47   | 21.59   |
|                                     | 16QAM      | 1       | 0         | 1          | 22.66        | 21.70   | 22.93   |
|                                     |            |         | 25        | 1          | 23.08        | 23.58   | 21.73   |
|                                     |            |         | 49        | 1          | 22.61        | 23.85   | 21.56   |
|                                     |            | 25      | 0         | 2          | 22.35        | 23.68   | 21.61   |
|                                     |            |         | 13        | 2          | 23.00        | 23.32   | 22.21   |
|                                     |            |         | 25        | 2          | 22.91        | 23.58   | 21.90   |
|                                     |            | 50      | 0         | 2          | 21.02        | 22.90   | 21.52   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

**Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3**

| Modulation | Maximum Power Reduction (MPR) for Power[RB] |      |      |       |       |       | MPR(dB) |
|------------|---------------------------------------------|------|------|-------|-------|-------|---------|
|            | 1.4MHz                                      | 3MHz | 5MHz | 10MHz | 15MHz | 20MHz |         |
| QPSK       | >5                                          | >4   | >8   | >12   | >16   | >18   | ≤1      |
| 16QAM      | ≤5                                          | ≤4   | ≤8   | ≤12   | ≤16   | ≤18   | ≤1      |
| 16QAM      | >5                                          | >4   | >8   | >12   | >16   | >18   | ≤2      |

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".3

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements**

| Network Signaling value | Requirements (sub-clause)  | E-UTRA Band          | Channel bandwidth (MHz) | Resources Blocks ( $N_{RB}$ )                           | A-MPR (dB)                           |
|-------------------------|----------------------------|----------------------|-------------------------|---------------------------------------------------------|--------------------------------------|
| NS_01                   | 6.6.2.1.1                  | Table 5.2-1          | 1.4,3,5,10,15,20        | Table 5.4.2-1                                           | N/A                                  |
| NS_03                   | 6.6.2.2.3.1                | 2,4,10, 23, 25,35,36 | 3                       | >5                                                      | $\leq 1$                             |
|                         |                            |                      | 5                       | >6                                                      | $\leq 1$                             |
|                         |                            |                      | 10                      | >6                                                      | $\leq 1$                             |
|                         |                            |                      | 15                      | >8                                                      | $\leq 1$                             |
|                         |                            |                      | 20                      | >10                                                     | $\leq 1$                             |
| NS_04                   | 6.6.2.2.3.2                | 41                   | 5                       | >6                                                      | $\leq 1$                             |
|                         |                            |                      | 10, 15, 20              | Table 6.2.4.3-4                                         |                                      |
| NS_05                   | 6.6.3.3.3.1                | 1                    | 10,15,20                | $\geq 50$                                               | $\leq 1$                             |
| NS_06                   | 6.6.2.2.3.3                | 12, 13, 14, 17       | 1.4, 3, 5, 10           | Table 5.4.2-1                                           | N/A                                  |
| NS_07                   | 6.6.2.2.3.3<br>6.6.3.3.3.2 | 13                   | 10                      | Table 6.2.4.3-2                                         | Table 6.2.4.3-2                      |
| NS_08                   | 6.6.3.3.3.3                | 19                   | 10, 15                  | > 44                                                    | $\leq 3$                             |
| NS_09                   | 6.6.3.3.3.4                | 21                   | 10, 15                  | > 40                                                    | $\leq 1$                             |
|                         |                            |                      |                         | > 55                                                    | $\leq 2$                             |
| NS_10                   |                            | 20                   | 15, 20                  | Table 6.2.4.3-3                                         | Table 6.2.4.3-3                      |
| NS_11                   | 6.6.2.2.1<br>6.6.3.3.13    | 231                  | 1.4, 3, 5, 10,15,20     | Table 6.2.4.3-5                                         | Table 6.2.4.3-5                      |
| NS_12                   | 6.6.3.3.5                  | 26                   | 1.4, 3, 5               | Table 6.2.4.3-6                                         | Table 6.2.4.3-6                      |
| NS_13                   | 6.6.3.3.6                  | 26                   | 5                       | Table 6.2.4.3-7                                         | Table 6.2.4.3-7                      |
| NS_14                   | 6.6.3.3.7                  | 26                   | 10, 15                  | Table 6.2.4.3-8                                         | Table 6.2.4.3-8                      |
| NS_15                   | 6.6.3.3.8                  | 26                   | 1.4, 3, 5, 10, 15       | Table 6.2.4.3-9<br>Table 6.2.4.3-10                     | Table 6.2.4.3-9,<br>Table 6.2.4.3-10 |
| NS_16                   | 6.6.3.3.9                  | 27                   | 3, 5, 10                | Table 6.2.4.3-11, Table 6.2.4.3-12,<br>Table 6.2.4.3-13 |                                      |
| NS_17                   | 6.6.3.3.10                 | 28                   | 5, 10                   | Table 5.4.2-1                                           | N/A                                  |
|                         | 6.6.3.3.11                 | 28                   | 5                       | $\geq 2$                                                | $\leq 1$                             |
| NS_18                   |                            |                      | 10, 15, 20              | $\geq 1$                                                | $\leq 4$                             |
| NS_19                   |                            |                      | 10, 15, 20              | Table 6.2.4.3-15                                        | Table 6.2.4.3-15                     |
| NS_20                   |                            |                      | 5, 10, 15, 20           | Table 6.2.4.3-14                                        | Table 6.2.4.3-14                     |
| ...                     |                            |                      |                         |                                                         |                                      |
| NS_20                   | -                          | -                    | -                       | -                                                       | -                                    |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



**WIFI**

| Mode        | Data Rate (Mbps) | Channel | Frequency(MHz) | Avg. Burst Power(dBm) |
|-------------|------------------|---------|----------------|-----------------------|
| 802.11b     | 1                | 01      | 2412           | 9.01                  |
|             |                  | 06      | 2437           | 9.07                  |
|             |                  | 11      | 2462           | <b>9.16</b>           |
| 802.11g     | 6                | 01      | 2412           | 6.32                  |
|             |                  | 06      | 2437           | 7.11                  |
|             |                  | 11      | 2462           | 6.60                  |
| 802.11n(20) | 6.5              | 01      | 2412           | 6.32                  |
|             |                  | 06      | 2437           | 6.80                  |
|             |                  | 11      | 2462           | 6.35                  |
| 802.11n(40) | 13.5             | 03      | 2422           | 6.26                  |
|             |                  | 06      | 2437           | 7.19                  |
|             |                  | 09      | 2452           | 6.68                  |

**Bluetooth\_V4.0(BR/EDR)**

| Modulation     | Channel | Frequency(MHz) | Peak Power (dBm) |
|----------------|---------|----------------|------------------|
| GFSK           | 0       | 2402           | -1.371           |
|                | 39      | 2441           | <b>-0.486</b>    |
|                | 78      | 2480           | -2.709           |
| $\pi/4$ -DQPSK | 0       | 2402           | -2.392           |
|                | 39      | 2441           | -1.562           |
|                | 78      | 2480           | -3.342           |
| 8-DPSK         | 0       | 2402           | -2.559           |
|                | 39      | 2441           | -1.518           |
|                | 78      | 2480           | -3.321           |

**Bluetooth\_V4.0(BLE)**

| Modulation | Channel | Frequency(MHz) | Peak Power (dBm) |
|------------|---------|----------------|------------------|
| GFSK       | 0       | 2402           | -5.945           |
|            | 19      | 2440           | <b>-3.840</b>    |
|            | 39      | 2480           | -7.434           |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



## 13. TEST RESULTS

### 13.1. SAR Test Results Summary

#### 13.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE 1528-2013, Body-worn and 4 Edges SAR was performed with the device 10mm from the phantom.

#### 13.1.2. Operation Mode

1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional.
2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is  $\geq 0.8$ W/Kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
  - (1) When the original highest measured SAR is  $\geq 0.8$ W/Kg, repeat that measurement once.
  - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $>1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/Kg.
  - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is  $\geq 1.5$  W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is  $\geq 1.20$ .
3. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.
4. Per KDB 648474 D04 v01r03,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$ W/Kg, SAR testing with a headset connected is not required.
5. Per KDB 941225 D06 V02r01, When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations.
6. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:  
Maximum Scaling SAR =tested SAR (Max.)  $\times$  [maximum turn-up power (mw)/ maximum measurement output power(mw) ]
7. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
8. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
9. Per KDB 941125 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
10. Per KDB 941125 D05v02r03. For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1RB allocation and the highest reported SAR is  $>1.45$  W/Kg, the remaining required test channels must also be tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





11. Per KDB 941125 D05v02r03. 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45\text{W/Kg}$ , Per KDB 941225 D05v02r02, 16QAM SAR testing is not required.
12. Per KDB 941125 D05v02r03. Smaller bandwidth output power for each RB allocation configuration is >not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45\text{W/Kg}$ . Per KDB 941125 D05v02r03, smaller bandwidth SAR testing is not required.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



### 13.1.3. Test Result

| SAR MEASUREMENT                        |             |     |           |                             |                 |                          |                          |                   |              |
|----------------------------------------|-------------|-----|-----------|-----------------------------|-----------------|--------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15               |             |     |           | Relative Humidity (%): 49.5 |                 |                          |                          |                   |              |
| Product: Smart Phone                   |             |     |           |                             |                 |                          |                          |                   |              |
| Test Mode: GSM850 with GMSK modulation |             |     |           |                             |                 |                          |                          |                   |              |
| Position                               | Mode        | Ch. | Fr. (MHz) | Power Drift (<±5%)          | SAR (1g) (W/kg) | Max. Tune-up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
| SIM 1 Card                             |             |     |           |                             |                 |                          |                          |                   |              |
| Left Cheek                             | voice       | 190 | 836.6     | -0.39                       | 0.155           | 32.90                    | 32.84                    | 0.157             | 1.6          |
| Left Tilt                              | voice       | 190 | 836.6     | -0.32                       | 0.083           | 32.90                    | 32.84                    | 0.084             | 1.6          |
| Right Cheek                            | voice       | 190 | 836.6     | -0.65                       | 0.117           | 32.90                    | 32.84                    | 0.119             | 1.6          |
| Right Tilt                             | voice       | 190 | 836.6     | 0.28                        | 0.099           | 32.90                    | 32.84                    | 0.100             | 1.6          |
| Body back                              | voice       | 190 | 836.6     | -0.53                       | 0.106           | 32.90                    | 32.84                    | 0.107             | 1.6          |
| Body front                             | voice       | 190 | 836.6     | 0.27                        | 0.085           | 32.90                    | 32.84                    | 0.086             | 1.6          |
|                                        |             |     |           |                             |                 |                          |                          |                   |              |
| Body back                              | GPRS-2 slot | 190 | 836.6     | -0.38                       | 0.157           | 30.50                    | 30.23                    | 0.167             | 1.6          |
| Body front                             | GPRS-2 slot | 190 | 836.6     | 0.65                        | 0.121           | 30.50                    | 30.23                    | 0.129             | 1.6          |
| Edge 2(Right)                          | GPRS-2 slot | 190 | 836.6     | -0.26                       | 0.050           | 30.50                    | 30.23                    | 0.053             | 1.6          |
| Edge 3(Bottom)                         | GPRS-2 slot | 190 | 836.6     | 0.25                        | 0.124           | 30.50                    | 30.23                    | 0.132             | 1.6          |
| Edge 4(Left)                           | GPRS-2 slot | 190 | 836.6     | -0.32                       | 0.111           | 30.50                    | 30.23                    | 0.118             | 1.6          |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT                         |             |     |           |                    |                             |                          |                          |                   |              |
|-----------------------------------------|-------------|-----|-----------|--------------------|-----------------------------|--------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15                |             |     |           |                    | Relative Humidity (%): 49.8 |                          |                          |                   |              |
| Product: Smart Phone                    |             |     |           |                    |                             |                          |                          |                   |              |
| Test Mode: PCS1900 with GMSK modulation |             |     |           |                    |                             |                          |                          |                   |              |
| Position                                | Mode        | Ch. | Fr. (MHz) | Power Drift (<±5%) | SAR (1g) (W/kg)             | Max. Tune-up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
| SIM 1 Card                              |             |     |           |                    |                             |                          |                          |                   |              |
| Left Cheek                              | voice       | 661 | 1880.0    | 0.13               | 0.052                       | 30.60                    | 30.52                    | 0.053             | 1.6          |
| Left Tilt                               | voice       | 661 | 1880.0    | -0.05              | 0.048                       | 30.60                    | 30.52                    | 0.049             | 1.6          |
| Right Cheek                             | voice       | 661 | 1880.0    | -0.26              | <b>0.080</b>                | 30.60                    | 30.52                    | <b>0.081</b>      | 1.6          |
| Right Tilt                              | voice       | 661 | 1880.0    | -0.34              | 0.039                       | 30.60                    | 30.52                    | 0.040             | 1.6          |
| Body back                               | voice       | 661 | 1880.0    | 0.42               | <b>0.189</b>                | 30.60                    | 30.52                    | <b>0.193</b>      | 1.6          |
| Body front                              | voice       | 661 | 1880.0    | -0.28              | 0.149                       | 30.60                    | 30.52                    | 0.152             | 1.6          |
|                                         |             |     |           |                    |                             |                          |                          |                   |              |
| Body back                               | GPRS-2 slot | 661 | 1880.0    | -0.08              | 0.250                       | 28.70                    | 28.63                    | 0.254             | 1.6          |
| Body front                              | GPRS-2 slot | 661 | 1880.0    | -0.65              | 0.217                       | 28.70                    | 28.63                    | 0.221             | 1.6          |
| Edge 2(Right)                           | GPRS-2 slot | 661 | 1880.0    | -0.32              | 0.121                       | 28.70                    | 28.63                    | 0.123             | 1.6          |
| Edge 3(Bottom)                          | GPRS-2 slot | 661 | 1880.0    | -0.05              | <b>0.335</b>                | 28.70                    | 28.63                    | <b>0.340</b>      | 1.6          |
| Edge 4(Left)                            | GPRS-2 slot | 661 | 1880.0    | 0.27               | 0.019                       | 28.70                    | 28.63                    | 0.019             | 1.6          |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT                               |              |      |           |                             |                 |                          |                          |                   |              |
|-----------------------------------------------|--------------|------|-----------|-----------------------------|-----------------|--------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15                      |              |      |           | Relative Humidity (%): 49.8 |                 |                          |                          |                   |              |
| Product: Smart Phone                          |              |      |           |                             |                 |                          |                          |                   |              |
| Test Mode: WCDMA Band II with QPSK modulation |              |      |           |                             |                 |                          |                          |                   |              |
| Position                                      | Mode         | Ch.  | Fr. (MHz) | Power Drift (<±5%)          | SAR (1g) (W/kg) | Max. Tune-up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
| Left Cheek                                    | RMC 12.2kbps | 9400 | 1880      | -0.26                       | 0.089           | 24.10                    | 23.97                    | 0.092             | 1.6          |
| Left Tilt                                     | RMC 12.2kbps | 9400 | 1880      | 0.08                        | 0.051           | 24.10                    | 23.97                    | 0.053             | 1.6          |
| Right Cheek                                   | RMC 12.2kbps | 9400 | 1880      | 0.35                        | 0.093           | 24.10                    | 23.97                    | 0.096             | 1.6          |
| Right Tilt                                    | RMC 12.2kbps | 9400 | 1880      | -0.22                       | <b>0.103</b>    | 24.10                    | 23.97                    | <b>0.106</b>      | 1.6          |
| Body back                                     | RMC 12.2kbps | 9400 | 1880      | 0.69                        | 0.374           | 24.10                    | 23.97                    | 0.385             | 1.6          |
| Body front                                    | RMC 12.2kbps | 9400 | 1880      | -0.54                       | 0.248           | 24.10                    | 23.97                    | 0.256             | 1.6          |
| Edge 2(Right)                                 | RMC 12.2kbps | 9400 | 1880      | -0.26                       | 0.142           | 24.10                    | 23.97                    | 0.146             | 1.6          |
| Edge 3(Bottom)                                | RMC 12.2kbps | 9400 | 1880      | -0.51                       | <b>0.446</b>    | 24.10                    | 23.97                    | <b>0.460</b>      | 1.6          |
| Edge 4(Left)                                  | RMC 12.2kbps | 9400 | 1880      | 0.65                        | 0.023           | 24.10                    | 23.97                    | 0.024             | 1.6          |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





| SAR MEASUREMENT                               |              |      |           |                    |                             |                          |                          |                   |              |
|-----------------------------------------------|--------------|------|-----------|--------------------|-----------------------------|--------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15                      |              |      |           |                    | Relative Humidity (%): 46.7 |                          |                          |                   |              |
| Product: Smart Phone                          |              |      |           |                    |                             |                          |                          |                   |              |
| Test Mode: WCDMA Band IV with QPSK modulation |              |      |           |                    |                             |                          |                          |                   |              |
| Position                                      | Mode         | Ch.  | Fr. (MHz) | Power Drift (<±5%) | SAR (1g) (W/kg)             | Max. Tune-up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
| Left Cheek                                    | RMC 12.2kbps | 8662 | 1732.5    | -0.11              | 0.078                       | 23.30                    | 23.10                    | 0.082             | 1.6          |
| Left Tilt                                     | RMC 12.2kbps | 8662 | 1732.5    | 0.29               | 0.043                       | 23.30                    | 23.10                    | 0.045             | 1.6          |
| Right Cheek                                   | RMC 12.2kbps | 8662 | 1732.5    | -0.35              | <b>0.094</b>                | 23.30                    | 23.10                    | <b>0.098</b>      | 1.6          |
| Right Tilt                                    | RMC 12.2kbps | 8662 | 1732.5    | -0.68              | 0.045                       | 23.30                    | 23.10                    | 0.047             | 1.6          |
| Body back                                     | RMC 12.2kbps | 8662 | 1732.5    | -0.08              | 0.273                       | 23.30                    | 23.10                    | 0.286             | 1.6          |
| Body front                                    | RMC 12.2kbps | 8662 | 1732.5    | -0.55              | 0.103                       | 23.30                    | 23.10                    | 0.108             | 1.6          |
| Edge 2(Right)                                 | RMC 12.2kbps | 8662 | 1732.5    | 0.38               | 0.168                       | 23.30                    | 23.10                    | 0.176             | 1.6          |
| Edge 3(Bottom)                                | RMC 12.2kbps | 8662 | 1732.5    | -0.26              | <b>0.379</b>                | 23.30                    | 23.10                    | <b>0.397</b>      | 1.6          |
| Edge 4(Left)                                  | RMC 12.2kbps | 8662 | 1732.5    | 0.33               | 0.070                       | 23.30                    | 23.10                    | 0.073             | 1.6          |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT                              |              |      |           |                             |                 |                          |                          |                   |              |
|----------------------------------------------|--------------|------|-----------|-----------------------------|-----------------|--------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15                     |              |      |           | Relative Humidity (%): 49.5 |                 |                          |                          |                   |              |
| Product: Smart Phone                         |              |      |           |                             |                 |                          |                          |                   |              |
| Test Mode: WCDMA Band V with QPSK modulation |              |      |           |                             |                 |                          |                          |                   |              |
| Position                                     | Mode         | Ch.  | Fr. (MHz) | Power Drift (<±5%)          | SAR (1g) (W/kg) | Max. Tune-up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
| Left Cheek                                   | RMC 12.2kbps | 4183 | 836.6     | -0.39                       | 0.137           | 23.80                    | 23.66                    | 0.141             | 1.6          |
| Left Tilt                                    | RMC 12.2kbps | 4183 | 836.6     | -0.26                       | 0.087           | 23.80                    | 23.66                    | 0.090             | 1.6          |
| Right Cheek                                  | RMC 12.2kbps | 4183 | 836.6     | -0.35                       | 0.105           | 23.80                    | 23.66                    | 0.108             | 1.6          |
| Right Tilt                                   | RMC 12.2kbps | 4183 | 836.6     | -0.27                       | 0.078           | 23.80                    | 23.66                    | 0.081             | 1.6          |
| Body back                                    | RMC 12.2kbps | 4183 | 836.6     | -0.46                       | 0.207           | 23.80                    | 23.66                    | 0.214             | 1.6          |
| Body front                                   | RMC 12.2kbps | 4183 | 836.6     | -0.61                       | 0.190           | 23.80                    | 23.66                    | 0.196             | 1.6          |
| Edge 2(Right)                                | RMC 12.2kbps | 4183 | 836.6     | -0.35                       | 0.083           | 23.80                    | 23.66                    | 0.086             | 1.6          |
| Edge 3(Bottom)                               | RMC 12.2kbps | 4183 | 836.6     | 0.28                        | 0.156           | 23.80                    | 23.66                    | 0.161             | 1.6          |
| Edge 4(Left)                                 | RMC 12.2kbps | 4183 | 836.6     | 0.75                        | 0.184           | 23.80                    | 23.66                    | 0.190             | 1.6          |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT          |      |                |                  |             |       |                             |                    |                 |                          |                          |                   |              |
|--------------------------|------|----------------|------------------|-------------|-------|-----------------------------|--------------------|-----------------|--------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15 |      |                |                  |             |       | Relative Humidity (%): 48.1 |                    |                 |                          |                          |                   |              |
| Product: Smart Phone     |      |                |                  |             |       |                             |                    |                 |                          |                          |                   |              |
| Test Mode: LTE Band 2    |      |                |                  |             |       |                             |                    |                 |                          |                          |                   |              |
| BM MHz                   | MOD  | Position       | Test Mode        |             | Ch.   | Freq. (MHz)                 | Power Drift (<±5%) | SAR (1g) (W/kg) | Max. Tune up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
|                          |      |                | UL RB Allocation | UL RB START |       |                             |                    |                 |                          |                          |                   |              |
| 20                       | QPSK | Left Cheek     | 1                | 0           | 18900 | 1880                        | 0.52               | 0.093           | 24.90                    | 24.60                    | 0.100             | 1.6          |
|                          |      | Left Tilt      | 1                | 0           | 18900 | 1880                        | 0.26               | 0.052           | 24.90                    | 24.60                    | 0.056             | 1.6          |
|                          |      | Right Cheek    | 1                | 0           | 18900 | 1880                        | -0.46              | <b>0.131</b>    | 24.90                    | 24.60                    | <b>0.140</b>      | 1.6          |
|                          |      | Right Tilt     | 1                | 0           | 18900 | 1880                        | -0.71              | 0.060           | 24.90                    | 24.60                    | 0.064             | 1.6          |
|                          |      | Body back      | 1                | 0           | 18900 | 1880                        | -0.32              | 0.403           | 24.90                    | 24.60                    | 0.432             | 1.6          |
|                          |      | Body front     | 1                | 0           | 18900 | 1880                        | -0.05              | 0.264           | 24.90                    | 24.60                    | 0.283             | 1.6          |
|                          |      | Edge 2(Right)  | 1                | 0           | 18900 | 1880                        | -0.28              | 0.219           | 24.90                    | 24.60                    | 0.235             | 1.6          |
|                          |      | Edge 3(Bottom) | 1                | 0           | 18900 | 1880                        | 0.65               | <b>0.549</b>    | 24.90                    | 24.60                    | <b>0.588</b>      | 1.6          |
|                          |      | Edge 4(Left)   | 1                | 0           | 18900 | 1880                        | 0.20               | 0.034           | 24.90                    | 24.60                    | 0.036             | 1.6          |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT          |      |                |                     |                |       |                             |                          |                       |                                      |                                   |                         |                 |
|--------------------------|------|----------------|---------------------|----------------|-------|-----------------------------|--------------------------|-----------------------|--------------------------------------|-----------------------------------|-------------------------|-----------------|
| Depth of Liquid (cm):>15 |      |                |                     |                |       | Relative Humidity (%): 46.7 |                          |                       |                                      |                                   |                         |                 |
| Product: Smart Phone     |      |                |                     |                |       |                             |                          |                       |                                      |                                   |                         |                 |
| Test Mode: LTE Band 4    |      |                |                     |                |       |                             |                          |                       |                                      |                                   |                         |                 |
| BM<br>MHz                | MOD  | Position       | Test Mode           |                | Ch.   | Freq.<br>(MHz)              | Power<br>Drift<br>(≤±5%) | SAR<br>(1g)<br>(W/kg) | Max.<br>Tuneu<br>p<br>Power<br>(dBm) | Meas.<br>output<br>Power<br>(dBm) | Scaled<br>SAR<br>(W/Kg) | Limit<br>(W/kg) |
|                          |      |                | UL RB<br>Allocation | UL RB<br>START |       |                             |                          |                       |                                      |                                   |                         |                 |
| 20                       | QPSK | Left Cheek     | 1                   | 0              | 20175 | 1732.5                      | -0.08                    | 0.244                 | 24.10                                | 23.77                             | 0.263                   | 1.6             |
|                          |      | Left Tilt      | 1                   | 0              | 20175 | 1732.5                      | -0.35                    | 0.098                 | 24.10                                | 23.77                             | 0.106                   | 1.6             |
|                          |      | Right Cheek    | 1                   | 0              | 20175 | 1732.5                      | -0.27                    | 0.178                 | 24.10                                | 23.77                             | 0.192                   | 1.6             |
|                          |      | Right Tilt     | 1                   | 0              | 20175 | 1732.5                      | -0.15                    | 0.122                 | 24.10                                | 23.77                             | 0.132                   | 1.6             |
|                          |      | Body back      | 1                   | 0              | 20175 | 1732.5                      | 0.36                     | 0.441                 | 24.10                                | 23.77                             | 0.476                   | 1.6             |
|                          |      | Body front     | 1                   | 0              | 20175 | 1732.5                      | -0.38                    | 0.381                 | 24.10                                | 23.77                             | 0.411                   | 1.6             |
|                          |      | Edge 2(Right)  | 1                   | 0              | 20175 | 1732.5                      | -0.52                    | 0.247                 | 24.10                                | 23.77                             | 0.266                   | 1.6             |
|                          |      | Edge 3(Bottom) | 1                   | 0              | 20050 | 1720                        | --0.07                   | 0.853                 | 24.10                                | 23.78                             | 0.918                   | 1.6             |
|                          |      | Edge 3(Bottom) | 1                   | 0              | 20175 | 1732.5                      | 0.22                     | 0.858                 | 24.10                                | 23.77                             | 0.926                   | 1.6             |
|                          |      | Edge 3(Bottom) | 1                   | 0              | 20300 | 1745                        | -0.06                    | 0.866                 | 24.10                                | 23.63                             | 0.965                   | 1.6             |
|                          |      | Edge 4(Left)   | 1                   | 0              | 20175 | 1732.5                      | 0.32                     | 0.074                 | 24.10                                | 23.77                             | 0.080                   | 1.6             |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





| SAR MEASUREMENT          |      |                |                         |                |       |                             |                          |                       |                                  |                                   |                         |                 |
|--------------------------|------|----------------|-------------------------|----------------|-------|-----------------------------|--------------------------|-----------------------|----------------------------------|-----------------------------------|-------------------------|-----------------|
| Depth of Liquid (cm):>15 |      |                |                         |                |       | Relative Humidity (%): 46.7 |                          |                       |                                  |                                   |                         |                 |
| Product: Smart Phone     |      |                |                         |                |       |                             |                          |                       |                                  |                                   |                         |                 |
| Test Mode: LTE Band 5    |      |                |                         |                |       |                             |                          |                       |                                  |                                   |                         |                 |
| BM<br>MHz                | MOD  | Position       | Test Mode               |                | Ch.   | Freq.<br>(MHz)              | Power<br>Drift<br>(<±5%) | SAR<br>(1g)<br>(W/kg) | Max.<br>Tuneup<br>Power<br>(dBm) | Meas.<br>output<br>Power<br>(dBm) | Scaled<br>SAR<br>(W/Kg) | Limit<br>(W/kg) |
|                          |      |                | UL RB<br>Allocati<br>on | UL RB<br>START |       |                             |                          |                       |                                  |                                   |                         |                 |
| 10                       | QPSK | Left Cheek     | 1                       | 0              | 20525 | 836.5                       | -0.06                    | <b>0.131</b>          | 23.80                            | 23.45                             | <b>0.142</b>            | 1.6             |
|                          |      | Left Tilt      | 1                       | 0              | 20525 | 836.5                       | -0.28                    | 0.071                 | 23.80                            | 23.45                             | 0.077                   | 1.6             |
|                          |      | Right Cheek    | 1                       | 0              | 20525 | 836.5                       | -0.57                    | 0.104                 | 23.80                            | 23.45                             | 0.113                   | 1.6             |
|                          |      | Right Tilt     | 1                       | 0              | 20525 | 836.5                       | 0.24                     | 0.080                 | 23.80                            | 23.45                             | 0.087                   | 1.6             |
|                          |      | Body back      | 1                       | 0              | 20525 | 836.5                       | -0.36                    | <b>0.087</b>          | 23.80                            | 23.45                             | <b>0.094</b>            | 1.6             |
|                          |      | Body front     | 1                       | 0              | 20525 | 836.5                       | -0.32                    | 0.068                 | 23.80                            | 23.45                             | 0.074                   | 1.6             |
|                          |      | Edge 2(Right)  | 1                       | 0              | 20525 | 836.5                       | -0.05                    | 0.026                 | 23.80                            | 23.45                             | 0.028                   | 1.6             |
|                          |      | Edge 3(Bottom) | 1                       | 0              | 20525 | 836.5                       | -0.47                    | 0.072                 | 23.80                            | 23.45                             | 0.078                   | 1.6             |
|                          |      | Edge 4(Left)   | 1                       | 0              | 20525 | 836.5                       | 0.32                     | 0.064                 | 23.80                            | 23.45                             | 0.069                   | 1.6             |

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT          |      |                |                  |             |       |                             |                    |                 |                         |                          |                   |              |
|--------------------------|------|----------------|------------------|-------------|-------|-----------------------------|--------------------|-----------------|-------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15 |      |                |                  |             |       | Relative Humidity (%): 48.0 |                    |                 |                         |                          |                   |              |
| Product: Smart Phone     |      |                |                  |             |       |                             |                    |                 |                         |                          |                   |              |
| Test Mode: LTE Band 7    |      |                |                  |             |       |                             |                    |                 |                         |                          |                   |              |
| BM MHz                   | MOD  | Position       | Test Mode        |             | Ch.   | Freq. (MHz)                 | Power Drift (<±5%) | SAR (1g) (W/kg) | Max. Tuneup Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
|                          |      |                | UL RB Allocation | UL RB START |       |                             |                    |                 |                         |                          |                   |              |
| 20                       | QPSK | Left Cheek     | 1                | 0           | 21100 | 2535                        | -0.65              | 0.095           | 24.10                   | 23.96                    | 0.098             | 1.6          |
|                          |      | Left Tilt      | 1                | 0           | 21100 | 2535                        | 0.26               | 0.043           | 24.10                   | 23.96                    | 0.044             | 1.6          |
|                          |      | Right Cheek    | 1                | 0           | 21100 | 2535                        | -0.35              | 0.091           | 24.10                   | 23.96                    | 0.094             | 1.6          |
|                          |      | Right Tilt     | 1                | 0           | 21100 | 2535                        | -0.27              | 0.044           | 24.10                   | 23.96                    | 0.045             | 1.6          |
|                          |      | Body back      | 1                | 0           | 21100 | 2535                        | -0.42              | 0.291           | 24.10                   | 23.96                    | 0.301             | 1.6          |
|                          |      | Body front     | 1                | 0           | 21100 | 2535                        | -0.06              | 0.230           | 24.10                   | 23.96                    | 0.238             | 1.6          |
|                          |      | Edge 2(Right)  | 1                | 0           | 21100 | 2535                        | -0.35              | 0.176           | 24.10                   | 23.96                    | 0.182             | 1.6          |
|                          |      | Edge 3(Bottom) | 1                | 0           | 21100 | 2535                        | -0.27              | 0.742           | 24.10                   | 23.96                    | 0.766             | 1.6          |
|                          |      | Edge 4(Left)   | 1                | 0           | 21100 | 2535                        | 0.19               | 0.072           | 24.10                   | 23.96                    | 0.074             | 1.6          |

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT          |      |                |                  |             |                             |             |                    |                 |                         |                          |                   |              |
|--------------------------|------|----------------|------------------|-------------|-----------------------------|-------------|--------------------|-----------------|-------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15 |      |                |                  |             | Relative Humidity (%): 47.6 |             |                    |                 |                         |                          |                   |              |
| Product: Smart Phone     |      |                |                  |             |                             |             |                    |                 |                         |                          |                   |              |
| Test Mode: LTE Band 12   |      |                |                  |             |                             |             |                    |                 |                         |                          |                   |              |
| BM MHz                   | MOD  | Position       | Test Mode        |             | Ch.                         | Freq. (MHz) | Power Drift (<±5%) | SAR (1g) (W/kg) | Max. Tuneup Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
|                          |      |                | UL RB Allocation | UL RB START |                             |             |                    |                 |                         |                          |                   |              |
| 10                       | QPSK | Left Cheek     | 1                | 0           | 23095                       | 707.5       | -0.05              | 0.017           | 24.10                   | 23.08                    | 0.022             | 1.6          |
|                          |      | Left Tilt      | 1                | 0           | 23095                       | 707.5       | 0.44               | 0.010           | 24.10                   | 23.08                    | 0.013             | 1.6          |
|                          |      | Right Cheek    | 1                | 0           | 23095                       | 707.5       | -0.35              | 0.014           | 24.10                   | 23.08                    | 0.018             | 1.6          |
|                          |      | Right Tilt     | 1                | 0           | 23095                       | 707.5       | 0.32               | 0.011           | 24.10                   | 23.08                    | 0.014             | 1.6          |
|                          |      | Body back      | 1                | 0           | 23095                       | 707.5       | -0.07              | 0.023           | 24.10                   | 23.08                    | 0.029             | 1.6          |
|                          |      | Body front     | 1                | 0           | 23095                       | 707.5       | -0.42              | 0.021           | 24.10                   | 23.08                    | 0.027             | 1.6          |
|                          |      | Edge 2(Right)  | 1                | 0           | 23095                       | 707.5       | -0.16              | 0.015           | 24.10                   | 23.08                    | 0.019             | 1.6          |
|                          |      | Edge 3(Bottom) | 1                | 0           | 23095                       | 707.5       | -0.25              | 0.009           | 24.10                   | 23.08                    | 0.011             | 1.6          |
|                          |      | Edge 4(Left)   | 1                | 0           | 23095                       | 707.5       | 0.27               | 0.021           | 24.10                   | 23.08                    | 0.027             | 1.6          |

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



| SAR MEASUREMENT          |      |                |                  |             |                             |             |                    |                 |                         |                          |                   |              |
|--------------------------|------|----------------|------------------|-------------|-----------------------------|-------------|--------------------|-----------------|-------------------------|--------------------------|-------------------|--------------|
| Depth of Liquid (cm):>15 |      |                |                  |             | Relative Humidity (%): 47.6 |             |                    |                 |                         |                          |                   |              |
| Product: Smart Phone     |      |                |                  |             |                             |             |                    |                 |                         |                          |                   |              |
| Test Mode: LTE Band 17   |      |                |                  |             |                             |             |                    |                 |                         |                          |                   |              |
| BM MHz                   | MOD  | Position       | Test Mode        |             | Ch.                         | Freq. (MHz) | Power Drift (<±5%) | SAR (1g) (W/kg) | Max. Tuneup Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit (W/kg) |
|                          |      |                | UL RB Allocation | UL RB START |                             |             |                    |                 |                         |                          |                   |              |
| 10                       | QPSK | Left Cheek     | 1                | 0           | 23790                       | 710         | -0.06              | 0.017           | 24.10                   | 23.25                    | 0.021             | 1.6          |
|                          |      | Left Tilt      | 1                | 0           | 23790                       | 710         | -0.38              | 0.010           | 24.10                   | 23.25                    | 0.012             | 1.6          |
|                          |      | Right Cheek    | 1                | 0           | 23790                       | 710         | -0.05              | 0.015           | 24.10                   | 23.25                    | 0.018             | 1.6          |
|                          |      | Right Tilt     | 1                | 0           | 23790                       | 710         | 0.27               | 0.012           | 24.10                   | 23.25                    | 0.015             | 1.6          |
|                          |      | Body back      | 1                | 0           | 23790                       | 710         | -0.42              | 0.024           | 24.10                   | 23.25                    | 0.029             | 1.6          |
|                          |      | Body front     | 1                | 0           | 23790                       | 710         | -0.06              | 0.021           | 24.10                   | 23.25                    | 0.026             | 1.6          |
|                          |      | Edge 2(Right)  | 1                | 0           | 23790                       | 710         | -0.28              | 0.016           | 24.10                   | 23.25                    | 0.019             | 1.6          |
|                          |      | Edge 3(Bottom) | 1                | 0           | 23790                       | 710         | -0.57              | 0.009           | 24.10                   | 23.25                    | 0.011             | 1.6          |
|                          |      | Edge 4(Left)   | 1                | 0           | 23790                       | 710         | 0.32               | 0.021           | 24.10                   | 23.25                    | 0.026             | 1.6          |

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

| Repeated SAR          |      |                |                  |             |       |             |                    |                      |                    |                       |              |
|-----------------------|------|----------------|------------------|-------------|-------|-------------|--------------------|----------------------|--------------------|-----------------------|--------------|
| Product: Smart Phone  |      |                |                  |             |       |             |                    |                      |                    |                       |              |
| Test Mode: LTE Band 4 |      |                |                  |             |       |             |                    |                      |                    |                       |              |
| BM MHz                | MOD  | Position       | Test Mode        |             | Ch.   | Freq. (MHz) | Power Drift (<±5%) | Once SAR (1g) (W/kg) | Power Drift (<±5%) | Twice SAR (1g) (W/kg) | Limit (W/kg) |
|                       |      |                | UL RB Allocation | UL RB START |       |             |                    |                      |                    |                       |              |
| 20                    | QPSK | Edge 3(Bottom) | 1                | 0           | 20300 | 1745        | -0.03              | 0.858                | --                 | --                    | 1.6          |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





## Simultaneous Multi-band Transmission Evaluation:

### Application Simultaneous Transmission information:

| NO | Simultaneous state              | Portable Handset |           |         |
|----|---------------------------------|------------------|-----------|---------|
|    |                                 | Head             | Body-worn | Hotspot |
| 1  | GSM(voice)+ WLAN 2.4GHz (data)  | Yes              | Yes       | -       |
| 2  | GSM(voice)+ Bluetooth(data)     | -                | Yes       | -       |
| 3  | GSM (Data) + WLAN 2.4GHz (data) | -                | Yes       | Yes     |
| 4  | GSM (Data) + Bluetooth(data)    | -                | Yes       | Yes     |
| 5  | WCDMA+ WLAN 2.4GHz (data)       | Yes              | Yes       | Yes     |
| 6  | WCDMA+ Bluetooth(data)          | -                | Yes       | Yes     |
| 7  | LTE + WLAN 2.4GHz (data)        | Yes              | Yes       | Yes     |
| 8  | LTE + Bluetooth(data)           | --               | Yes       | Yes     |

#### NOTE:

1. WIFI and BT share the same antenna, and cannot transmit simultaneously.
2. Simultaneous with every transmitter must be the same test position.
3. KDB 447498 D01, BT and WIFI SAR is excluded as below table.
4. KDB 447498 D01, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR and 10mm for body-worn SAR.
5. According to KDB 447498 D01 4.3.1, Standalone SAR test exclusion is as follow:  
For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR, and  $\leq 7.5$  for 10-g extremity SAR<sup>30</sup>, where
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation<sup>31</sup>
  - The result is rounded to one decimal place for comparison
  - The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below
The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.
6. If the test separation distance is  $< 5$ mm, 5mm is used for excluded SAR calculation.
7. According to KDB 447498 D01 4.3.2, simultaneous transmission SAR test exclusion is as follow:
  - (1) Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.
  - (2) Any transmitters and antennas should be considered when calculating simultaneous mode.
  - (3) For mobile phone and PC, it's the sum of all transmitters and antennas at the same mode with same position in each applicable exposure condition
  - (4) When the standalone SAR test exclusion of section 4.3.2 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to det
$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg for test separation distances } \leq 50 \text{ mm};$$
where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



8. When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The ratio is determined by  $(SAR1 + SAR2)1.5/R_i$ , rounded to two decimal digits, and must be  $\leq 0.04$  for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

| Estimated SAR |      | Max Power including Tune-up Tolerance |       | Separation Distance (mm) | Estimated SAR (W/kg) |
|---------------|------|---------------------------------------|-------|--------------------------|----------------------|
|               |      | dBm                                   | mW    |                          |                      |
| BT            | Head | -0.30                                 | 0.933 | 0                        | 0.039                |
|               | Body | -0.30                                 | 0.933 | 10                       | 0.019                |
| WIFI          | Head | 9.20                                  | 8.318 | 0                        | 0.349                |
|               | Body | 9.20                                  | 8.318 | 10                       | 0.174                |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Sum of the SAR for GSM 850 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | GSM 850                            | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head (voice)           | Left Touch    | 0.157                              | 0.349          |           | 0.506                   | No             |
|                        | Left Tilt     | 0.084                              | 0.349          |           | 0.433                   | No             |
|                        | Right Touch   | 0.119                              | 0.349          |           | 0.468                   | No             |
|                        | Right Tilt    | 0.100                              | 0.349          |           | 0.449                   | No             |
| Body-worn (voice)      | Rear          | 0.107                              | 0.174          |           | 0.281                   | No             |
|                        |               | 0.107                              |                | 0.019     | 0.126                   | No             |
|                        | Front         | 0.086                              | 0.174          |           | 0.260                   | No             |
|                        |               | 0.086                              |                | 0.019     | 0.105                   | No             |
| Body-worn (Data)       | Rear          | 0.167                              |                | 0.019     | 0.186                   | No             |
|                        |               | 0.167                              | 0.174          |           | 0.341                   | No             |
|                        | Front         | 0.129                              |                | 0.019     | 0.148                   | No             |
|                        |               | 0.129                              | 0.174          |           | 0.303                   | No             |
| Body-worn (Hotspot)    | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.053                              | 0.174          |           | 0.227                   | No             |
|                        | Edge 3        | 0.132                              | 0.174          |           | 0.306                   | No             |
|                        | Edge 4        | 0.118                              | 0.174          |           | 0.292                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.053                              |                | 0.019     | 0.072                   | No             |
|                        | Edge 3        | 0.132                              |                | 0.019     | 0.151                   | No             |
|                        | Edge 4        | 0.118                              |                | 0.019     | 0.137                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for GSM 1900 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | PCS 1900                           | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head (voice)           | Left Touch    | 0.053                              | 0.349          |           | 0.402                   | No             |
|                        | Left Tilt     | 0.049                              | 0.349          |           | 0.398                   | No             |
|                        | Right Touch   | 0.081                              | 0.349          |           | 0.430                   | No             |
|                        | Right Tilt    | 0.040                              | 0.349          |           | 0.389                   | No             |
| Body-worn (voice)      | Rear          | 0.193                              | 0.174          |           | 0.367                   | No             |
|                        |               | 0.193                              |                | 0.019     | 0.212                   | No             |
|                        | Front         | 0.152                              | 0.174          |           | 0.326                   | No             |
|                        |               | 0.152                              |                | 0.019     | 0.171                   | No             |
| Body-worn (Data)       | Rear          | 0.254                              |                | 0.019     | 0.273                   | No             |
|                        |               | 0.254                              | 0.174          |           | 0.428                   | No             |
|                        | Front         | 0.221                              |                | 0.019     | 0.240                   | No             |
|                        |               | 0.221                              | 0.174          |           | 0.395                   | No             |
| Body-worn (Hotspot)    | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.123                              | 0.174          |           | 0.297                   | No             |
|                        | Edge 3        | 0.340                              | 0.174          |           | 0.514                   | No             |
|                        | Edge 4        | 0.019                              | 0.174          |           | 0.193                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.123                              |                | 0.019     | 0.142                   | No             |
|                        | Edge 3        | 0.340                              |                | 0.019     | 0.359                   | No             |
|                        | Edge 4        | 0.019                              |                | 0.019     | 0.038                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





**Sum of the SAR for WCDMA Band II & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | WCDMA Band II                      | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.092                              | 0.349          |           | 0.441                   | No             |
|                        | Left Tilt     | 0.053                              | 0.349          |           | 0.402                   | No             |
|                        | Right Touch   | 0.096                              | 0.349          |           | 0.445                   | No             |
|                        | Right Tilt    | 0.106                              | 0.349          |           | 0.455                   | No             |
| Body-worn              | Rear          | 0.385                              | 0.174          |           | 0.559                   | No             |
|                        | Front         | 0.256                              | 0.174          |           | 0.430                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.146                              | 0.174          |           | 0.320                   | No             |
|                        | Edge 3        | 0.460                              | 0.174          |           | 0.634                   | No             |
|                        | Edge 4        | 0.024                              | 0.174          |           | 0.198                   | No             |
|                        | Rear          | 0.385                              |                | 0.019     | 0.404                   | No             |
|                        | Front         | 0.256                              |                | 0.019     | 0.275                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.146                              |                | 0.019     | 0.165                   | No             |
|                        | Edge 3        | 0.460                              |                | 0.019     | 0.479                   | No             |
|                        | Edge 4        | 0.024                              |                | 0.019     | 0.043                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for WCDMA Band IV & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | WCDMA Band IV                      | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.082                              | 0.349          |           | 0.431                   | No             |
|                        | Left Tilt     | 0.045                              | 0.349          |           | 0.394                   | No             |
|                        | Right Touch   | 0.098                              | 0.349          |           | 0.447                   | No             |
|                        | Right Tilt    | 0.047                              | 0.349          |           | 0.396                   | No             |
| Body-worn              | Rear          | 0.286                              | 0.174          |           | 0.460                   | No             |
|                        | Front         | 0.108                              | 0.174          |           | 0.282                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.176                              | 0.174          |           | 0.350                   | No             |
|                        | Edge 3        | 0.397                              | 0.174          |           | 0.571                   | No             |
|                        | Edge 4        | 0.073                              | 0.174          |           | 0.247                   | No             |
|                        | Rear          | 0.286                              |                | 0.019     | 0.305                   | No             |
|                        | Front         | 0.108                              |                | 0.019     | 0.127                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.176                              |                | 0.019     | 0.195                   | No             |
|                        | Edge 3        | 0.397                              |                | 0.019     | 0.416                   | No             |
|                        | Edge 4        | 0.073                              |                | 0.019     | 0.092                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for WCDMA Band V & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | WCDMA Band V                       | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.141                              | 0.349          |           | 0.490                   | No             |
|                        | Left Tilt     | 0.090                              | 0.349          |           | 0.439                   | No             |
|                        | Right Touch   | 0.108                              | 0.349          |           | 0.457                   | No             |
|                        | Right Tilt    | 0.081                              | 0.349          |           | 0.430                   | No             |
| Body-worn              | Rear          | 0.214                              | 0.174          |           | 0.388                   | No             |
|                        | Front         | 0.196                              | 0.174          |           | 0.370                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.086                              | 0.174          |           | 0.260                   | No             |
|                        | Edge 3        | 0.161                              | 0.174          |           | 0.335                   | No             |
|                        | Edge 4        | 0.190                              | 0.174          |           | 0.364                   | No             |
|                        | Rear          | 0.214                              |                | 0.019     | 0.233                   | No             |
|                        | Front         | 0.196                              |                | 0.019     | 0.215                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.086                              |                | 0.019     | 0.105                   | No             |
|                        | Edge 3        | 0.161                              |                | 0.019     | 0.180                   | No             |
|                        | Edge 4        | 0.190                              |                | 0.019     | 0.209                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for LTE Band 2 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | LTE Band 2                         | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.100                              | 0.349          |           | 0.449                   | No             |
|                        | Left Tilt     | 0.056                              | 0.349          |           | 0.405                   | No             |
|                        | Right Touch   | 0.140                              | 0.349          |           | 0.489                   | No             |
|                        | Right Tilt    | 0.064                              | 0.349          |           | 0.413                   | No             |
| Body-worn              | Rear          | 0.432                              | 0.174          |           | 0.606                   | No             |
|                        | Front         | 0.283                              | 0.174          |           | 0.457                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.235                              | 0.174          |           | 0.409                   | No             |
|                        | Edge 3        | 0.588                              | 0.174          |           | 0.762                   | No             |
|                        | Edge 4        | 0.036                              | 0.174          |           | 0.210                   | No             |
|                        | Rear          | 0.432                              |                | 0.019     | 0.451                   | No             |
|                        | Front         | 0.283                              |                | 0.019     | 0.302                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.235                              |                | 0.019     | 0.254                   | No             |
|                        | Edge 3        | 0.588                              |                | 0.019     | 0.607                   | No             |
|                        | Edge 4        | 0.036                              |                | 0.019     | 0.055                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





**Sum of the SAR for LTE Band 4 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | LTE Band 4                         | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.263                              | 0.349          |           | 0.612                   | No             |
|                        | Left Tilt     | 0.106                              | 0.349          |           | 0.455                   | No             |
|                        | Right Touch   | 0.192                              | 0.349          |           | 0.541                   | No             |
|                        | Right Tilt    | 0.132                              | 0.349          |           | 0.481                   | No             |
| Body-worn              | Rear          | 0.476                              | 0.174          |           | 0.650                   | No             |
|                        | Front         | 0.411                              | 0.174          |           | 0.585                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.266                              | 0.174          |           | 0.440                   | No             |
|                        | Edge 3        | 0.965                              | 0.174          |           | <b>1.139</b>            | No             |
|                        | Edge 4        | 0.080                              | 0.174          |           | 0.254                   | No             |
|                        | Rear          | 0.476                              |                | 0.019     | 0.495                   | No             |
|                        | Front         | 0.411                              |                | 0.019     | 0.430                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.266                              |                | 0.019     | 0.285                   | No             |
|                        | Edge 3        | 0.965                              |                | 0.019     | 0.984                   | No             |
|                        | Edge 4        | 0.080                              |                | 0.019     | 0.099                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for LTE Band 5 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | LTE Band 5                         | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.142                              | 0.349          |           | 0.491                   | No             |
|                        | Left Tilt     | 0.077                              | 0.349          |           | 0.426                   | No             |
|                        | Right Touch   | 0.113                              | 0.349          |           | 0.462                   | No             |
|                        | Right Tilt    | 0.087                              | 0.349          |           | 0.436                   | No             |
| Body-worn              | Rear          | 0.094                              | 0.174          |           | 0.268                   | No             |
|                        | Front         | 0.074                              | 0.174          |           | 0.248                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.028                              | 0.174          |           | 0.202                   | No             |
|                        | Edge 3        | 0.078                              | 0.174          |           | 0.252                   | No             |
|                        | Edge 4        | 0.069                              | 0.174          |           | 0.243                   | No             |
|                        | Rear          | 0.094                              |                | 0.019     | 0.113                   | No             |
|                        | Front         | 0.074                              |                | 0.019     | 0.093                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.028                              |                | 0.019     | 0.047                   | No             |
|                        | Edge 3        | 0.078                              |                | 0.019     | 0.097                   | No             |
|                        | Edge 4        | 0.069                              |                | 0.019     | 0.088                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for LTE Band 7 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | LTE Band 7                         | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.098                              | 0.349          |           | 0.447                   | No             |
|                        | Left Tilt     | 0.044                              | 0.349          |           | 0.393                   | No             |
|                        | Right Touch   | 0.094                              | 0.349          |           | 0.443                   | No             |
|                        | Right Tilt    | 0.045                              | 0.349          |           | 0.394                   | No             |
| Body-worn              | Rear          | 0.301                              | 0.174          |           | 0.475                   | No             |
|                        | Front         | 0.238                              | 0.174          |           | 0.412                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.182                              | 0.174          |           | 0.356                   | No             |
|                        | Edge 3        | 0.766                              | 0.174          |           | 0.940                   | No             |
|                        | Edge 4        | 0.074                              | 0.174          |           | 0.248                   | No             |
|                        | Rear          | 0.301                              |                | 0.019     | 0.320                   | No             |
|                        | Front         | 0.238                              |                | 0.019     | 0.257                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.182                              |                | 0.019     | 0.201                   | No             |
|                        | Edge 3        | 0.766                              |                | 0.019     | 0.785                   | No             |
|                        | Edge 4        | 0.074                              |                | 0.019     | 0.093                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for LTE Band 12 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | LTE Band 12                        | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.022                              | 0.349          |           | 0.371                   | No             |
|                        | Left Tilt     | 0.013                              | 0.349          |           | 0.362                   | No             |
|                        | Right Touch   | 0.018                              | 0.349          |           | 0.367                   | No             |
|                        | Right Tilt    | 0.014                              | 0.349          |           | 0.363                   | No             |
| Body-worn              | Rear          | 0.029                              | 0.174          |           | 0.203                   | No             |
|                        | Front         | 0.027                              | 0.174          |           | 0.201                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.019                              | 0.174          |           | 0.193                   | No             |
|                        | Edge 3        | 0.011                              | 0.174          |           | 0.185                   | No             |
|                        | Edge 4        | 0.027                              | 0.174          |           | 0.201                   | No             |
|                        | Rear          | 0.029                              |                | 0.019     | 0.048                   | No             |
|                        | Front         | 0.027                              |                | 0.019     | 0.046                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.019                              |                | 0.019     | 0.038                   | No             |
|                        | Edge 3        | 0.011                              |                | 0.019     | 0.030                   | No             |
|                        | Edge 4        | 0.027                              |                | 0.019     | 0.046                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





**Sum of the SAR for LTE Band 17 & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                |           | $\Sigma$ 1-g SAR (W/Kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|----------------|-----------|-------------------------|----------------|
|                        |               | LTE Band 17                        | Wi-Fi DTS Band | Bluetooth |                         |                |
| Head                   | Left Touch    | 0.021                              | 0.349          |           | 0.370                   | No             |
|                        | Left Tilt     | 0.012                              | 0.349          |           | 0.361                   | No             |
|                        | Right Touch   | 0.018                              | 0.349          |           | 0.367                   | No             |
|                        | Right Tilt    | 0.015                              | 0.349          |           | 0.364                   | No             |
| Body-worn              | Rear          | 0.029                              | 0.174          |           | 0.203                   | No             |
|                        | Front         | 0.026                              | 0.174          |           | 0.200                   | No             |
|                        | Edge 1        | /                                  | 0.174          |           | 0.174                   | No             |
|                        | Edge 2        | 0.019                              | 0.174          |           | 0.193                   | No             |
|                        | Edge 3        | 0.011                              | 0.174          |           | 0.185                   | No             |
|                        | Edge 4        | 0.026                              | 0.174          |           | 0.200                   | No             |
|                        | Rear          | 0.029                              |                | 0.019     | 0.048                   | No             |
|                        | Front         | 0.026                              |                | 0.019     | 0.045                   | No             |
|                        | Edge 1        | /                                  |                | 0.019     | 0.019                   | No             |
|                        | Edge 2        | 0.019                              |                | 0.019     | 0.038                   | No             |
|                        | Edge 3        | 0.011                              |                | 0.019     | 0.030                   | No             |
|                        | Edge 4        | 0.026                              |                | 0.019     | 0.045                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



## APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: Aug. 22,2020

System Check Head 750 MHz

DUT: Dipole 750 MHz Type: SID 750

Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=5.06

Frequency: 750 MHz; Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 42.57$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):20.9, Liquid temperature (°C): 20.7

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

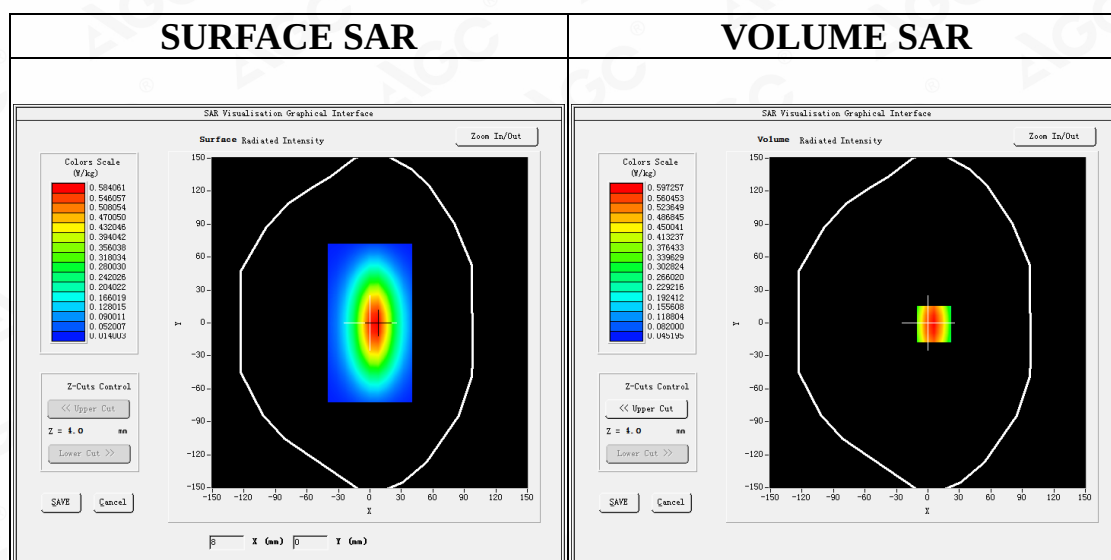

Maximum location: X=6.00, Y=-1.00

SAR Peak: 0.85 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.338434 |
| SAR 1g (W/Kg)  | 0.514395 |



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



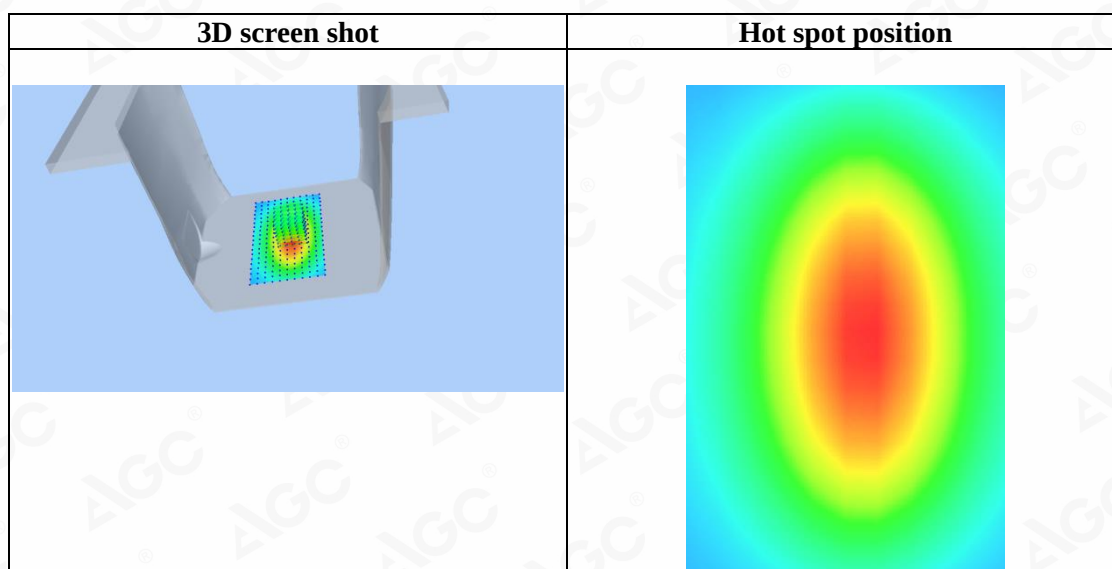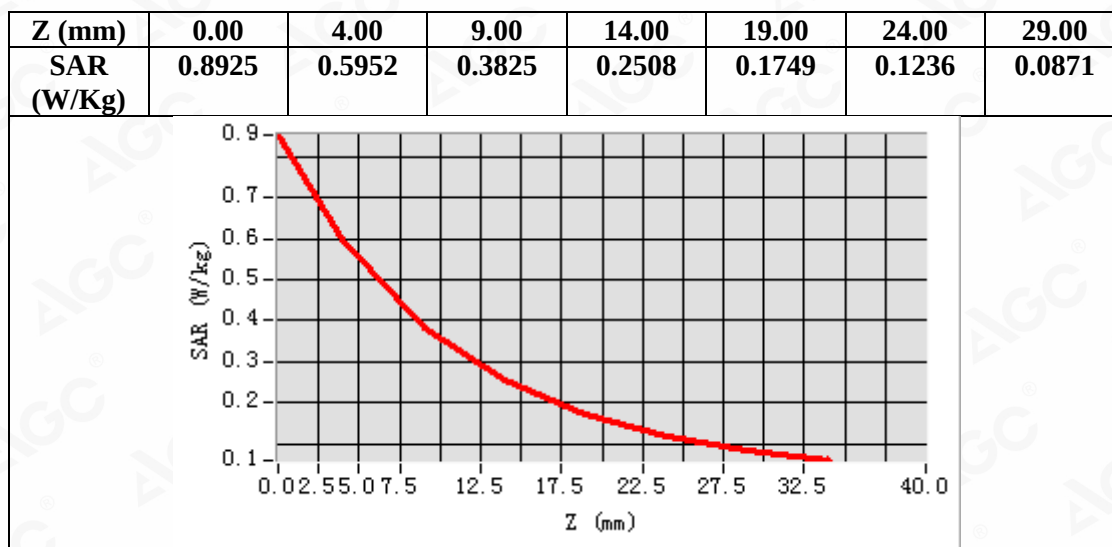

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 835 MHz**  
**DUT: Dipole 835 MHz Type: SID 835**

**Date: Aug. 21,2020**


Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.26  
Frequency: 835 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.88$  mho/m;  $\epsilon_r = 40.21$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.6, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 835MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 835MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

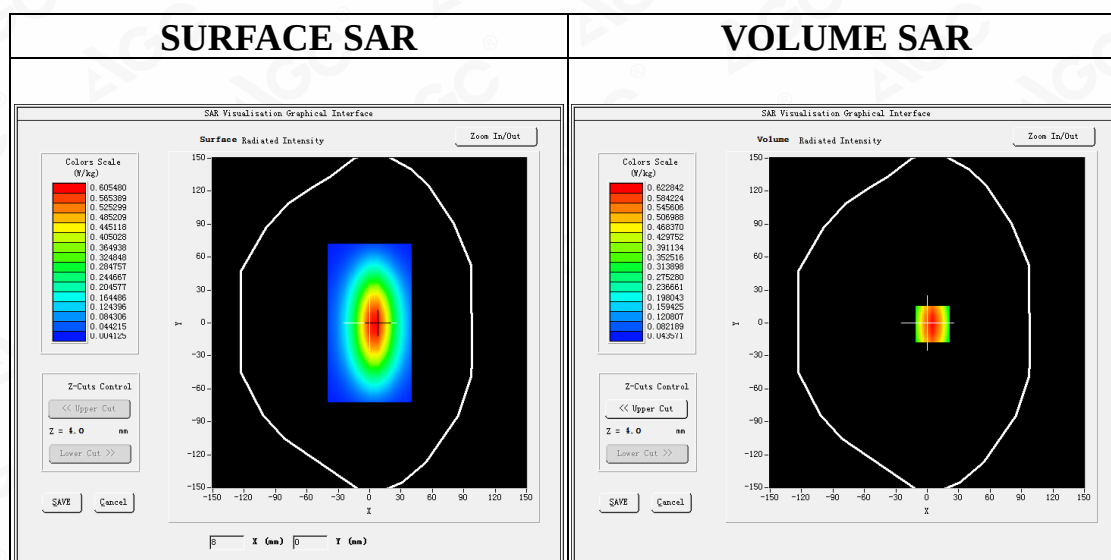

**Maximum location: X=5.00, Y=-1.00**

**SAR Peak: 0.89 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.368245 |
| <b>SAR 1g (W/Kg)</b>  | 0.583951 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





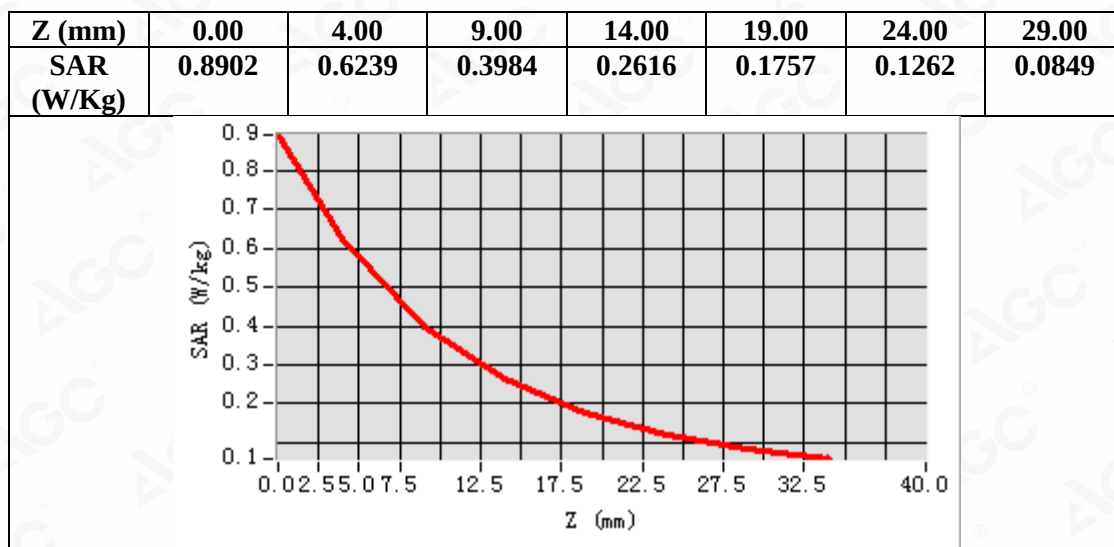

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 835 MHz**  
**DUT: Dipole 835 MHz Type: SID 835**

**Date: Aug. 15,2020**


Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.26  
Frequency: 835 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.87$  mho/m;  $\epsilon_r = 41.95$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):20.3, Liquid temperature (°C): 20.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm**

**Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm**

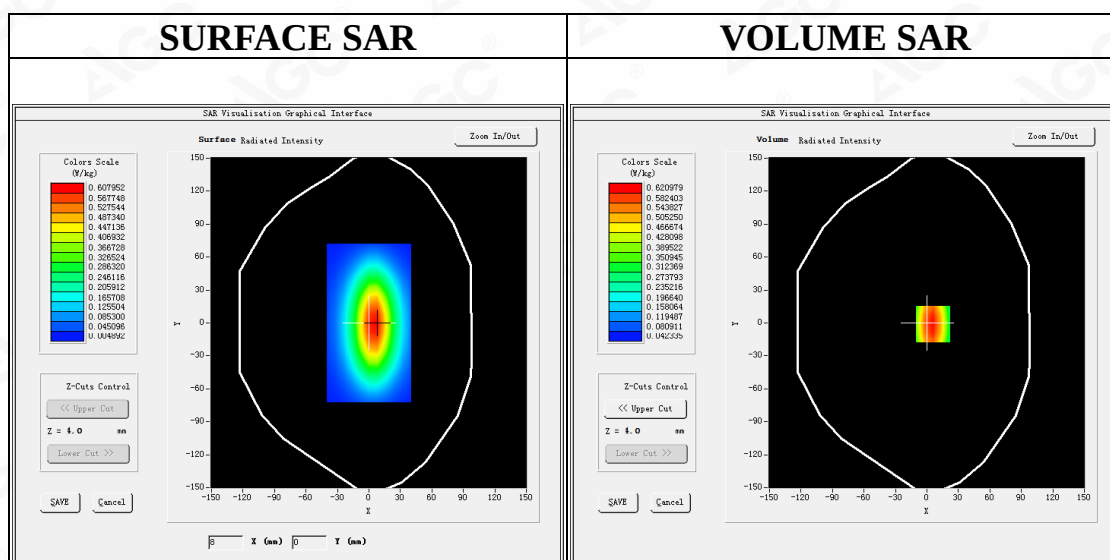

**Maximum location: X=6.00, Y=-1.00**

**SAR Peak: 0.89 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.362872 |
| <b>SAR 1g (W/Kg)</b>  | 0.593984 |



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



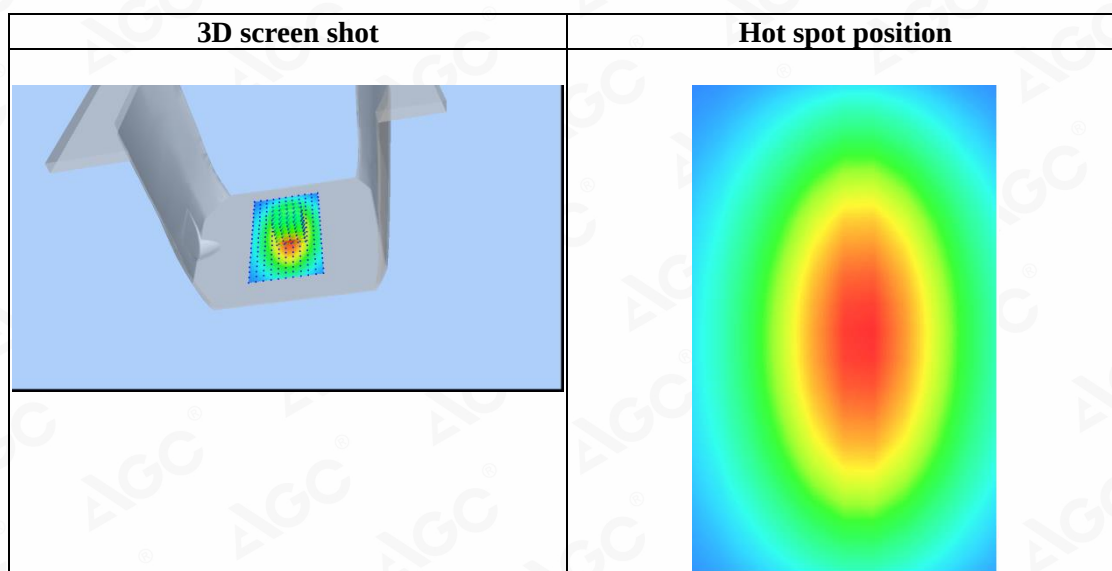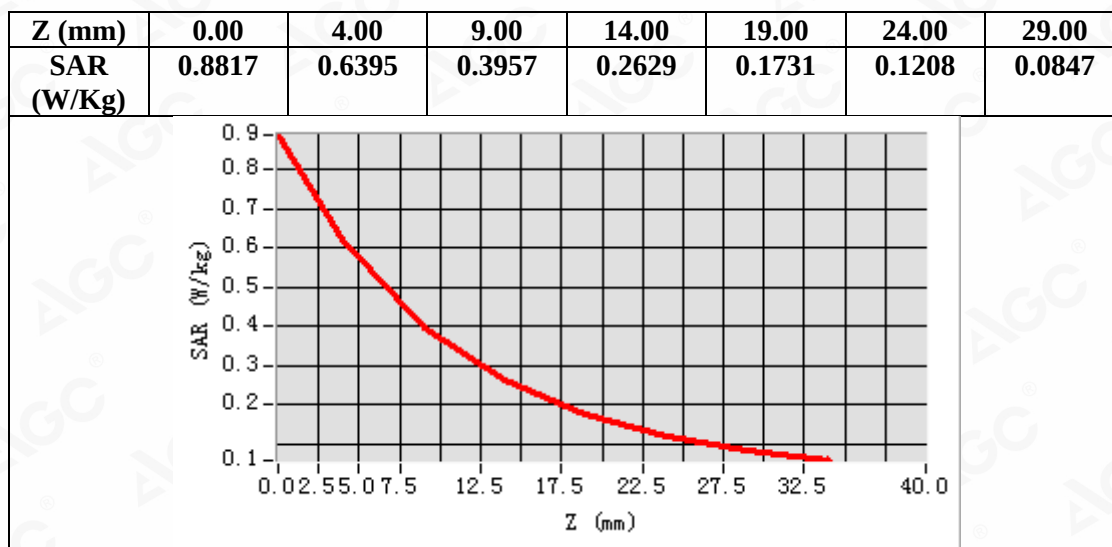

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

**Test Laboratory: AGC Lab**  
**System Check Head 1750MHz**  
**DUT: Dipole 1800 MHz; Type: SID 1800**

**Date: Aug. 28,2020**


Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.48  
Frequency: 1750 MHz; Medium parameters used:  $f = 1800\text{MHz}$ ;  $\sigma = 1.36 \text{ mho/m}$ ;  $\epsilon_r = 39.67$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 20.8, Liquid temperature ( $^{\circ}\text{C}$ ): 20.5

**SATIMO Configuration:**

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1750MHz Head/Area Scan:** Measurement grid:  $dx=8\text{mm}, dy=8\text{mm}$

**Configuration/System Check 1750MHz Head/Zoom Scan:** Measurement grid:  $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

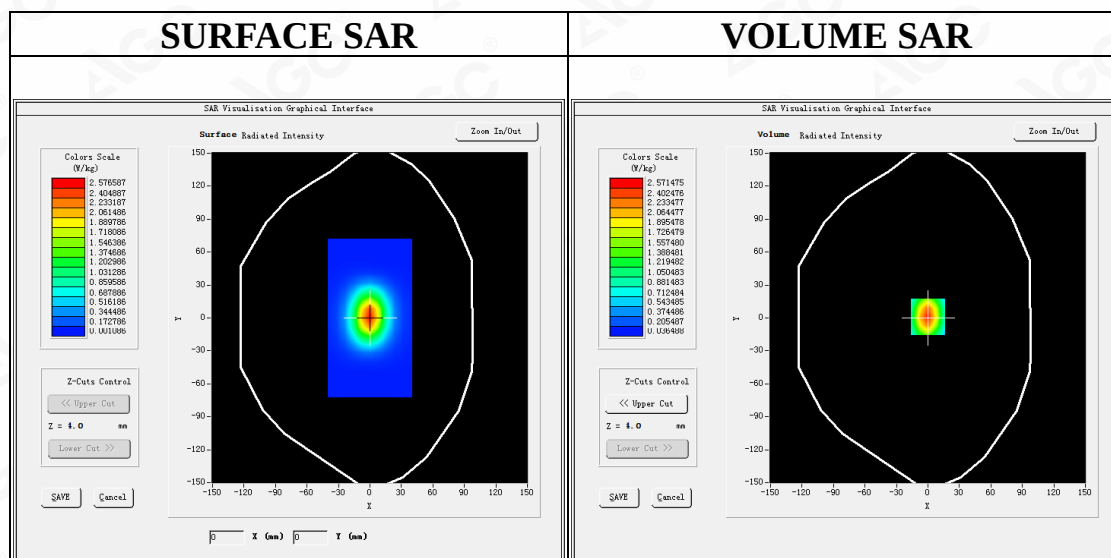

**Maximum location: X=0.00, Y=1.00**

**SAR Peak: 4.12 W/kg**



|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.217634 |
| <b>SAR 1g (W/Kg)</b>  | 2.409338 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





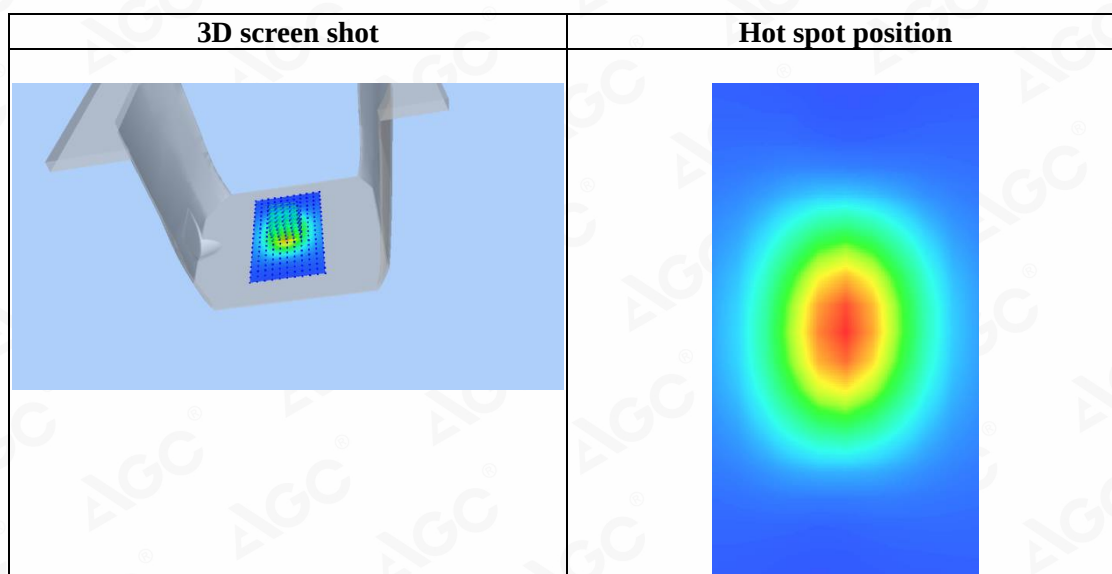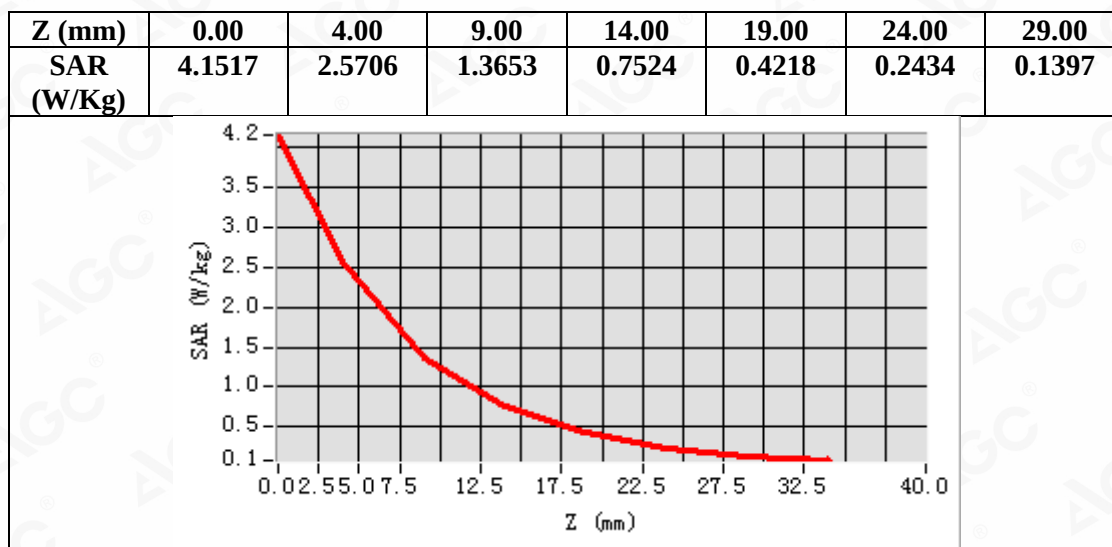

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 1900MHz**  
**DUT: Dipole 1900 MHz; Type: SID 1900**

**Date: Aug. 31,2020**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.72  
Frequency: 1900 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.18$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.4, Liquid temperature (°C): 21.1


SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1900MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 1900MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

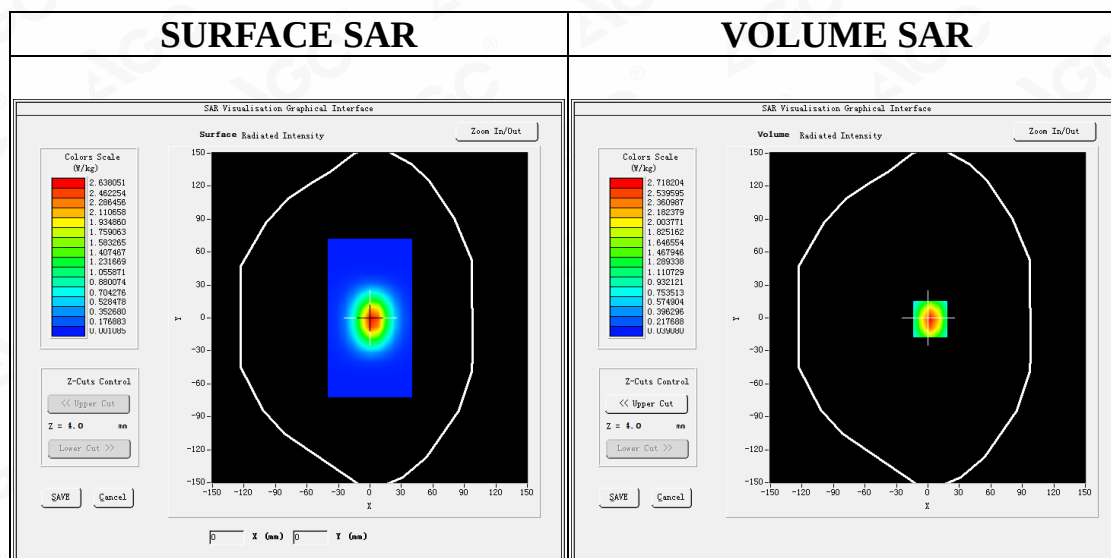

**Maximum location: X=2.00, Y=-1.00**

**SAR Peak: 4.34 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.290934 |
| <b>SAR 1g (W/Kg)</b>  | 2.542876 |



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



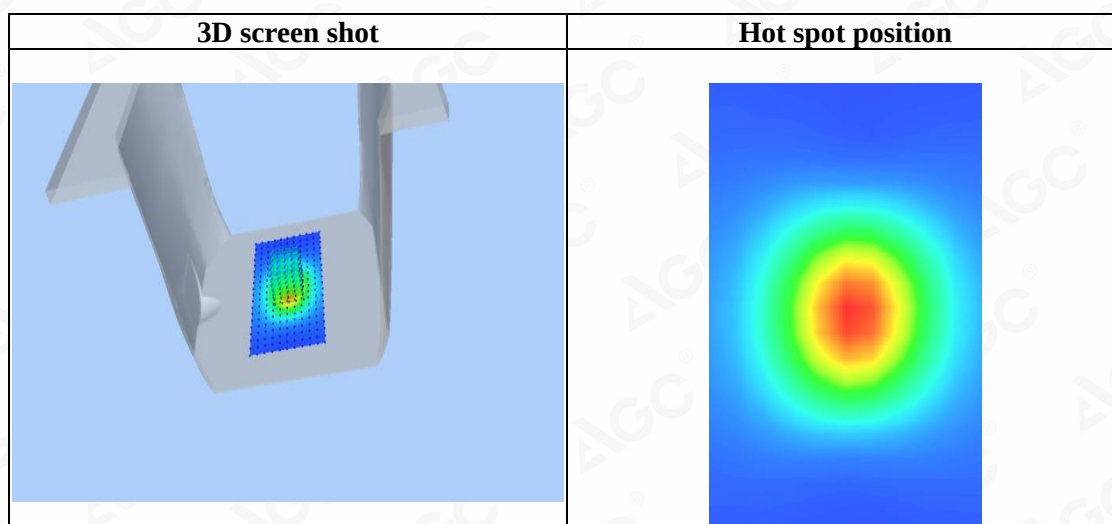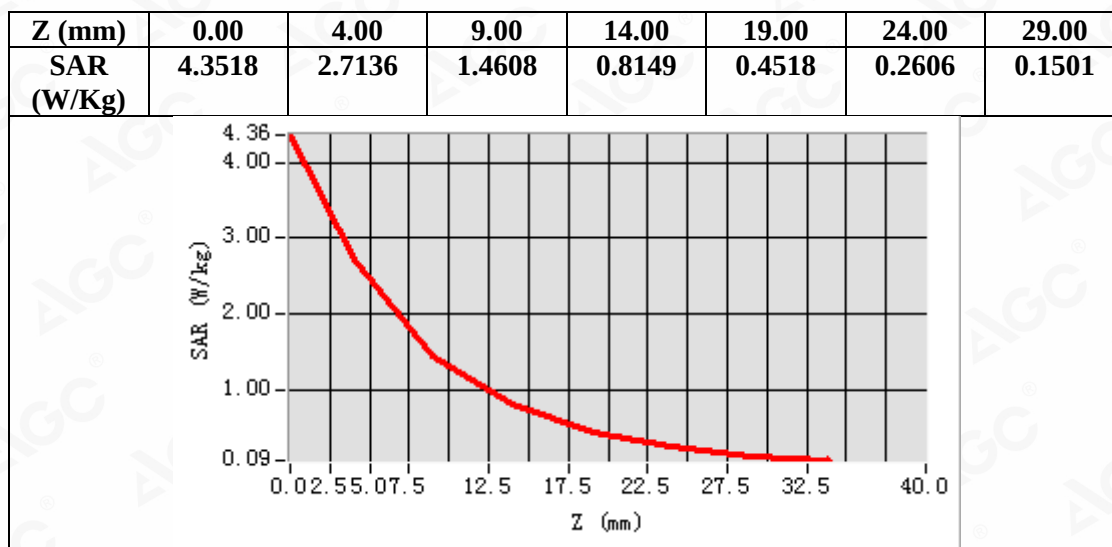

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 1900MHz**  
**DUT: Dipole 1900 MHz; Type: SID 1900**

**Date: Aug. 20,2020**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.72  
Frequency: 1900 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 39.54$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.7, Liquid temperature (°C): 21.4


SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1900MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 1900MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

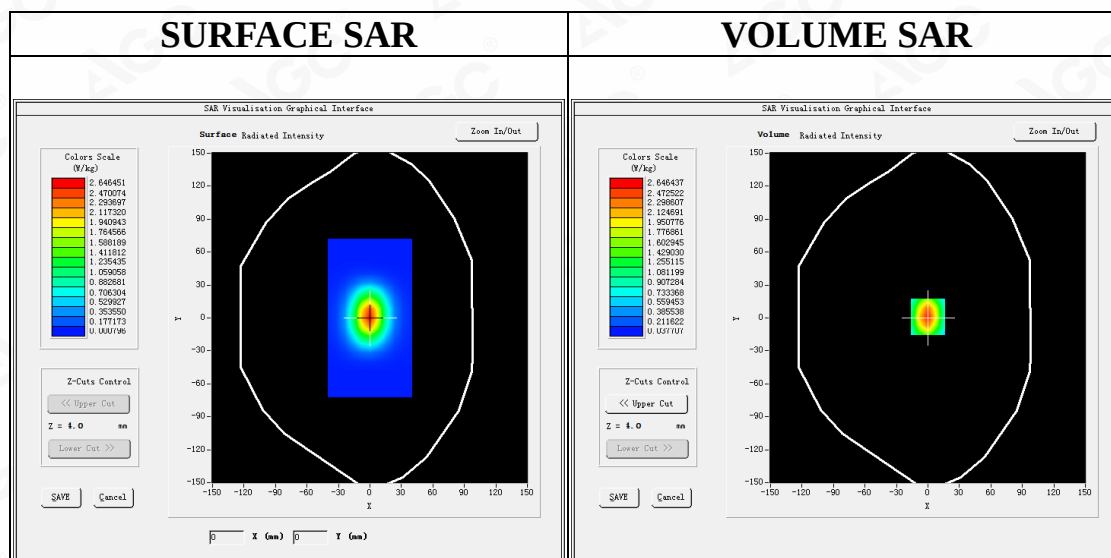

**Maximum location: X=0.00, Y=1.00**

**SAR Peak: 4.24 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.252982 |
| <b>SAR 1g (W/Kg)</b>  | 2.480877 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





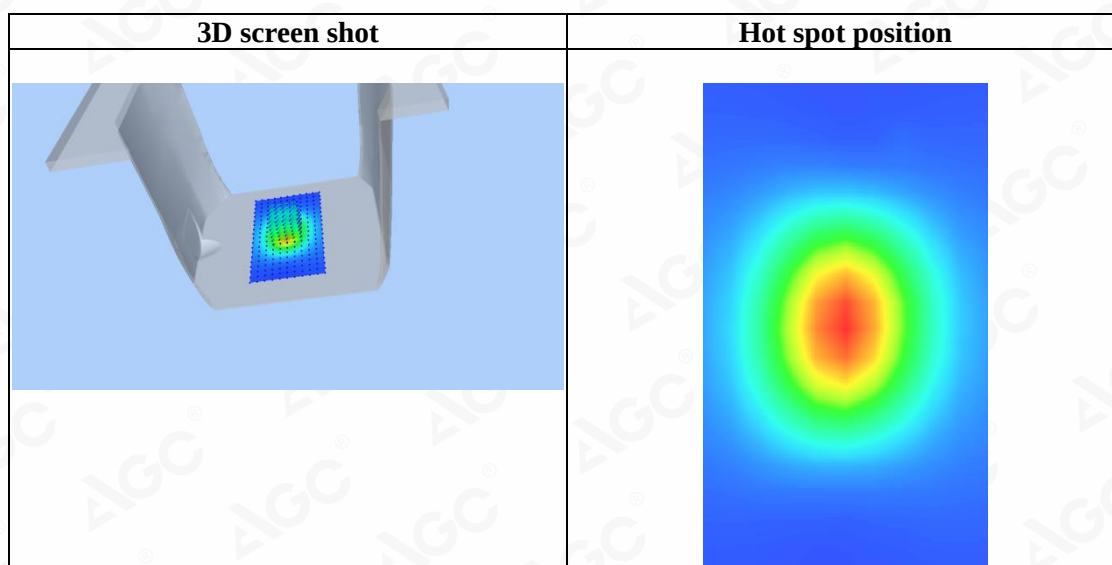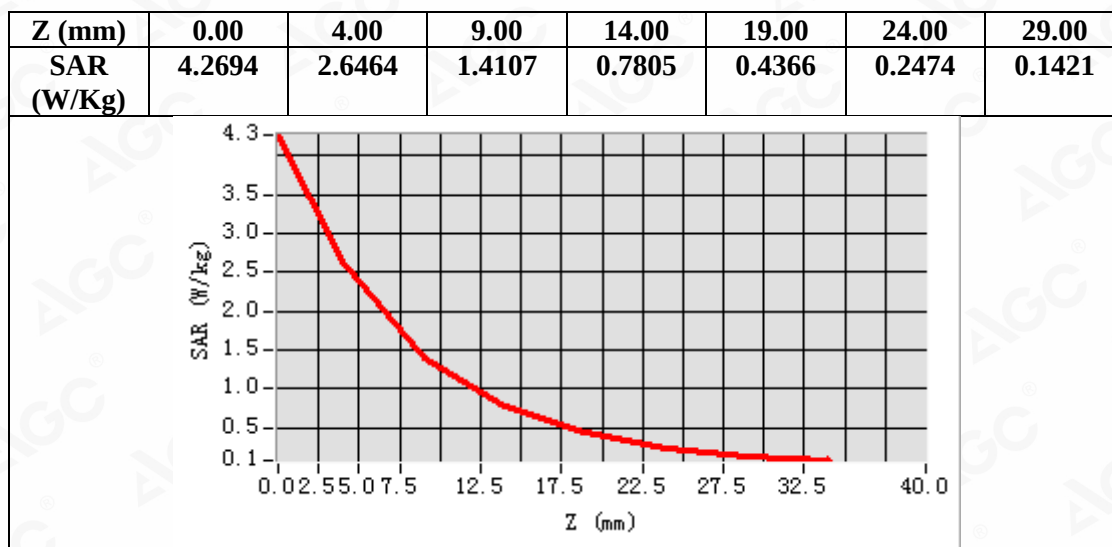

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**System Check Head 2600MHz**  
**DUT: Dipole 2600 MHz; Type: SID 2600**

**Date: Aug. 27,2020**


Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=3.81  
Frequency:2600 MHz; Medium parameters used:  $f = 2600$  MHz;  $\sigma=1.88$  mho/m;  $\epsilon_r=38.62$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C): 19.5, Liquid temperature (°C): 19.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 2600 Head/Area Scan:** Measurement grid: dx=8mm,dy=8mm

**Configuration/System Check 2600 Head/Zoom Scan:** Measurement grid: dx=5mm,dy=5mm, dz=5mm

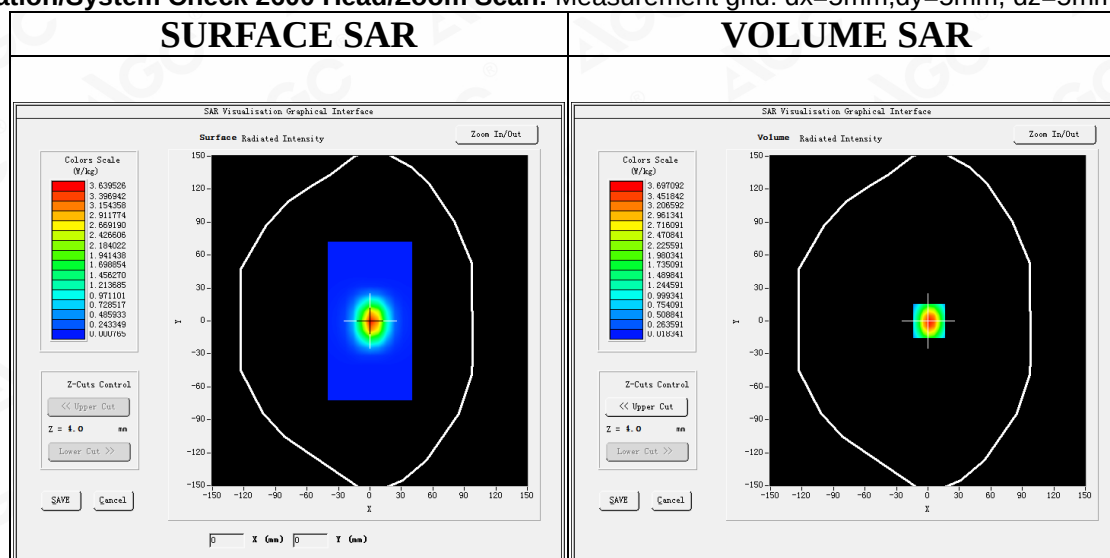

**Maximum location: X=1.00, Y=0.00**

**SAR Peak: 6.39 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.533692 |
| <b>SAR 1g (W/Kg)</b>  | 3.417057 |



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



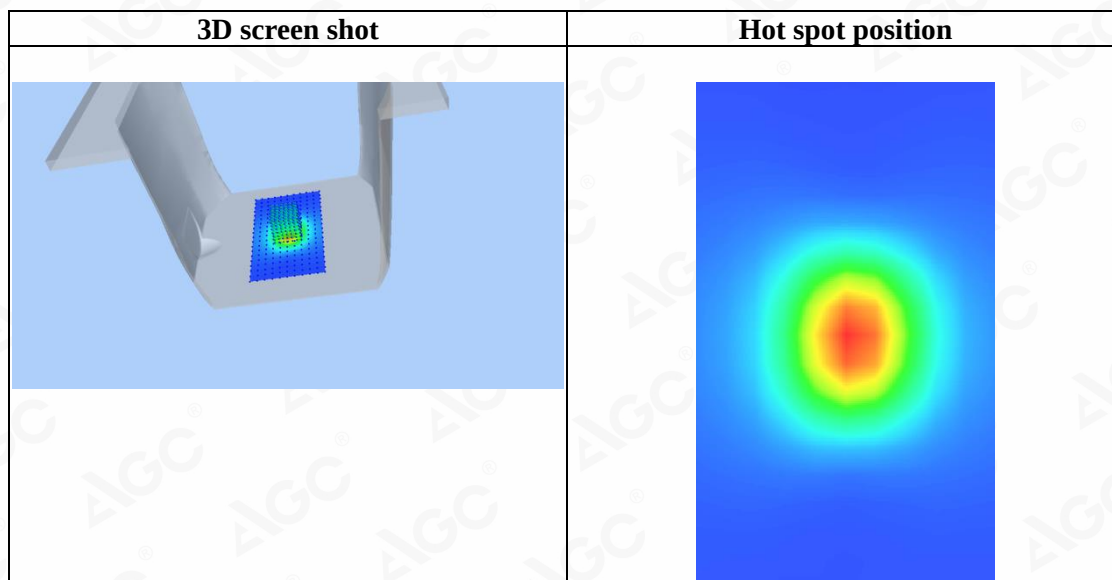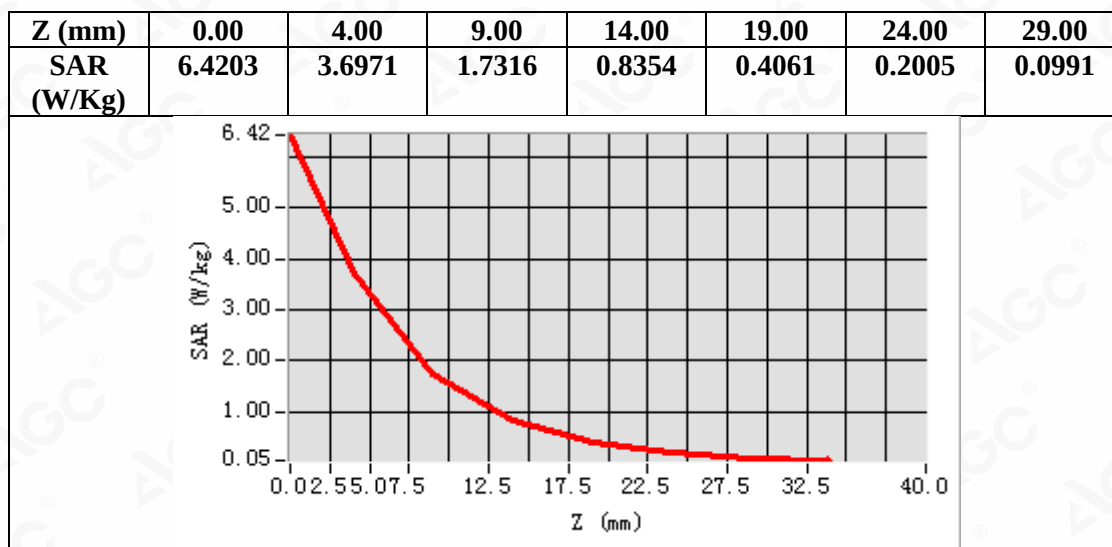

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 750 MHz**  
**DUT: Dipole 750 MHz Type: SID 750**

**Date: Aug. 22,2020**


Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=5.06  
Frequency: 750 MHz; Medium parameters used:  $f = 750$  MHz;  $\sigma=0.91$  mho/m;  $\epsilon_r=42.57$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):20.9, Liquid temperature (°C): 20.7

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 750MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 750MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

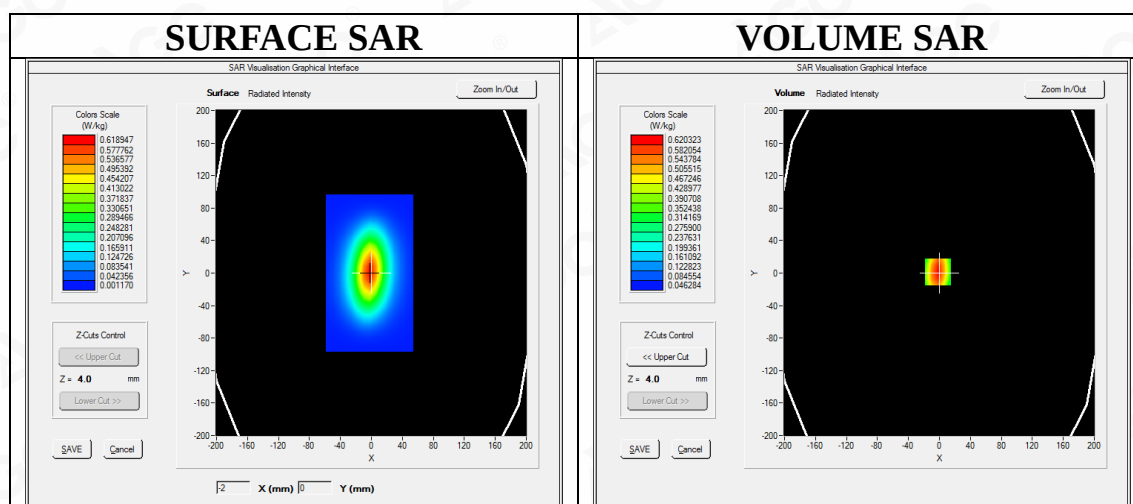

**Maximum location: X=-2.00, Y=1.00**

**SAR Peak: 0.88 W/kg**



|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.343945 |
| <b>SAR 1g (W/Kg)</b>  | 0.522875 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





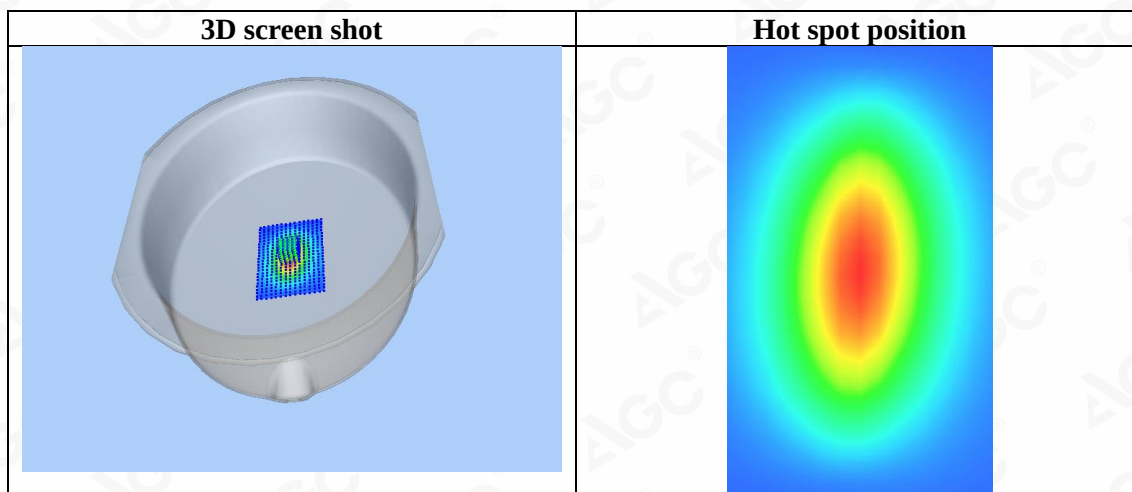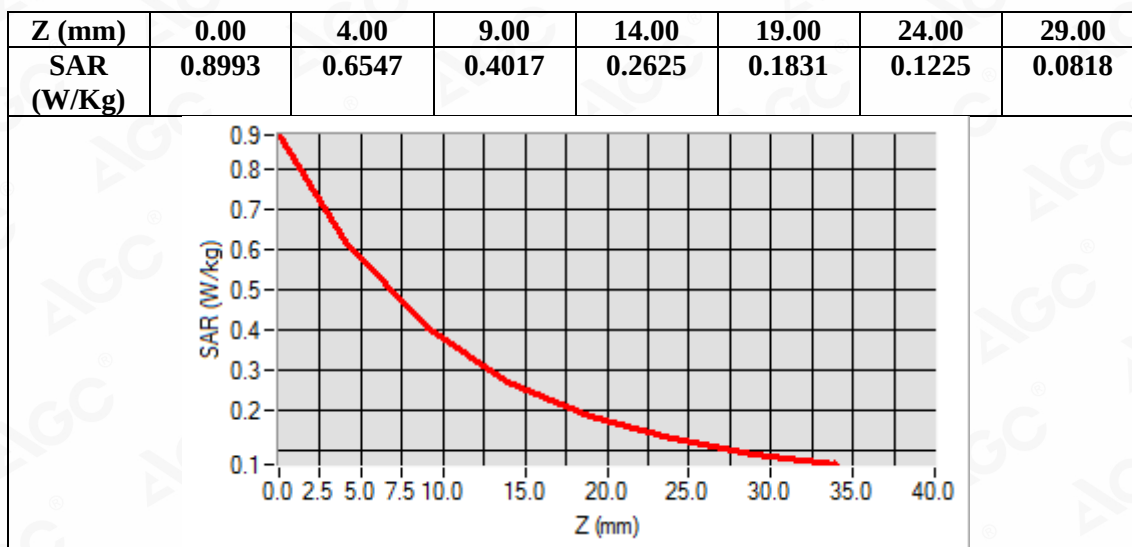

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 835 MHz**  
**DUT: Dipole 835 MHz Type: SID 835**

**Date: Aug. 21,2020**


Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.26  
Frequency: 835 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma=0.88$  mho/m;  $\epsilon_r = 40.21$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.6, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 835MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 835MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

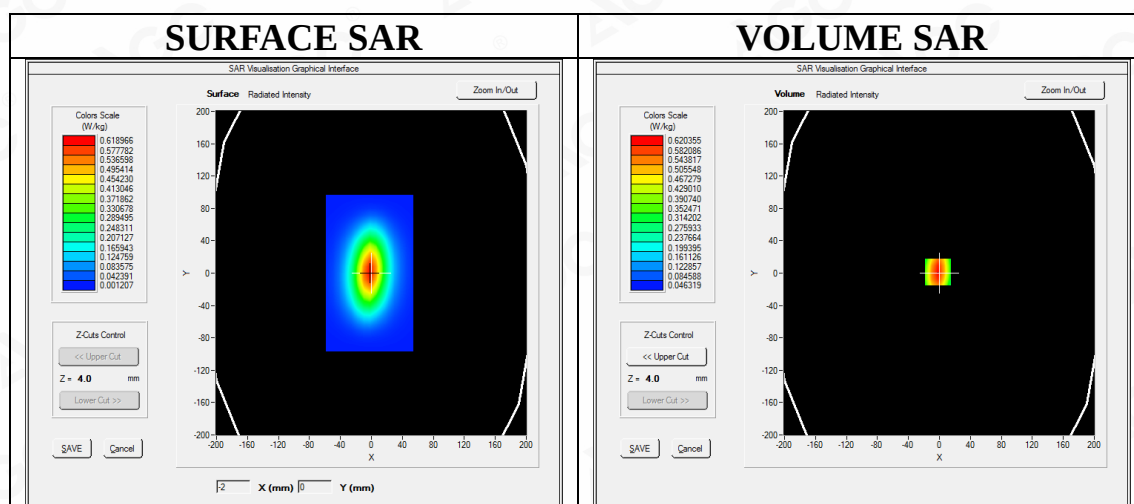

**Maximum location: X=-2.00, Y=1.00**

**SAR Peak: 0.88 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.373815 |
| <b>SAR 1g (W/Kg)</b>  | 0.592974 |



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



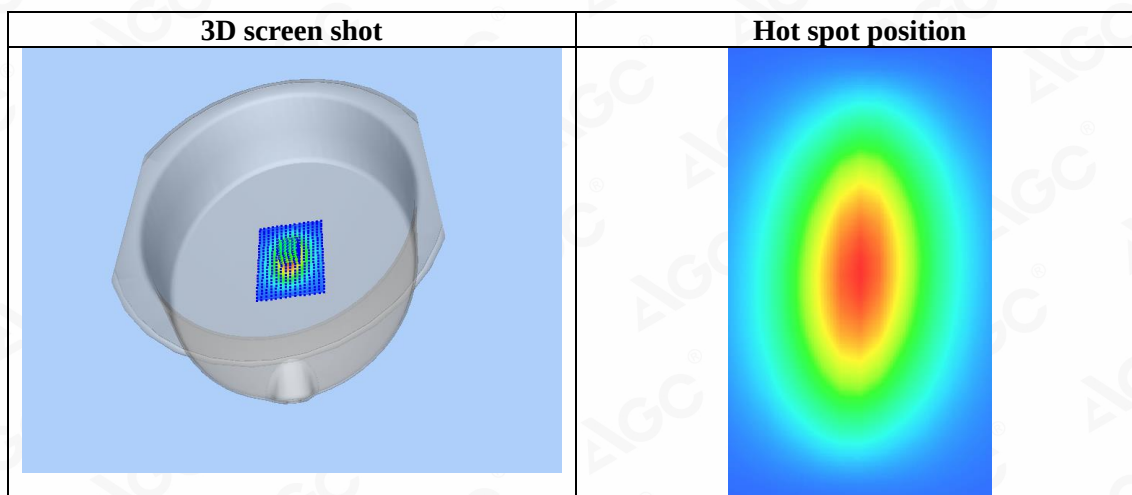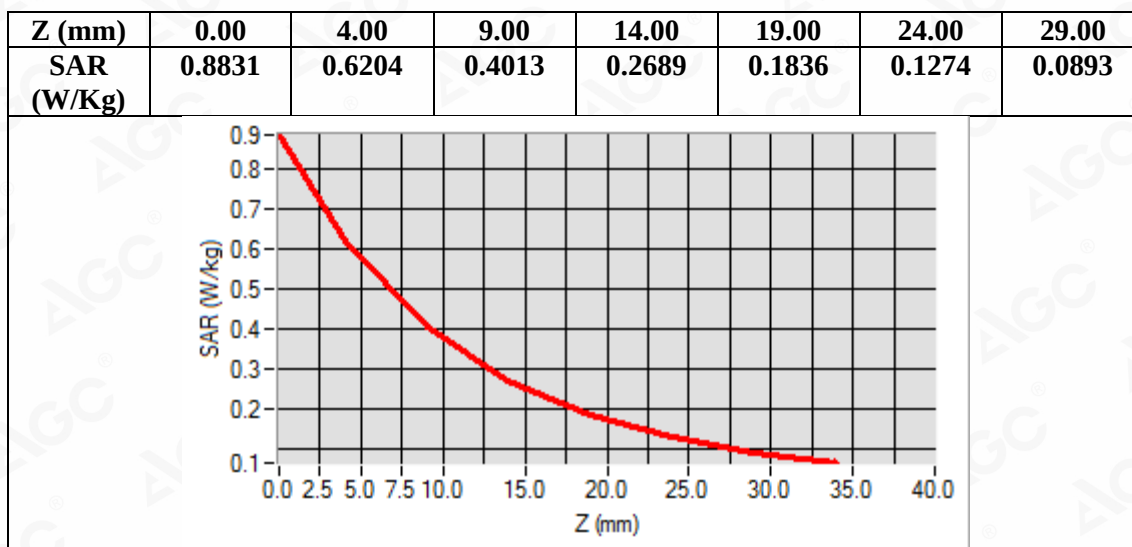

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 835 MHz**  
**DUT: Dipole 835 MHz Type: SID 835**

**Date: Aug. 15,2020**


Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.26  
Frequency: 835 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.87$  mho/m;  $\epsilon_r = 41.95$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):20.3, Liquid temperature (°C): 20.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 835MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 835MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

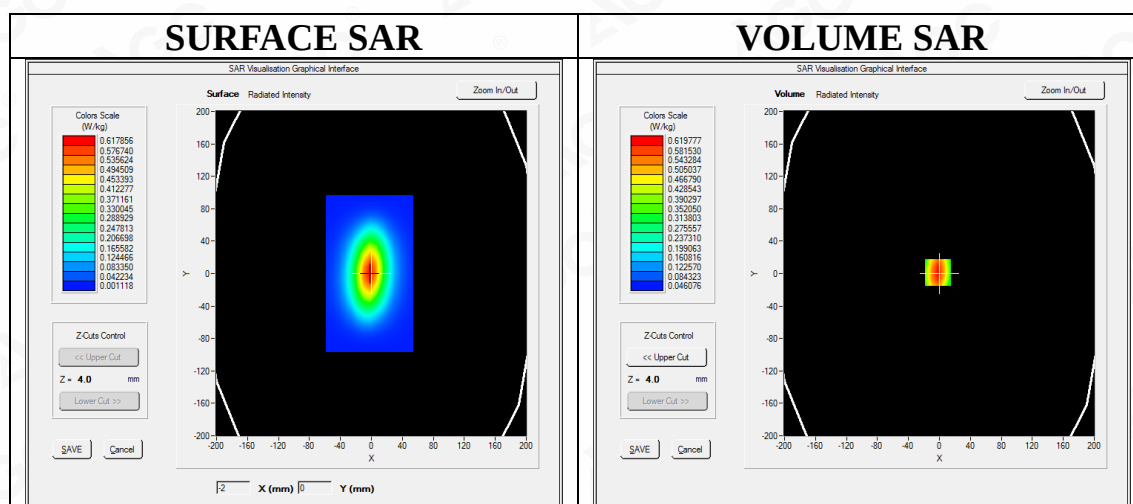

**Maximum location: X=-2.00, Y=1.00**

**SAR Peak: 0.88 W/kg**



|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.373177 |
| <b>SAR 1g (W/Kg)</b>  | 0.592301 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





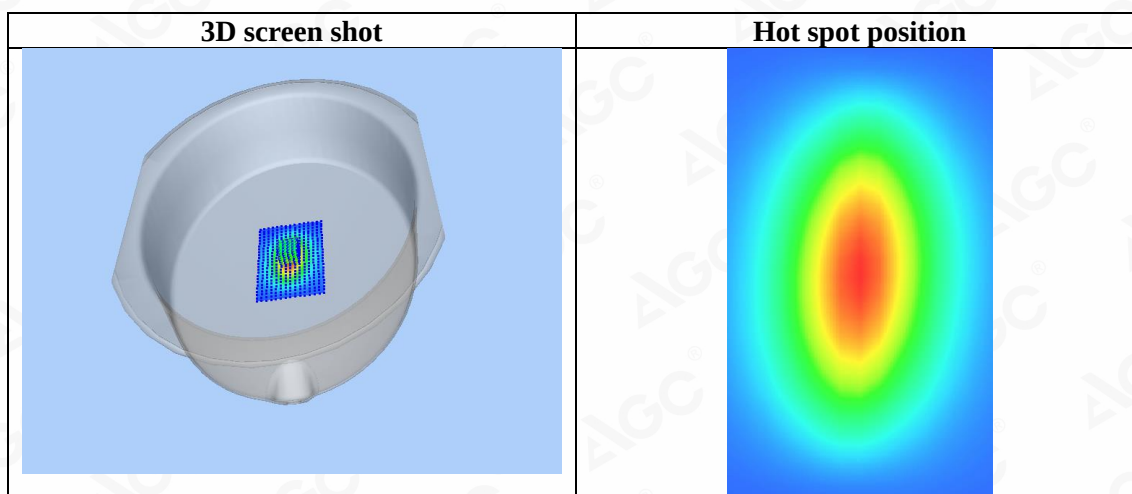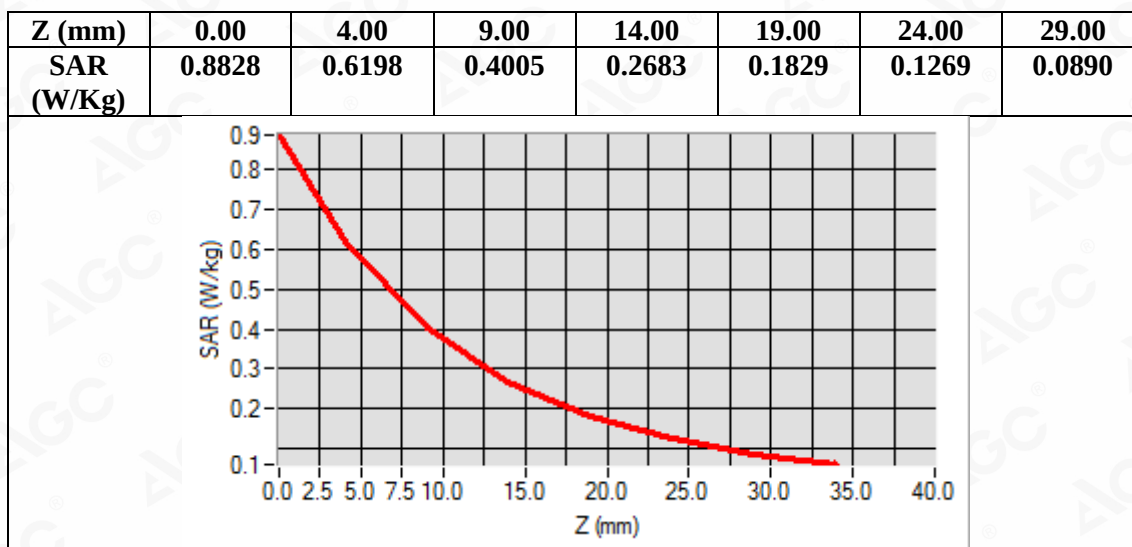

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 1750MHz**  
**DUT: Dipole 1800 MHz; Type: SID 1800**

**Date: Aug. 28,2020**


Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.48  
Frequency: 1750 MHz; Medium parameters used:  $f = 1800\text{MHz}$ ;  $\sigma = 1.36 \text{ mho/m}$ ;  $\epsilon_r = 39.67$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 20.8, Liquid temperature ( $^{\circ}\text{C}$ ): 20.5

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1750MHz Head/Area Scan:** Measurement grid:  $dx=8\text{mm}, dy=8\text{mm}$

**Configuration/System Check 1750MHz Head/Zoom Scan:** Measurement grid:  $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

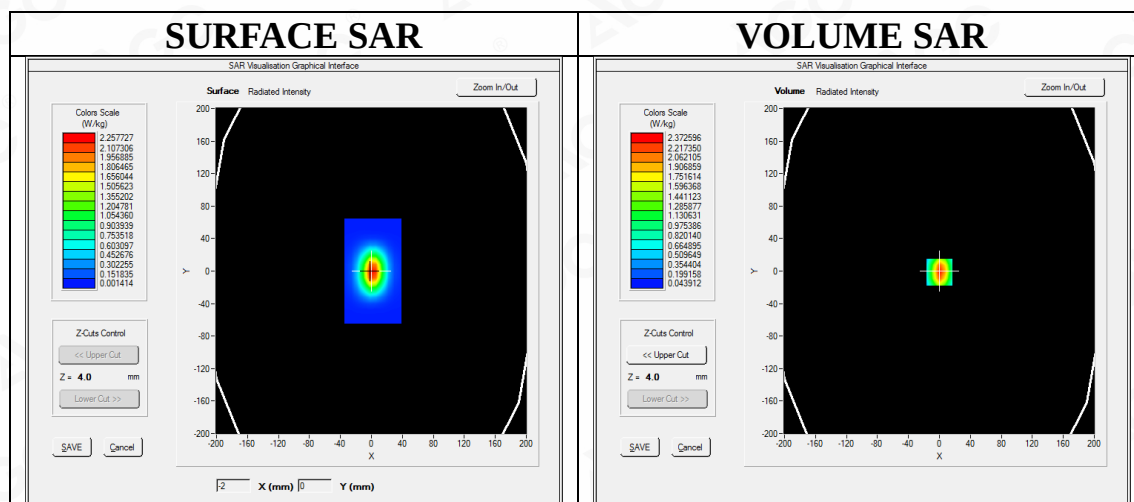

**Maximum location: X=0.00, Y=-1.00**



**SAR Peak: 3.73 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.187542 |
| <b>SAR 1g (W/Kg)</b>  | 2.329865 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



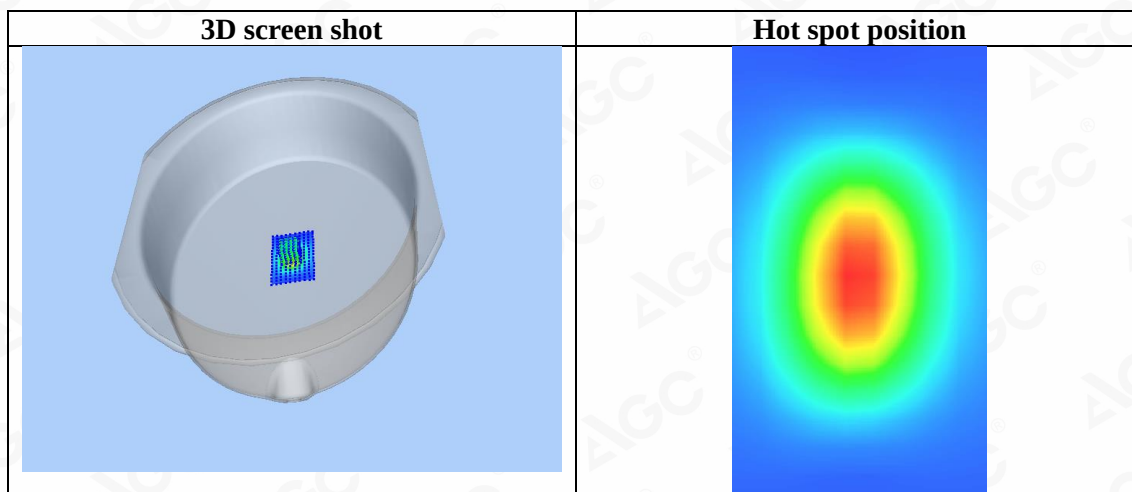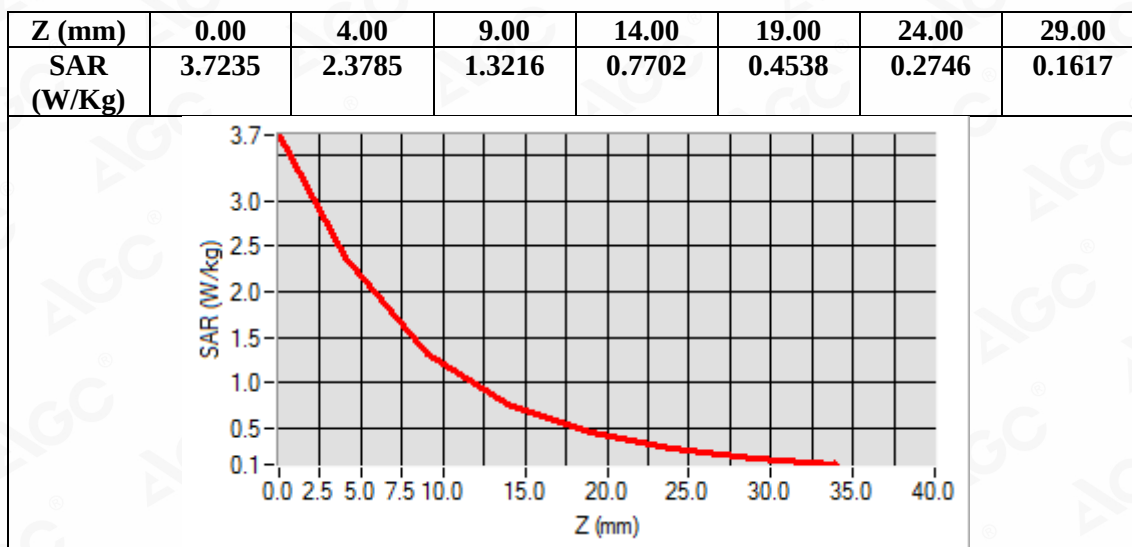

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 1900MHz**  
**DUT: Dipole 1900 MHz; Type: SID 1900**

**Date: Aug. 31,2020**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.72  
Frequency: 1900 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.18$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.4, Liquid temperature (°C): 21.1


SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1900MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 1900MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

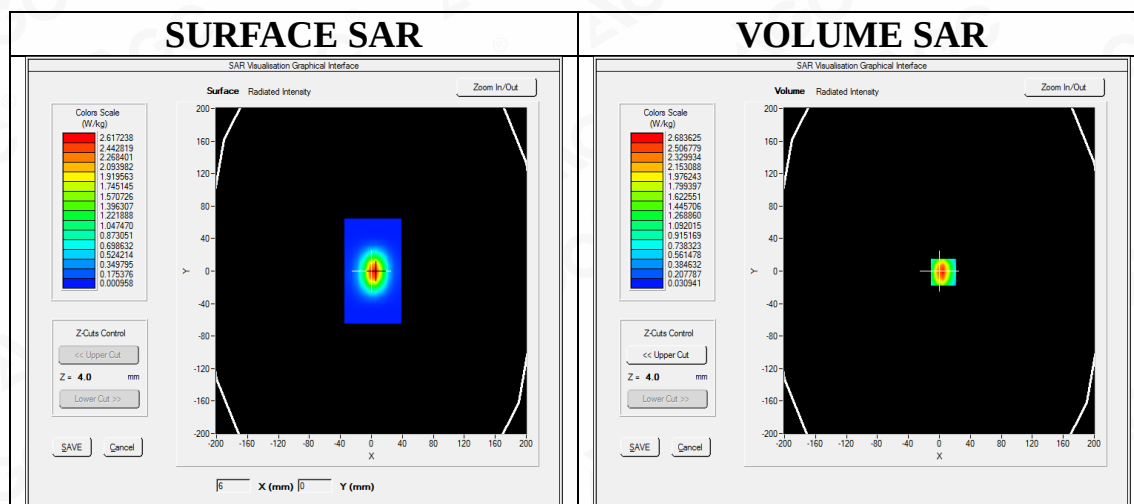

**Maximum location: X=5.00, Y=-1.00**

**SAR Peak: 4.37 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.270872 |
| <b>SAR 1g (W/Kg)</b>  | 2.553977 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





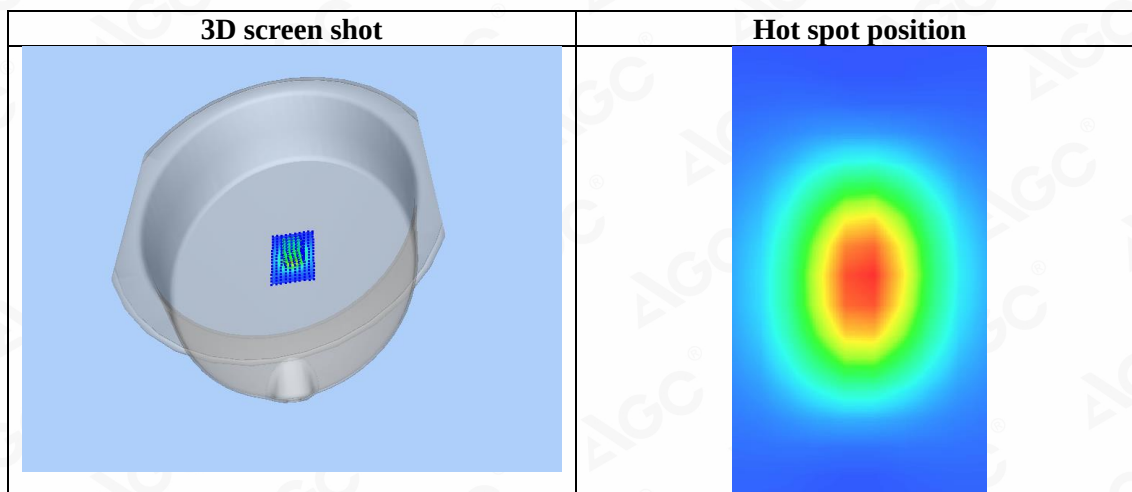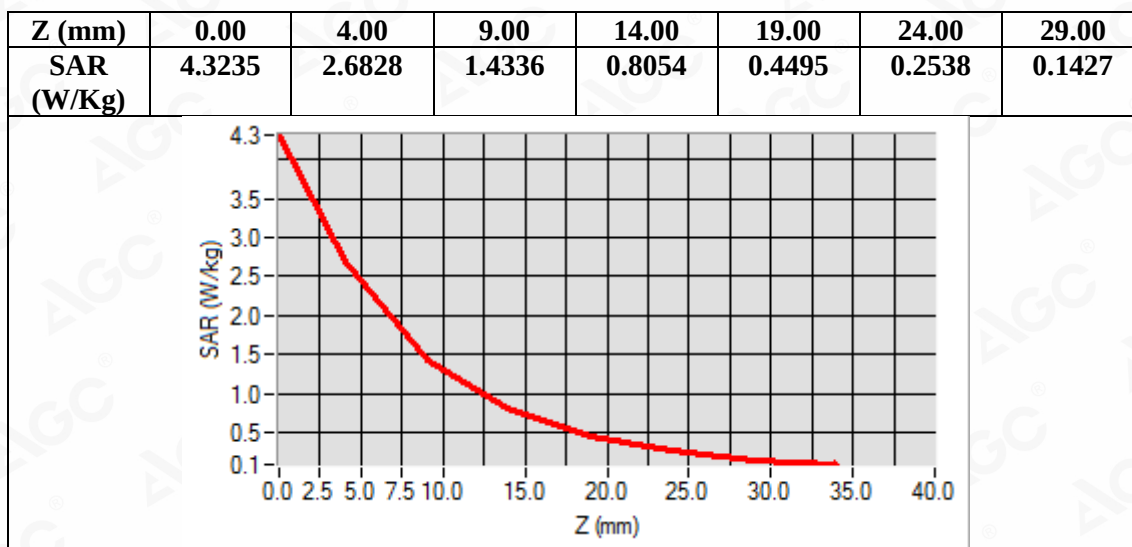

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 1900MHz**  
**DUT: Dipole 1900 MHz; Type: SID 1900**

**Date: Aug. 20,2020**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.72  
Frequency: 1900 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 39.54$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.7, Liquid temperature (°C): 21.4


SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1900MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 1900MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

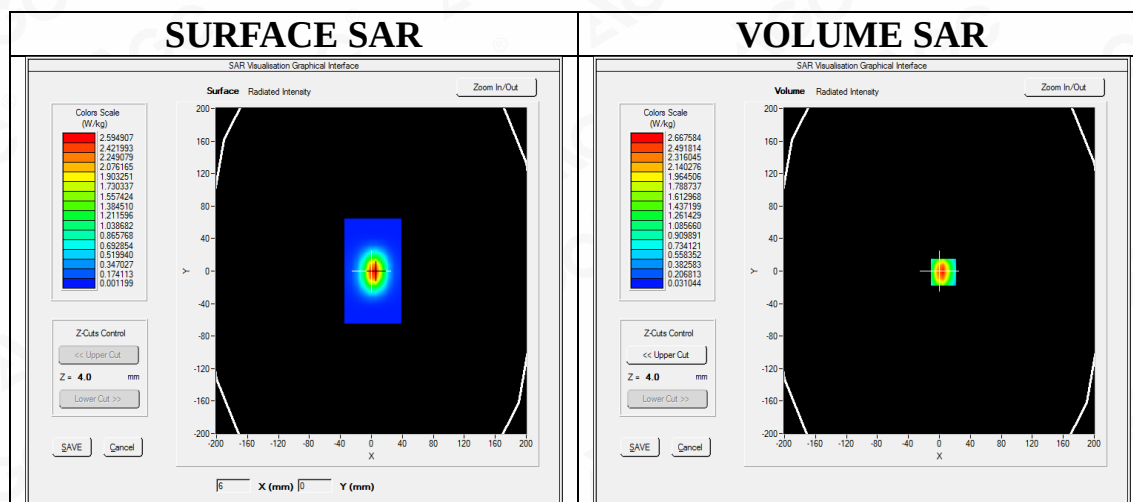

**Maximum location: X=5.00, Y=-1.00**

**SAR Peak: 4.35 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.257642 |
| <b>SAR 1g (W/Kg)</b>  | 2.541827 |



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



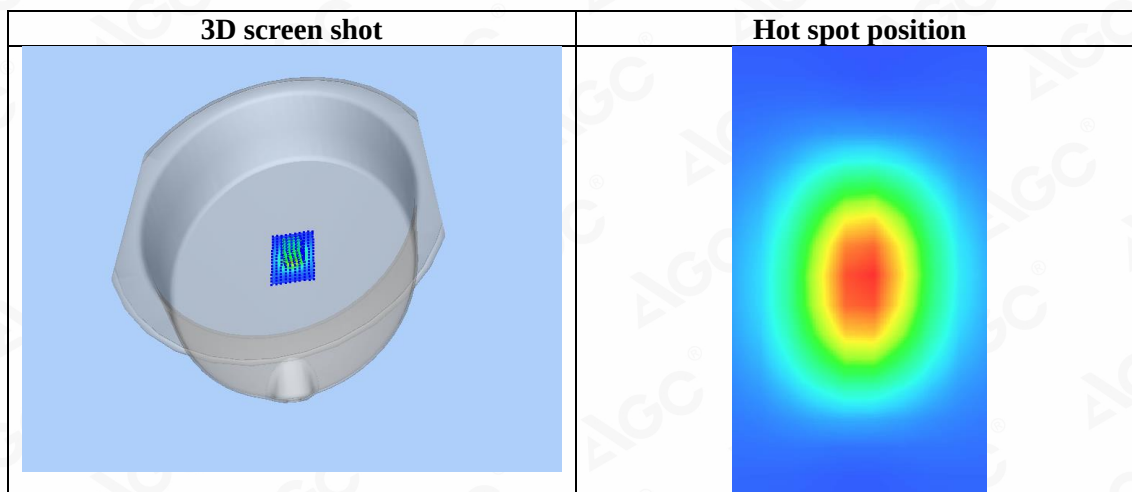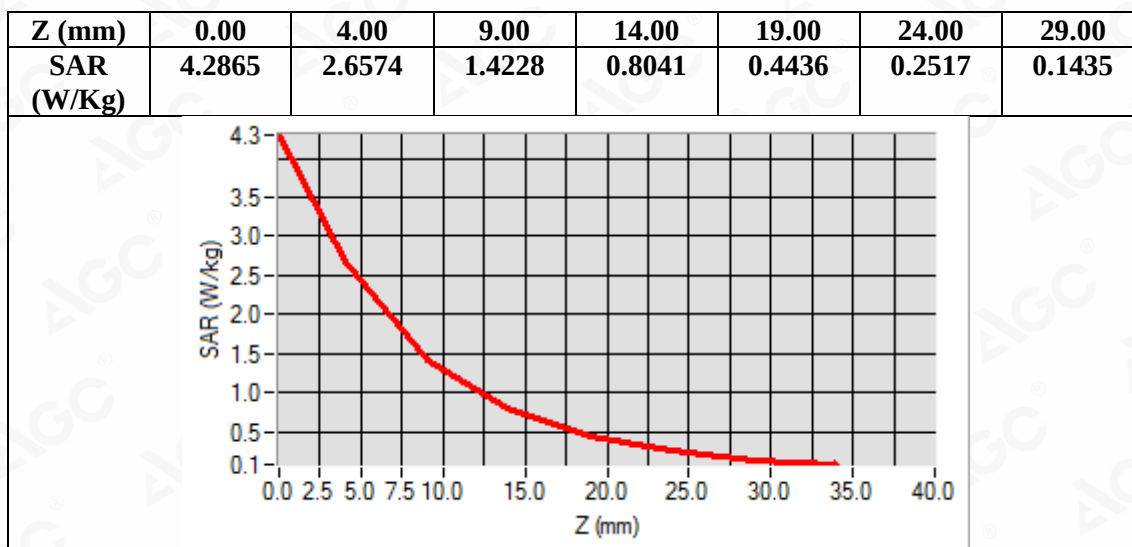

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 2600MHz**  
**DUT: Dipole 2600 MHz; Type: SID 2600**

**Date: Aug. 27,2020**


Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=3.81  
Frequency:2600 MHz; Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38.62$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C): 19.5, Liquid temperature (°C): 19.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 2600 Head/Area Scan:** Measurement grid: dx=8mm,dy=8mm

**Configuration/System Check 2600 Head/Zoom Scan:** Measurement grid: dx=5mm,dy=5mm, dz=5mm

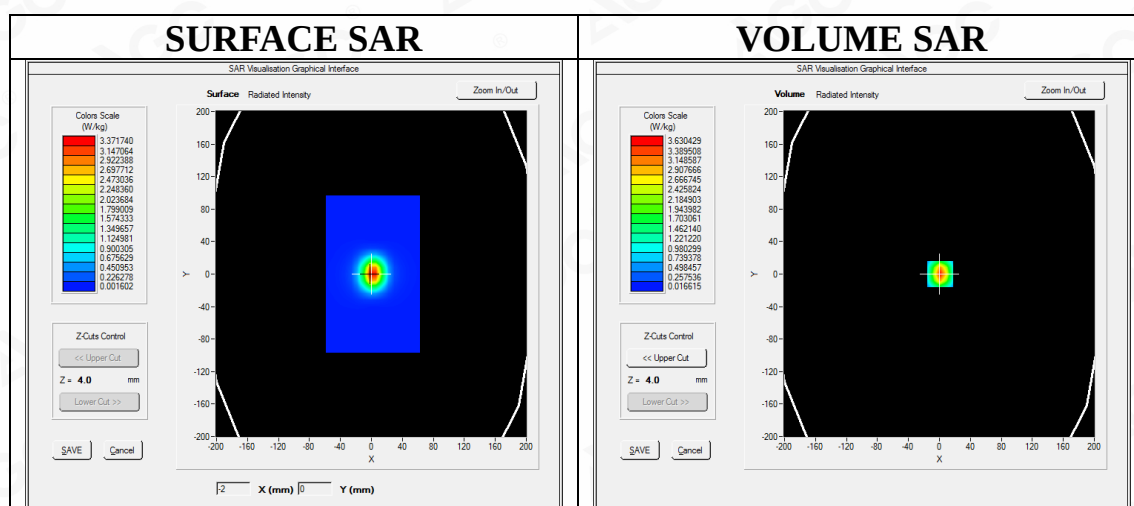

**Maximum location: X=1.00, Y=0.00**  
**SAR Peak: 6.23 W/kg**



|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.521084 |
| <b>SAR 1g (W/Kg)</b>  | 3.373483 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





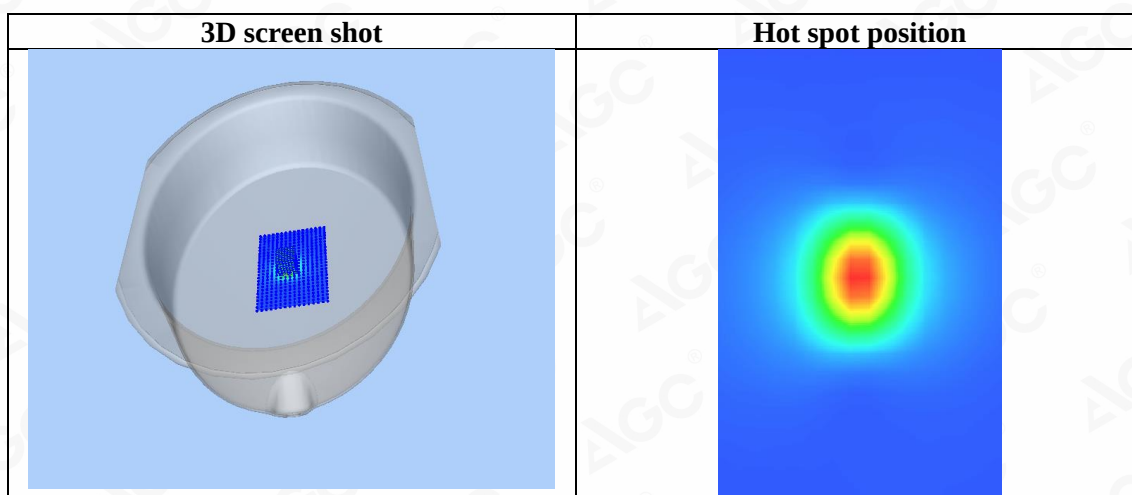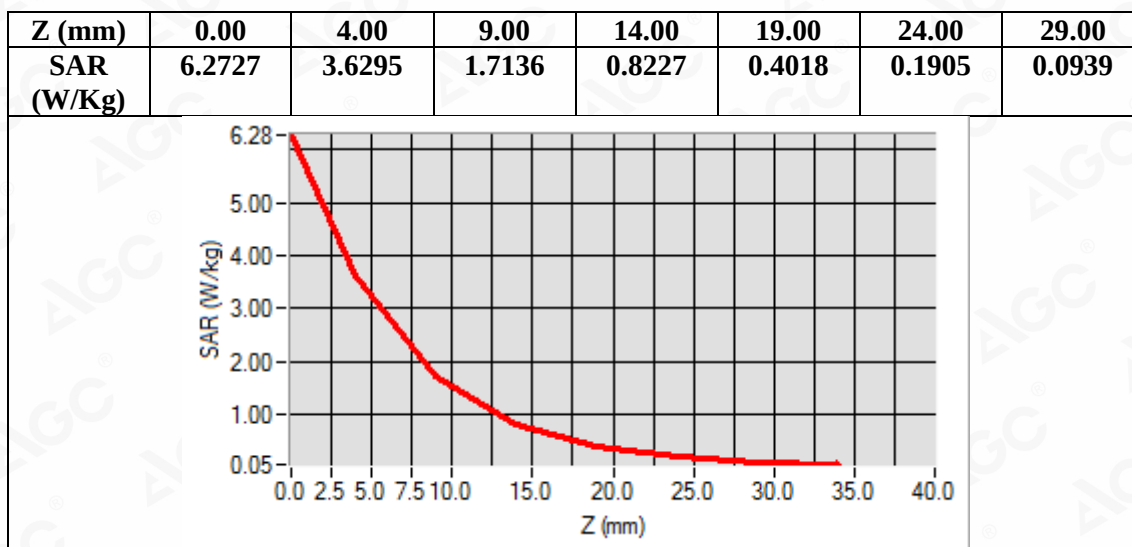

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>

