

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

Test Report

Product Name: RECEIVER

FCC ID: JFZR700

Applicant:

**AUDIO TECHNICA CORPORATION
2206 NARUSE, MACHIDA
TOKYO 194
JAPAN**

Date Receipt: 5/23/2006

Date Tested: 7/6/2006

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR700
REPORT # V:\A\AudioTechnica_JFZ\1078AUT6\1078AUT6TestReport.doc
PAGE # 1

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR700

TEST REPORT CONTAINING:

PAGE 3	TEST EQUIPMENT LIST
PAGE 4	RADIATION INTERFERENCE TEST PROCEDURE
PAGE 5,6	RADIATION INTERFERENCE TEST DATA
PAGE 7	POWER INE CONDUCTED TEST PROCEDURE
PAGE 8	POWER LINE CONDUCTED PLOT - LINE 1
PAGE 9	POWER LINE CONDUCTED PLOT - LINE 2

EXHIBITS CONTAINING:

BLOCK DIAGRAM
SCHEMATIC
INSTRUCTION MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
CIRCUIT DESCRIPTION

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR700
REPORT # V:\A\AudioTechnica_JFZ\1078AUT6\1078AUT6TestReport.doc
PAGE # 2

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Antenna: Biconnical	Eaton	94455-1	1096	CAL 8/17/04	8/17/06
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Analyzer	HP	85650A	2811A01279	CAL 4/13/05	4/13/07
Blue Tower Quasi-Peak Adapter					
Analyzer	HP	85685A	2926A00983	CAL 9/5/05	9/5/07
Blue Tower RF Preselector					
Analyzer	HP	8568B	2928A04729	CAL 4/13/05	4/13/07
Blue Tower Spectrum Analyzer					
LISN	Electro-Metrics	ANS-25/2	2604	CAL 8/27/04	8/27/06
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/14/05	12/14/07

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2003 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°F with a humidity of 50%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-2003 with the EUT 40 cm from the vertical ground wall.

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR700

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.109

REQUIREMENTS:

30 to 88 MHz:	40.0 dBuV/M @ 3 METERS
88 to 216 MHz:	43.5 dBuV/M
216 to 960 MHz:	46.0 dBuV/M
ABOVE 960 MHz:	54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
542.1	298.24	8.5	V	1.10	14.31	23.91	22.09
542.1	298.24	9.7	H	1.10	14.33	25.13	20.87
542.1	596.48	4.5	H	1.59	19.10	25.19	20.81
542.1	596.48	5.2	V	1.59	18.60	25.39	20.61
542.1	894.72	5.1	V	1.95	22.65	29.70	16.30
542.1	894.72	5.4	H	1.95	23.30	30.65	15.35
542.1	1,192.96	14.2	V	2.25	27.65	44.10	9.90
542.1	1,192.96	14.5	H	2.25	27.65	44.40	9.60
542.1	1,491.20	15.1	V	2.49	28.18	45.77	8.23
542.1	1,491.20	15.4	H	2.49	28.18	46.07	7.93
542.1	1,789.44	15.7	H	2.73	29.94	48.37	5.63
542.1	1,789.44	16.1	V	2.73	29.94	48.77	5.23
552.0	308.10	9.2	V	1.11	14.97	25.28	20.72
552.0	308.10	12.1	H	1.11	15.05	28.26	17.74
552.0	616.20	5.6	H	1.62	19.56	26.78	19.22
552.0	616.20	6.5	V	1.62	19.12	27.24	18.76
552.0	924.30	4.7	H	1.99	23.39	30.08	15.92
552.0	924.30	5.5	V	1.99	22.64	30.13	15.87
552.0	1,232.40	14.8	H	2.29	27.72	44.81	9.19
552.0	1,232.40	15.1	V	2.29	27.72	45.11	8.89
552.0	1,540.50	15.3	V	2.53	28.44	46.27	7.73
552.0	1,540.50	15.4	H	2.53	28.44	46.37	7.63

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR700

REPORT # V:\A\AudioTechnica_JFZ\1078AUT6\1078AUT6TestReport.doc

PAGE # 5

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TEST DATA CONTD.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
552.0	1,848.60	16.5	V	2.78	30.29	49.57	4.43
552.0	1,848.60	16.8	H	2.78	30.29	49.87	4.13
561.2	317.33	9.5	V	1.12	14.81	25.43	20.57
561.2	317.33	12.1	H	1.12	15.05	28.27	17.73
561.2	634.66	5.2	V	1.63	19.44	26.27	19.73
561.2	634.66	5.5	H	1.63	19.74	26.87	19.13
561.2	951.99	4.0	V	2.03	22.56	28.59	17.41
561.2	951.99	4.6	H	2.03	23.36	29.99	16.01
561.2	1,269.32	14.5	H	2.32	27.78	44.60	9.40
561.2	1,269.32	14.7	V	2.32	27.78	44.80	9.20
561.2	1,586.65	15.5	H	2.57	28.72	46.79	7.21
561.2	1,586.65	15.9	V	2.57	28.72	47.19	6.81
561.2	1,903.98	16.6	V	2.82	30.62	50.04	3.96
561.2	1,903.98	16.8	H	2.82	30.62	50.24	3.76

SAMPLE CALCULATION: $FSDBuV/m = MR (dBuV) + ACFdB.$

TEST PROCEDURE: ANSI STANDARD C63.4-2003 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: JOSEPH SCOGLIO

DATE

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR700

REPORT # V:\A\AudioTechnica_JFZ\1078AUT6\1078AUT6TestReport.doc

PAGE # 6

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

APPLICANT: AUDIO TECHNICA CORPORATION
MODEL #: R700
NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE
RULES PART NO.: 15.107

REQUIREMENTS:	QUASI-PEAK	AVERAGE
.15 - 0.5 MHz	66-56 dBuV	56-46 dBuV
0.5 - 5.0	56	46
5.0 - 30.	60	50

TEST PROCEDURE: ANSI STANDARD C63.4-2003. The spectrum was scanned from .15 to 30 MHz.

TEST DATA:

THE GRAPHS ON THE FOLLOWING PAGE REPRESENT THE EMISSIONS TAKEN FOR THIS DEVICE.

PERFORMED BY: NAM NGUYEN

DATE: 7/04/06


TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

NOTES:

AUDIO TECHNICA CORPORATION - FCC ID: JFZR700
POWERLINE CONDUCTED PLOT - LINE 1

FCC 15.107 Mask Class B

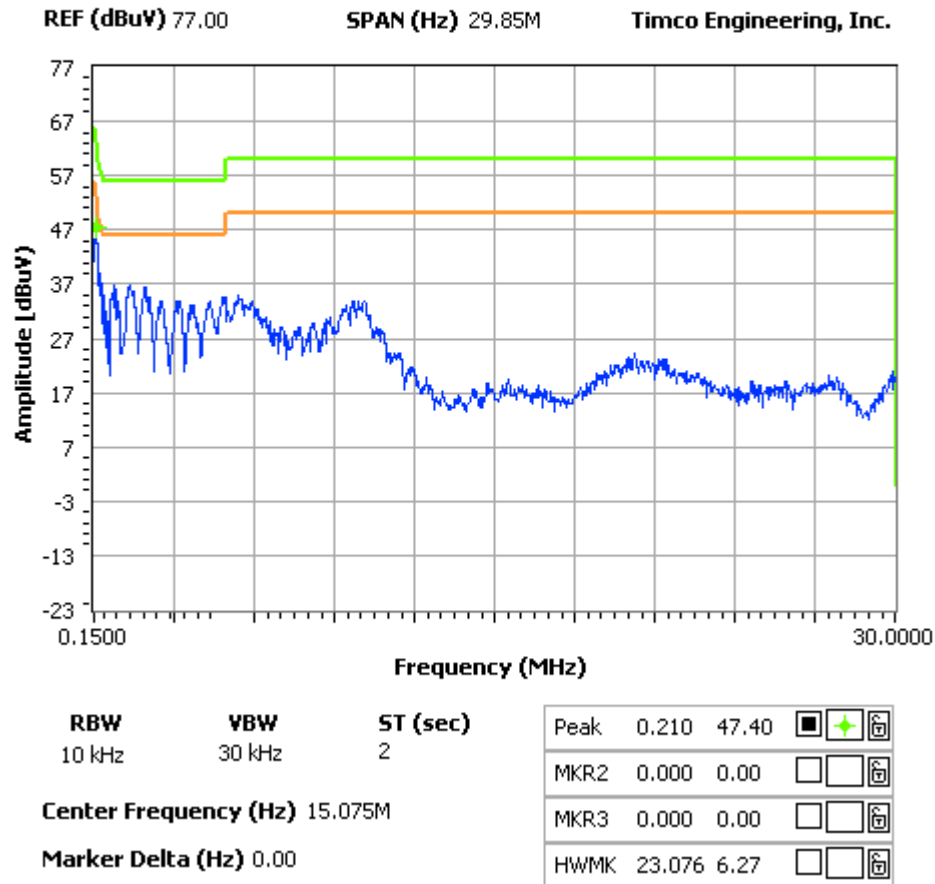

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR700
REPORT # V:\A\AudioTechnica_JFZ\1078AUT6\1078AUT6TestReport.doc
PAGE # 8


TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

NOTES:

AUDIO TECHNICA CORPORATION - FCC ID: JFZR700
POWERLINE CONDUCTED PLOT - LINE 2

FCC 15.107 Mask Class B

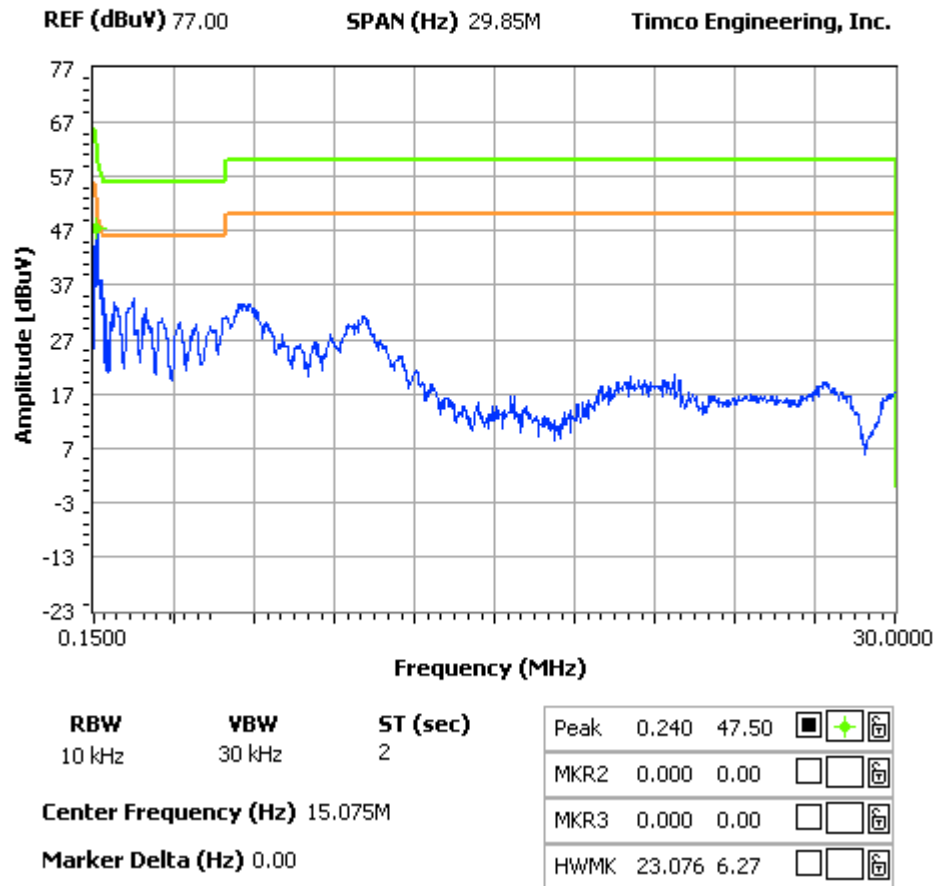

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR700
REPORT # V:\A\AudioTechnica_JFZ\1078AUT6\1078AUT6TestReport.doc
PAGE # 9