



3DH5_Ant1_2441

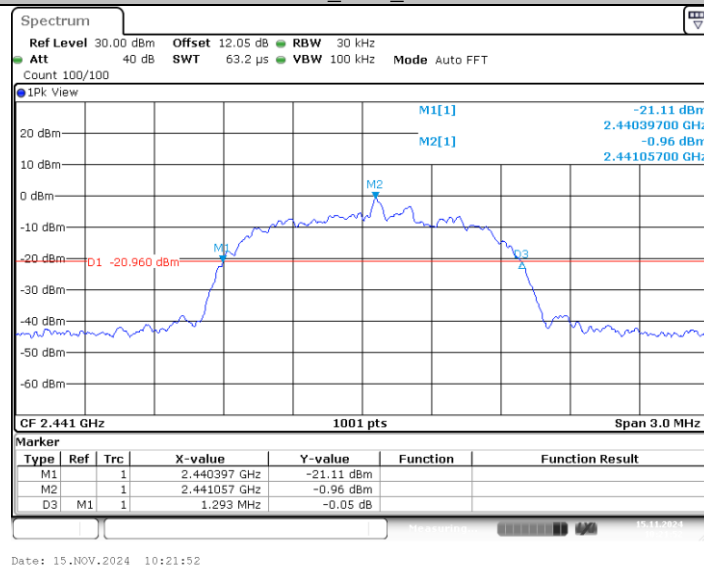

3DH5_Ant1_2480

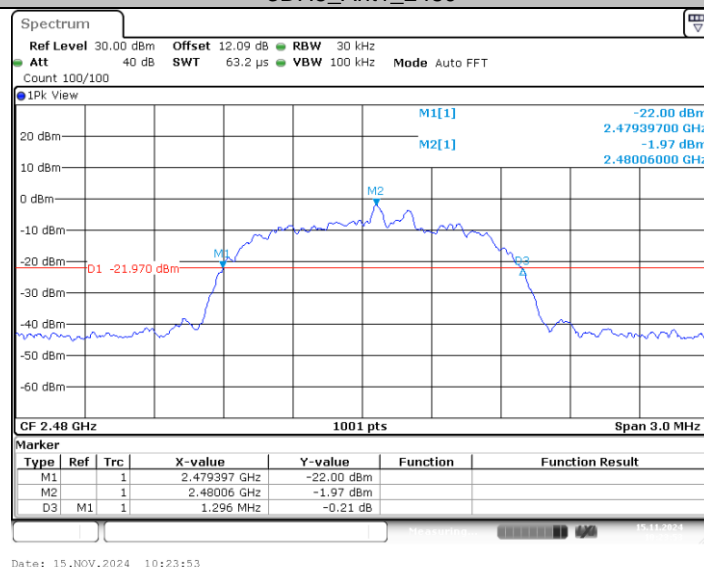

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




3.6. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1) / RSS-247 5.1 b

Test Item	Limit	Frequency Range (MHz)
Channel Separation	>25kHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration

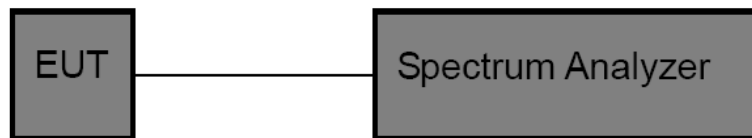

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Frequency (MHz)	Carrier Frequencies Separation (MHz)	Limit (MHz)	Verdict
GFSK	Hop_2441	1.003	>0.627	Pass
$\pi/4$ -DQPSK	Hop_2441	1.006	>0.860	Pass
8-DPSK	Hop_2441	1	>0.867	Pass



Test plot as follows:

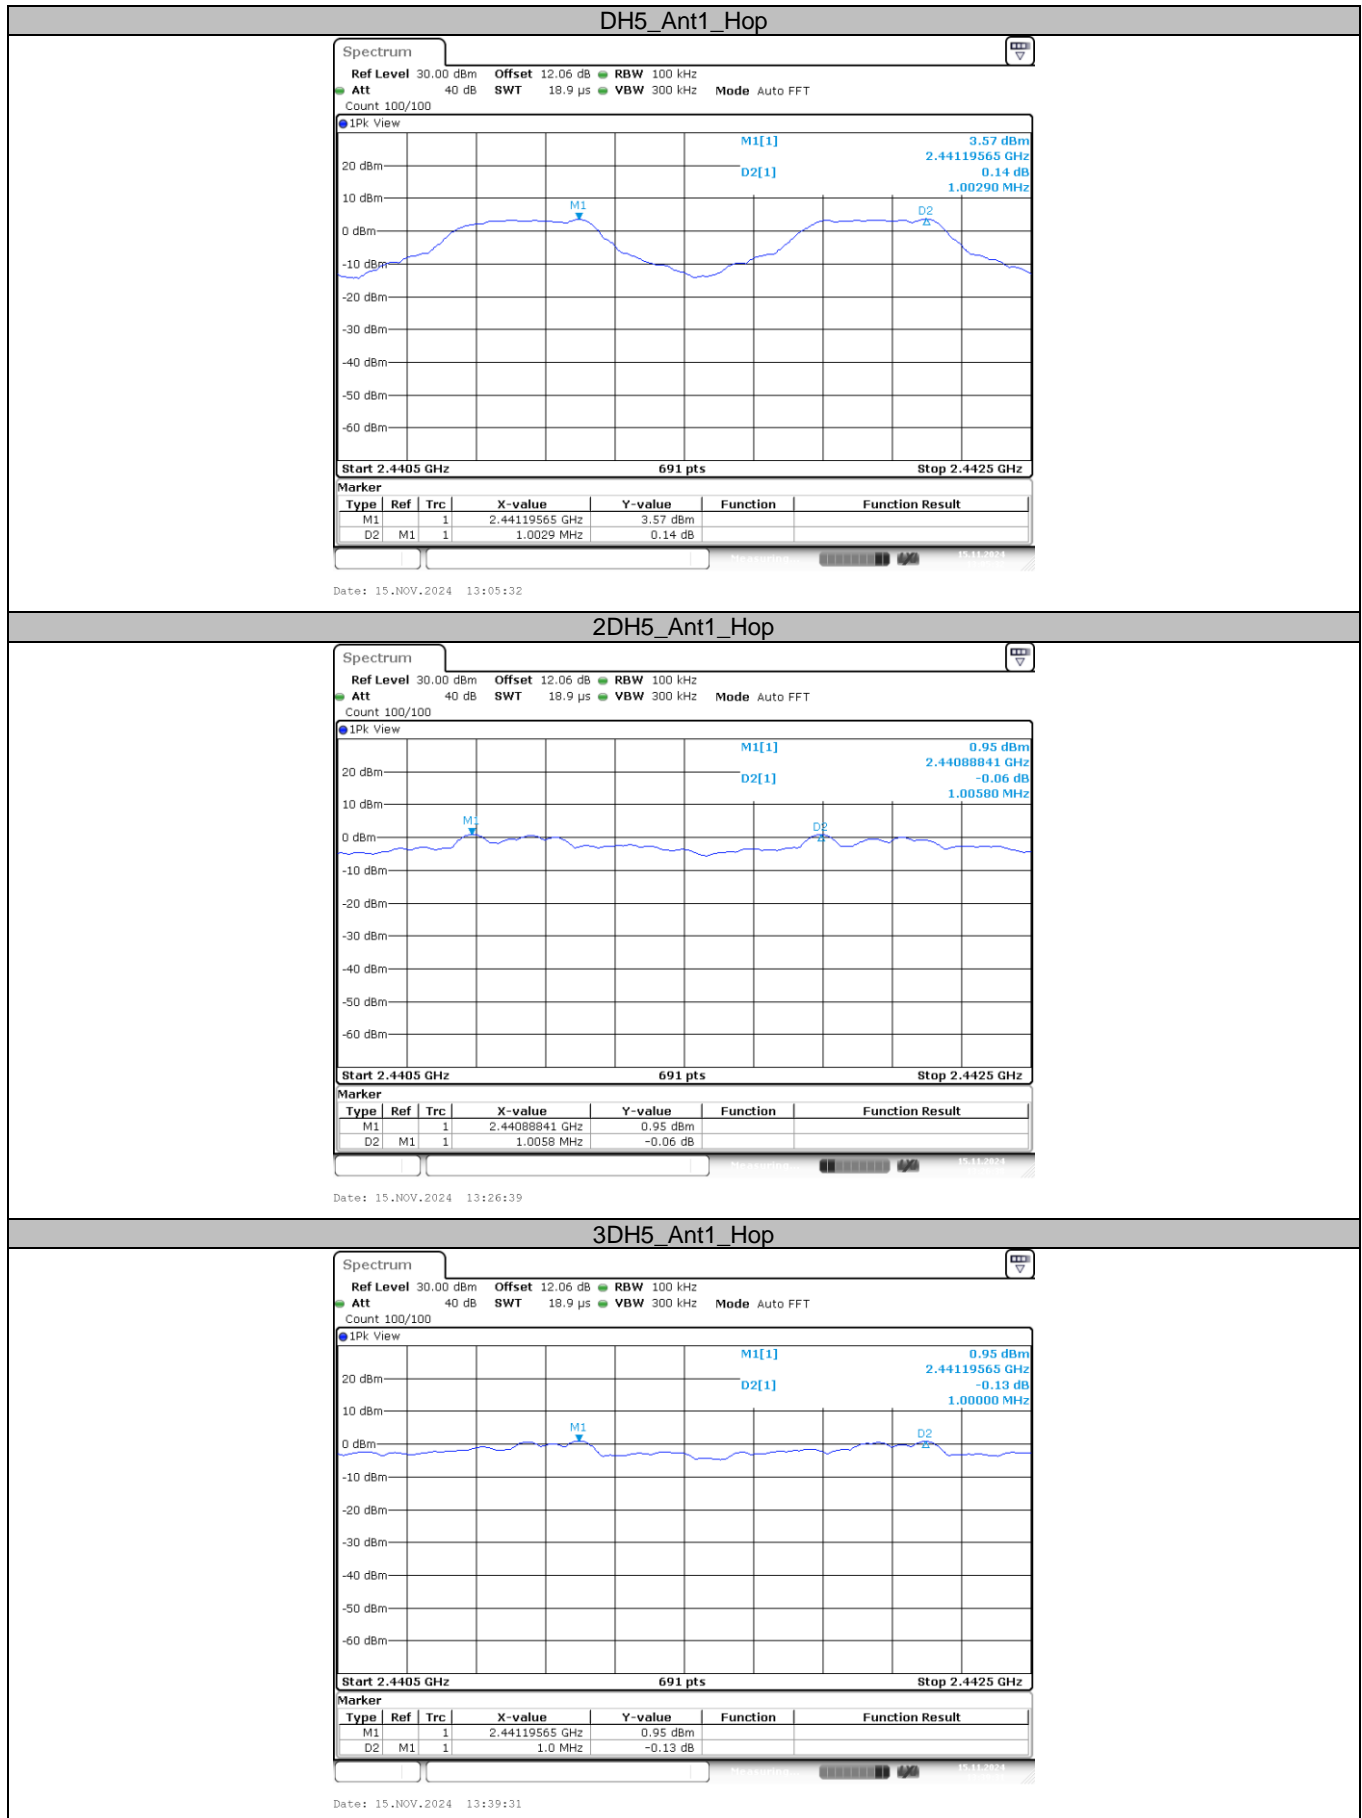

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




3.7. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 5.1 d

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Number of Hopping Channel	≥ 15

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW \geq RBW, Sweep time= Auto.

Test Mode

Please refer to the clause 2.4.

Test Result

Test Mode	Channel Number	Limit	Verdict
GFSK	79	≥ 15	Pass
$\pi/4$ -DQPSK	79	≥ 15	Pass
8-DPSK	79	≥ 15	Pass



Test plot as follows:



CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




3.8. Dwell Time

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 5.1 d

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW \geq RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode


Please refer to the clause 2.4.

**Test Result**

TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.380	320	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.636	160	0.262	≤0.4	PASS
DH5	Ant1	Hop	2.884	110	0.317	≤0.4	PASS
2DH1	Ant1	Hop	0.386	320	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.638	160	0.262	≤0.4	PASS
2DH5	Ant1	Hop	2.887	110	0.318	≤0.4	PASS
3DH1	Ant1	Hop	0.386	320	0.124	≤0.4	PASS
3DH3	Ant1	Hop	1.638	160	0.262	≤0.4	PASS
3DH5	Ant1	Hop	2.889	110	0.318	≤0.4	PASS



Test plot as follows:

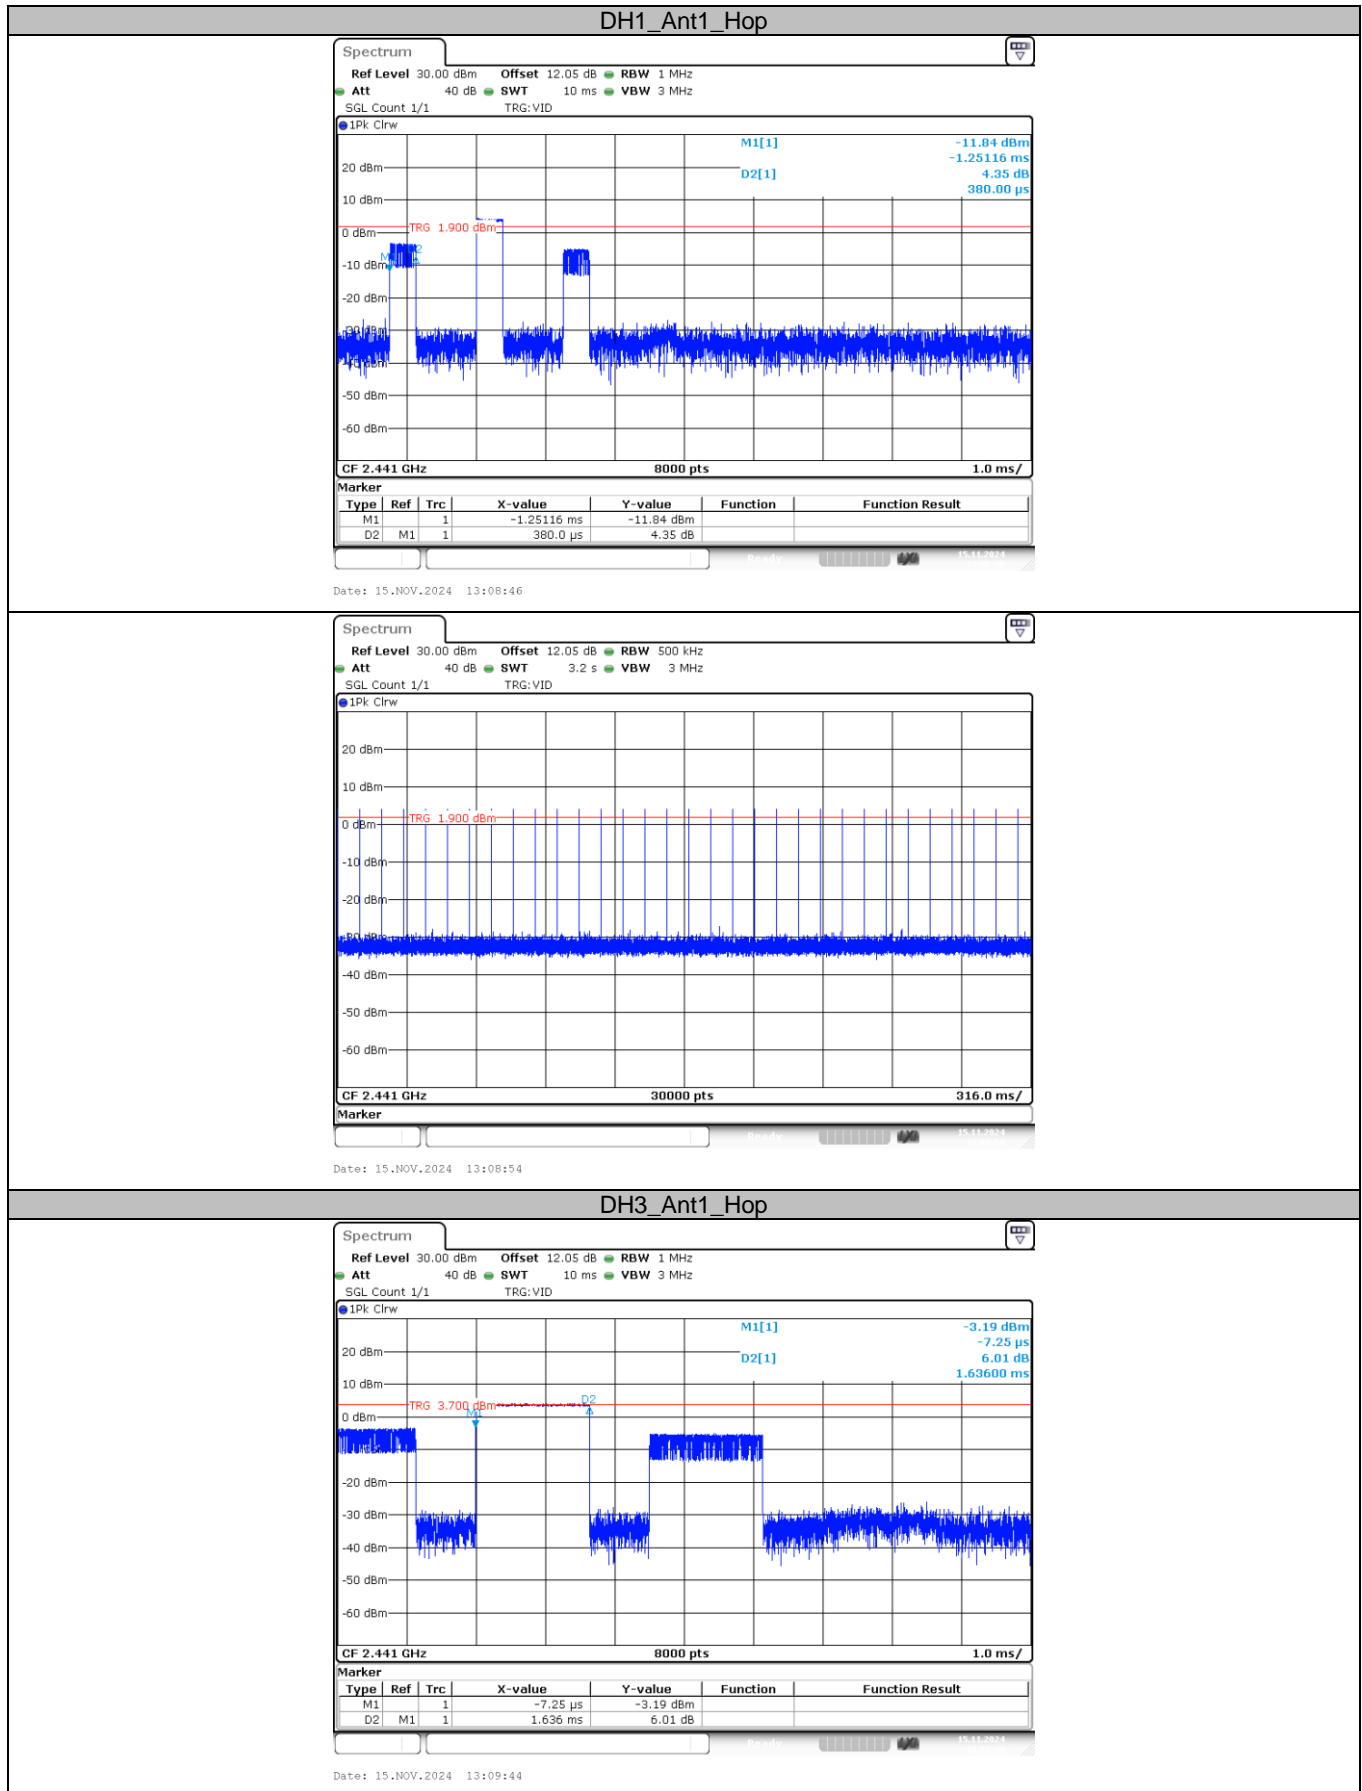


CTC Laboratories, Inc.



Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

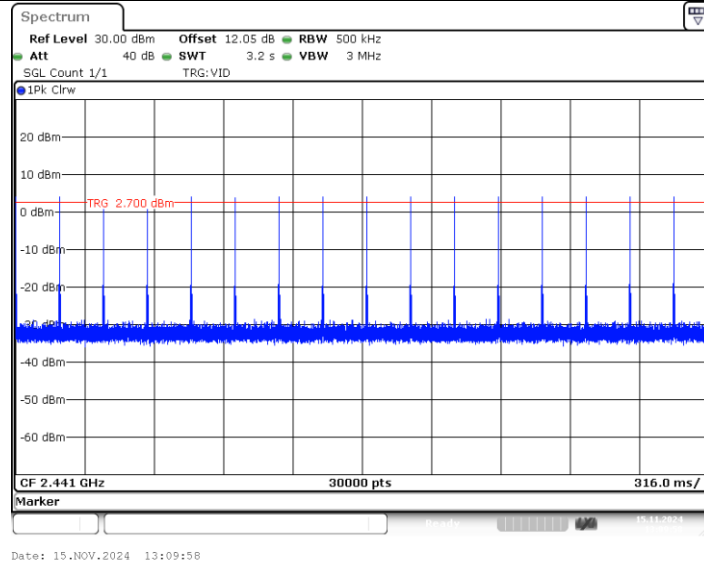

DH5_Ant1_Hop

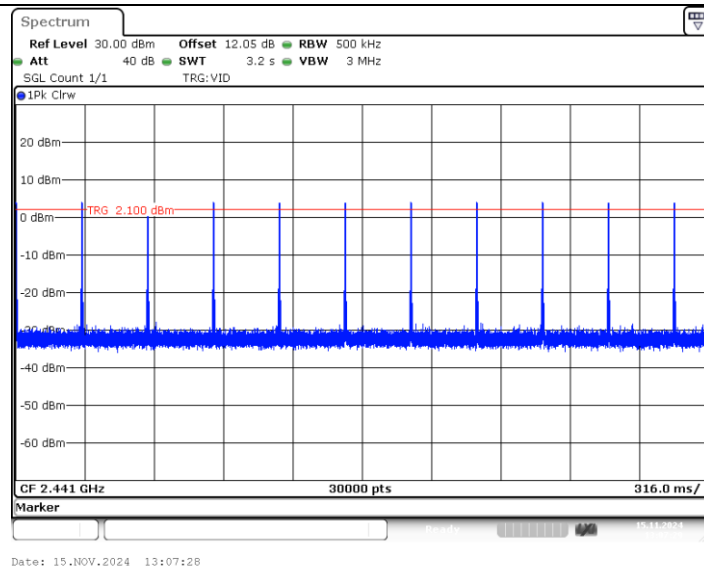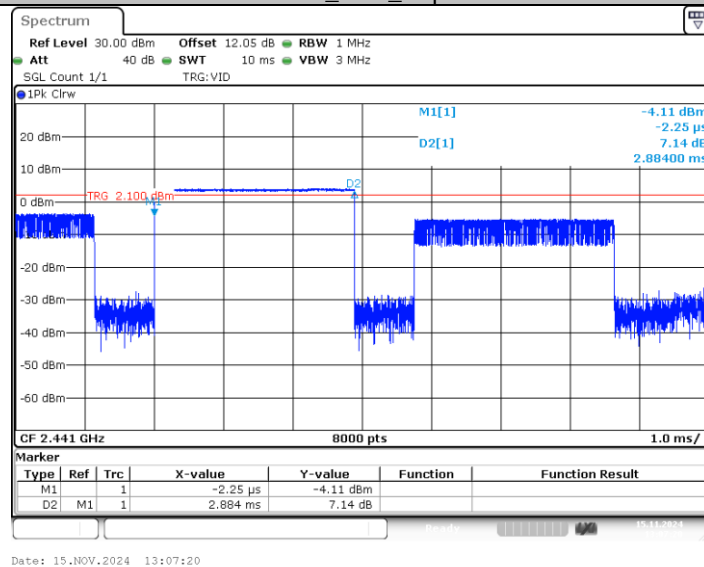


2DH1_Ant1_Hop

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

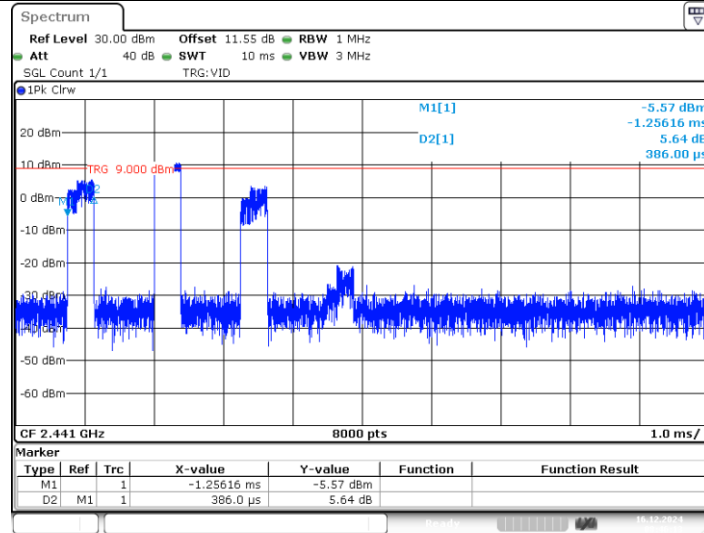


Date: 16.DEC.2024 08:46:13

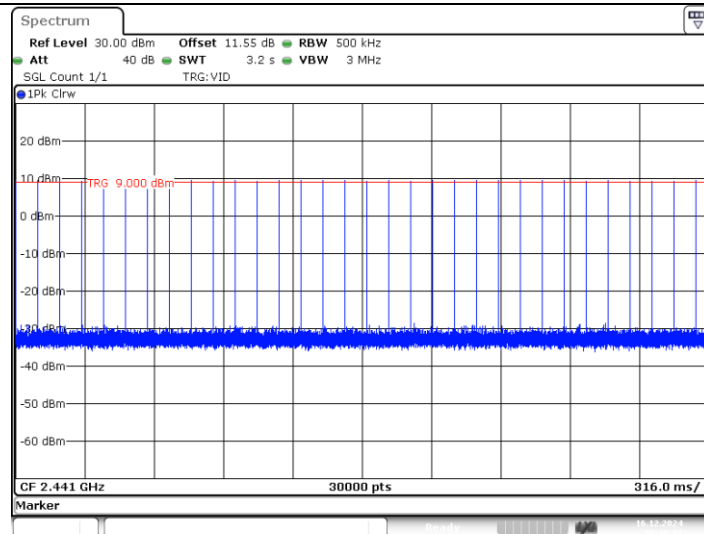

Date: 16.DEC.2024 08:46:22

2DH3_Ant1_Hop

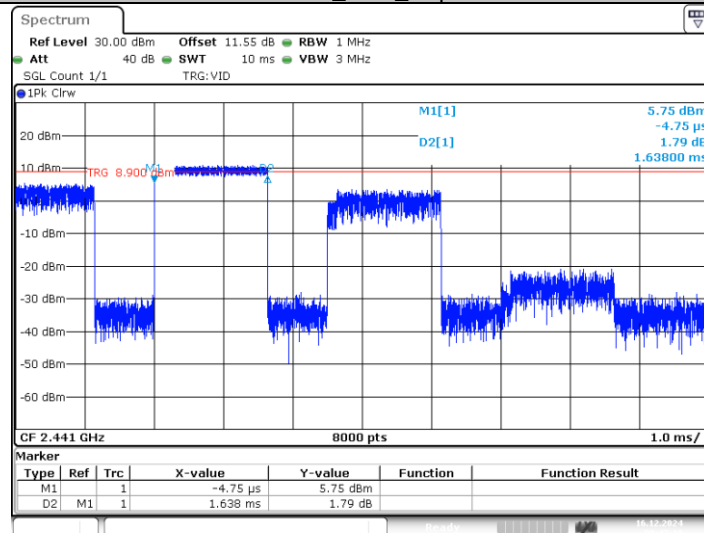


Date: 16.DEC.2024 08:47:10

CTC Laboratories, Inc.



Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

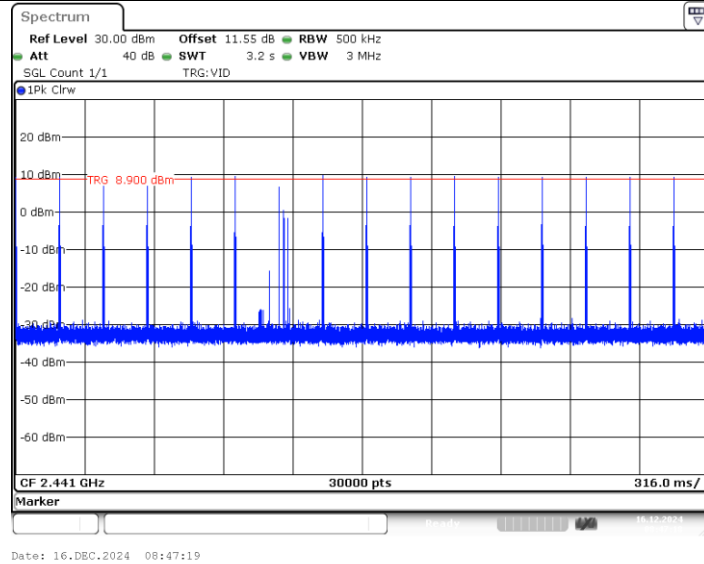

2DH5_Ant1_Hop

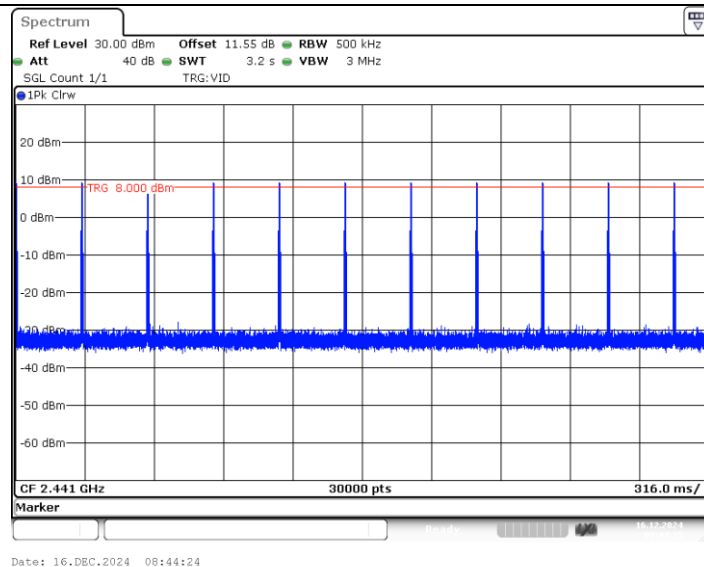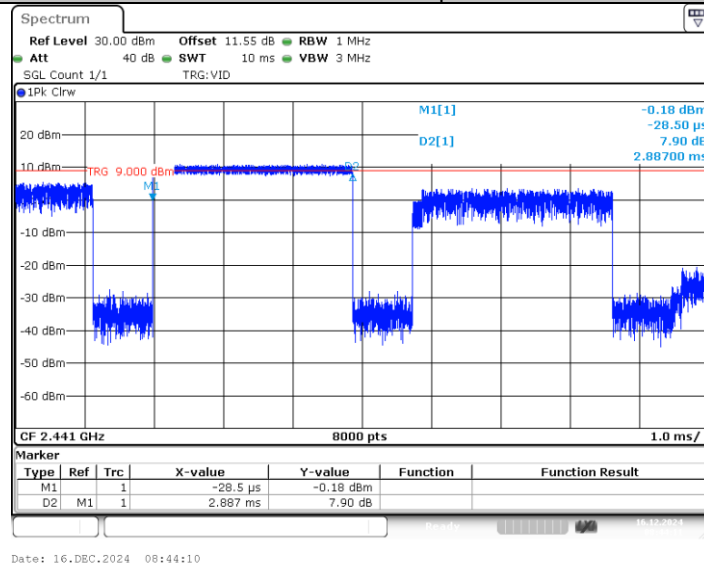



3DH1_Ant1_Hop

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

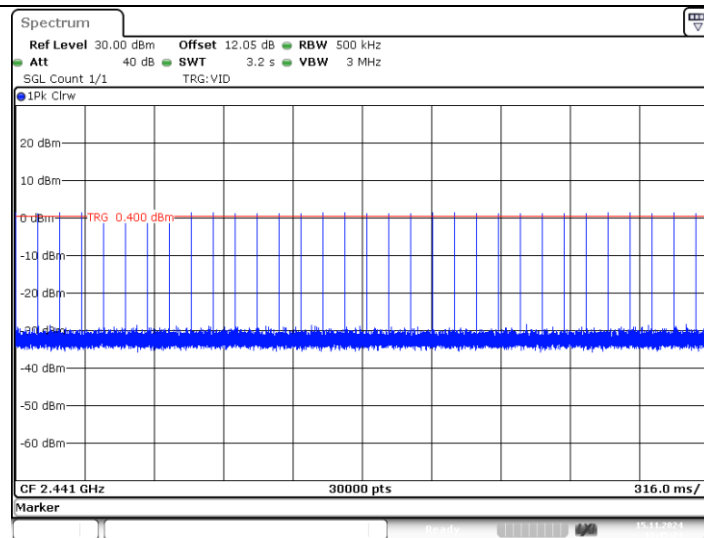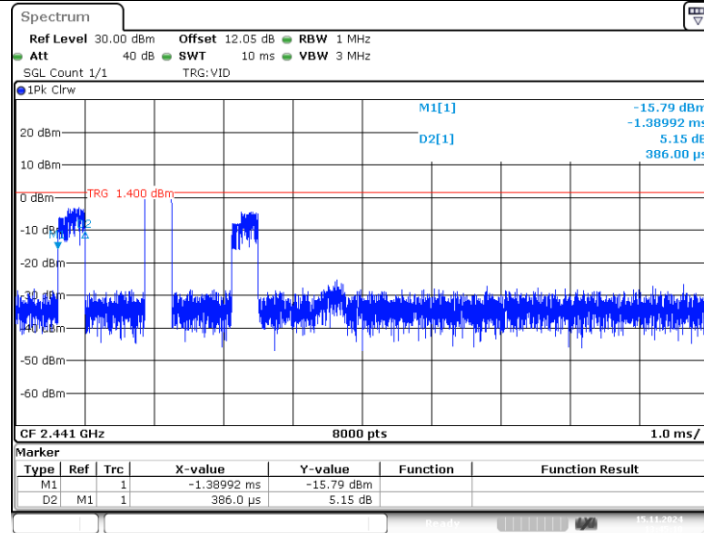

3DH3_Ant1_Hop

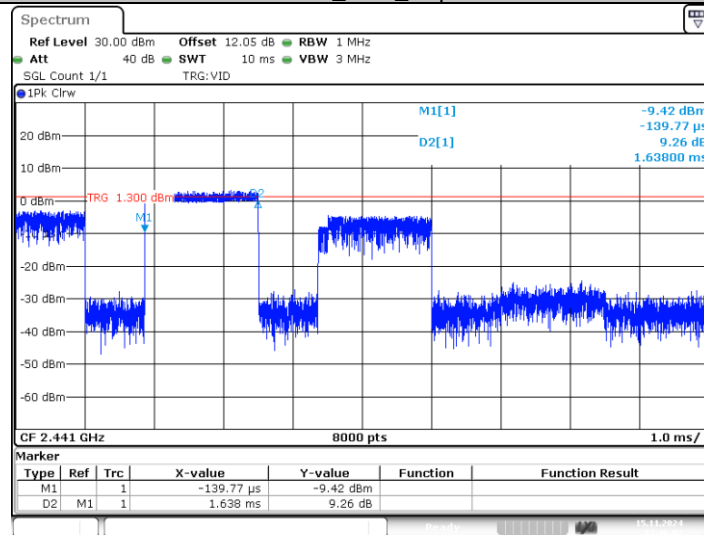


CTC Laboratories, Inc.



Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

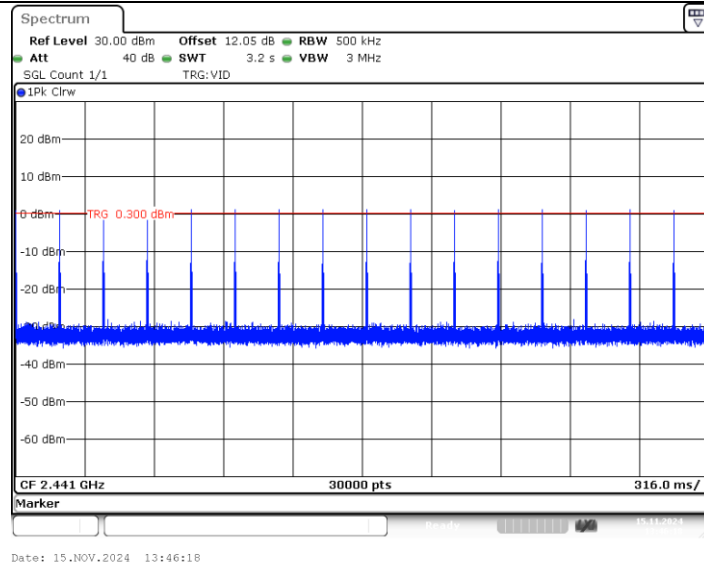

3DH5_Ant1_Hop

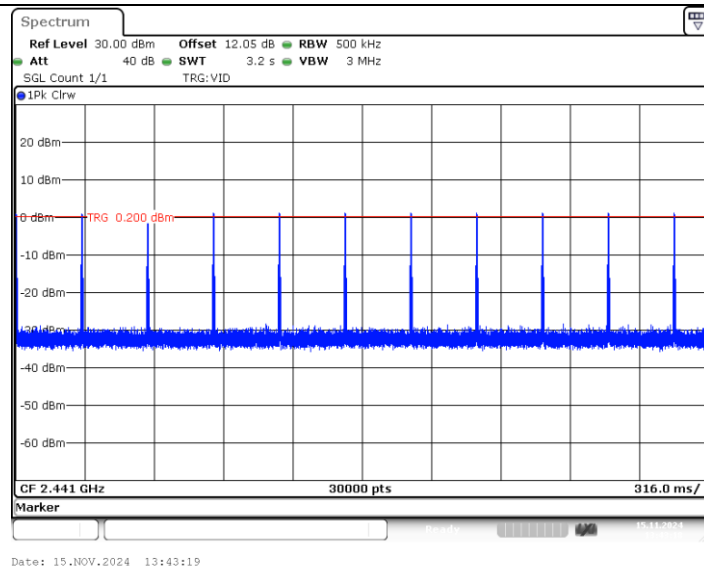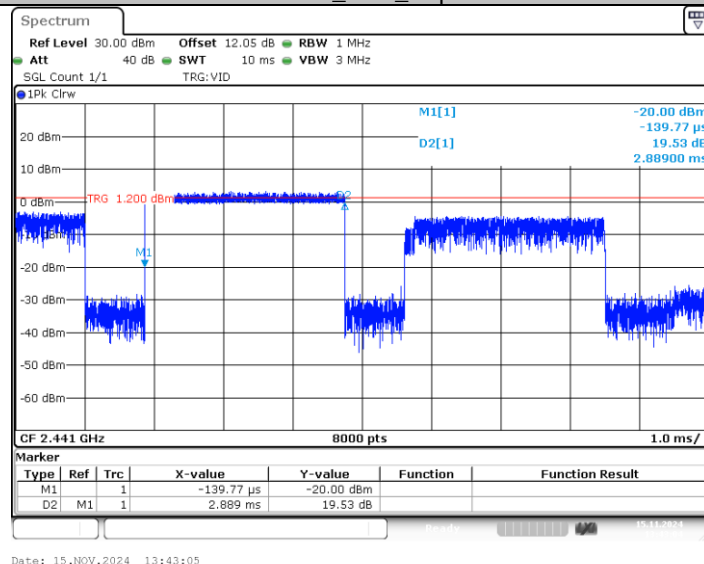

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




3.9. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part 15.247 (b)(1)	Maximum Conducted Output Power	Hopping Channels ≥ 75 , Power $< 1\text{W}$ (30dBm); Others $< 125\text{mW}$ (21dBm)	2400~2483.5
ISED RSS-247 5.4 d	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5
	EIRP	4 Watt or 36dBm	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW $> 20\text{dB}$ Bandwidth.
 - (2) Set VBW \geq RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - (6) Span = Approximately five times the 20dB bandwidth, centered on a hopping channel.

Test Mode


Please refer to the clause 2.4.

**Test Result**

Test Mode	Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm)	Conducted Limit (dBm)	EIRP Limit (dBm)	Verdict
GFSK	2402	3.76	1.48	5.24	≤30	≤36	Pass
	2441	4.05	1.48	5.53	≤30	≤36	Pass
	2480	2.99	1.48	4.47	≤30	≤36	Pass
π/4-DQPSK	2402	2.42	1.48	3.9	≤30	≤36	Pass
	2441	2.71	1.48	4.19	≤30	≤36	Pass
	2480	1.89	1.48	3.37	≤30	≤36	Pass
8-DPSK	2402	2.54	1.48	4.02	≤30	≤36	Pass
	2441	3.17	1.48	4.65	≤30	≤36	Pass
	2480	2.24	1.48	3.72	≤30	≤36	Pass



Test plot as follows:

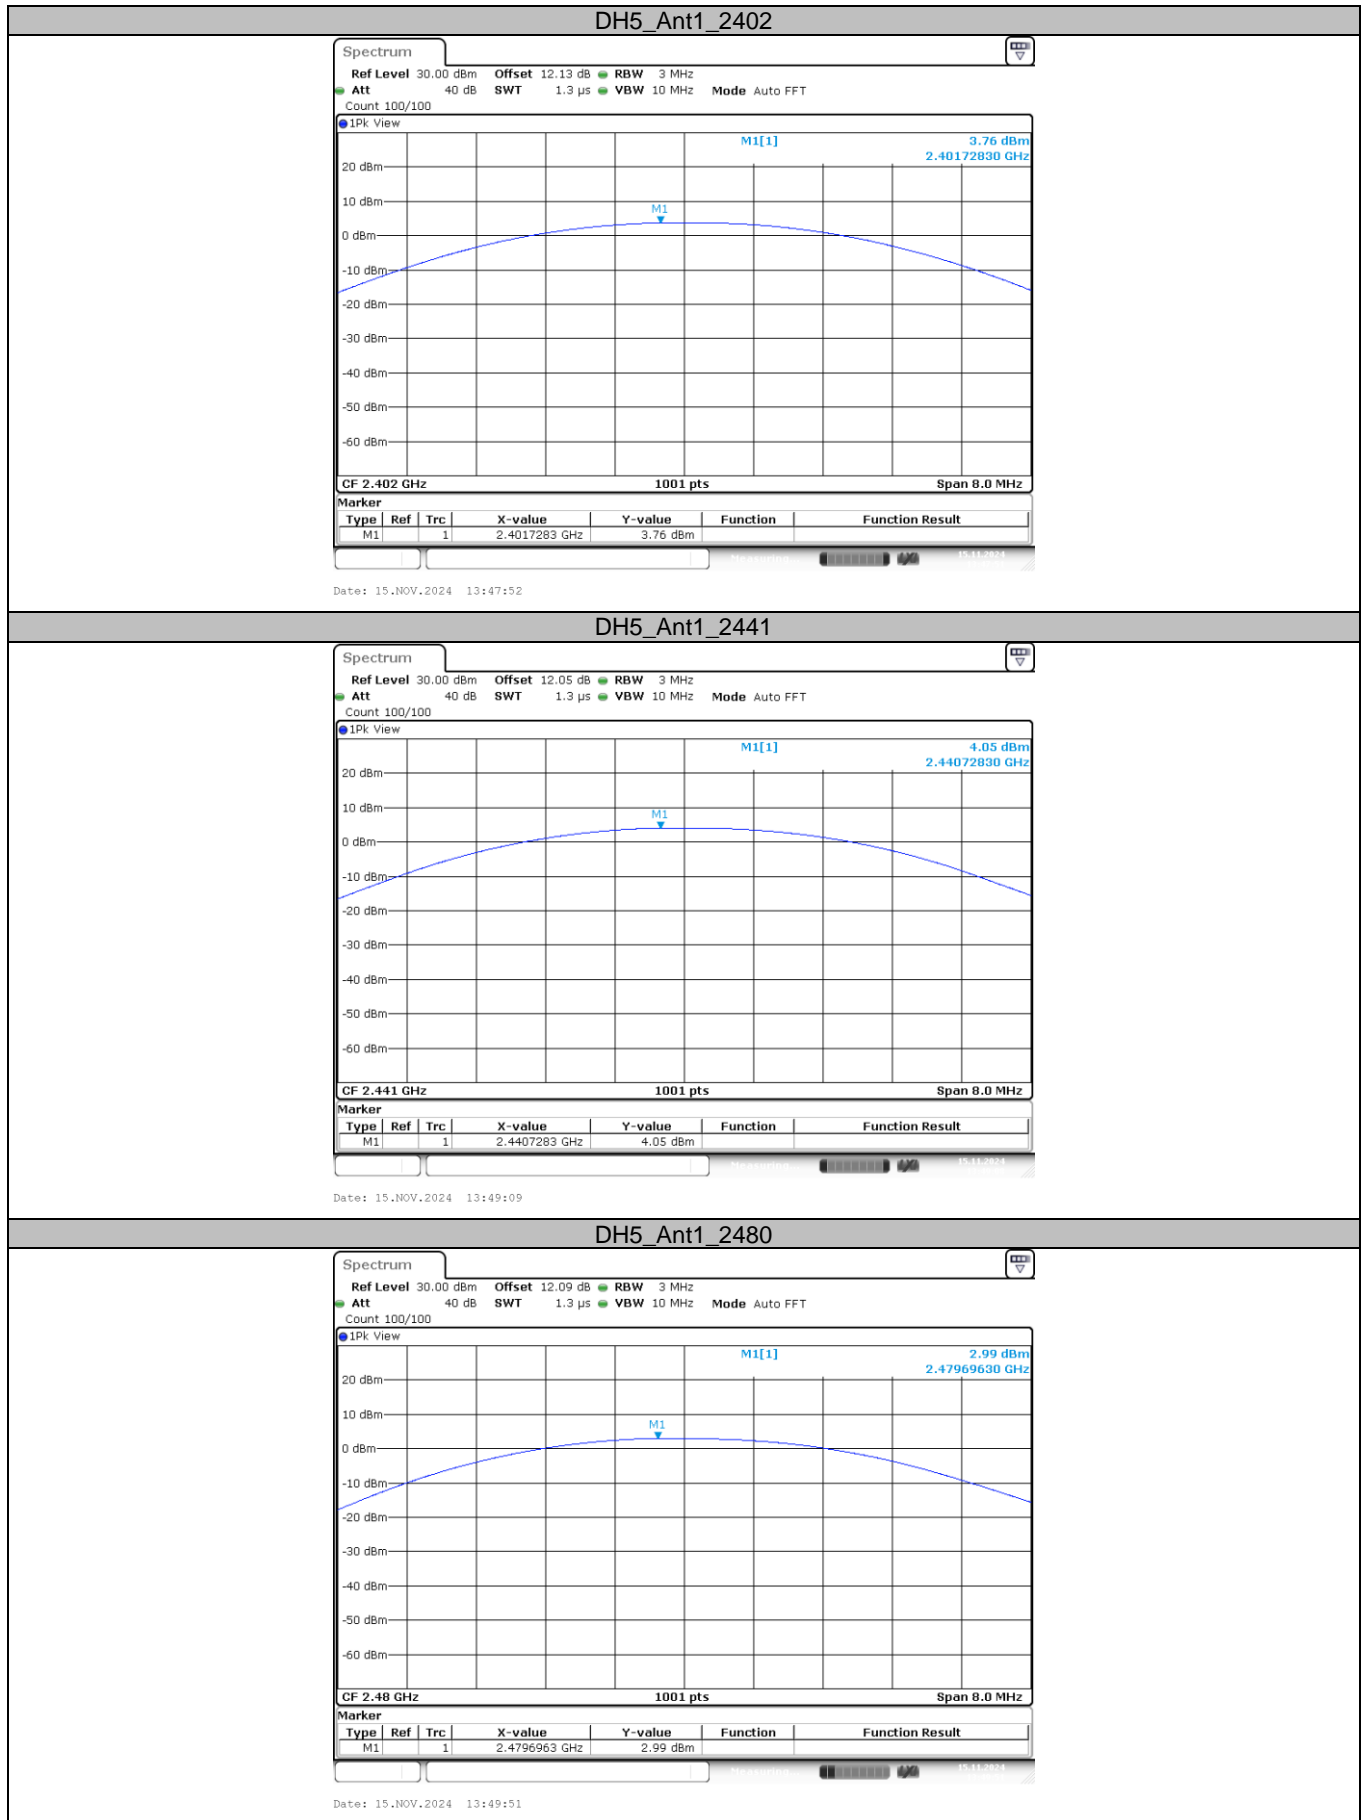

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




2DH5_Ant1_2402

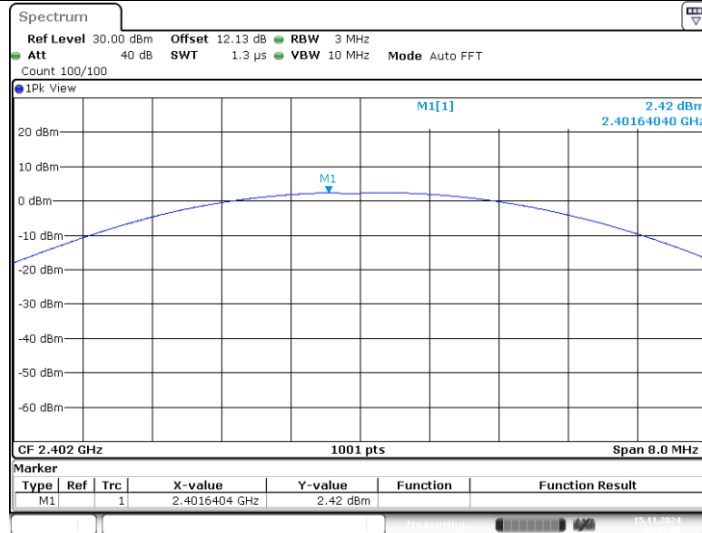


Date: 15.NOV.2024 13:53:09

2DH5_Ant1_2441

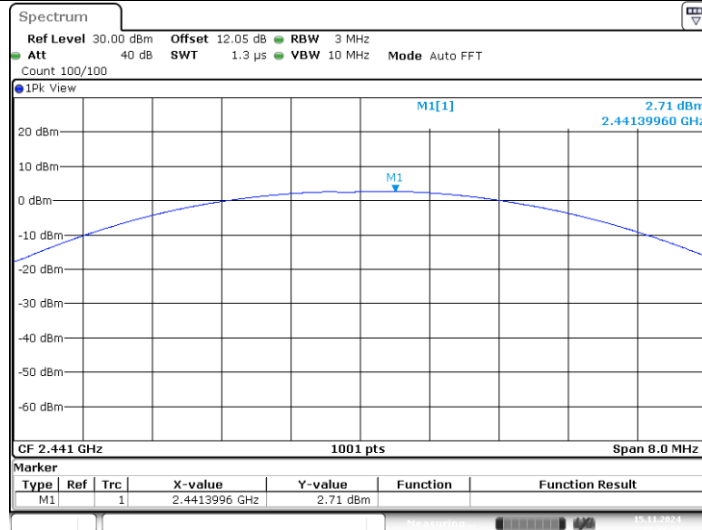


Date: 15.NOV.2024 13:53:55

2DH5_Ant1_2480

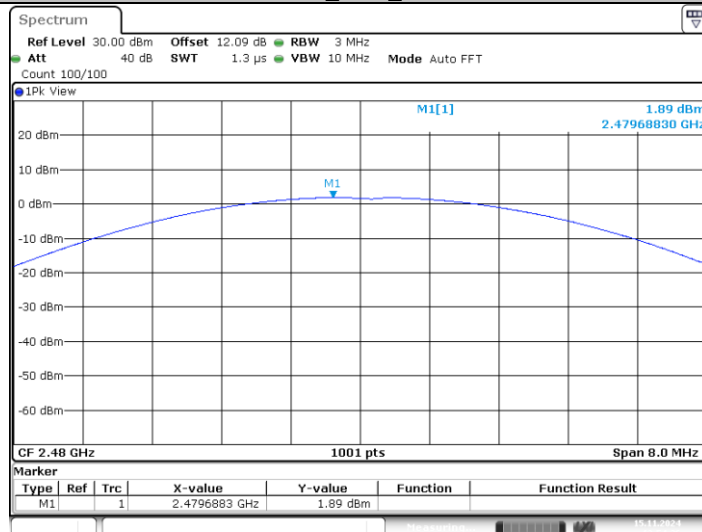


Date: 15.NOV.2024 13:54:35


3DH5_Ant1_2402

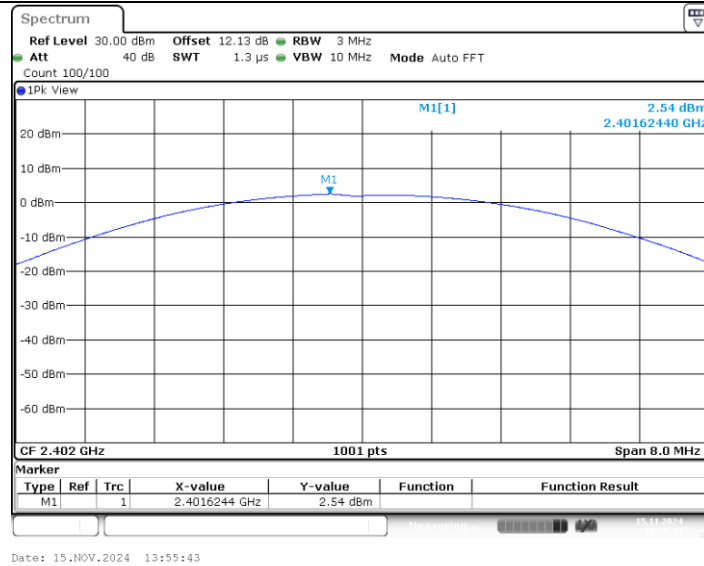

3DH5_Ant1_2441

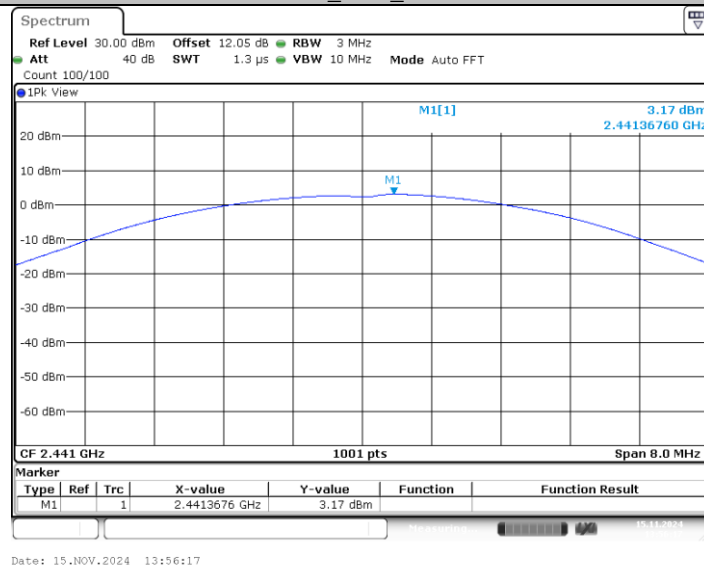

3DH5_Ant1_2480

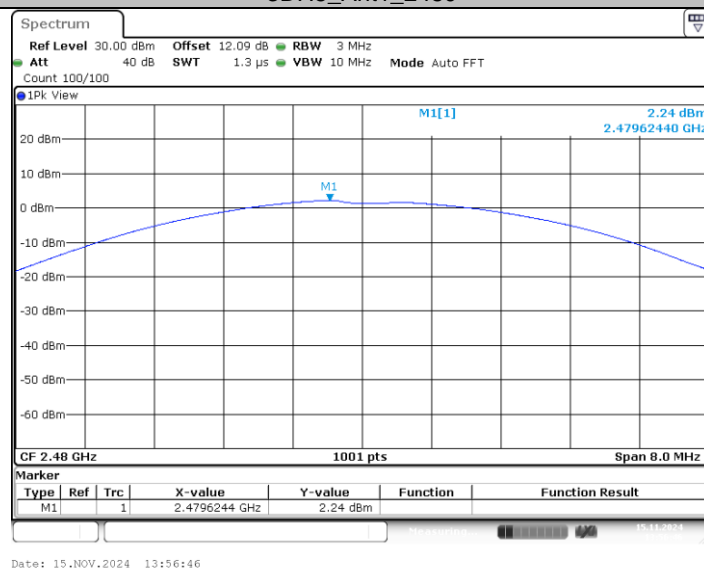

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




3.10. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to test channel center frequency.
Set the span to 0Hz.
Set the RBW to 10MHz.
Set the VBW to 10MHz.
Detector: Peak.
Sweep time: Auto.
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

Test Result

Test Mode	Frequency (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
GFSK	2402	2.88	3.74	77.01	0.35	1
	2441	2.88	3.74	77.01	0.35	1
	2480	2.88	3.74	77.01	0.35	1
$\pi/4$ -DQPSK	2402	2.88	3.74	77.01	0.35	1
	2441	2.90	3.76	77.13	0.34	1
	2480	2.88	3.74	77.01	0.35	1
8-DPSK	2402	2.89	3.76	76.86	0.35	1
	2441	2.88	3.75	76.80	0.35	1
	2480	2.90	3.76	77.13	0.34	1



3.11. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END OF REPORT*****