


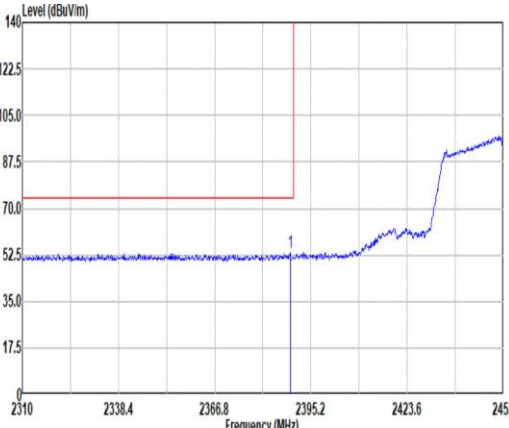
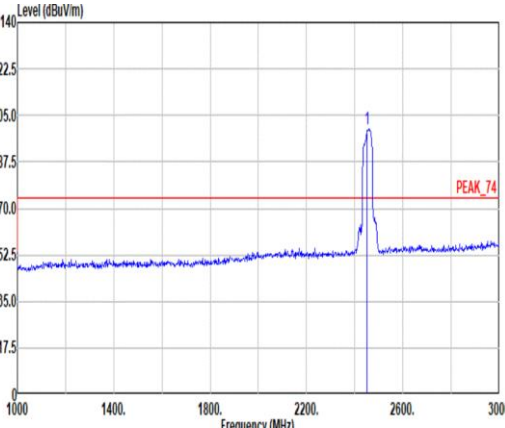
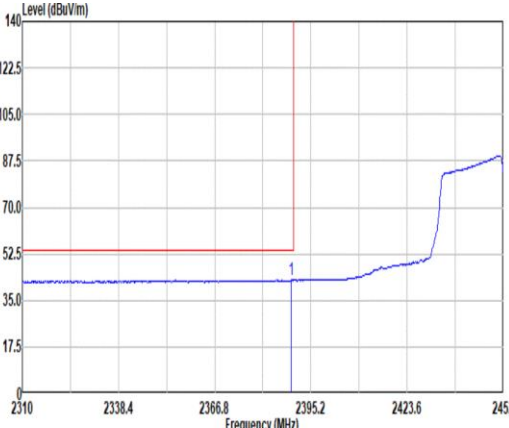



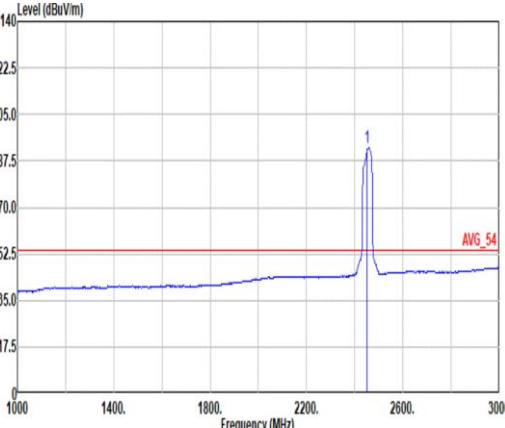


		23																																																																																																
Mode	Band Edge - L																																																																																																	
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																											
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.09</td><td>53.42</td><td>74.00</td><td>-20.58</td><td>42.49</td><td>27.49</td><td>6.78</td><td>33.34</td><td>10.00</td><td>374 251 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.09	53.42	74.00	-20.58	42.49	27.49	6.78	33.34	10.00	374 251 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>100.00</td><td>-----</td><td>-----</td><td>89.01</td><td>27.50</td><td>6.87</td><td>33.30</td><td>10.00</td><td>374 251 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	100.00	-----	-----	89.01	27.50	6.87	33.30	10.00	374 251 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.09	53.42	74.00	-20.58	42.49	27.49	6.78	33.34	10.00	374 251 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2452.00	100.00	-----	-----	89.01	27.50	6.87	33.30	10.00	374 251 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto						Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto																																																																																											
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.38</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>31.81</td><td>27.49</td><td>6.78</td><td>33.34</td><td>10.00</td><td>374 251 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.38	42.74	54.00	-11.26	31.81	27.49	6.78	33.34	10.00	374 251 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>92.33</td><td>-----</td><td>-----</td><td>81.26</td><td>27.50</td><td>6.87</td><td>33.30</td><td>10.00</td><td>374 251 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	92.33	-----	-----	81.26	27.50	6.87	33.30	10.00	374 251 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.38	42.74	54.00	-11.26	31.81	27.49	6.78	33.34	10.00	374 251 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2452.00	92.33	-----	-----	81.26	27.50	6.87	33.30	10.00	374 251 AVERAGE																																																																																								




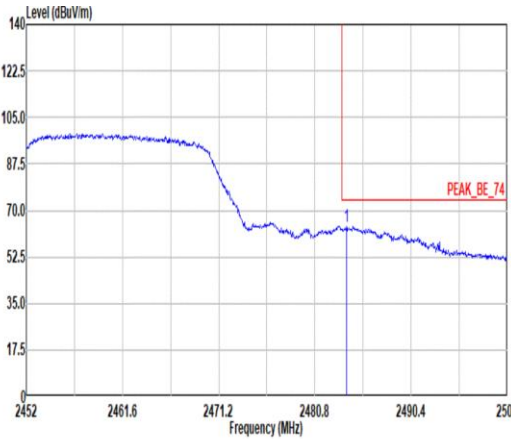


Mode	23																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH09_2452MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_230017 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.97</td><td>63.68</td><td>74.00</td><td>-10.32</td><td>52.35</td><td>27.70</td><td>6.91</td><td>33.28</td><td>10.00</td><td>374</td><td>251</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.97	63.68	74.00	-10.32	52.35	27.70	6.91	33.28	10.00	374	251	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.97	63.68	74.00	-10.32	52.35	27.70	6.91	33.28	10.00	374	251	PEAK																																		
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_230017 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.45</td><td>48.00</td><td>54.00</td><td>-5.92</td><td>36.75</td><td>27.70</td><td>6.91</td><td>33.28</td><td>10.00</td><td>374</td><td>251</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.45	48.00	54.00	-5.92	36.75	27.70	6.91	33.28	10.00	374	251	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.45	48.00	54.00	-5.92	36.75	27.70	6.91	33.28	10.00	374	251	AVERAGE																																		


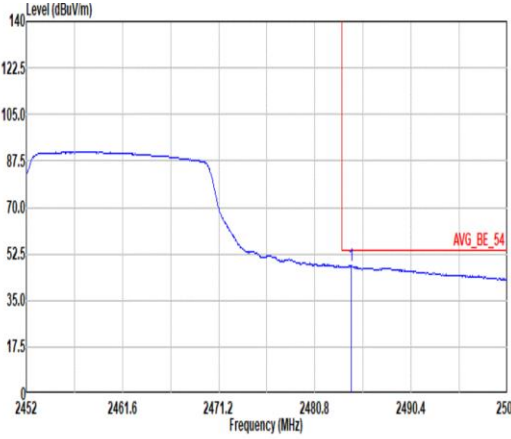


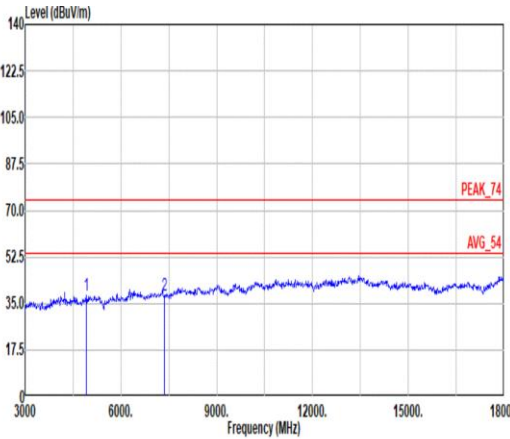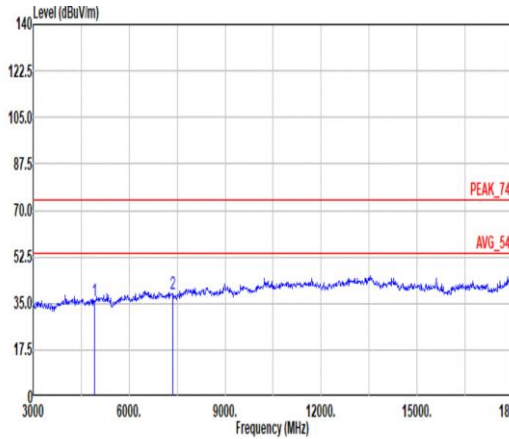Mode	23																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_230817 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>38.13</td><td>74.00</td><td>-35.87</td><td>51.87</td><td>32.72</td><td>11.50</td><td>58.60</td><td>0.64</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7356.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>44.89</td><td>36.66</td><td>14.60</td><td>58.96</td><td>0.63</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	38.13	74.00	-35.87	51.87	32.72	11.50	58.60	0.64	--	Peak	2	7356.00	37.82	74.00	-36.18	44.89	36.66	14.60	58.96	0.63	--	Peak	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_230817 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>35.68</td><td>74.00</td><td>-38.32</td><td>49.42</td><td>32.72</td><td>11.50</td><td>58.60</td><td>0.64</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7356.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.58</td><td>36.66</td><td>14.60</td><td>58.96</td><td>0.63</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	35.68	74.00	-38.32	49.42	32.72	11.50	58.60	0.64	--	Peak	2	7356.00	38.51	74.00	-35.49	45.58	36.66	14.60	58.96	0.63	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4904.00	38.13	74.00	-35.87	51.87	32.72	11.50	58.60	0.64	--	Peak																																																																																																					
2	7356.00	37.82	74.00	-36.18	44.89	36.66	14.60	58.96	0.63	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4904.00	35.68	74.00	-38.32	49.42	32.72	11.50	58.60	0.64	--	Peak																																																																																																					
2	7356.00	38.51	74.00	-35.49	45.58	36.66	14.60	58.96	0.63	--	Peak																																																																																																					

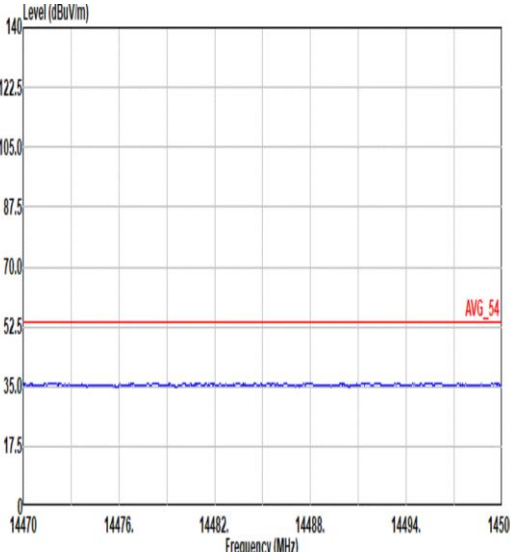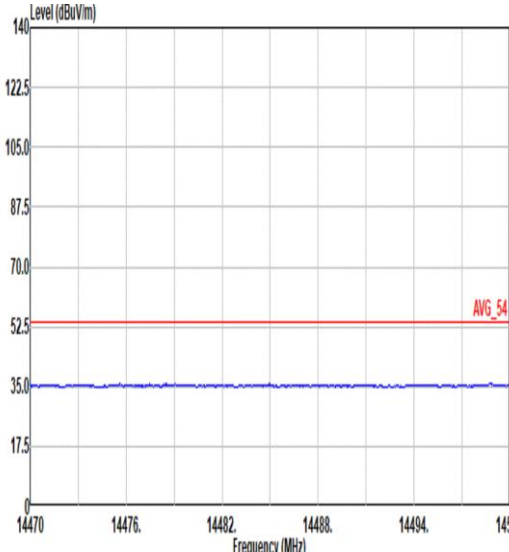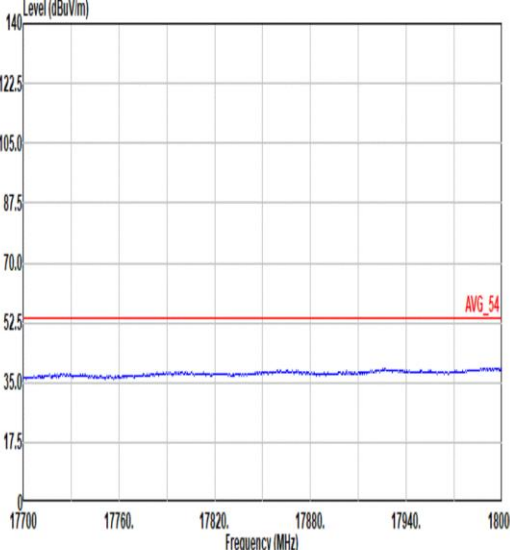
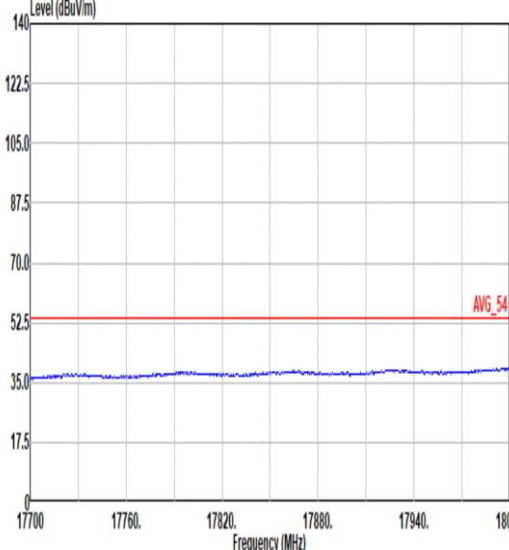


Mode	23	
	Harmonic	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 VERTICAL
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 VERTICAL

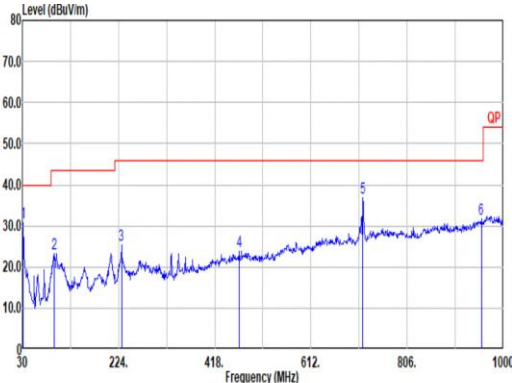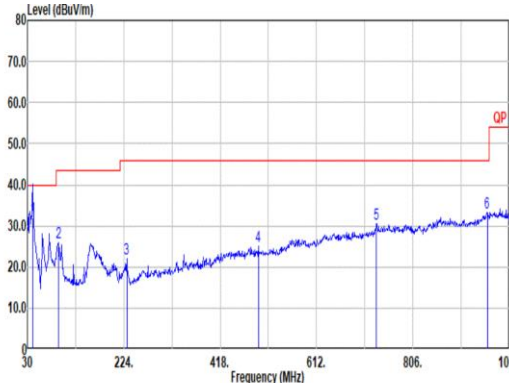

Mode	24																																																																																																																																																																																																																																				
	LF																																																																																																																																																																																																																																				
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																																																																				
ANT	1																																																																																																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																																																																																																														
QPI Peak																																																																																																																																																																																																																																					
	Site : 03CH11-HY Condition: QP 3m Bilog_35414_231007 HORIZONTAL						Site : 03CH11-HY Condition: QP 3m Bilog_35414_231007 VERTICAL																																																																																																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>30.70</td><td>40.00</td><td>-9.30</td><td>38.82</td><td>23.69</td><td>0.48</td><td>32.45</td><td>0.16</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>94.02</td><td>23.29</td><td>43.50</td><td>-20.21</td><td>39.42</td><td>15.06</td><td>1.04</td><td>32.42</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>229.82</td><td>25.41</td><td>46.00</td><td>-20.59</td><td>39.65</td><td>15.97</td><td>1.83</td><td>32.24</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>466.50</td><td>23.78</td><td>46.00</td><td>-22.22</td><td>29.61</td><td>23.25</td><td>2.75</td><td>32.06</td><td>0.23</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>715.79</td><td>36.76</td><td>46.00</td><td>-9.24</td><td>37.04</td><td>26.77</td><td>3.49</td><td>31.65</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>955.38</td><td>31.68</td><td>46.00</td><td>-14.32</td><td>27.17</td><td>30.89</td><td>4.09</td><td>30.93</td><td>0.46</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.97	30.70	40.00	-9.30	38.82	23.69	0.48	32.45	0.16	--	--	Peak	2	94.02	23.29	43.50	-20.21	39.42	15.06	1.04	32.42	0.19	--	--	Peak	3	229.82	25.41	46.00	-20.59	39.65	15.97	1.83	32.24	0.20	--	--	Peak	4	466.50	23.78	46.00	-22.22	29.61	23.25	2.75	32.06	0.23	--	--	Peak	5	715.79	36.76	46.00	-9.24	37.04	26.77	3.49	31.65	0.31	--	--	Peak	6	955.38	31.68	46.00	-14.32	27.17	30.89	4.09	30.93	0.46	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>40.67</td><td>32.12</td><td>40.00</td><td>-7.88</td><td>44.65</td><td>19.13</td><td>0.52</td><td>32.32</td><td>0.14</td><td>100</td><td>308</td><td>QP</td></tr><tr><td>2</td><td>92.00</td><td>25.89</td><td>43.50</td><td>-17.61</td><td>42.22</td><td>14.89</td><td>1.00</td><td>32.42</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>229.82</td><td>22.04</td><td>46.00</td><td>-23.96</td><td>36.28</td><td>15.97</td><td>1.83</td><td>32.24</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>494.63</td><td>25.03</td><td>46.00</td><td>-20.97</td><td>30.74</td><td>23.63</td><td>2.84</td><td>32.41</td><td>0.23</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>732.28</td><td>30.47</td><td>46.00</td><td>-15.53</td><td>30.74</td><td>27.47</td><td>3.53</td><td>31.59</td><td>0.32</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>955.38</td><td>33.33</td><td>46.00</td><td>-12.67</td><td>28.82</td><td>30.89</td><td>4.09</td><td>30.93</td><td>0.46</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	40.67	32.12	40.00	-7.88	44.65	19.13	0.52	32.32	0.14	100	308	QP	2	92.00	25.89	43.50	-17.61	42.22	14.89	1.00	32.42	0.20	--	--	Peak	3	229.82	22.04	46.00	-23.96	36.28	15.97	1.83	32.24	0.20	--	--	Peak	4	494.63	25.03	46.00	-20.97	30.74	23.63	2.84	32.41	0.23	--	--	Peak	5	732.28	30.47	46.00	-15.53	30.74	27.47	3.53	31.59	0.32	--	--	Peak	6	955.38	33.33	46.00	-12.67	28.82	30.89	4.09	30.93	0.46	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																											
1	30.97	30.70	40.00	-9.30	38.82	23.69	0.48	32.45	0.16	--	--	Peak																																																																																																																																																																																																																									
2	94.02	23.29	43.50	-20.21	39.42	15.06	1.04	32.42	0.19	--	--	Peak																																																																																																																																																																																																																									
3	229.82	25.41	46.00	-20.59	39.65	15.97	1.83	32.24	0.20	--	--	Peak																																																																																																																																																																																																																									
4	466.50	23.78	46.00	-22.22	29.61	23.25	2.75	32.06	0.23	--	--	Peak																																																																																																																																																																																																																									
5	715.79	36.76	46.00	-9.24	37.04	26.77	3.49	31.65	0.31	--	--	Peak																																																																																																																																																																																																																									
6	955.38	31.68	46.00	-14.32	27.17	30.89	4.09	30.93	0.46	--	--	Peak																																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																											
1	40.67	32.12	40.00	-7.88	44.65	19.13	0.52	32.32	0.14	100	308	QP																																																																																																																																																																																																																									
2	92.00	25.89	43.50	-17.61	42.22	14.89	1.00	32.42	0.20	--	--	Peak																																																																																																																																																																																																																									
3	229.82	22.04	46.00	-23.96	36.28	15.97	1.83	32.24	0.20	--	--	Peak																																																																																																																																																																																																																									
4	494.63	25.03	46.00	-20.97	30.74	23.63	2.84	32.41	0.23	--	--	Peak																																																																																																																																																																																																																									
5	732.28	30.47	46.00	-15.53	30.74	27.47	3.53	31.59	0.32	--	--	Peak																																																																																																																																																																																																																									
6	955.38	33.33	46.00	-12.67	28.82	30.89	4.09	30.93	0.46	--	--	Peak																																																																																																																																																																																																																									

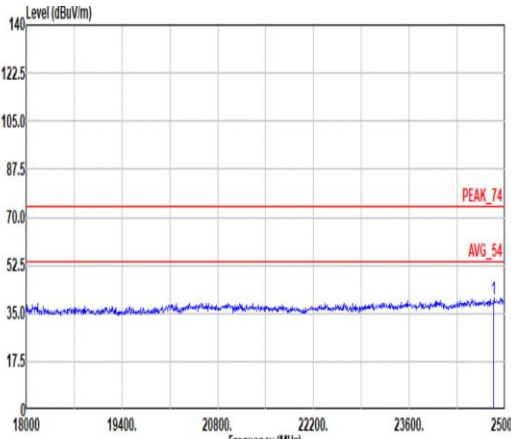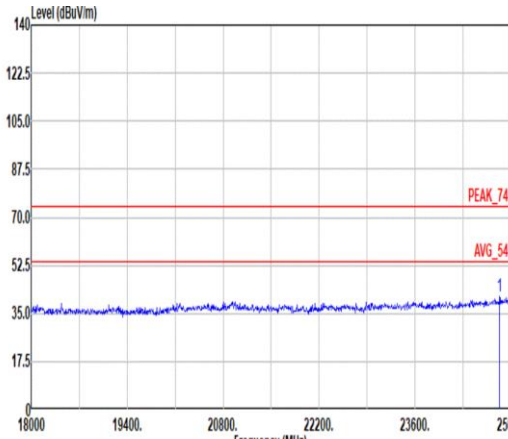

Mode	29																																																																																							
	SHF																																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	 Site : 03CH11-HY Condition: PEAK_74 1m SHF_00993_231124 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24834.26</td><td>40.19</td><td>74.00</td><td>-33.81</td><td>35.24</td><td>39.27</td><td>28.19</td><td>52.97</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24834.26	40.19	74.00	-33.81	35.24	39.27	28.19	52.97	-9.54	--	PEAK	 Site : 03CH11-HY Condition: PEAK_74 1m SHF_00993_231124 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24834.85</td><td>41.36</td><td>74.00</td><td>-32.64</td><td>36.41</td><td>39.27</td><td>28.19</td><td>52.97</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24834.85	41.36	74.00	-32.64	36.41	39.27	28.19	52.97	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	24834.26	40.19	74.00	-33.81	35.24	39.27	28.19	52.97	-9.54	--	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	24834.85	41.36	74.00	-32.64	36.41	39.27	28.19	52.97	-9.54	--	PEAK																																																																													



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	99.52	-	-	10Hz
802.11g	97.54	1390	0.719	750Hz
2.4GHz 802.11n HT20	96.73	1300	0.769	820Hz
2.4GHz 802.11n HT40	93.64	648	1.543	1.6kHz

