

# **FCC Test Report**

Report No.: AGC10648220703FE05

**FCC ID** : 2AXBNHGWBC-358

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Wireless Smart Battery Camera

**BRAND NAME** : N/A

HGWBC-358, CQ1, Q1, Q2, Q3, CG1, CG2, CG5, CG6, CG7,

**MODEL NAME** : DX1, DX2, DX3, DX4, DX5, DX6, DX8, DX10, DG1, DG4, DG5,

DG6, DG8, Q4, Q5, Q6, Q8, DX7, HGWBC-351, HGWBC-356

**APPLICANT**: SHENZHEN CYTON Intelligence Technology CO., LTD

**DATE OF ISSUE** : Aug. 03, 2022

STANDARD(S)

**TEST PROCEDURE(S)** 

FCC Part 15.247

**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection





Page 2 of 70


## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Aug. 03, 2022	Valid	Initial Release	




# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. IEEE 802.11N MODULATION SCHEME	8
2.4. RELATED SUBMITTAL(S) / GRANT (S)	8
2.5. TEST METHODOLOGY	
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	9
3. MEASUREMENT UNCERTAINTY	10
4. DESCRIPTION OF TEST MODES	11
5. SYSTEM TEST CONFIGURATION	12
5.1. CONFIGURATION OF EUT SYSTEM	12
5.2. EQUIPMENT USED IN EUT SYSTEM	12
5.3. SUMMARY OF TEST RESULTS	12
6. TEST FACILITY	13
7. OUTPUT POWER	14
7.1. MEASUREMENT PROCEDURE	14
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
7.3. LIMITS AND MEASUREMENT RESULT	15
8. BANDWIDTH	16
8.1. MEASUREMENT PROCEDURE	16
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	28
9.1. MEASUREMENT PROCEDURE	28
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28
9.3. MEASUREMENT EQUIPMENT USEDJN	28
9.4. LIMITS AND MEASUREMENT RESULT	28





10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	40
10.1 MEASUREMENT PROCEDURE	40
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	40
10.3 MEASUREMENT EQUIPMENT USED	40
10.4 LIMITS AND MEASUREMENT RESULT	40
11. RADIATED EMISSION	46
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP	47
11.3. LIMITS AND MEASUREMENT RESULT	48
11.4. TEST RESULT	48
12. LINE CONDUCTED EMISSION TEST	66
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	66
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	66
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	67
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	67
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	68
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	70
APPENDIX B: PHOTOGRAPHS OF EUT	70





# 1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN CYTON Intelligence Technology CO.,LTD
Address	F/L 601, Building K, Jinchangda, No. 2000089, Shangwei industrial zone, Zhangkengjing community, Guanhu Town, Longhua New District, Shenzhen, Guangdong Province, China
Manufacturer	SHENZHEN CYTON Intelligence Technology CO.,LTD
Address	F/L 601, Building K, Jinchangda, No. 2000089, Shangwei industrial zone, Zhangkengjing community, Guanhu Town, Longhua New District, Shenzhen, Guangdong Province, China
Factory	SHENZHEN CYTON Intelligence Technology CO.,LTD
Address	F/L 601, Building K, Jinchangda, No. 2000089, Shangwei industrial zone, Zhangkengjing community, Guanhu Town, Longhua New District, Shenzhen, Guangdong Province, China
Product Designation	Wireless Smart Battery Camera
Brand Name	N/A
Test Model	HGWBC-358
Series Model	CQ1, Q1, Q2, Q3, CG1, CG2, CG5, CG6, CG7, DX1, DX2, DX3, DX4, DX5, DX6, DX8, DX10, DG1, DG4, DG5, DG6, DG8, Q4, Q5, Q6, Q8, DX7, HGWBC-351, HGWBC-356
Deviation	All the series models are the same as the test model except for the color of appearance.
<b>Condition of Test Sample</b>	Jul. 13, 2022 to Jul. 29, 2022
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

# We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Cool cheny	
	Cool Cheng (Project Engineer)	Aug. 03, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Aug. 03, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Aug. 03, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC10648220703FE05 Page 6 of 70

# 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless Smart Battery Camera". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b:14.40dBm; IEEE 802.11g:14.99dBm;
Output Fower (Average)	IEEE 802.11n(HT20):14.23dBm
Output Power (Peak)	IEEE 802.11b:17.04dBm; IEEE 802.11g:23.37dBm;
Output Fower (Feak)	IEEE 802.11n(HT20):22.69dBm
Modulation	802.11b:DQPSK, DBPSK, CCK
Woddiation	802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK
	802.11b: 1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 300Mbps
Number of channels	11
Hardware Version	CQ121C_C01_V1
Software Version	V0.0.3
Antenna Designation	FPC antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	2.62dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter



Page 7 of 70

# 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11.



Report No.: AGC10648220703FE05 Page 8 of 70

## 2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps) 800nsGl	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

# 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: 2AXBNHGWBC-358 filing to comply with the FCC Part 15 requirements.

# 2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmissio n system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

# 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

# 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Page 9 of 70

## 2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 10 of 70

# 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel transmitting (TX)
2	Middle channel transmitting (TX)
3	High channel transmitting (TX)

## Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)


Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

The test channel for 40MHZ bandwidth system is channel 3, 6 and 9.

#### Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

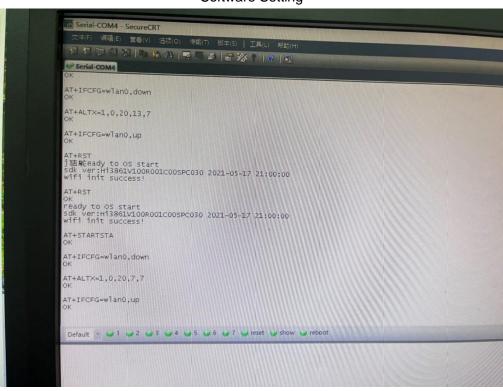

Software Setting




Page 12 of 70

# 5. SYSTEM TEST CONFIGURATION

# **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:




## **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Smart Battery Camera	HGWBC-358	2AXBNHGWBC-358	EUT
2	Xiaomi phone	Mi 10		N/A
3	adapter	TPA-23A050200CU01		N/A

## 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247(b)(3)	Output Power	Compliant
§15.247(a)(2)	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247(e)	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant





# 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

# **TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

## **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Power sensor	Aglient	U2021XA	MY54110007	Mar. 04, 2022	Mar. 03, 2023
2.4GHz Fliter	Micro-tronics	087	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	Weinachel Corp	58-30-33	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	00034609	Mar. 12, 2022	Mar. 21, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 08, 2020	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 14 of 70

# 7. OUTPUT POWER


# 7.1. MEASUREMENT PROCEDURE


For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

**Note**: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)








## 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2412	14.40	17.04	<b>≪3</b> 0	Pass
802.11b	2437	14.37	17.00	<b>≼3</b> 0	Pass
	2462	14.38	17.04	<b>≪3</b> 0	Pass
802.11g	2412	14.80	23.19	<b>≼3</b> 0	Pass
	2437	14.99	23.37	<b>⊴</b> 30	Pass
	2462	14.32	22.64	<b>⊴</b> 30	Pass
802.11n20	2412	14.16	22.59	<b>≼3</b> 0	Pass
	2437	14.23	22.69	<b>⊴</b> 30	Pass
	2462	14.20	22.62	<b>⊴</b> 30	Pass





## 8. BANDWIDTH

## **8.1. MEASUREMENT PROCEDURE**

#### 6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

# Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

# 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

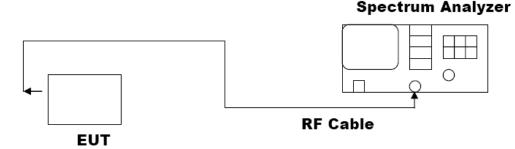




Page 17 of 70

## 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	2412	10.881	9.113	∌.5	Pass
802.11b	2437	10.898	9.104	∌.5	Pass
	2462	10.905	9.094	∌.5	Pass
802.11g	2412	16.542	16.44	∌.5	Pass
	2437	16.548	16.45	∌.5	Pass
	2462	16.528	16.42	∌.5	Pass
802.11n20	2412	17.674	17.75	∌.5	Pass
	2437	17.660	17.75	<b>≥0.5</b>	Pass
	2462	17.649	17.74	∌.5	Pass




# **Test Graphs of Occupied Bandwidth**

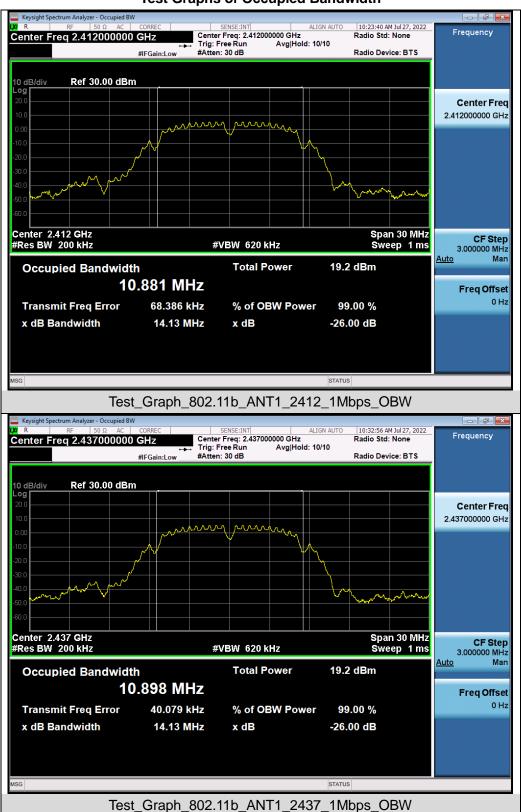


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




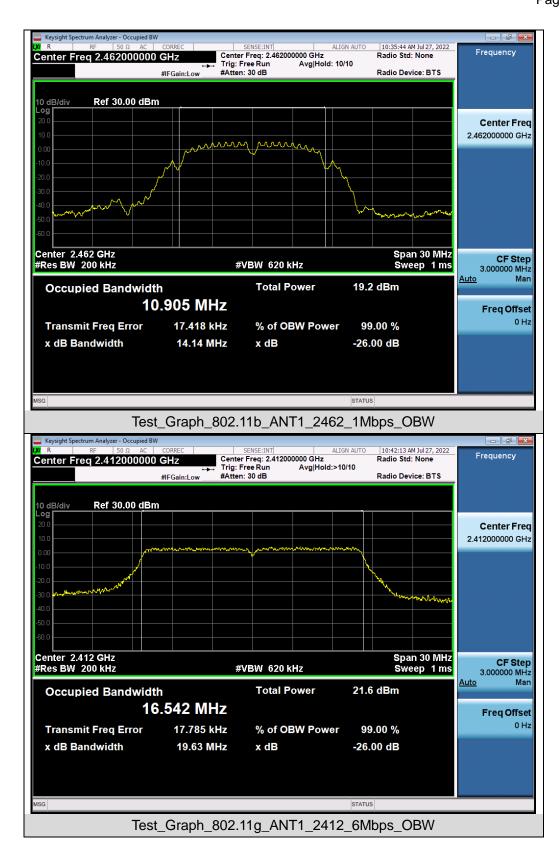



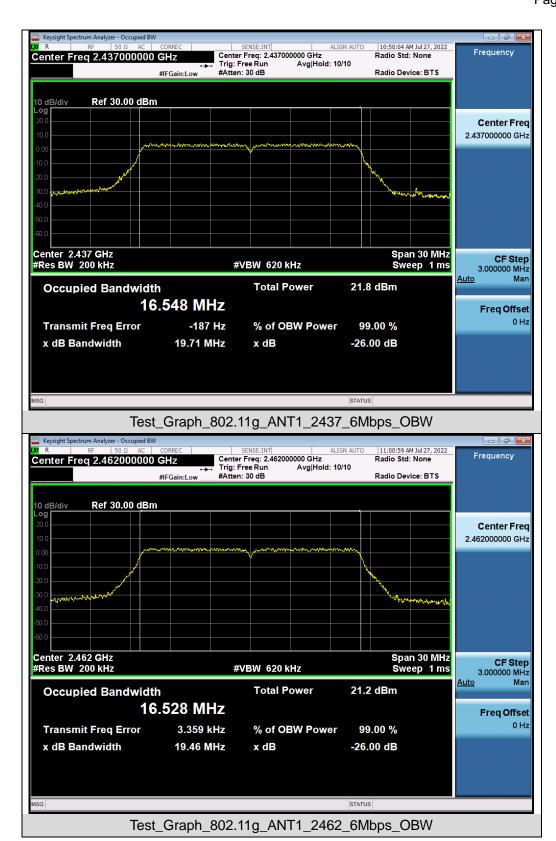




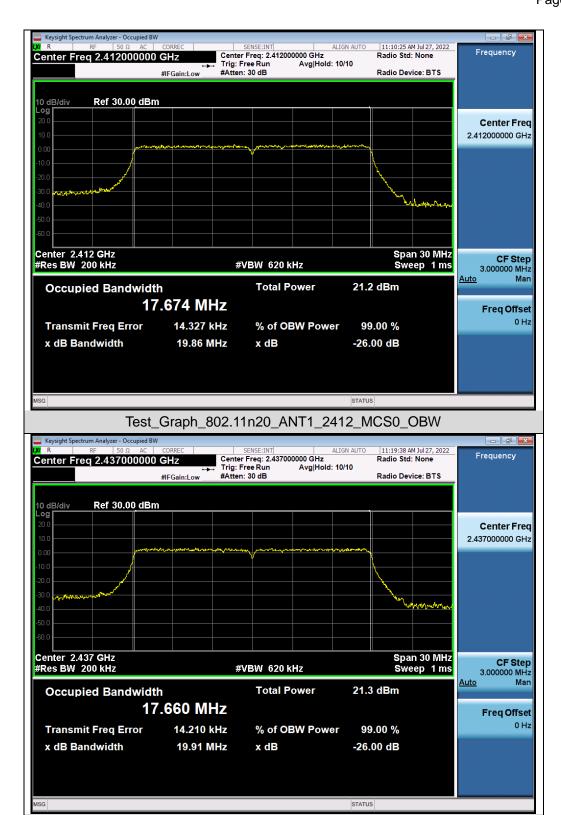

Test\_Graph\_802.11n20\_ANT1\_2437\_MCS0\_OBW



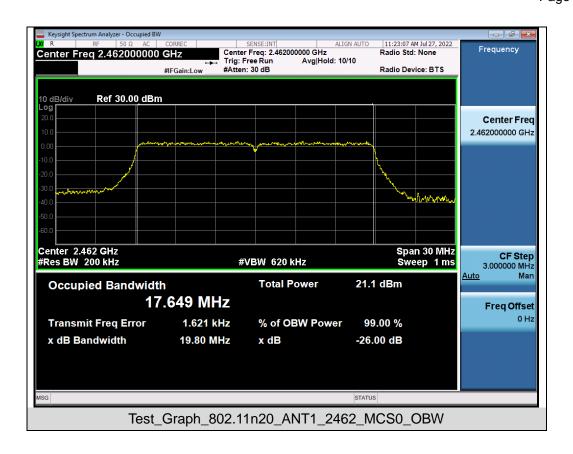



# Test Graphs of DTS Bandwidth




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_DTSBW



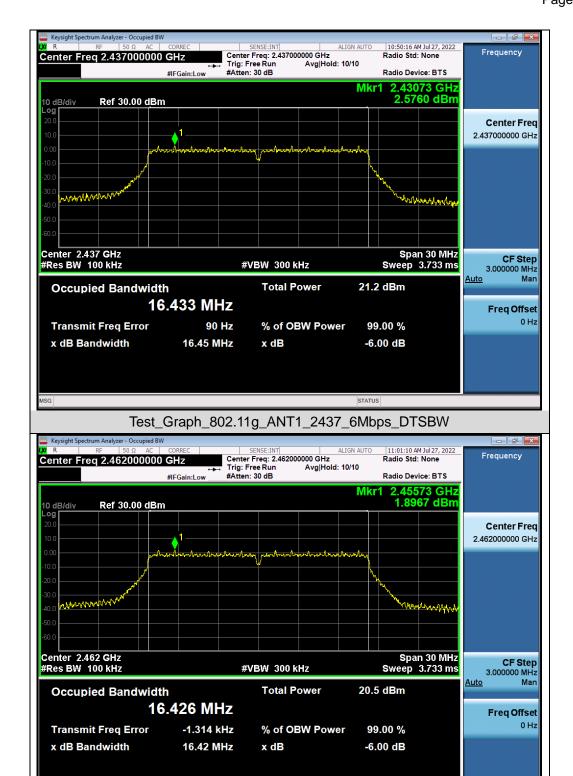


Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_DTSBW



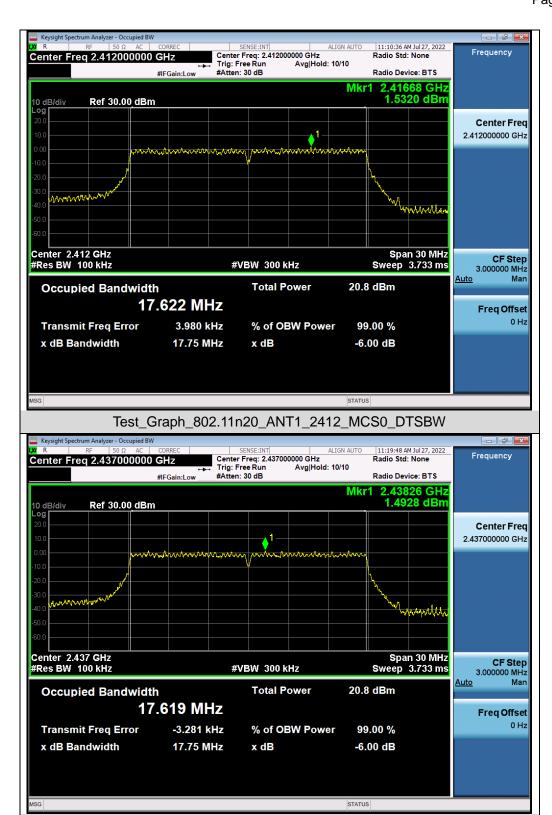

Test Graph 802.11n20 ANT1 2437 MCS0 DTSBW



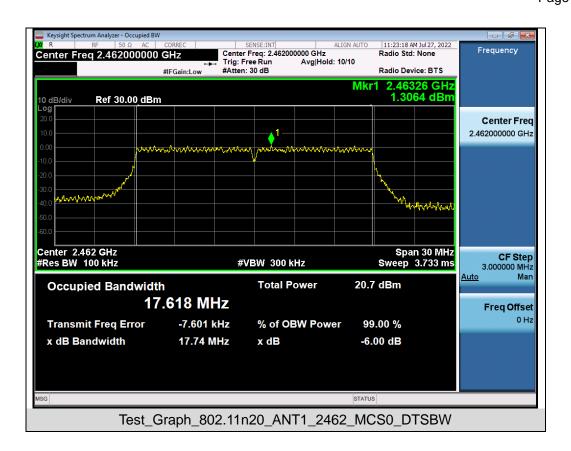



Page 28 of 70

## 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

# 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

#### 9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth				
within the band that contains the highest level of the				
desired power.	At least -20dBc than the limit	PASS		
In addition, radiation emissions which fall in the	Specified on the TOP Channel	FASS		
restricted bands, as defined in §15.205(a), must also				
comply with the radiated emission limits specified				
in§15.209(a))				

Note: The limits reference level is according to the test plot of -6dB bandwidth.

**CF Step** 2.251650000 GHz

> Freq Offset 0 Hz

Scale Type

<u>Lin</u>


Log

Stop 25.00 GHz

Sweep 2.152 s (30000 pts)



# Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

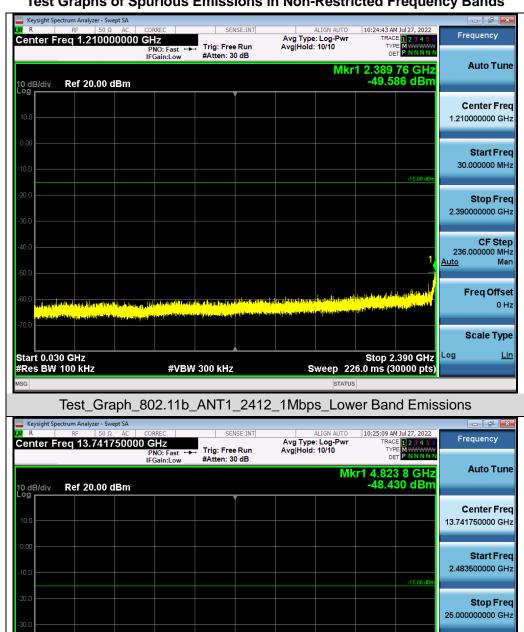

Test\_Graph\_802.11b\_ANT1\_2412\_1Mbps\_Higher Band Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

**#VBW** 300 kHz

Start 2.48 GHz

#Res BW 100 kHz




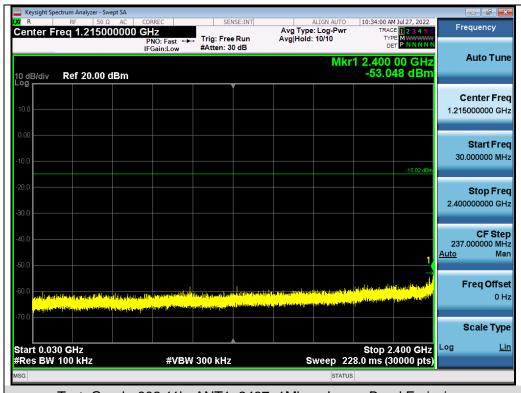

Test\_Graph\_802.11b\_ANT1\_2437\_1Mbps\_Lower Band Emissions





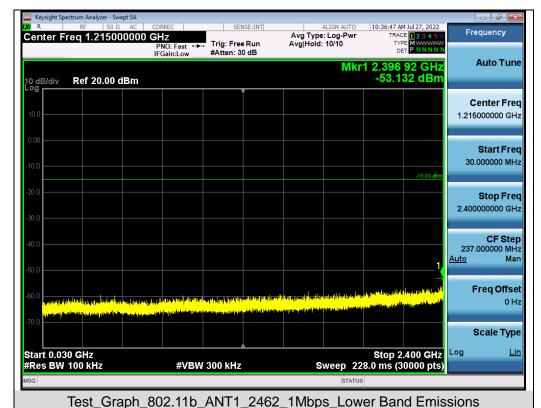






Test\_Graph\_802.11b\_ANT1\_2462\_1Mbps\_Higher Band Emissions




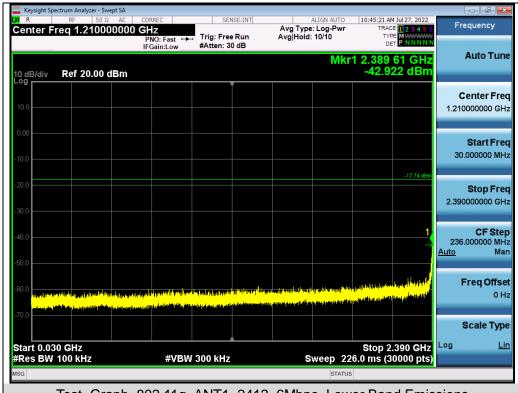

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Lower Band Emissions






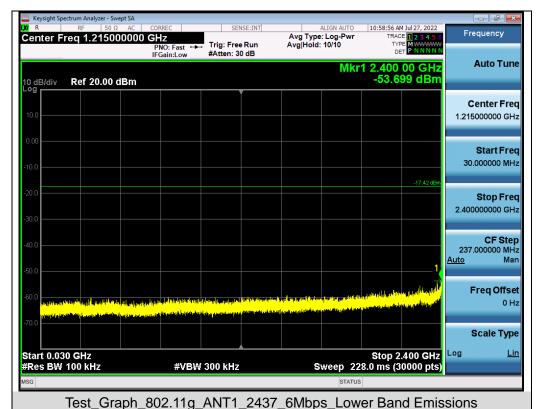





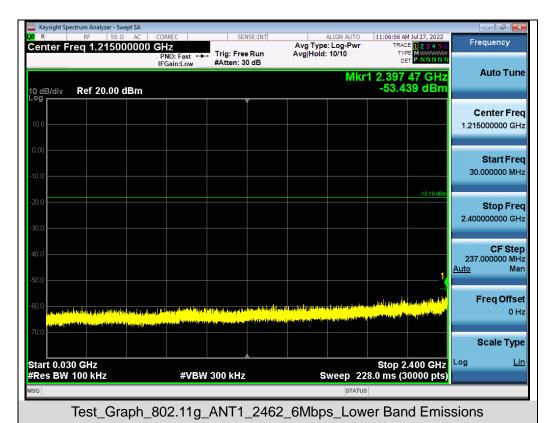

Center Freq 13.750000000 GHz
PNO: Fast
IFGain:Low 11:06:30 AM Jul 27, 2022


TRACE 1 2 3 4 5 6

TYPE MWWWWW Frequency Avg Type: Log-Pwr Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.490 7 GHz -49.740 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.750000000 GHz Start Fred 2.500000000 GHz 25.000000000 GHz CF Step 2.250000000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 2.50 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz

Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_Higher Band Emissions

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



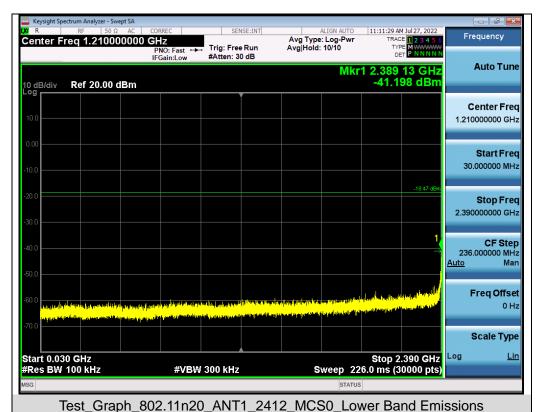


11:11:54 AM Jul 27, 2022

TRACE 1 2 3 4 5 6


TYPE MWWWWW Center Freq 13.741750000 GHz
PNO: Fast
IFGain:Low Avg Type: Log-Pwr Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.219 4 GHz -49.103 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.741750000 GHz Start Fred 2.483500000 GHz 25.000000000 GHz **CF Step** 2.251650000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 2.48 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test\_Graph\_802.11n20\_ANT1\_2412\_MCS0\_Higher Band Emissions



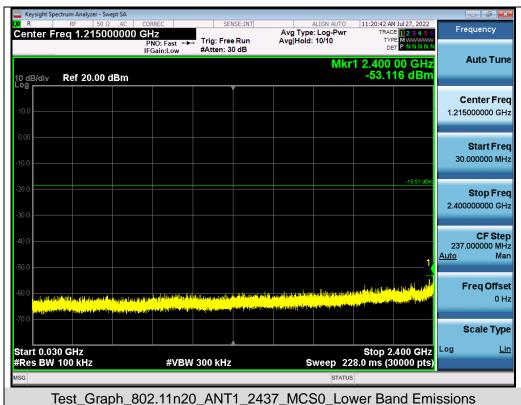





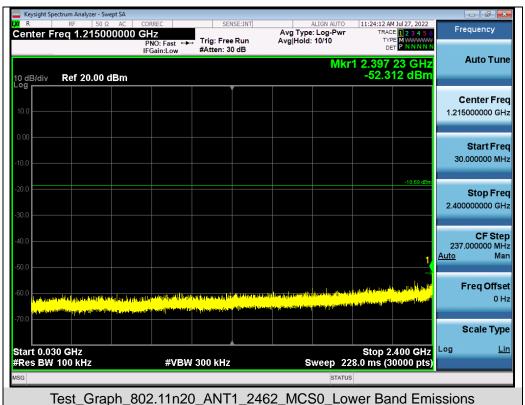





### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Lower Band Edge Emissions





Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Report No.: AGC10648220703FE05

Page 40 of 70

## 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

### **10.1 MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

## 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

### **10.3 MEASUREMENT EQUIPMENT USED**

Refer to Section 6.

### 10.4 LIMITS AND MEASUREMENT RESULT

1011 21111110 71112	10:4 EIMITO AND MEAGONEMENT NEGGET								
	Test Data of Conducted Output Power Spectral Density								
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail				
	2412	-0.054	-8.293		Pass				
802.11b	2437	-0.366	-8.605		Pass				
	2462	-0.251	-8.49		Pass				
	2412	-2.031	-10.27		Pass				
802.11g	2437	-1.334	-9.573		Pass				
	2462	-2.340	-10.579		Pass				
	2412	-3.041	-11.28		Pass				
802.11n20	2437	-3.024	-11.263	\$8	Pass				
	2462	-2.914	-11.153		Pass				

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) – 10\*log(20/3).



# **Test Graphs of Conducted Output Power Spectral Density**



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Freq Offset

Scale Type

Log

Span 24.67 MHz Sweep 58.81 ms (1000 pts)



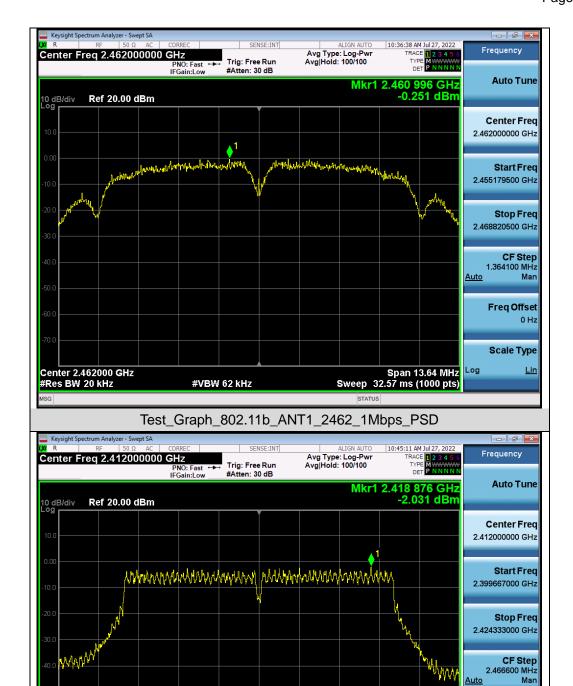


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_PSD

#VBW 62 kHz


Center 2.41200 GHz #Res BW 20 kHz




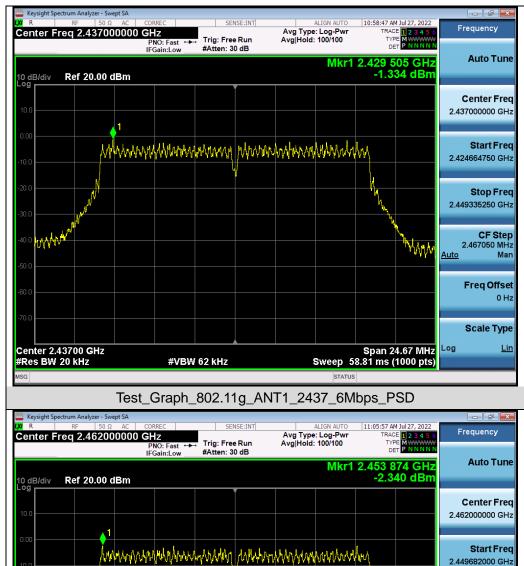


| 10 dB/div | Ref 20.00 dBm | -2.340 dBm | | Center Freq 2.462000000 GHz | | Start Freq 2.449682000 GHz | | Stop Freq 2.474318000 GHz | | Stop Freq 2.474318000 GHz | | Stop Freq 2.474318000 GHz | | CF Step 2.463600 MHz | Man | Man | | Freq Offset 0 Hz | | Scale Type | Center 2.46200 GHz | #VbW 62 kHz | Sweep 58.74 ms (1000 pts) | | Start Freq 2.46200 MHz | Man | | Scale Type | Log | Lin | | Start Freq 2.46200 GHz | | Start Freq 2.46200 GHz | | Start Freq 2.463600 MHz | Man | | Start Freq 2.474318000 GHz | | CF Step 2.463600 MHz | Man | Man | | Start Freq 2.474318000 GHz | | Start Freq 2.474318000 GHz | | Start Freq 2.474318000 GHz | | CF Step 2.463600 MHz | Man | Man | | Start Freq 2.474318000 GHz | | Start Freq 2.474318000 GHz | | CF Step 2.463600 MHz | Man | Man | | Start Freq 2.474318000 GHz | | Start Freq 2.474318000 GHz



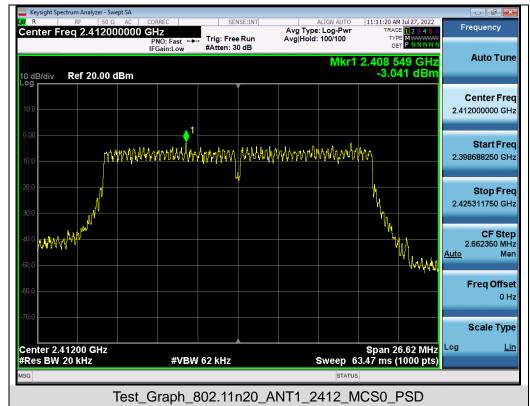

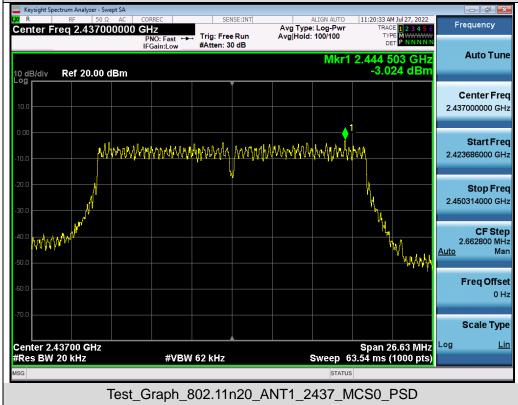



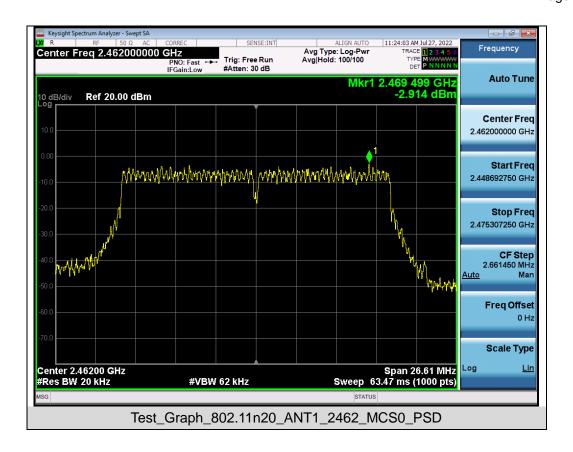



Report No.: AGC10648220703FE05 Page 46 of 70

#### 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




#### 11.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

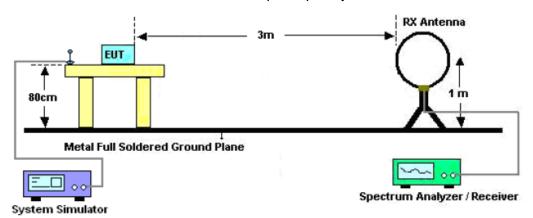

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

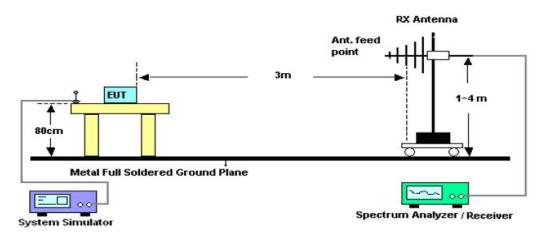

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

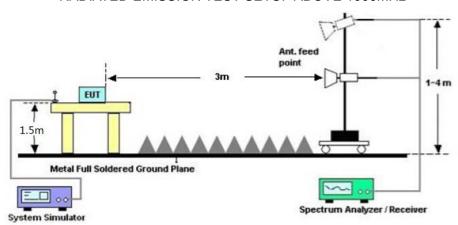

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Report No.: AGC10648220703FE05

Page 48 of 70

### 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

### 11.4. TEST RESULT


#### Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



### Radiated emission from 30MHz to 1000MHz

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

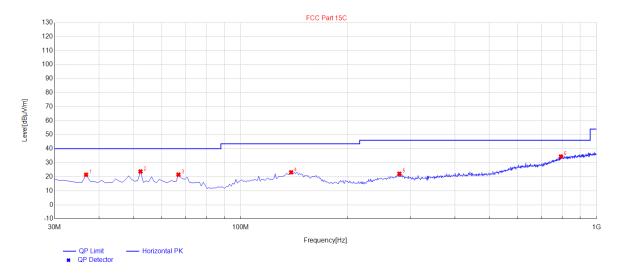


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.79	21.45	10.73	40.00	18.55	100	10	Horizontal
2	52.31	23.74	11.49	40.00	16.26	100	342	Horizontal
3	66.86	21.52	9.76	40.00	18.48	100	112	Horizontal
4	138.64	23.17	17.58	43.50	20.33	100	1	Horizontal
5	279.29	22.17	16.23	46.00	23.83	100	235	Horizontal
6	794.36	34.46	28.93	46.00	11.54	100	107	Horizontal

**RESULT: PASS** 




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

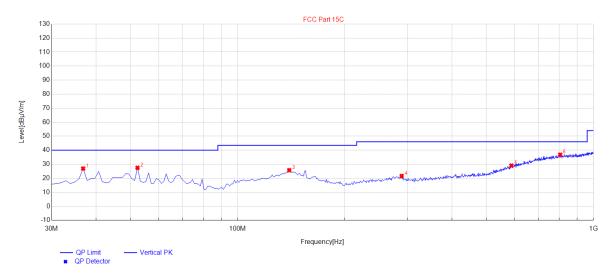

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.79	26.90	10.73	40.00	13.10	100	359	Vertical
2	52.31	27.47	11.49	40.00	12.53	100	144	Vertical
3	139.61	25.76	19.79	43.50	17.74	100	32	Vertical
4	288.99	21.64	15.60	46.00	24.36	100	289	Vertical
5	587.75	29.04	24.03	46.00	16.96	100	227	Vertical
6	806	36.79	31.47	46.00	9.21	100	84	Vertical

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11g at middle channel is the worst case and recorded in the report.





Radiated emission above 1GHz


EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4824.000	56.36	0.08	56.44	74	-17.56	peak			
4824.000	45.23	0.08	45.31	54	-8.69	AVG			
7236.000	51.24	2.21	53.45	74	-20.55	peak			
7236.000	40.13	2.21	42.34	54	-11.66	AVG			
Remark:			1			•			
Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.						

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	55.98	0.08	56.06	74	-17.94	peak
4824.000	45.21	0.08	45.29	54	-8.71	AVG
7236.000	51.27	2.21	53.48	74	-20.52	peak
7236.000	40.36	2.21	42.57	54	-11.43	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.34	0.14	55.48	74	-18.52	peak
4874.000	46.28	0.14	46.42	54	-7.58	AVG
7311.000	51.24	2.36	53.6	74	-20.4	peak
7311.000	41.36	2.36	43.72	54	-10.28	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.86	0.14	56	74	-18	peak
4874.000	46.31	0.14	46.45	54	-7.55	AVG
7311.000	50.27	2.36	52.63	74	-21.37	peak
7311.000	30.48	2.36	32.84	54	-21.16	AVG
Remark:						
actor = Antenna Factor + Cable Loss – Pre-amplifier.						



Report No.: AGC10648220703FE05

Page 53 of 70

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	55.38	0.22	55.6	74	-18.4	peak
4924.000	45.19	0.22	45.41	54	-8.59	AVG
7386.000	50.27	2.64	52.91	74	-21.09	peak
7386.000	41.39	2.64	44.03	54	-9.97	AVG
Remark:						
Factor = Anter	factor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.37	0.22	56.59	74	-17.41	peak
4924.000	47.24	0.22	47.46	54	-6.54	AVG
7386.000	51.06	2.64	53.7	74	-20.3	peak
7386.000	42.31	2.64	44.95	54	-9.05	AVG
Remark:						
Factor = Anter	actor = Antenna Factor + Cable Loss – Pre-amplifier.					

### **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been pre-tested. The 802.11g mode is the worst case and recorded in the report.




### Test result for band edge emission at restricted bands

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

### Test Graph for Peak Measurement

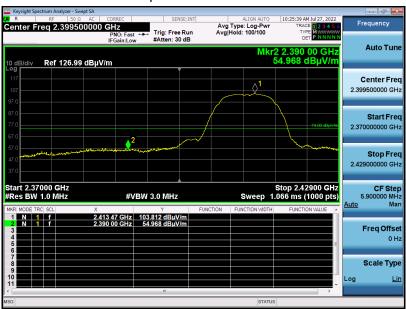

# Test Graph for Average Measurement

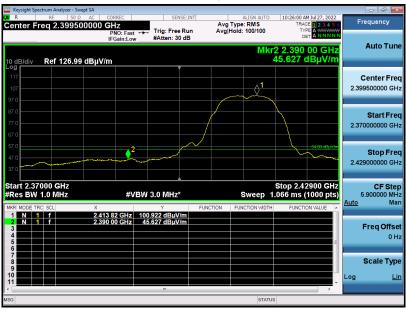


### **RESULT: PASS**




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

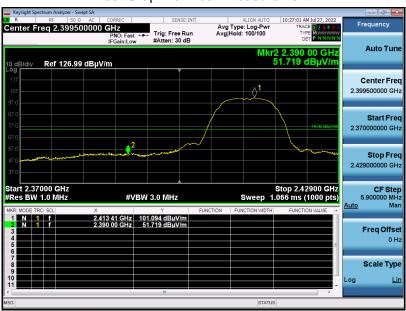

Test Graph for Average Measurement

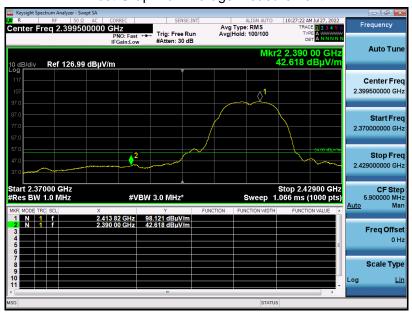


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

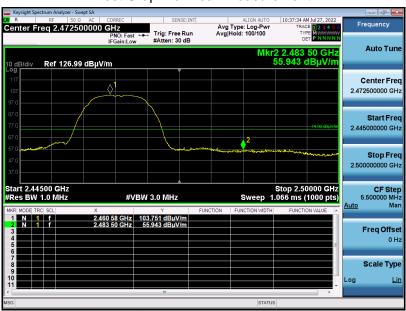


Test Graph for Average Measurement

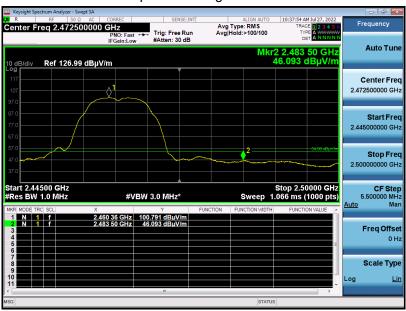



EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement

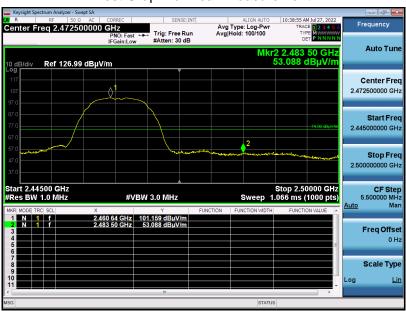

Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

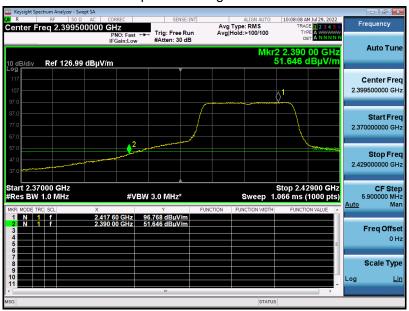




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

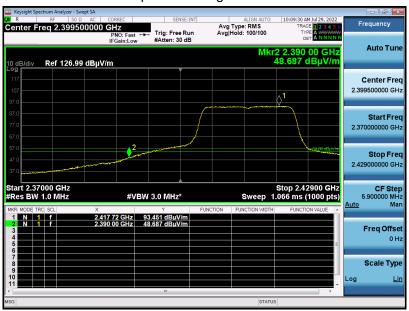

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

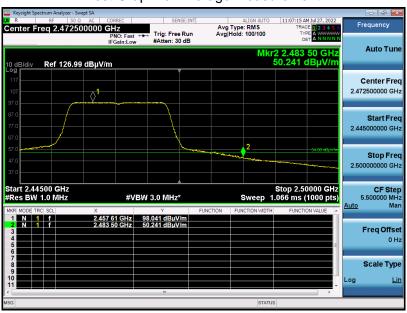

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

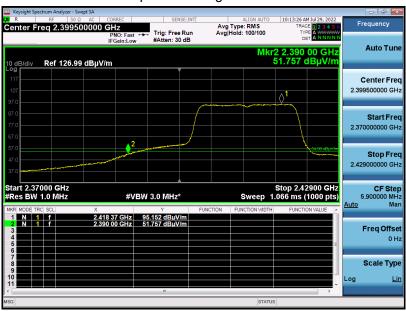

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Smart Battery Camera	Model Name	HGWBC-358
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

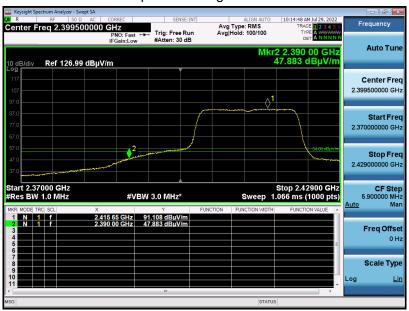

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.