

Appendix A: Test Results of Radiated Spurious Emissions & Conducted Emissions on a.c. mains port Test

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


**LE 2480 MHz, IEEE 802.11ax HE20 2412 MHz, IEEE 802.11a 5475 MHz
and IEEE 802.11ax HE20 5955 MHz**

9kHz~150kHz (Open)

150kHz~30MHz (Open)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

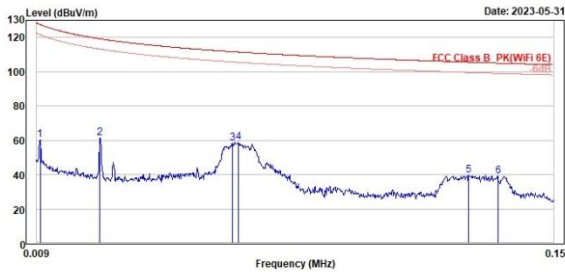

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.01	60.30	42.58	17.72	127.60	-67.30	100	257 Peak	Open	
2	0.03	61.44	42.50	18.94	119.18	-57.74	100	182 Peak	Open	
3	0.06	58.34	39.52	18.82	111.68	-53.34	100	207 Peak	Open	
4	0.06	59.04	40.26	18.78	111.45	-52.41	100	193 Peak	Open	
5	0.13	39.63	21.60	18.03	105.54	-65.91	100	222 Peak	Open	
6	0.13	39.12	21.06	18.06	105.01	-65.89	100	227 Peak	Open	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

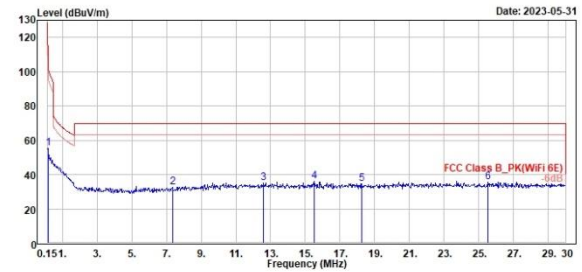

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.151	55.32	37.07	18.25	102.50	-47.18	100	228 Peak	Open	
2	7.34	32.58	12.18	20.40	69.50	-36.92	100	42 Peak	Open	
3	12.60	34.88	13.21	21.67	69.50	-34.62	100	72 Peak	Open	
4	15.49	35.98	14.12	21.86	69.50	-33.52	100	142 Peak	Open	
5	18.24	34.84	12.79	22.05	69.50	-34.66	100	61 Peak	Open	
6	25.52	35.50	13.30	22.20	69.50	-34.00	100	347 Peak	Open	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


**LE 2480 MHz, IEEE 802.11ax HE20 2412 MHz, IEEE 802.11a 5475 MHz
and IEEE 802.11ax HE20 5955 MHz**

Horizontal

Vertical




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

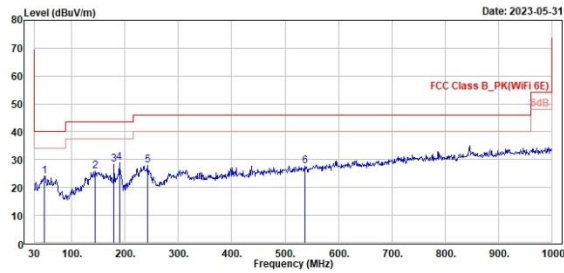

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	49.40	23.95	29.58	-5.63	40.00	-16.05	200	129 Peak	Horizontal	
2	144.46	25.74	32.13	-6.39	43.50	-17.76	100	96 Peak	Horizontal	
3	179.38	28.25	34.94	-6.69	43.50	-15.25	300	132 Peak	Horizontal	
4	189.08	28.83	36.61	-7.78	43.50	-14.67	200	263 Peak	Horizontal	
5	241.46	27.84	34.41	-6.57	46.00	-18.16	100	267 Peak	Horizontal	
6	537.31	27.71	28.69	-0.98	46.00	-18.29	200	120 Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

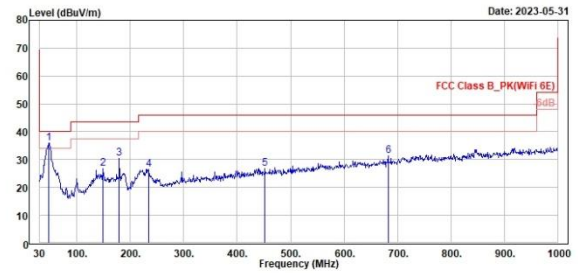

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	47.46	35.97	41.80	-5.83	40.00	-4.03	100	109 Peak	Vertical	
2	149.31	26.65	32.85	-6.20	43.50	-16.85	100	84 Peak	Vertical	
3	179.38	30.46	37.15	-6.69	43.50	-13.04	100	119 Peak	Vertical	
4	233.70	26.51	33.50	-6.99	46.00	-19.49	100	341 Peak	Vertical	
5	451.95	26.91	28.95	-2.04	46.00	-19.09	169	12 Peak	Vertical	
6	682.81	31.31	29.82	1.49	46.00	-14.69	200	360 Peak	Vertical	

Spurious Emissions, Tx Mode, 1GHz ~ 40GHz


**LE 2480 MHz, IEEE 802.11ax HE20 2412 MHz, IEEE 802.11a 5475 MHz
and IEEE 802.11ax HE20 5955 MHz**

(Horizontal) Peak

(Vertical) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

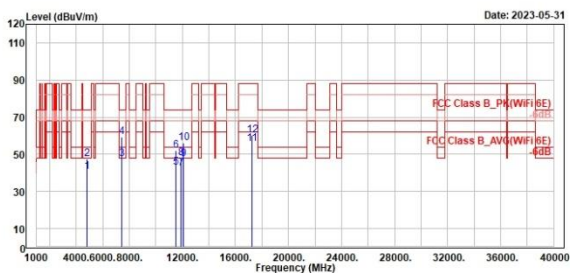

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Factor	Line	Limit					
	MHz	dBuV/m	dB/m	dBuV/m	dB	cm	deg			
1	4824.00	40.43	48.27	-7.84	54.00	-13.57	200	59 Average	Horizontal	
2	4824.00	47.36	55.20	-7.84	74.00	-26.64	200	59 Peak	Horizontal	
3	7440.00	47.62	53.27	-5.65	54.00	-6.38	100	81 Average	Horizontal	
4	7440.00	59.54	65.19	-5.65	74.00	-14.46	100	81 Peak	Horizontal	
5	11490.00	43.02	42.14	0.88	54.00	-10.98	100	351 Average	Horizontal	
6	11490.00	52.21	51.33	0.88	74.00	-21.79	100	351 Peak	Horizontal	
7	11910.00	42.28	40.78	1.50	54.00	-11.72	200	238 Average	Horizontal	
8	11910.00	47.92	46.42	1.50	74.00	-26.08	200	238 Peak	Horizontal	
9	12060.00	47.65	45.98	1.67	54.00	-6.35	200	34 Average	Horizontal	
10	12060.00	56.27	54.60	1.67	74.00	-17.73	200	34 Peak	Horizontal	
11	17235.00	55.60	46.35	9.25	68.20	-12.60	307	360 Average	Horizontal	
12	17235.00	60.32	51.07	9.25	88.20	-27.88	307	360 Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

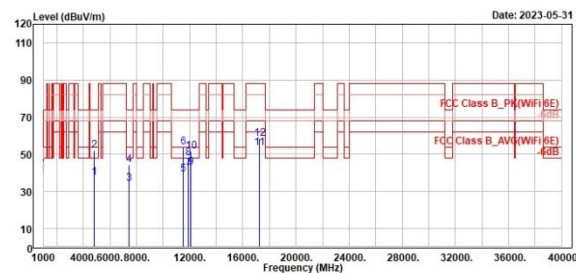

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Factor	Line	Limit					
	MHz	dBuV/m	dB/m	dBuV/m	dB	cm	deg			
1	4824.00	37.35	45.19	-7.84	54.00	-16.65	200	359 Average	Vertical	
2	4824.00	52.19	60.03	-7.84	74.00	-21.81	200	359 Peak	Vertical	
3	7440.00	34.09	39.74	-5.65	54.00	-19.91	100	51 Average	Vertical	
4	7440.00	44.19	49.84	-5.65	74.00	-29.81	100	51 Peak	Vertical	
5	11490.00	39.45	38.57	0.88	54.00	-14.55	300	238 Average	Vertical	
6	11490.00	53.95	53.07	0.88	74.00	-20.05	300	238 Peak	Vertical	
7	11910.00	42.52	41.02	1.50	54.00	-11.48	222	290 Average	Vertical	
8	11910.00	48.08	46.58	1.50	74.00	-25.92	222	290 Peak	Vertical	
9	12060.00	43.00	41.33	1.67	54.00	-11.00	200	212 Average	Vertical	
10	12060.00	51.38	49.71	1.67	74.00	-22.62	200	212 Peak	Vertical	
11	17235.00	53.54	44.29	9.25	68.20	-14.66	200	314 Average	Vertical	
12	17235.00	58.43	49.18	9.25	88.20	-29.77	200	314 Peak	Vertical	

Conducted Emissions on a.c. mains port, 150kHz ~ 30MHz


**LE 2480 MHz, IEEE 802.11ax HE20 2412 MHz, IEEE 802.11a 5475 MHz
and IEEE 802.11ax HE20 5955 MHz**

(Line)

(Neutral)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-212-1000 Fax: +886-212-1322

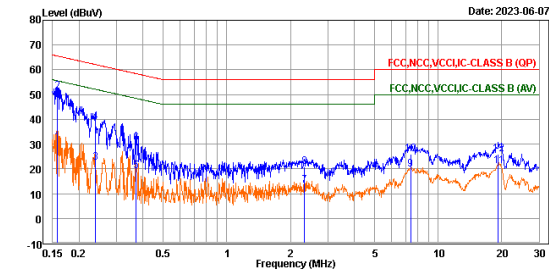

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-212-1000 Fax: +886-212-1322

