



FCC&IC TEST REPORT

FCC ID: SY4-A02055

IC: 32467-A02055

On Behalf of

Shanghai Huace Navigation Technology Ltd.

Display

Model No.: MCPad300

Prepared for : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

Report Number : A2409152-C02-R20
Date of Receipt : September 23, 2024
Date of Test : September 23, 2024 – October 21, 2024
Date of Report : October 22, 2024
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

	<u>Description</u>	<u>Page</u>
1	TEST SUMMARY	5
2	GENERAL INFORMATION	7
2.1	GENERAL DESCRIPTION OF EUT	7
2.2	RELATED SUBMITTAL(S) / GRANT (S)	8
2.3	TEST FACILITY	8
2.4	ACCESSORIES OF DEVICE (EUT)	8
2.5	TESTED SUPPORTING SYSTEM DETAILS	8
2.6	TEST CONDITIONS	8
2.7	MEASUREMENT UNCERTAINTY	9
3	TEST INSTRUMENTS LIST	10
4	SYSTEM TEST CONFIGURATION	11
4.1	TEST MODE	11
4.2	CONFIGURATION OF TESTED SYSTEM	11
4.3	CONDUCTED OUTPUT POWER	12
4.4	PEAK-TO-AVERAGE RATIO	25
4.5	OCCUPY BANDWIDTH	29
4.6	MODULATION CHARACTERISTIC	47
4.7	OUT OF BAND EMISSION AT ANTENNA TERMINALS	47
4.8	ERP, EIRP MEASUREMENT	120
4.9	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	178
4.10	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	192
4.11	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	195
4.12	TEST SETUP PHOTO	198

TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
Manufacturer : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
EUT Description : Display

(A) Model No. : MCPad300

(B) Trademark : 

Measurement Standard Used:

FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27

RSS-130 issue 2
RSS-132 issue 4
RSS-133 issue 6
RSS-139 Issue 4
RSS-199 issue 4
RSS-Gen Issue 5

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen

Project Engineer


.....

Approved by (name + signature).....:

Jack Xu

Project Manager


.....

Date of issue.....:

October 22, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	October 22, 2024	Initial released Issue	Yannis Wen

1 Test Summary

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 22.913(a) (5) Part 24.232 (c) Part 27.50 (d)(4) Part 27.50 (h) RSS-130 (4.6) RSS-132 (5.4) RSS-133 (6.4) RSS-139(6.5) RSS-199(4.4)	Pass
Peak-To-Average Ratio	Part 2.1046 Part 22.913(d) Part 24.232 (d) Part 27.50(d) RSS-130 (4.6) RSS-132 (5.4) RSS-133 (6.4) RSS-139(6.5) RSS-199(4.4)	Pass
Modulation Characteristics	Part 2.1047 RSS-130 (4.2) RSS-132 (5.2) RSS-133 (6.2) RSS-139(6.2) RSS-199(4.1)	N/A
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238 Part 27.53(a) RSS-130 (4.1) RSS-132 (3.1) RSS-133 (3.1) RSS-139(3.1) RSS-199(4.2)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)/(m) RSS-130 (4.7) RSS-132 (5.5) RSS-133 (6.5) RSS-139(6.6) RSS-199(4.5)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)/(m) RSS-130 (4.7) RSS-132 (5.5) RSS-133 (6.5) RSS-139(6.6) RSS-199(4.5)	Pass

Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a) Part 27.53(h)/(m) RSS-130 (4.7) RSS-132 (5.5) RSS-133 (6.5) RSS-139(6.6) RSS-199(4.5)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b) RSS-130 (4.5) RSS-132 (5.3) RSS-133 (6.3) RSS-139(6.4) RSS-199(4.3)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2) RSS-130 (4.5) RSS-132 (5.3) RSS-133 (6.3) RSS-139(6.4) RSS-199(4.3)	Pass

Note: 1. Pass: The EUT complies with the essential requirements in the standard.

2. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2 General Information

2.1 General Description of EUT

Description of Device (EUT)

Description/PMN	: Display
Model No./HVIN	: MCPad300
DIFF.	: N/A
Test Voltage	: 9~36Vdc/2A from battery.
Support Bands	: LTE Band 2/4/5/7/12/13/17/41
Channel Bandwidth	: LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz
TX Frequency	: LTE Band 2: 1850 ~ 1910 MHz LTE Band 4: 1710 ~ 1755 MHz LTE Band 5: 824 ~ 849 MHz LTE Band 7: 2500 ~ 2570 MHz LTE Band 12: 699 ~ 716MHz LTE Band 41: 2496MHz ~ 2690MHz
Modulation type	: QPSK, 16QAM
Antenna Type	: FPC antenna, LTE Band 2: Maximum Gain is 2.2dBi. LTE Band 4: Maximum Gain is 0.5dBi. LTE Band 5: Maximum Gain is 1.5dBi. LTE Band 7: Maximum Gain is 1.3dBi. LTE Band 12: Maximum Gain is 1.2dBi LTE Band 41: Maximum Gain is 0.4dBi. (Antenna information is provided by applicant.) There is WWAN diversity antenna inside the product, which is only for receiving function.
Software version	: Android 14
Hardware version	: N103_MB46CDA_V1.1

Remark 1: The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for 4G function, and there is no other transmitter involved.

2.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules, Part 27 of the FCC CFR 47 Rules of the FCC CFR 47 Rules and RSS-130, RSS-132, RSS-133, RSS-139 and RSS-199 Rules.

2.3 Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 15, 2019 Certificated by IC
Registration Number: 12135A
CAB identifier: CN0085

2.4 Accessories of Device (EUT)

Accessories : /
Manufacturer : /
Model : /
Ratings : /

2.5 Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
--	--	--	--	--	--

2.6 Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

3 Test Instruments list

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.18	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840-50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

4 System test configuration

4.1 Test mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
LTE Band 2	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 4	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 5	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 7	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 12	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 13	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 17	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 41	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link


Note: Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03r1 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

4.2 Configuration of Tested System

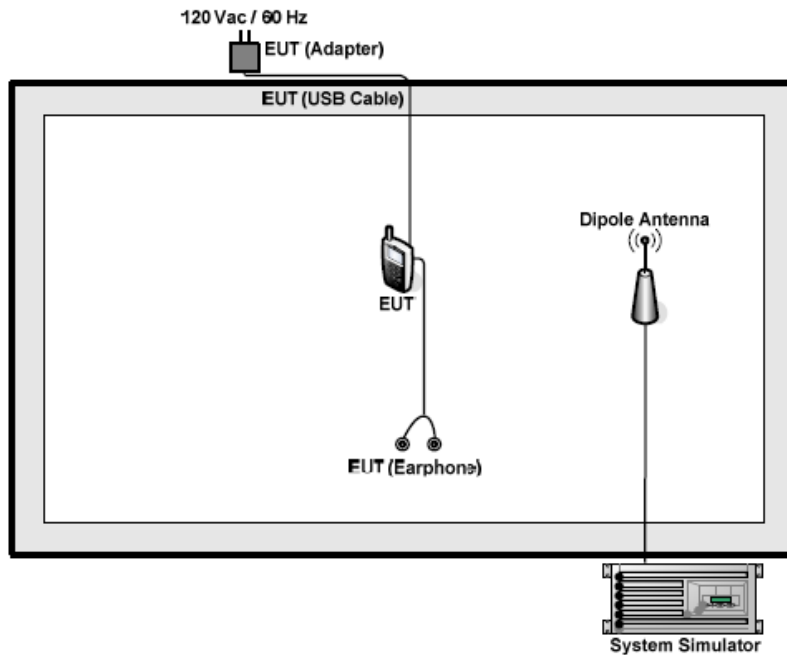

4.3 Conducted Output Power

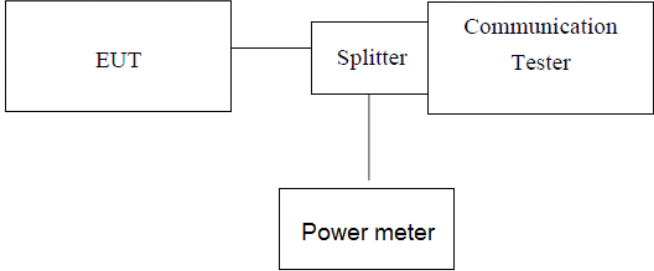Test Requirement:	FCC part22.913(a) (5), FCC part24.232(b) and FCC Part 27.50 (d)(4)/(h) RSS-130 (4.6), RSS-133 (6.4), RSS-139(6.5) and RSS-199(4.4)
Test Method:	ANSI C63.26:2015
Limit:	LTE Band 2: 2W LTE Band 4: 1W LTE Band 5: 7W LTE Band 7: 2W LTE Band 12: 3W LTE Band 13: 3W LTE Band 17: 3W LTE Band 41: 2W
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

LTE Band2

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				18607/1850.7	18900/1880	19193/1909.3
1.4MHz	QPSK	1	0	21.65	22.88	21.65
			2	21.46	22.87	21.68
			5	21.77	22.87	21.76
		3	0	21.74	23.37	21.68
			2	21.70	22.85	21.65
			3	21.91	23.34	21.67
		6	0	20.76	21.84	20.73
	QAM16	1	0	21.02	22.24	20.88
			2	21.06	21.92	20.67
			5	20.78	21.89	20.65
		3	0	22.08	23.29	21.59
			2	21.87	23.00	21.73
			3	21.78	23.05	21.67
		6	0	20.95	22.21	20.87

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				18615/1851.5	18900/1880	19185/1908.5
3MHz	QPSK	1	0	21.47	22.81	21.55
			7	21.63	23.40	21.75
			14	21.91	23.06	21.94
		8	0	21.65	22.96	22.10
			4	22.05	23.29	21.56
			7	21.63	23.33	21.96
		15	0	21.06	21.98	21.20
	QAM16	1	0	21.92	22.68	21.65
			7	21.36	22.68	21.81
			14	21.59	22.86	21.78
		8	0	21.31	22.49	21.57
			4	21.41	22.47	21.42
			7	21.61	23.11	21.19
		15	0	20.44	21.90	20.09

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				18625/1852.5	18900/1880	19175/1907.5
5MHz	QPSK	1	0	21.85	23.08	21.52
			13	21.58	23.10	21.52
			24	21.94	23.18	21.50
		12	0	20.66	21.97	21.08
			6	20.61	22.14	20.73
			13	20.90	22.11	20.91
		25	0	20.77	22.14	20.98
	QAM16	1	0	20.57	22.19	20.75
			13	20.73	21.90	20.81
			24	20.70	21.97	20.53
		12	0	20.81	21.97	20.96
			6	20.98	21.84	20.61
			13	20.92	22.15	20.61
		25	0	21.08	22.33	20.77

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				18650/1855	18900/1880	19150/1905
10MHz	QPSK	1	0	21.86	23.31	21.45
			25	22.08	23.44	21.78
			49	22.20	22.88	21.84
		25	0	20.94	22.06	20.71
			13	20.86	21.99	20.71
			25	21.15	22.29	20.84
		50	0	21.21	22.19	20.59
	QAM16	1	0	21.76	22.72	21.26
			25	21.76	22.78	21.42
			49	22.10	22.65	21.47
		25	0	20.82	22.24	20.92
			13	20.97	22.02	20.93
			25	20.77	22.33	20.85
		50	0	21.16	22.08	20.85

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				18675/1857.5	18900/1880	19125/1902.5
15MHz	QPSK	1	0	21.92	23.17	21.66
			38	22.16	22.99	22.08
			74	22.60	23.27	21.98
		36	0	21.00	22.32	20.67
			18	21.00	22.42	21.15
			39	21.25	22.13	21.07
		75	0	21.17	22.02	20.61
	QAM16	1	0	21.93	22.69	21.26
			38	22.26	22.66	21.71
			74	22.26	22.75	21.85
		36	0	21.22	22.08	20.75
			18	20.99	22.02	20.87
			39	21.19	22.63	21.23
		75	0	21.10	22.07	21.26

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				18700/1860	18900/1880	19100/1900
20MHz	QPSK	1	0	22.55	23.33	21.89
			50	22.65	23.38	22.34
			99	22.72	23.19	22.03
		50	0	21.32	22.64	20.66
			25	21.15	22.41	20.75
			50	21.30	21.96	20.65
		100	0	21.56	22.53	20.93
	QAM16	1	0	21.85	22.47	20.93
			50	21.90	22.50	21.76
			99	21.88	22.34	21.54
		50	0	21.15	22.13	21.09
			25	21.66	22.19	20.52
			50	21.06	22.02	20.56
		100	0	21.65	22.49	21.01

LTE Band4

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				19957/1710.7	20175/1732.5	20393/1754.3
1.4MHz	QPSK	1	0	21.95	23.15	21.67
			2	22.70	23.16	22.15
			5	22.40	23.26	21.78
		3	0	21.44	22.24	20.61
			2	21.58	22.16	20.89
			3	21.36	22.18	21.03
		6	0	21.81	22.40	20.71
	QAM16	1	0	21.96	22.20	20.95
			2	21.94	22.88	21.11
			5	21.58	22.44	21.58
		3	0	21.47	22.24	20.78
			2	21.28	22.05	20.70
			3	21.42	22.24	20.47
		6	0	21.23	22.07	20.66

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				19965/1711.5	20175/1732.5	20385/1753.5
3MHz	QPSK	1	0	22.50	21.84	22.03
			7	22.53	22.26	22.25
			14	23.07	22.37	21.87
		8	0	22.50	22.26	22.42
			4	22.71	22.35	22.40
			7	23.01	21.85	21.85
		15	0	21.69	21.28	21.29
	QAM16	1	0	22.29	21.86	22.20
			7	22.76	22.02	21.90
			14	22.73	21.63	22.09
		8	0	22.58	22.10	21.67
			4	22.29	21.57	21.57
			7	22.27	21.46	21.77
		15	0	20.76	20.90	20.86

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				19975/1712.5	20175/1732.5	20375/1752.5
5MHz	QPSK	1	0	22.92	22.14	22.31
			13	22.70	21.65	22.02
			24	22.83	22.42	22.37
		12	0	21.82	21.32	21.33
			6	21.40	21.03	21.35
			13	21.94	21.32	21.33
		25	0	22.15	20.85	21.19
	QAM16	1	0	21.51	21.25	21.04
			13	21.92	21.08	21.17
			24	21.72	21.09	20.88
		12	0	21.86	21.19	21.37
			6	22.13	21.23	21.06
			13	22.16	21.17	20.87
		25	0	22.10	21.08	21.44

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20000/1715	20175/1732.5	20350/1750
10MHz	QPSK	1	0	22.77	22.15	22.29
			25	22.69	22.05	22.41
			49	22.54	22.27	21.89
		25	0	22.01	21.07	21.54
			13	21.86	21.21	21.04
			25	22.13	20.96	21.39
		50	0	21.84	21.38	21.42
	QAM16	1	0	22.50	21.92	22.43
			25	22.59	22.18	22.17
			49	22.54	21.54	21.54
		25	0	22.02	21.19	21.80
			13	21.48	21.06	21.65
			25	22.02	20.82	21.59
		50	0	21.56	21.17	21.10

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20025/1717.5	20175/1732.5	20325/1747.5
15MHz	QPSK	1	0	22.59	21.72	22.42
			38	22.51	21.91	22.29
			74	22.18	21.89	21.66
		36	0	21.70	21.13	21.60
			18	21.67	20.95	21.51
			39	21.76	21.36	21.14
		75	0	21.61	21.19	21.34
	QAM16	1	0	22.57	21.44	22.12
			38	22.52	21.79	22.16
			74	22.26	21.71	21.92
		36	0	21.88	21.36	21.26
			18	21.54	21.27	21.20
			39	21.65	20.99	21.37
		75	0	21.58	20.88	21.20

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20050/1720	20175/1732.5	20300/1745
20MHz	QPSK	1	0	22.40	21.91	22.22
			50	22.47	22.20	22.38
			99	22.26	21.96	21.78
		50	0	21.60	21.08	21.65
			25	21.71	21.00	21.29
			50	21.67	21.19	21.32
		100	0	21.85	21.13	21.57
	QAM16	1	0	22.13	21.60	21.42
			50	22.15	21.83	22.05
			99	21.70	21.58	21.09
		50	0	21.54	21.21	21.59
			25	21.43	21.01	21.42
			50	21.53	20.82	21.26
		100	0	21.43	20.91	21.52

LTE Band5

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20417/824.7	20530/837	20643/848.3
1.4MHz	QPSK	1	0	23.01	23.33	23.27
			2	23.38	23.06	22.97
			5	23.16	23.28	23.12
		3	0	23.42	23.04	23.36
			2	23.39	22.95	23.30
			3	23.02	22.98	23.09
		6	0	22.09	22.21	21.98
	QAM16	1	0	22.06	22.10	22.51
			2	22.23	22.19	22.32
			5	22.17	22.49	22.52
		3	0	23.00	23.24	23.47
			2	23.22	23.42	22.99
			3	22.92	22.96	23.07
		6	0	22.28	22.41	22.35

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20425/825.5	20530/837	20635/847.5
3MHz	QPSK	1	0	23.50	23.15	23.01
			7	22.99	23.06	23.08
			14	23.18	22.84	23.07
		8	0	23.49	23.02	23.14
			4	23.26	23.26	23.17
			7	23.03	23.13	23.13
		15	0	22.40	21.97	22.25
	QAM16	1	0	23.04	23.00	22.72
			7	22.68	22.78	22.83
			14	23.12	22.65	23.07
		8	0	23.09	22.75	22.75
			4	22.71	22.82	22.81
			7	23.09	22.72	22.83
		15	0	21.47	21.11	21.37

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20435/826.5	20530/837	20625/846.5
5MHz	QPSK	1	0	23.12	23.37	23.02
			13	23.40	23.44	23.34
			24	23.31	23.39	23.12
		12	0	22.22	22.07	22.46
			6	22.53	22.30	22.11
			13	22.27	22.42	22.40
		25	0	22.39	22.39	22.27
	QAM16	1	0	22.10	21.96	21.94
			13	22.12	22.28	22.06
			24	22.31	22.25	22.34
		12	0	22.51	22.11	22.54
			6	22.18	22.21	22.50
			13	22.22	22.21	22.30
		25	0	22.54	22.33	22.15

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20460/829	20530/837	20600/844
10MHz	QPSK	1	0	23.38	23.25	23.22
			25	23.30	23.10	23.55
			49	23.15	23.15	23.45
		25	0	22.34	22.26	22.20
			13	22.44	22.16	22.33
			25	22.33	22.49	22.22
		50	0	22.25	22.49	22.47
			0	23.00	22.98	22.70
			25	22.99	23.07	22.95
	QAM16	1	49	22.70	22.75	22.86
		25	0	22.45	22.15	22.59
			13	22.50	22.25	22.35
			25	22.28	22.19	22.31
		50	0	22.42	22.07	22.51

LTE Band7

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20775/2502.5	21100/2535	21425/2567.5
5MHz	QPSK	1	0	20.92	20.45	20.95
			13	20.74	20.86	21.05
			24	20.80	20.58	21.26
		12	0	19.70	19.74	20.46
			6	19.93	19.70	20.69
			13	19.73	19.61	20.69
		25	0	19.79	19.84	20.63
	QAM16	1	0	19.78	19.69	19.97
			13	19.54	19.85	20.18
			24	19.55	19.44	20.28
		12	0	19.78	19.64	20.41
			6	20.02	19.79	20.22
			13	20.12	19.67	20.21
		25	0	20.07	19.58	20.23

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20800/2505	21100/2535	21400/2565
10MHz	QPSK	1	0	21.04	21.03	21.36
			25	20.61	20.61	21.69
			49	19.59	19.73	20.15
		25	0	20.00	19.66	20.61
			13	19.92	19.62	20.41
			25	19.88	19.98	20.20
		50	0	20.29	20.39	20.85
	QAM16	1	0	20.34	20.26	21.06
			25	20.21	20.21	21.23
			49	19.97	19.73	20.20
		25	0	19.96	19.72	20.26
			13	19.87	19.89	20.27
			25	19.84	20.05	20.61
		50	0	21.04	21.03	21.36

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20825/2507.5	21100/2535	21375/2562.5
15MHz	QPSK	1	0	21.09	20.88	20.92
			38	20.72	20.70	20.95
			74	20.81	20.46	21.29
		36	0	20.29	19.98	20.19
			18	19.72	20.10	20.74
			39	20.34	19.69	20.74
		75	0	19.71	19.86	20.41
	QAM16	1	0	20.75	20.60	20.57
			38	20.65	20.68	20.82
			74	20.69	20.40	21.26
		36	0	19.84	19.98	20.60
			18	19.80	19.86	20.30
			39	19.72	20.01	20.92
		75	0	20.32	19.70	20.47

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				20850/2510	21100/2535	21350/2560
20MHz	QPSK	1	0	20.51	20.69	20.32
			50	20.84	20.54	21.22
			99	20.14	20.60	21.04
		50	0	19.33	19.17	19.77
			25	19.42	19.67	20.13
			50	19.73	19.40	20.22
		100	0	19.21	19.27	19.92
	QAM16	1	0	19.65	20.16	20.26
			50	19.89	20.17	20.76
			99	19.49	20.01	20.48
		50	0	19.92	19.91	20.21
			25	19.72	19.31	20.10
			50	19.34	19.36	19.68
		100	0	19.12	19.28	20.35

LTE Band12

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				23017/699.7	23095/707.5	23173/715.3
1.4MHz	QPSK	1	0	23.63	23.73	23.36
			2	23.58	23.84	23.76
			5	23.73	23.53	23.64
		3	0	23.82	23.72	23.63
			2	23.96	23.86	23.45
			3	23.82	23.87	23.72
		6	0	22.69	23.03	22.47
	QAM16	1	0	22.96	22.84	22.65
			2	22.95	22.81	22.77
			5	22.91	22.92	22.84
		3	0	23.73	23.90	23.65
			2	24.08	23.78	23.50
			3	23.51	23.99	23.59
		6	0	22.81	23.08	22.82

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				23025/700.5	23095/707.5	23165/714.5
3MHz	QPSK	1	0	23.48	23.70	23.67
			7	23.68	24.07	23.78
			14	23.76	23.77	23.87
		8	0	23.55	23.84	23.63
			4	23.66	23.94	23.81
			7	23.78	23.91	23.88
		15	0	22.98	22.92	22.84
	QAM16	1	0	23.61	23.61	23.50
			7	23.18	23.55	23.26
			14	23.31	23.45	23.13
		8	0	23.22	23.52	23.04
			4	23.37	23.60	23.21
			7	23.44	23.53	23.45
		15	0	22.95	22.92	22.78

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				23035/701.5	23095/707.5	23155/713.5
5MHz	QPSK	1	0	23.43	23.94	23.23
			13	23.85	23.87	23.35
			24	23.75	23.78	23.16
		12	0	22.84	22.92	22.27
			6	22.94	22.77	22.29
			13	22.73	22.76	22.26
		25	0	22.50	22.75	22.37
	QAM16	1	0	22.55	22.98	22.08
			13	22.49	22.85	22.42
			24	22.72	22.55	22.27
		12	0	22.73	22.82	22.24
			6	22.80	22.62	22.32
			13	22.77	22.82	22.72
		25	0	23.02	22.61	22.72

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				23060/704	23095/707.5	23130/711
10MHz	QPSK	1	0	23.81	24.21	23.78
			25	24.12	24.41	23.83
			49	23.44	23.80	23.49
		25	0	23.02	23.08	22.95
			13	22.60	22.90	22.84
			25	22.95	22.78	22.96
		50	0	22.61	22.84	22.92
	QAM16	1	0	23.28	23.49	23.24
			25	23.22	23.73	23.55
			49	23.30	23.49	22.97
		25	0	22.87	22.96	22.51
			13	22.85	22.93	22.99
			25	22.74	22.82	22.79
		50	0	22.49	23.21	22.67

LTE Band41


Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				39675/2498.5	40620/2593	41565/2687.5
5MHz	QPSK	1	0	21.51	21.37	20.96
			13	21.64	21.17	21.34
			24	21.88	21.78	21.32
		12	0	21.32	21.59	21.59
			6	21.45	21.72	21.21
			13	21.90	21.37	21.60
		25	0	21.67	21.43	21.23
	QAM16	1	0	21.59	21.35	21.12
			13	21.79	21.84	21.19
			24	21.45	21.82	21.59
		12	0	21.76	21.47	21.04
			6	21.43	21.32	21.06
			13	21.44	21.69	21.16
		25	0	21.42	21.92	21.59

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				39700/2501	40620/2593	41540/2685
10MHz	QPSK	1	0	21.76	21.93	22.17
			25	22.06	21.12	21.56
			49	21.90	20.82	21.07
		25	0	21.97	22.05	21.54
			13	21.60	21.26	22.05
			25	22.14	21.66	21.15
		50	0	22.18	21.59	21.36
	QAM16	1	0	21.25	22.28	21.40
			25	21.12	21.93	21.50
			49	21.44	21.36	20.95
		25	0	21.31	21.88	21.32
			13	20.87	21.44	21.53
			25	21.95	21.39	21.58
		50	0	21.66	21.69	21.42

Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				39725/2503.5	40620/2593	41515/2682.5
15MHz	QPSK	1	0	20.64	21.18	21.53
			38	21.27	20.61	21.58
			74	21.59	20.65	21.60
		36	0	20.86	21.11	21.20
			18	21.06	20.95	21.40
			39	21.25	20.92	21.08
		75	0	21.68	21.39	21.71
	QAM16	1	0	20.87	21.18	21.18
			38	20.89	20.90	20.65
			74	21.40	21.18	20.90
		36	0	21.26	22.09	21.69
			18	21.17	20.70	21.44
			39	21.70	20.53	20.52
		75	0	20.85	21.59	21.20







Bandwidth	Modulation	RB size	RB offset	Output Power (dBm) for low/mid/high channel		
				39750/2506	40620/2593	41490/2680
20MHz	QPSK	1	0	21.20	20.69	21.41
			50	21.22	21.60	20.53
			99	21.02	21.46	21.27
		50	0	21.22	21.46	21.94
			25	21.23	20.41	21.22
			50	21.76	20.88	20.94
		100	0	21.57	21.03	20.76
	QAM16	1	0	21.72	21.61	22.08
			50	21.40	21.22	21.38
			99	20.96	22.05	22.04
		50	0	21.12	21.31	21.15
			25	21.10	21.18	21.55
			50	21.20	21.64	20.92
		100	0	21.02	20.96	21.10

4.4 Peak-to-Average Ratio

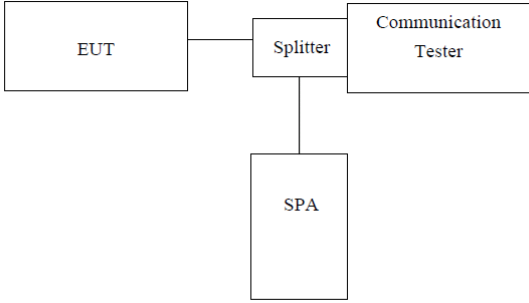
Test Requirement:	Part 22.913(d), FCC part24.232(d) and FCC part27.50(d)(5) RSS-130 (4.6), RSS-133 (6.4), RSS-139(6.5) and RSS-199(4.4)
Test Method:	ANSI C63.26:2015
Test Limit:	Used complementary cumulative distribution function (CCDF) of analyzer to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time
Test setup:	 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- CT[Communication Tester] Splitter --- SPA[SPA] </pre> <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.7 2. The EUT was connected to spectrum and system simulator via a power divider 3. Using the CCDF measurement of spectrum analyzer; 4. Set $RBW \geq OBW$ or specified reference bandwidth; 5. Set the number of counts to a value that stabilizes the measured CCDF curve; 6. Set the measurement interval as 1ms 7. Record the maximum PAPR level associated with a probability of 0.1%.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Test plots are listed as below:


Test mode	Peak to Average Ratio (dB)	Limit (dB)	Result
LTE Band 2 Middle channel/20MHz/QPSK	5.98	13	Pass
LTE Band 2 Middle channel/20MHz/16-QAM	5.99	13	Pass
LTE Band 4 Middle channel/20MHz/QPSK	5.74	13	Pass
LTE Band 4 Middle channel/20MHz/16-QAM	5.75	13	Pass
LTE Band 5 Middle channel/10MHz/QPSK	5.03	13	Pass
LTE Band 5 Middle channel/10MHz/16-QAM	5.03	13	Pass
LTE Band 7 Middle channel/20MHz/QPSK	6.51	13	Pass
LTE Band 7 Middle channel/20MHz/16-QAM	6.50	13	Pass
LTE Band 12 Middle channel/10MHz/QPSK	5.85	13	Pass
LTE Band 12 Middle channel/10MHz/16-QAM	5.83	13	Pass
LTE Band 41 Middle channel/20MHz/QPSK	5.76	13	Pass
LTE Band 41 Middle channel/20MHz/16-QAM	5.75	13	Pass

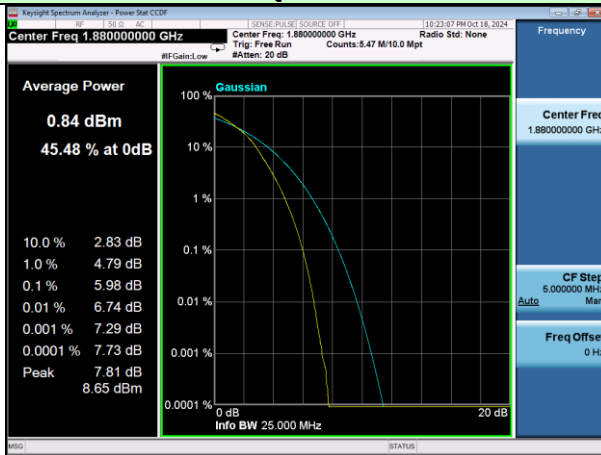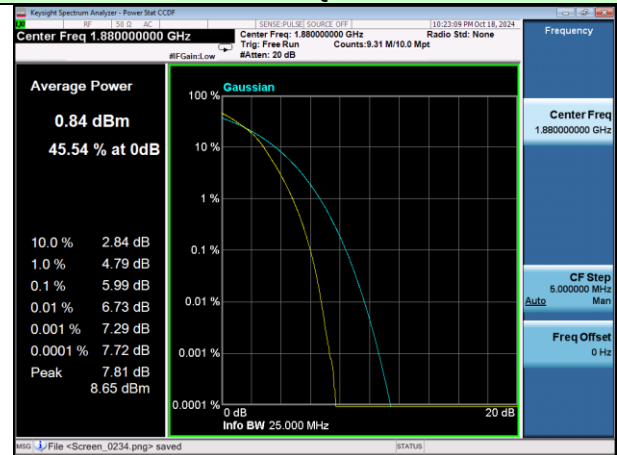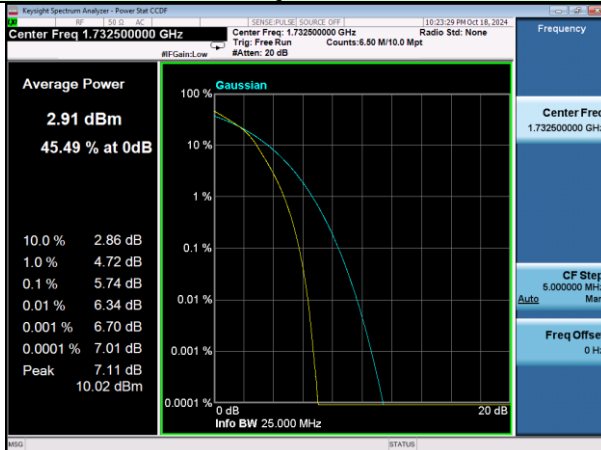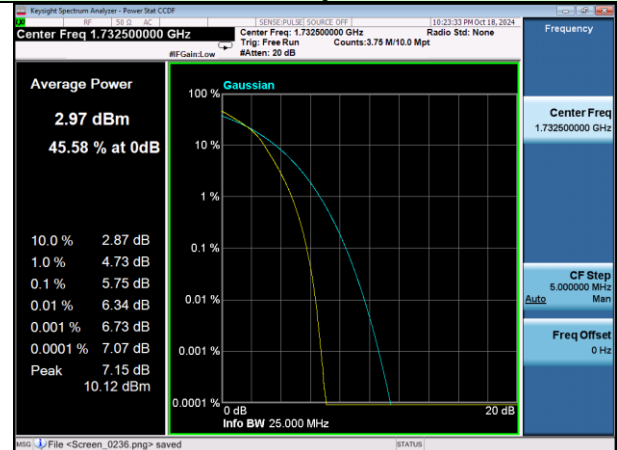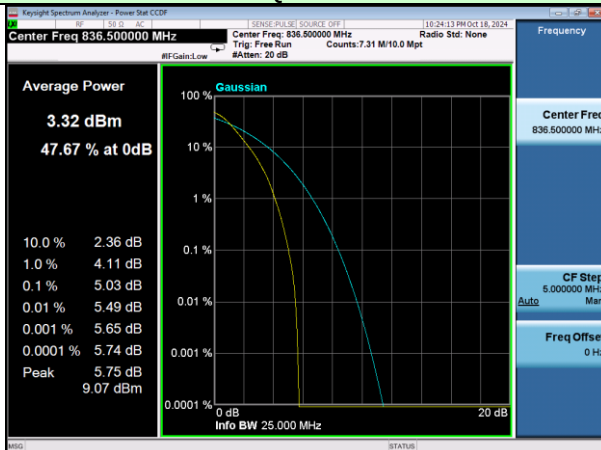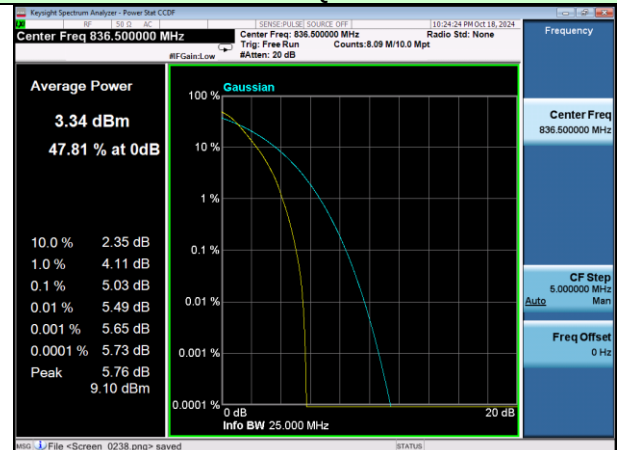Test Mode: LTE Band 2
Middle channel/20MHz/QPSK**Test Mode: LTE Band 2**
Middle channel/20MHz/16-QAM**Test Mode: LTE Band 4**
Middle channel/20MHz/QPSK**Test Mode: LTE Band 4**
Middle channel/20MHz/16-QAM**Test Mode: LTE Band 5**
Middle channel/10MHz/QPSK**Test Mode: LTE Band 5**
Middle channel/10MHz/16-QAM


Test Mode: LTE Band 7
Middle channel/20MHz/QPSK

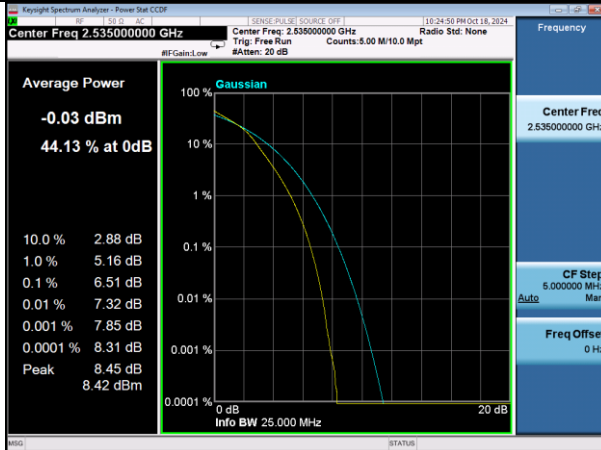


Test Mode: LTE Band 7
Middle channel/20MHz/16-QAM

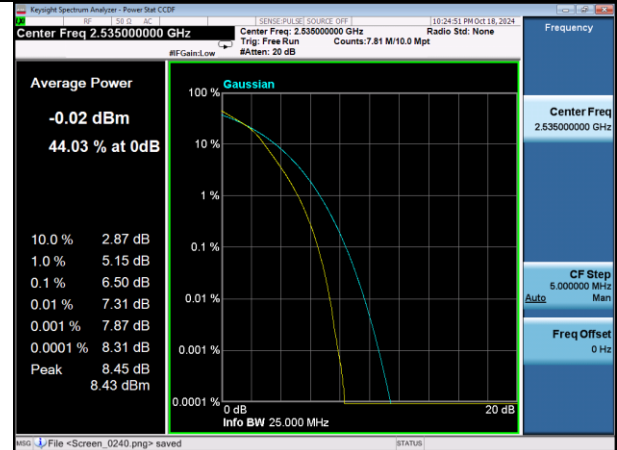


Test Mode: LTE Band 12
Middle channel/10MHz/QPSK

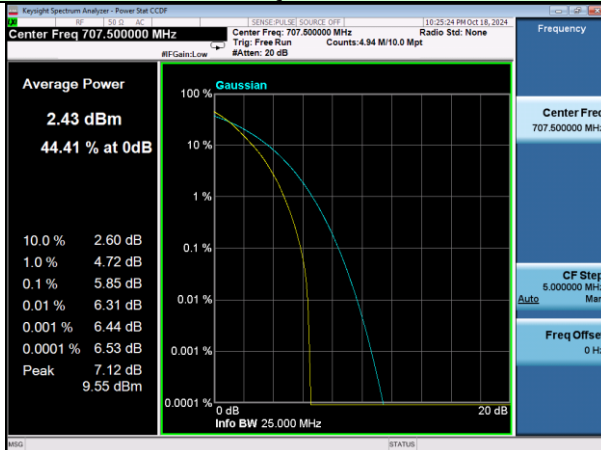


Test Mode: LTE Band 12
Middle channel/10MHz/16-QAM

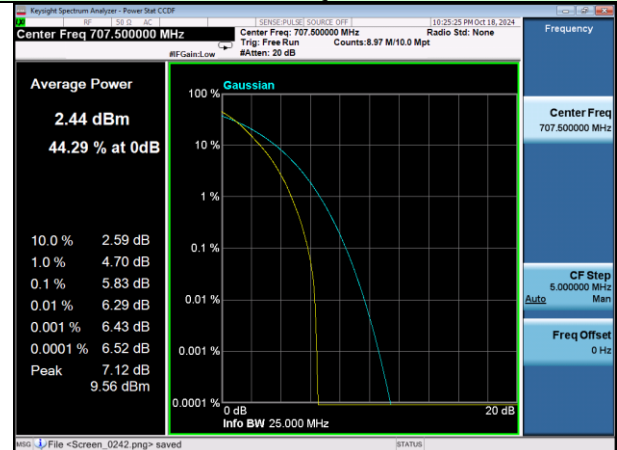

Test Mode: LTE Band 41
Middle channel/20MHz/QPSK

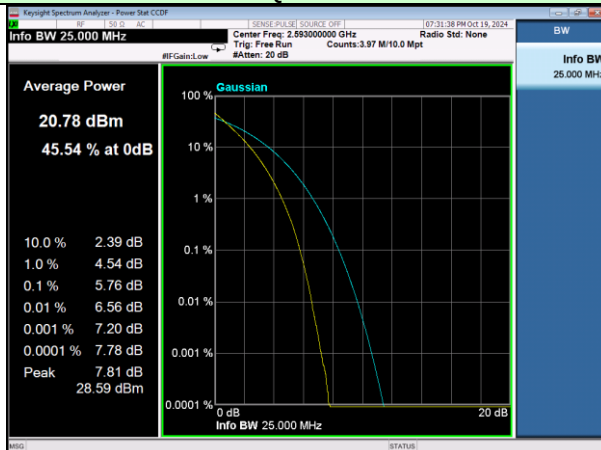


Test Mode: LTE Band 41
Middle channel/20MHz/16-QAM

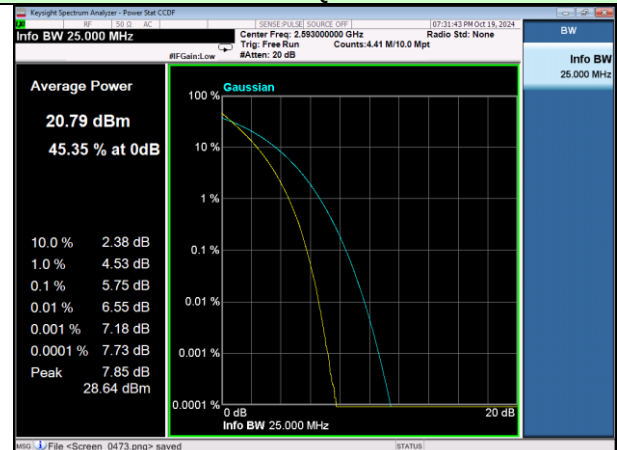

Note: All bandwidth and modulation are tested, only the worst results are reported.

4.5 Occupy Bandwidth

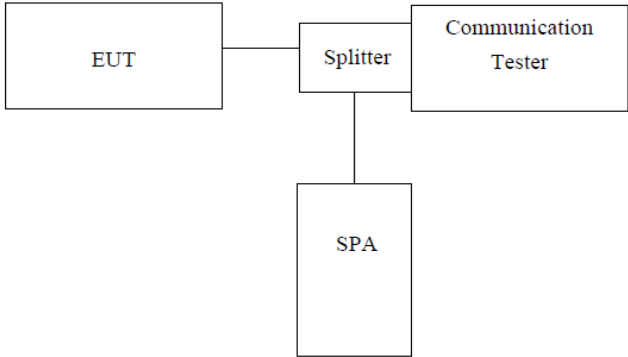Test Requirement:	FCC part22.913(a), FCC part24.232(b) and FCC part27.53(a), RSS-130 (4.1), RSS-132 (3.1), RSS-133 (3.1), RSS-139(3.1) and RSS-199(4.2)
Test Method:	ANSI C63.26:2015
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer, set center frequency to channel center frequency. 2. RBW was set to about 1%-5% of emission OBW, VBW$\geq$ 3 X RBW. 3. Set spectrum analyzer detection mode to peak, and the trace mode to max hold. 4. Use the 99% OBW function, The 99% power OBW can be found on the plot, determine the "-26dB amplitude" as equal to reference value -26dB.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

Band2						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	18900	1880	1.1964	1.411
		3	18900	1880	2.7301	3.024
		5	18900	1880	4.4978	4.904
		10	18900	1880	8.9319	9.572
		15	18900	1880	13.372	14.32
		20	18900	1880	17.892	19.01
	QAM16	1.4	18900	1880	1.1904	1.408
		3	18900	1880	2.7314	3.023
		5	18900	1880	4.4975	4.907
		10	18900	1880	8.9432	9.648
		15	18900	1880	13.409	14.24
		20	18900	1880	17.863	18.93

Band4						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20175	1732.5	1.1800	1.405
		3	20175	1732.5	2.7272	3.037
		5	20175	1732.5	4.5020	4.906
		10	20175	1732.5	8.9399	9.596
		15	20175	1732.5	13.406	14.43
		20	20175	1732.5	17.865	19.03
	QAM16	1.4	20175	1732.5	1.1805	1.409
		3	20175	1732.5	2.7270	3.052
		5	20175	1732.5	4.5102	4.911
		10	20175	1732.5	8.9428	9.631
		15	20175	1732.5	13.414	14.45
		20	20175	1732.5	17.878	19.04

Band5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20530	837	1.1859	1.786
		3	20530	837	2.7267	3.046
		5	20530	837	4.5059	4.901
		10	20530	837	8.9047	9.495
	QAM16	1.4	20530	837	1.875	1.786
		3	20530	837	2.7255	3.037
		5	20530	837	4.5146	4.902
		10	20530	837	8.8978	.543.97

Band7						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	21100	2535	4.5059	4.907
		10	21100	2535	8.9494	9.527
		15	21100	2535	13.402	14.48
		20	21100	2535	17.830	19.05
	QAM16	5	21100	2535	4.5086	4.917
		10	21100	2535	8.9449	9.616
		15	21100	2535	13.405	14.48
		20	21100	2535	17.832	19.05

Band12						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	23095	707.5	1.1765	1.400
		3	23095	707.5	2.7354	3.053
		5	23095	707.5	4.5307	4.963
		10	23095	707.5	9.0077	9.9646
	QAM16	1.4	23095	707.5	1.1818	1.419
		3	23095	707.5	2.7357	3.062
		5	23095	707.5	4.5374	4.99
		10	23095	707.5	9.0154	9.664

Band41						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	40620	2593	4.5087	4.912
		10	40620	2593	8.9516	9.463
		15	40620	2593	13.429	14.20
		20	40620	2593	17.860	19.02
100%	QAM16	5	40620	2593	4.5052	4.940
		10	40620	2593	8.9576	9.619
		15	40620	2593	13.435	14.29
		20	40620	2593	17.861	19.01

Test plot as follows:

Test Mode: LTE Band 2


Channel Bandwidth: 1.4MHz

Test Mode: LTE Band 2

Channel Bandwidth: 3MHz




QPSK

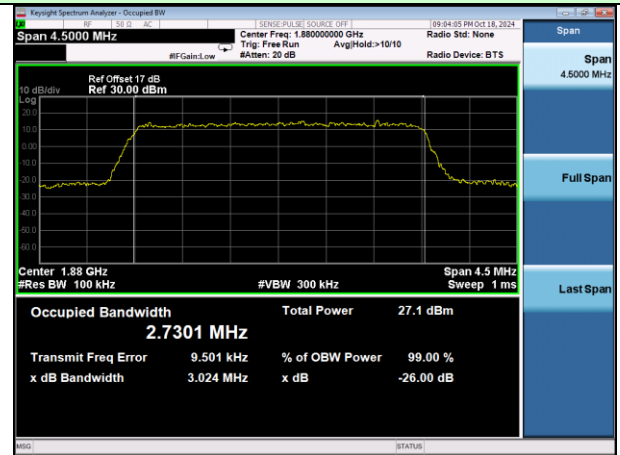

QPSK




16-QAM

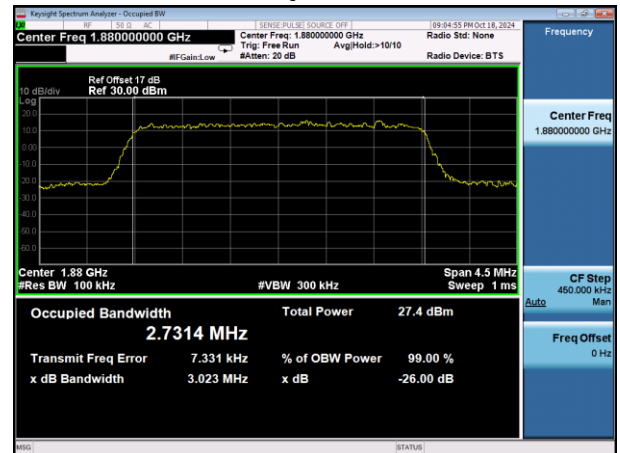

16-QAM

Test Mode: LTE Band 2
Channel Bandwidth: 5MHz

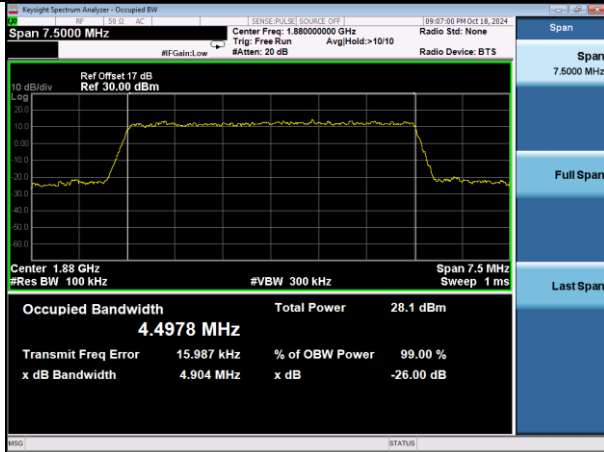


QPSK




16-QAM

Test Mode: LTE Band 2
Channel Bandwidth: 10MHz

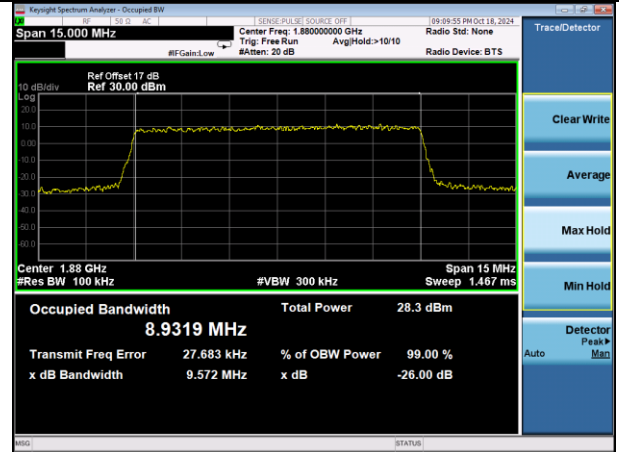


QPSK

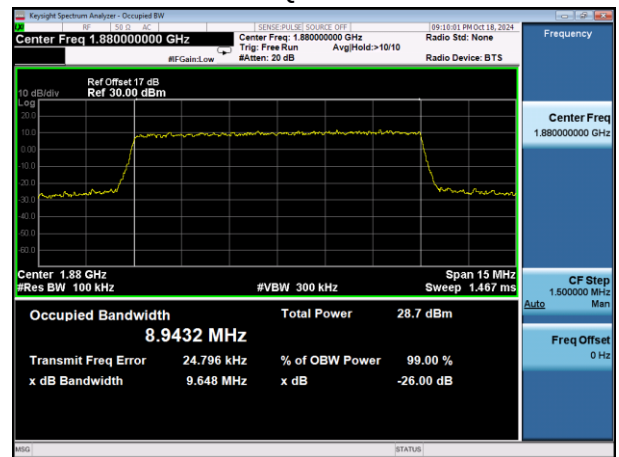


16-QAM

Test Mode: LTE Band 2
Channel Bandwidth: 15MHz

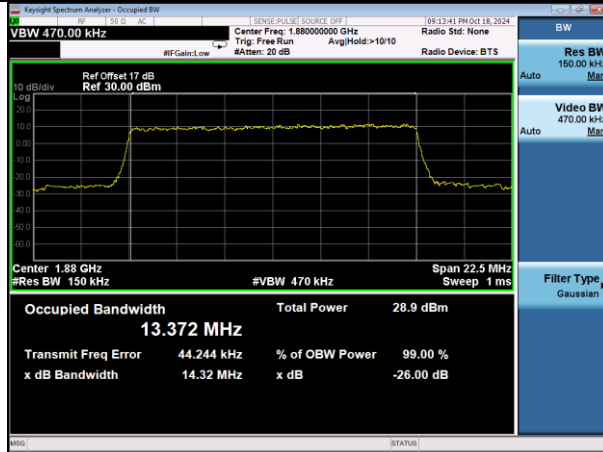


QPSK

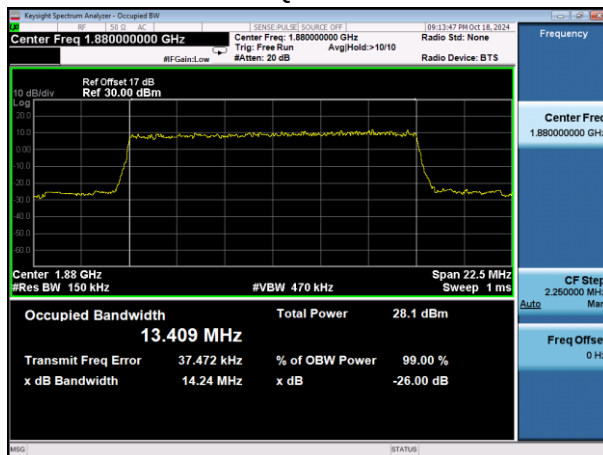


16-QAM

Test Mode: LTE Band 2
Channel Bandwidth: 20MHz

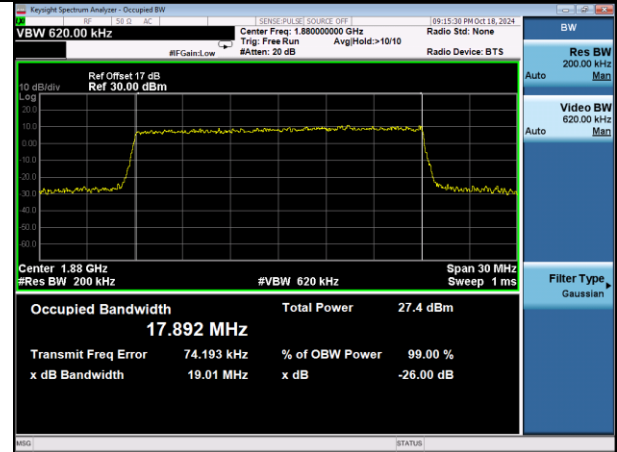


QPSK

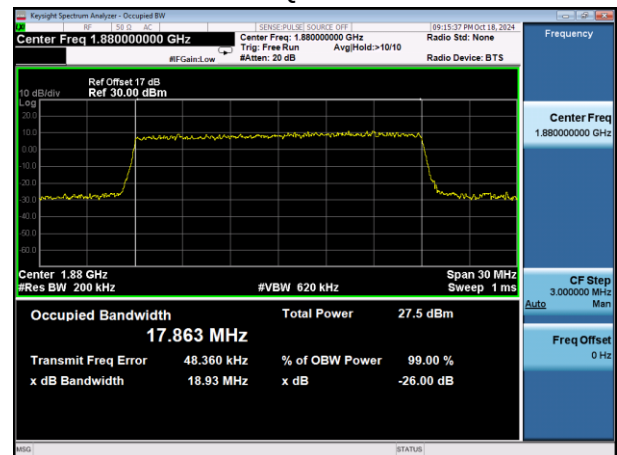


16-QAM

Test Mode: LTE Band 4
Channel Bandwidth: 1.4MHz

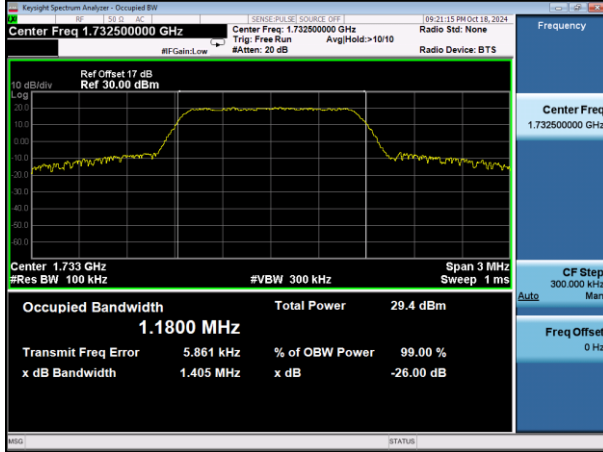


QPSK


Test Mode: LTE Band 4
Channel Bandwidth: 3MHz

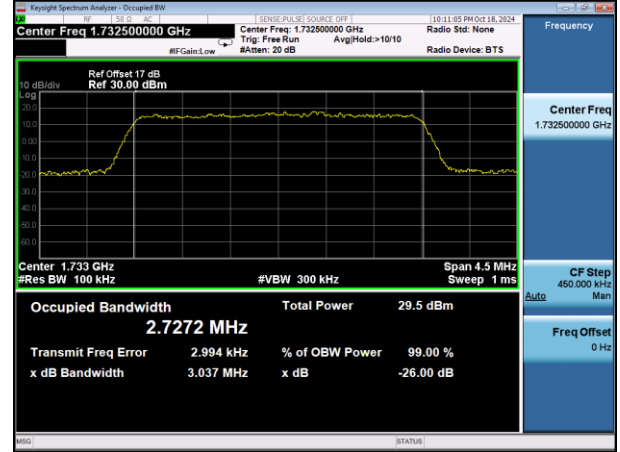

QPSK

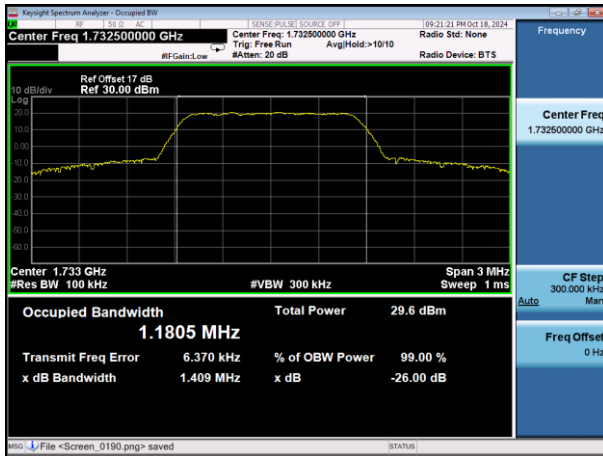


16-QAM

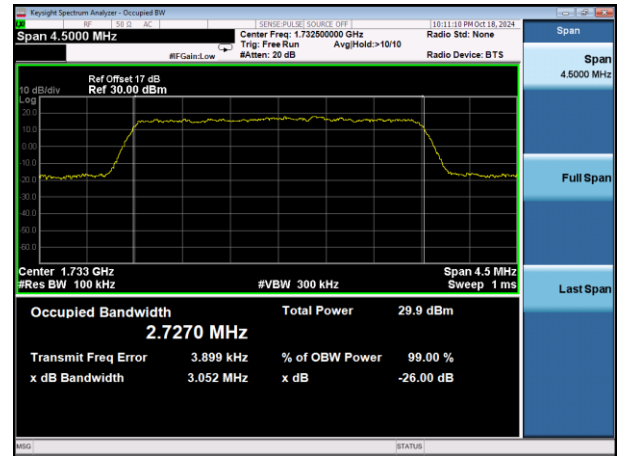

16-QAM

Test Mode: LTE Band 4
Channel Bandwidth: 5MHz

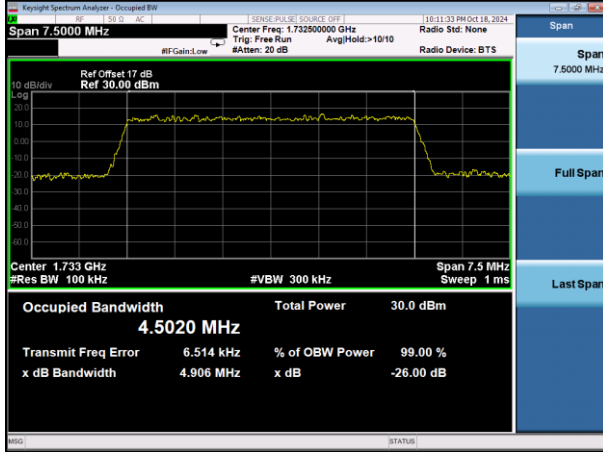


QPSK




16-QAM

Test Mode: LTE Band 4
Channel Bandwidth: 10MHz

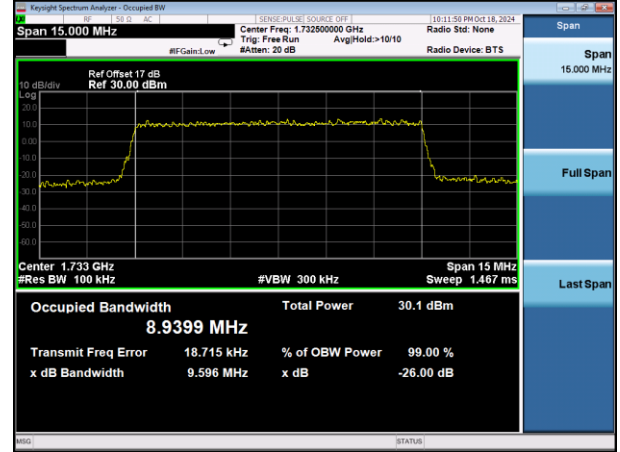


QPSK

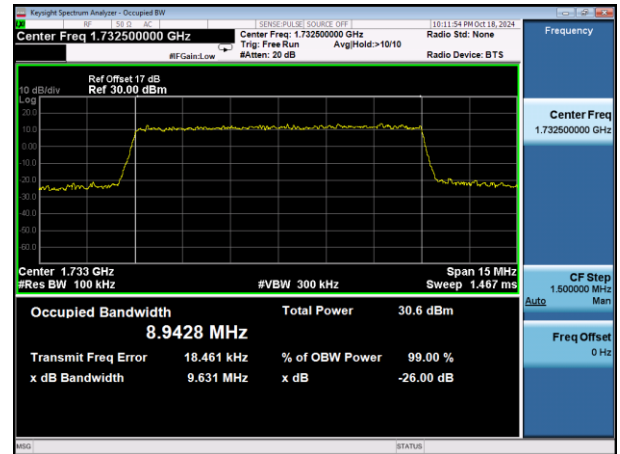


16-QAM

Test Mode: LTE Band 4
Channel Bandwidth: 15MHz

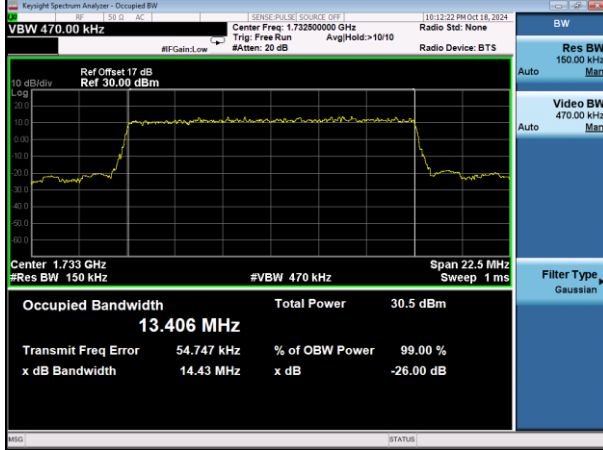


QPSK


Test Mode: LTE Band 4
Channel Bandwidth: 20MHz

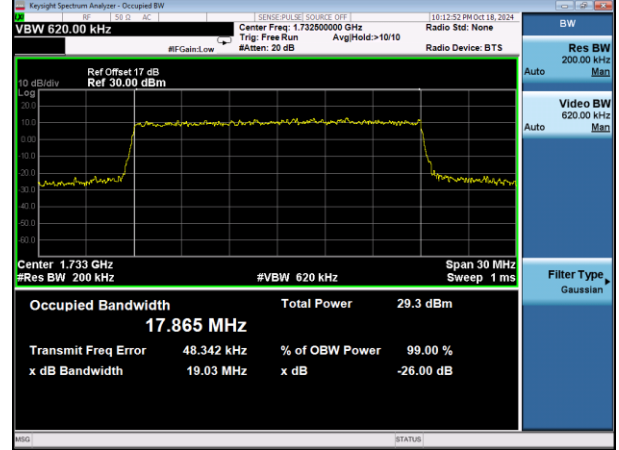

QPSK

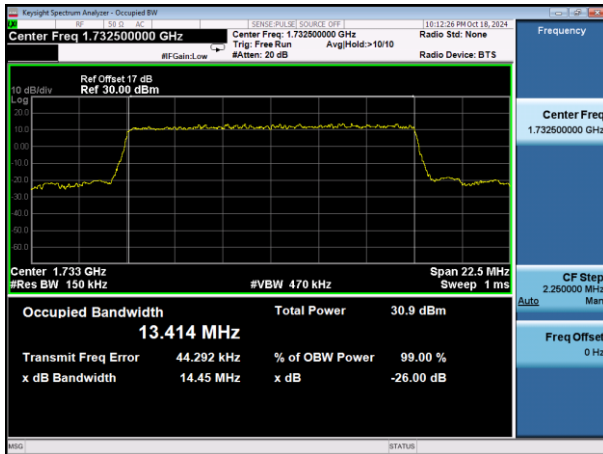


16-QAM

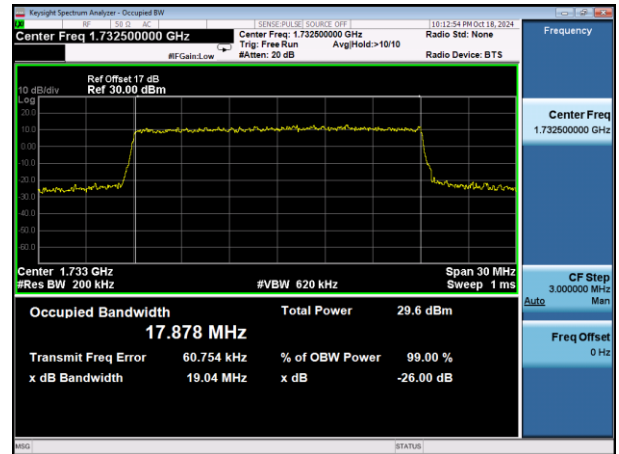


16-QAM

Test Mode: LTE Band 5
Channel Bandwidth: 1.4MHz

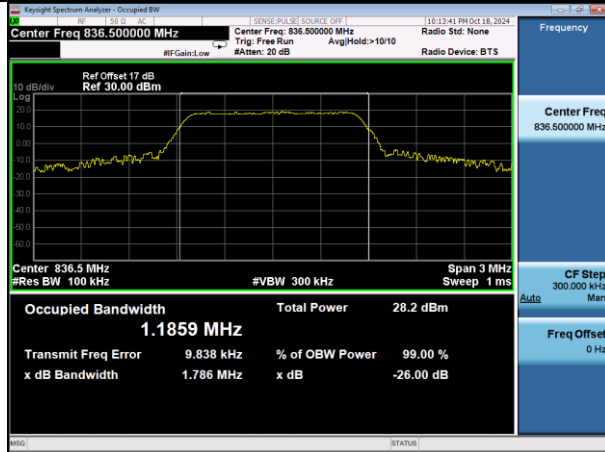


QPSK

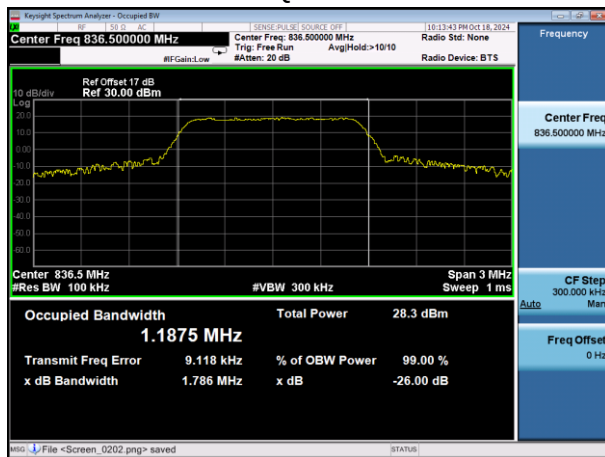


16-QAM

Test Mode: LTE Band 5
Channel Bandwidth: 3MHz

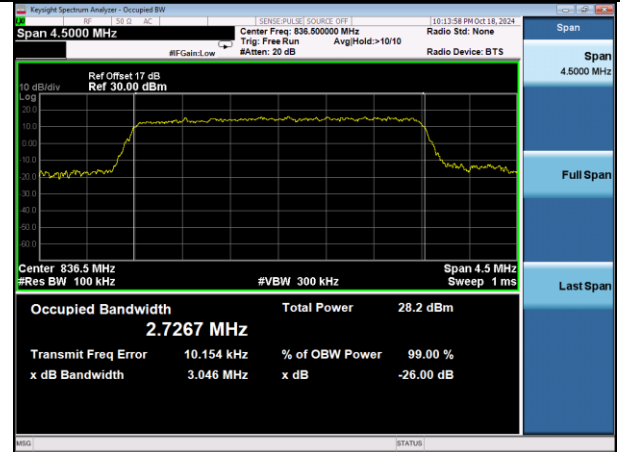


QPSK

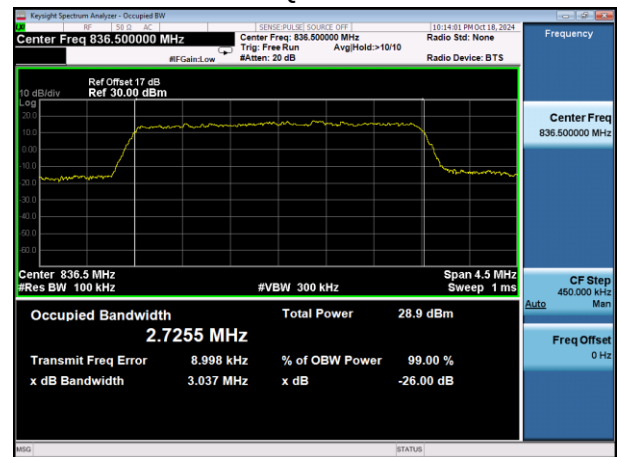


16-QAM


Test Mode: LTE Band 5
Channel Bandwidth: 5MHz

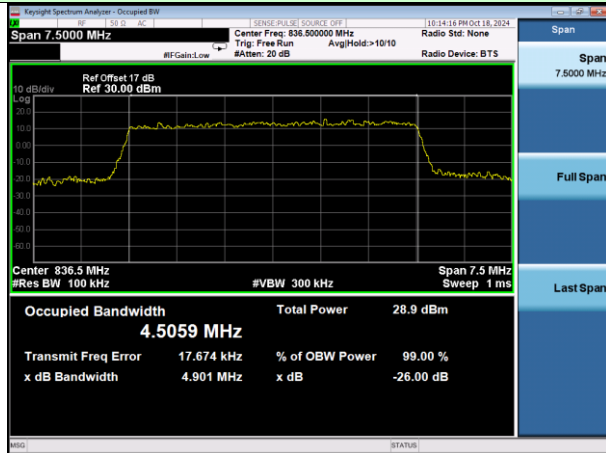

Test Mode: LTE Band 5
Channel Bandwidth: 10MHz

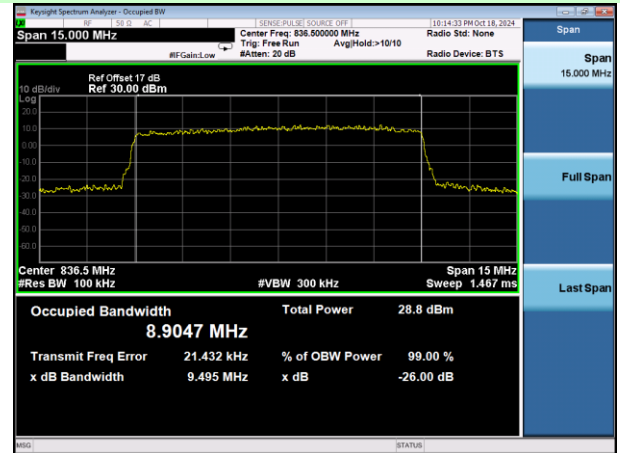


QPSK

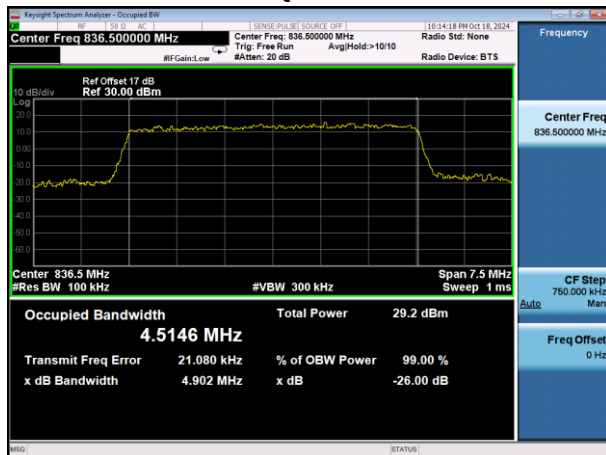


16-QAM

QPSK

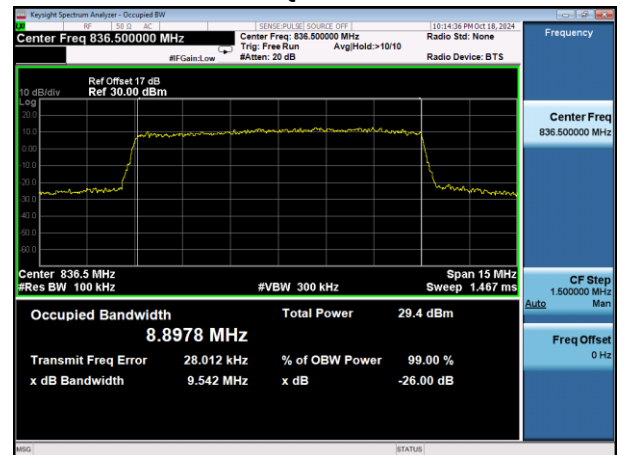


16-QAM

Test Mode: LTE Band 7
Channel Bandwidth: 5MHz

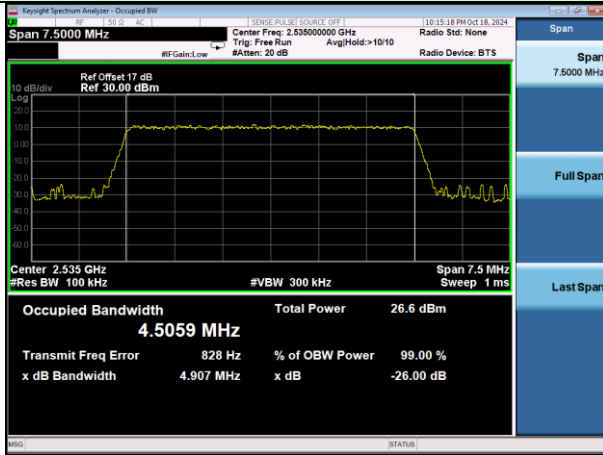


QPSK

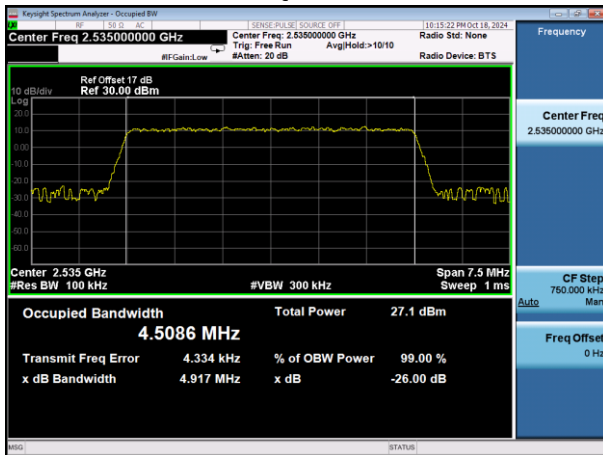


16-QAM

Test Mode: LTE Band 7
Channel Bandwidth: 10MHz

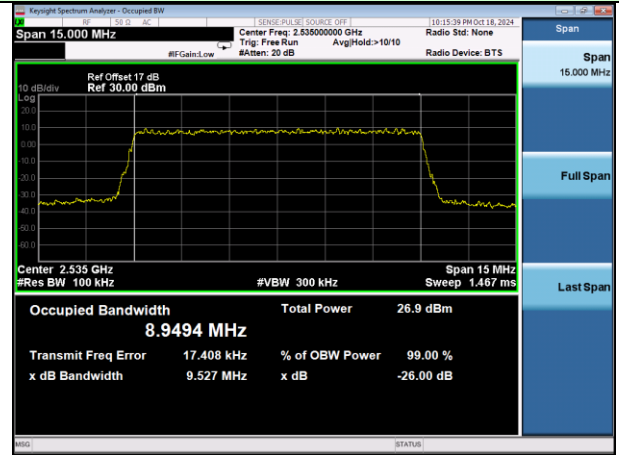

QPSK

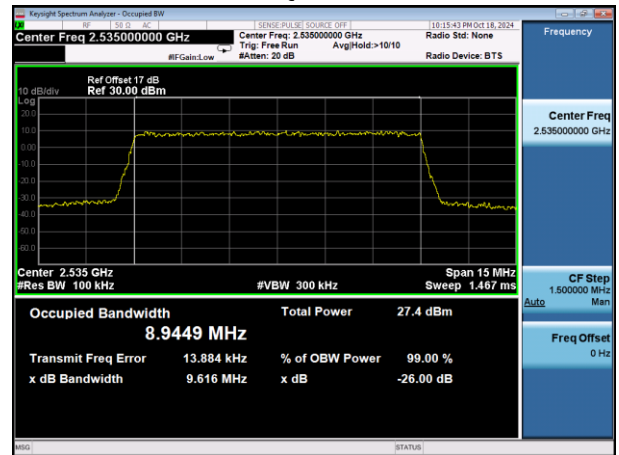

16-QAM