

FCC Radio Test Report

FCC ID: 2AF82-BXP100

Report No. : BTL-FCCP-1-2104T005
Equipment : Box PC
Model Name : BXP-100, xxxBXP-1XXXX (Where "x" and "X" may be any alphanumeric character, blank, "_" or "-" for marketing purpose only.)
Brand Name : Qbic
Applicant : Qbic Technology Co., Ltd.
Address : 26F.-12, NO.99, SEC. 1, XINTAI 5TH RD., XIZHI DIST., NEW TAIPEI CITY 22175, TAIWAN

Radio Function : Bluetooth EDR

FCC Rule Part(s) : FCC Part15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2013


Date of Receipt : 2021/6/22
Date of Test : 2021/6/22 ~ 2021/7/19
Issued Date : 2021/7/29

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by


 Jerry Chuang, Supervisor

Approved by


 Peter Chen, Vice Manager



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
1.5 DUTY CYCLE	9
2 GENERAL INFORMATION	10
2.1 DESCRIPTION OF EUT	10
2.2 TEST MODES	12
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.4 SUPPORT UNITS	14
3 AC POWER LINE CONDUCTED EMISSIONS TEST	15
3.1 LIMIT	15
3.2 TEST PROCEDURE	15
3.3 DEVIATION FROM TEST STANDARD	15
3.4 TEST SETUP	16
3.5 TEST RESULT	16
4 RADIATED EMISSIONS TEST	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	18
4.5 EUT OPERATING CONDITIONS	19
4.6 TEST RESULT – BELOW 30 MHZ	20
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	20
4.8 TEST RESULT – ABOVE 1 GHZ	20
5 NUMBER OF HOPPING CHANNEL	21
5.1 APPLIED PROCEDURES	21
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM STANDARD	21
5.4 TEST SETUP	21
5.5 EUT OPERATION CONDITIONS	21
5.6 TEST RESULTS	21
6 AVERAGE TIME OF OCCUPANCY	22
6.1 APPLIED PROCEDURES / LIMIT	22
6.2 TEST PROCEDURE	22
6.3 DEVIATION FROM STANDARD	22
6.4 TEST SETUP	22
6.5 EUT OPERATION CONDITIONS	22
6.6 TEST RESULTS	22
7 HOPPING CHANNEL SEPARATION MEASUREMENT	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.2 TEST PROCEDURE	23
7.3 DEVIATION FROM STANDARD	23
7.4 TEST SETUP	23
7.5 TEST RESULTS	23

8	BANDWIDTH TEST	24
8.1	APPLIED PROCEDURES	24
8.2	TEST PROCEDURE	24
8.3	DEVIATION FROM STANDARD	24
8.4	TEST SETUP	24
8.5	EUT OPERATION CONDITIONS	24
8.6	TEST RESULTS	24
9	OUTPUT POWER TEST	25
9.1	APPLIED PROCEDURES / LIMIT	25
9.2	TEST PROCEDURE	25
9.3	DEVIATION FROM STANDARD	25
9.4	TEST SETUP	25
9.5	EUT OPERATION CONDITIONS	25
9.6	TEST RESULTS	25
10	ANTENNA CONDUCTED SPURIOUS EMISSION	26
10.1	APPLIED PROCEDURES / LIMIT	26
10.2	TEST PROCEDURE	26
10.3	DEVIATION FROM STANDARD	26
10.4	TEST SETUP	26
10.5	EUT OPERATION CONDITIONS	26
10.6	TEST RESULTS	26
11	LIST OF MEASURING EQUIPMENTS	27
12	EUT TEST PHOTO	29
13	EUT PHOTOS	29
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	30
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	35
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	38
APPENDIX D	NUMBER OF HOPPING CHANNEL	55
APPENDIX E	AVERAGE TIME OF OCCUPANCY	57
APPENDIX F	HOPPING CHANNEL SEPARATION MEASUREMENT	60
APPENDIX G	BANDWIDTH	63
APPENDIX H	OUTPUT POWER	66
APPENDIX I	ANTENNA CONDUCTED SPURIOUS EMISSION	68

REVISION HISTORY

Report No.	Version	Description	Issued Date
BTL-FCCP-1-2104T005	R00	Original Report.	2021/7/29

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart C (15.247)				
Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX D	Pass	-----
15.247 (a)(1)(iii)	Average Time of Occupancy	APPENDIX E	Pass	-----
15.247 (a)(1)	Hopping Channel Separation	APPENDIX F	Pass	-----
15.247 (a)(1)	Bandwidth	APPENDIX G	Pass	-----
15.247 (b)(1)	Output Power	APPENDIX H	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	APPENDIX I	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05 ☐ CB08 ☐ CB11 ☒ CB15 ☐ CB16
☒ SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30 MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Occupied Bandwidth	0.5338
Output power	0.3659
Conducted Spurious emissions	0.5416
Conducted Band edges	0.5348
Dwell time	0.6606
Channel separation	0.6606
Channel numbers	0.6606

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	22 °C, 56 %	AC 120V	Paul Shen
Radiated emissions below 1 GHz	23 °C, 57 %	AC 120V	Hunter Chiang
Radiated emissions above 1 GHz	23 °C, 57 %	AC 120V	Hunter Chiang
Number of Hopping Frequency	25.3 °C, 52 %	AC 120V	Tim Lee
Average Time of Occupancy	25.3 °C, 52 %	AC 120V	Tim Lee
Hopping Channel Separation	25.3 °C, 52 %	AC 120V	Tim Lee
Bandwidth	25.3 °C, 52 %	AC 120V	Tim Lee
Output Power	25.3 °C, 52 %	AC 120V	Tim Lee
Antenna conducted Spurious Emission	25.3 °C, 52 %	AC 120V	Tim Lee

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING


Test Software	N/A			
Modulation Mode	2402 MHz	2441 MHz	2480 MHz	Data Rate
GFSK	0	0	0	1 Mbps
$\pi/4$ -DQPSK	0	0	0	2 Mbps
8DPSK	0	0	0	3 Mbps

1.5 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


Remark	Delta 1			Delta 2		On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)		Duty Cycle (%)	Duty Factor (dB)
BT (1 Mbps)	2.820	1	2.820	3.740		75.40%	1.23
BT (2 Mbps)	2.900	1	2.900	3.760		77.13%	1.13
BT (3 Mbps)	2.900	1	2.900	3.760		77.13%	1.13



Date: 8.JUL.2021 15:50:53



Date: 8.JUL.2021 16:59:40



Date: 8.JUL.2021 17:15:23

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Box PC
Model Name	BXP-100, xxxBXP-1XXXX (Where "x" and "X" may be any alphanumeric character, blank, " " or "-" for marketing purpose only.)
Brand Name	Qbic
Model Difference	Different models distribute to different area.
Power Source	DC Voltage supplied from AC/DC adapter.
Power Rating	I/P: 100-240V~, 50-60Hz, 300mA O/P: +5V, 2A MAX 10.0W
Products Covered	1 * Adapter: PHIHONG / PSM10R-050 4 * Plug 1 * Screw
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1 Mbps, 2 Mbps, 3Mbps
Output Power Max.	1 Mbps: 5.64 dBm (0.0037 W) 2 Mbps: 2.41 dBm (0.0017 W) 3 Mbps: 5.64 dBm (0.0037 W)
Test Model	BXP-100
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

(3) Table for Filed Antenna:

Antenna	Manufacture	Project	Type	Connector	Frequency (MHz)	Gain (dBi)
1	INPAQ	BXP-100	PCB Dipole	N/A	2400-2500	2.58
					5150-5250	2.55
					5725-5850	2.73

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	1 Mbps	78	-
Transmitter Radiated Emissions (above 1GHz)	1/3 Mbps	00/78	Bandedge
	1/3 Mbps	00/39/78	Harmonic
Number of Hopping Frequency	1/3 Mbps	00~78	-
Average Time of Occupancy	1/3 Mbps	00/39/78	-
Hopping Channel Separation	1/3 Mbps	00/39/78	-
Bandwidth	1/3 Mbps	00/39/78	-
Peak Output Power	1/2/3 Mbps	00/39/78	-
Antenna conducted Spurious Emission	1/3 Mbps	00/39/78	-


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (Y axis) is recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

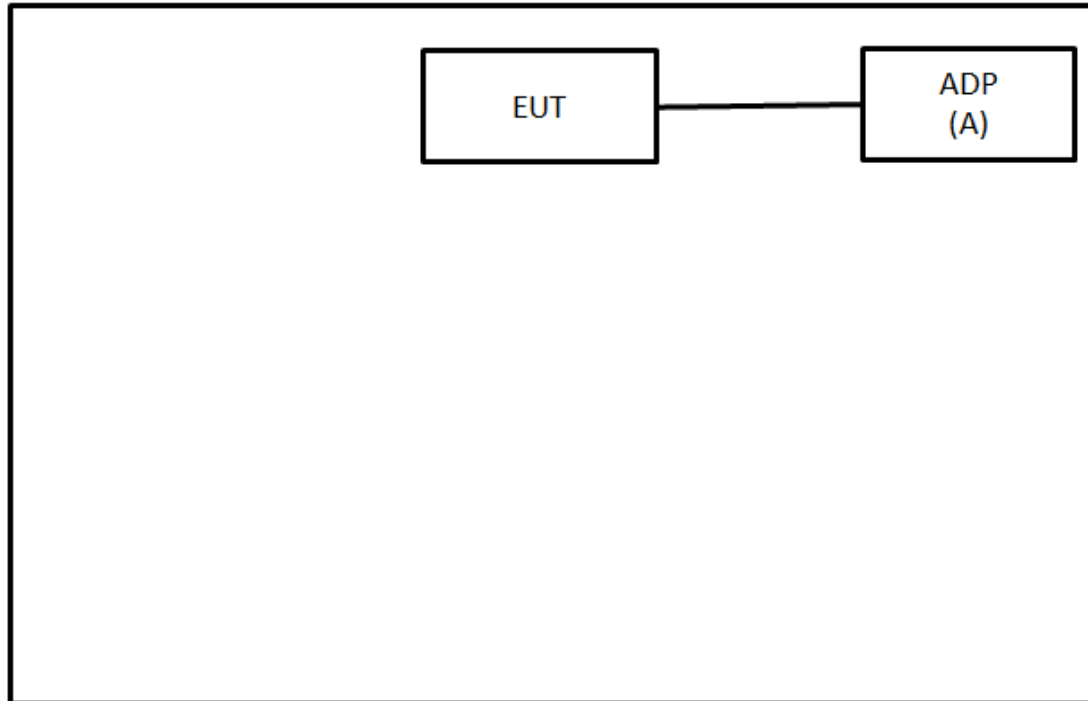

Radiated Emissions

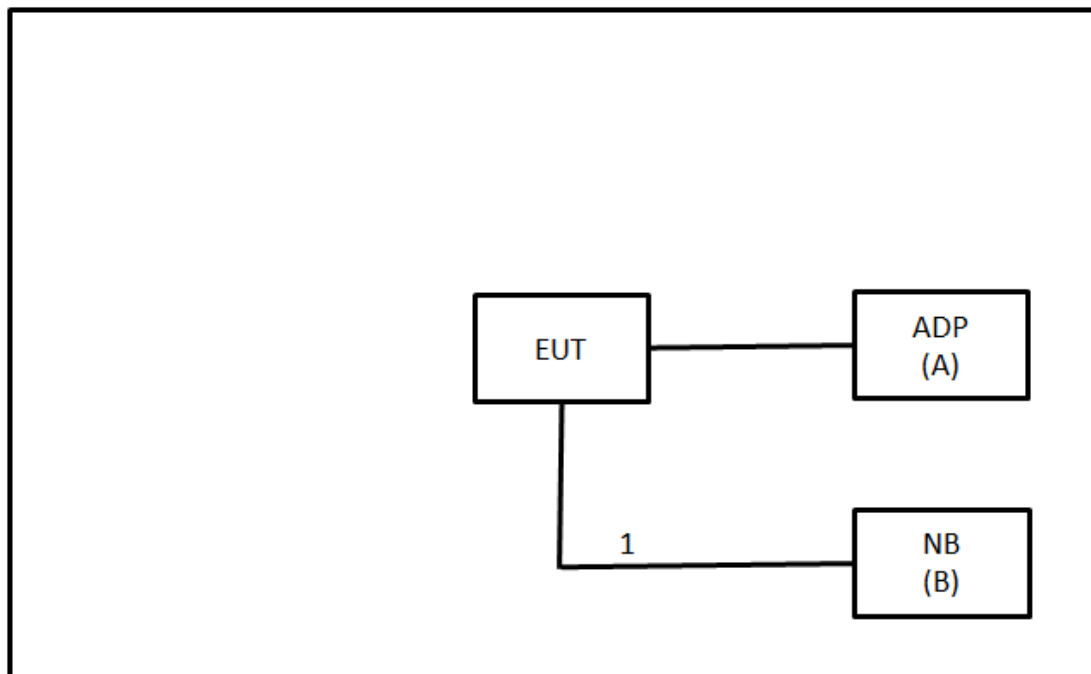

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	PHIHONG	PSM10R-050	N/A	Supplied by test requester
B	NB	Asus	X450JN	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1m	Micro USB dongle	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP



3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
35.45	+	-11.37	=	24.08

Measurement Value		Limit Value		Margin Level
24.08	-	40	=	-15.92

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector


4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


4.3 DEVIATION FROM TEST STANDARD

No deviation.


4.4 TEST SETUP



30 MHz to 1 GHz



Above 1 GHz



4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6 AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- Measure the maximum time duration of one single pulse.
A Period Time = (channel number) * 0.4

For Non-AFH Mode (79 Channel):

DH1 Time Solt: Reading * (1600/6)/79 * (0.4 * 79)

DH3 Time Solt: Reading * (1600/6)/79 * (0.4 * 79)

DH5 Time Solt: Reading * (1600/6)/79 * (0.4 * 79)

For AFH Mode (20 Channel):

DH1 Time Solt: Reading * (800/6)/20 * (0.4 * 20)


DH3 Time Solt: Reading * (800/6)/20 * (0.4 * 20)

DH5 Time Solt: Reading * (800/6)/20 * (0.4 * 20)

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7 Hopping Channel Separation Measurement

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.2 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
Video (or Average) Bandwidth (VBW) \geq RBW
Sweep = Auto
Detector function = Peak
Trace = Max Hold

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 TEST RESULTS

Please refer to the APPENDIX F.

8 BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9 OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125Watt or 21dBm	2400-2483.5	PASS


9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 3MHz, VBW= 3MHz, Sweep time = Auto.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10 ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


10.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- Offset=antenna gain+cable loss

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP



10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS

Please refer to the APPENDIX I.

11 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101339	2021/3/10	2022/3/9
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2021/5/3	2022/5/2
3	EMI Test Receiver	R&S	ESR 7	101433	2020/12/11	2021/12/10
4	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325B	980217	2021/4/8	2022/4/7
2	Preamplifier	EMCI	EMC012645B	980267	2021/4/8	2022/4/7
3	Preamplifier	EMCI	EMC001340	980555	2021/4/8	2022/4/7
4	Test Cable	EMCI	EMC-SM-SM-1000	180809	2021/4/8	2022/4/7
5	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2021/4/8	2022/4/7
6	Test Cable	EMCI	EMC-SM-SM-7000	180408	2021/4/8	2022/4/7
7	MXE EMI Receiver	Agilent	N9038A	MY554200087	2021/5/27	2022/5/26
8	Signal Analyzer	Agilent	N9010A	MY56480554	2020/8/25	2021/8/24
9	Loop Ant	Electro-Metrics	EMCI-LPA600	274	2021/6/1	2022/5/31
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2021/6/2	2022/6/1
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	764	2021/7/2	2022/7/1
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	VULB 9168-352	2020/7/24	2021/7/23
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0625	2020/7/24	2021/7/23
14	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Number of Hopping Frequency						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2021/3/5	2022/3/4

Average Time of Occupancy						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2021/3/5	2022/3/4

Hopping Channel Separation						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2021/3/5	2022/3/4

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2021/3/5	2022/3/4

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Anritsu	ML2487A	6K00004714	2020/9/3	2021/9/2
2	Power Sensor	Anritsu	MA2491A	034138	2020/9/3	2021/9/2

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2021/3/5	2022/3/4

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

12 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2104T005-FCCP-1 (APPENDIX-TEST PHOTOS).

13 EUT PHOTOS

Please refer to document Appendix No.: EP-2104T005-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2021/7/14
Test Frequency	-	Phase	Line




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1950	32.48	9.70	42.18	63.82	-21.64	QP	
2		0.1950	16.19	9.70	25.89	53.82	-27.93	AVG	
3	*	0.6000	27.03	9.71	36.74	56.00	-19.26	QP	
4		0.6000	14.06	9.71	23.77	46.00	-22.23	AVG	
5		1.0995	20.23	9.72	29.95	56.00	-26.05	QP	
6		1.0995	9.38	9.72	19.10	46.00	-26.90	AVG	
7		1.9478	15.04	9.76	24.80	56.00	-31.20	QP	
8		1.9478	5.24	9.76	15.00	46.00	-31.00	AVG	
9		4.2630	14.35	9.91	24.26	56.00	-31.74	QP	
10		4.2630	5.78	9.91	15.69	46.00	-30.31	AVG	
11		14.9213	19.30	10.23	29.53	60.00	-30.47	QP	
12		14.9213	11.43	10.23	21.66	50.00	-28.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2021/7/14
Test Frequency	-	Phase	Neutral




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1928	32.83	9.70	42.53	63.92	-21.39	QP	
2		0.1928	14.79	9.70	24.49	53.92	-29.43	AVG	
3		0.5865	20.75	9.71	30.46	56.00	-25.54	QP	
4		0.5865	9.28	9.71	18.99	46.00	-27.01	AVG	
5		1.0882	15.31	9.73	25.04	56.00	-30.96	QP	
6		1.0882	5.04	9.73	14.77	46.00	-31.23	AVG	
7		1.4640	12.16	9.74	21.90	56.00	-34.10	QP	
8		1.4640	2.60	9.74	12.34	46.00	-33.66	AVG	
9		4.2270	7.18	9.90	17.08	56.00	-38.92	QP	
10		4.2270	0.73	9.90	10.63	46.00	-35.37	AVG	
11		14.0528	9.58	10.23	19.81	60.00	-40.19	QP	
12		14.0528	1.43	10.23	11.66	50.00	-38.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/7/14
Test Frequency	-	Phase	Line




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1950	33.03	9.70	42.73	63.82	-21.09	QP	
2		0.1950	16.51	9.70	26.21	53.82	-27.61	AVG	
3		0.2445	24.46	9.70	34.16	61.94	-27.78	QP	
4		0.2445	10.10	9.70	19.80	51.94	-32.14	AVG	
5	*	0.5887	25.73	9.71	35.44	56.00	-20.56	QP	
6		0.5887	13.09	9.71	22.80	46.00	-23.20	AVG	
7		1.1130	19.68	9.72	29.40	56.00	-26.60	QP	
8		1.1130	9.17	9.72	18.89	46.00	-27.11	AVG	
9		1.5022	17.09	9.74	26.83	56.00	-29.17	QP	
10		1.5022	7.38	9.74	17.12	46.00	-28.88	AVG	
11		14.1900	15.75	10.22	25.97	60.00	-34.03	QP	
12		14.1900	6.20	10.22	16.42	50.00	-33.58	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/7/14
Test Frequency	-	Phase	Neutral



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1927	33.75	9.70	43.45	63.92	-20.47	QP	
2		0.1927	15.24	9.70	24.94	53.92	-28.98	AVG	
3		0.2872	26.79	9.71	36.50	60.60	-24.10	QP	
4		0.2872	9.29	9.71	19.00	50.60	-31.60	AVG	
5		0.5932	21.28	9.71	30.99	56.00	-25.01	QP	
6		0.5932	9.84	9.71	19.55	46.00	-26.45	AVG	
7		1.0994	15.36	9.73	25.09	56.00	-30.91	QP	
8		1.0994	5.71	9.73	15.44	46.00	-30.56	AVG	
9		1.4482	10.77	9.74	20.51	56.00	-35.49	QP	
10		1.4482	1.40	9.74	11.14	46.00	-34.86	AVG	
11		14.3025	10.44	10.24	20.68	60.00	-39.32	QP	
12		14.3025	1.85	10.24	12.09	50.00	-37.91	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	BT(1 Mbps)	Test Date	2021/7/8
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	32.3280	43.58	-9.00	34.58	40.00	-5.42	QP	
2		128.0347	42.95	-9.62	33.33	43.50	-10.17	peak	
3		239.2937	41.34	-9.67	31.67	46.00	-14.33	peak	
4		478.6573	33.44	-3.20	30.24	46.00	-15.76	peak	
5		790.2537	30.39	2.32	32.71	46.00	-13.29	peak	
6		953.6340	29.26	5.02	34.28	46.00	-11.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/8
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		84.1906	46.87	-13.61	33.26	40.00	-6.74	QP	
2	*	128.3256	46.73	-9.59	37.14	43.50	-6.36	peak	
3		239.6816	47.64	-9.64	38.00	46.00	-8.00	peak	
4		479.3686	31.68	-3.19	28.49	46.00	-17.51	peak	
5		753.8463	29.52	1.90	31.42	46.00	-14.58	peak	
6		948.6546	28.64	4.97	33.61	46.00	-12.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2402MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2367.653	26.29	31.14	57.43	74.00	-16.57	peak	
2		2367.653	13.17	31.14	44.31	54.00	-9.69	AVG	
3	X	2402.000	75.03	31.26	106.29	74.00	32.29	peak	NoLimit
4	*	2402.000	74.65	31.26	105.91	54.00	51.91	AVG	NoLimit
5		2487.967	26.79	31.53	58.32	74.00	-15.68	peak	
6		2487.967	3.52	31.53	35.05	54.00	-18.95	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2387.833	25.52	31.21	56.73	74.00	-17.27	peak	
2		2387.833	3.50	31.21	34.71	54.00	-19.29	AVG	
3	X	2480.000	75.26	31.51	106.77	74.00	32.77	peak	NoLimit
4	*	2480.000	74.93	31.51	106.44	54.00	52.44	AVG	NoLimit
5		2484.093	28.10	31.52	59.62	74.00	-14.38	peak	
6		2484.093	17.34	31.52	48.86	54.00	-5.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2402MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2342.853	27.33	31.06	58.39	74.00	-15.61	peak	
2		2342.853	13.04	31.06	44.10	54.00	-9.90	AVG	
3	X	2402.000	77.75	31.26	109.01	74.00	35.01	peak	NoLimit
4	*	2402.000	74.00	31.26	105.26	54.00	51.26	AVG	NoLimit
5		2488.527	26.01	31.53	57.54	74.00	-16.46	peak	
6		2488.527	3.53	31.53	35.06	54.00	-18.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2386.853	25.27	31.21	56.48	74.00	-17.52	peak	
2		2386.853	2.80	31.21	34.01	54.00	-19.99	AVG	
3	X	2480.000	72.62	31.51	104.13	74.00	30.13	peak	NoLimit
4	*	2480.000	69.16	31.51	100.67	54.00	46.67	AVG	NoLimit
5		2504.907	26.90	31.58	58.48	74.00	-15.52	peak	
6		2504.907	14.31	31.58	45.89	54.00	-8.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	54.52	-9.84	44.68	74.00	-29.32	peak	
2	*	4804.000	48.18	-9.84	38.34	54.00	-15.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2402MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	58.65	-9.84	48.81	74.00	-25.19	peak	
2	*	4804.000	54.87	-9.84	45.03	54.00	-8.97	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2441MHz	Polarization	Vertical
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	53.78	-9.77	44.01	74.00	-29.99	peak	
2	*	4882.000	47.66	-9.77	37.89	54.00	-16.11	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2441MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	57.88	-9.77	48.11	74.00	-25.89	peak	
2	*	4882.000	54.26	-9.77	44.49	54.00	-9.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	53.39	-9.68	43.71	74.00	-30.29	peak	
2	*	4960.000	47.75	-9.68	38.07	54.00	-15.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1 Mbps)	Test Date	2021/7/2
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	56.28	-9.68	46.60	74.00	-27.40	peak	
2	*	4960.000	52.54	-9.68	42.86	54.00	-11.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	54.22	-9.84	44.38	74.00	-29.62	peak	
2	*	4804.000	46.51	-9.84	36.67	54.00	-17.33	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2402MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	55.02	-9.84	45.18	74.00	-28.82	peak	
2	*	4804.000	46.32	-9.84	36.48	54.00	-17.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2441MHz	Polarization	Vertical
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	52.59	-9.77	42.82	74.00	-31.18	peak	
2	*	4882.000	46.15	-9.77	36.38	54.00	-17.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2441MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	52.85	-9.77	43.08	74.00	-30.92	peak	
2	*	4882.000	46.13	-9.77	36.36	54.00	-17.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	57%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	54.60	-9.68	44.92	74.00	-29.08	peak	
2	*	4960.000	45.59	-9.68	35.91	54.00	-18.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3 Mbps)	Test Date	2021/7/2
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	57%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	53.09	-9.68	43.41	74.00	-30.59	peak	
2	*	4960.000	45.48	-9.68	35.80	54.00	-18.20	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D NUMBER OF HOPPING CHANNEL

Test Mode	1/3Mbps
-----------	---------


Test Mode	Number of Hopping Channel	≥ Limit	Test Result
1 Mbps	79	15	Pass
3 Mbps	79	15	Pass

1 Mbps



Date: 8.JUL.2021 16:33:52

3 Mbps












Date: 8.JUL.2021 17:42:35

APPENDIX E AVERAGE TIME OF OCCUPANCY


Test Mode : 1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.8800	0.3072	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.3850	0.1232	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.3850	0.1232	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.3850	0.1232	0.4000	Pass




Test Mode : 3Mbps


Data Packet	Frequency (MHz)	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
3DH5	2402	2.8800	0.3072	0.4000	Pass
3DH3	2402	1.6400	0.2624	0.4000	Pass
3DH1	2402	0.3900	0.1248	0.4000	Pass
3DH5	2441	2.8800	0.3072	0.4000	Pass
3DH3	2441	1.6400	0.2624	0.4000	Pass
3DH1	2441	0.3950	0.1264	0.4000	Pass
3DH5	2480	2.8800	0.3072	0.4000	Pass
3DH3	2480	1.6400	0.2624	0.4000	Pass
3DH1	2480	0.3900	0.1248	0.4000	Pass




Date: 8_JUL_2021 17:35:02




Date: 8_JUL_2021 17:35:19




Date: 8_JUL_2021 17:47:51




Date: 8_JUL_2021 17:59:42




Date: 8_JUL_2021 18:01:47




Date: 8_JUL_2021 18:04:15



Date: 8_JUL_2021 18:06:42



Date: 8_JUL_2021 18:07:16




Date: 8_JUL_2021 18:08:04

APPENDIX F HOPPING CHANNEL SEPARATION MEASUREMENT


Test Mode : Hopping on _1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.002	0.692	Pass
2441	1.005	0.643	Pass
2480	0.990	0.684	Pass



Test Mode : Hopping on _3Mbps


Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.000	0.873	Pass
2441	1.006	0.888	Pass
2480	1.002	0.895	Pass



APPENDIX G BANDWIDTH


Test Mode :	1Mbps
-------------	-------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.039	0.920	Pass
2441	0.965	0.884	Pass
2480	1.026	0.888	Pass



Test Mode :	3Mbps
-------------	-------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.310	1.212	Pass
2441	1.332	1.224	Pass
2480	1.342	1.220	Pass



APPENDIX H OUTPUT POWER

Test Mode :	1Mbps	Tested Date	2021/7/8
-------------	-------	-------------	----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	5.64	0.0037	21.00	0.1250	Pass
2441	5.56	0.0036	21.00	0.1250	Pass
2480	5.29	0.0034	21.00	0.1250	Pass

Test Mode :	2Mbps	Tested Date	2021/7/8
-------------	-------	-------------	----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	2.41	0.0017	21.00	0.1250	Pass
2441	2.08	0.0016	21.00	0.1250	Pass
2480	2.12	0.0016	21.00	0.1250	Pass

Test Mode :	3Mbps	Tested Date	2021/7/8
-------------	-------	-------------	----------


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	5.64	0.0037	21.00	0.1250	Pass
2441	5.56	0.0036	21.00	0.1250	Pass
2480	5.29	0.0034	21.00	0.1250	Pass

APPENDIX I ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode


1Mbps

2402 MHz_ Lower




Date: 8.JUL.2021 16:16:39

2480 MHz_ Upper




Date: 8.JUL.2021 16:19:46

2402 MHz_ Hopping on mode (Lower)




Date: 8.JUL.2021 16:34:56

2480 MHz_ Hopping on mode (Upper)




Date: 8.JUL.2021 16:36:01


2402 MHz – 10th Harmonics



Date: 8/JUL/2021 16:17:21




Date: 8/JUL/2021 16:17:28




Date: 8/JUL/2021 16:17:35


2441 MHz – 10th Harmonics



Date: 8/JUL/2021 16:10:57




Date: 8/JUL/2021 16:11:04




Date: 8/JUL/2021 16:11:11


2480 MHz – 10th Harmonics



Date: 8/JUL/2021 16:20:29



Date: 8/JUL/2021 16:20:36




Date: 8/JUL/2021 16:20:43

Test Mode


3Mbps

2402 MHz_ Lower




Date: 8.JUL.2021 17:10:59

2480 MHz_ Upper




Date: 8.JUL.2021 17:27:52

2402 MHz_ Hopping on mode (Lower)




Date: 8.JUL.2021 17:43:39

2480 MHz_ Hopping on mode (Upper)




Date: 8.JUL.2021 17:44:43


2402 MHz – 10 Harmonics



Date: 8/JUL/2021 17:11:46




Date: 8/JUL/2021 17:11:53




Date: 8/JUL/2021 17:12:00


2441 MHz – 10 Harmonics



Date: 8/JUL/2021 17:22:19




Date: 8/JUL/2021 17:22:26




Date: 8/JUL/2021 17:22:33


2480 MHz – 10 Harmonics



Date: 8/JUL/2021 17:28:27



Date: 8/JUL/2021 17:28:34



Date: 8/JUL/2021 17:28:41

End of Test Report