


|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Horizontal    |
| Standard:    | FCC_PART15_C_03m_QP               | Date:               | 2018/8/7      |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | Q-H                               | Test By:            |               |
| Description: |                                   |                     |               |




| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 33.4448            | 34.84             | -12.96                  | 21.88              | 40.00             | -18.12         |                |                  | QP     |
| 2   | 58.6126            | 44.71             | -23.94                  | 20.77              | 40.00             | -19.23         |                |                  | QP     |
| 3   | 119.8555           | 42.85             | -17.70                  | 25.15              | 43.50             | -18.35         |                |                  | QP     |
| 4   | 360.4476           | 44.24             | -13.12                  | 31.12              | 46.00             | -14.88         |                |                  | QP     |
| 5   | 541.3721           | 37.81             | -6.97                   | 30.84              | 46.00             | -15.16         |                |                  | QP     |
| 6   | 962.1621           | 29.76             | -0.12                   | 29.64              | 54.00             | -24.36         |                |                  | QP     |

|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Vertical      |
| Standard:    | FCC_PART15_C_03m_QP               | Date:2018/8/7       | Time:22:43:27 |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | Q-H                               | Test By:            |               |
| Description: |                                   |                     |               |

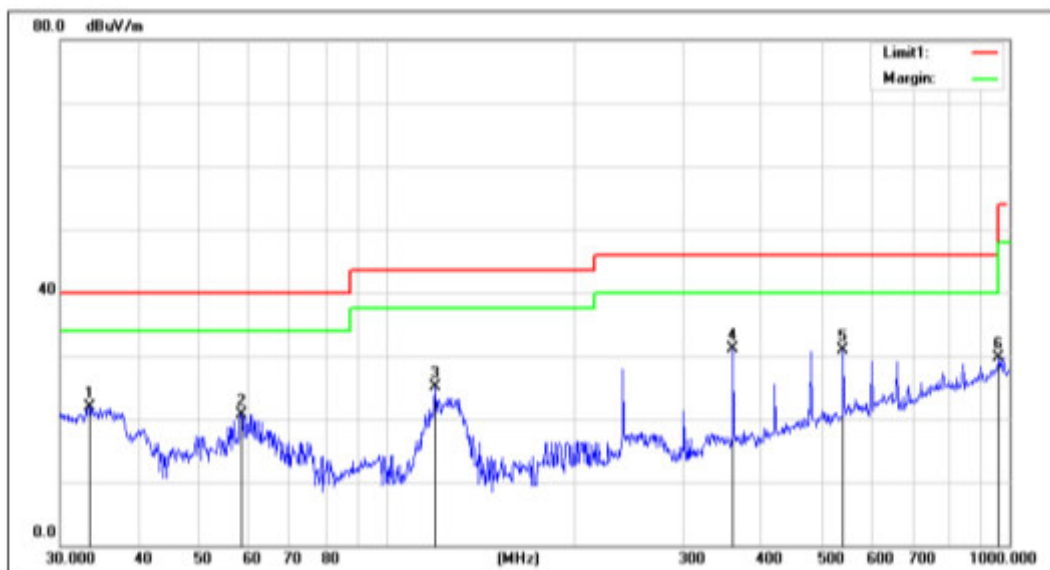

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 38.2120            | 39.98             | -15.40                  | 24.58              | 40.00             | -15.42         |                |                  | QP     |
| 2   | 80.9274            | 42.97             | -22.47                  | 20.50              | 40.00             | -19.50         |                |                  | QP     |
| 3   | 126.7723           | 40.45             | -17.59                  | 22.86              | 43.50             | -20.64         |                |                  | QP     |
| 4   | 180.0165           | 41.11             | -19.44                  | 21.67              | 43.50             | -21.83         |                |                  | QP     |
| 5   | 420.5803           | 39.14             | -10.90                  | 28.24              | 46.00             | -17.76         |                |                  | QP     |
| 6   | 972.3374           | 29.38             | -0.14                   | 29.24              | 54.00             | -24.76         |                |                  | QP     |

|              |                                       |                     |               |
|--------------|---------------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                            | Ant.Polar.:         | Vertical      |
| Standard:    | FCC_PART15_C_03m_QP                   | Date:2018/8/7       | Time:22:45:11 |
| Test item:   | Radiated Emission                     | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRAN<br>SMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                             | Power:              | AC 120V/60Hz  |
| Mode:        | Q-M                                   | Test By:            |               |
| Description: |                                       |                     |               |

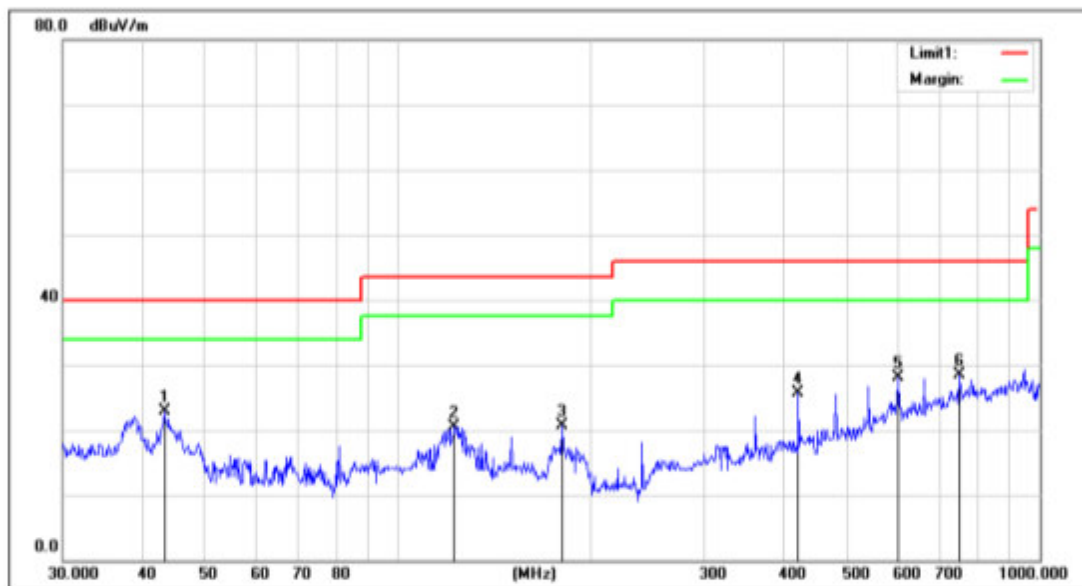


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 43.2017            | 40.84             | -17.97                  | 22.87              | 40.00             | -17.13         |                |                  | QP     |
| 2   | 122.4040           | 38.21             | -17.66                  | 20.55              | 43.50             | -22.95         |                |                  | QP     |
| 3   | 180.0165           | 40.11             | -19.44                  | 20.67              | 43.50             | -22.83         |                |                  | QP     |
| 4   | 420.5803           | 36.64             | -10.90                  | 25.74              | 46.00             | -20.26         |                |                  | QP     |
| 5   | 601.4265           | 35.17             | -7.12                   | 28.05              | 46.00             | -17.95         |                |                  | QP     |
| 6   | 750.1082           | 32.06             | -3.56                   | 28.50              | 46.00             | -17.50         |                |                  | QP     |

|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Horizontal    |
| Standard:    | FCC_PART15_C_03m_QP               | Date:2018/8/7       | Time:22:47:31 |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | Q-M                               | Test By:            |               |
| Description: |                                   |                     |               |



| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 68.8721            | 41.86             | -24.13                  | 17.73              | 40.00             | -22.27         |                |                  | QP     |
| 2   | 119.8555           | 43.35             | -17.70                  | 25.65              | 43.50             | -17.85         |                |                  | QP     |
| 3   | 239.9873           | 43.70             | -17.76                  | 25.94              | 46.00             | -20.06         |                |                  | QP     |
| 4   | 360.4476           | 43.74             | -13.12                  | 30.62              | 46.00             | -15.38         |                |                  | QP     |
| 5   | 480.5276           | 40.12             | -9.38                   | 30.74              | 46.00             | -15.26         |                |                  | QP     |
| 6   | 962.1621           | 29.76             | -0.12                   | 29.64              | 54.00             | -24.36         |                |                  | QP     |

|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Horizontal    |
| Standard:    | FCC_PART15_C_03m_QP               | Date:               | 2018/8/7      |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | Q-L                               | Test By:            |               |
| Description: |                                   |                     |               |

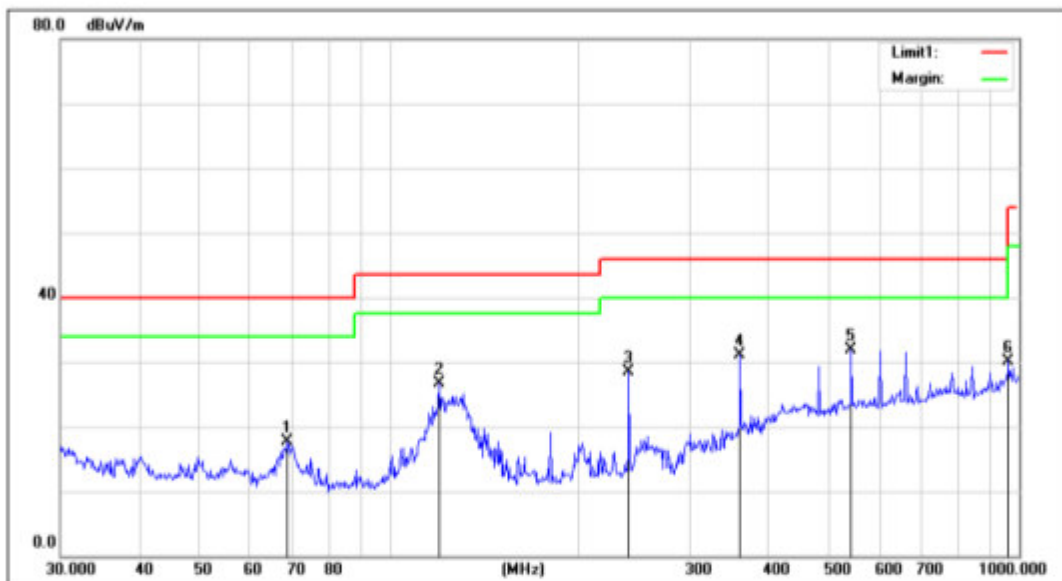


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 68.8721            | 41.86             | -24.13                  | 17.73              | 40.00             | -22.27         |                |                  | QP     |
| 2   | 119.8555           | 44.35             | -17.70                  | 26.65              | 43.50             | -16.85         |                |                  | QP     |
| 3   | 239.9873           | 46.20             | -17.76                  | 28.44              | 46.00             | -17.56         |                |                  | QP     |
| 4   | 360.4476           | 44.24             | -13.12                  | 31.12              | 46.00             | -14.88         |                |                  | QP     |
| 5   | 541.3721           | 38.81             | -6.97                   | 31.84              | 46.00             | -14.16         |                |                  | QP     |
| 6   | 962.1621           | 30.26             | -0.12                   | 30.14              | 54.00             | -23.86         |                |                  | QP     |

|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Vertical      |
| Standard:    | FCC_PART15_C_03m_QP               | Date:2018/8/7       | Time:22:43:27 |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | Q-L                               | Test By:            |               |
| Description: |                                   |                     |               |




| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 44.2751            | 39.77             | -18.53                  | 21.24              | 40.00             | -18.76         |                |                  | QP     |
| 2   | 80.9274            | 39.97             | -22.47                  | 17.50              | 40.00             | -22.50         |                |                  | QP     |
| 3   | 126.7723           | 39.45             | -17.59                  | 21.86              | 43.50             | -21.64         |                |                  | QP     |
| 4   | 360.4476           | 39.70             | -13.12                  | 26.58              | 46.00             | -19.42         |                |                  | QP     |
| 5   | 750.1082           | 32.06             | -3.56                   | 28.50              | 46.00             | -17.50         |                |                  | QP     |
| 6   | 972.3374           | 29.38             | -0.14                   | 29.24              | 54.00             | -24.76         |                |                  | QP     |

|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Vertical      |
| Standard:    | FCC_PART15_C_03m_QP               | Date:               | 2018/8/7      |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | BLE-H                             | Test By:            |               |
| Description: |                                   |                     |               |

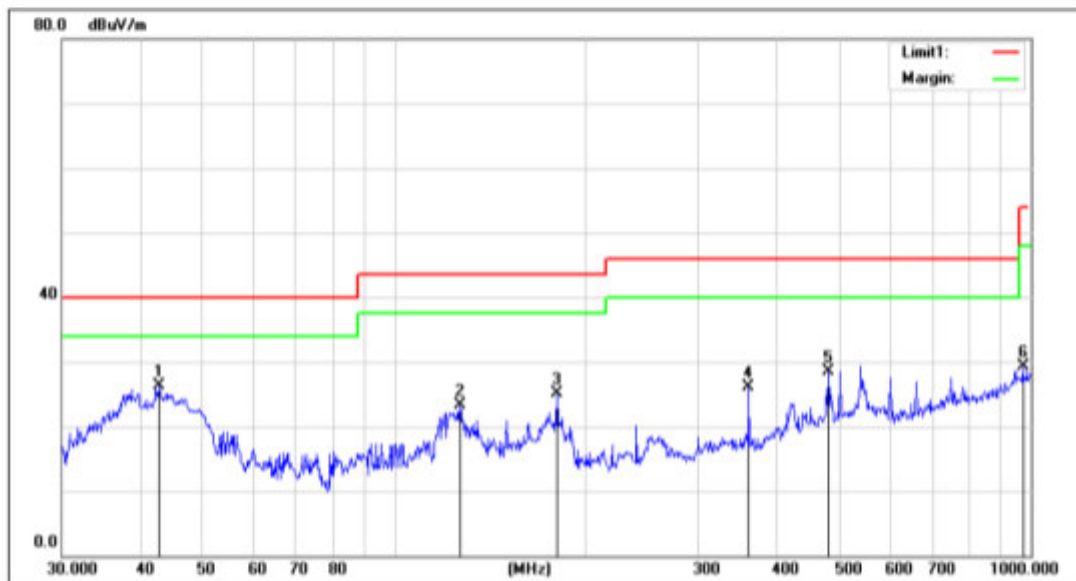


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 42.7496            | 44.01             | -17.75                  | 26.26              | 40.00             | -13.74         |                |                  | QP     |
| 2   | 126.7723           | 40.95             | -17.59                  | 23.36              | 43.50             | -20.14         |                |                  | QP     |
| 3   | 180.0165           | 44.61             | -19.44                  | 25.17              | 43.50             | -18.33         |                |                  | QP     |
| 4   | 360.4476           | 39.20             | -13.12                  | 26.08              | 46.00             | -19.92         |                |                  | QP     |
| 5   | 480.5276           | 37.90             | -9.38                   | 28.52              | 46.00             | -17.48         |                |                  | QP     |
| 6   | 972.3374           | 29.38             | -0.14                   | 29.24              | 54.00             | -24.76         |                |                  | QP     |

|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Horizontal    |
| Standard:    | FCC_PART15_C_03m_QP               | Date:2018/8/7       | Time:22:51:26 |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | BLE-H                             | Test By:            |               |
| Description: |                                   |                     |               |

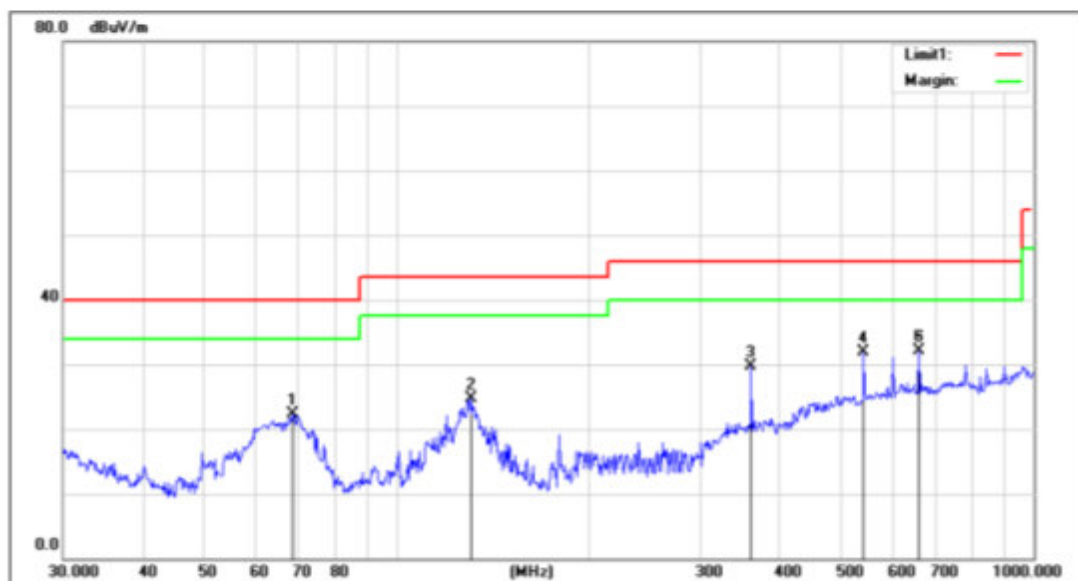


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 68.8721            | 46.36             | -24.13                  | 22.23              | 40.00             | -17.77         |                |                  | QP     |
| 2   | 130.8370           | 42.22             | -17.55                  | 24.67              | 43.50             | -18.83         |                |                  | QP     |
| 3   | 360.4476           | 42.74             | -13.12                  | 29.62              | 46.00             | -16.38         |                |                  | QP     |
| 4   | 541.3721           | 38.81             | -6.97                   | 31.84              | 46.00             | -14.16         |                |                  | QP     |
| 5   | 661.1503           | 38.30             | -6.23                   | 32.07              | 46.00             | -13.93         |                |                  | QP     |
| 6   | 661.1503           | 38.30             | -6.23                   | 32.07              | 46.00             | -13.93         |                |                  | QP     |

|              |                                   |                     |                 |
|--------------|-----------------------------------|---------------------|-----------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Vertical        |
| Standard:    | FCC_PART15_C_03m_QP               | Date:2018/8/7       | Time:22:48:07   |
| Test item:   | Radiated Emission                 | Distance:           | 3m              |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%(RH) |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz    |
| Mode:        | BLE-M                             | Test By:            |                 |
| Description: |                                   |                     |                 |

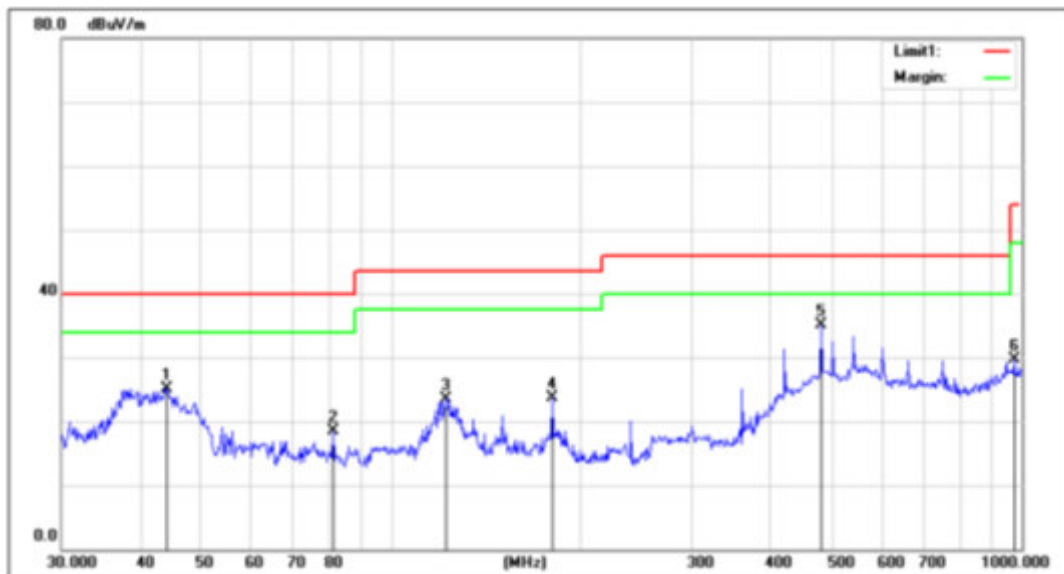


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 44.1200            | 43.59             | -18.45                  | 25.14              | 40.00             | -14.86         |                |                  | QP     |
| 2   | 80.9274            | 40.97             | -22.47                  | 18.50              | 40.00             | -21.50         |                |                  | QP     |
| 3   | 122.4040           | 41.21             | -17.66                  | 23.55              | 43.50             | -19.95         |                |                  | QP     |
| 4   | 180.0165           | 43.11             | -19.44                  | 23.67              | 43.50             | -19.83         |                |                  | QP     |
| 5   | 480.5276           | 44.40             | -9.38                   | 35.02              | 46.00             | -10.98         |                |                  | QP     |
| 6   | 972.3374           | 29.88             | -0.14                   | 29.74              | 54.00             | -24.26         |                |                  | QP     |

|              |                                   |                     |               |
|--------------|-----------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                        | Ant.Polar.:         | Horizontal    |
| Standard:    | FCC_PART15_C_03m_QP               | Date:2018/8/7       | Time:22:49:21 |
| Test item:   | Radiated Emission                 | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRANSMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                         | Power:              | AC 120V/60Hz  |
| Mode:        | BLE-M                             | Test By:            |               |
| Description: |                                   |                     |               |

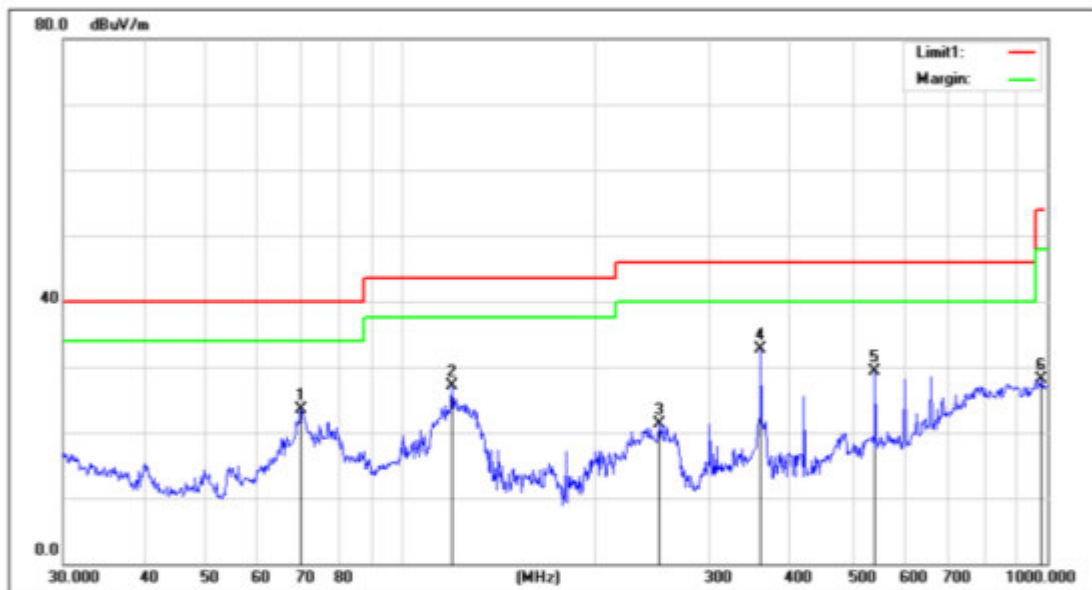


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 70.0901            | 47.64             | -24.09                  | 23.55              | 40.00             | -16.45         |                |                  | QP     |
| 2   | 119.8555           | 44.85             | -17.70                  | 27.15              | 43.50             | -16.35         |                |                  | QP     |
| 3   | 251.1802           | 37.57             | -16.18                  | 21.39              | 46.00             | -24.61         |                |                  | QP     |
| 4   | 360.4476           | 45.74             | -13.12                  | 32.62              | 46.00             | -13.38         |                |                  | QP     |
| 5   | 541.3721           | 36.31             | -6.97                   | 29.34              | 46.00             | -16.66         |                |                  | QP     |
| 6   | 979.1802           | 28.27             | -0.16                   | 28.11              | 54.00             | -25.89         |                |                  | QP     |

|              |                                       |                     |               |
|--------------|---------------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                            | Ant.Polar.:         | Vertical      |
| Standard:    | FCC_PART15_C_03m_QP                   | Date:2018/8/7       | Time:22:45:51 |
| Test item:   | Radiated Emission                     | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRAN<br>SMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                             | Power:              | AC 120V/60Hz  |
| Mode:        | BLE-L                                 | Test By:            |               |
| Description: |                                       |                     |               |

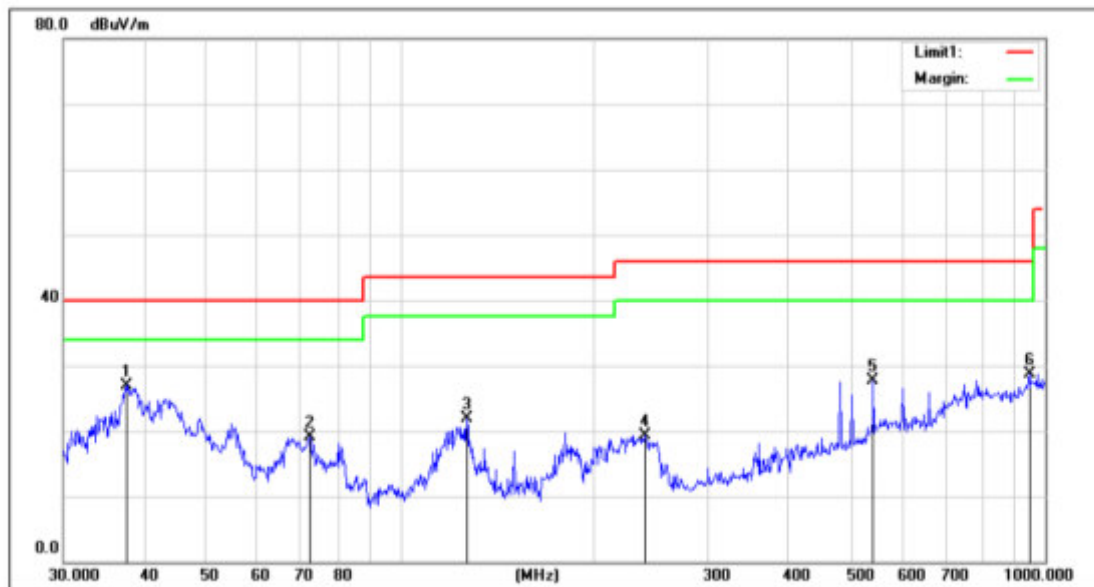

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 37.6798            | 42.12             | -15.13                  | 26.99              | 40.00             | -13.01         |                |                  | QP     |
| 2   | 72.3375            | 42.79             | -23.78                  | 19.01              | 40.00             | -20.99         |                |                  | QP     |
| 3   | 126.7723           | 39.45             | -17.59                  | 21.86              | 43.50             | -21.64         |                |                  | QP     |
| 4   | 239.1473           | 37.16             | -17.82                  | 19.34              | 46.00             | -26.66         |                |                  | QP     |
| 5   | 541.3721           | 34.68             | -6.97                   | 27.71              | 46.00             | -18.29         |                |                  | QP     |
| 6   | 945.4397           | 29.32             | -0.54                   | 28.78              | 46.00             | -17.22         |                |                  | QP     |

|              |                                       |                     |               |
|--------------|---------------------------------------|---------------------|---------------|
| Job No.:     | STS1807059                            | Ant.Polar.:         | Horizontal    |
| Standard:    | FCC_PART15_C_03m_QP                   | Date:2018/8/7       | Time:22:46:34 |
| Test item:   | Radiated Emission                     | Distance:           | 3m            |
| Company:     | WIRELESS RECEIVER AND TRAN<br>SMITTER | Temp.(C)/Hum.(%RH): | 27.4(C)/62%RH |
| Model:       | FORZA 15A                             | Power:              | AC 120V/60Hz  |
| Mode:        | BLE-L                                 | Test By:            |               |
| Description: |                                       |                     |               |

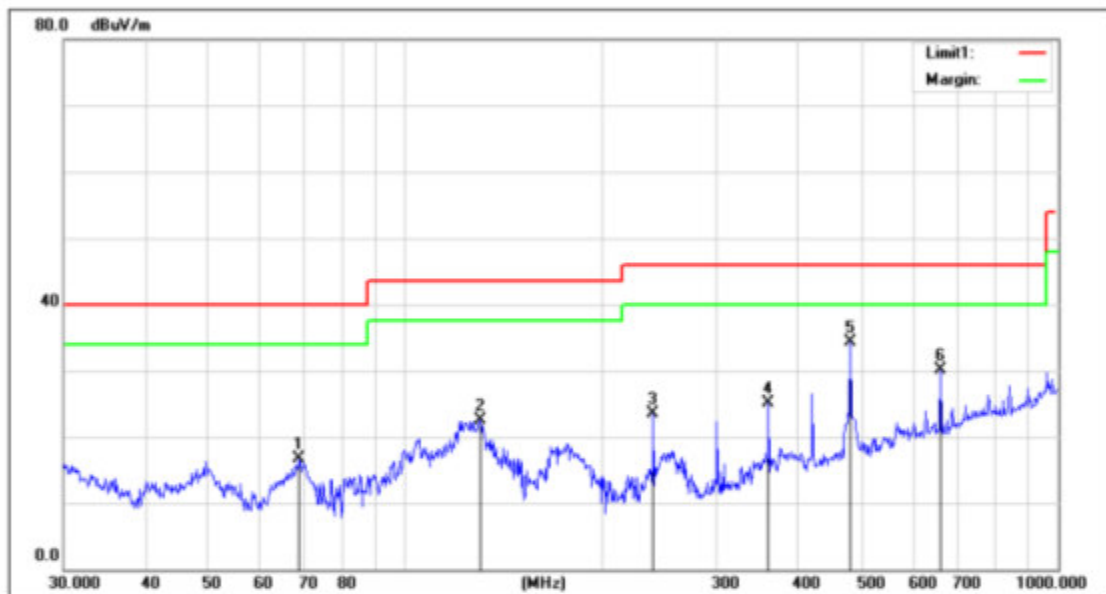

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 68.8721            | 40.86             | -24.13                  | 16.73              | 40.00             | -23.27         |                |                  | QP     |
| 2   | 130.3788           | 40.09             | -17.55                  | 22.54              | 43.50             | -20.96         |                |                  | QP     |
| 3   | 239.9873           | 41.20             | -17.76                  | 23.44              | 46.00             | -22.56         |                |                  | QP     |
| 4   | 360.4476           | 38.24             | -13.12                  | 25.12              | 46.00             | -20.88         |                |                  | QP     |
| 5   | 480.5276           | 43.62             | -9.38                   | 34.24              | 46.00             | -11.76         |                |                  | QP     |
| 6   | 661.1503           | 36.30             | -6.23                   | 30.07              | 46.00             | -15.93         |                |                  | QP     |

1GHz - 18GHz

Test Time: 2018-08-09\_13.55.29

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

G-H

RSE\_FCC Test Case\_FCC 15C 1GHz-18GHz

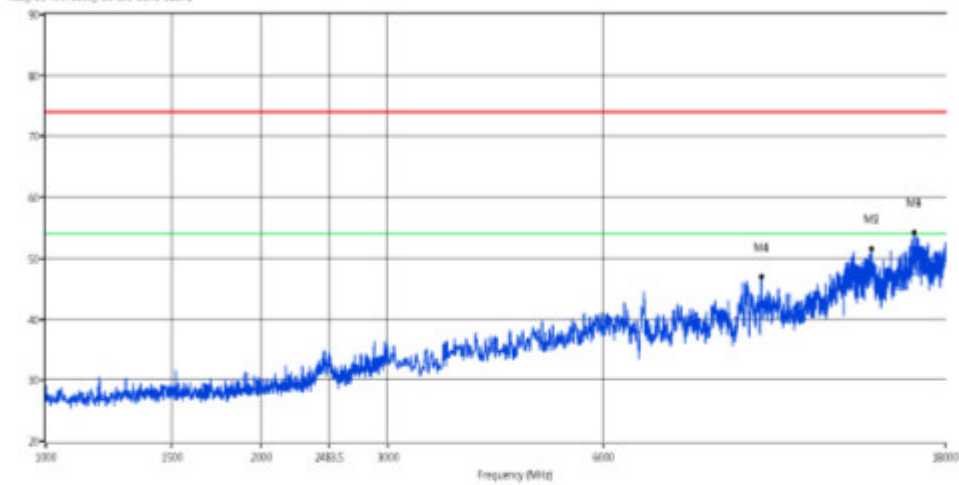

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9963.037        | 46.94            | 0.59        | 74             | -27.06          | Peak     | 4.00      | 100         | H   | Pass    |
| 1** | 9963.037        | 36.17            | 0.59        | 54             | -17.83          | AV       | 4.00      | 100         | H   | Pass    |
| 2   | 14198.801       | 51.51            | 2.86        | 74             | -22.49          | Peak     | 3.00      | 100         | H   | Pass    |
| 2** | 14198.801       | 41.09            | 2.86        | 54             | -12.91          | AV       | 3.00      | 100         | H   | Pass    |
| 3   | 16291.708       | 54.19            | 6.40        | 74             | -19.81          | Peak     | 10.00     | 100         | H   | Pass    |
| 3** | 16291.708       | 43.79            | 6.40        | 54             | -10.21          | AV       | 10.00     | 100         | H   | Pass    |

Test Time: 2018-08-09\_13.48.04

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

G-H

858\_FCC Test Case\_FCC 51C 5000-5800

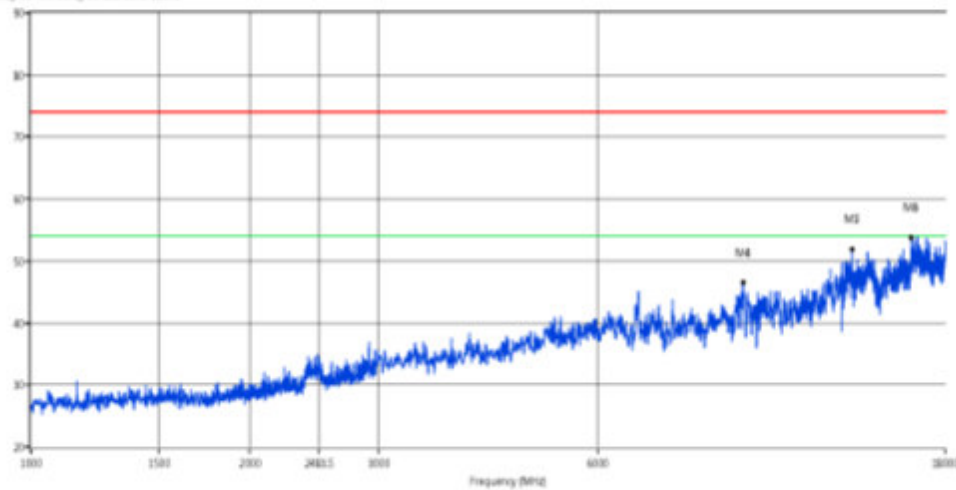

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9503.497        | 46.46            | 2.61        | 74             | -27.54          | Peak     | 3.00      | 100         | V   | Pass    |
| 1** | 9503.497        | 36.03            | 2.61        | 54             | -17.97          | AV       | 3.00      | 100         | V   | Pass    |
| 2   | 16156.843       | 53.81            | 5.95        | 74             | -20.19          | Peak     | 10.00     | 100         | V   | Pass    |
| 2** | 16156.843       | 43.17            | 5.95        | 54             | -10.83          | AV       | 10.00     | 100         | V   | Pass    |
| 3   | 13399.6         | 51.82            | 2.77        | 74             | -22.18          | Peak     | 10.00     | 100         | V   | Pass    |
| 3** | 13399.6         | 41.31            | 2.77        | 54             | -12.69          | AV       | 10.00     | 100         | V   | Pass    |

Test Time: 2018-08-09\_14.30.48

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

G-M

RSE\_FCC Test Case\_FCC 15C 10Hz-18GHz

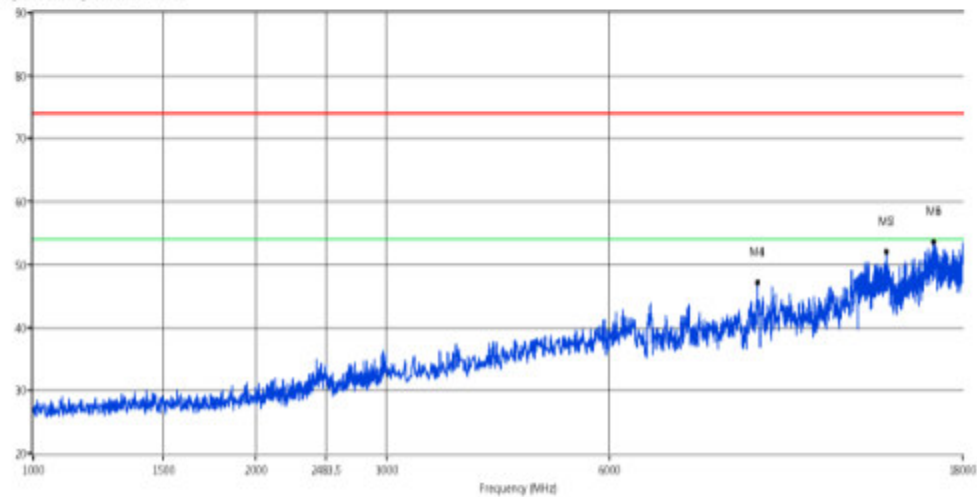

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9503.497        | 47.19            | 2.61        | 74             | -26.81          | Peak     | 15.00     | 100         | H   | Pass    |
| 1** | 9503.497        | 36.78            | 2.61        | 54             | -17.22          | AV       | 15.00     | 100         | H   | Pass    |
| 2   | 14196.801       | 52.04            | 2.86        | 74             | -21.96          | Peak     | 5.00      | 100         | H   | Pass    |
| 2** | 14196.801       | 41.67            | 2.86        | 54             | -12.33          | AV       | 5.00      | 100         | H   | Pass    |
| 3   | 16426.573       | 53.64            | 5.22        | 74             | -20.36          | Peak     | 2.00      | 100         | H   | Pass    |
| 3** | 16426.573       | 43.11            | 5.22        | 54             | -10.89          | AV       | 2.00      | 100         | H   | Pass    |

Test Time: 2018-08-09\_14:27:39

EUT Name: 蓝牙耳机  
Manufacturer: WIRELESS RECEIVER AND TRANSMITTER


Test Engineer: Zhou GL  
Test Standard: FCC PART15 C

Model: FORZA 15A  
Temp.(oC): 25  
Hum.: 65%

Work Addition: Normal  
Load:  
Remark: N.A

G-M

RF, FCC Test Case, FCC ISC 1500-5800

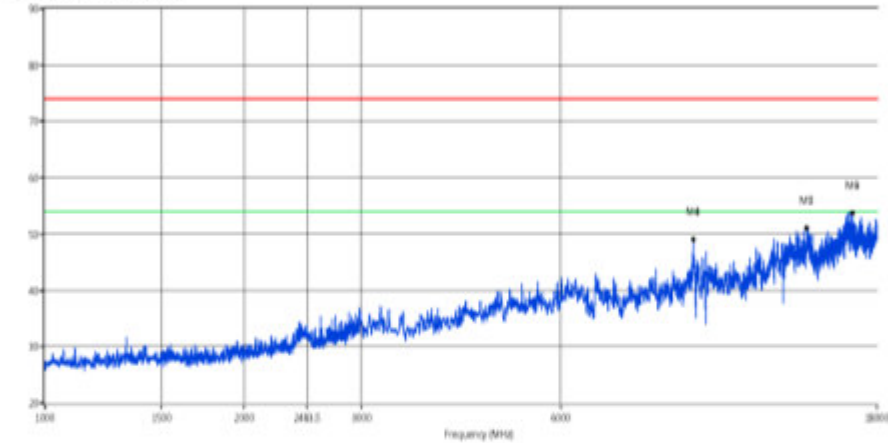

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9503.497        | 49.04            | 2.61        | 74             | -24.96          | Peak     | 3.00      | 100         | V   | Pass    |
| 1** | 9503.497        | 38.65            | 2.61        | 54             | -15.35          | AV       | 3.00      | 100         | V   | Pass    |
| 2   | 14098.901       | 51.02            | 3.95        | 74             | -22.98          | Peak     | 15.00     | 100         | V   | Pass    |
| 2** | 14098.901       | 40.61            | 3.95        | 54             | -13.39          | AV       | 15.00     | 100         | V   | Pass    |
| 3   | 16516.484       | 53.82            | 5.66        | 74             | -20.18          | Peak     | 8.00      | 100         | V   | Pass    |
| 3** | 16516.484       | 43.37            | 5.66        | 54             | -10.63          | AV       | 8.00      | 100         | V   | Pass    |

Test Time: 2018-08-09\_13.45.41

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp. (oC): 25


Load:

Hum.: 65%

Remark: N.A

G-L

RSE\_FCC Test Case\_FCC\_15C\_18MHz

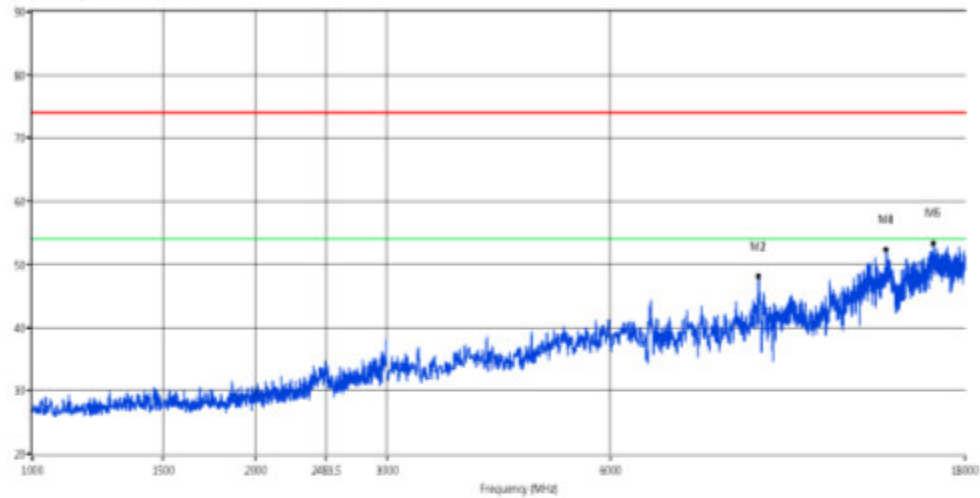

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9493.506        | 48.03            | 1.16        | 74             | -25.97          | Peak     | 15.00     | 100         | H   | Pass    |
| 1** | 9493.506        | 37.76            | 1.16        | 54             | -16.24          | AV       | 15.00     | 100         | H   | Pass    |
| 2   | 14088.911       | 52.27            | 3.27        | 74             | -21.73          | Peak     | 9.00      | 100         | H   | Pass    |
| 2** | 14088.911       | 41.97            | 3.27        | 54             | -12.03          | AV       | 9.00      | 100         | H   | Pass    |
| 3   | 16306.693       | 53.33            | 6.10        | 74             | -20.67          | Peak     | 5.00      | 100         | H   | Pass    |
| 3** | 16306.693       | 42.88            | 6.10        | 54             | -11.12          | AV       | 5.00      | 100         | H   | Pass    |

Test Time: 2018-08-09\_13.39.15

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

G-L

RSE\_FCC Test Case\_FCC\_15C\_1GHz-18GHz

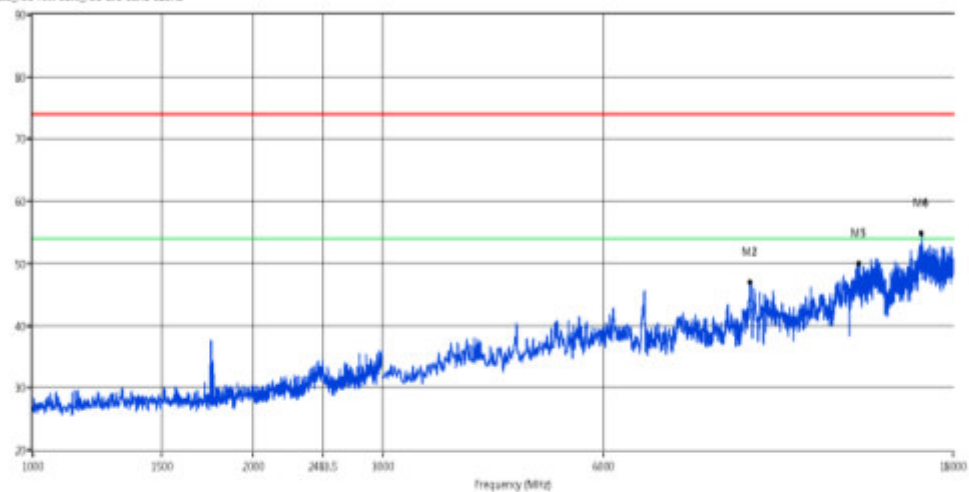

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9513.487        | 47.07            | 1.63        | 74             | -26.93          | Peak     | 10.00     | 100         | V   | Pass    |
| 1** | 9513.487        | 36.51            | 1.63        | 54             | -17.49          | AV       | 10.00     | 100         | V   | Pass    |
| 2   | 13389.61        | 49.96            | 2.37        | 74             | -24.04          | Peak     | 2.00      | 100         | V   | Pass    |
| 2** | 13389.61        | 39.62            | 2.37        | 54             | -14.38          | AV       | 2.00      | 100         | V   | Pass    |
| 3   | 16296.703       | 54.85            | 6.58        | 74             | -19.15          | Peak     | 14.00     | 100         | V   | Pass    |
| 3** | 16296.703       | 44.46            | 6.58        | 54             | -9.54           | AV       | 14.00     | 100         | V   | Pass    |

Test Time: 2018-08-09\_14.19.37

EUT Name: 蓝牙耳机

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(°C): 25


Load:

Hum.: 65%

Remark: N.A

Q-H

RSE\_FCC Test Case\_FCC 15C 1GHz-3GHz

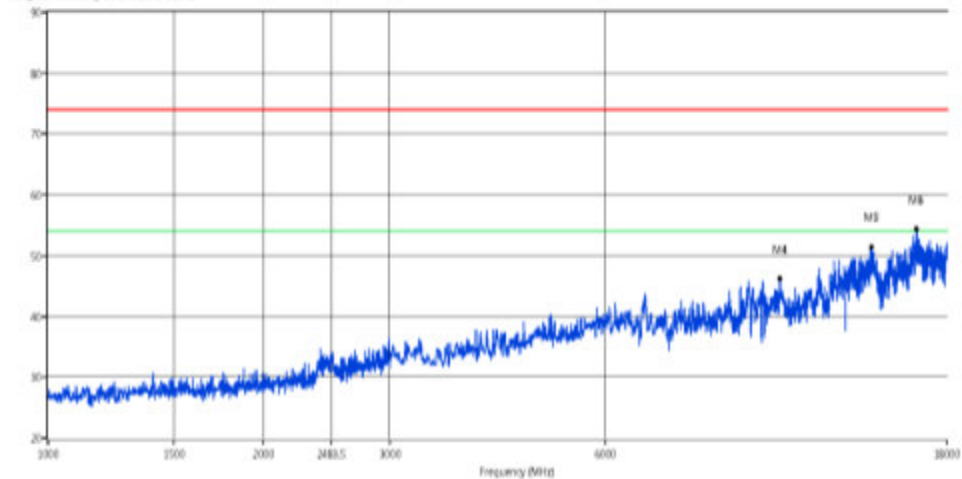

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 10522.478       | 46.15            | -0.16       | 74             | -27.85          | Peak     | 2.00      | 100         | H   | Pass    |
| 1** | 10522.478       | 35.55            | -0.16       | 54             | -18.45          | AV       | 2.00      | 100         | H   | Pass    |
| 2   | 14113.886       | 51.38            | 3.96        | 74             | -22.62          | Peak     | 12.00     | 100         | H   | Pass    |
| 2** | 14113.886       | 40.37            | 3.96        | 54             | -13.63          | AV       | 12.00     | 100         | H   | Pass    |
| 3   | 16331.668       | 54.31            | 5.71        | 74             | -19.69          | Peak     | 12.00     | 100         | H   | Pass    |
| 3** | 16331.668       | 43.60            | 5.71        | 54             | -10.17          | AV       | 12.00     | 100         | H   | Pass    |

Test Time: 2018-08-09\_14.23.42

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

Q-H

R02\_FCC Test Case\_FCC ISC 10Hz-180Hz

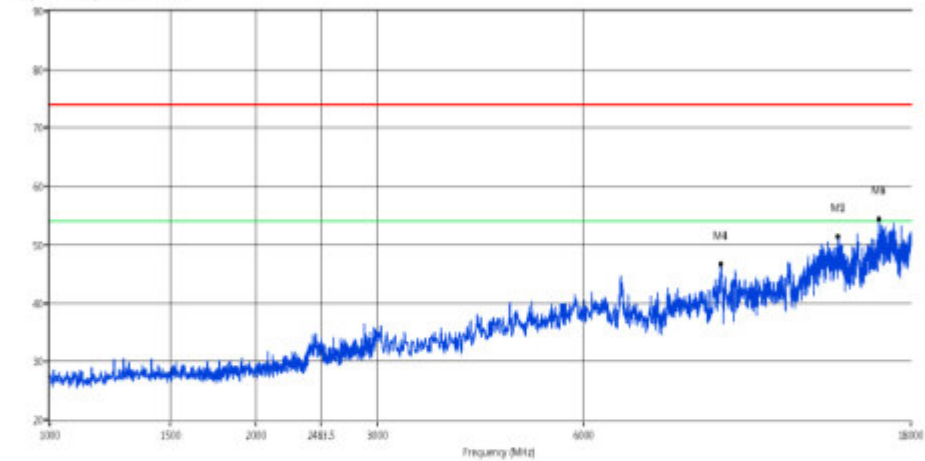

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9503.497        | 46.75            | 2.61        | 74             | -27.25          | Peak     | 8.00      | 100         | V   | Pass    |
| 1** | 9503.497        | 36.17            | 2.61        | 54             | -17.83          | AV       | 8.00      | 100         | V   | Pass    |
| 2   | 16166.833       | 54.4             | 5.97        | 74             | -19.60          | Peak     | 3.00      | 100         | V   | Pass    |
| 2** | 16166.833       | 43.67            | 5.97        | 54             | -10.33          | AV       | 3.00      | 100         | V   | Pass    |
| 3   | 14093.906       | 51.39            | 3.61        | 74             | -22.61          | Peak     | 10.00     | 100         | V   | Pass    |
| 3** | 14093.906       | 40.59            | 3.61        | 54             | -13.41          | AV       | 10.00     | 100         | V   | Pass    |

Test Time: 2018-08-09\_14.02.59

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

Q-M

RSL\_FCC Test Case\_FCC 15C 32Hz-182Hz

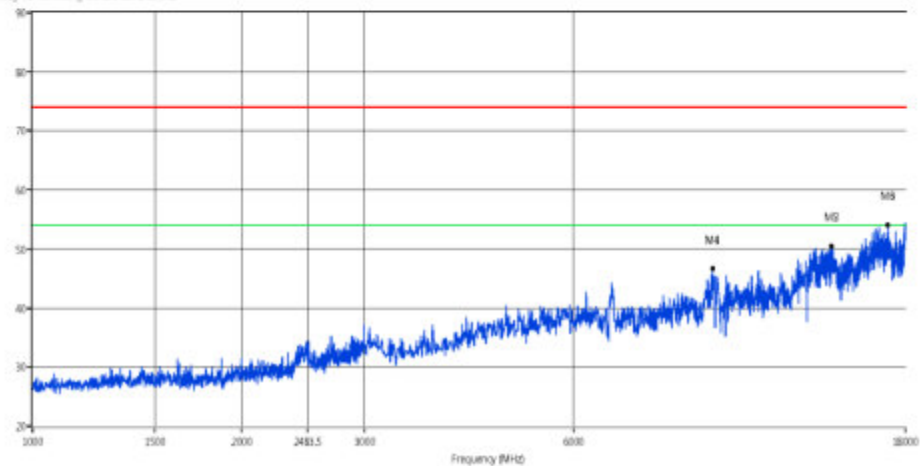

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9503.497        | 46.73            | 2.61        | 74             | -27.27          | Peak     | 5.00      | 100         | H   | Pass    |
| 1** | 9503.497        | 36.02            | 2.61        | 54             | -17.98          | AV       | 5.00      | 100         | H   | Pass    |
| 2   | 14063.916       | 50.52            | 2.93        | 74             | -23.48          | Peak     | 11.00     | 100         | H   | Pass    |
| 2** | 14063.916       | 39.96            | 2.93        | 54             | -14.04          | AV       | 11.00     | 100         | H   | Pass    |
| 3   | 16991.009       | 54.02            | 5.28        | 74             | -19.98          | Peak     | 5.00      | 100         | H   | Pass    |
| 3** | 16991.009       | 43.37            | 5.28        | 54             | -10.63          | AV       | 5.00      | 100         | H   | Pass    |

Test Time: 2018-08-09\_14.01.20

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

Q-M

RSE\_FCC Test Case\_FCC 15C 30Hz-18GHz

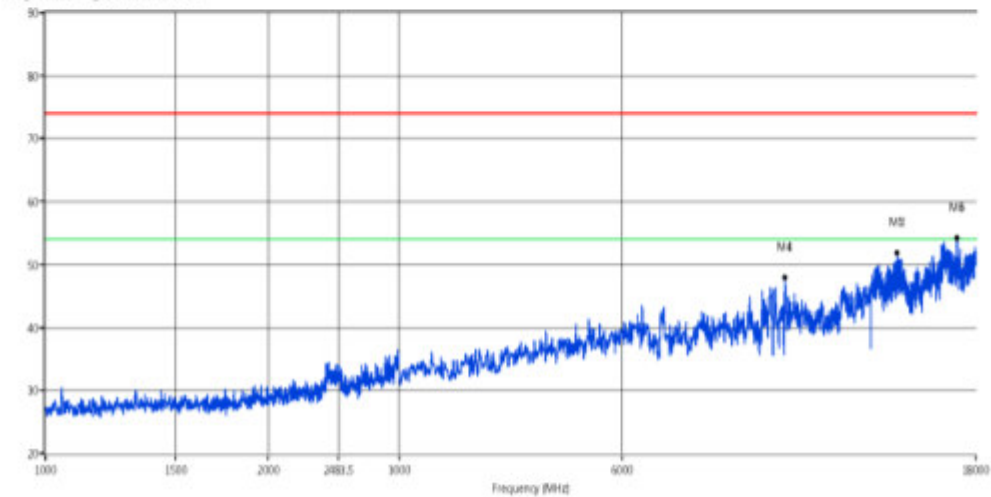

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9943.057        | 47.91            | 0.38        | 74             | -26.09          | Peak     | 15.00     | 100         | V   | Pass    |
| 1** | 9943.057        | 37.09            | 0.38        | 54             | -16.91          | AV       | 15.00     | 100         | V   | Pass    |
| 2   | 14093.906       | 51.94            | 3.61        | 74             | -22.06          | Peak     | 11.00     | 100         | V   | Pass    |
| 2** | 14093.906       | 41.12            | 3.61        | 54             | -12.88          | AV       | 11.00     | 100         | V   | Pass    |
| 3   | 16976.024       | 54.18            | 6.49        | 74             | -19.82          | Peak     | 12.00     | 100         | V   | Pass    |
| 3** | 16976.024       | 43.55            | 6.49        | 54             | -10.45          | AV       | 12.00     | 100         | V   | Pass    |

Test Time: 2018-08-09\_13.57.02

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

Q-L

RSE\_FCC Test Case FCC ISC 3GHz-5GHz

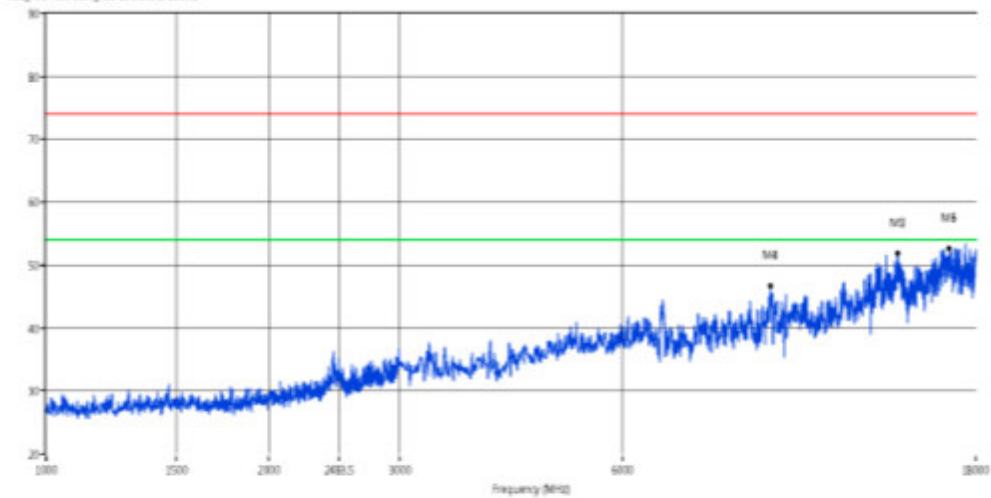

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9503.497        | 46.63            | 2.61        | 74             | -27.37          | Peak     | 14.00     | 100         | H   | Pass    |
| 1** | 9503.497        | 36.06            | 2.61        | 54             | -17.94          | AV       | 14.00     | 100         | H   | Pass    |
| 2   | 14113.886       | 51.89            | 3.96        | 74             | -22.11          | Peak     | 3.00      | 100         | H   | Pass    |
| 2** | 14113.886       | 41.17            | 3.96        | 54             | -12.83          | AV       | 3.00      | 100         | H   | Pass    |
| 3   | 16576.424       | 52.64            | 4.59        | 74             | -21.36          | Peak     | 13.00     | 100         | H   | Pass    |
| 3** | 16576.424       | 42.05            | 4.59        | 54             | -11.95          | AV       | 13.00     | 100         | H   | Pass    |

Test Time: 2018-08-09\_13.59.29

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

Q-L

RSE\_FCC Test Case\_FCC 15C 10Hz-18GHz

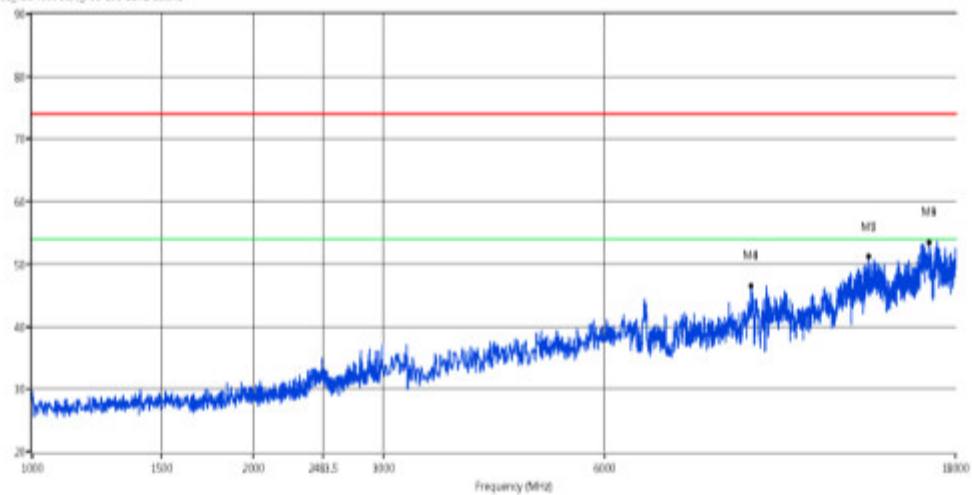

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 9493.506        | 46.5             | 1.16        | 74             | -27.50          | Peak     | 5.00      | 100         | V   | Pass    |
| 1** | 9493.506        | 36.07            | 1.16        | 54             | -17.93          | AV       | 5.00      | 100         | V   | Pass    |
| 2   | 13694.306       | 51.17            | 1.62        | 74             | -22.83          | Peak     | 9.00      | 100         | V   | Pass    |
| 2** | 13694.306       | 40.57            | 1.62        | 54             | -13.43          | AV       | 9.00      | 100         | V   | Pass    |
| 3   | 16561.439       | 53.46            | 5.73        | 74             | -20.54          | Peak     | 15.00     | 100         | V   | Pass    |
| 3** | 16561.439       | 43.03            | 5.73        | 54             | -10.97          | AV       | 15.00     | 100         | V   | Pass    |

Test Time: 2018-08-08\_22.19.18

EUT Name: 蓝牙耳机

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

BLE-H

BSL\_FCC Test Case\_FCC ISC 1GHz-18GHz

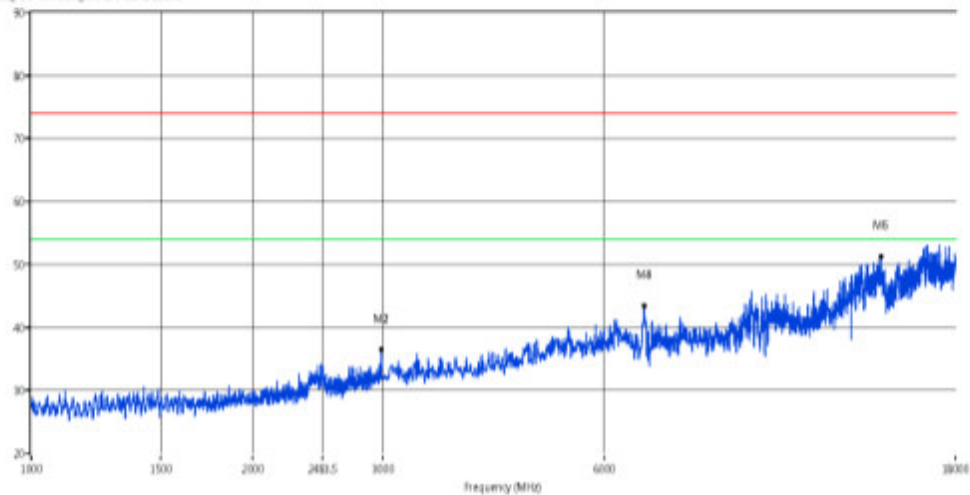

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 2990.010        | 36.53            | -11.87      | 74.0           | -37.47          | Peak     | 9.00      | 150         | H   | Pass    |
| 1** | 2990.010        | 27.79            | -11.87      | 54.0           | -26.21          | AV       | 9.00      | 150         | H   | Pass    |
| 2   | 6796.204        | 43.50            | -4.07       | 74.0           | -30.5           | Peak     | 9.00      | 150         | H   | Pass    |
| 2** | 6796.204        | 34.21            | -4.07       | 54.0           | -19.79          | AV       | 9.00      | 150         | H   | Pass    |
| 3   | 14268.731       | 51.29            | 2.42        | 74.0           | -22.71          | Peak     | 6.00      | 150         | H   | Pass    |
| 3** | 14268.731       | 40.89            | 2.42        | 54.0           | -13.11          | AV       | 6.00      | 150         | H   | Pass    |

Test Time: 2018-08-08\_22.09.46

EUT Name: 蓝牙耳机

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

BLE-H

RSE\_FCC Test Case\_FCC 15C 10Hz-18GHz

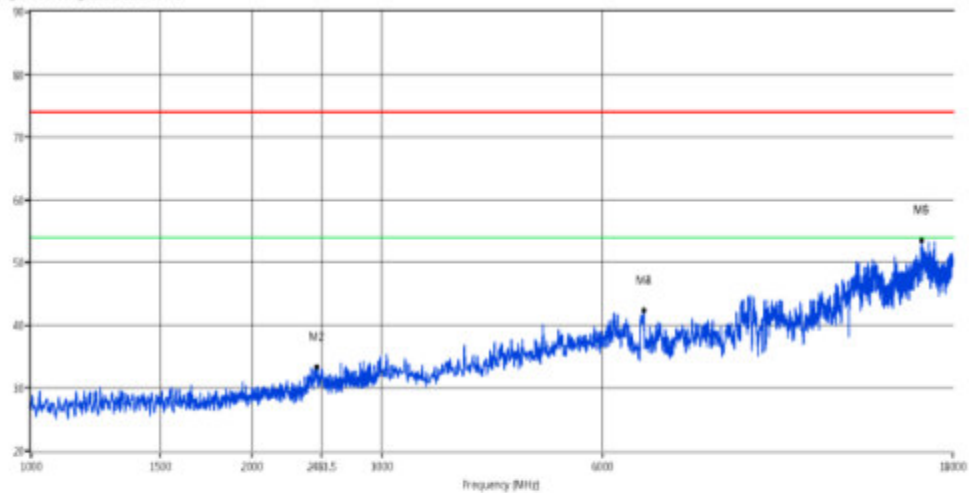

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 2446.553        | 33.30            | -13.80      | 74.0           | -40.7           | Peak     | 6.00      | 150         | V   | Pass    |
| 1** | 2446.553        | 23.32            | -13.80      | 54.0           | -30.68          | AV       | 6.00      | 150         | V   | Pass    |
| 2   | 6826.174        | 42.38            | -3.95       | 74.0           | -31.62          | Peak     | 12.00     | 150         | V   | Pass    |
| 2** | 6826.174        | 33.69            | -3.95       | 54.0           | -20.31          | AV       | 12.00     | 150         | V   | Pass    |
| 3   | 16301.696       | 53.55            | 6.54        | 74.0           | -20.45          | Peak     | 1.00      | 150         | V   | Pass    |
| 3** | 16301.696       | 43.25            | 6.54        | 54.0           | -10.75          | AV       | 1.00      | 150         | V   | Pass    |

Test Time: 2018-08-08\_22.20.22

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

BLE-M

RSE\_FCC Test Case\_FCC BIC 30Hz-18GHz

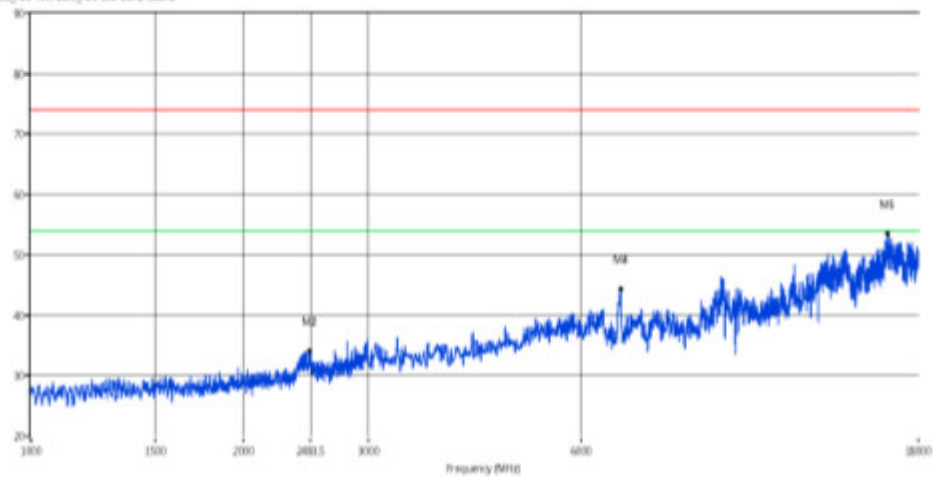

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 2478.521        | 34.07            | -13.64      | 74.0           | -39.93          | Peak     | 11.00     | 150         | H   | Pass    |
| 1** | 2478.521        | 23.36            | -13.64      | 54.0           | -30.64          | AV       | 11.00     | 150         | H   | Pass    |
| 2   | 6826.174        | 44.27            | -3.95       | 74.0           | -29.73          | Peak     | 11.00     | 150         | H   | Pass    |
| 2** | 6826.174        | 35.46            | -3.95       | 54.0           | -18.54          | AV       | 11.00     | 150         | H   | Pass    |
| 3   | 16281.718       | 53.53            | 6.06        | 74.0           | -20.47          | Peak     | 9.00      | 150         | H   | Pass    |
| 3** | 16281.718       | 44.12            | 6.06        | 54.0           | -9.88           | AV       | 9.00      | 150         | H   | Pass    |

Test Time: 2018-08-08\_22.12.34

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

BLE-M

RFI\_FCC Test Case\_FCC 15C 1GHz-18GHz

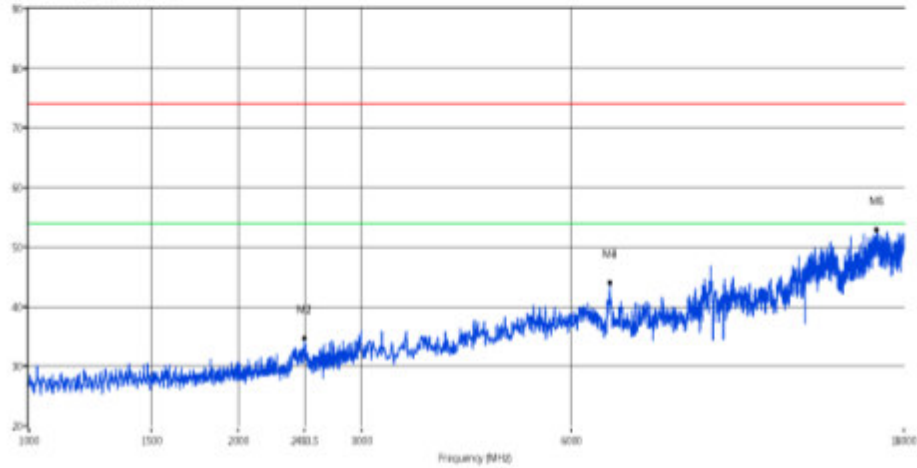

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 2486.513        | 34.65            | -13.49      | 74.0           | -39.35          | Peak     | 14.00     | 150         | V   | Pass    |
| 1** | 2486.513        | 22.79            | -13.49      | 54.0           | -31.21          | AV       | 14.00     | 150         | V   | Pass    |
| 2   | 6816.184        | 44.00            | -3.86       | 74.0           | -30.00          | Peak     | 10.00     | 150         | V   | Pass    |
| 2** | 6816.184        | 35.24            | -3.86       | 54.0           | -18.76          | AV       | 10.00     | 150         | V   | Pass    |
| 3   | 16456.543       | 52.88            | 5.47        | 74.0           | -21.12          | Peak     | 13.00     | 150         | V   | Pass    |
| 3** | 16456.543       | 43.89            | 5.47        | 54.0           | -10.11          | AV       | 13.00     | 150         | V   | Pass    |

Test Time: 2018-08-08\_22.17.42

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

BLE-L

BSE\_FCC Test Case\_FCC 15C 3029-18296

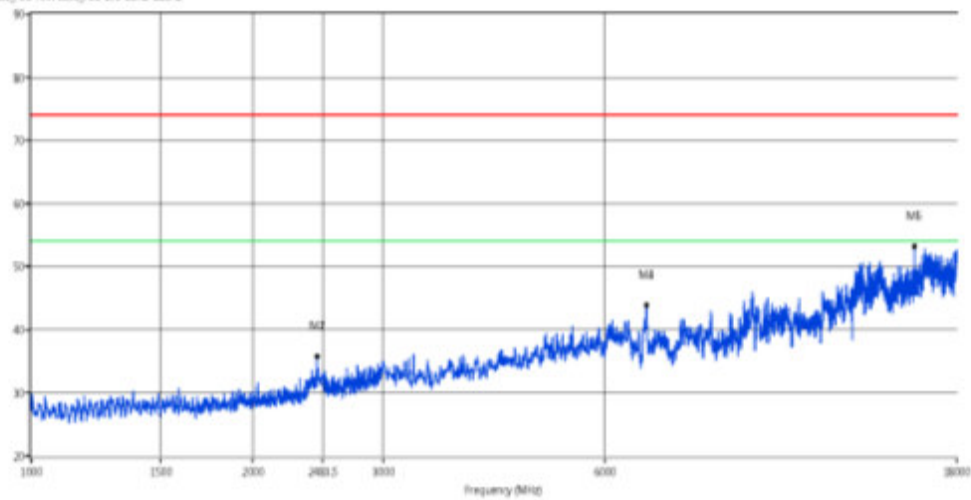

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 2440.559        | 35.75            | -13.83      | 74.0           | -38.25          | Peak     | 15.00     | 150         | H   | Pass    |
| 1** | 2440.559        | 26.45            | -13.83      | 54.0           | -27.55          | AV       | 15.00     | 150         | H   | Pass    |
| 2   | 6826.174        | 43.87            | -3.95       | 74.0           | -30.13          | Peak     | 15.00     | 150         | H   | Pass    |
| 2** | 6826.174        | 34.53            | -3.95       | 54.0           | -19.47          | AV       | 15.00     | 150         | H   | Pass    |
| 3   | 15757.243       | 53.21            | 4.00        | 74.0           | -20.79          | Peak     | 5.00      | 150         | H   | Pass    |
| 3** | 15757.243       | 43.22            | 4.00        | 54.0           | -10.78          | AV       | 5.00      | 150         | H   | Pass    |

Test Time: 2018-08-08\_22.14.41

EUT Name: 蓝牙音箱

Test Engineer: Zhou GL

Manufacturer: WIRELESS RECEIVER AND  
TRANSMITTER

Test Standard: FCC PART15 C

Model: FORZA 15A

Work Addition: Normal

Temp.(oC): 25


Load:

Hum.: 65%

Remark: N.A

BLE-L

RSE\_FCC Test Case\_FCC 15C 30Hz-18GHz

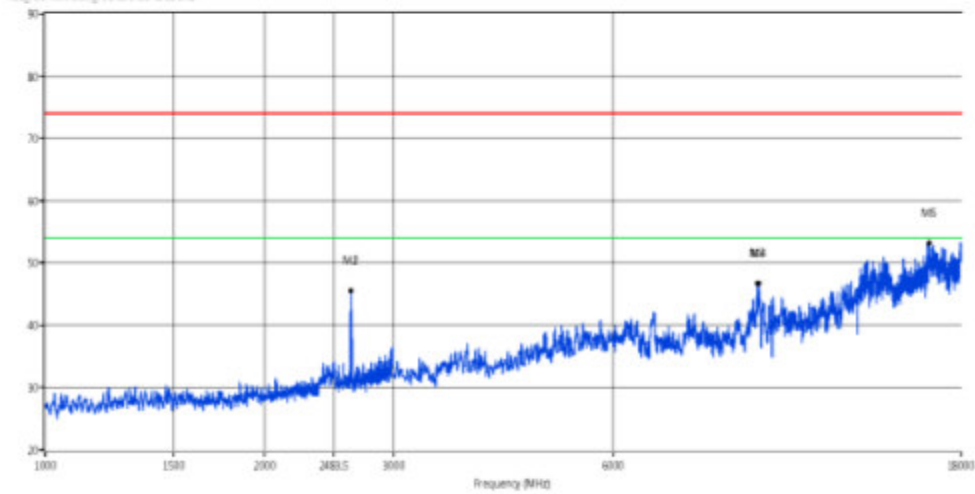

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (o) | Height (cm) | ANT | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|-----------|-------------|-----|---------|
| 1   | 2624.376        | 45.52            | -14.69      | 74.0           | -28.48          | Peak     | 3.00      | 150         | V   | Pass    |
| 1** | 2624.376        | 34.62            | -14.69      | 54.0           | -19.38          | AV       | 3.00      | 150         | V   | Pass    |
| 2   | 9463.536        | 46.70            | 1.15        | 74.0           | -27.3           | Peak     | 9.00      | 150         | V   | Pass    |
| 2** | 9503.497        | 37.52            | 2.61        | 54.0           | -16.48          | AV       | 15.00     | 150         | V   | Pass    |
| 3   | 16286.713       | 53.13            | 6.23        | 74.0           | -20.87          | Peak     | 9.00      | 150         | V   | Pass    |
| 3** | 16286.713       | 46.12            | 6.23        | 54.0           | -7.88           | AV       | 9.00      | 150         | V   | Pass    |


## Appendix B.4: Test Results of Conducted Emission on AC Mains

### + Common Information

Manufacturer: Seikaku  
Test Item: Speaker  
Identification: FORZA 15  
Test Standard: FCC Part 15  
Test Detail: Conducted Emission  
Operation Mode: A  
Climate Condition: 20 °C, 50 %, 100 k Pa  
Test Voltage/ Freq.: AC 120V/60Hz  
Port / Line: AC mains  
Receipt No.: 174083384  
Report No.: /  
Result: Pass  
Comment: /

Hardware Setup: 1phase LISN ENV216 to ESCI 3  
Level Unit: dBµV

| Subrange       | Detectors     | IF Bandwidth | Step Size | Meas. Time | Receiver |
|----------------|---------------|--------------|-----------|------------|----------|
| 150kHz - 30MHz | Peak; Average | 9kHz         | 4.5kHz    | 10ms       | ESCI 3   |

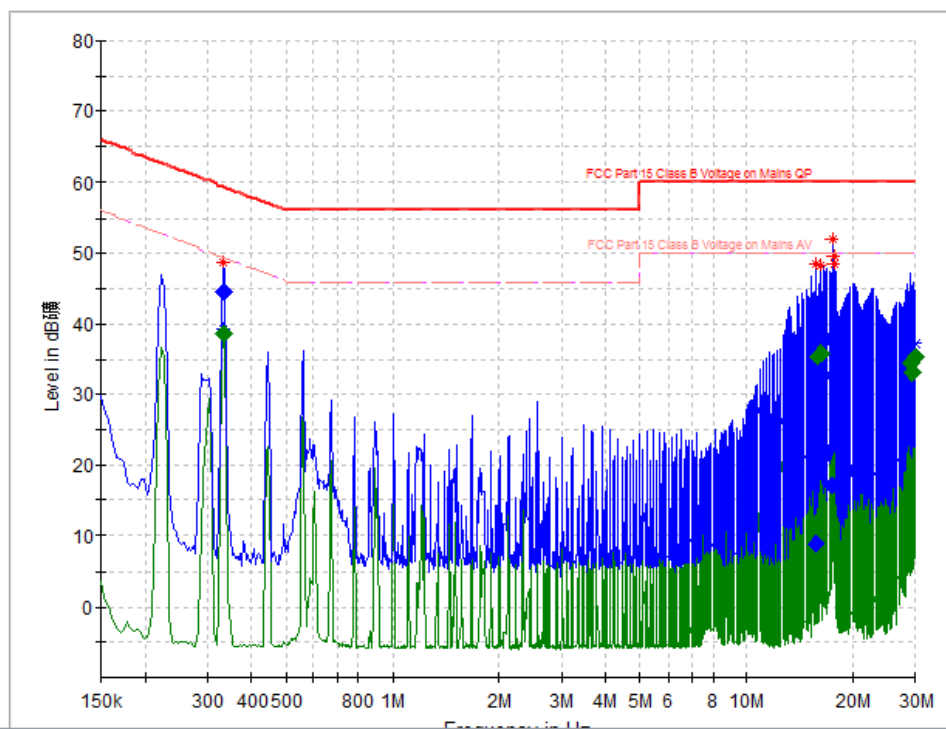

## Produkte

## Products

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | CAverage<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Meas.<br>Time<br>(ms) | Bandwidth<br>(kHz) | Line | Filter | Corr.<br>(dB) |
|--------------------|---------------------|--------------------|-----------------|----------------|-----------------------|--------------------|------|--------|---------------|
| 0.334000           | 44.59               | ---                | 59.35           | 14.76          | 1000.                 | 9.000              | N    | OFF    | 9.6           |
| 0.334000           | ---                 | 38.63              | 49.35           | 10.72          | 1000.                 | 9.000              | N    | OFF    | 9.6           |
| 15.674000          | 8.88                | ---                | 60.00           | 51.12          | 1000.                 | 9.000              | N    | OFF    | 10.0          |
| 15.926000          | ---                 | 35.42              | 50.00           | 14.58          | 1000.                 | 9.000              | L1   | OFF    | 10.0          |
| 16.150000          | ---                 | 35.82              | 50.00           | 14.18          | 1000.                 | 9.000              | L1   | OFF    | 10.0          |
| 16.266000          | 38.28               | ---                | 60.00           | 21.72          | 1000.                 | 9.000              | L1   | OFF    | 10.0          |
| 17.470000          | 17.16               | ---                | 60.00           | 42.84          | 1000.                 | 9.000              | L1   | OFF    | 9.8           |
| 17.594000          | 37.49               | ---                | 60.00           | 22.51          | 1000.                 | 9.000              | L1   | OFF    | 9.9           |
| 17.706000          | 32.60               | ---                | 60.00           | 27.40          | 1000.                 | 9.000              | N    | OFF    | 9.9           |
| 29.182000          | ---                 | 34.47              | 50.00           | 15.53          | 1000.                 | 9.000              | N    | OFF    | 10.1          |
| 29.406000          | ---                 | 32.96              | 50.00           | 17.04          | 1000.                 | 9.000              | N    | OFF    | 10.1          |
| 29.850000          | ---                 | 35.26              | 50.00           | 14.74          | 1000.                 | 9.000              | N    | OFF    | 10.1          |