




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4407	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2422MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT40	

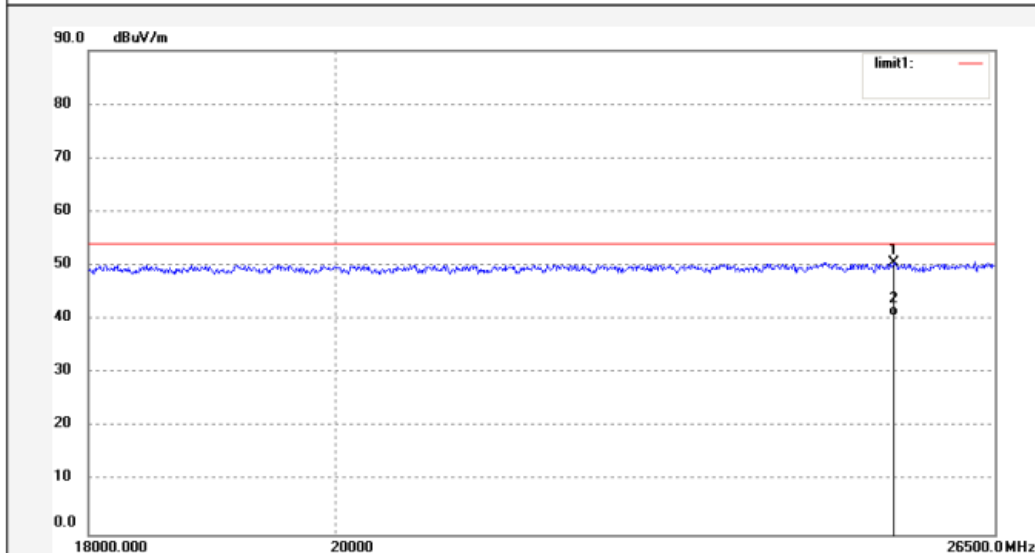

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25386.383	9.43	41.08	50.51	74.00	-23.49	peak			
2	25386.383	-0.54	41.08	40.54	54.00	-13.46	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4409	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2437MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT40	

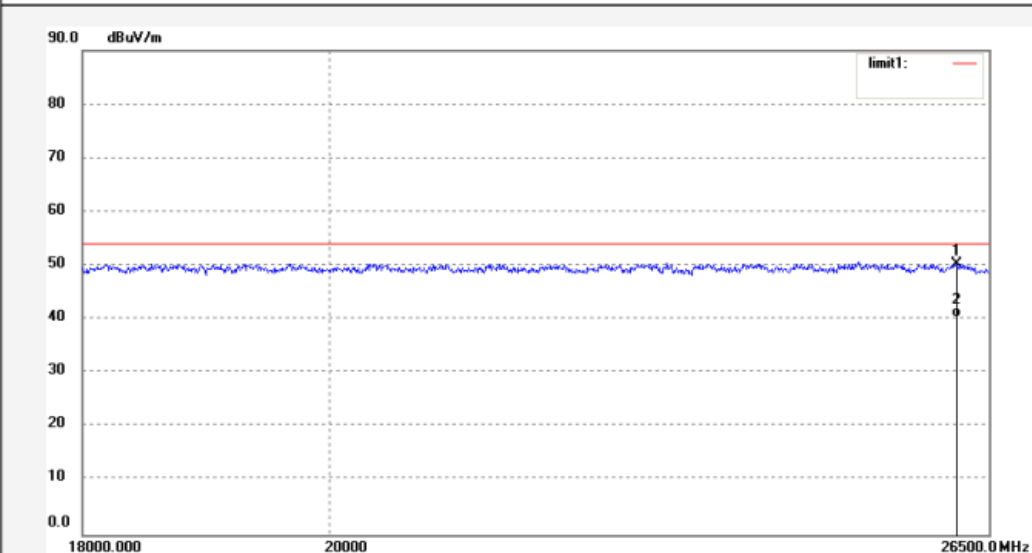

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26133.575	9.96	40.31	50.27	74.00	-23.73	peak			
2	26133.575	0.04	40.31	40.35	54.00	-13.65	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4410	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2437MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT40	

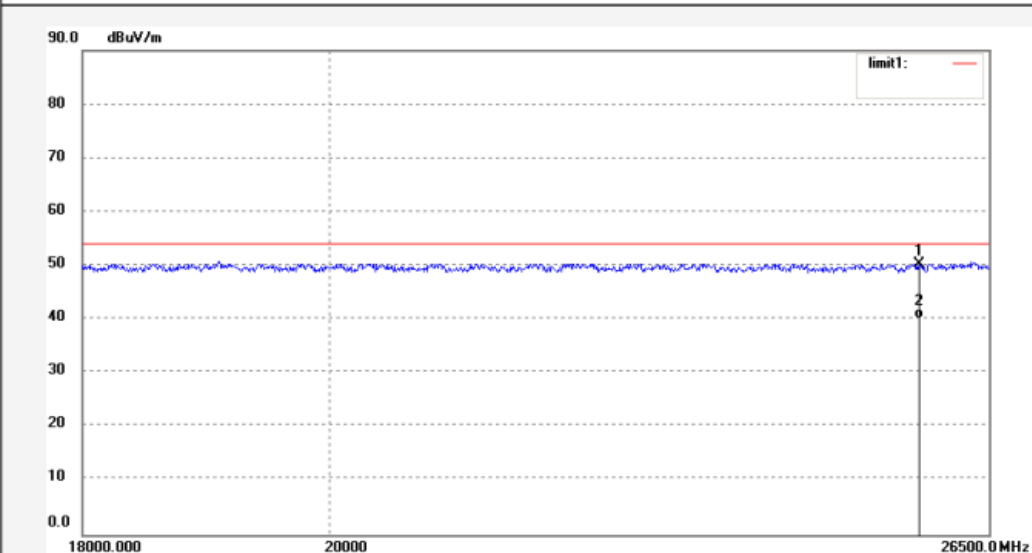

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25722.426	9.22	41.03	50.25	74.00	-23.75	peak			
2	25722.426	-0.82	41.03	40.21	54.00	-13.79	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 3# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4412	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2452MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT40	

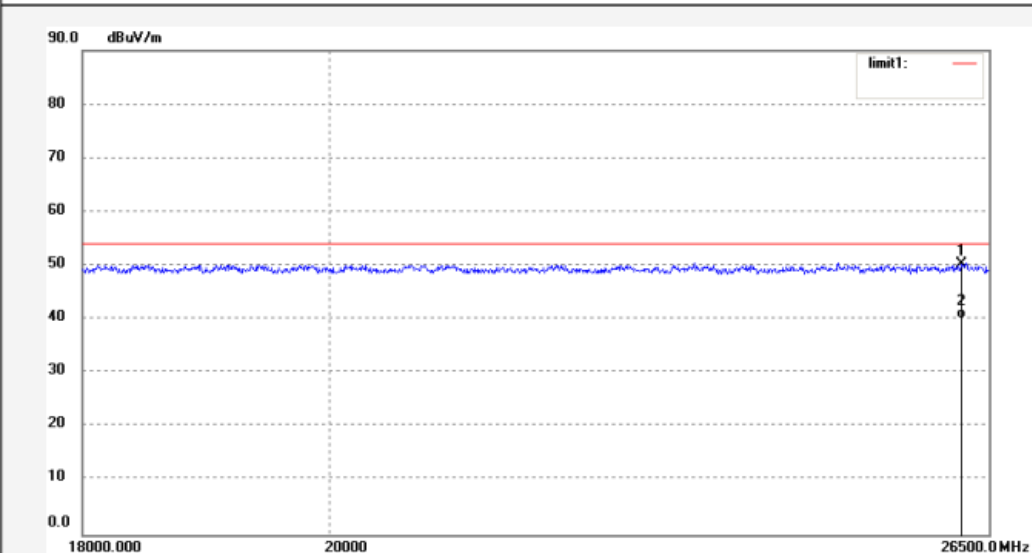

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26194.292	9.92	40.35	50.27	74.00	-23.73	peak			
2	26194.292	-0.11	40.35	40.24	54.00	-13.76	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4411	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2452MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11n HT40

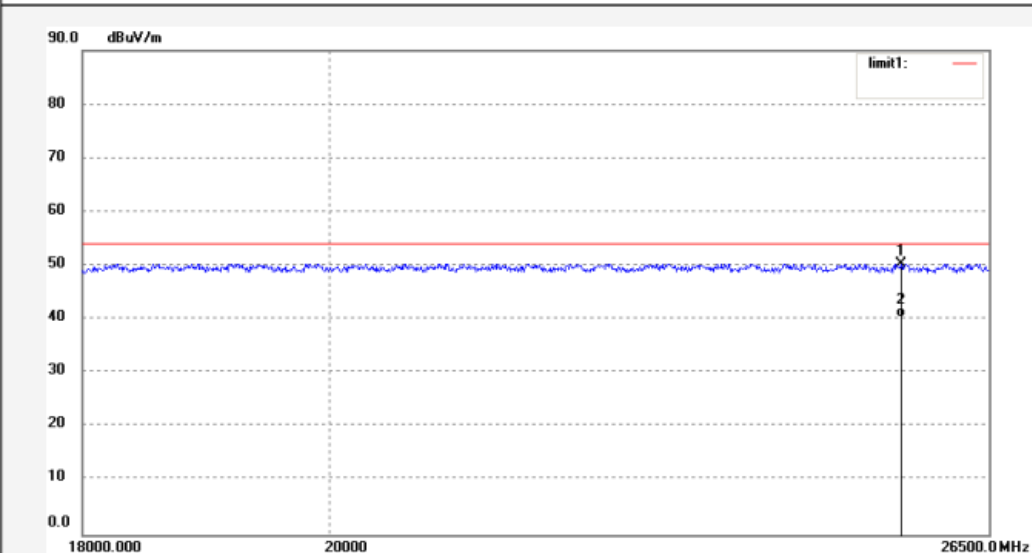

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25524.219	9.20	41.06	50.26	74.00	-23.74	peak			
2	25524.219	-0.61	41.06	40.45	54.00	-13.55	AVG			

Appendix B.2: Test Results of Radiated Emissions in Restricted Bands

802.11 b mode, 1 Mbps

Low channel



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4352	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2412MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11b

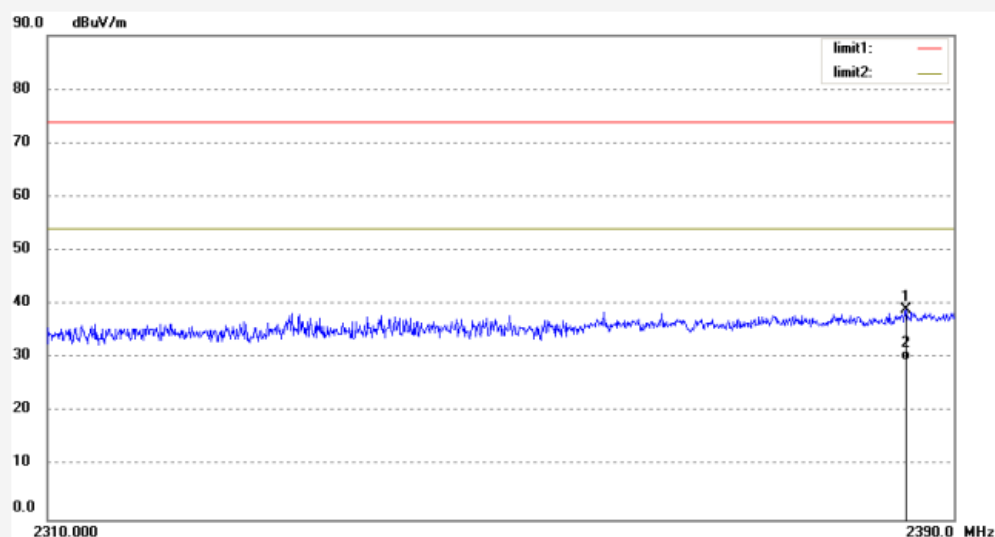

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2385.760	40.84	-1.74	39.10	74.00	-34.90	peak			
2	2385.760	31.38	-1.74	29.64	54.00	-24.36	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4351	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2412MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11b

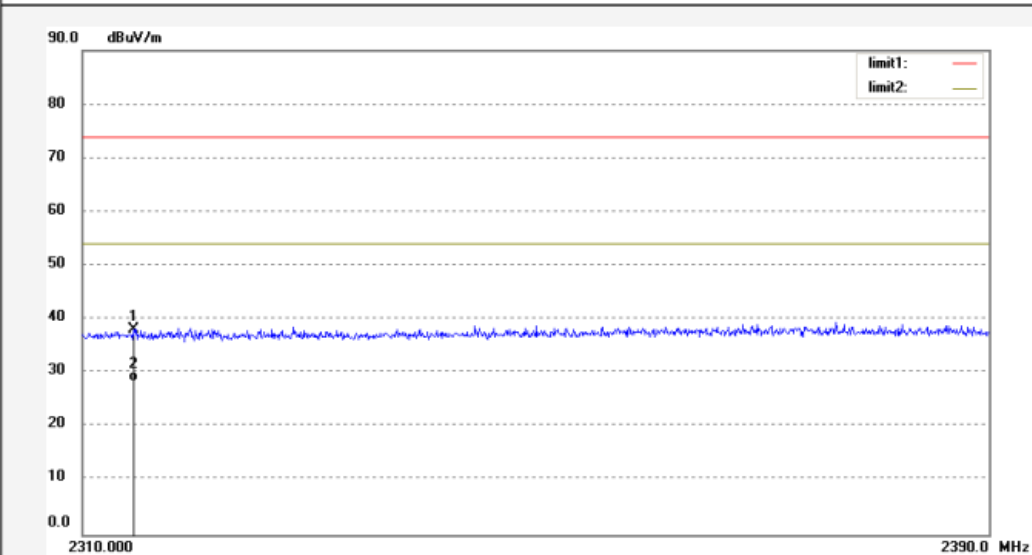

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2314.480	40.20	-2.04	38.16	74.00	-35.84	peak			
2	2314.480	30.60	-2.04	28.56	54.00	-25.44	AVG			

High channel




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4357	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2462MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11b

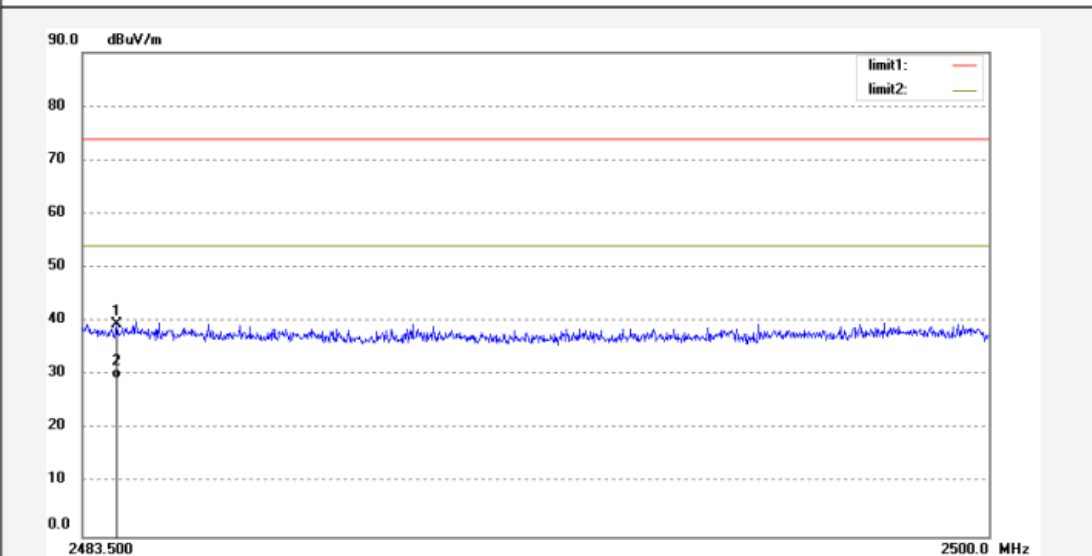

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2484.127	40.98	-1.41	39.57	74.00	-34.43	peak			
2	2484.127	30.82	-1.41	29.41	54.00	-24.59	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4358	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2462MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11b

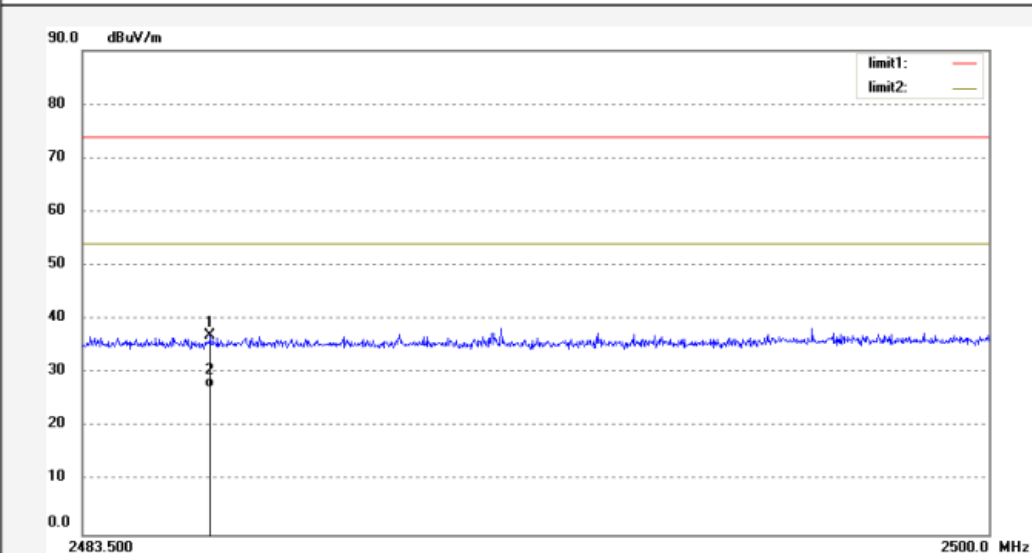

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2485.827	38.45	-1.40	37.05	74.00	-36.95	peak			
2	2485.827	28.75	-1.40	27.35	54.00	-26.65	AVG			

802.11 g mode, 6 Mbps
Low channel




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4368	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2412MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11g

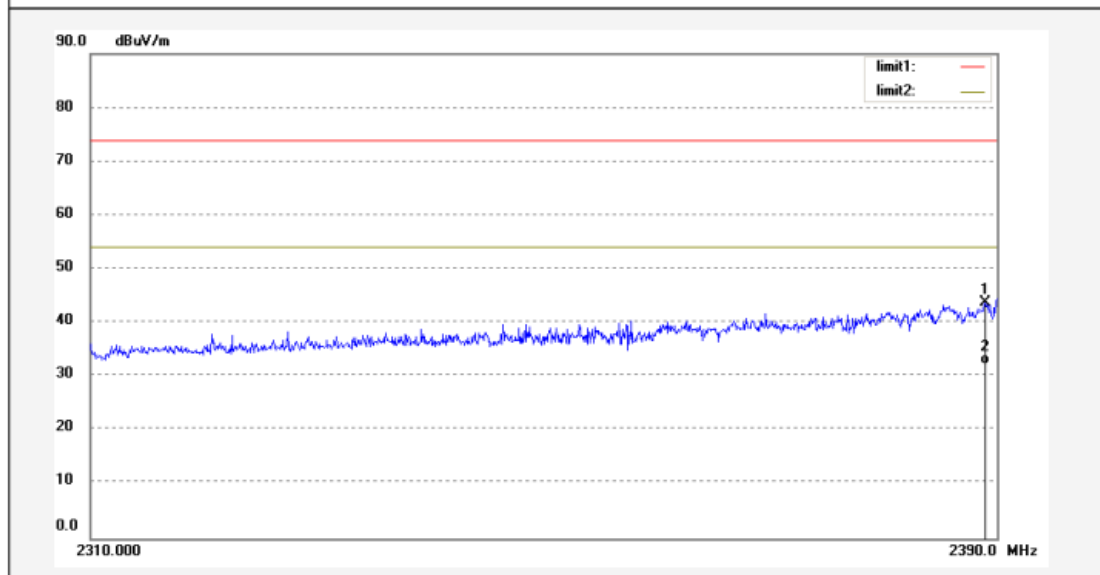

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2388.960	45.57	-1.71	43.86	74.00	-30.14	peak			
2	2388.960	34.06	-1.71	32.35	54.00	-21.65	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4367	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2412MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11g

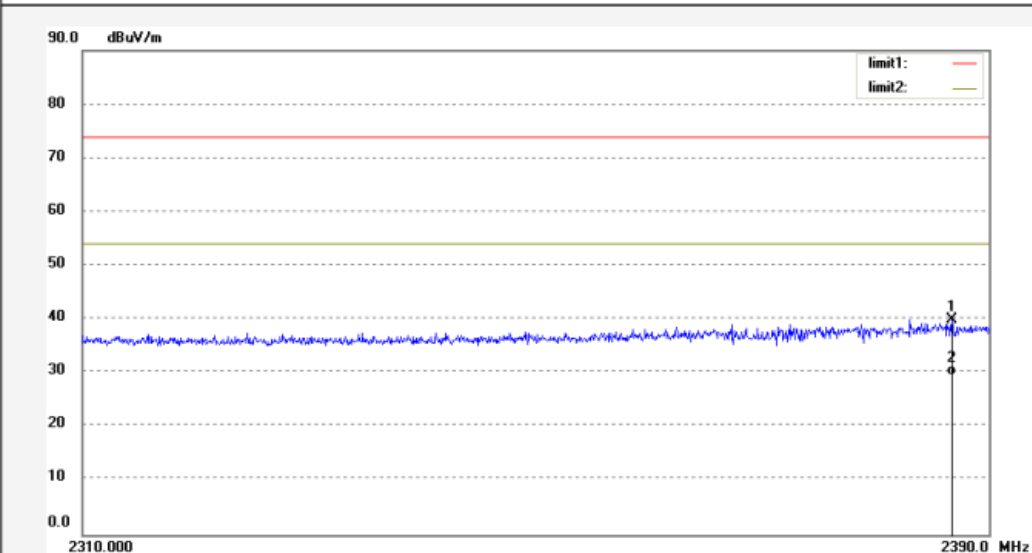

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2386.720	41.65	-1.72	39.93	74.00	-34.07	peak			
2	2386.720	31.35	-1.72	29.63	54.00	-24.37	AVG			

High channel




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4373	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2462MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11g

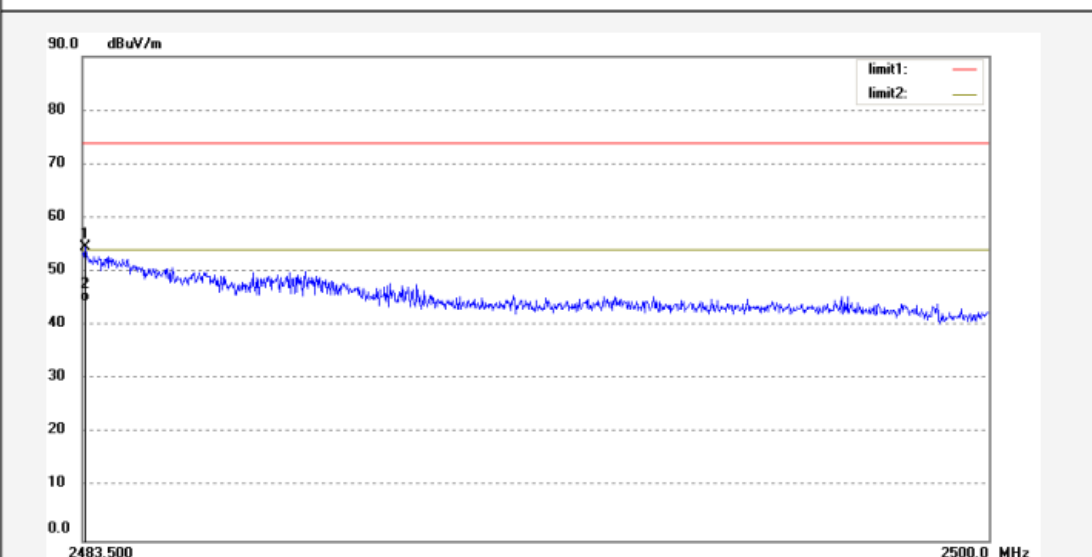

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.550	55.90	-1.40	54.50	74.00	-19.50	peak			
2	2483.550	45.75	-1.40	44.35	54.00	-9.65	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4374	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2462MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11g

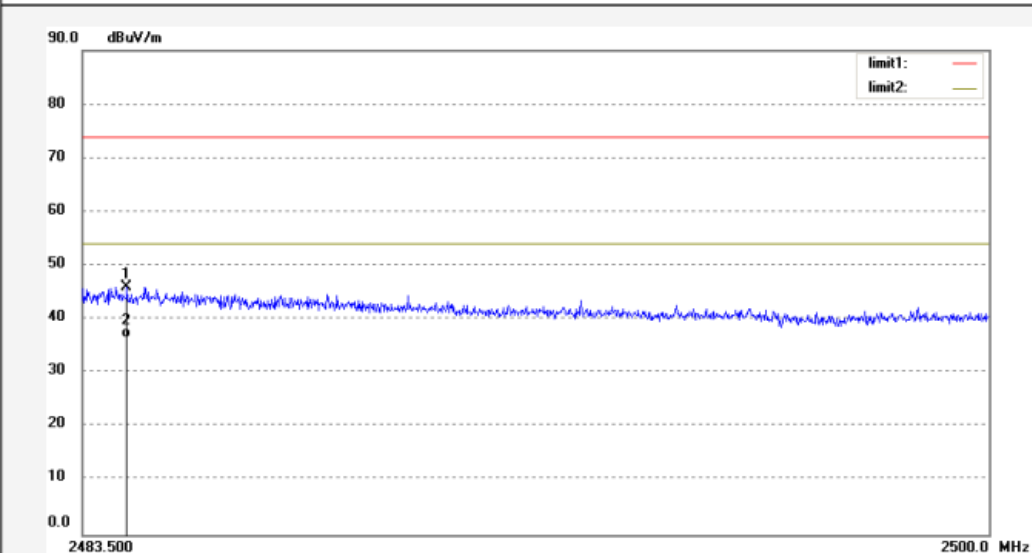

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2484.309	47.52	-1.41	46.11	74.00	-27.89	peak			
2	2484.309	37.86	-1.41	36.45	54.00	-17.55	AVG			

802.11 n(HT20) mode, MCS0 Mbps
Low channel



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4384	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2412MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11n HT20

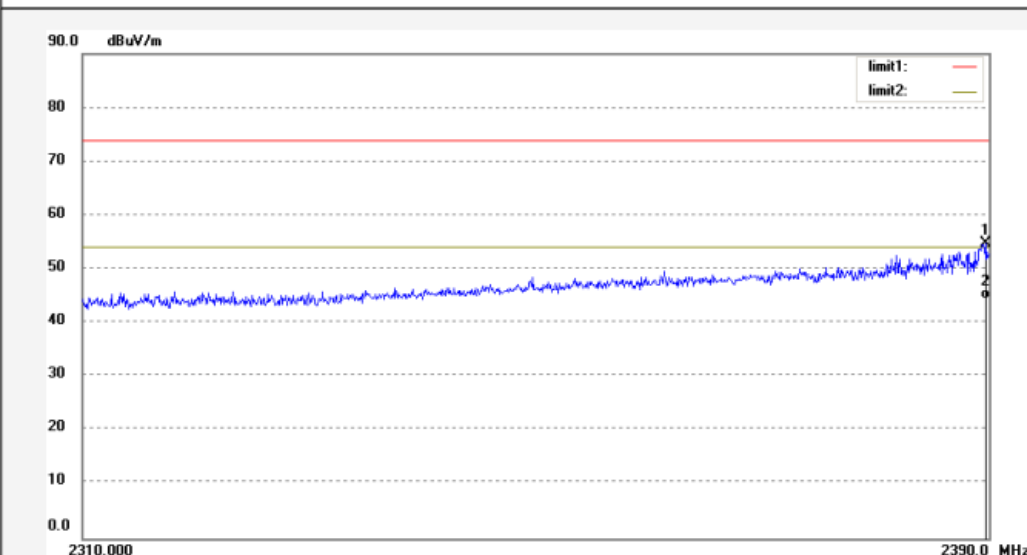

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.760	56.45	-1.71	54.74	74.00	-19.26	peak			
2	2389.760	46.12	-1.71	44.41	54.00	-9.59	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4383
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module
Mode: TX 2412MHz
Model: ZDWM2402
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.

Polarization: Vertical
Power Source: DC 5V
Date: 16/11/28/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT20

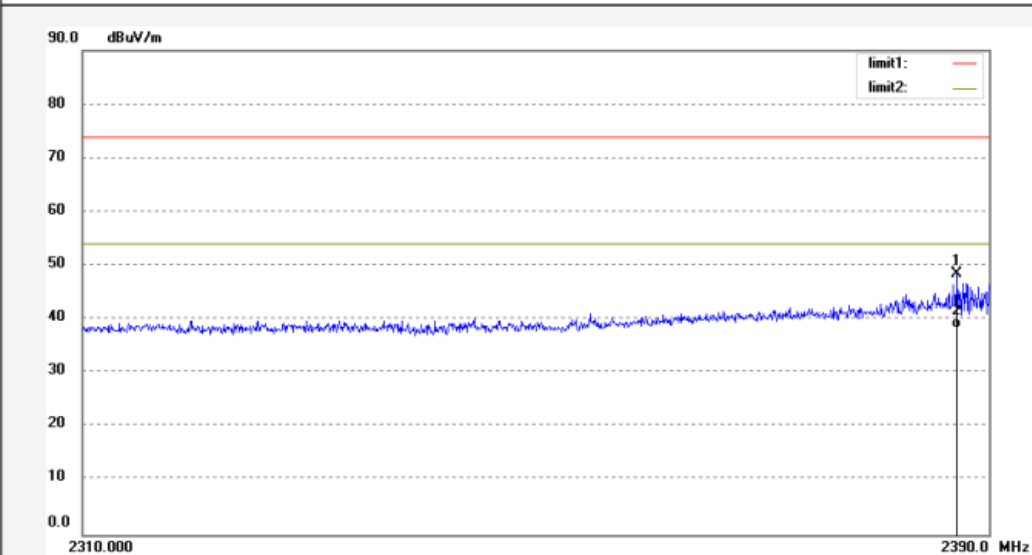

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2387.200	50.15	-1.72	48.43	74.00	-25.57	peak			
2	2387.200	40.17	-1.72	38.45	54.00	-15.55	AVG			

High channel




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4389	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2462MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11n HT20

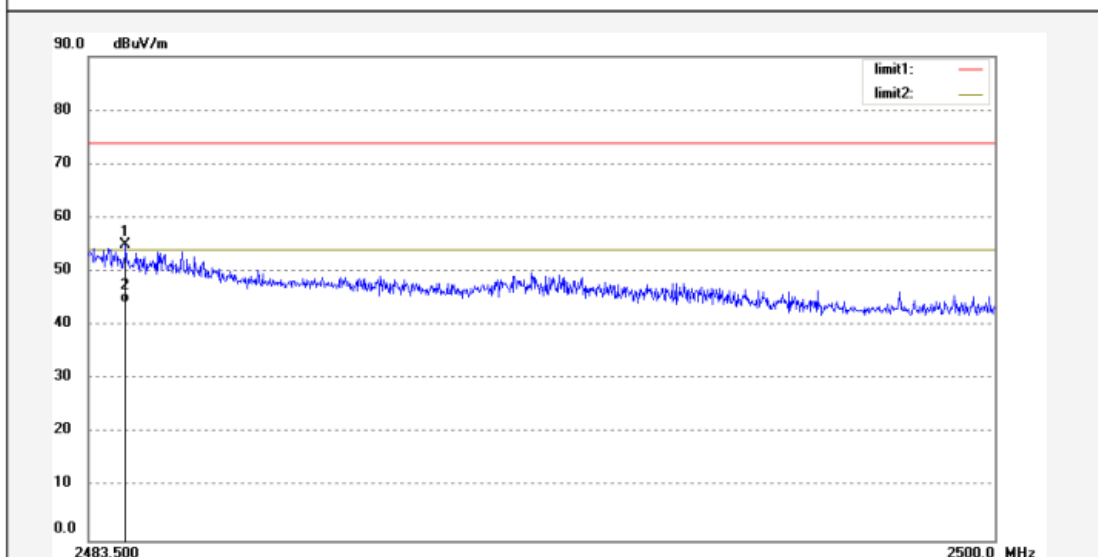

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2484.177	56.32	-1.41	54.91	74.00	-19.09	peak			
2	2484.177	45.65	-1.41	44.24	54.00	-9.76	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4390	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2462MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT20	

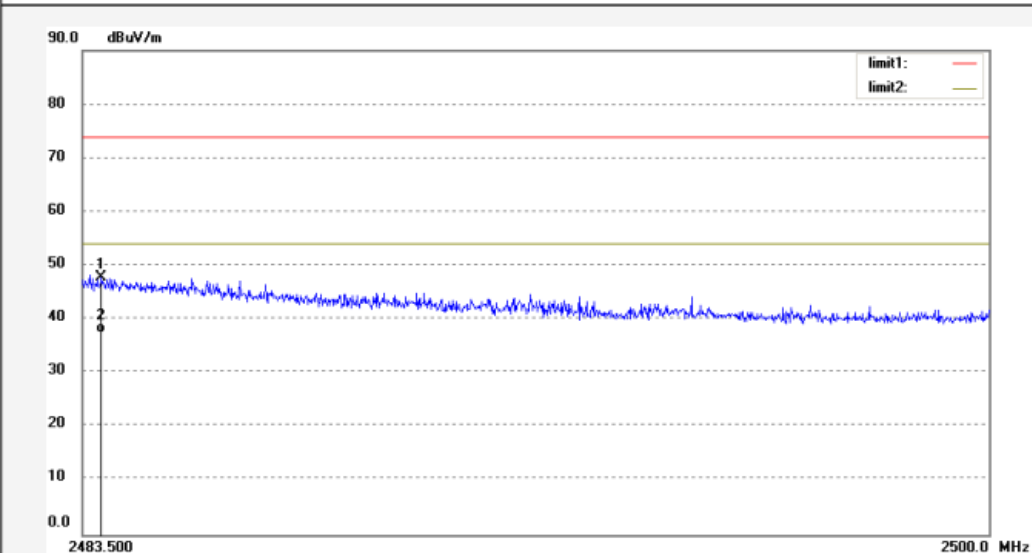

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.847	49.13	-1.41	47.72	74.00	-26.28	peak			
2	2483.847	38.95	-1.41	37.54	54.00	-16.46	AVG			

802.11 n(HT40) mode, MCS0 Mbps
Low channel

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4400	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2422MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	

Note: 802.11n HT40

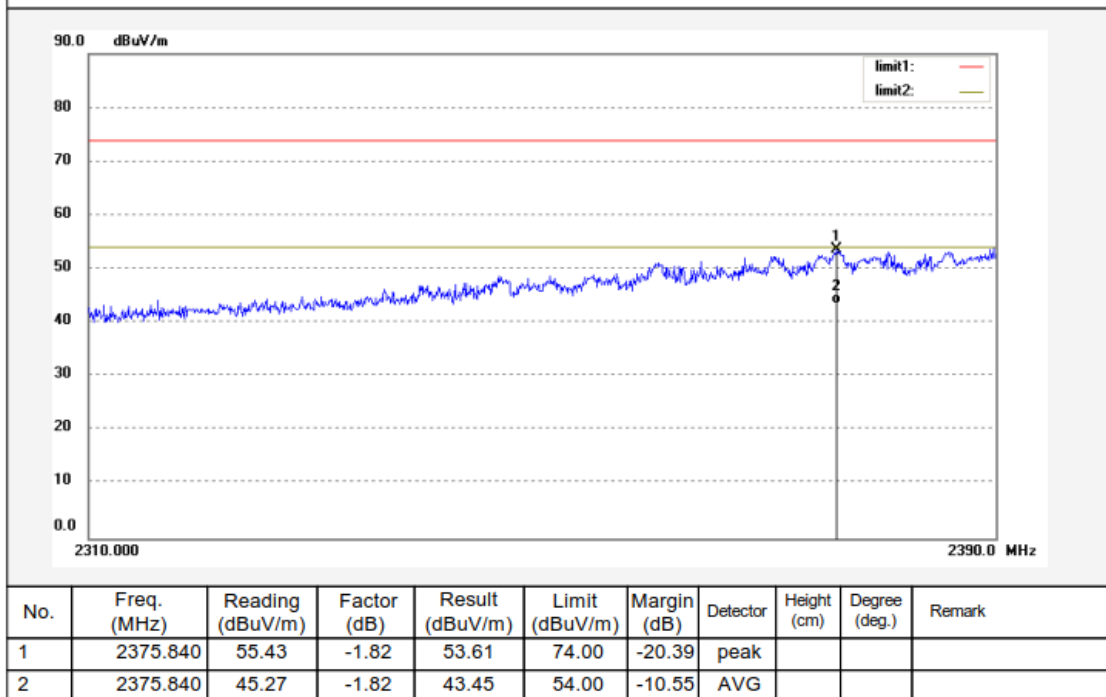




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4399	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2422MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT40	

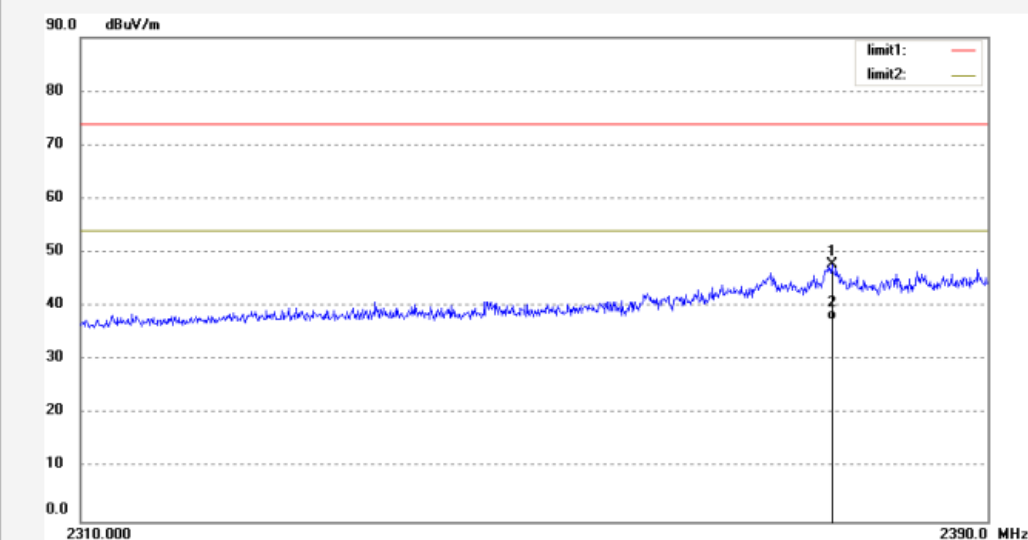

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2376.080	49.57	-1.82	47.75	74.00	-26.25	peak			
2	2376.080	39.23	-1.82	37.41	54.00	-16.59	AVG			

High channel




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4405	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2452MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT40	

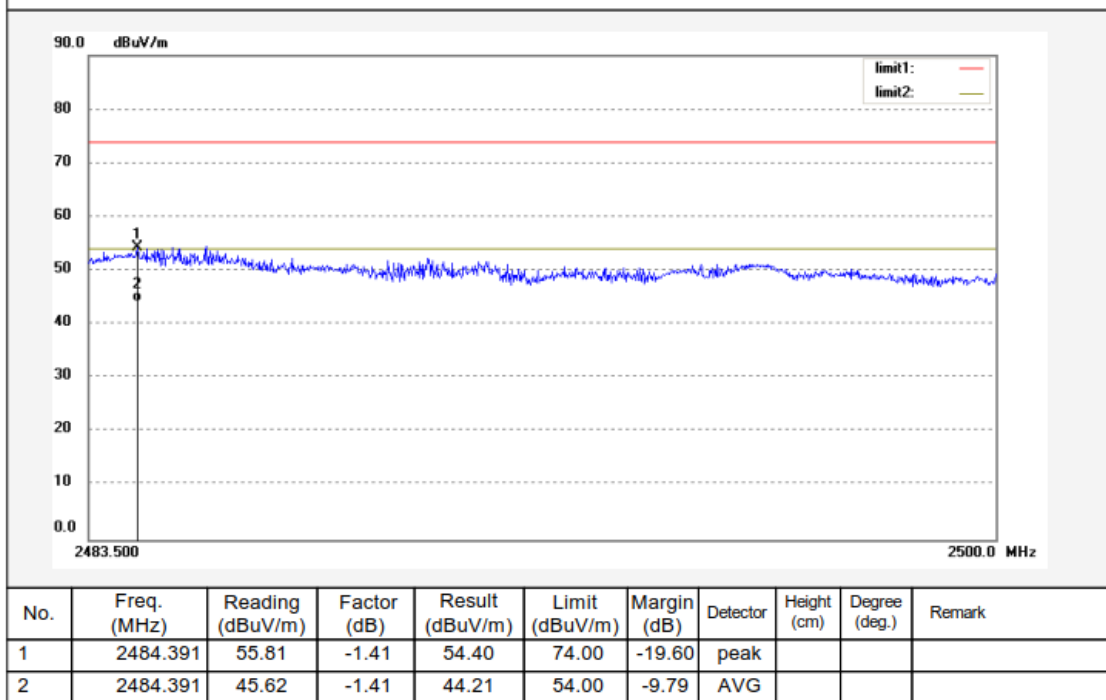




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4406	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 5V
Test item: Radiation Test	Date: 16/11/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module	Engineer Signature: LGWADE
Mode: TX 2452MHz	Distance: 3m
Model: ZDWM2402	
Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.	
Note: 802.11n HT40	

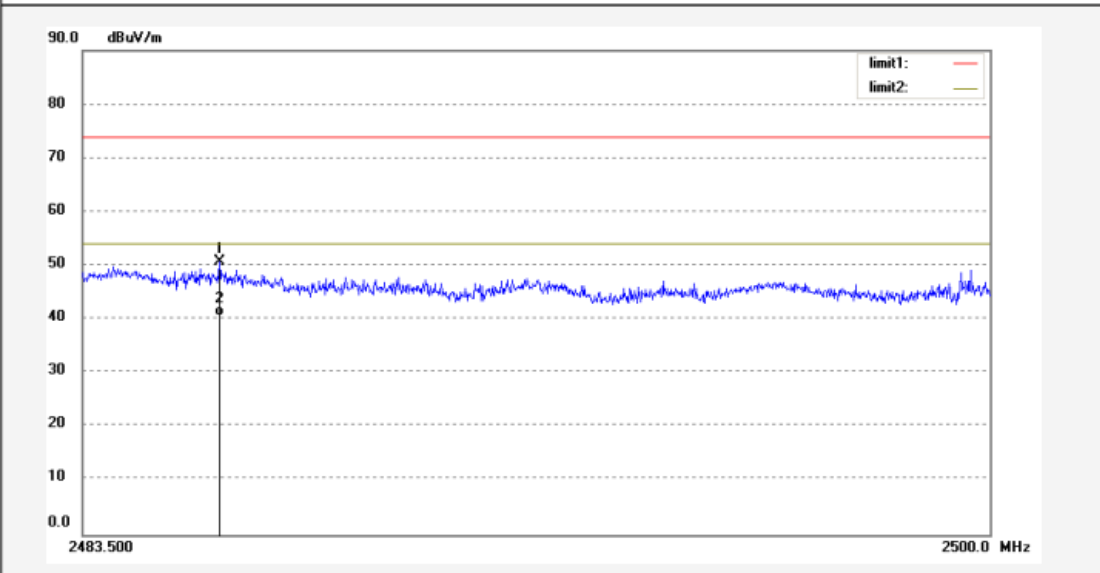

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2485.992	52.13	-1.40	50.73	74.00	-23.27	peak			
2	2485.992	41.96	-1.40	40.56	54.00	-13.44	AVG			

Appendix B.3: Test Results of Conducted Emission on AC Mains B mode


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module M/N:ZDWM2402
 Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.
 Operating Condition: B
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 12/10/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

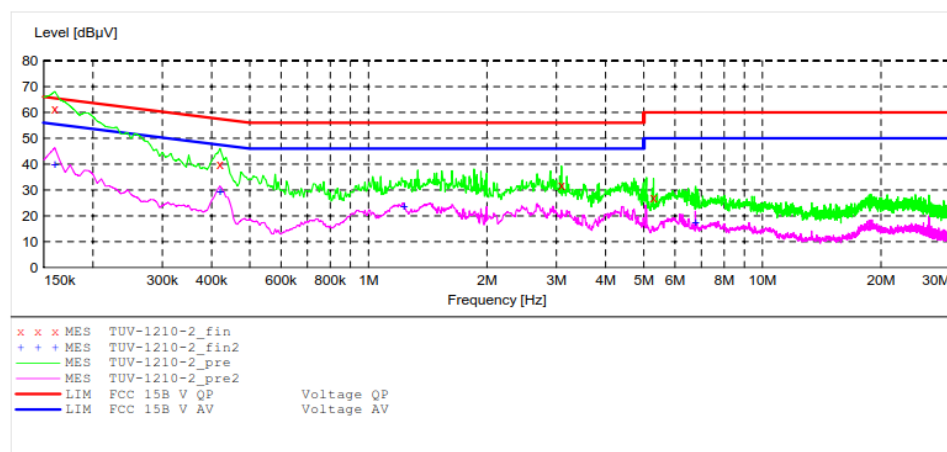

MEASUREMENT RESULT: "TUV-1210-2_fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.160000	61.30	10.5	66	4.2	QP	L1	GND
0.420000	39.80	10.7	57	17.6	QP	L1	GND
3.090000	32.00	11.1	56	24.0	QP	L1	GND
5.290000	27.10	11.2	60	32.9	QP	L1	GND

MEASUREMENT RESULT: "TUV-1210-2_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.160000	40.10	10.5	56	15.4	AV	L1	GND
0.420000	29.30	10.7	47	18.1	AV	L1	GND
1.230000	23.50	10.9	46	22.5	AV	L1	GND
6.760000	17.50	11.2	50	32.5	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: IEEE 802.11 b/g/n 2.4GHz 1T1R USB Module M/N:ZDWM2402
 Manufacturer: Qingdao Intelligent&Precise Electronics Co.,Ltd.
 Operating Condition: B
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: N 120V/60Hz
 Comment: Mains Port
 Start of Test: 12/10/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008

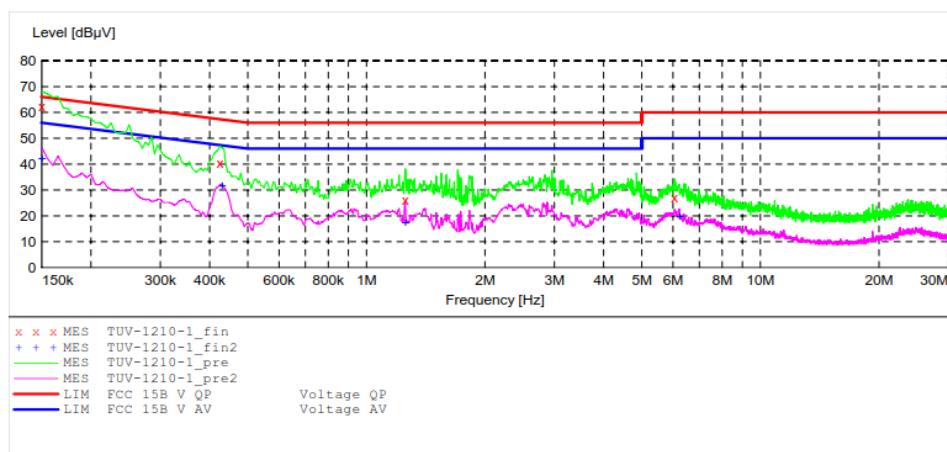

MEASUREMENT RESULT: "TUV-1210-1_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	62.50	10.5	66	3.5	QP	N	GND
0.425000	40.20	10.7	57	17.1	QP	N	GND
1.255000	26.10	10.9	56	29.9	QP	N	GND
6.050000	27.30	11.2	60	32.7	QP	N	GND

MEASUREMENT RESULT: "TUV-1210-1_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	42.30	10.5	56	13.7	AV	N	GND
0.430000	31.80	10.7	47	15.5	AV	N	GND
1.255000	17.50	10.9	46	28.5	AV	N	GND
6.230000	20.10	11.2	50	29.9	AV	N	GND