


|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

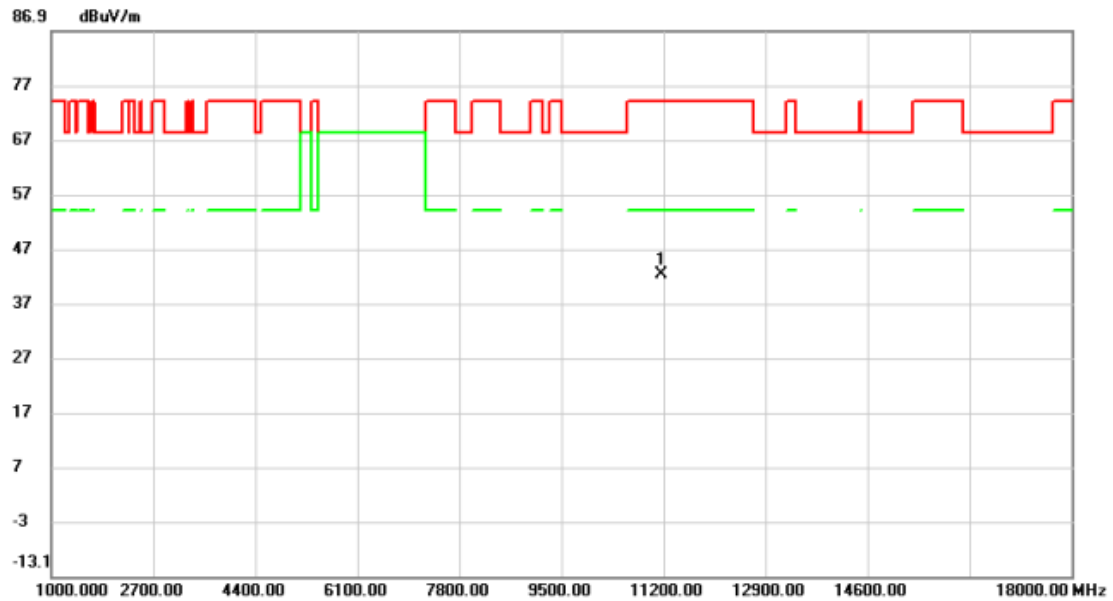


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11160.00 | 50.69         | -8.42          | 42.27       | 74.00  | -31.73 | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

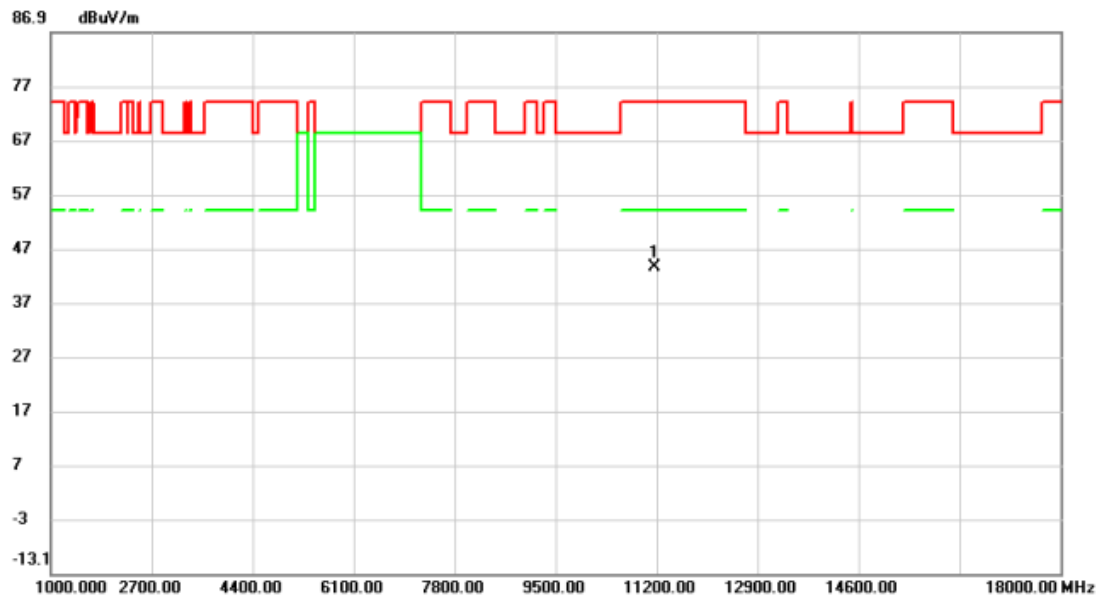


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 11160.00     | 51.89                    | -8.42                   | 43.47                      | 74.00           | -30.53       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

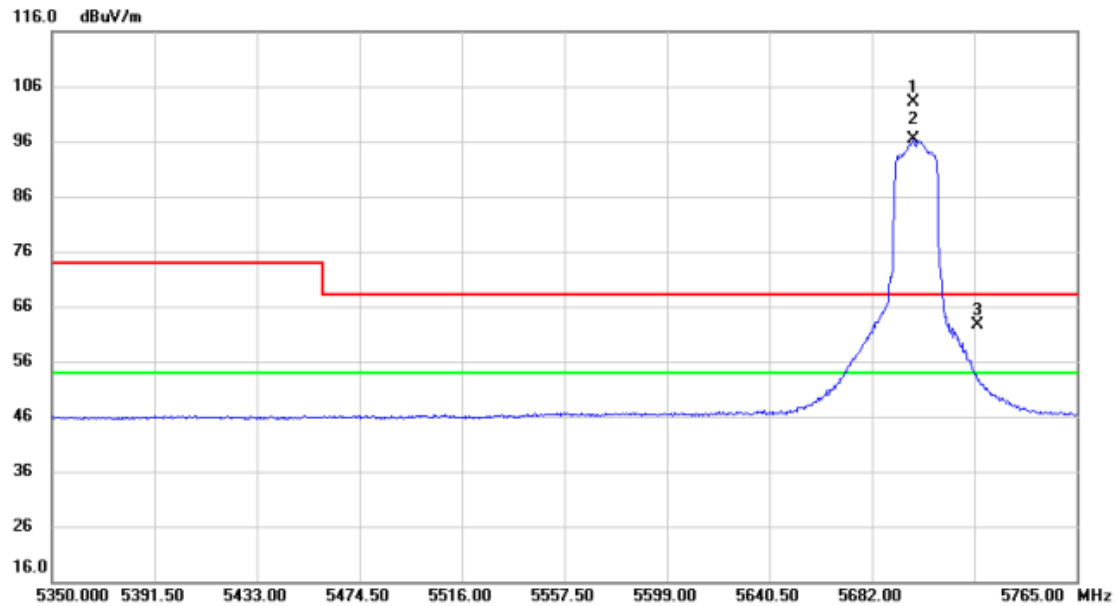


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5699.015     | 61.86                    | 41.37                   | 103.23                     | 68.20           | 35.03        | peak     | No limit |
| 2   | *   | 5699.015     | 54.96                    | 41.37                   | 96.33                      | 54.00           | 42.33        | AVG      | No limit |
| 3   |     | 5725.000     | 21.17                    | 41.43                   | 62.60                      | 68.20           | -5.60        | peak     |          |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

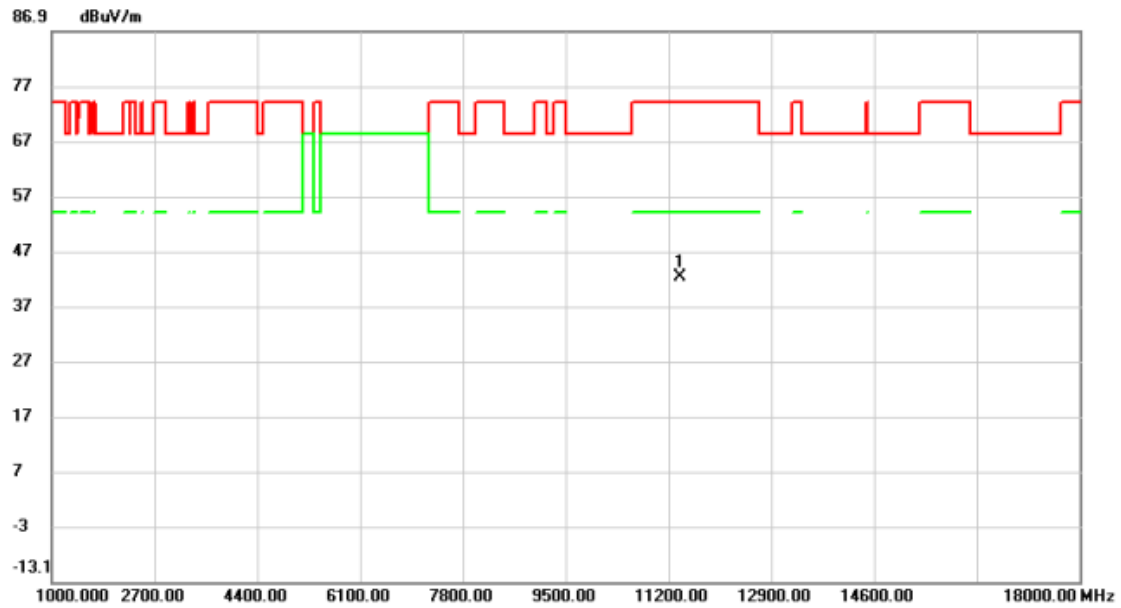


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 11400.00     | 50.46                    | -8.21                   | 42.25                      | 74.00           | -31.75       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

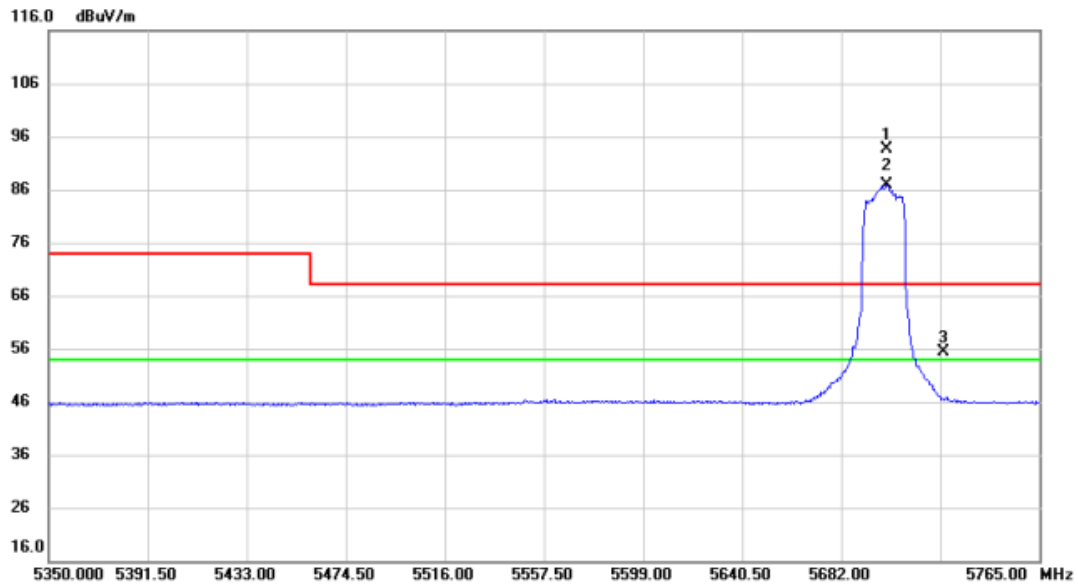


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5700.882     | 52.32                    | 41.37                   | 93.69                      | 68.20           | 25.49        | peak     | No limit |
| 2   | *   | 5700.882     | 45.48                    | 41.37                   | 86.85                      | 54.00           | 32.85        | AVG      | No limit |
| 3   |     | 5725.000     | 14.05                    | 41.43                   | 55.48                      | 68.20           | -12.72       | peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

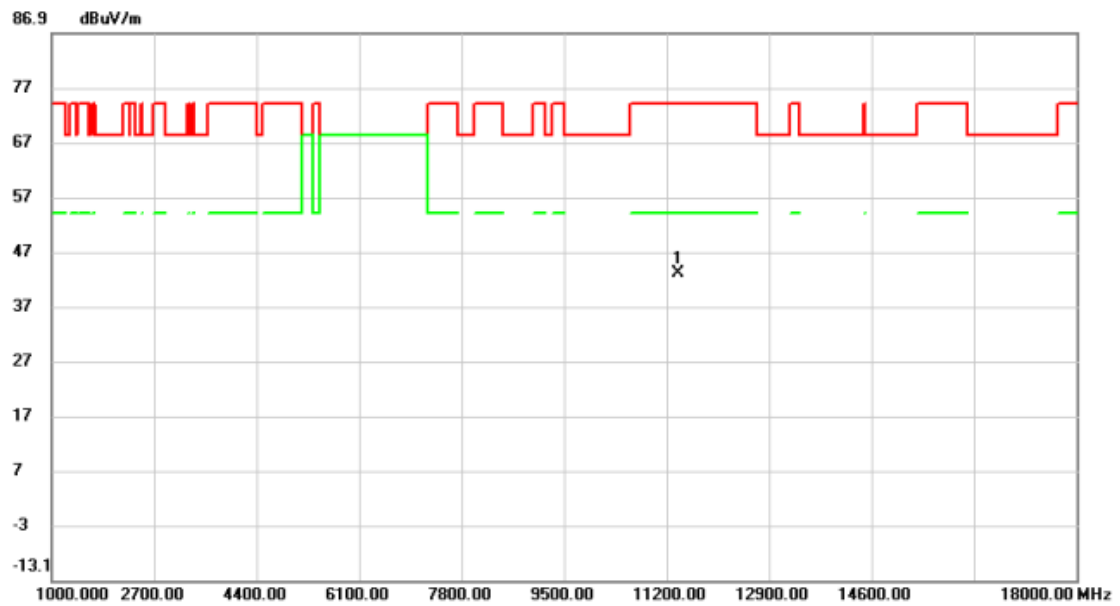


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11400.00     | 51.17                    | -8.21                   | 42.96                      | 74.00           | -31.04       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

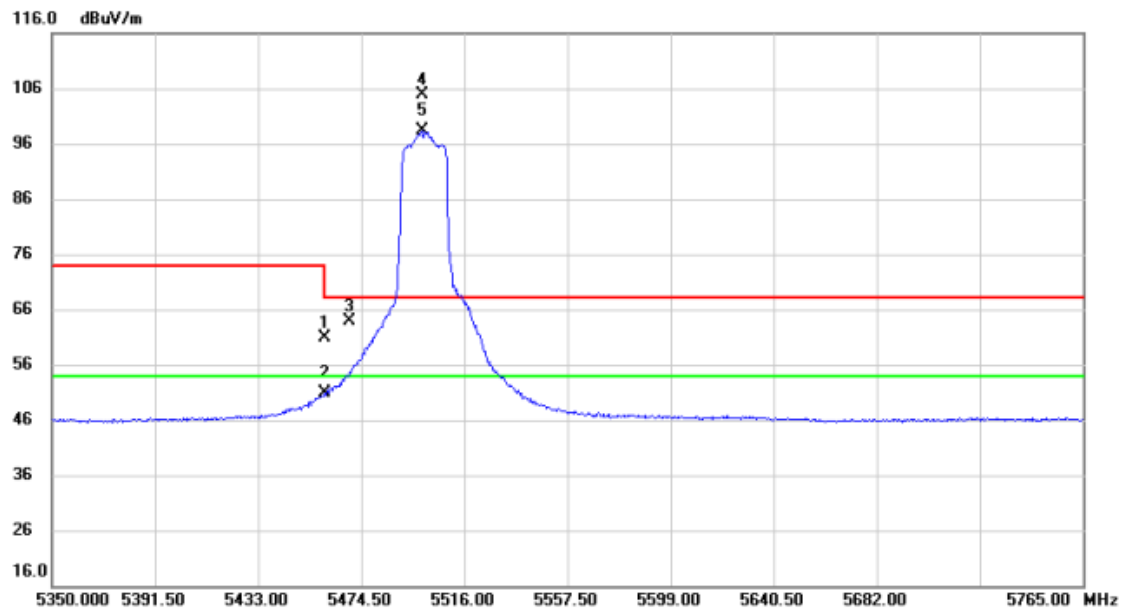


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1       | 5460.000     | 20.05                    | 40.80                   | 60.85                      | 74.00           | -13.15       | peak     |          |
| 2       | 5460.000     | 9.96                     | 40.80                   | 50.76                      | 54.00           | -3.24        | AVG      |          |
| 3       | 5470.000     | 23.03                    | 40.82                   | 63.85                      | 68.20           | -4.35        | peak     |          |
| 4 X     | 5498.985     | 64.09                    | 40.87                   | 104.96                     | 68.20           | 36.76        | peak     | No limit |
| 5 *     | 5498.985     | 57.45                    | 40.87                   | 98.32                      | 54.00           | 44.32        | AVG      | No limit |

# REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

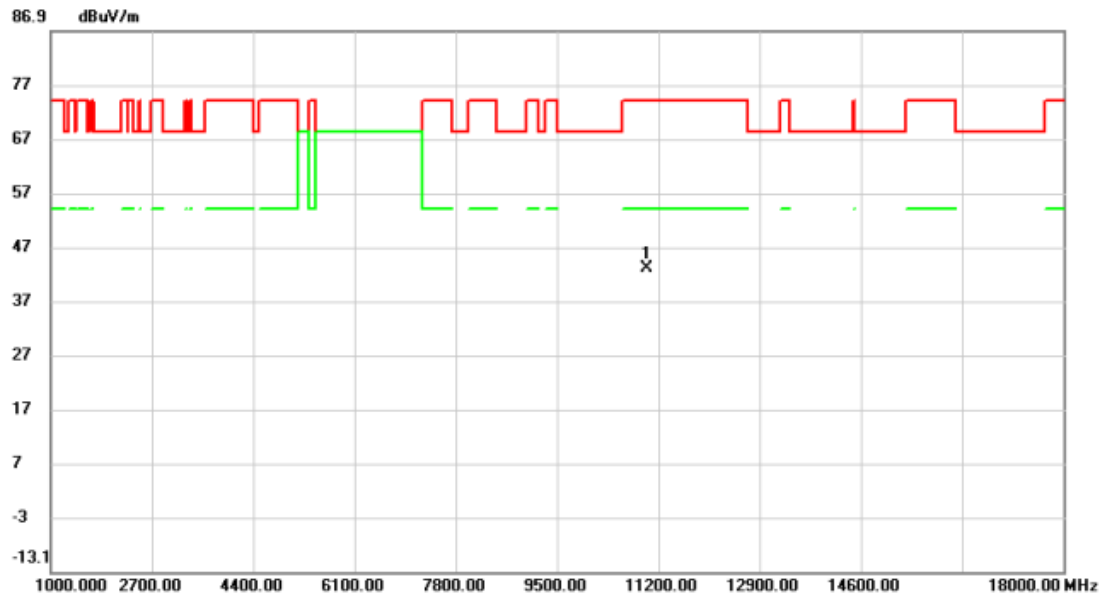


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 11000.00     | 51.60                    | -8.58                   | 43.02                      | 74.00           | -30.98       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

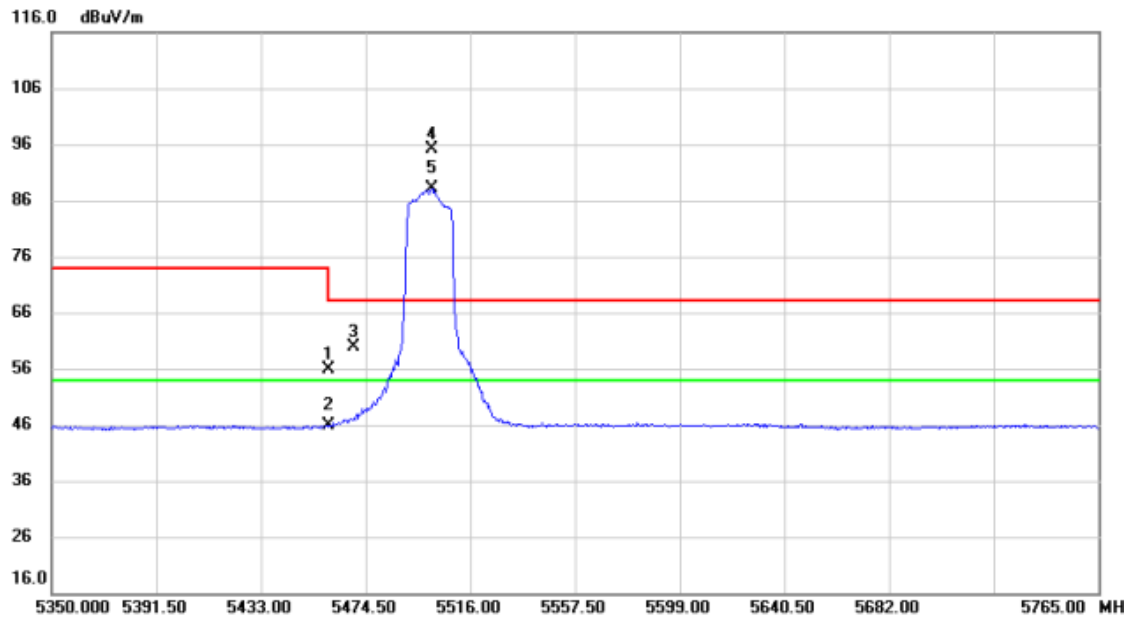


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 15.03                    | 40.80                   | 55.83                      | 74.00           | -18.17       | peak     |          |
| 2   |     | 5460.000     | 5.19                     | 40.80                   | 45.99                      | 54.00           | -8.01        | AVG      |          |
| 3   |     | 5470.000     | 18.98                    | 40.82                   | 59.80                      | 68.20           | -8.40        | peak     |          |
| 4   | X   | 5500.852     | 54.15                    | 40.88                   | 95.03                      | 68.20           | 26.83        | peak     | No limit |
| 5   | *   | 5500.852     | 47.32                    | 40.88                   | 88.20                      | 54.00           | 34.20        | AVG      | No limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

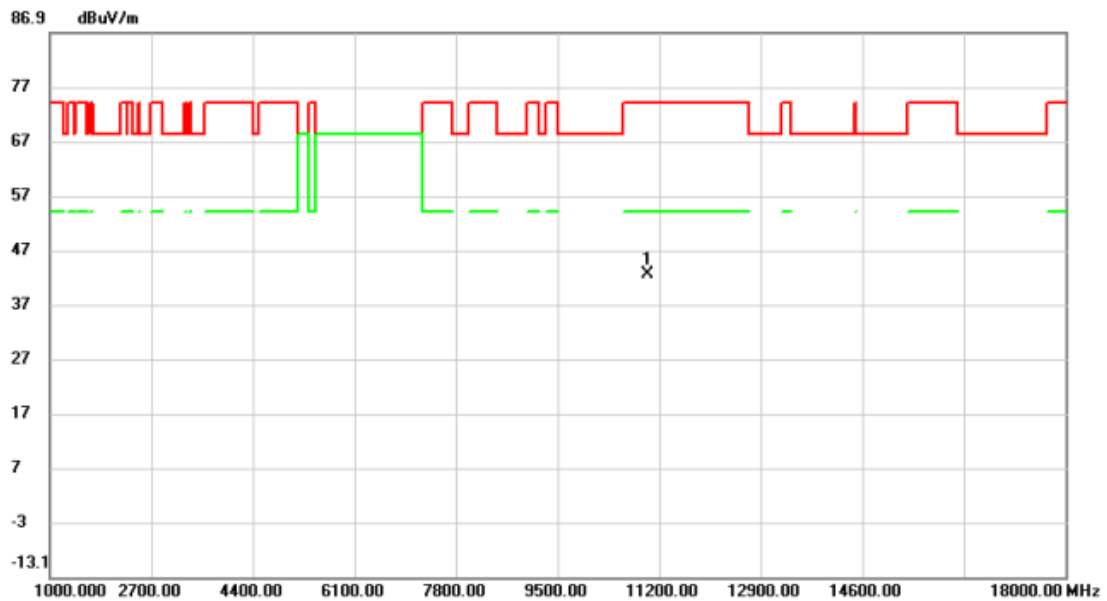


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11000.00 | 51.17         | -8.58          | 42.59       | 74.00  | -31.41 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

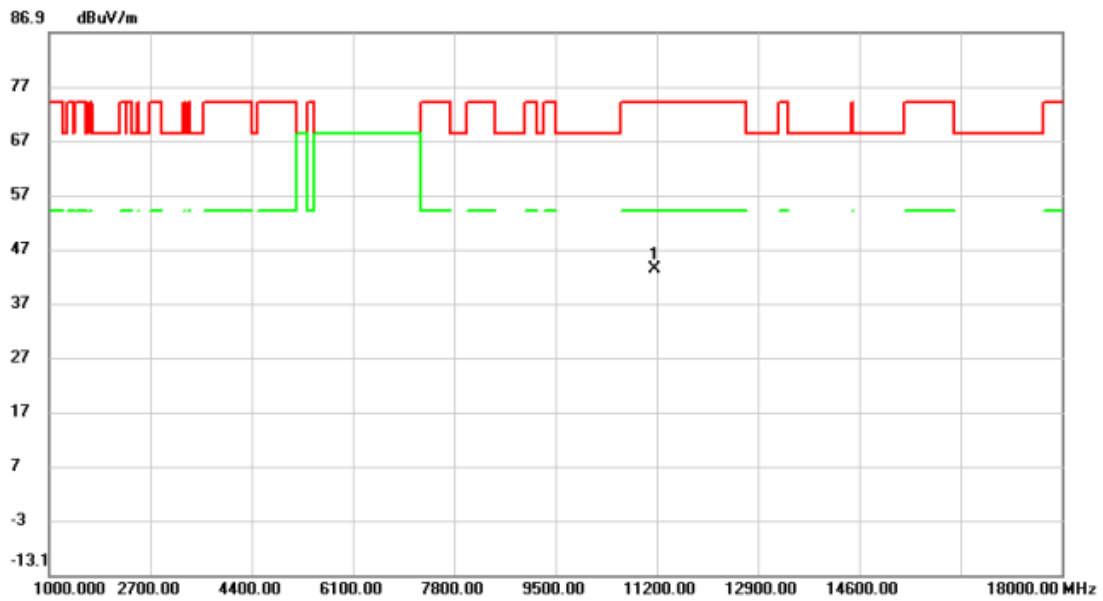


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11160.00     | 51.63                    | -8.42                   | 43.21                      | 74.00           | -30.79       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

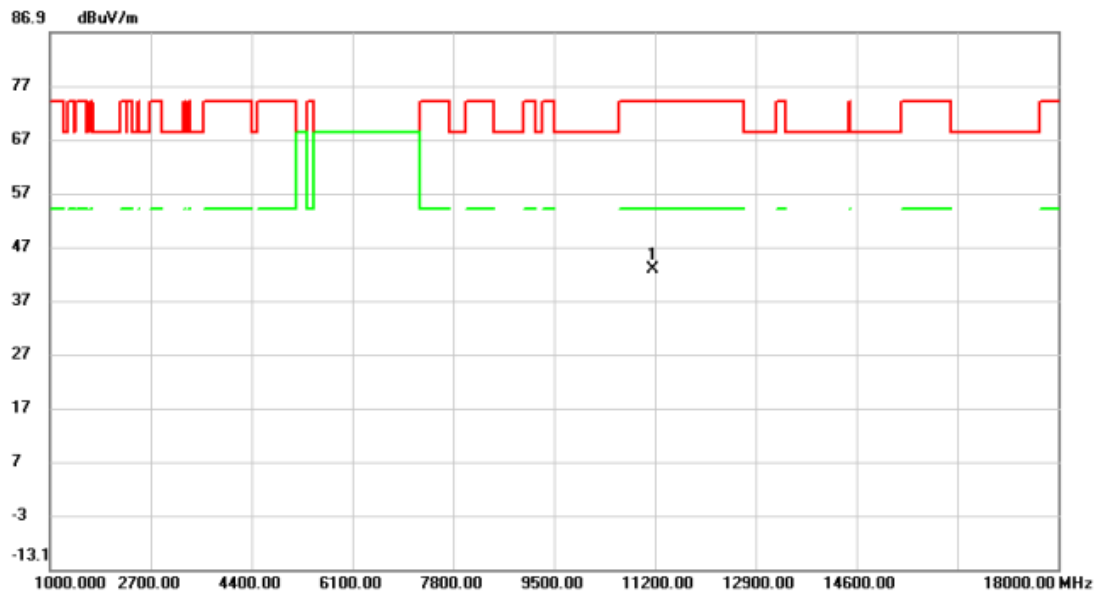


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11160.00     | 51.14                    | -8.42                   | 42.72                      | 74.00           | -31.28       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

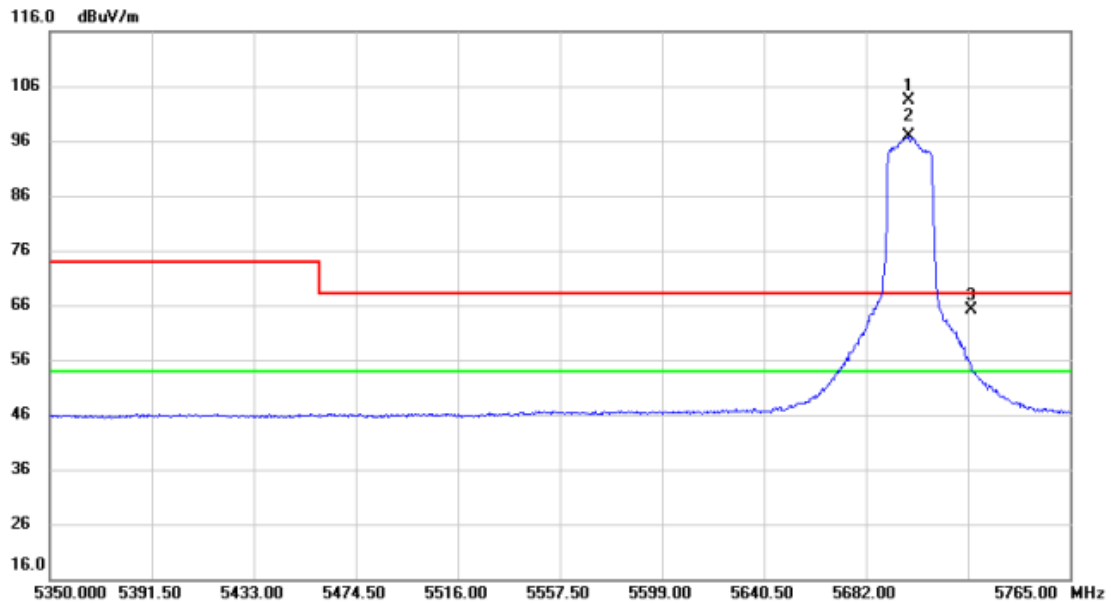


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5699.430     | 62.12                    | 41.37                   | 103.49                     | 68.20           | 35.29        | peak     | No limit |
| 2   | *   | 5699.430     | 55.49                    | 41.37                   | 96.86                      | 54.00           | 42.86        | AVG      | No limit |
| 3   |     | 5725.000     | 23.69                    | 41.43                   | 65.12                      | 68.20           | -3.08        | peak     |          |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

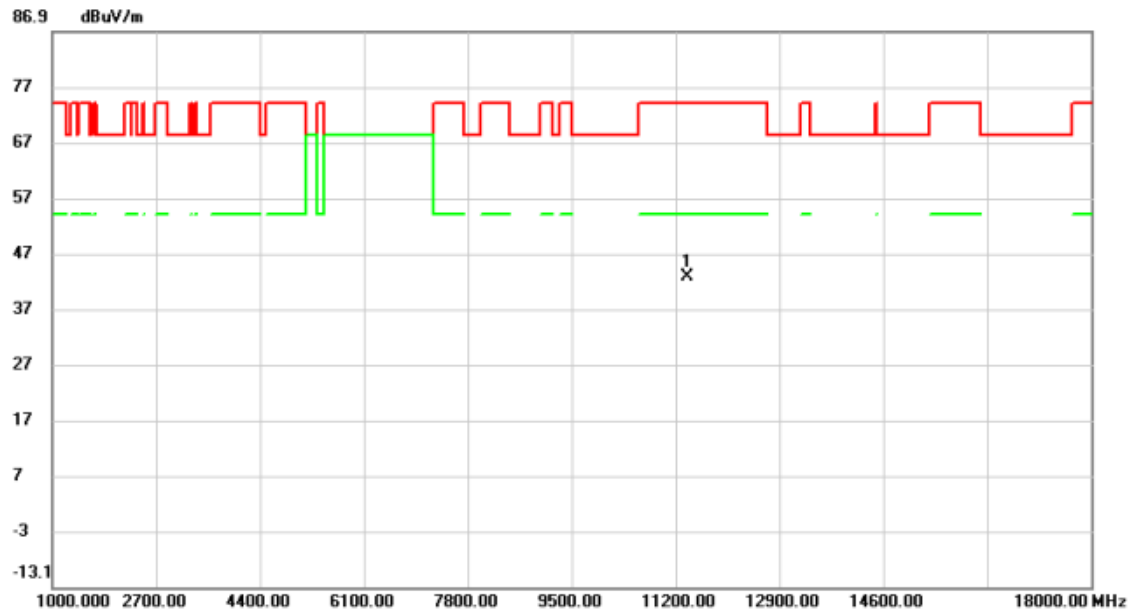


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11400.00 | 50.95         | -8.21          | 42.74       | 74.00  | -31.26 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

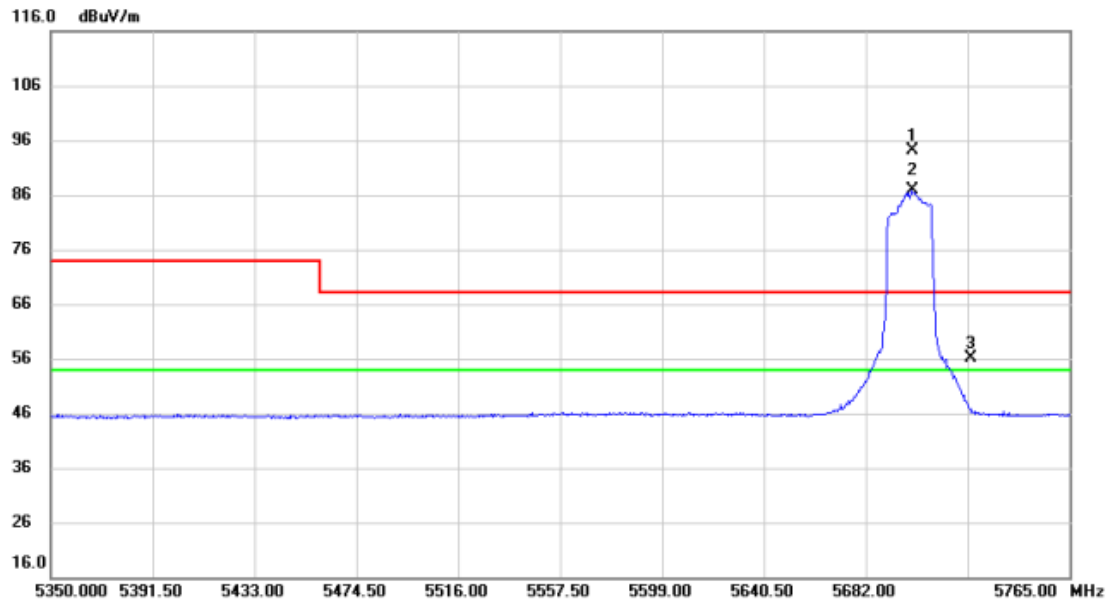


| No. Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|---------|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1 X     | 5700.882 | 52.65         | 41.37          | 94.02       | 68.20  | 25.82  | peak     | No limit |
| 2 *     | 5700.882 | 45.42         | 41.37          | 86.79       | 54.00  | 32.79  | AVG      | No limit |
| 3       | 5725.000 | 14.81         | 41.43          | 56.24       | 68.20  | -11.96 | peak     |          |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

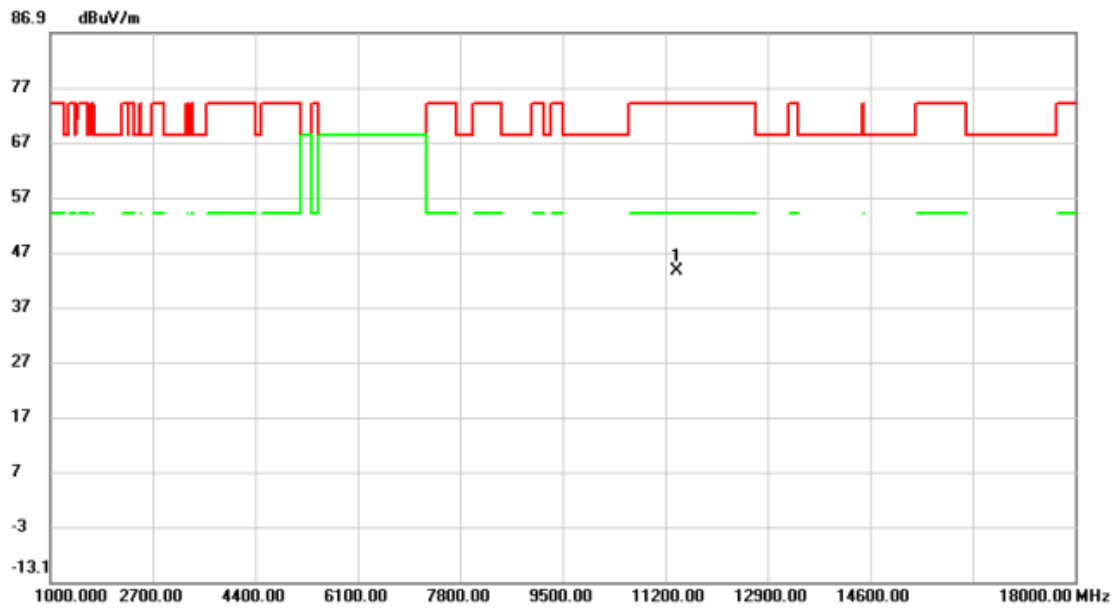


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11400.00 | 51.65         | -8.21          | 43.44       | 74.00  | -30.56 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

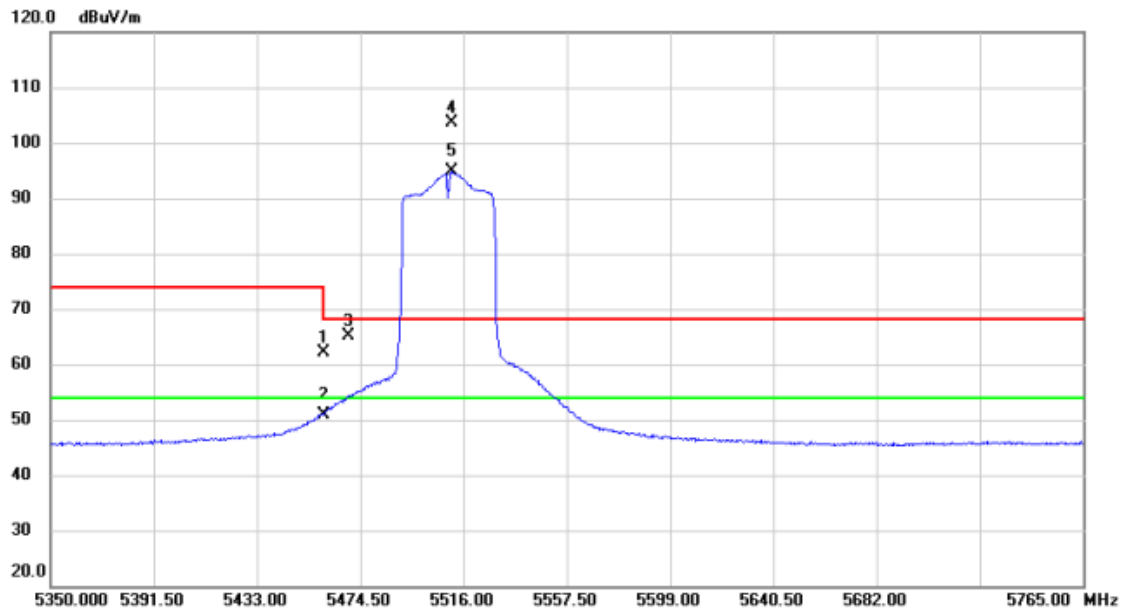


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 21.42                    | 40.80                   | 62.22                      | 74.00           | -11.78       | peak     |          |
| 2   |     | 5460.000     | 10.16                    | 40.80                   | 50.96                      | 54.00           | -3.04        | AVG      |          |
| 3   |     | 5470.000     | 24.24                    | 40.82                   | 65.06                      | 68.20           | -3.14        | peak     |          |
| 4   | X   | 5511.435     | 62.72                    | 40.90                   | 103.62                     | 68.20           | 35.42        | peak     | No limit |
| 5   | *   | 5511.435     | 53.86                    | 40.90                   | 94.76                      | 54.00           | 40.76        | AVG      | No limit |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

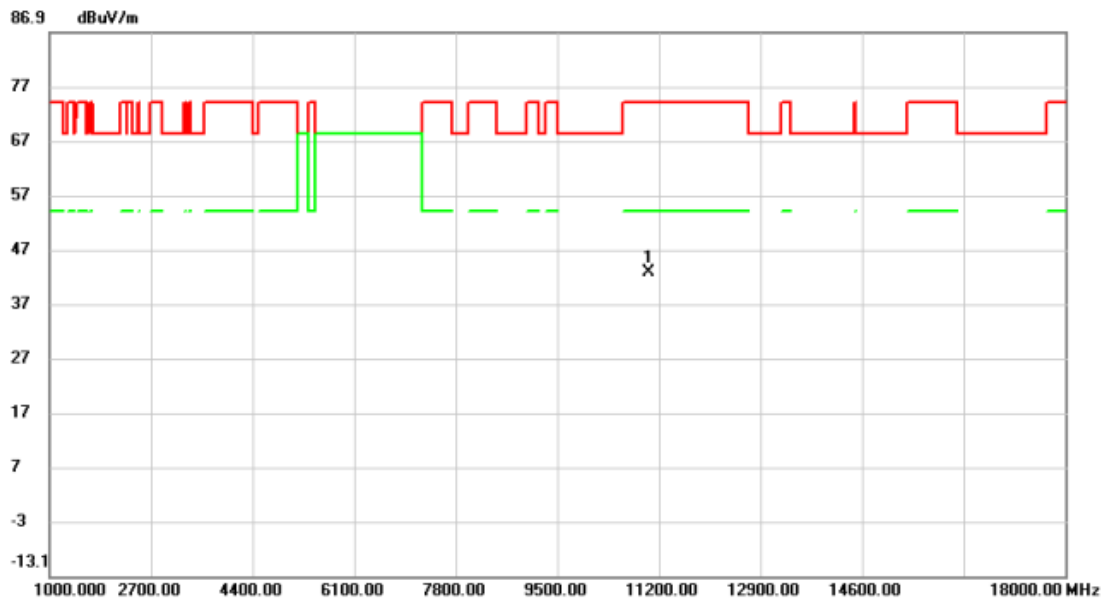


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11020.00 | 51.36         | -8.56          | 42.80       | 74.00  | -31.20 | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

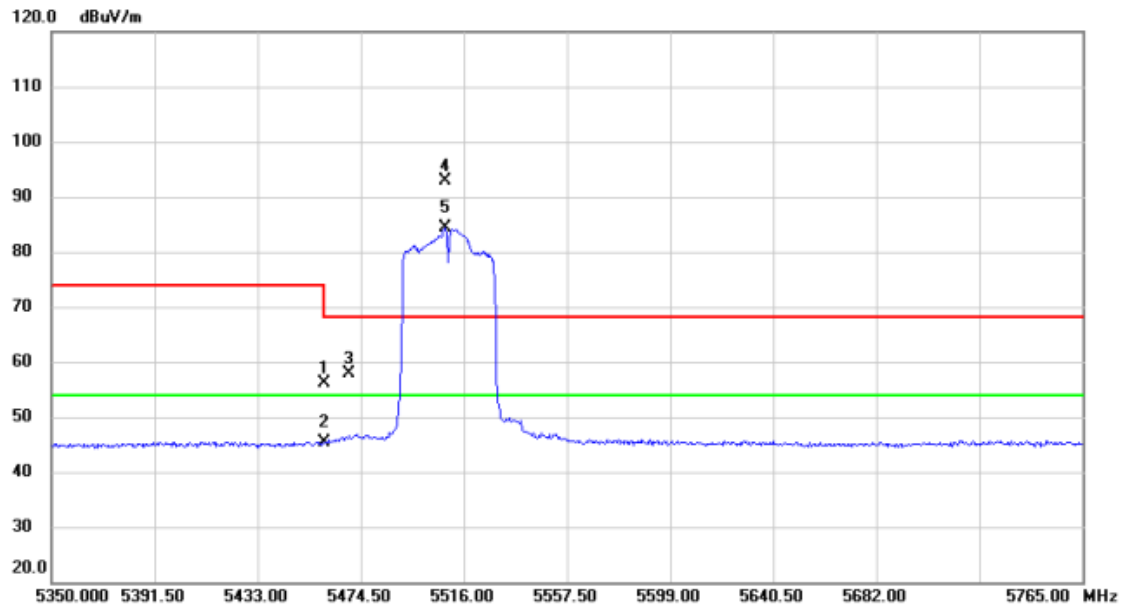


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1       | 5460.000     | 15.45                    | 40.80                   | 56.25                      | 74.00           | -17.75       | peak     |          |
| 2       | 5460.000     | 4.58                     | 40.80                   | 45.38                      | 54.00           | -8.62        | AVG      |          |
| 3       | 5470.000     | 17.14                    | 40.82                   | 57.96                      | 68.20           | -10.24       | peak     |          |
| 4 X     | 5508.738     | 51.88                    | 40.90                   | 92.78                      | 68.20           | 24.58        | peak     | No limit |
| 5 *     | 5508.738     | 43.59                    | 40.90                   | 84.49                      | 54.00           | 30.49        | AVG      | No limit |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

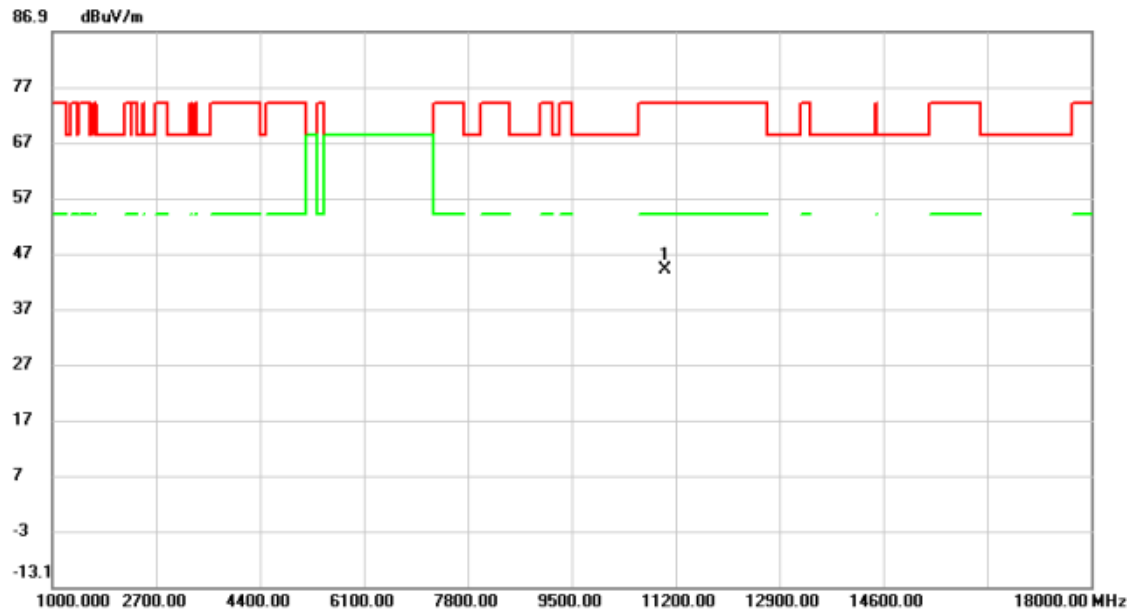


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11020.00     | 52.71                    | -8.56                   | 44.15                      | 74.00           | -29.85       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5550 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

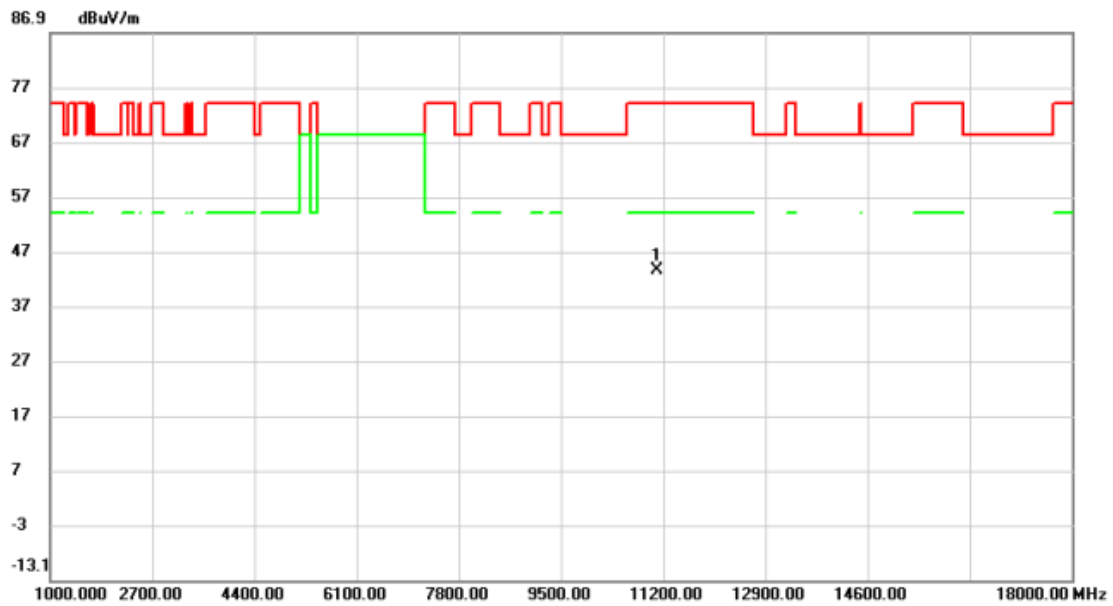


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11100.00     | 52.08                    | -8.48                   | 43.60                      | 74.00           | -30.40       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

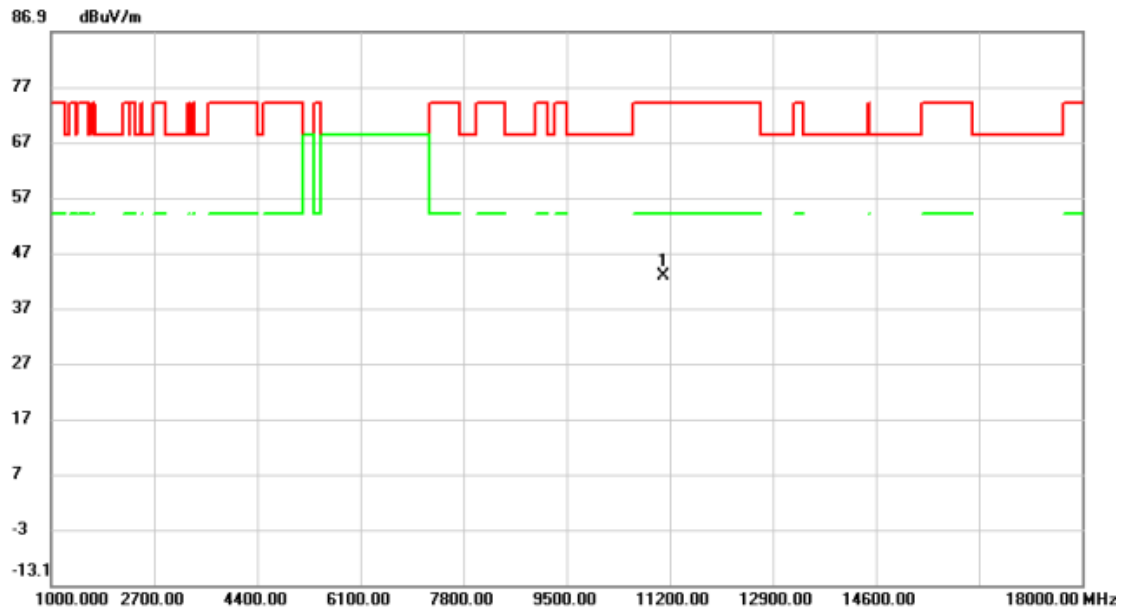


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11100.00 | 51.16         | -8.48          | 42.68       | 74.00  | -31.32 | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

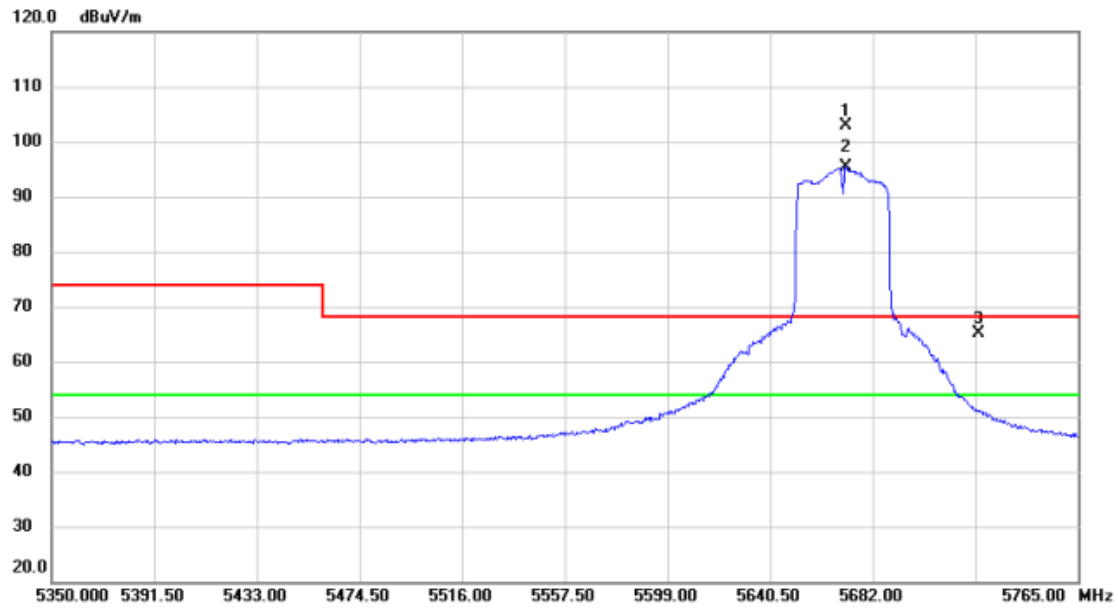


| No. Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|---------|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1 X     | 5671.002 | 61.57         | 41.30          | 102.87      | 68.20  | 34.67  | peak     | No limit |
| 2 *     | 5671.002 | 54.13         | 41.30          | 95.43       | 54.00  | 41.43  | AVG      | No limit |
| 3       | 5725.000 | 23.69         | 41.43          | 65.12       | 68.20  | -3.08  | peak     |          |

# REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

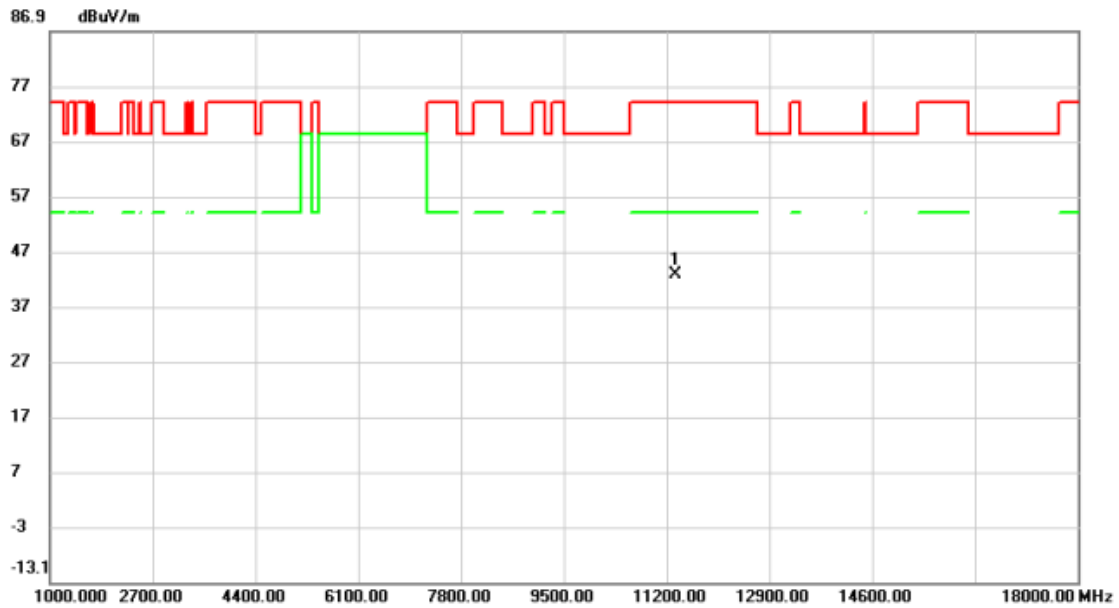


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11340.00     | 51.07                    | -8.26                   | 42.81                      | 74.00           | -31.19       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

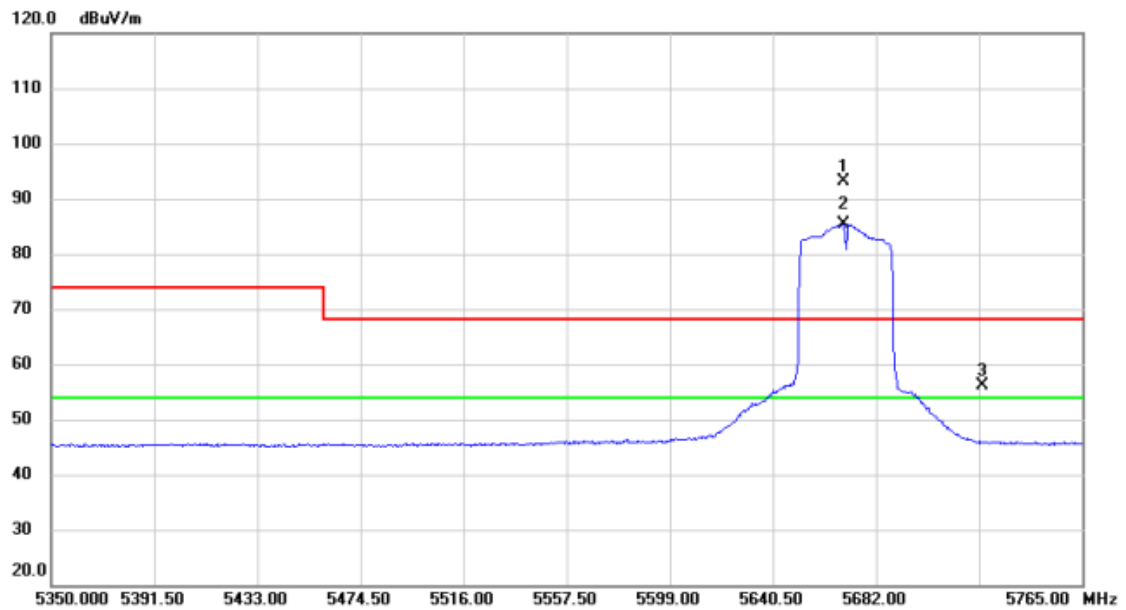


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1 X     | 5668.927     | 51.95                    | 41.29                   | 93.24                      | 68.20           | 25.04        | peak     | No limit |
| 2 *     | 5668.927     | 44.18                    | 41.29                   | 85.47                      | 54.00           | 31.47        | AVG      | No limit |
| 3       | 5725.000     | 14.70                    | 41.43                   | 56.13                      | 68.20           | -12.07       | peak     |          |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

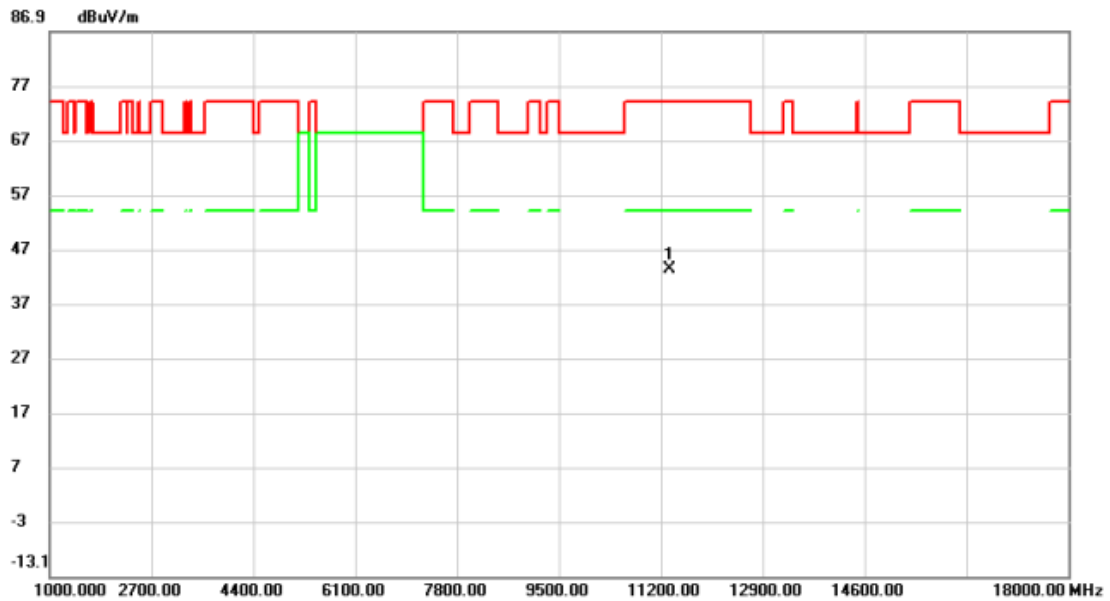


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11340.00     | 51.48                    | -8.26                   | 43.22                      | 74.00           | -30.78       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

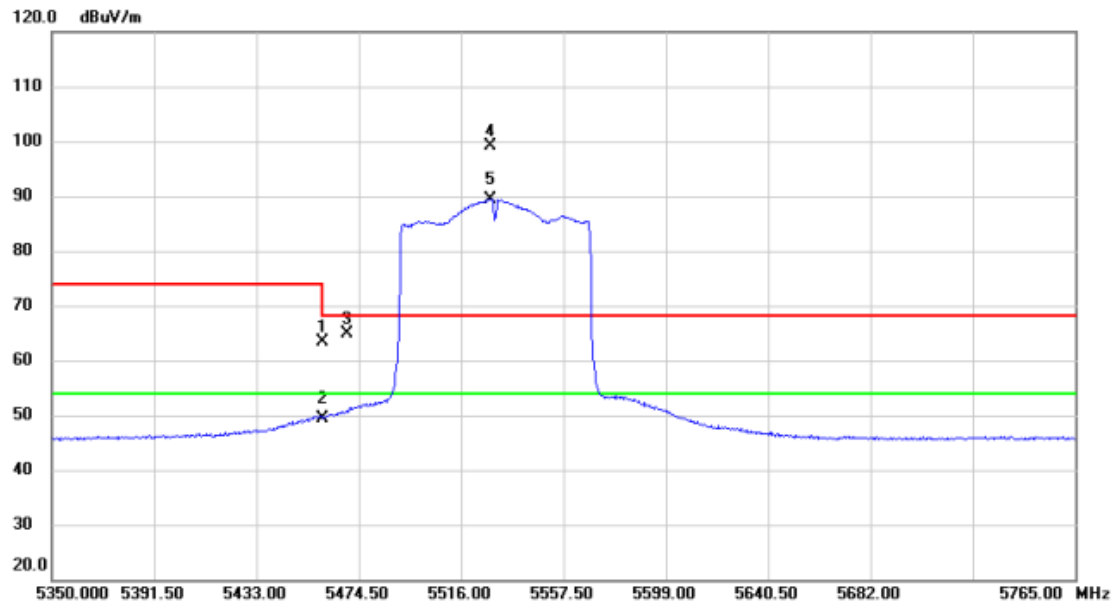


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 22.65                    | 40.80                   | 63.45                      | 74.00           | -10.55       | peak     |          |
| 2   |     | 5460.000     | 8.66                     | 40.80                   | 49.46                      | 54.00           | -4.54        | AVG      |          |
| 3   |     | 5470.000     | 24.15                    | 40.82                   | 64.97                      | 68.20           | -3.23        | peak     |          |
| 4   | X   | 5527.828     | 58.23                    | 40.94                   | 99.17                      | 68.20           | 30.97        | peak     | No limit |
| 5   | *   | 5527.828     | 48.42                    | 40.94                   | 89.36                      | 54.00           | 35.36        | AVG      | No limit |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

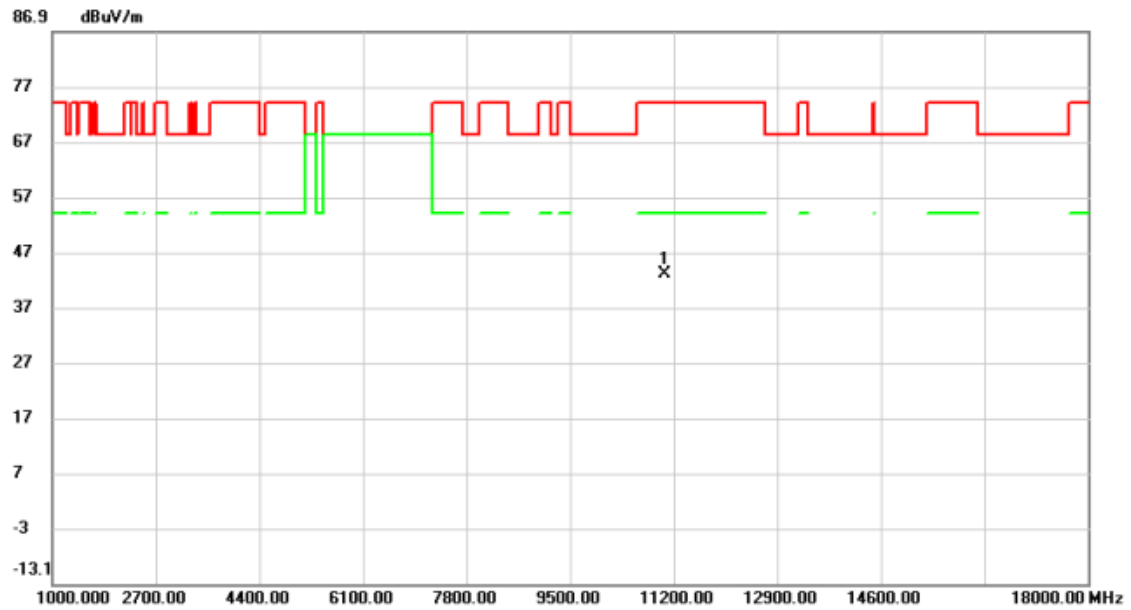


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11060.00     | 51.50                    | -8.53                   | 42.97                      | 74.00           | -31.03       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

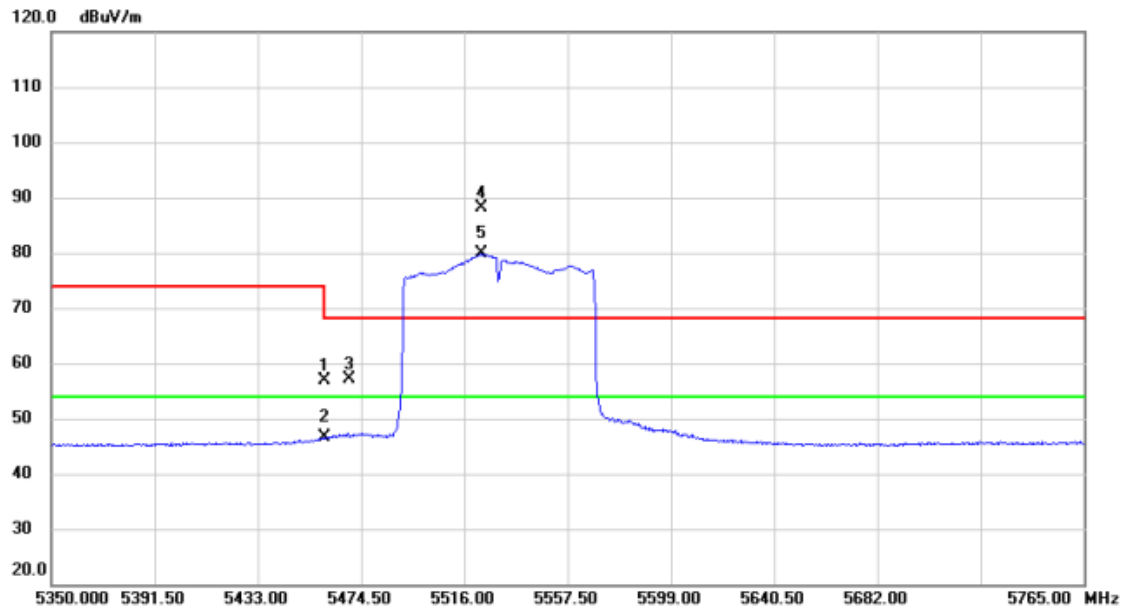


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1       | 5460.000     | 16.07                    | 40.80                   | 56.87                      | 74.00           | -17.13       | peak     |          |
| 2       | 5460.000     | 5.74                     | 40.80                   | 46.54                      | 54.00           | -7.46        | AVG      |          |
| 3       | 5470.000     | 16.23                    | 40.82                   | 57.05                      | 68.20           | -11.15       | peak     |          |
| 4 X     | 5522.640     | 47.10                    | 40.93                   | 88.03                      | 68.20           | 19.83        | peak     | No limit |
| 5 *     | 5522.640     | 38.83                    | 40.93                   | 79.76                      | 54.00           | 25.76        | AVG      | No limit |

# REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

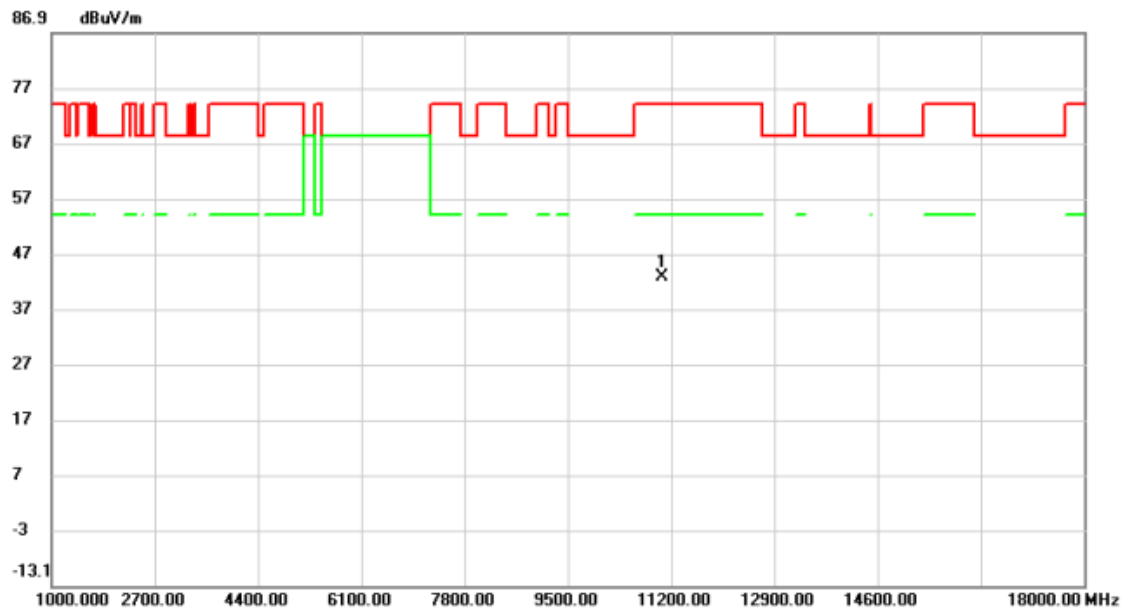


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11060.00     | 51.41                    | -8.53                   | 42.88                      | 74.00           | -31.12       | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

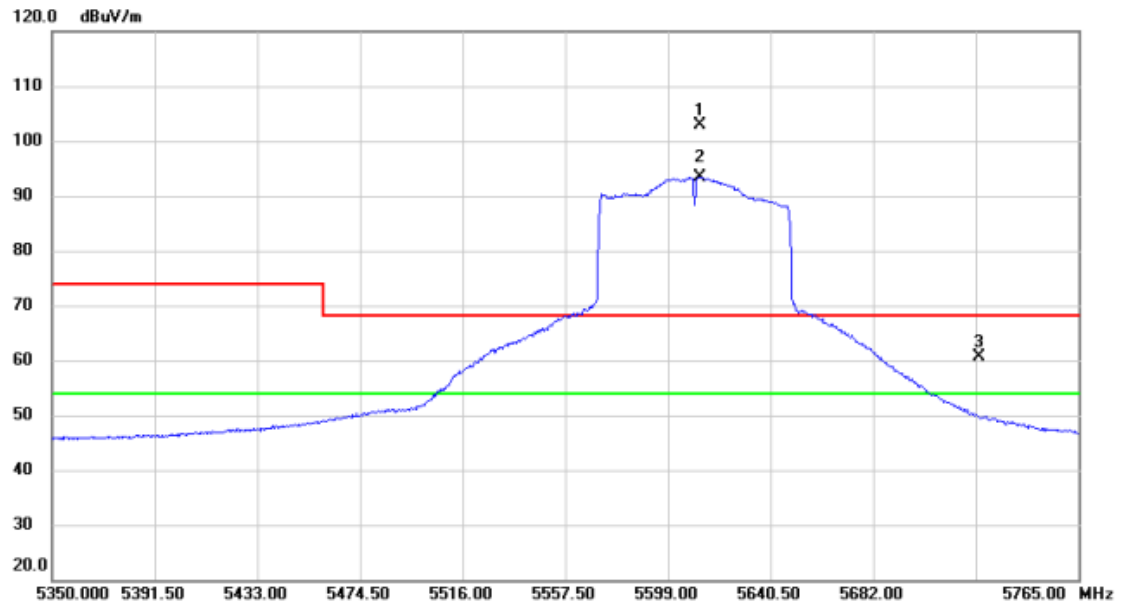


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1 X     | 5612.073     | 61.79                    | 41.15                   | 102.94                     | 68.20           | 34.74        | peak     | No limit |
| 2 *     | 5612.073     | 52.32                    | 41.15                   | 93.47                      | 54.00           | 39.47        | AVG      | No limit |
| 3       | 5725.000     | 19.16                    | 41.43                   | 60.59                      | 68.20           | -7.61        | peak     |          |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

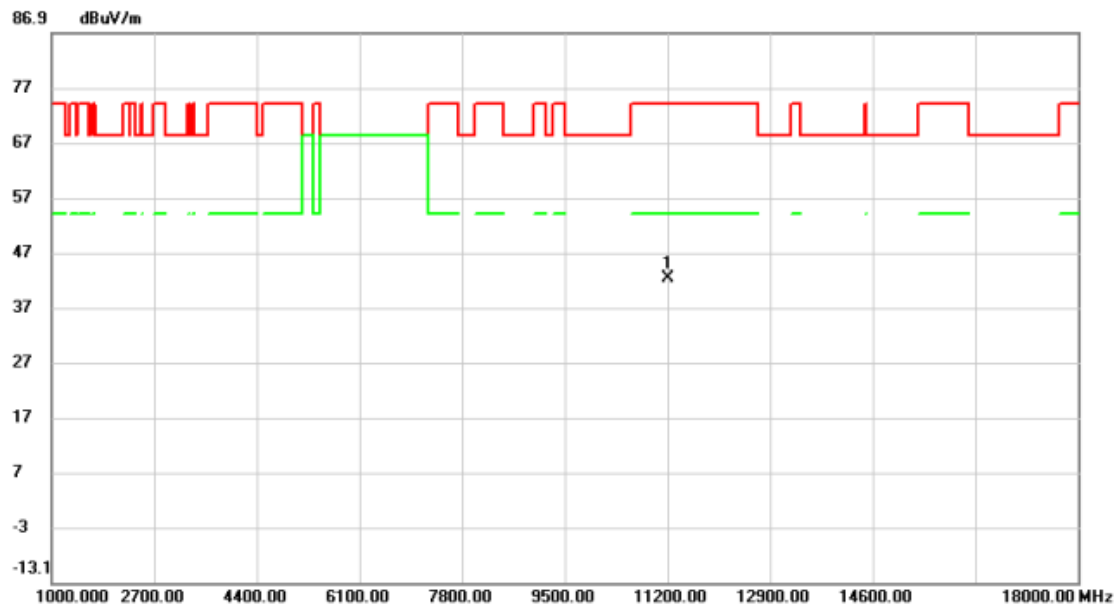


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 11220.00     | 50.62                    | -8.37                   | 42.25                      | 74.00           | -31.75       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

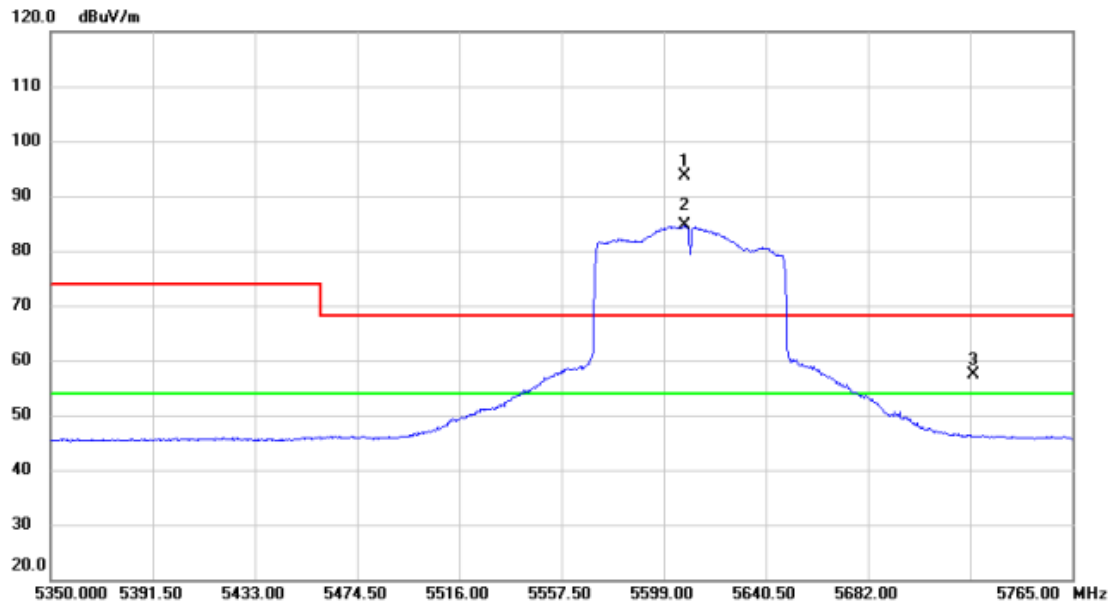


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1 X     | 5607.715     | 52.47                    | 41.14                   | 93.61                      | 68.20           | 25.41        | peak     | No limit |
| 2 *     | 5607.715     | 43.41                    | 41.14                   | 84.55                      | 54.00           | 30.55        | AVG      | No limit |
| 3       | 5725.000     | 15.97                    | 41.43                   | 57.40                      | 68.20           | -10.80       | peak     |          |

# REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

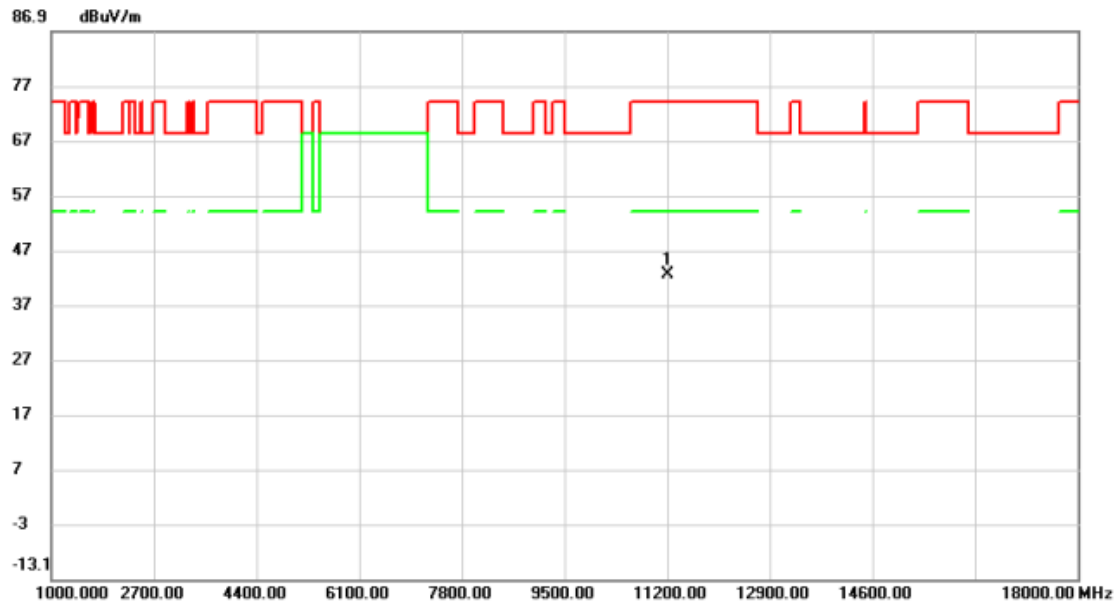


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11220.00     | 50.98                    | -8.37                   | 42.61                      | 74.00           | -31.39       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

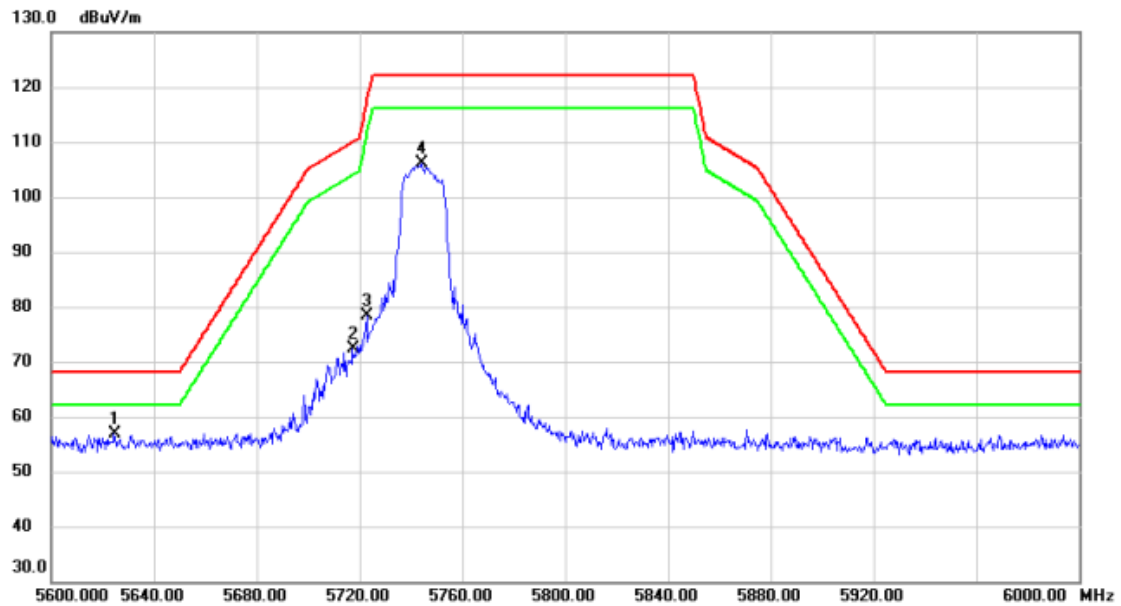


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 5624.600     | 15.59                    | 41.18                   | 56.77                      | 68.20           | -11.43       | peak     |         |
| 2   |     | 5717.400     | 30.90                    | 41.41                   | 72.31                      | 110.07          | -37.76       | peak     |         |
| 3   |     | 5722.800     | 36.83                    | 41.43                   | 78.26                      | 117.18          | -38.92       | peak     |         |
| 4   |     | 5744.200     | 64.65                    | 41.48                   | 106.13                     | 122.20          | -16.07       | peak     |         |

#### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

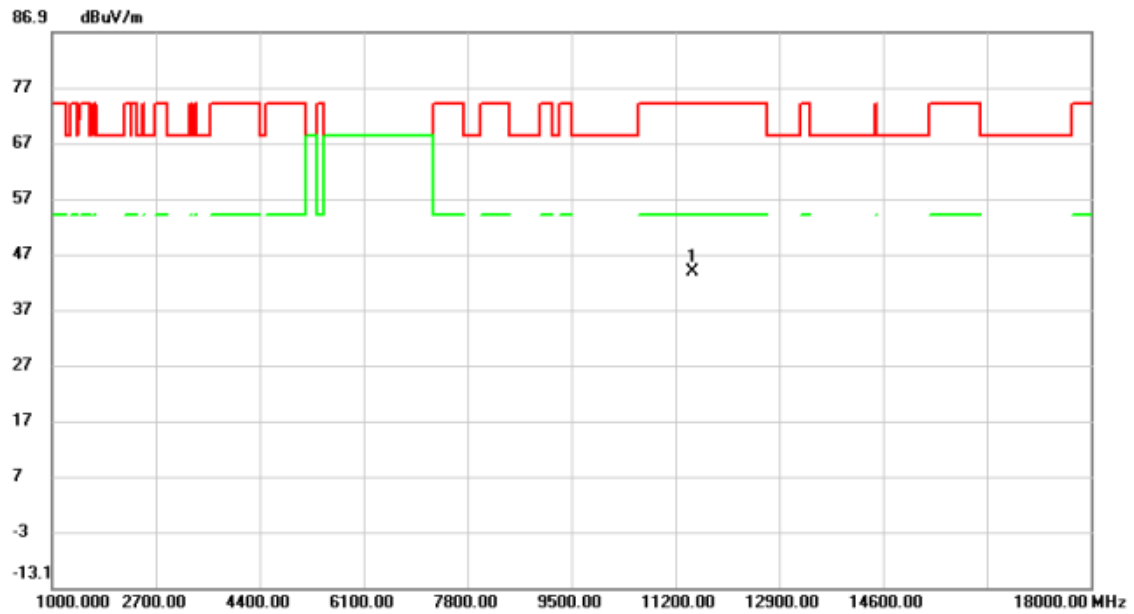


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11490.00     | 51.92                    | -8.03                   | 43.89                      | 74.00           | -30.11       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

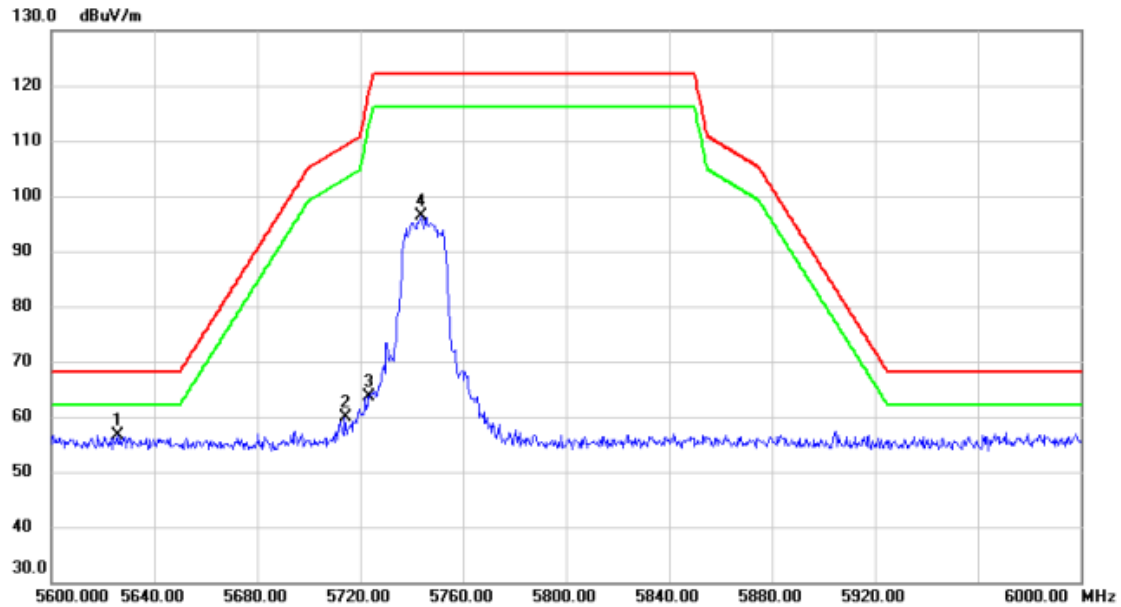


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 5625.600     | 15.54                    | 41.18                   | 56.72                      | 68.20           | -11.48       | peak     |         |
| 2       | 5714.200     | 18.39                    | 41.41                   | 59.80                      | 109.18          | -49.38       | peak     |         |
| 3       | 5723.400     | 22.29                    | 41.43                   | 63.72                      | 118.55          | -54.83       | peak     |         |
| 4       | 5743.800     | 54.91                    | 41.47                   | 96.38                      | 122.20          | -25.82       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

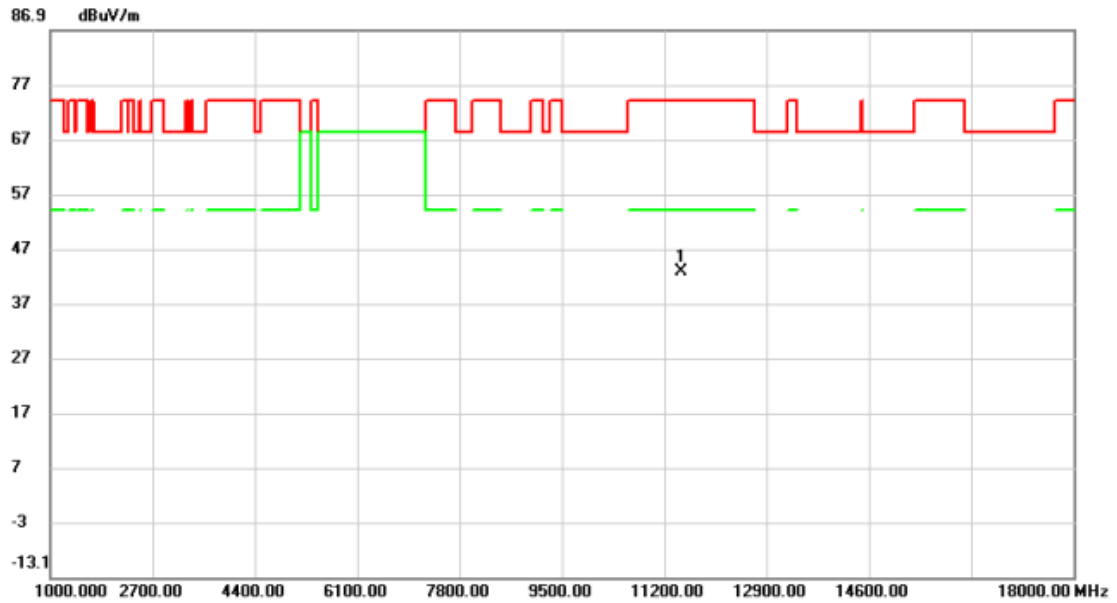


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11490.00     | 50.90                    | -8.03                   | 42.87                      | 74.00           | -31.13       | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

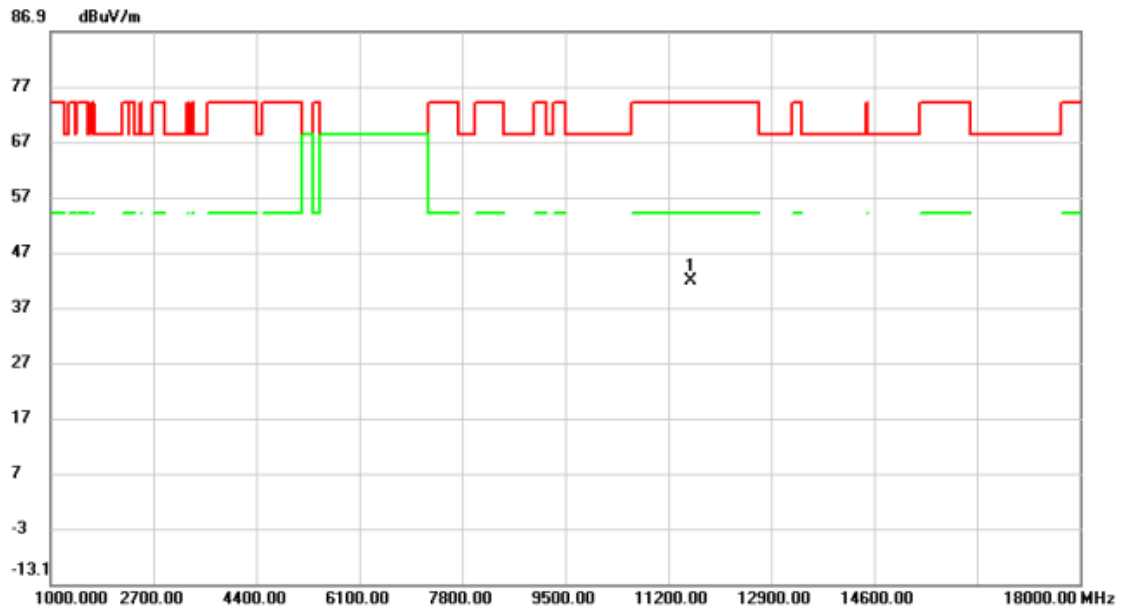


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11570.00 | 49.66         | -7.98          | 41.68       | 74.00  | -32.32 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

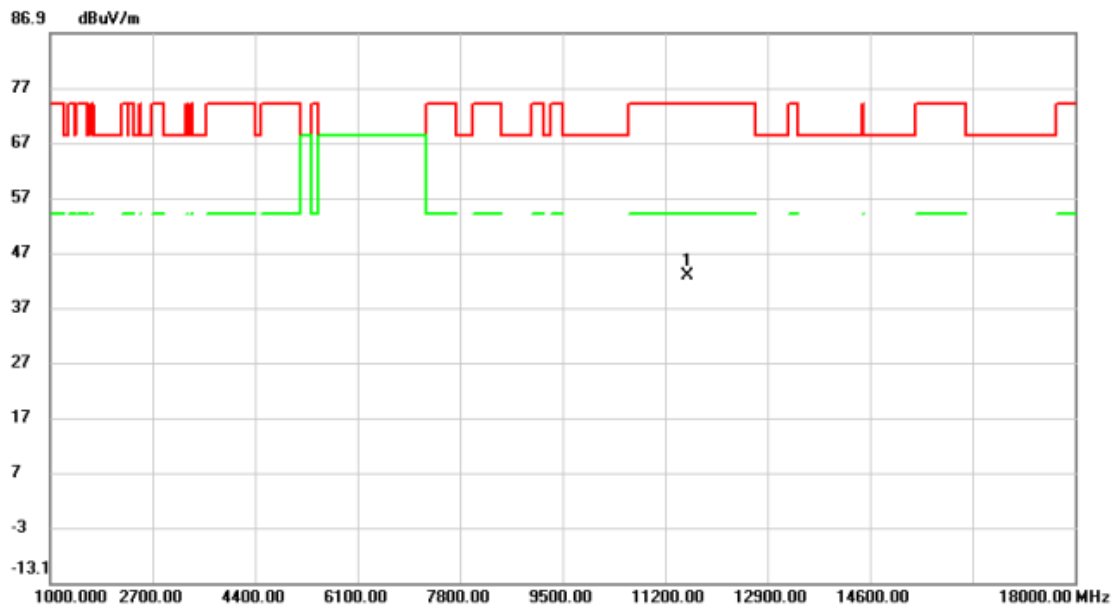


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11570.00     | 50.68                    | -7.98                   | 42.70                      | 74.00           | -31.30       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

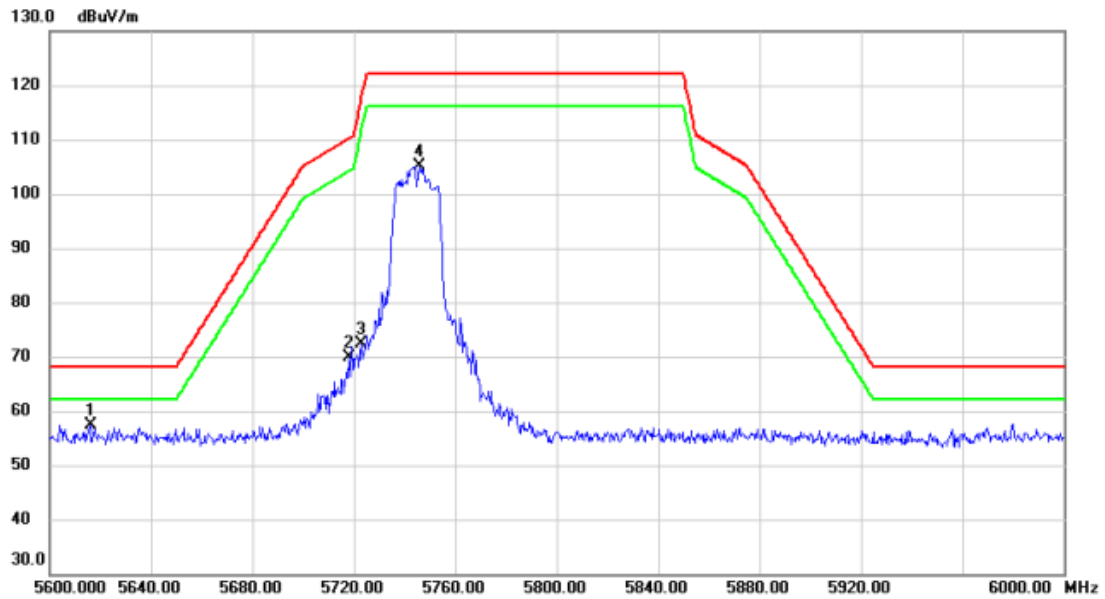


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 5616.000     | 16.27                    | 41.16                   | 57.43                      | 68.20           | -10.77       | peak     |         |
| 2   |     | 5718.200     | 28.51                    | 41.41                   | 69.92                      | 110.30          | -40.38       | peak     |         |
| 3   |     | 5722.800     | 31.04                    | 41.43                   | 72.47                      | 117.18          | -44.71       | peak     |         |
| 4   |     | 5746.000     | 63.55                    | 41.49                   | 105.04                     | 122.20          | -17.16       | peak     |         |

# REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

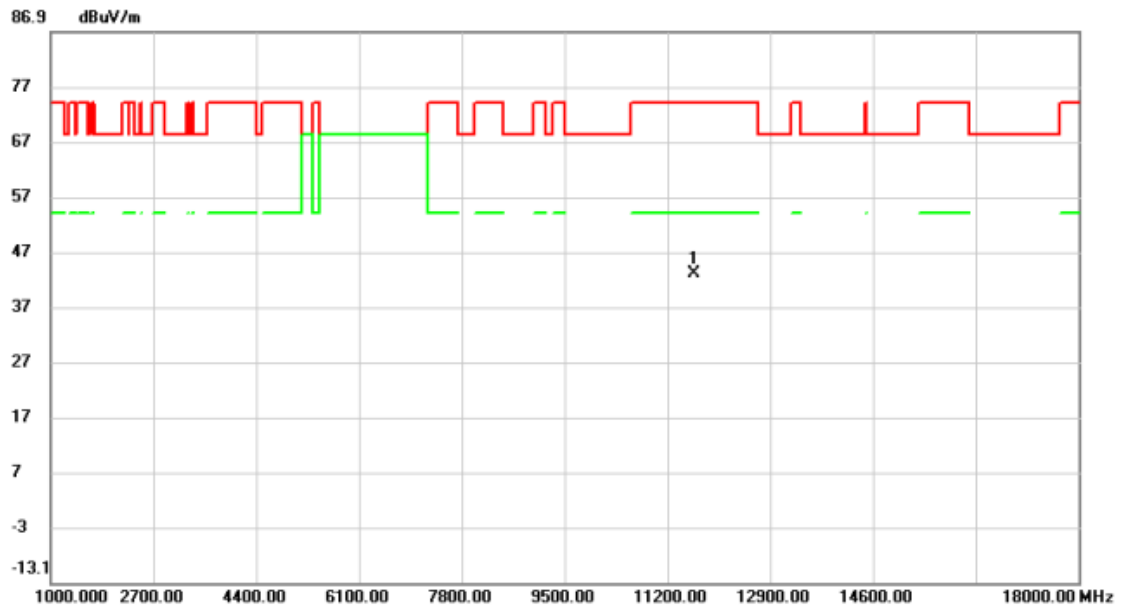


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11650.00     | 51.12                    | -8.07                   | 43.05                      | 74.00           | -30.95       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

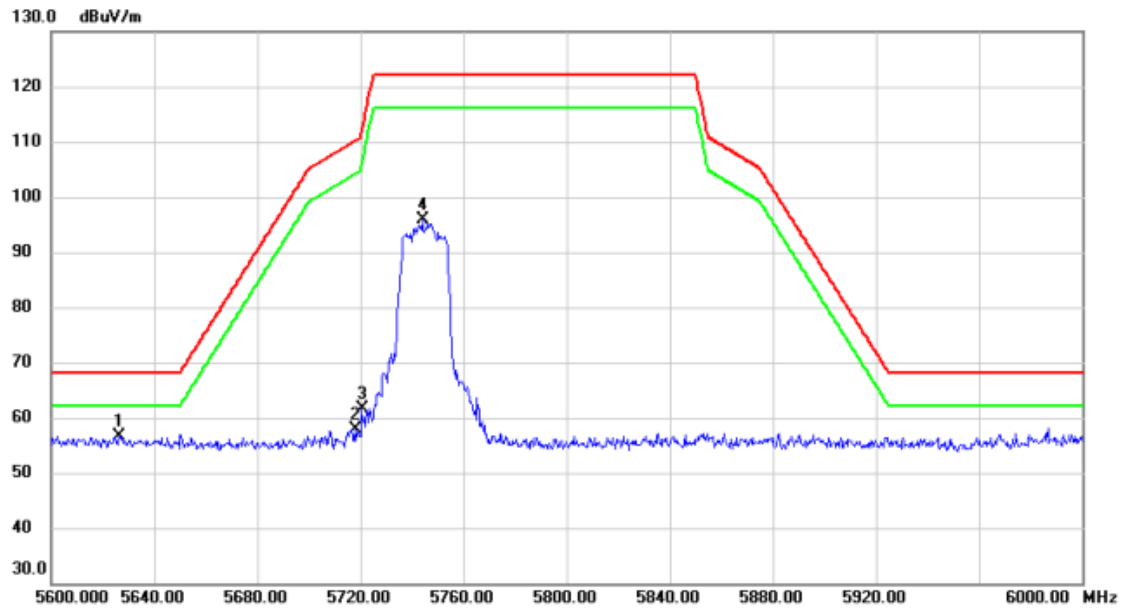


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 5626.600     | 15.53                    | 41.19                   | 56.72                      | 68.20           | -11.48       | peak     |         |
| 2       | 5718.200     | 16.55                    | 41.41                   | 57.96                      | 110.30          | -52.34       | peak     |         |
| 3       | 5720.600     | 20.16                    | 41.42                   | 61.58                      | 112.17          | -50.59       | peak     |         |
| 4       | 5744.000     | 54.30                    | 41.47                   | 95.77                      | 122.20          | -26.43       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

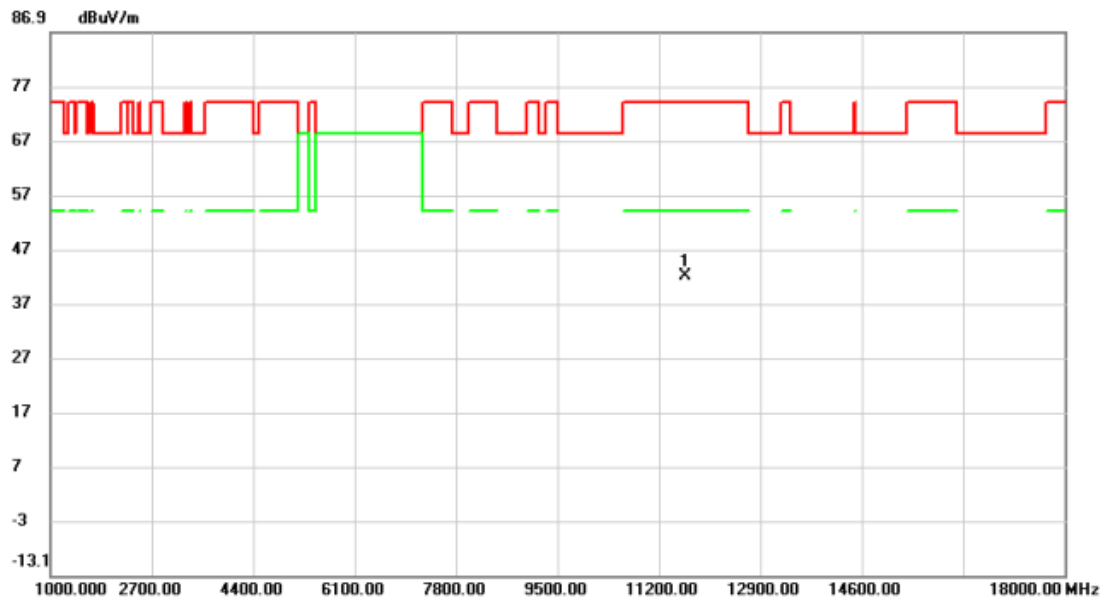


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11650.00 | 50.16         | -8.07          | 42.09       | 74.00  | -31.91 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

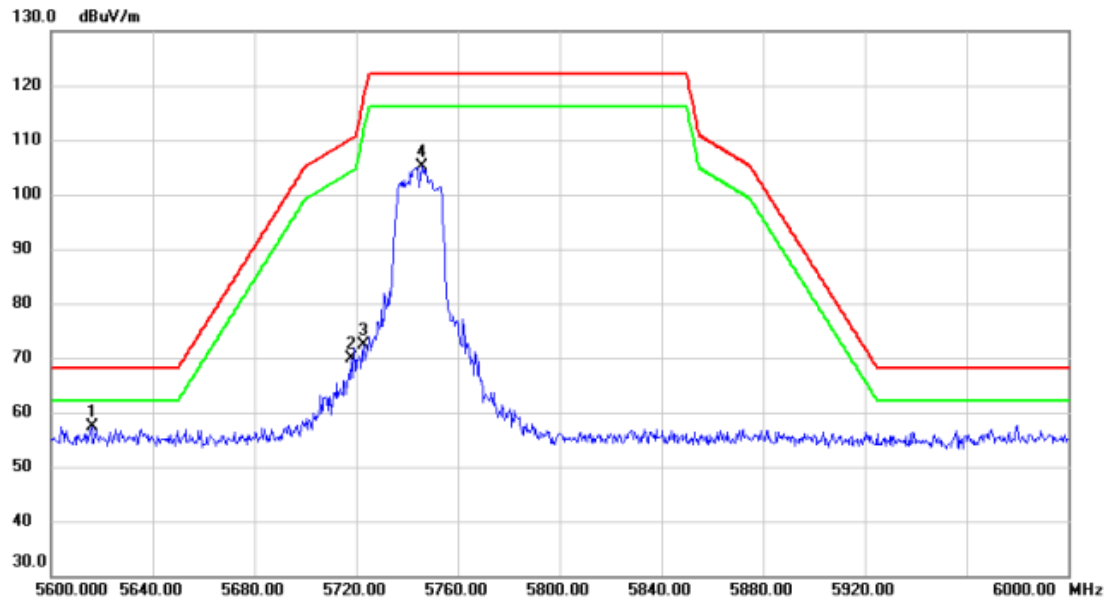


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 5616.000     | 16.27                    | 41.16                   | 57.43                      | 68.20           | -10.77       | peak     |         |
| 2       | 5718.200     | 28.51                    | 41.41                   | 69.92                      | 110.30          | -40.38       | peak     |         |
| 3       | 5722.800     | 31.04                    | 41.43                   | 72.47                      | 117.18          | -44.71       | peak     |         |
| 4       | 5746.000     | 63.55                    | 41.49                   | 105.04                     | 122.20          | -17.16       | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

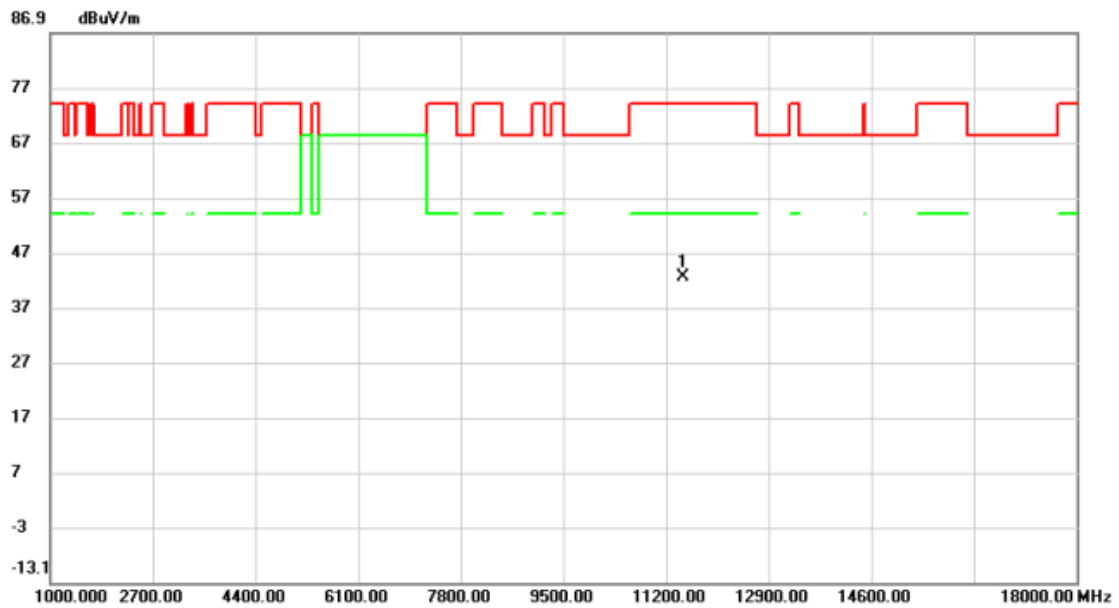


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11490.00     | 50.49                    | -8.03                   | 42.46                      | 74.00           | -31.54       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

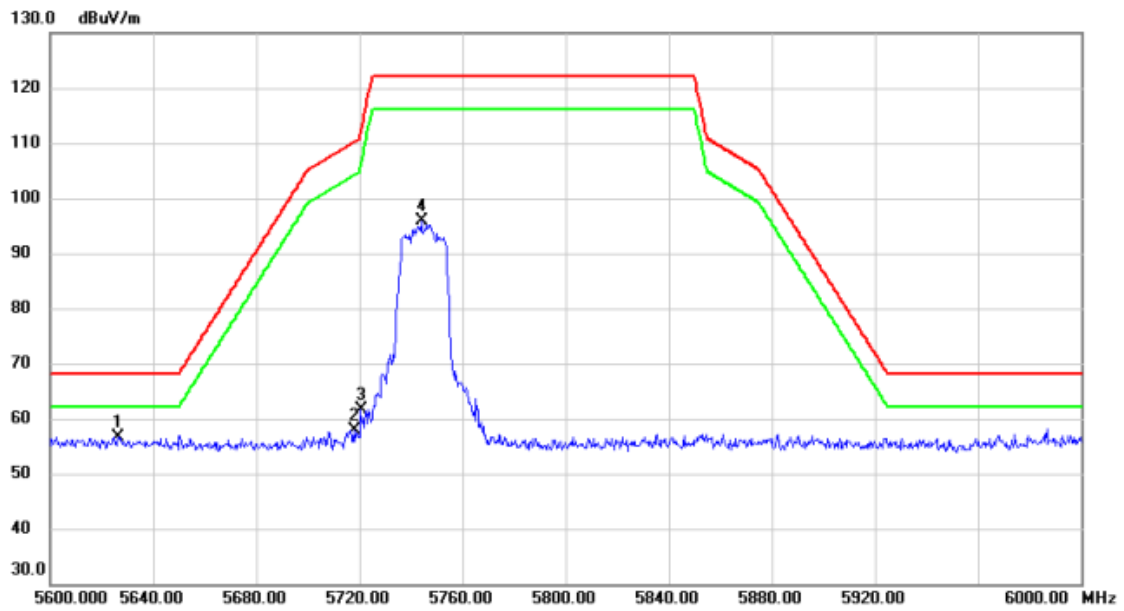


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 5626.600     | 15.53                    | 41.19                   | 56.72                      | 68.20           | -11.48       | peak     |         |
| 2       | 5718.200     | 16.55                    | 41.41                   | 57.96                      | 110.30          | -52.34       | peak     |         |
| 3       | 5720.600     | 20.16                    | 41.42                   | 61.58                      | 112.17          | -50.59       | peak     |         |
| 4       | 5744.000     | 54.30                    | 41.47                   | 95.77                      | 122.20          | -26.43       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

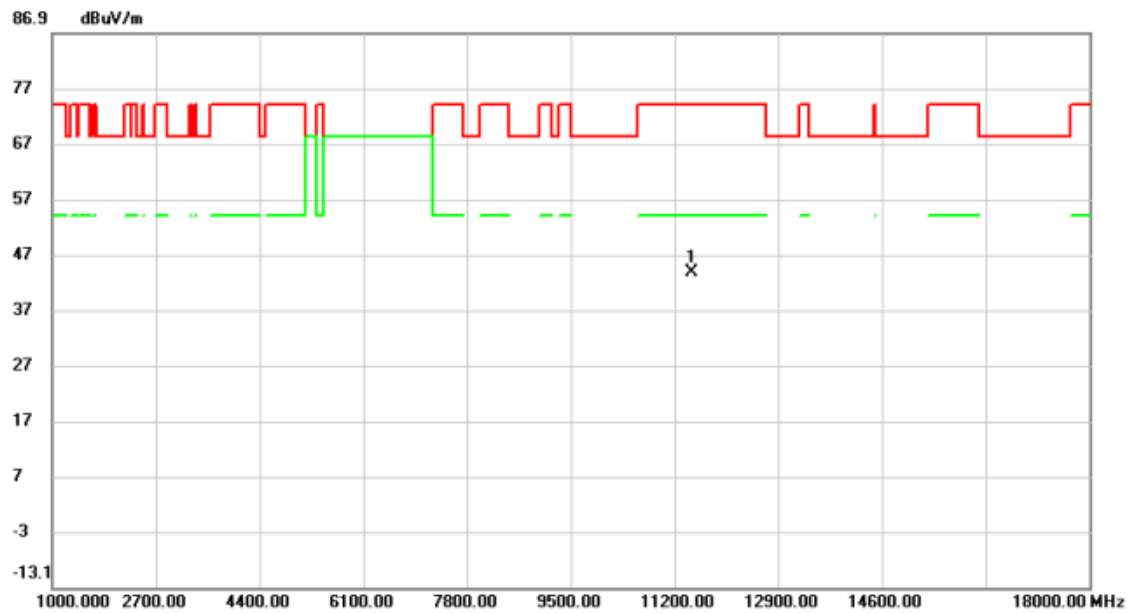


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11490.00     | 51.86                    | -8.03                   | 43.83                      | 74.00           | -30.17       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5785 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

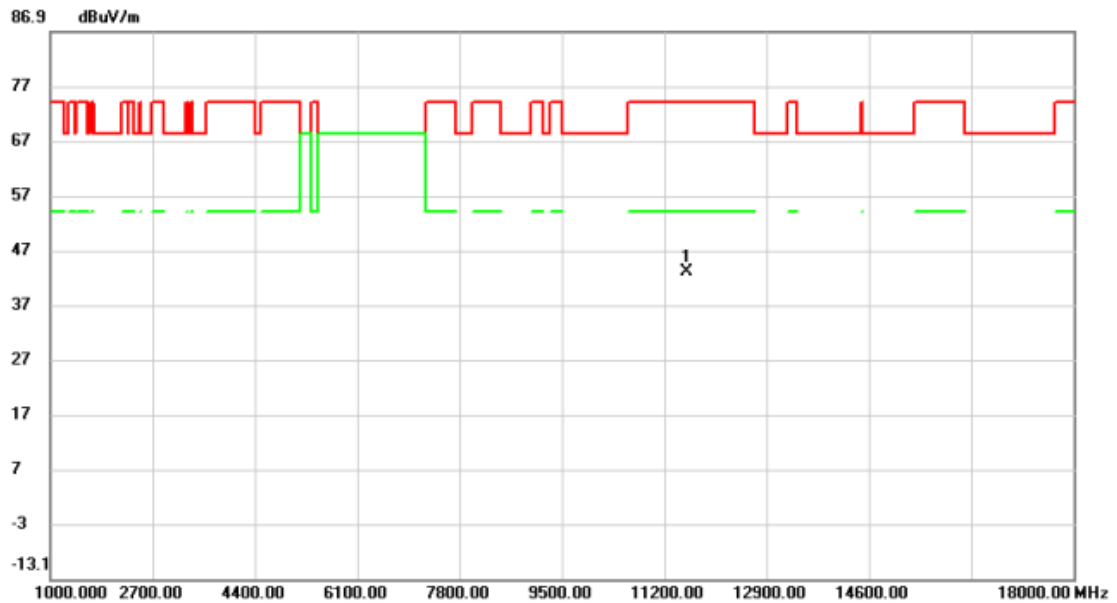


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11570.00     | 51.00                    | -7.98                   | 43.02                      | 74.00           | -30.98       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

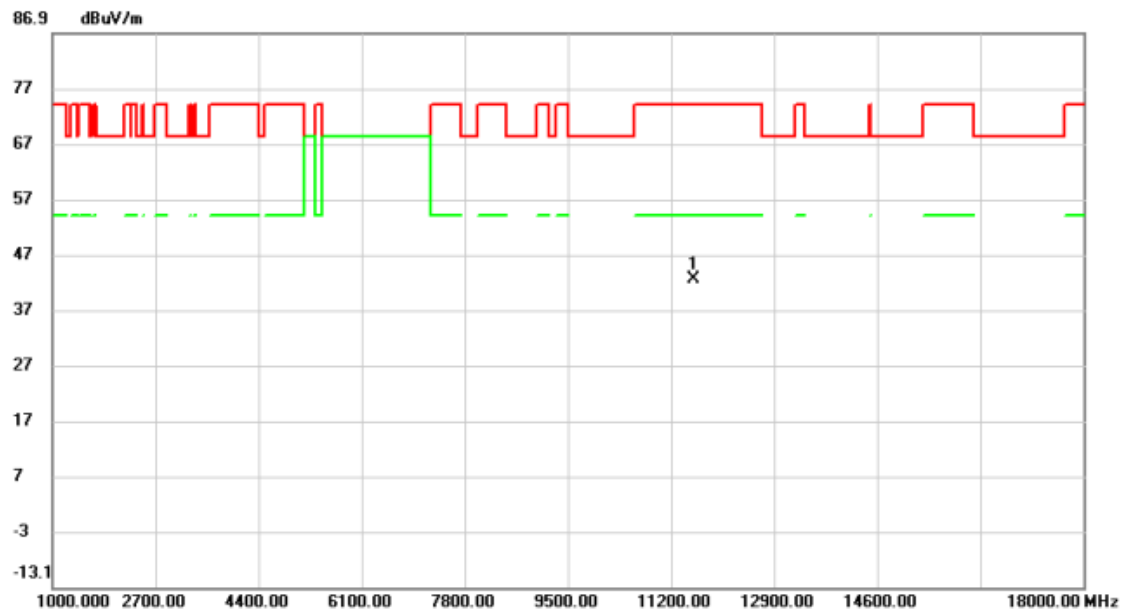


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11570.00     | 50.45                    | -7.98                   | 42.47                      | 74.00           | -31.53       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

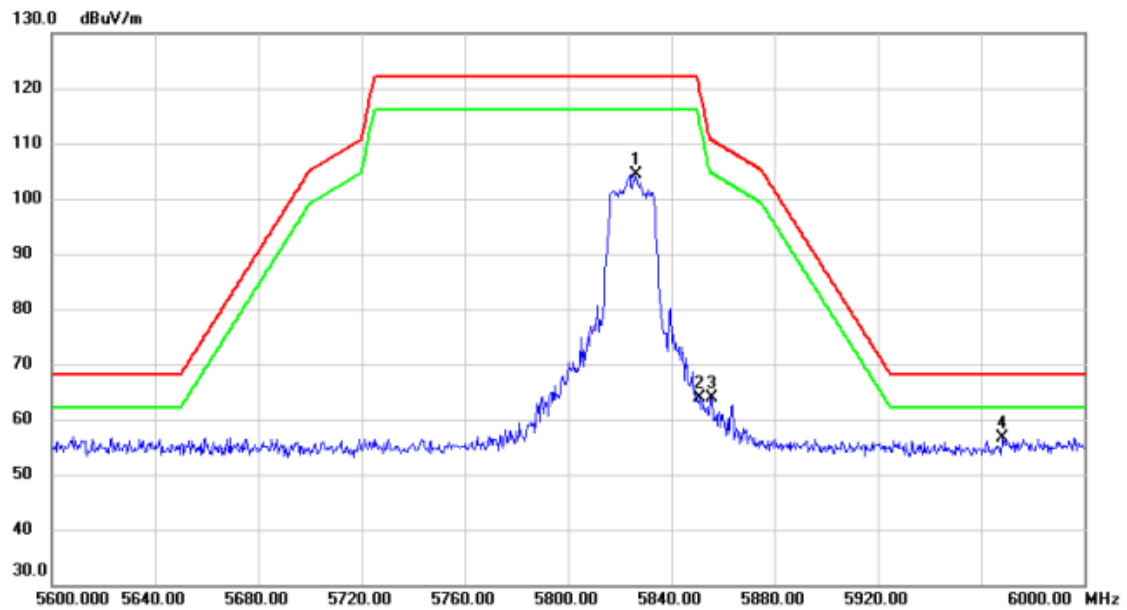


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 5826.200     | 62.79                    | 41.68                   | 104.47                     | 122.20          | -17.73       | peak     |         |
| 2       | 5851.200     | 22.03                    | 41.74                   | 63.77                      | 119.46          | -55.69       | peak     |         |
| 3       | 5855.600     | 22.14                    | 41.76                   | 63.90                      | 110.63          | -46.73       | peak     |         |
| 4 *     | 5968.400     | 14.52                    | 42.03                   | 56.55                      | 68.20           | -11.65       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

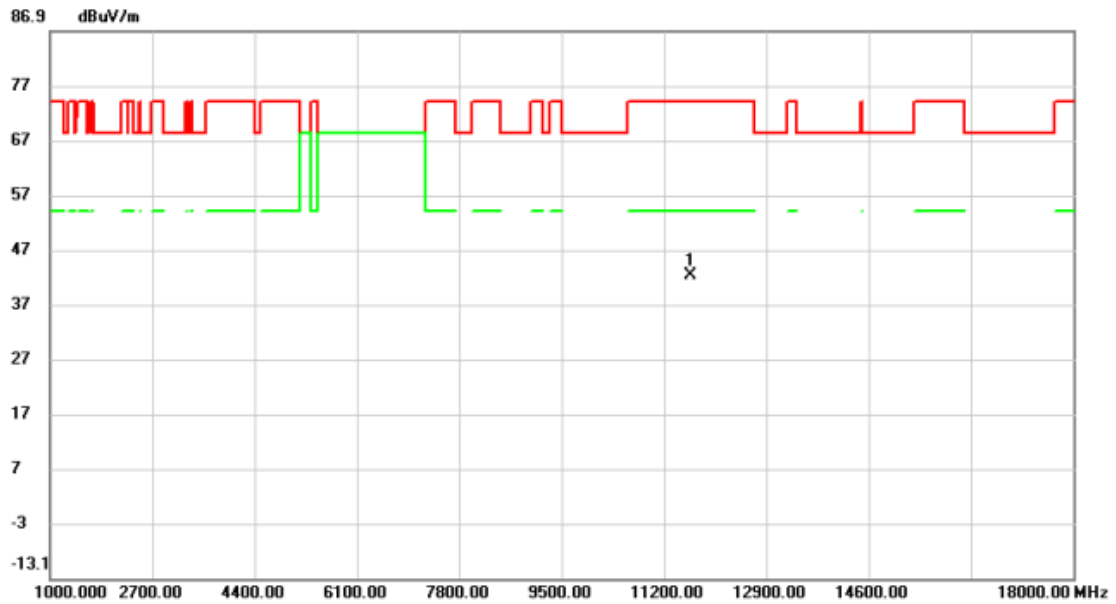


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11650.00 | 50.43         | -8.07          | 42.36       | 74.00  | -31.64 | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

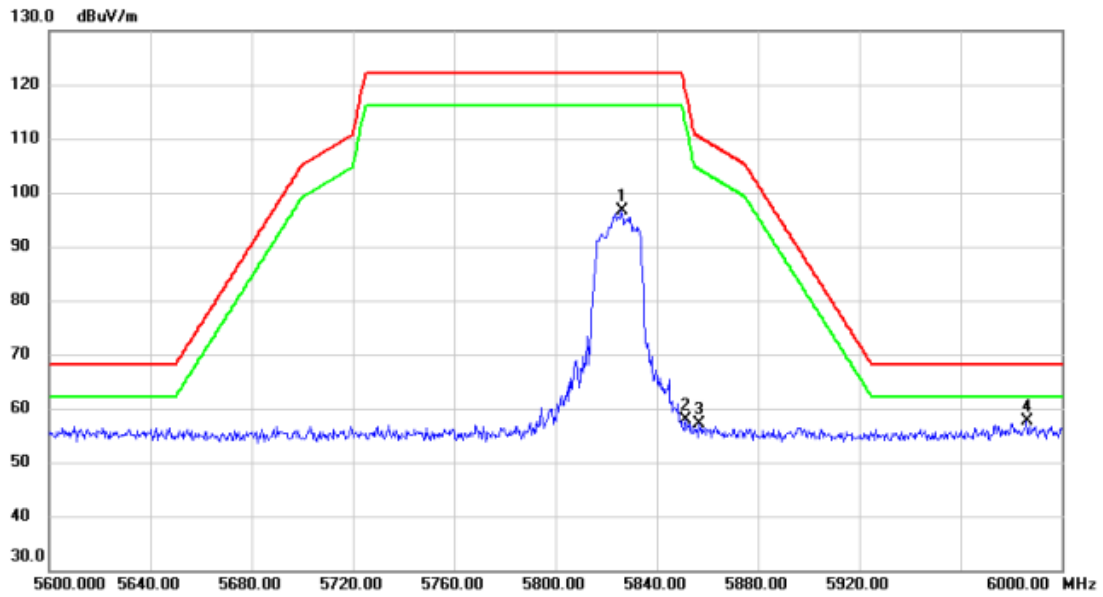


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 5826.200     | 54.93                    | 41.68                   | 96.61                      | 122.20          | -25.59       | peak     |         |
| 2   |     | 5851.600     | 16.11                    | 41.74                   | 57.85                      | 118.55          | -60.70       | peak     |         |
| 3   |     | 5856.800     | 15.26                    | 41.76                   | 57.02                      | 110.30          | -53.28       | peak     |         |
| 4   | *   | 5986.200     | 15.49                    | 42.07                   | 57.56                      | 68.20           | -10.64       | peak     |         |

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

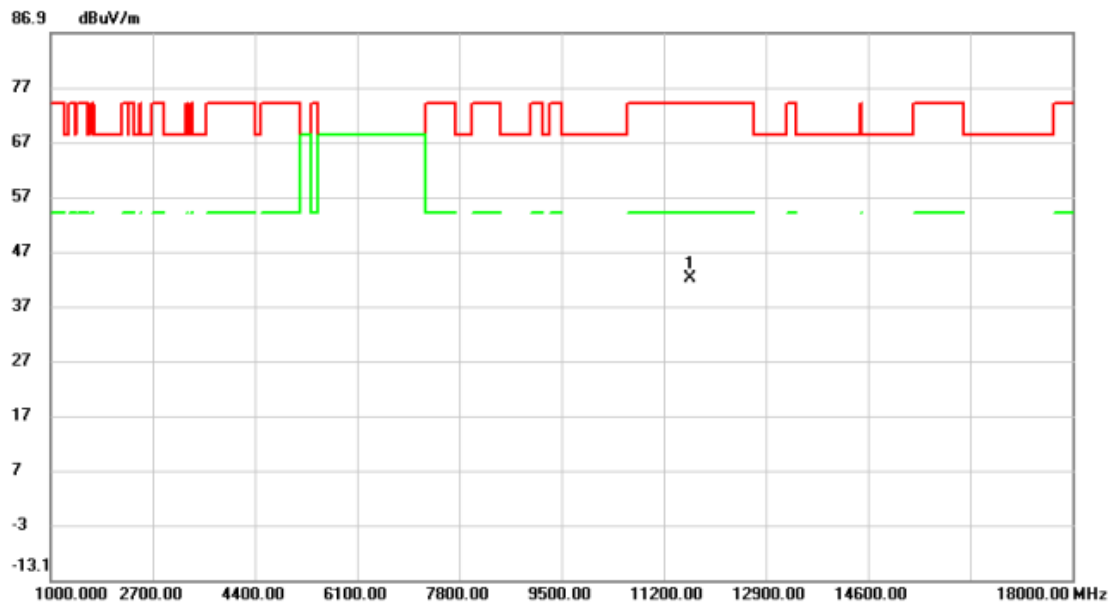


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11650.00 | 49.98         | -8.07          | 41.91       | 74.00  | -32.09 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT40) Mode 5755 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

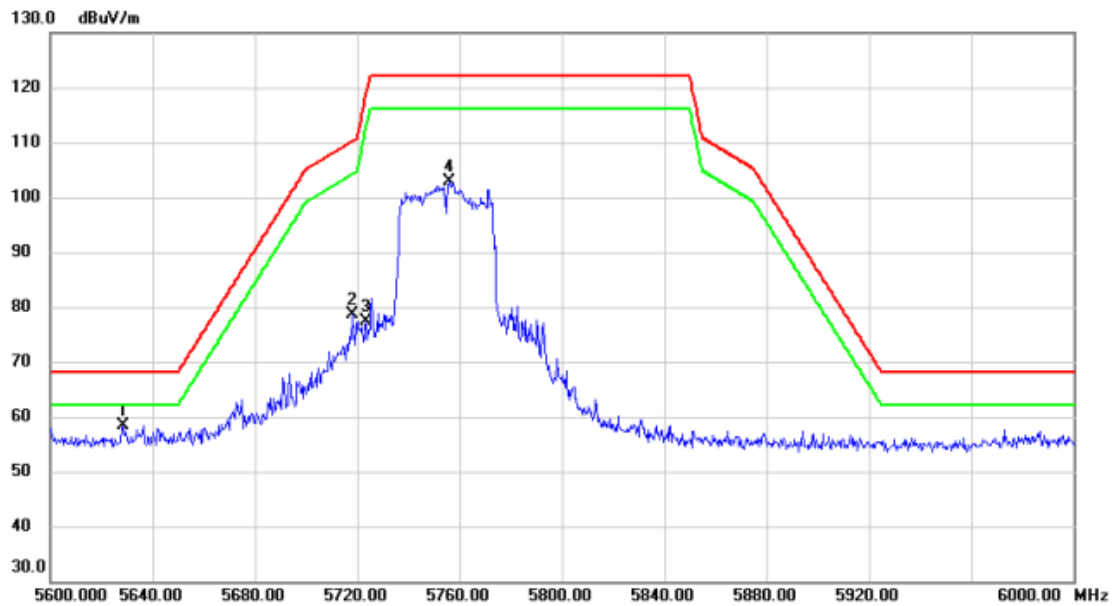


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 5628.400     | 17.11                    | 41.19                   | 58.30                      | 68.20           | -9.90        | peak     |         |
| 2   |     | 5718.400     | 37.17                    | 41.41                   | 78.58                      | 110.35          | -31.77       | peak     |         |
| 3   |     | 5723.600     | 36.04                    | 41.43                   | 77.47                      | 119.01          | -41.54       | peak     |         |
| 4   |     | 5756.200     | 61.30                    | 41.51                   | 102.81                     | 122.20          | -19.39       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT40) Mode 5755 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

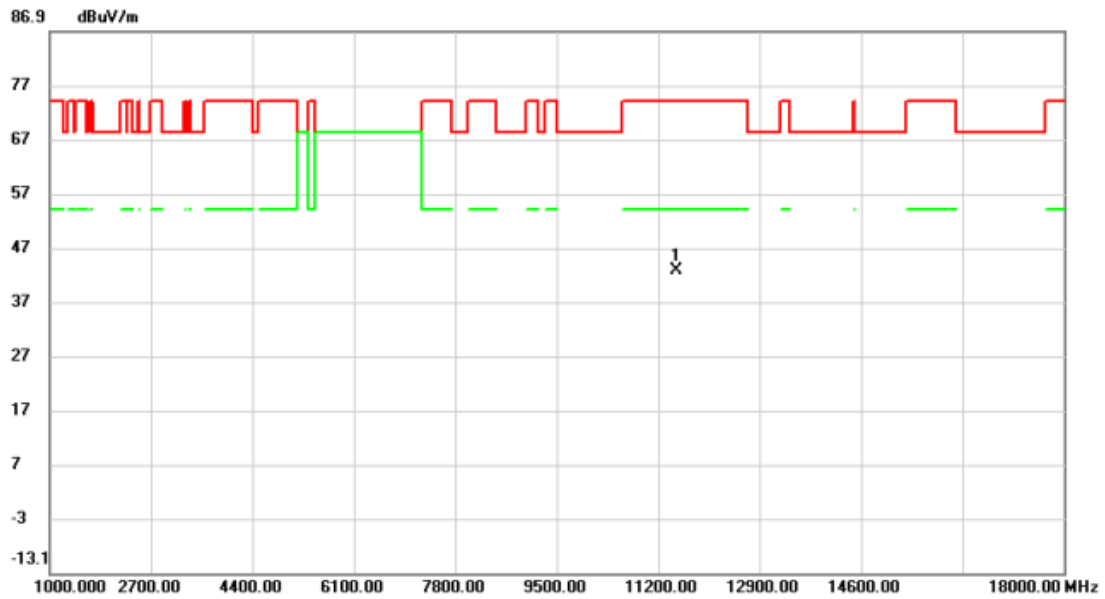


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11510.00     | 50.82                    | -7.99                   | 42.83                      | 74.00           | -31.17       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

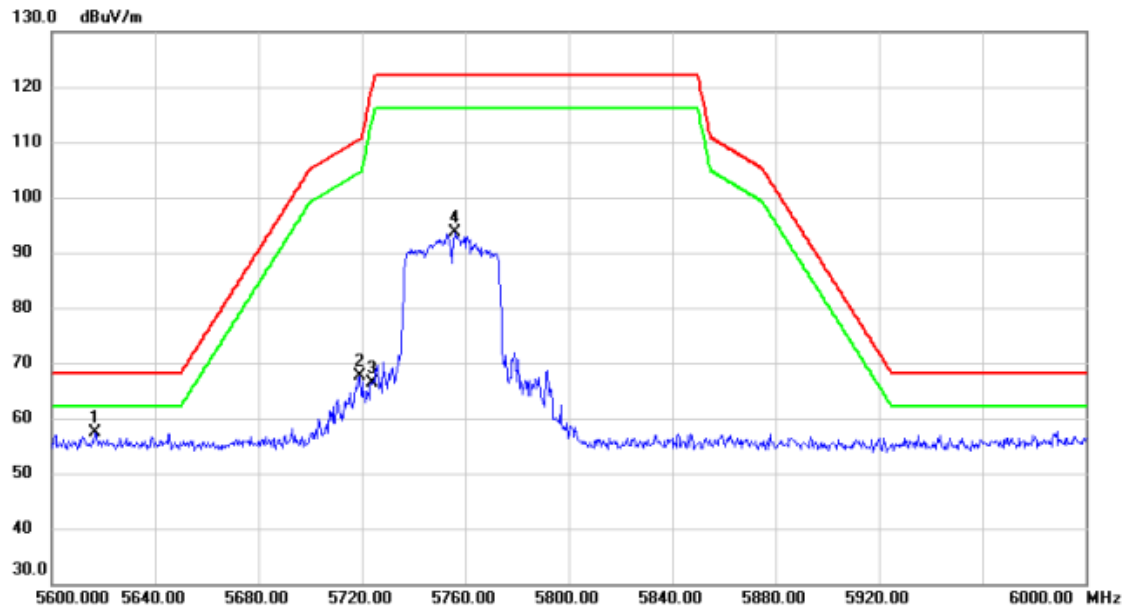


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 5617.000     | 16.19                    | 41.16                   | 57.35                      | 68.20           | -10.85       | peak     |         |
| 2       | 5719.200     | 26.32                    | 41.41                   | 67.73                      | 110.58          | -42.85       | peak     |         |
| 3       | 5723.800     | 24.89                    | 41.43                   | 66.32                      | 119.46          | -53.14       | peak     |         |
| 4       | 5756.200     | 52.19                    | 41.51                   | 93.70                      | 122.20          | -28.50       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

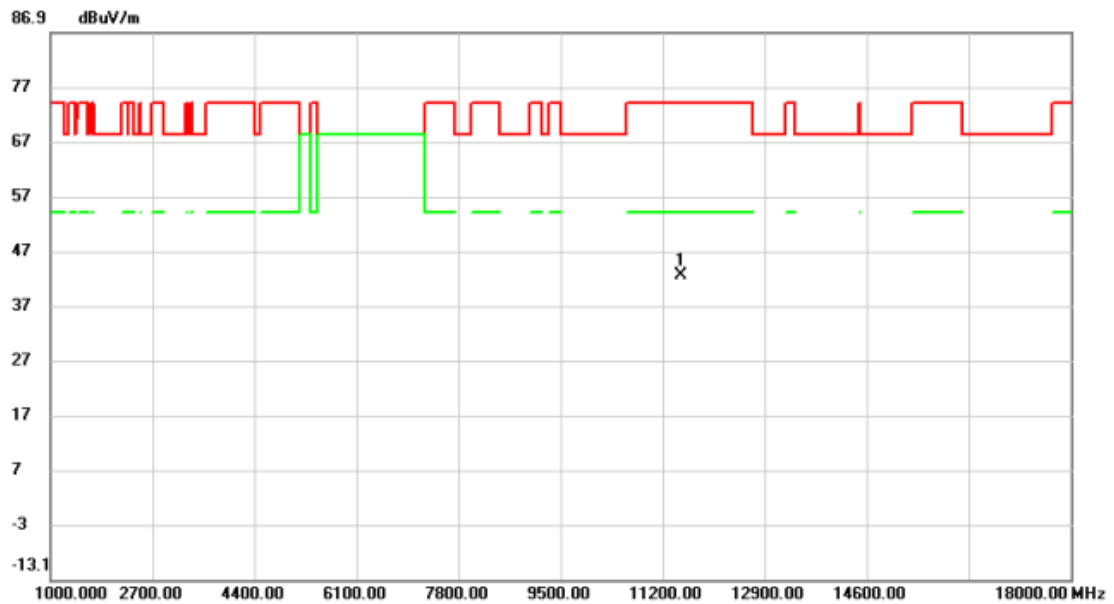


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11510.00 | 50.41         | -7.99          | 42.42       | 74.00  | -31.58 | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT40) Mode 5795 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

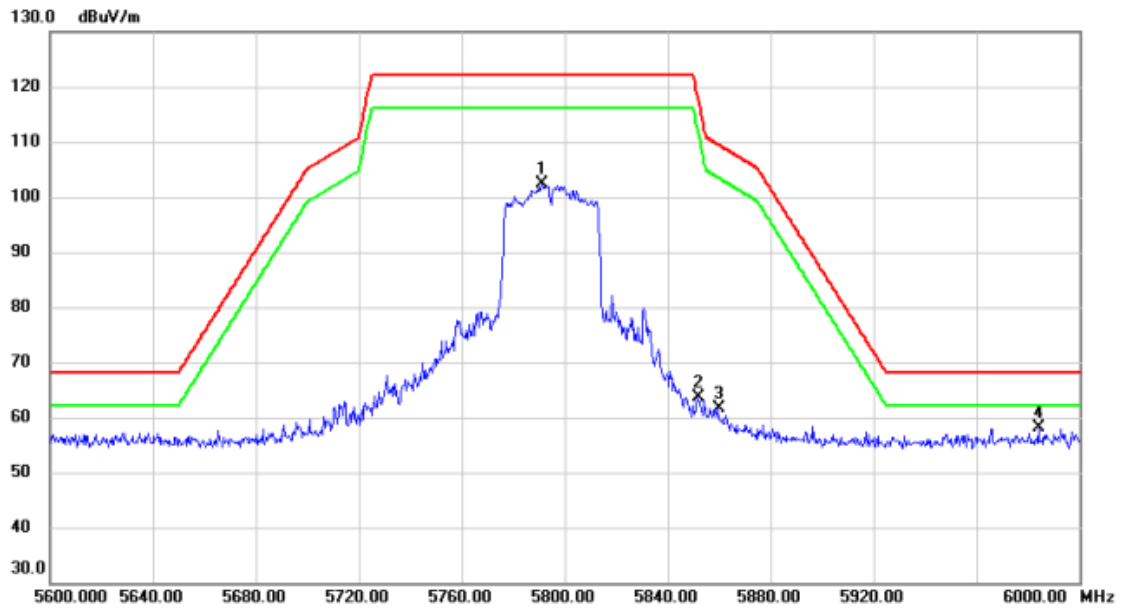


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 5791.400     | 60.71                    | 41.60                   | 102.31                     | 122.20          | -19.89       | peak     |         |
| 2       | 5851.800     | 21.78                    | 41.74                   | 63.52                      | 118.10          | -54.58       | peak     |         |
| 3       | 5859.800     | 19.93                    | 41.76                   | 61.69                      | 109.46          | -47.77       | peak     |         |
| 4 *     | 5984.200     | 16.02                    | 42.07                   | 58.09                      | 68.20           | -10.11       | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT40) Mode 5795 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

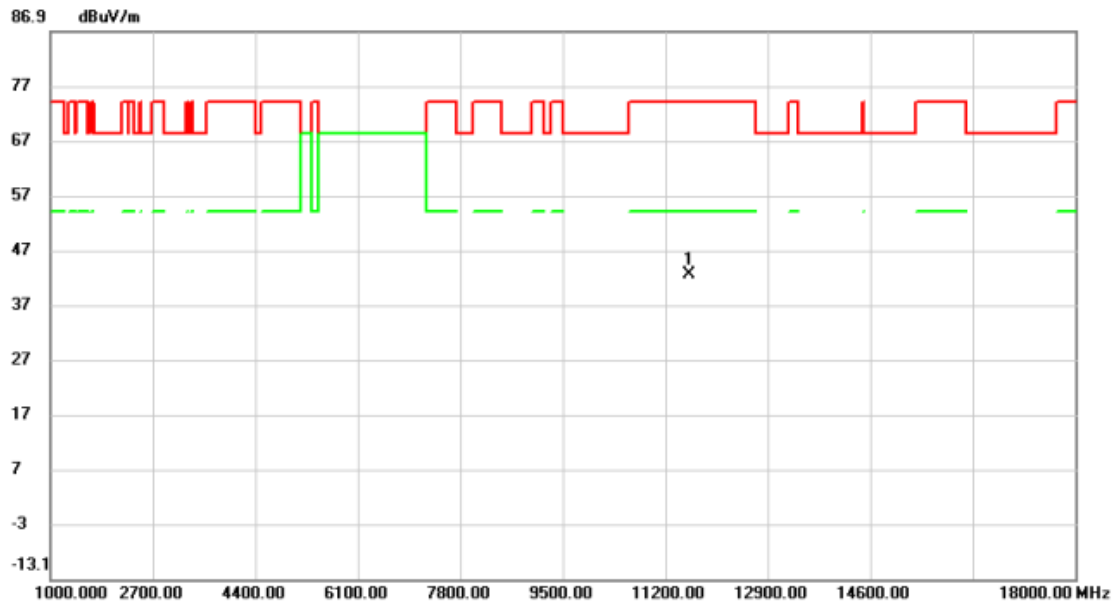


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11590.00     | 50.48                    | -7.99                   | 42.49                      | 74.00           | -31.51       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

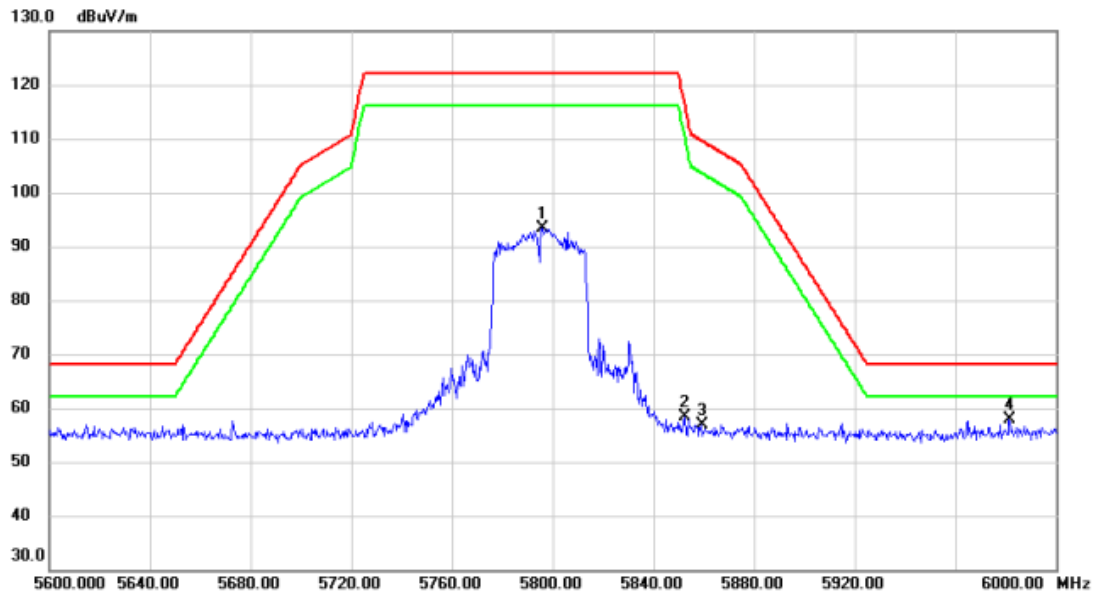


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 5795.800     | 51.86                    | 41.60                   | 93.46                      | 122.20          | -28.74       | peak     |         |
| 2       | 5852.400     | 16.64                    | 41.74                   | 58.38                      | 116.73          | -58.35       | peak     |         |
| 3       | 5859.400     | 15.22                    | 41.76                   | 56.98                      | 109.57          | -52.59       | peak     |         |
| 4 *     | 5981.400     | 15.71                    | 42.07                   | 57.78                      | 68.20           | -10.42       | peak     |         |

# REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

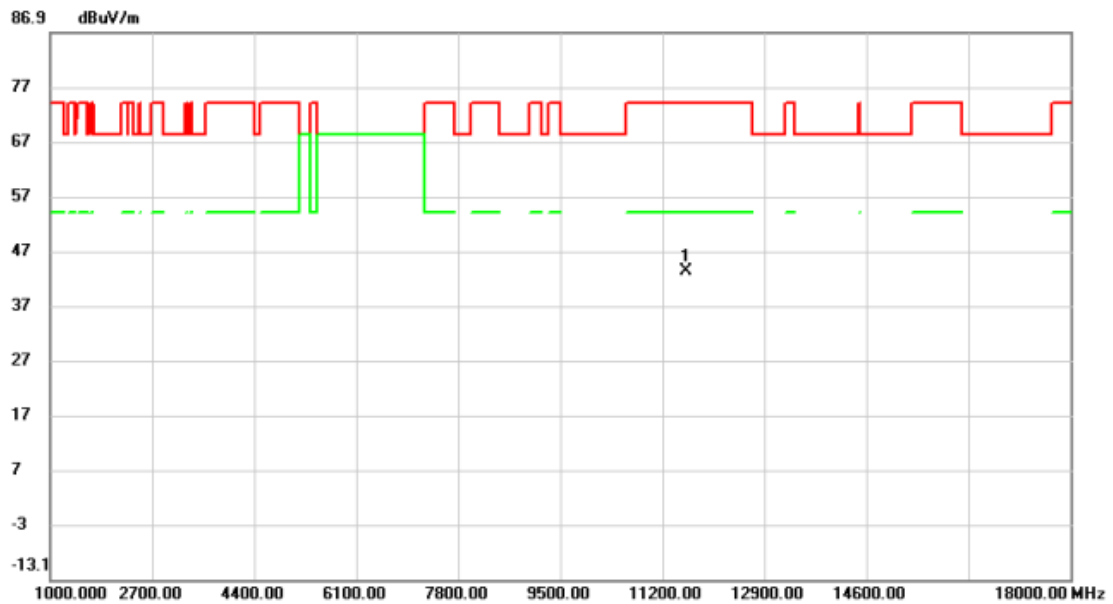


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11590.00 | 51.16         | -7.99          | 43.17       | 74.00  | -30.83 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

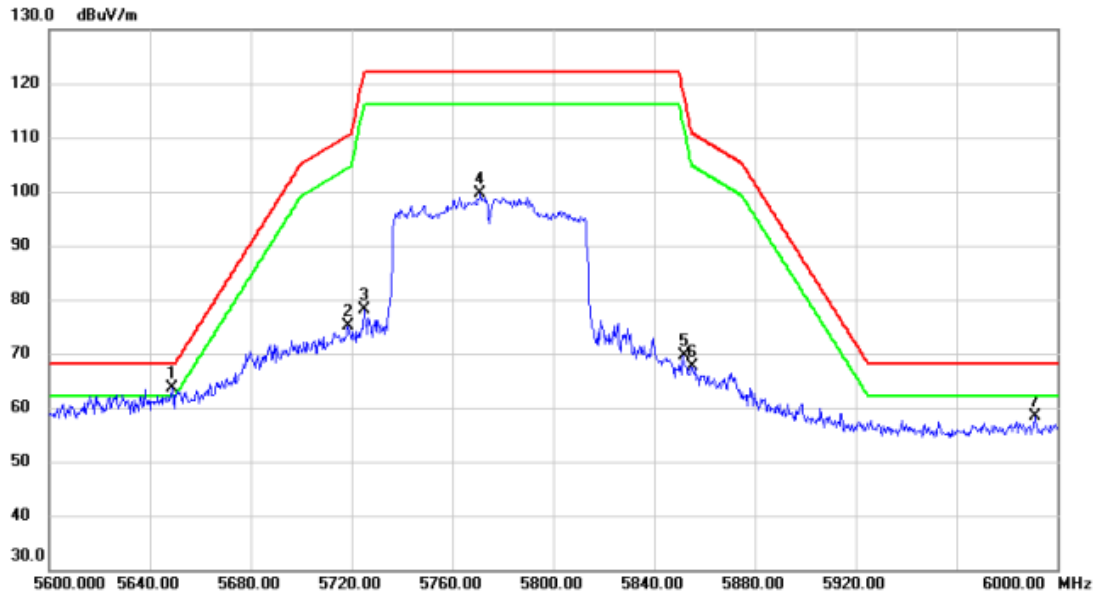


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 5648.800     | 22.49                    | 41.24                   | 63.73                      | 68.20           | -4.47        | peak     |         |
| 2   |     | 5718.800     | 33.63                    | 41.41                   | 75.04                      | 110.46          | -35.42       | peak     |         |
| 3   |     | 5725.000     | 36.68                    | 41.43                   | 78.11                      | 122.20          | -44.09       | peak     |         |
| 4   |     | 5771.200     | 58.01                    | 41.55                   | 99.56                      | 122.20          | -22.64       | peak     |         |
| 5   |     | 5851.800     | 27.82                    | 41.74                   | 69.56                      | 118.10          | -48.54       | peak     |         |
| 6   |     | 5855.000     | 25.91                    | 41.76                   | 67.67                      | 110.80          | -43.13       | peak     |         |
| 7   |     | 5991.400     | 16.25                    | 42.09                   | 58.34                      | 68.20           | -9.86        | peak     |         |

# REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

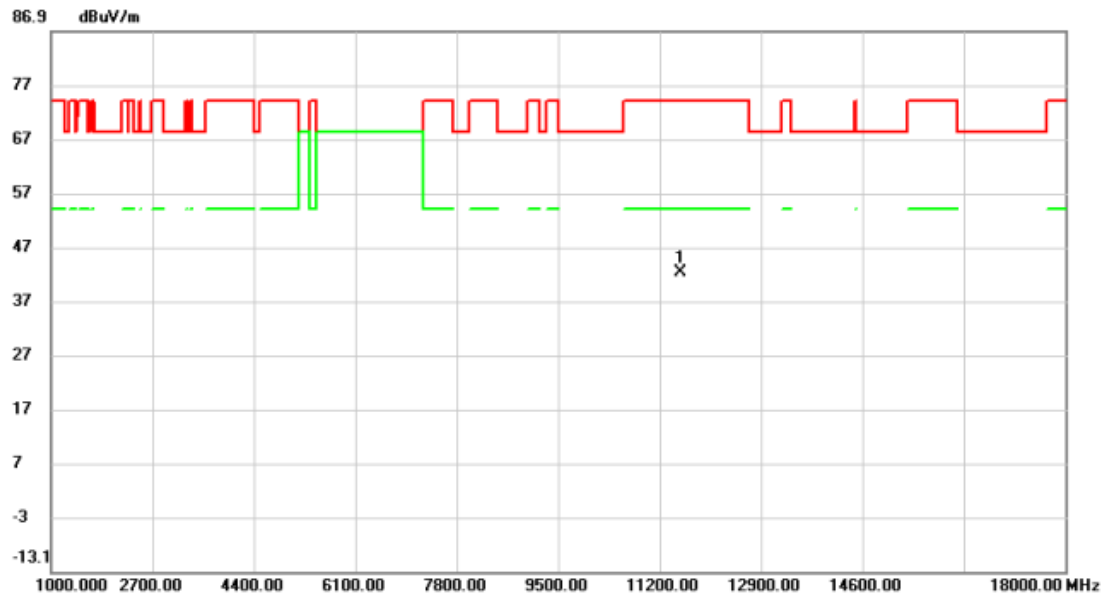


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11550.00 | 50.36         | -7.99          | 42.37       | 74.00  | -31.63 | peak     |         |

# REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

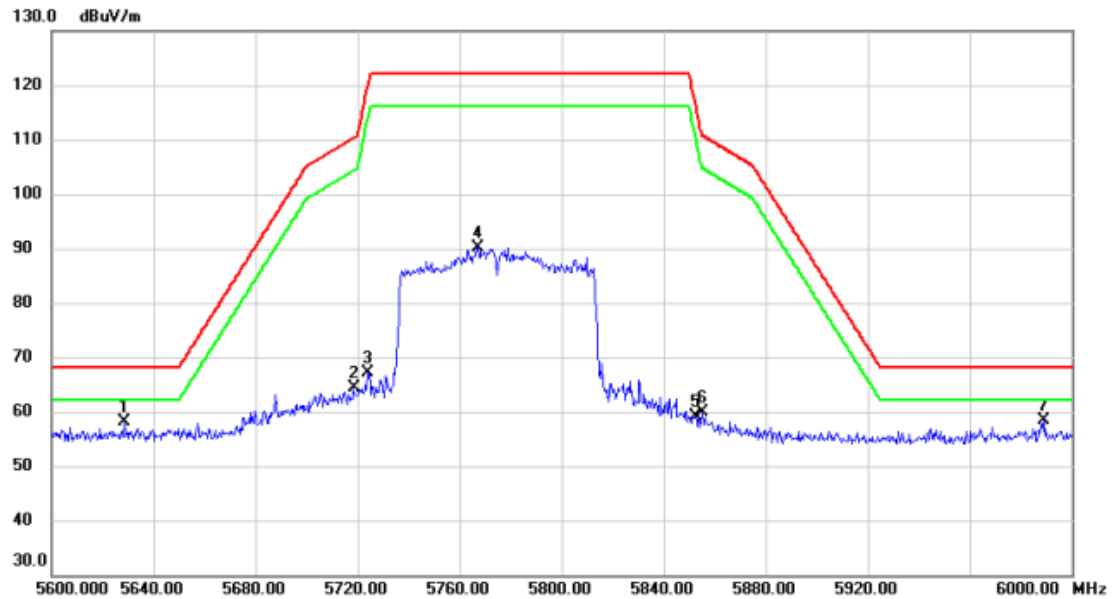


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 5628.600     | 17.00                    | 41.19                   | 58.19                      | 68.20           | -10.01       | peak     |         |
| 2       | 5718.600     | 22.92                    | 41.41                   | 64.33                      | 110.41          | -46.08       | peak     |         |
| 3       | 5724.200     | 25.81                    | 41.43                   | 67.24                      | 120.38          | -53.14       | peak     |         |
| 4       | 5767.200     | 48.72                    | 41.53                   | 90.25                      | 122.20          | -31.95       | peak     |         |
| 5       | 5852.400     | 17.49                    | 41.74                   | 59.23                      | 116.73          | -57.50       | peak     |         |
| 6       | 5855.200     | 18.20                    | 41.76                   | 59.96                      | 110.74          | -50.78       | peak     |         |
| 7 *     | 5989.200     | 16.36                    | 42.09                   | 58.45                      | 68.20           | -9.75        | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

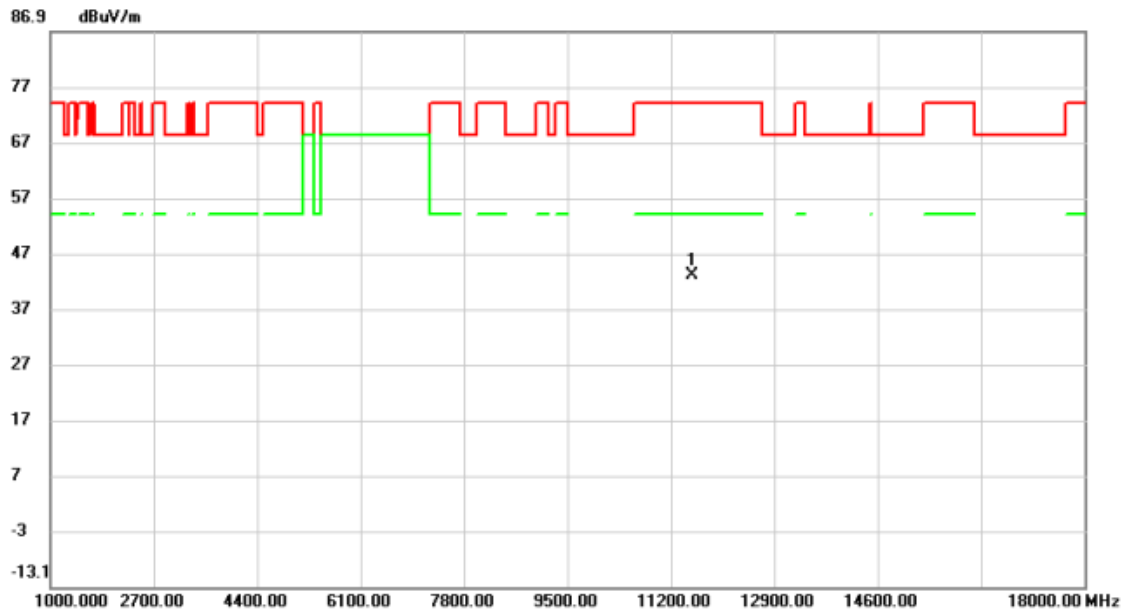

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 11550.00 | 51.13         | -7.99          | 43.14       | 74.00  | -30.86 | peak     |         |

#### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH


|           |                  |
|-----------|------------------|
| Test Mode | UNII-1_TX A Mode |
|-----------|------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 33.650                | 19.100                        |
| 40      | 5200            | 28.889                | 18.300                        |
| 48      | 5240            | 31.249                | 18.700                        |

CH36




Date: 20.SEP.2022 13:48:18

CH40  
26 dB Bandwidth



Date: 20.SEP.2022 13:51:29

CH48




Date: 20.SEP.2022 13:53:51


99 % Occupied Bandwidth



Date: 20.SEP.2022 13:47:57



Date: 20.SEP.2022 13:51:02




Date: 20.SEP.2022 13:53:27


|           |                        |
|-----------|------------------------|
| Test Mode | UNII-1_TX N(HT20) Mode |
|-----------|------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 34.890                | 19.900                        |
| 40      | 5200            | 35.749                | 19.800                        |
| 48      | 5240            | 28.999                | 18.800                        |

CH36

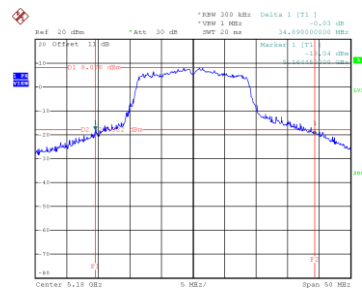


Date: 20.SEP.2022 14:11:31

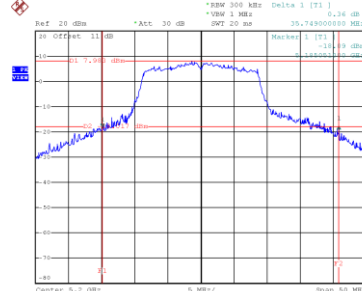CH40  
26 dB Bandwidth


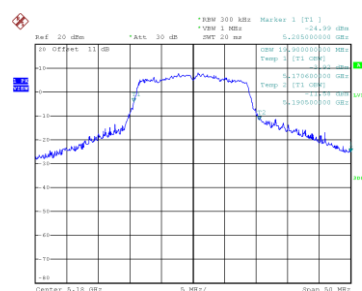
Date: 20.SEP.2022 14:12:17

CH48




Date: 20.SEP.2022 14:14:26


99 % Occupied Bandwidth



Date: 20.SEP.2022 14:11:09

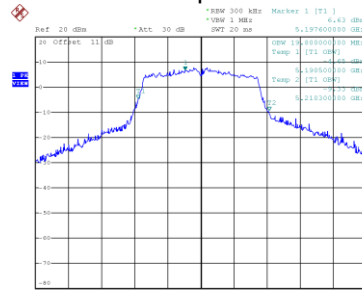

Date: 20.SEP.2022 14:12:16




Date: 20.SEP.2022 14:13:52


|           |                        |
|-----------|------------------------|
| Test Mode | UNII-1_TX N(HT40) Mode |
|-----------|------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 58.199                | 39.200                        |
| 46      | 5230            | 58.397                | 40.000                        |

CH38




Date: 24.NOV.2022 09:57:05


CH46  
26 dB Bandwidth


Date: 24.NOV.2022 10:01:53

99 % Occupied Bandwidth



Date: 20.SEP.2022 15:39:52




Date: 20.SEP.2022 15:42:13

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT80) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 112.790               | 77.200                        |

### CH42 26 dB Bandwidth

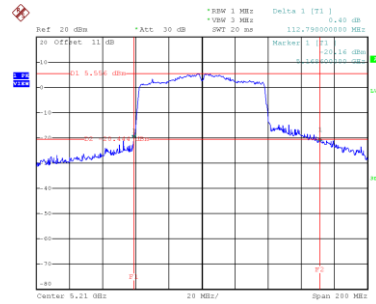

Date: 20.SEP.2022 16:00:38

### 99 % Occupied Bandwidth

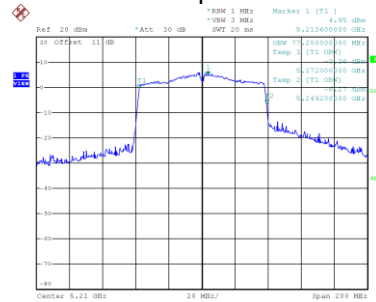

Date: 20.SEP.2022 15:58:57







|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-2A_TX N(HT20) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 32.288                | 18.900                        |
| 60      | 5300            | 29.188                | 18.500                        |
| 64      | 5320            | 27.990                | 18.600                        |

CH52

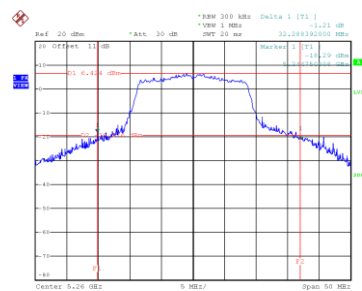


Date: 20.SEP.2022 14:15:52

CH60  
26 dB Bandwidth


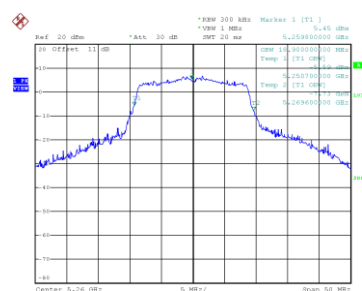
Date: 20.SEP.2022 14:17:08

CH64




Date: 20.SEP.2022 14:18:21


99 % Occupied Bandwidth



Date: 20.SEP.2022 14:15:30



Date: 20.SEP.2022 14:16:44




Date: 20.SEP.2022 14:17:54


|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-2A_TX N(HT40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 58.300                | 38.800                        |
| 62      | 5310            | 58.190                | 38.200                        |

CH54




Date: 24.NOV.2022 10:04:14

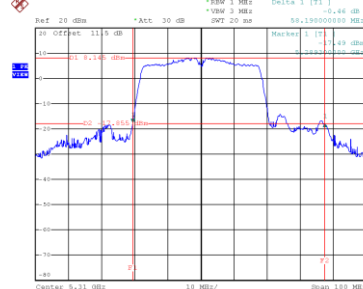
CH62  
26 dB Bandwidth


Date: 24.NOV.2022 10:08:13

99 % Occupied Bandwidth



Date: 20.NOV.2022 15:44:11

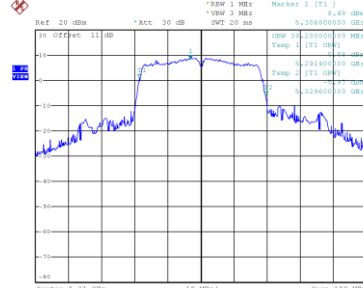


Date: 20.NOV.2022 15:45:46

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 58      | 5290            | 142.386               | 79.600                        |

### CH58 26 dB Bandwidth

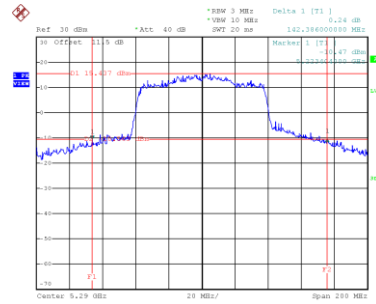

Date: 24.NOV.2022 10:24:33

### 99 % Occupied Bandwidth

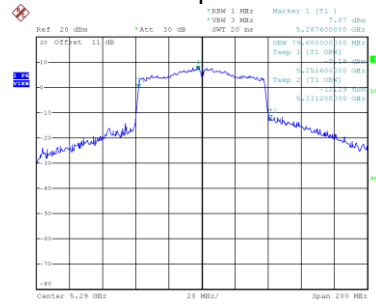


Date: 20.SEP.2022 16:01:52


|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2C_TX A Mode |
|-----------|-------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 26.999                | 17.800                        |
| 116     | 5580            | 27.699                | 17.800                        |
| 140     | 5700            | 22.300                | 17.500                        |

CH100




Date: 20.8EP.2022 13:59:32

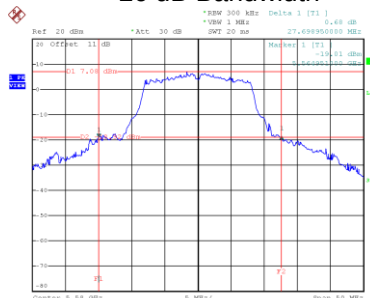CH116  
26 dB Bandwidth



Date: 20.8EP.2022 14:01:07

CH140

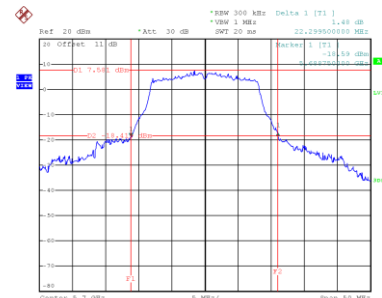


Date: 20.8EP.2022 14:02:31


99 % Occupied Bandwidth



Date: 20.8EP.2022 13:59:06

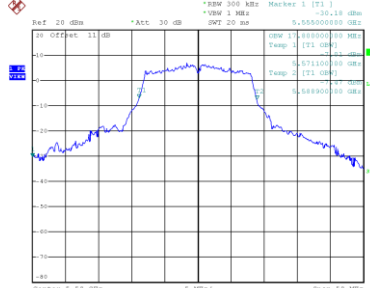

Date: 20.8EP.2022 14:00:37

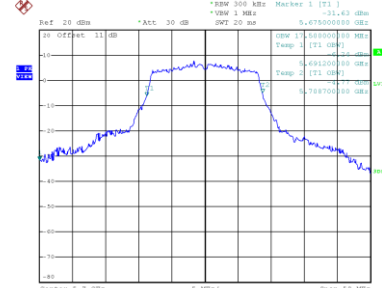


Date: 20.8EP.2022 14:02:02


|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-2C_TX N(HT20) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 36.050                | 18.900                        |
| 116     | 5580            | 29.750                | 18.600                        |
| 140     | 5700            | 28.950                | 18.600                        |

CH100




Date: 20.SEP.2022 14:19:46

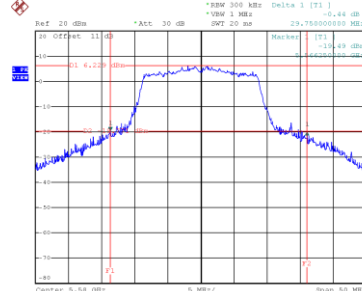CH116  
26 dB Bandwidth



Date: 20.SEP.2022 14:21:22

CH140




Date: 20.SEP.2022 14:22:13


99 % Occupied Bandwidth



Date: 20.SEP.2022 14:19:48

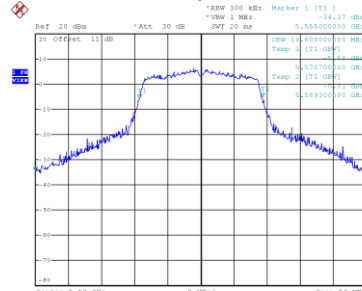

Date: 20.SEP.2022 14:20:59




Date: 20.SEP.2022 14:22:09


|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-2C_TX N(HT40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 102     | 5510            | 74.900                | 38.200                        |
| 110     | 5550            | 74.190                | 38.200                        |
| 134     | 5670            | 68.198                | 37.600                        |

CH102




Date: 24.NOV.2022 10:12:08

CH110  
26 dB Bandwidth



Date: 24.NOV.2022 10:16:19

CH134




Date: 24.NOV.2022 10:20:14


99 % Occupied Bandwidth



Date: 20.SEP.2022 15:48:48



Date: 20.SEP.2022 15:50:15




Date: 20.SEP.2022 15:51:41


|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode |
|-----------|---------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 106     | 5530            | 141.186               | 77.200                        |
| 122     | 5610            | 124.790               | 77.200                        |

CH106




Date: 24.NOV.2022 10:28:51

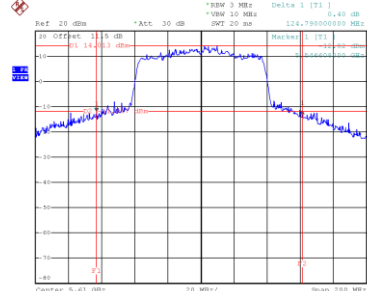
CH122  
26 dB Bandwidth


Date: 24.NOV.2022 10:32:46

99 % Occupied Bandwidth



Date: 20.SEP.2022 16:04:50

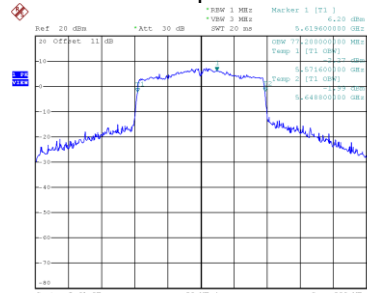


Date: 20.SEP.2022 16:07:01


|           |                  |
|-----------|------------------|
| Test Mode | UNII-3_TX A Mode |
|-----------|------------------|

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 149     | 5745            | 16.350               | 17.500                        | 0.5                             | Complies |
| 157     | 5785            | 16.450               | 17.500                        | 0.5                             | Complies |
| 165     | 5825            | 16.389               | 17.600                        | 0.5                             | Complies |

CH149

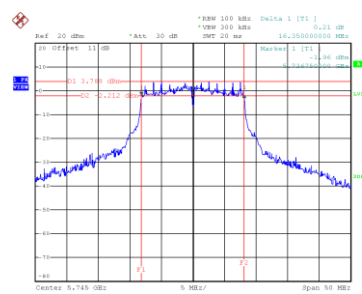


Date: 20.SEP.2022 14:04:06

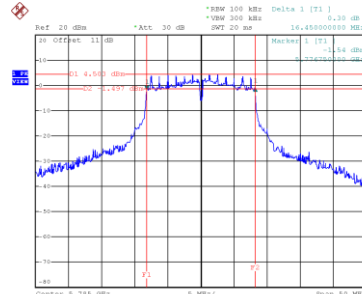CH157  
6 dB Bandwidth



Date: 20.SEP.2022 14:05:10

CH165

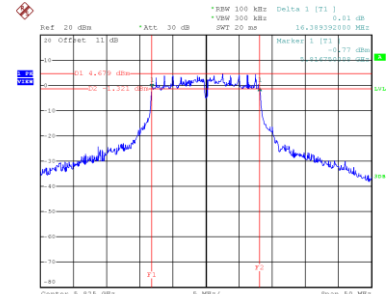


Date: 20.SEP.2022 14:07:03


99 % Occupied Bandwidth



Date: 20.SEP.2022 14:03:33



Date: 20.SEP.2022 14:04:57




Date: 20.SEP.2022 14:06:29



|           |                        |
|-----------|------------------------|
| Test Mode | UNII-3_TX N(HT20) Mode |
|-----------|------------------------|

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 149     | 5745            | 17.290               | 18.400                        | 0.5                             | Complies |
| 157     | 5785            | 17.650               | 18.500                        | 0.5                             | Complies |
| 165     | 5825            | 17.107               | 18.400                        | 0.5                             | Complies |


CH149



Date: 20.SEP.2022 14:24:08


CH157

6 dB Bandwidth

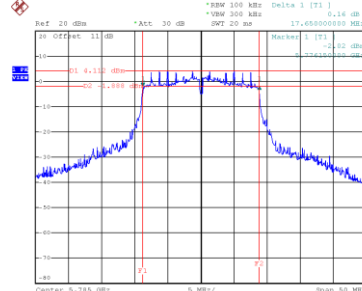


Date: 20.SEP.2022 14:25:42

CH165




Date: 20.SEP.2022 14:27:05


99 % Occupied Bandwidth



Date: 20.SEP.2022 14:23:34

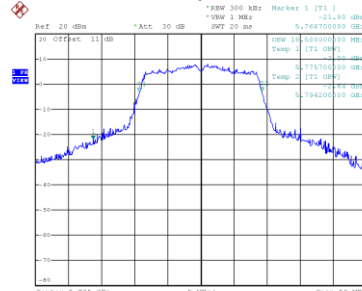

Date: 20.SEP.2022 14:25:10




Date: 20.SEP.2022 14:26:32



|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 155     | 5775            | 75.600               | 78.800                        | 0.5                             | Complies |

**CH155**  
6 dB Bandwidth

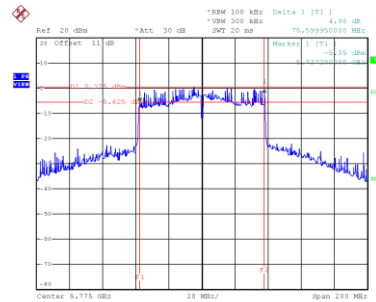

Date: 20.SEP.2022 16:10:49

99 % Occupied Bandwidth

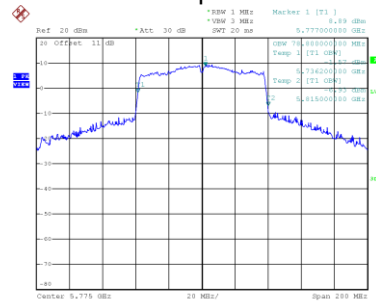

Date: 20.SEP.2022 16:10:09

## APPENDIX F - MAXIMUM OUTPUT POWER

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX A Mode_Ant. 1 |
|-----------|-------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 36      | 5180            | 12.44              | 0.30        | 12.74                            | 23.98            | 0.2500         | Complies |
| 40      | 5200            | 16.83              | 0.30        | 17.13                            | 23.98            | 0.2500         | Complies |
| 48      | 5240            | 17.43              | 0.30        | 17.73                            | 23.98            | 0.2500         | Complies |

|           |                               |
|-----------|-------------------------------|
| Test Mode | UNII-1_TX N(HT20) Mode_Ant. 1 |
|-----------|-------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 36      | 5180            | 12.82              | 0.32        | 13.14                            | 23.98            | 0.2500         | Complies |
| 40      | 5200            | 17.41              | 0.32        | 17.73                            | 23.98            | 0.2500         | Complies |
| 48      | 5240            | 17.27              | 0.32        | 17.59                            | 23.98            | 0.2500         | Complies |

|           |                               |
|-----------|-------------------------------|
| Test Mode | UNII-1_TX N(HT40) Mode_Ant. 1 |
|-----------|-------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 38      | 5190            | 11.93              | 0.62        | 12.55                            | 23.98            | 0.2500         | Complies |
| 46      | 5230            | 17.13              | 0.62        | 17.75                            | 23.98            | 0.2500         | Complies |

|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-1_TX AC(VHT20) Mode_Ant. 1 |
|-----------|---------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 36      | 5180            | 12.80              | 0.33        | 13.13                            | 23.98            | 0.2500         | Complies |
| 40      | 5200            | 17.40              | 0.33        | 17.73                            | 23.98            | 0.2500         | Complies |
| 48      | 5240            | 17.20              | 0.33        | 17.53                            | 23.98            | 0.2500         | Complies |

|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-1_TX AC(VHT40) Mode_Ant. 1 |
|-----------|---------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 38      | 5190            | 11.92              | 0.62        | 12.54                            | 23.98            | 0.2500         | Complies |
| 46      | 5230            | 17.04              | 0.62        | 17.66                            | 23.98            | 0.2500         | Complies |



|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-1_TX AC(VHT80) Mode_Ant. 1 |
|-----------|---------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 42      | 5210            | 11.21              | 1.18        | 12.39                            | 23.98            | 0.2500         | Complies |

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX A Mode_Ant. 1 |
|-----------|--------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 52      | 5260            | 16.84              | 0.30        | 17.14                            | 23.98            | 0.2500         | Complies |
| 60      | 5300            | 17.11              | 0.30        | 17.41                            | 23.98            | 0.2500         | Complies |
| 64      | 5320            | 12.69              | 0.30        | 12.99                            | 23.98            | 0.2500         | Complies |

|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-2A_TX N(HT20) Mode_Ant. 1 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 52      | 5260            | 17.34              | 0.32        | 17.66                            | 23.98            | 0.2500         | Complies |
| 60      | 5300            | 16.86              | 0.32        | 17.18                            | 23.98            | 0.2500         | Complies |
| 64      | 5320            | 12.44              | 0.32        | 12.76                            | 23.98            | 0.2500         | Complies |

|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-2A_TX N(HT40) Mode_Ant. 1 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 54      | 5270            | 16.88              | 0.62        | 17.50                            | 23.98            | 0.2500         | Complies |
| 62      | 5310            | 9.75               | 0.62        | 10.37                            | 23.98            | 0.2500         | Complies |

|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 52      | 5260            | 17.31              | 0.33        | 17.64                            | 23.98            | 0.2500         | Complies |
| 60      | 5300            | 16.81              | 0.33        | 17.14                            | 23.98            | 0.2500         | Complies |
| 64      | 5320            | 12.33              | 0.33        | 12.66                            | 23.98            | 0.2500         | Complies |

|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 54      | 5270            | 16.86              | 0.62        | 17.48                            | 23.98            | 0.2500         | Complies |
| 62      | 5310            | 9.74               | 0.62        | 10.36                            | 23.98            | 0.2500         | Complies |

|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 58      | 5290            | 10.83              | 1.18        | 12.01                            | 23.98            | 0.2500         | Complies |

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX A Mode_Ant. 1 |
|-----------|--------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 100     | 5500            | 16.95              | 0.30        | 17.25                            | 23.98            | 0.2500         | Complies |
| 116     | 5580            | 17.05              | 0.30        | 17.35                            | 23.98            | 0.2500         | Complies |
| 140     | 5700            | 16.86              | 0.30        | 17.16                            | 23.98            | 0.2500         | Complies |



|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-2C_TX N(HT20) Mode_Ant. 1 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 100     | 5500            | 14.00              | 0.32        | 14.32                            | 23.98            | 0.2500         | Complies |
| 116     | 5580            | 16.84              | 0.32        | 17.16                            | 23.98            | 0.2500         | Complies |
| 140     | 5700            | 17.40              | 0.32        | 17.72                            | 23.98            | 0.2500         | Complies |

|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-2C_TX N(HT40) Mode_Ant. 1 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 102     | 5510            | 17.08              | 0.62        | 17.70                            | 23.98            | 0.2500         | Complies |
| 110     | 5550            | 17.05              | 0.62        | 17.67                            | 23.98            | 0.2500         | Complies |
| 134     | 5670            | 16.84              | 0.62        | 17.17                            | 23.98            | 0.2500         | Complies |

|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 100     | 5500            | 13.88              | 0.33        | 14.21                            | 23.98            | 0.2500         | Complies |
| 116     | 5580            | 16.82              | 0.33        | 17.15                            | 23.98            | 0.2500         | Complies |
| 140     | 5700            | 17.28              | 0.33        | 17.61                            | 23.98            | 0.2500         | Complies |

|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------------------------|------------------|----------------|----------|
| 102     | 5510            | 16.88              | 0.62        | 17.50                            | 23.98            | 0.2500         | Complies |
| 110     | 5550            | 17.02              | 0.62        | 17.64                            | 23.98            | 0.2500         | Complies |
| 134     | 5670            | 16.82              | 0.62        | 17.44                            | 23.98            | 0.2500         | Complies |