

Report No.: XEWA2310000073RG02

Rev.: 01

Page: 1 of 22

# **TEST REPORT**

Application No.: XEWA2310000073RG

Applicant: Harman International Industries Incorporated

Address of Applicant: 30001, Cabot Drive, Novi, MI 48377, USA

Manufacturer: Harman International Industries Incorporated

Address of Manufacturer: 30001, Cabot Drive, Novi, MI 48377, USA

**EUT Description:** Toyota La-DCM **Model No.:** TYT25\_LT\_AA

Trade Mark: HARMAN

FCC ID: 2AHPN-TYT25-LT-AA

Standard(s): FCC 47 CFR Part 15, Subpart B

**Date of Receipt:** 2023/11/01

**Date of Test:** 2023/12/11 to 2023/12/15

**Date of Issue:** 2024/01/10

Test Result: Pass\*

Authorized Signature:

News chen

Linus Chen
Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.spx.">http://www.sgs.com/en/Terms-and-Conditions.spx.</a> and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a> attention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the esults shown in this test report refer only to the sample(s) test extent of the fall of 30 days only.

1/F, Unit D, Building 1, Kanghong Urange Science Park, No.137, Keyuan 3rd Road, Fengoong New Yown, Xian, Shaama, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885

www.sgsgroup.com.cn

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 2 of 22

Revision Record								
Version	Chapter	Date	Modifier	Remark				
01		2024/01/10		Original				

Prepared By	Leah chen
	(Leah Chen) / Test Engineer
Checked By	Snoty Yao
	(Andy Yao) /Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are temple(s) are tended for 30 days only.

| I/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Toum, X/an, Shaami, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 3 of 22

## **Test Summary**

Emission Part									
Item Standard Method Requirement Re									
Conducted Emissions at Mains Terminals (150kHz-30MHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass					
Radiated Emissions (30MHz-1GHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass					
Radiated Emissions (above 1GHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass					

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are temple(s) are tended for 30 days only.

| I/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Toum, X/an, Shaami, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01 Page: 4 of 22

## **Contents**

1	Gen	neral Information	5
	1.1 1.2 1.3 1.4 1.5	Description of Support Units Test Location Test Facility Deviation from Standards Abnormalities from Standard Conditions	6 6 6
2	Emi	ssion Test Results	7
	2.1.: 2.1.: 2.2 2.2.: 2.2.: 2.3.: 2.3.: 2.3.:	Conducted Emissions at Mains Terminals (150kHz-30MHz)	711121515
3	Equ	ipment List	19
4		asurement Uncertainty	
5		tographs	
	5.1	Test Setup	22



中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

www.sgsgroup.com.cn



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 5 of 22

## I General Information

EUT Description:	Toyota La-DCM							
Model No.:	TYT25_LT_AA	TYT25_LT_AA						
Trade Mark:	HARMAN							
Hardware Version:	0.0.3							
Software Version:	TYTLLADCM_R04.5D	TYTLLADCM_R04.5D						
IMEI:	356590670015866							
	Band	Tx (MHz)	Rx (MHz)					
	WCDMA Band II	1850~1910	1930~1990					
	WCDMA Band V	824~849	869~894					
	LTE Band 2	1850~1910	1930~1990					
	LTE Band 4	1710~1755	2110~2155					
Frequency Bands:	LTE Band 5	824~849	869~894					
	LTE Band 7	2500~2570	2620~2690					
	Wi-Fi 2.4G	2412~2462	2412~2462					
	Bluetooth	2402~2480	2402~2480					
	Wi-Fi 5G	5150~5850	5150~5850					
	GNSS	/	1559~1610					

### Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

### Accessory:

GPS Antenna No.	Model No.	Description	Manufacturer		
1	481D	519 ± 10			
2	334D	750 + 20	Shenzhen VLG Wireless Technology		
3	452D	850 + 20	Co., LTD		
4	D90B	990 + 20			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or faisification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

1/F, Unit D, Building 1, Kanghong Urange Science Park, No.13/, Keyuan 3rd Koad, Fengdong New Town, Xran, Shaanu, China 710086 中国・西安・洋东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 6 of 22

### 1.1 Description of Support Units

The EUT has been tested as an independent unit.

#### 1.2 Test Location

All tests were performed at:

Company:	SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.			
Address:	1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xi' an, Shaanxi China			
Post code:	710086			
Test engineer:	Abbott Wang			

## 1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### •A2LA (Certificate No. 4854.01)

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0095.

IC#: 25613.

### • FCC –Designation Number: CN1337

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. has been recognized as an accredited

testing laboratory.

Designation Number: CN1337.

Test Firm Registration Number: 917410

### 1.4 Deviation from Standards

None

### 1.5 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are temple(s) are tended for 30 days only.

1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xfan, Shaand, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 7 of 22

#### **Emission Test Results** 2

## 2.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	47 CFR Part 15, Subpart B	17 CFR Part 15, Subpart B						
Test Method:	ANSI C63.4:2014	NSI C63.4:2014						
Frequency Range:	50kHz to 30MHz							
Receiver Setup:	RBW = 9kHz, VBW = 30kHz	BW = 9kHz, VBW = 30kHz						
	Frequency Dense (MIII-)	Limit(	dBμV)					
	Frequency Range (MHz)	Quasi-peak	average					
	0.15M-0.5MHz	66 ~ 56*	56 ~ 46*					
Limit:	0.5M-5MHz	56	46					
	5M-30MHz	60	50					
	*Decreases with the logarithm of the frequency							
	Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz							

### 2.1.1 E.U.T. Operation

Operating Environment:

Operating Environment.	Sperdung Environment.						
Temperature:	22~25°C						
Humidity:	40~60%RH						
Atmospheric Pressure:	96~98kPa						
Pretest these modes to	a: BT+2.4GWLAN+GNSS RX+ WCDMA Band V Idle						
find the worst case:	b: BT+5GWLAN+GNSS RX+LTE Band 5 Idle						
The worst case for final	a: BT+2.4GWLAN+GNSS RX+ WCDMA Band V Idle						
test:							



中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

www.sgsgroup.com.cn




Report No.: XEWA2310000073RG02

Rev.: 01

Page: 8 of 22

#### 2.1.2 Test Setup Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

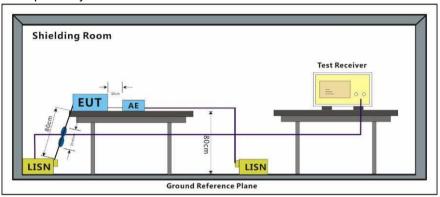

### 2.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or faisification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

1/F, Unit D, Building 1, Kanghong Orange Soence Park, No.137, Keyuan 3rd Hoad, Hengdong New Yolm, Xran, Shaanu, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086


t (86–29) 6282 7885

www.sgsgroup.com.cn



Report No.: XEWA2310000073RG02

Rev.: 01 Page: 9 of 22

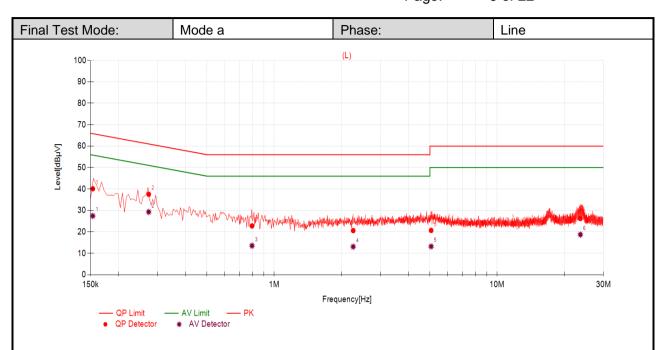

Data	Data List										
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.1535	9.86	30.25	40.11	65.81	25.70	17.59	27.45	55.81	28.36	PASS
2	0.2735	9.89	27.65	37.54	61.01	23.47	19.41	29.30	51.01	21.71	PASS
3	0.7954	9.92	12.87	22.79	56.00	33.21	3.62	13.54	46.00	32.46	PASS
4	2.2623	9.86	10.76	20.62	56.00	35.38	3.23	13.09	46.00	32.91	PASS
5	5.0617	9.88	10.82	20.70	60.00	39.30	3.32	13.20	50.00	36.80	PASS
6	23.6621	10.30	15.96	26.26	60.00	33.74	8.43	18.73	50.00	31.27	PASS

### Remark:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
- 3. Margin = Limit[dBμV] Value[dBμV]



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are temple(s) are tended for 30 days only.

| I/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Toum, X/an, Shaami, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086


t (86–29) 6282 7885 ww t (86–29) 6282 7885 sgs



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 10 of 22

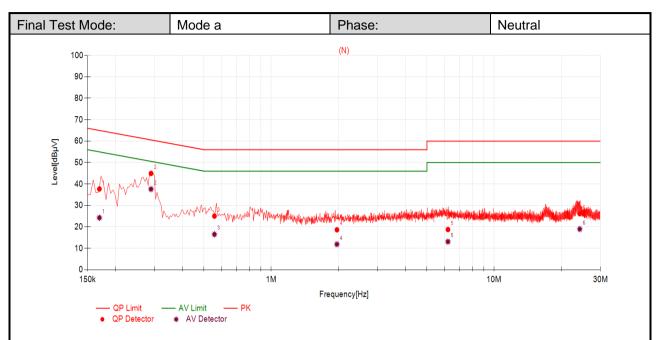

	Data List											
١	NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
	1	0.1695	9.80	27.90	37.70	64.98	27.28	14.46	24.26	54.98	30.72	PASS
	2	0.2889	9.79	35.14	44.93	60.56	15.63	27.83	37.62	50.56	12.94	PASS
	3	0.5564	9.86	15.18	25.04	56.00	30.96	6.66	16.52	46.00	29.48	PASS
	4	1.9727	9.85	8.79	18.64	56.00	37.36	2.04	11.89	46.00	34.11	PASS
	5	6.2117	10.03	8.74	18.77	60.00	41.23	3.08	13.11	50.00	36.89	PASS
	6	24.2524	10.29	15.86	26.15	60.00	33.85	8.69	18.98	50.00	31.02	PASS

### Remark:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
- 3. Margin = Limit[dBμV] Value[dBμV]



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are temple(s) are tended for 30 days only.

| I/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, X7an, Shaamai, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885 w t (86–29) 6282 7885 sg



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 11 of 22

### 2.2 Radiated Emissions (30MHz-1GHz)

Test Requirement:	47 CFR Part 15, Subpart B				
Test Method:	ANSI C63.4:2014				
Frequency Range:	30MHz to 1GHz				
Measurement Distance:	3m				
	Frequency Range (MHz)	Limit(dBµV/m)	Detector		
	30MHz -88MHz	40.0	Quasi-peak		
Limit:	88MHz-216MHz 43.5		Quasi-peak		
	216MHz-960MHz	46.0	Quasi-peak		
	960MHz-1000MHz 54.0		Quasi-peak		
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz				

### 2.2.1 E.U.T. Operation

Temperature:	22~25°C
Humidity:	40~60%RH
Atmospheric Pressure:	96~98kPa
Pretest these modes to	a: BT+2.4GWLAN+GNSS RX+ WCDMA Band V Idle
find the worst case:	b: BT+5GWLAN+GNSS RX+LTE Band 5 Idle
The worst case for final test:	a: BT+2.4GWLAN+GNSS RX+ WCDMA Band V Idle



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.anf">https://www.sgs.com/en/Terms-and-Conditions




Report No.: XEWA2310000073RG02

Rev.: 01

Page: 12 of 22

### 2.2.2 Test Setup Procedures

- 1. The EUT was placed in a semi Anechoic Chamber as show below
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest radiation.
- 4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- 5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- 6. Set the test-receiver system to Peak Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
- 7. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.

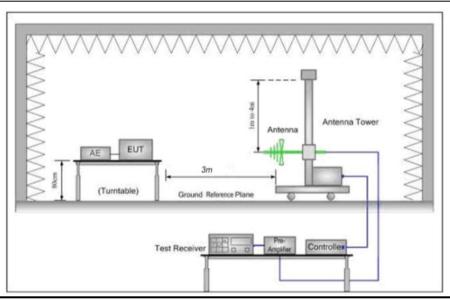

#### 2.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

The three polarities of X,Y,Z were measured by EUT, but only the worst data had been displayed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document\_aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document\_aspx</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in fully, without prior written approval of the Company. Any unauthorized alteration, forgety or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xian, Shaamd, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086


t (86–29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 13 of 22

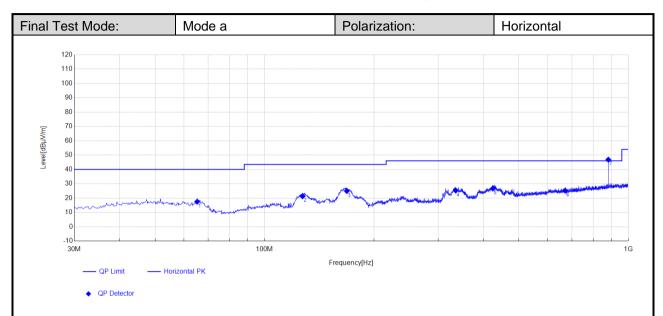

Data	List							
NO.	Freq. [MHz]	AF[dB/m]	Factor [dB]	QP Reading[dBμV]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity
1	65.3151	12.04	-27.01	32.47	17.50	40.00	22.50	Horizontal
2	127.2134	8.44	-26.59	39.44	21.29	43.50	22.21	Horizontal
3	168.3497	8.83	-26.22	42.32	24.93	43.50	18.57	Horizontal
4	335.4171	14.23	-25.47	36.49	25.25	46.00	20.75	Horizontal
5	424.2869	16.01	-24.85	35.5	26.66	46.00	19.34	Horizontal
6	670.5221	19.57	-23.77	29.42	25.22	46.00	20.78	Horizontal
7*	881.2482	21.75	-23.13	48.18	46.80	-	-	Horizontal

### Remark:

- 1. The Quasi-Peak measurements were performed on the EUT.
- 2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dB $\mu$ V/m] –Value[dB $\mu$ V/m]

Note\*: #7 30M-1G: is system simulator signal which can be ignored.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx, and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration forgery or faisification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/F, Unit D, Bulding 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xian, Shaanu, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086


t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 14 of 22

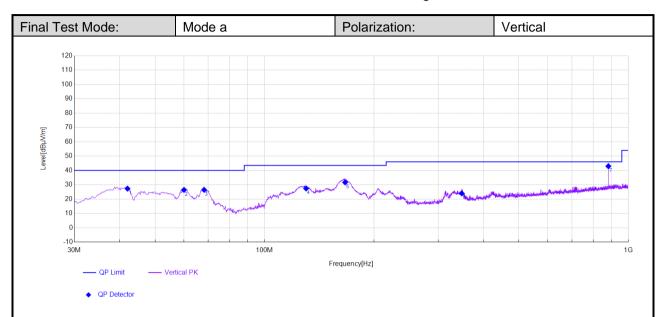

Data	Data List							
NO.	Freq. [MHz]	AF[dB/m]	Factor [dB]	QP Reading[dBμV]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity
1	42.0304	13.51	-27.64	41.41	27.28	40.00	12.72	Vertical
2	60.076	12.39	-27.25	41.28	26.42	40.00	13.58	Vertical
3	68.2256	10.41	-26.87	42.91	26.45	40.00	13.55	Vertical
4	130.124	8.16	-26.39	45.64	27.41	43.50	16.09	Vertical
5	166.6033	9.02	-26.24	48.88	31.66	43.50	11.84	Vertical
6	348.6117	14.93	-25.29	34.31	23.95	46.00	22.05	Vertical
7*	881.4423	21.76	-23.13	44.31	42.94	-	-	Vertical

### Remark:

- 1. The Quasi-Peak measurements were performed on the EUT.
- 2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dB $\mu$ V/m] –Value[dB $\mu$ V/m]

Note\*: #7 30M-1G: is system simulator signal which can be ignored.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or faisification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

1/F, Unit D, Building 1, Kanghong Urange Scence Park, No.13/, Keyuan 3rd Koad, Fengdong New Town, Xran, Shaanu, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技図1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 15 of 22

## 2.3 Radiated Emissions (above 1GHz)

Test Requirement:	47 CFR Part 15, Subpart B					
Test Method:	ANSI C63.4:2014					
Frequency Range:	Above 1GHz	Above 1GHz				
Measurement Distance:	3m					
	Frequency (MHz)	Limit (dBµV/m)	Detector			
Limit:	A1 4011	74	Peak			
	Above 1GHz	54	Average			
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 5th harmonic of the highest frequency or 40GHz, whichever is lower.					

### 2.3.1 E.U.T. Operation

Temperature:	22~25°C
Humidity:	40~60%RH
Atmospheric Pressure:	96~98kPa
Pretest these modes to find the worst case:	a: BT+2.4GWLAN+GNSS RX+ WCDMA Band V Idle b: BT+5GWLAN+GNSS RX+LTE Band 5 Idle
The worst case for final test:	a: BT+2.4GWLAN+GNSS RX+ WCDMA Band V Idle



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms.and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or faisfication of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

1/F, Unit D, Building 1, Kanghong Urange Science Park, No.13/, Keyuan 3rd Koad, Fengdong New Town, Xran, Shaanu, China 710086 中国・西安・洋东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885




Report No.: XEWA2310000073RG02

Rev.: 01

Page: 16 of 22

### 2.3.2 Test Setup Procedures

- 1. The EUT was placed in a full Anechoic Chamber as show below
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz).
- 4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- 5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- 6. Set the test-receiver system to Peak and AV Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
- 7. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

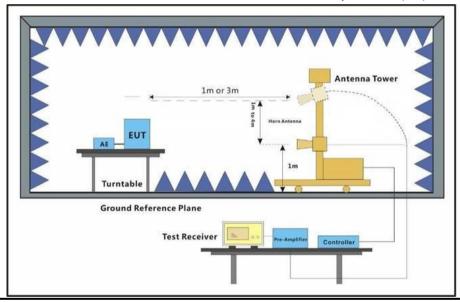

#### 2.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The three polarities of X, Y, Z were measured by EUT, but only the worst data had been displayed. Scan from 5th harmonic of the highest frequency or 40GHz, whichever is lower, the disturbance above 18GHz was very low. The points marked on below plots are the highest emissions could be found when testing, so only below points had been displayed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Comditions/Terms

1/F, Unit D, Building 1, Kanghong Urange Science Park, No.13/, Keyuan 3rd Koad, Fengoong New Yorin, Xran, Snaams, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086


t (86–29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 17 of 22

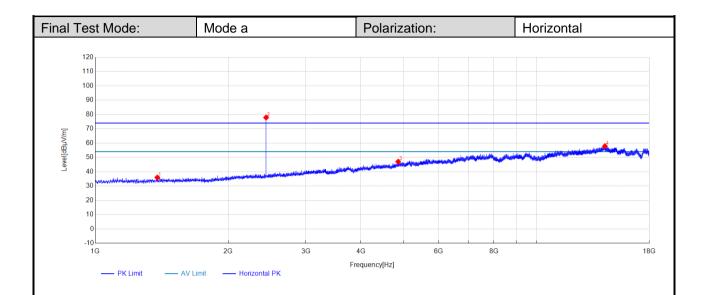

Data L	Data List							
NO.	Frequency [MHz]	Reading [dBµV]	AF[dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	1382.1753	64.77	25.84	-54.65	35.96	74.00	38.04	Horizontal
2*	2438.2575	102.59	27.88	-52.64	77.83	•	-	Horizontal
3	4855.7542	62.12	32.83	-47.93	47.02	74.00	26.98	Horizontal
4	14278.2111	56.62	40.72	-39.54	57.80	74.00	16.20	Horizontal

#### Remark:

- 1. The Peak and Average measurements were performed on the EUT.
- 2. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dB $\mu$ V/m] - Level[dB $\mu$ V/m]

Note\*: #2 1G-18G: is RF signal which come from Wi-Fi access point used to connect the EUT, and which can be ignored.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-an

1/F, Unit D, Bulding 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xian, Shaanut, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086


t (86–29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 18 of 22

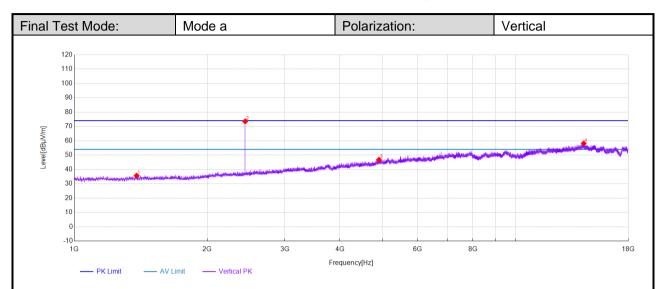

Data L	Data List							
NO.	Frequency [MHz]	Reading [dBµV]	AF[dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	1384.2154	64.45	25.83	-54.64	35.64	74.00	38.36	Vertical
2*	2439.6176	98.28	27.88	-52.63	73.53	-	-	Vertical
3	4901.3161	61.50	33.10	-47.87	46.73	74.00	27.27	Vertical
4	14259.8504	56.78	40.74	-39.44	58.08	74.00	15.92	Vertical

### Remark:

- 1. The Peak and Average measurements were performed on the EUT.
- 2. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dB $\mu$ V/m] - Level[dB $\mu$ V/m]

Note\*: #2 1G-18G: is RF signal which come from Wi-Fi access point used to connect the EUT, and which can be ignored.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

| If, Unit D, Bulding 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Toum, Xfan, Shaanxi, China 710086 中国・西安・沣东新城科源三路137号康鴻橙方科技園1号楼D单元1层 邮錦: 710086 (86–29) 6282 7885 www.sgsgroup.com.cn (86–29) 6282 7885 sgs.china@sgs.com



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 19 of 22

# 3 Equipment List

CE Test System							
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy/mm/dd)	Cal Due Date (yyyy/mm/dd)		
Shielding Room	Brilliant-emc	N/A	XAW04-03-01	N/A	N/A		
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2023/08/30	2024/08/29		
Artificial network	ROHDE&SCHWARZ	ENV216	XAW01-04-01	2023/06/30	2024/06/29		
Temperature and humidity meter	MingGao	TH101B	XAW01-01-02	2023/08/30	2024/08/29		
Measurement Software	Tonscend	TS+ V4.0.0.0	XAW02-07-01	NCR	NCR		
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2023/02/16	2024/02/15		
Artificial network	ROHDE&SCHWARZ	ENV216	XAW01-04-02	2023/06/30	2024/06/29		

Remark: NCR=No Calibration Requirement



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx, and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration forgery or faisification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

| 1/F, Unit D, Building 1, Kanghong Orange Science Park, No. 137, Keyuan 3rd Road, Fengdong New Toum, XYan, Shaami, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885 www.sgs t (86–29) 6282 7885 sgs.chin



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 20 of 22

RE Test System						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/d d)	Cal.Due date (yyyy/mm/d d)	
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2021/09/09	2024/09/08	
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2023/02/16	2024/02/15	
Spectrum Analyzer	ROHDE&SCH WARZ	FSV3044	XAW01-13-05	2023/05/15	2024/05/14	
Test receiver	ROHDE&SCH WARZ	ESR	XAW01-08-01	2023/08/30	2024/08/29	
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2022/07/28	2024/07/27	
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2022/07/28	2024/07/27	
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2022/07/23	2024/07/22	
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR	
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR	
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR	
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR	
Amplifier	Tonscend	TAP9K3G32	XAW01-41-01	2023/05/15	2024/05/14	
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2023/08/30	2024/08/29	
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2023/08/30	2024/08/29	
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2023/08/30	2024/08/29	
Temperature and humidity meter	MingGao	TH101B	XAW01-01-02	2023/09/04	2024/09/03	
Radio communication analyzer	ROHDE&SCH WARZ	CMW 500	XAW01-03-02	2023/02/16	2024/02/15	
Measurement Software	Tonscend	TS+ V4.0.0.0	XAW02-05-01	NCR	NCR	

Remark: NCR=No Calibration Requirement



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms.and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or faisfication of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

7/F, Unit D, Building 1, Kanghong Orange Science Park, No.13/, Keyuan 3rd Koad, Fengdong New Jown, Xrai, Shaanu, China 710086 中国・西安・洋东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 21 of 22

## 4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.0dB (150kHz to 30MHz)
		± 4.9dB (30MHz to 1GHz)
2	Radiated Emission	± 4.9dB (1GHz to 6GHz)
	Radiated Emission	± 4.7dB (6GHz to 18GHz)
		± 5.26dB (Above 18GHz)

#### Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints by overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.yam.ond.forefront-ond-conditions.yam.ond-forefront-ond-conditions.yam.ond-forefront-ond-conditions.yam.ond-forefront-ond-conditions.yam.ond-forefront-ond-fr

| I/F, Unit D, Building 1, Karghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Toum, Xian, Shaami, China 710086 中国・西安・沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWA2310000073RG02

Rev.: 01

Page: 22 of 22

## 5 Photographs

## 5.1 Test Setup

Refer to Appendix A.1 15B Setup Photos.

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are resulted and such sample(s) are retained for 30 days only.

1/F, Unit D, Bulding 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Toun, Xian, Shaanut, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885