




Plot 21:

Test Date	2024-02-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	ISM
Signal	IEEE 802.11n
Frequency	2412
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.166
ConvF	2.30
Relative permittivity	39.52
Conductivity (S/m)	1.82

Maximum location: X=-14.00, Y=7.00 ; SAR Peak: 0.37 W/kg

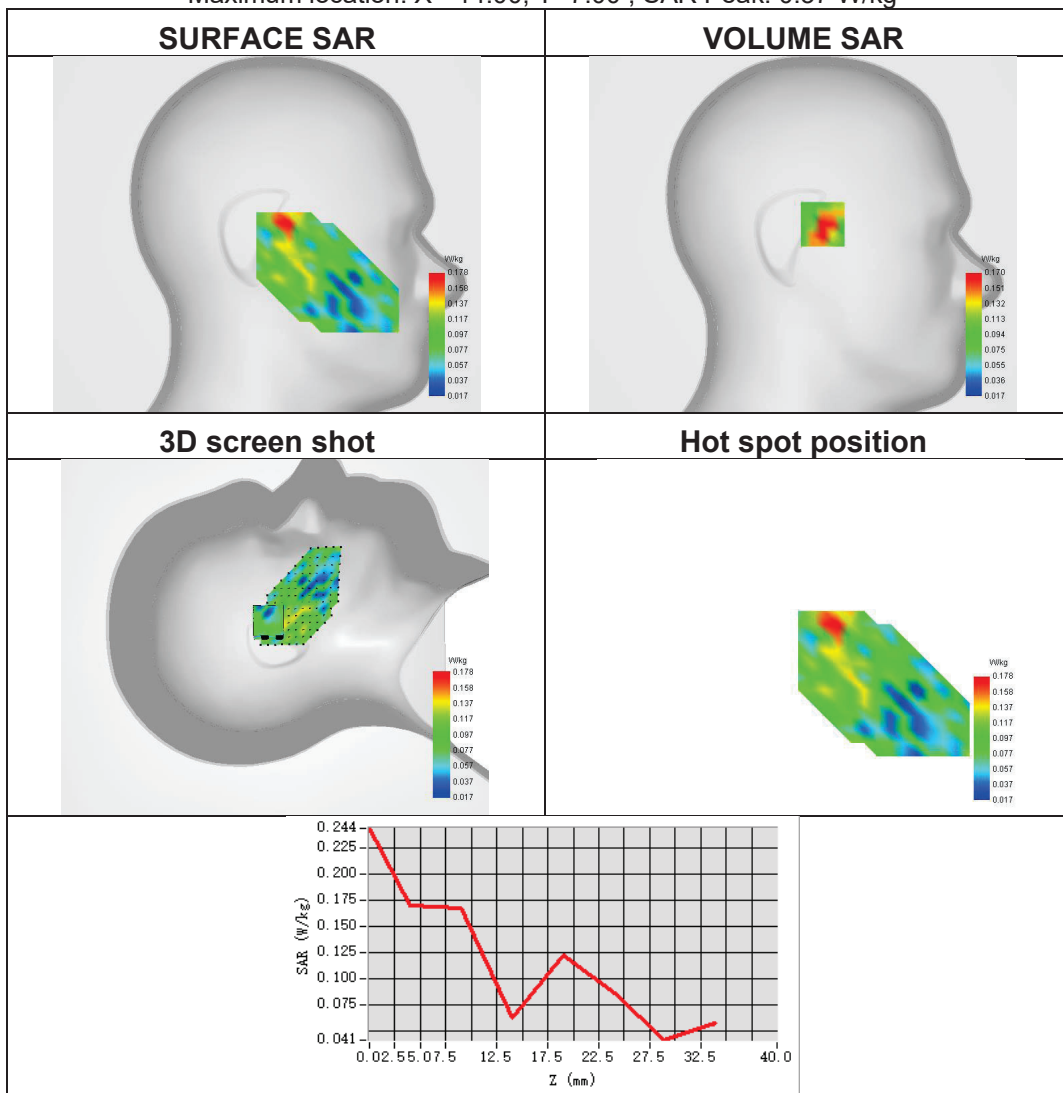




Plot 22:

Test Date	2024-02-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM
Signal	IEEE 802.11n
Frequency	2412
SAR 10g (W/Kg)	0.097
SAR 1g (W/Kg)	0.183
ConvF	2.30
Relative permittivity	39.52
Conductivity (S/m)	1.82

Maximum location: X=-7.00, Y=-7.00 ; SAR Peak: 0.45 W/kg

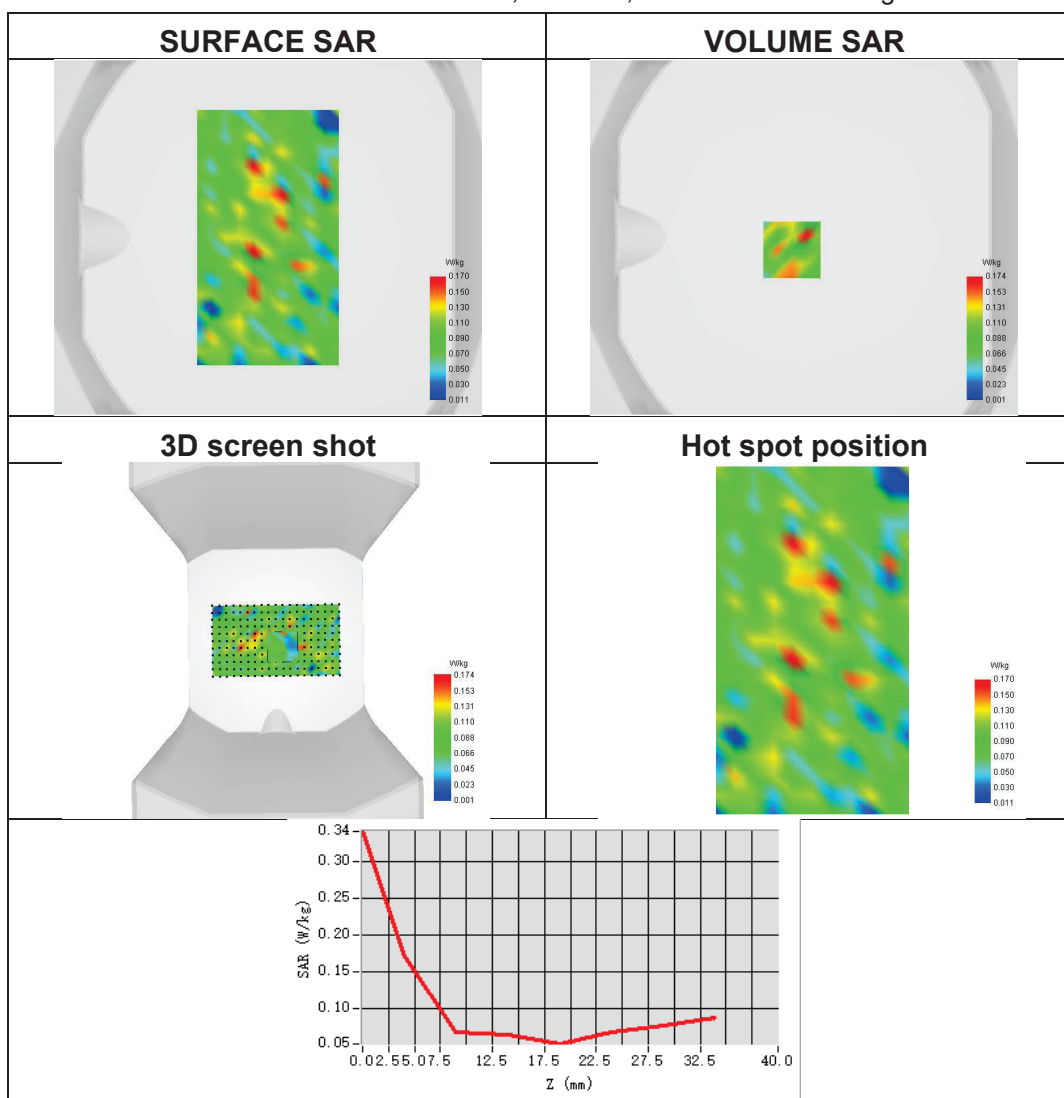




Plot 23:

Test Date	2024-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.047
SAR 1g (W/Kg)	0.105
ConvF	2.24
Relative permittivity	41.12
Conductivity (S/m)	1.41

Maximum location: X=-80.00, Y=-56.00 ; SAR Peak: 0.24 W/kg

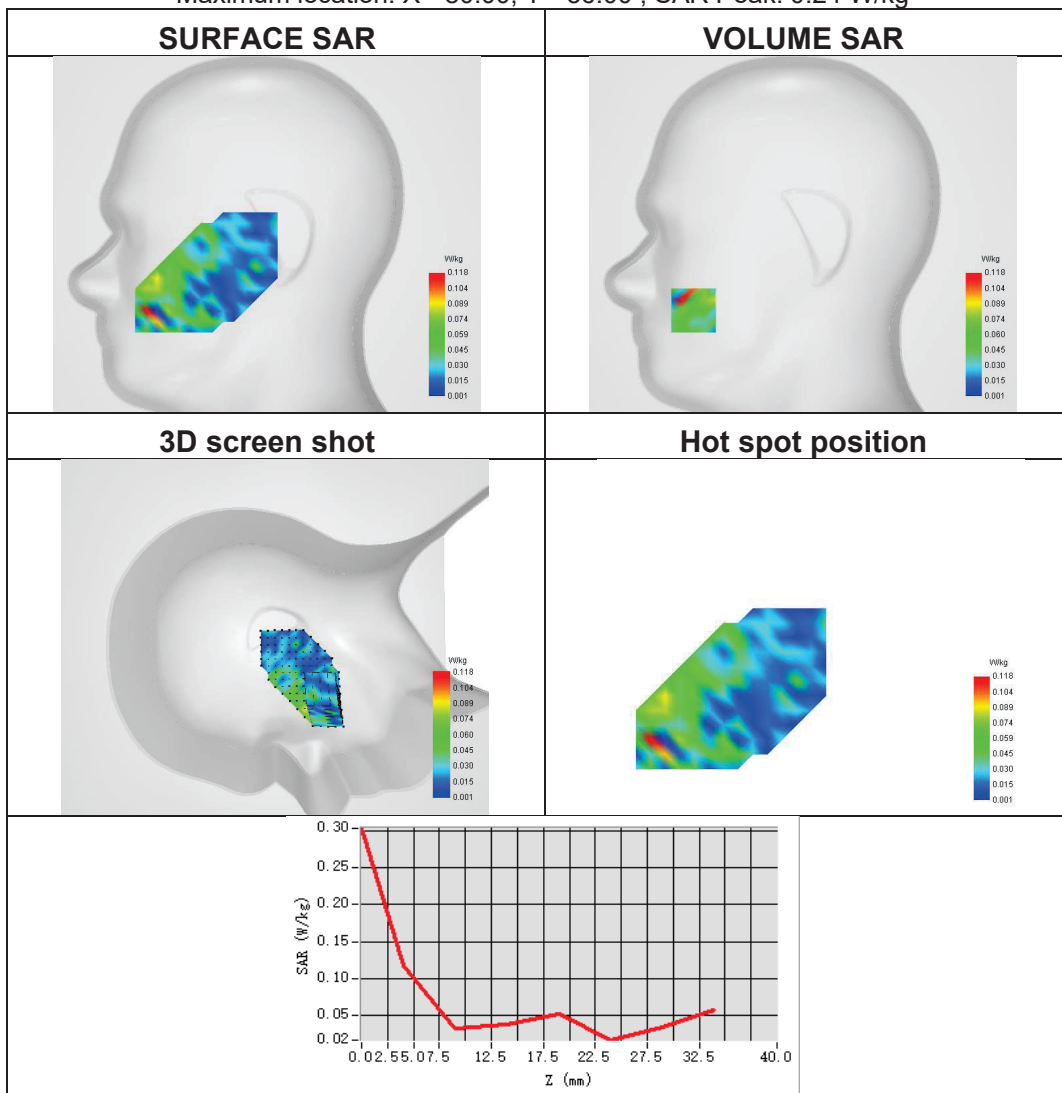




Plot 24:

Test Date	2024-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.387
SAR 1g (W/Kg)	0.688
ConvF	2.24
Relative permittivity	41.12
Conductivity (S/m)	1.41

Maximum location: X=7.00, Y=-8.00 ; SAR Peak: 1.09 W/kg

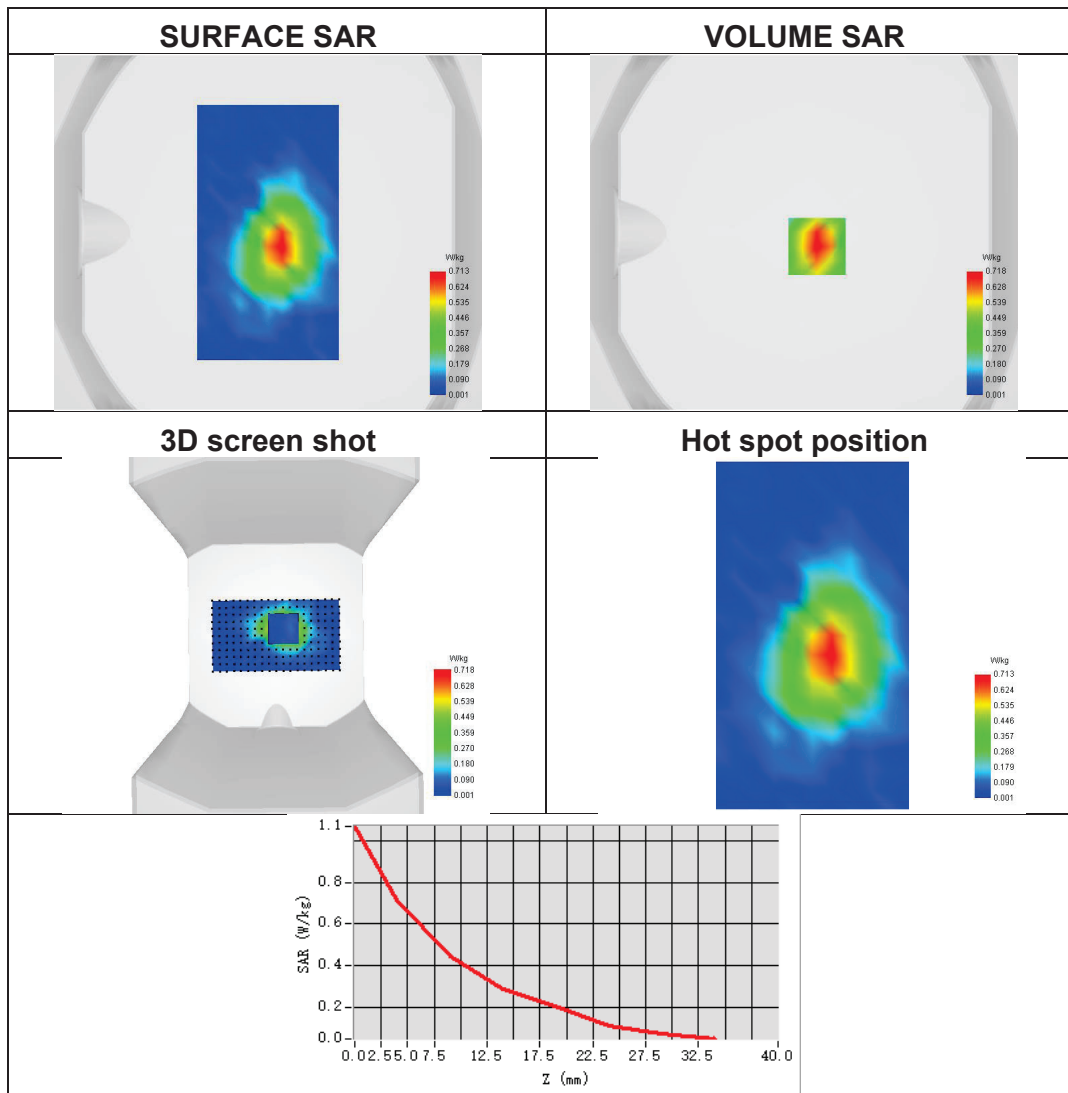




Plot 25:

Test Date	2024-02-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.032
SAR 1g (W/Kg)	0.042
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	1.38

Maximum location: X=-48.00, Y=-33.00 ; SAR Peak: 0.17 W/kg

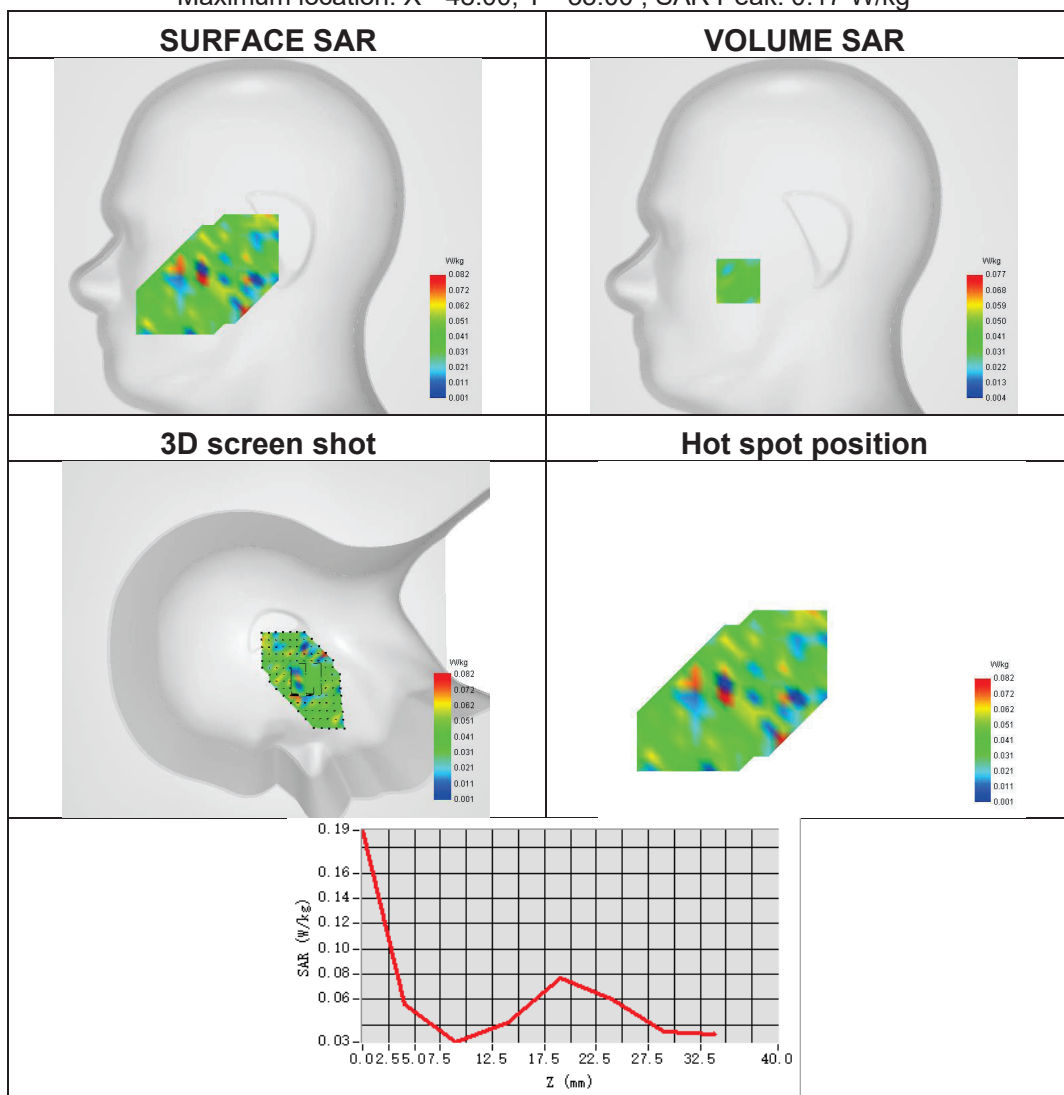




Plot 26:

Test Date	2024-02-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.212
SAR 1g (W/Kg)	0.395
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	1.38

Maximum location: X=7.00, Y=-3.00 ; SAR Peak: 0.77 W/kg

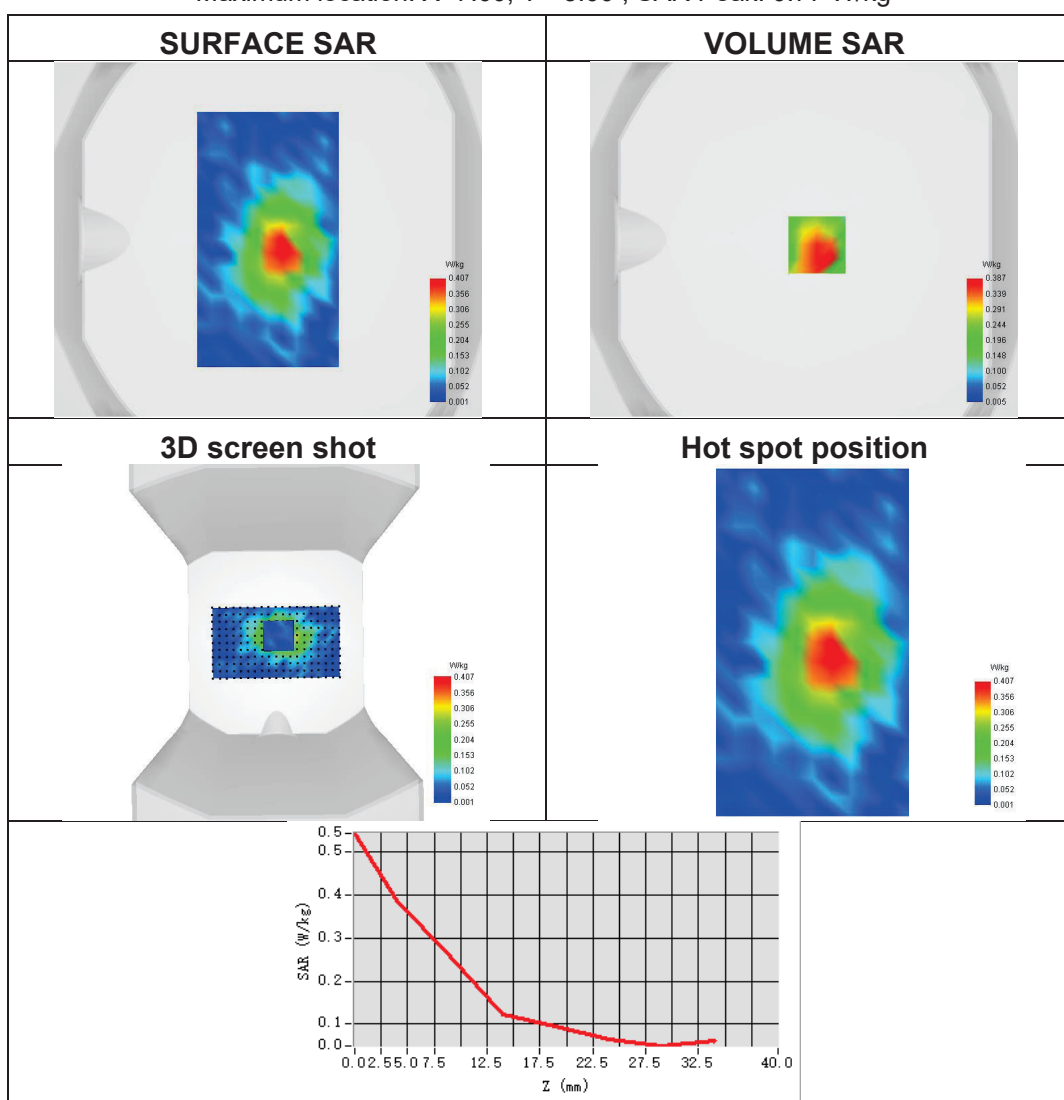




Plot 27:

Test Date	2024-03-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.100
SAR 1g (W/Kg)	0.173
ConvF	1.70
Relative permittivity	41.12
Conductivity (S/m)	0.93

Maximum location: X=-64.00, Y=-47.00 ; SAR Peak: 0.34 W/kg

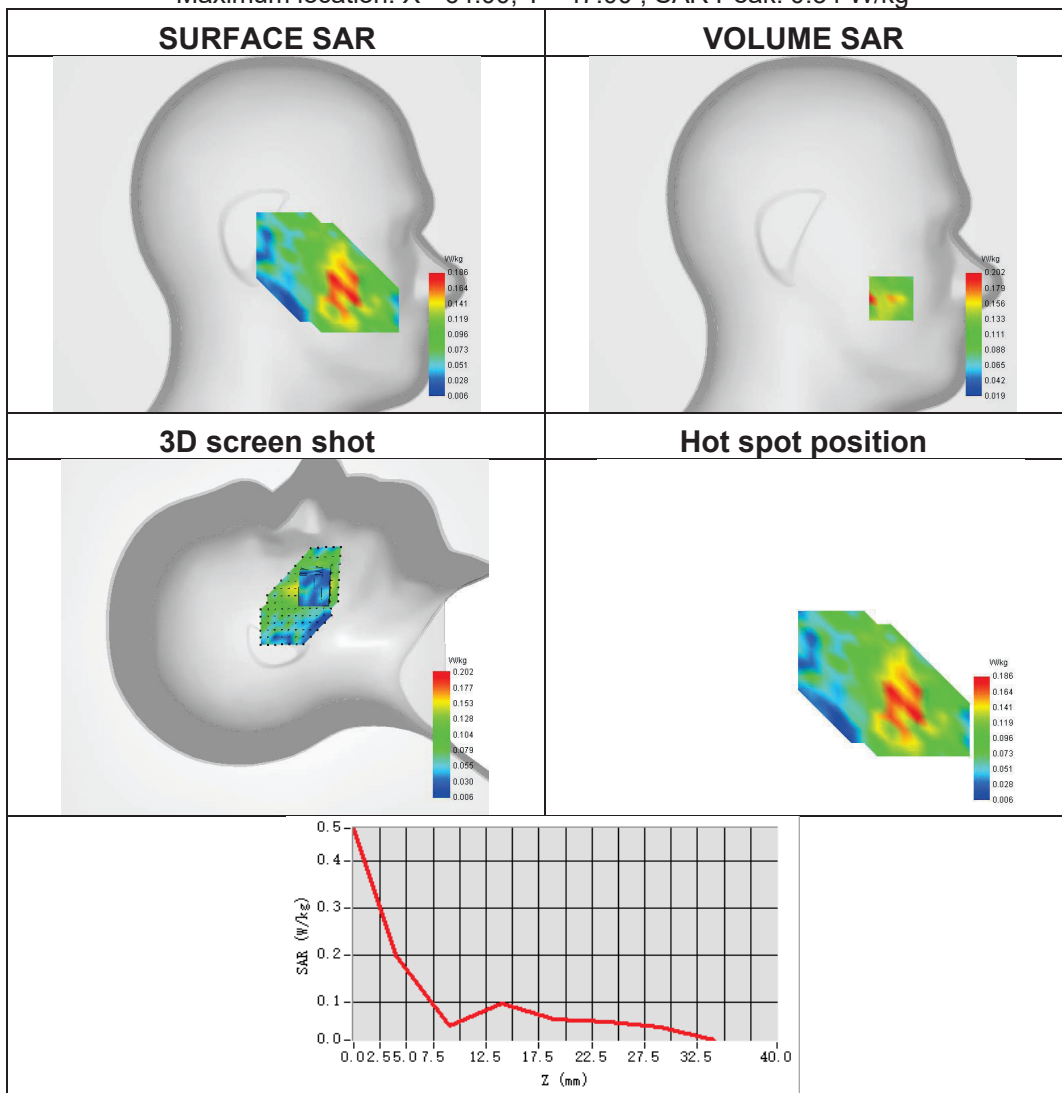




Plot 28:

Test Date	2024-03-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.135
SAR 1g (W/Kg)	0.276
ConvF	1.70
Relative permittivity	41.12
Conductivity (S/m)	0.93

Maximum location: X=9.00, Y=5.00 ; SAR Peak: 0.56 W/kg

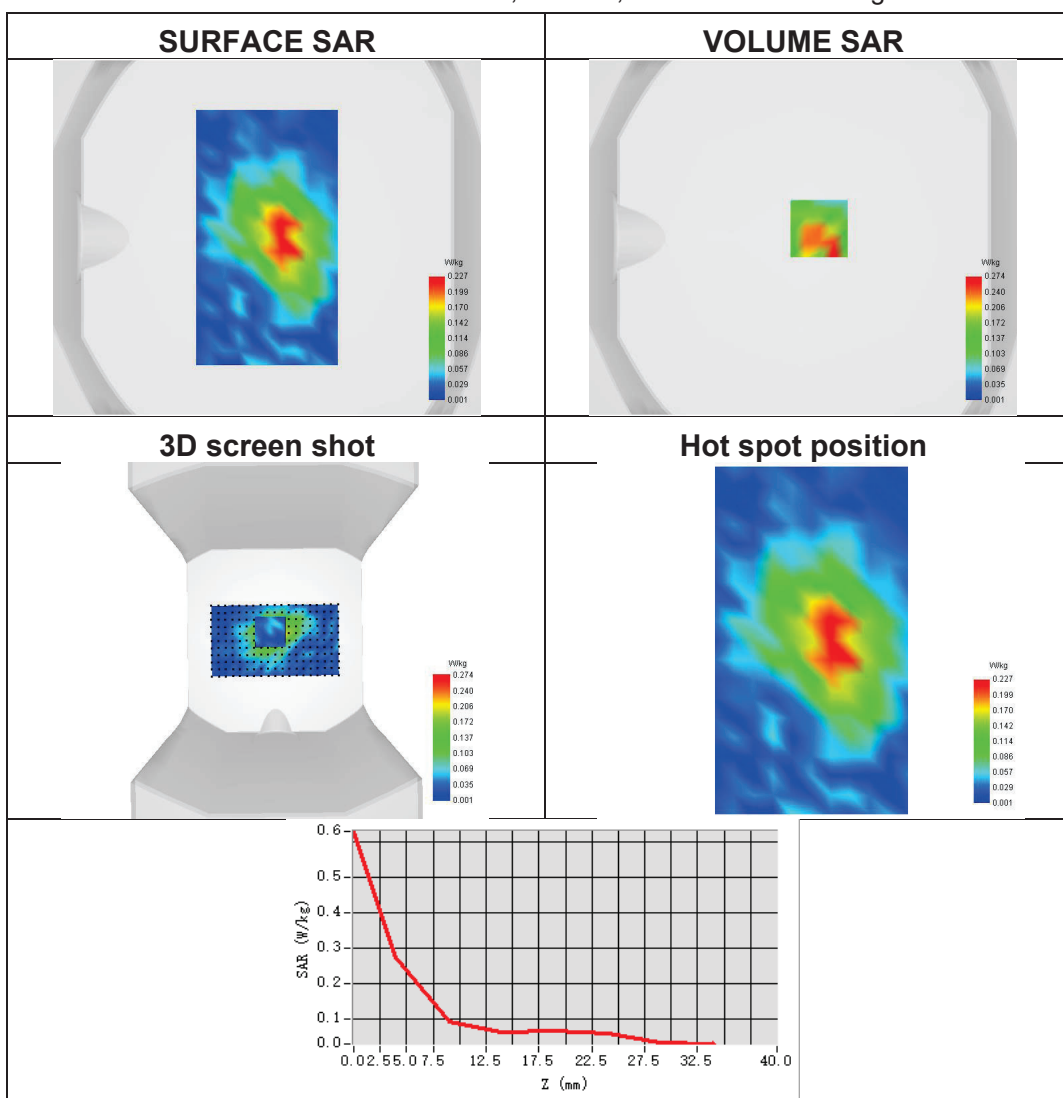




Plot 29:

Test Date	2024-03-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2535
SAR 10g (W/Kg)	0.034
SAR 1g (W/Kg)	0.071
ConvF	2.35
Relative permittivity	39.78
Conductivity (S/m)	1.93

Maximum location: X=-17.00, Y=0.00 ; SAR Peak: 0.20 W/kg

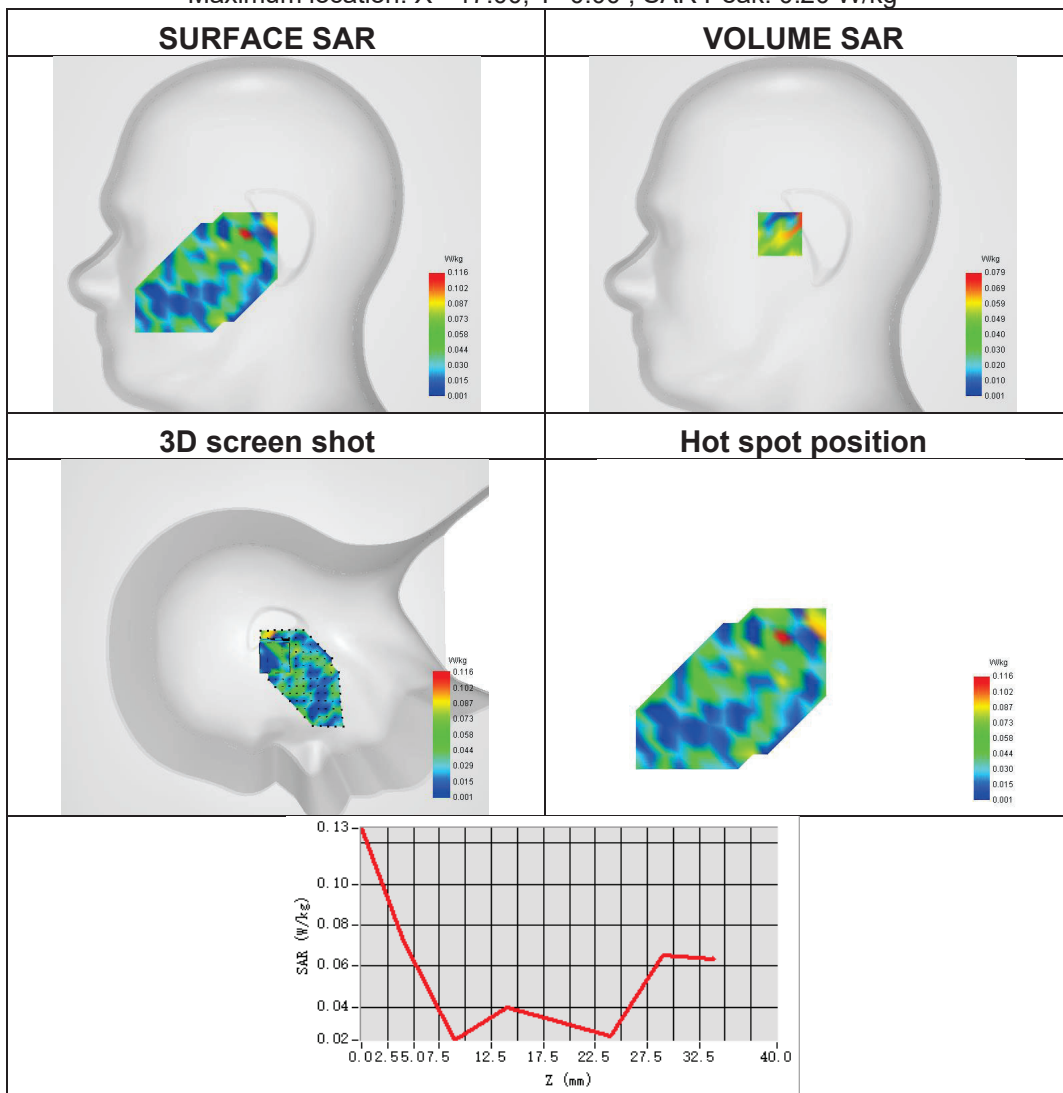




Plot 30:

Test Date	2024-03-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2535
SAR 10g (W/Kg)	0.303
SAR 1g (W/Kg)	0.580
ConvF	2.35
Relative permittivity	39.78
Conductivity (S/m)	1.93

Maximum location: X=16.00, Y=9.00 ; SAR Peak: 1.13 W/kg

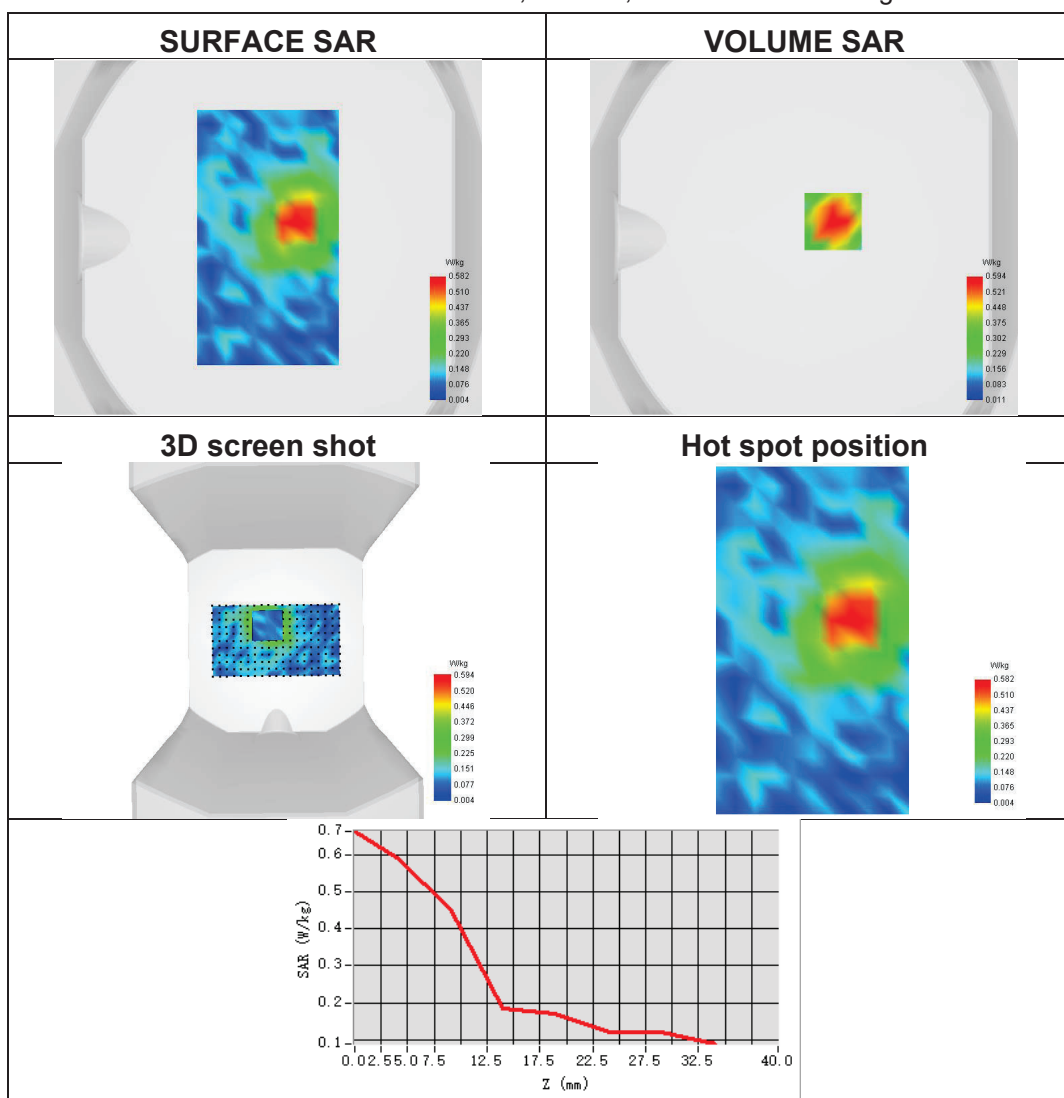




Plot 31:

Test Date	2024-02-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.086
ConvF	1.68
Relative permittivity	42.46
Conductivity (S/m)	0.88

Maximum location: X=-41.00, Y=-32.00 ; SAR Peak: 0.27 W/kg

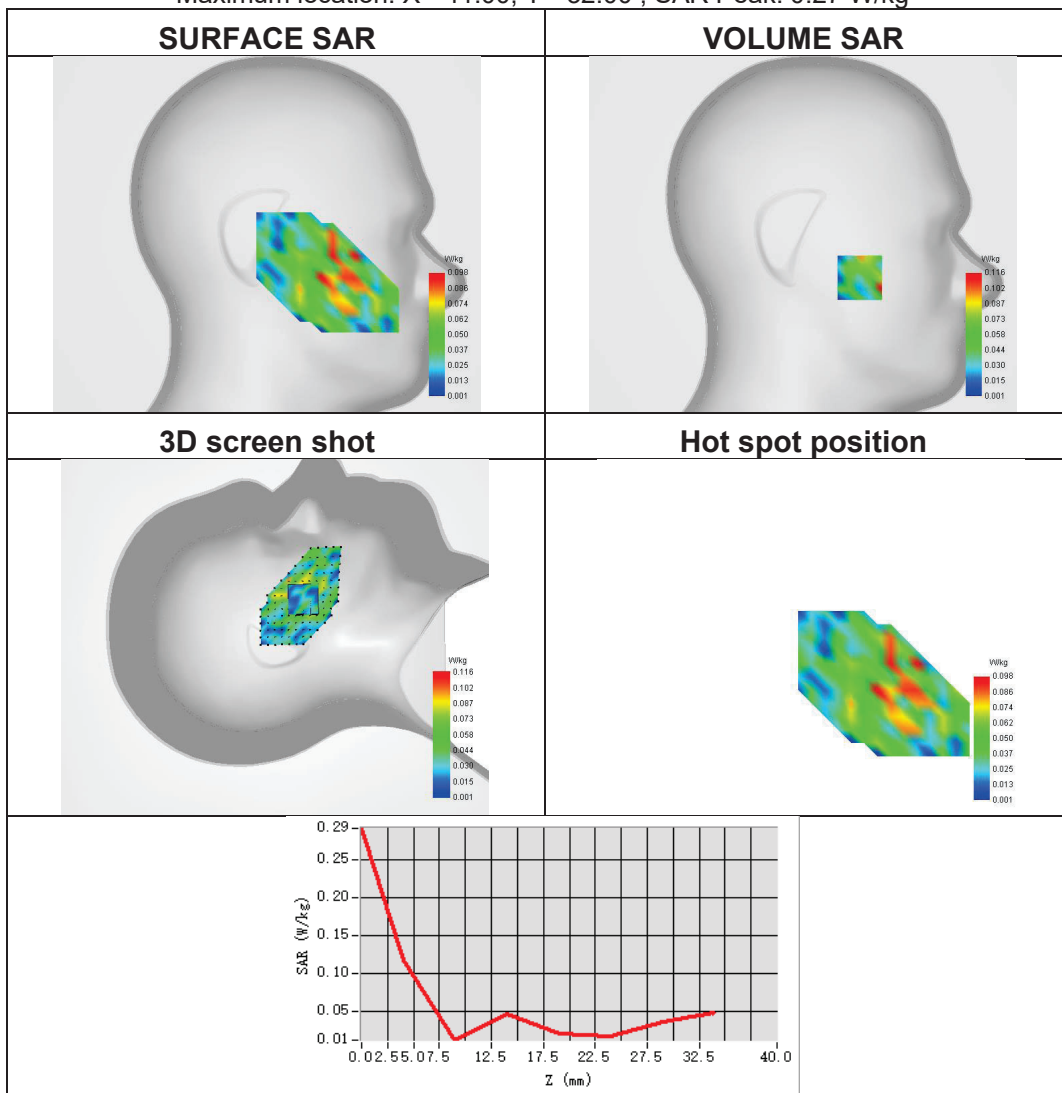




Plot 32:

Test Date	2024-02-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.062
ConvF	1.68
Relative permittivity	42.46
Conductivity (S/m)	0.88

Maximum location: X=1.00, Y=-5.00 ; SAR Peak: 0.15 W/kg

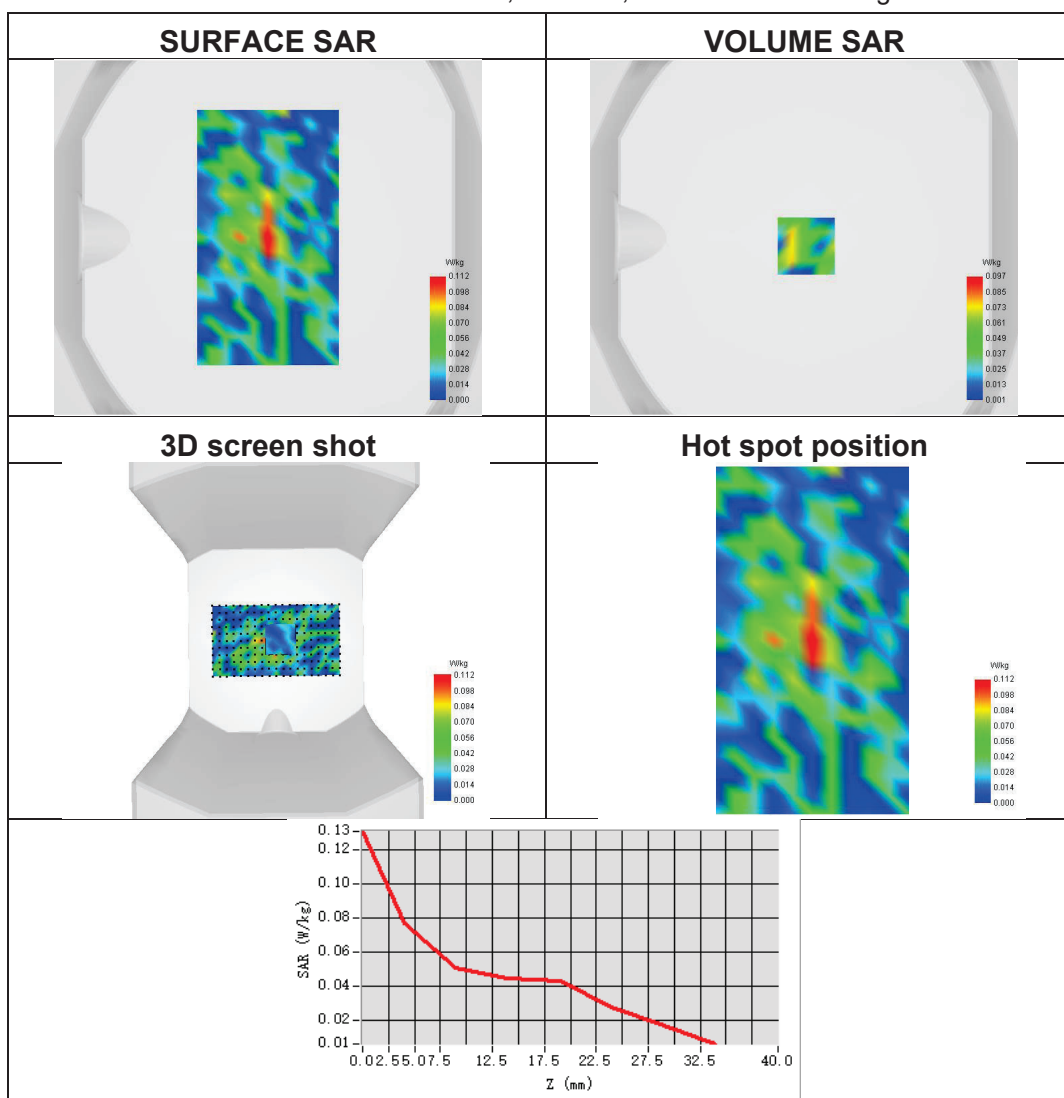




Plot 33:

Test Date	2024-02-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.085
SAR 1g (W/Kg)	0.145
ConvF	1.68
Relative permittivity	42.46
Conductivity (S/m)	0.88

Maximum location: X=-55.00, Y=-40.00 ; SAR Peak: 0.27 W/kg

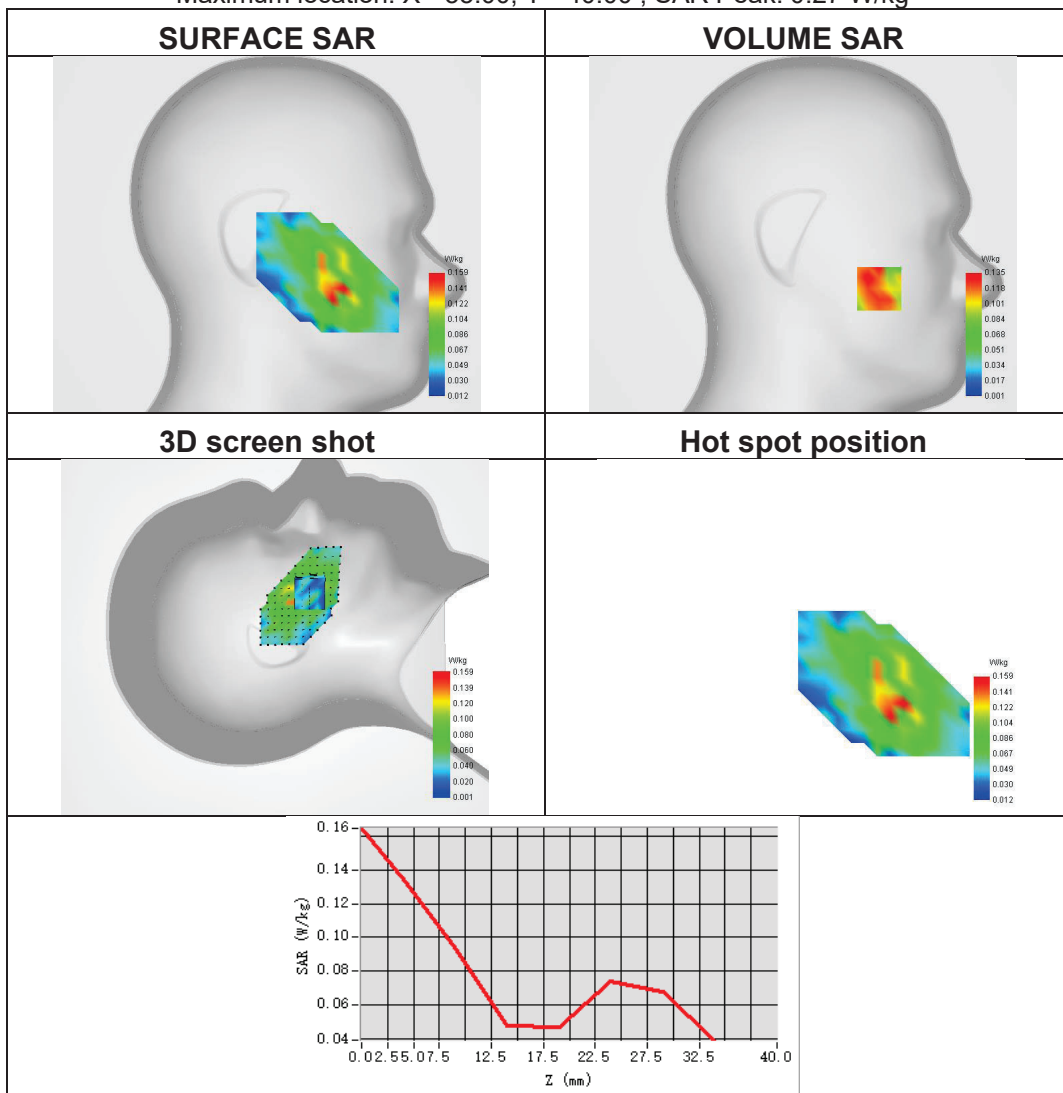




Plot 34:

Test Date	2024-02-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.156
ConvF	1.68
Relative permittivity	42.46
Conductivity (S/m)	0.88

Maximum location: X=-2.00, Y=3.00 ; SAR Peak: 0.31 W/kg

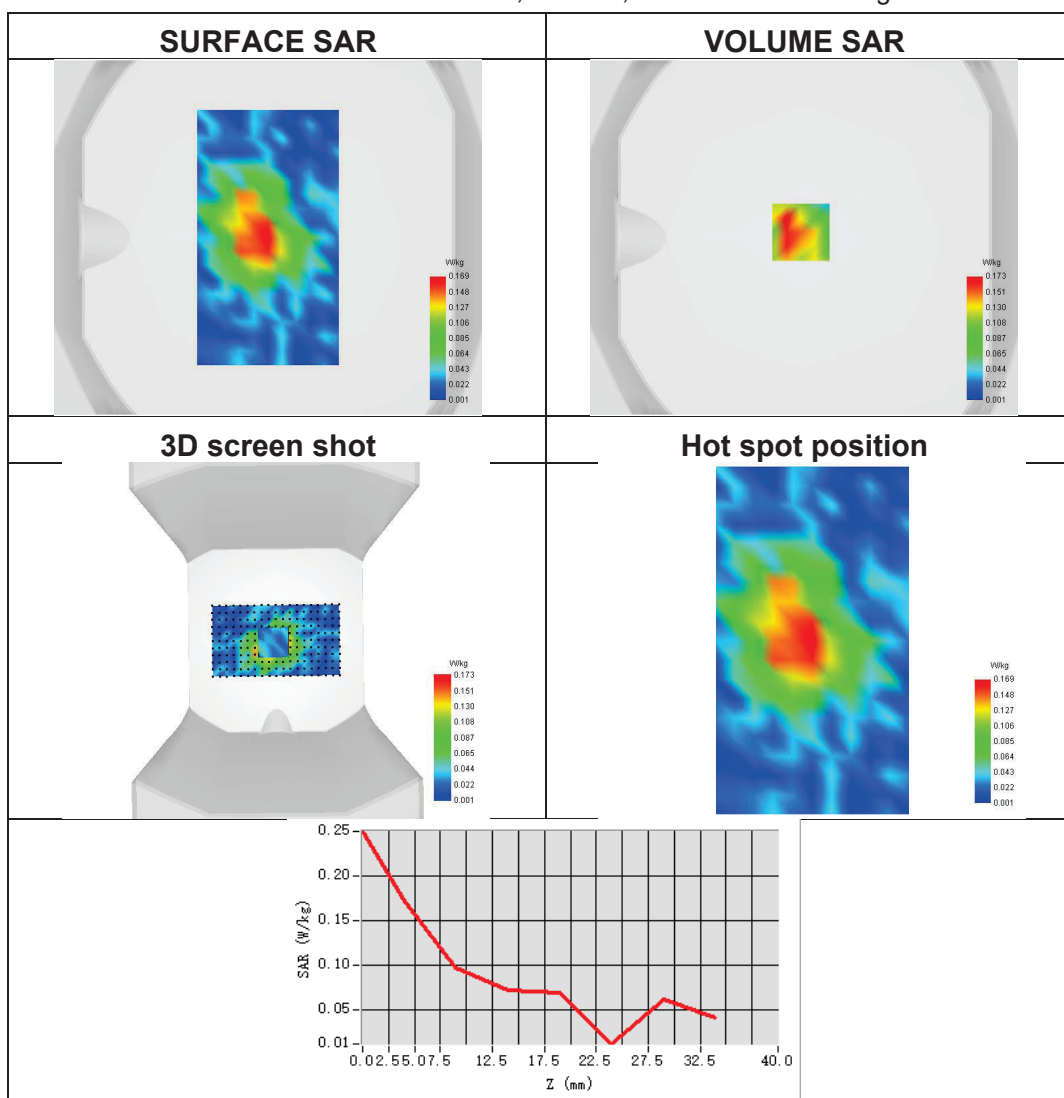




Plot 35:

Test Date	2024-02-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.078
ConvF	1.68
Relative permittivity	42.46
Conductivity (S/m)	0.88

Maximum location: X=-55.00, Y=-25.00 ; SAR Peak: 0.16 W/kg

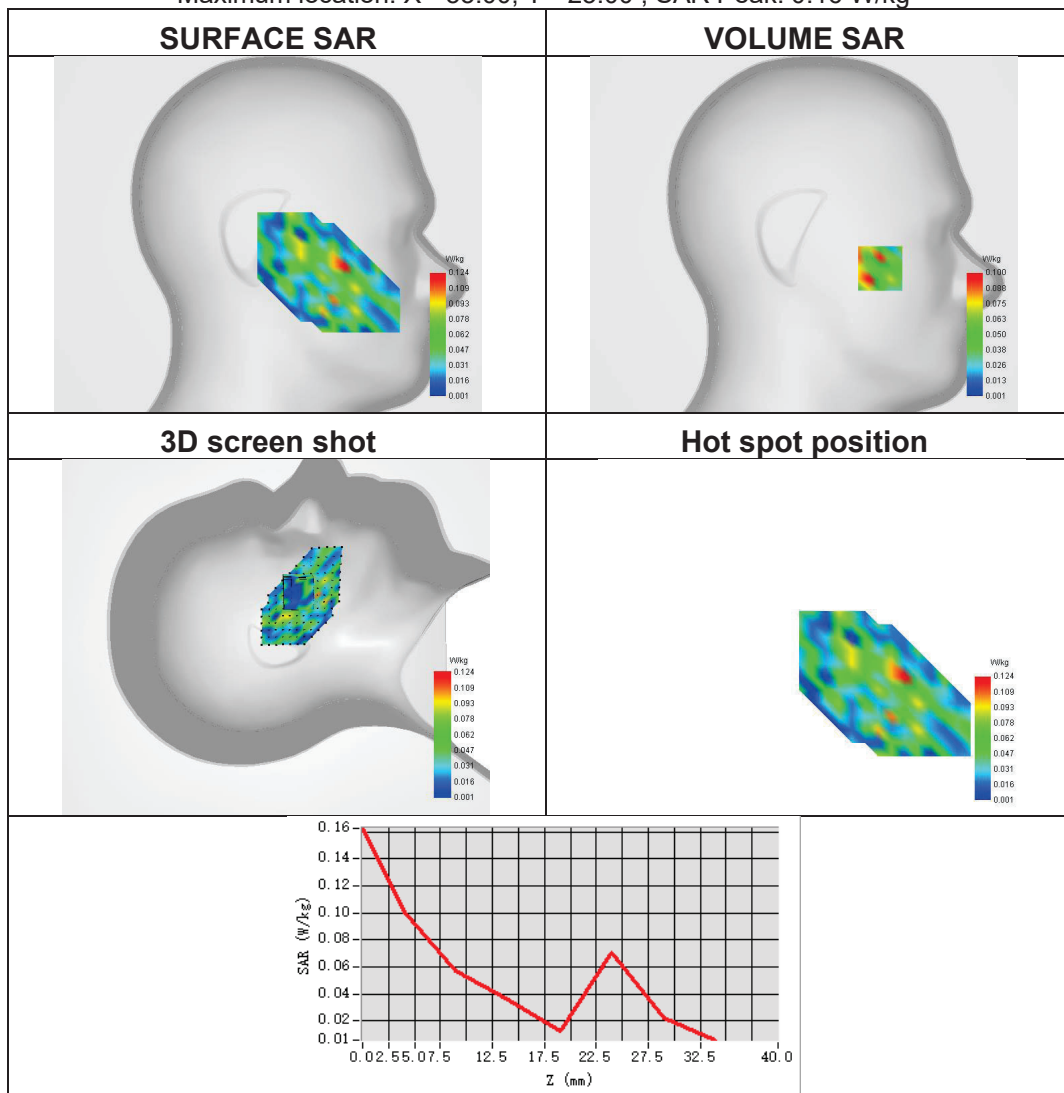




Plot 36:

Test Date	2024-02-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.068
ConvF	1.68
Relative permittivity	42.46
Conductivity (S/m)	0.88

Maximum location: X=-15.00, Y=11.00 ; SAR Peak: 0.17 W/kg

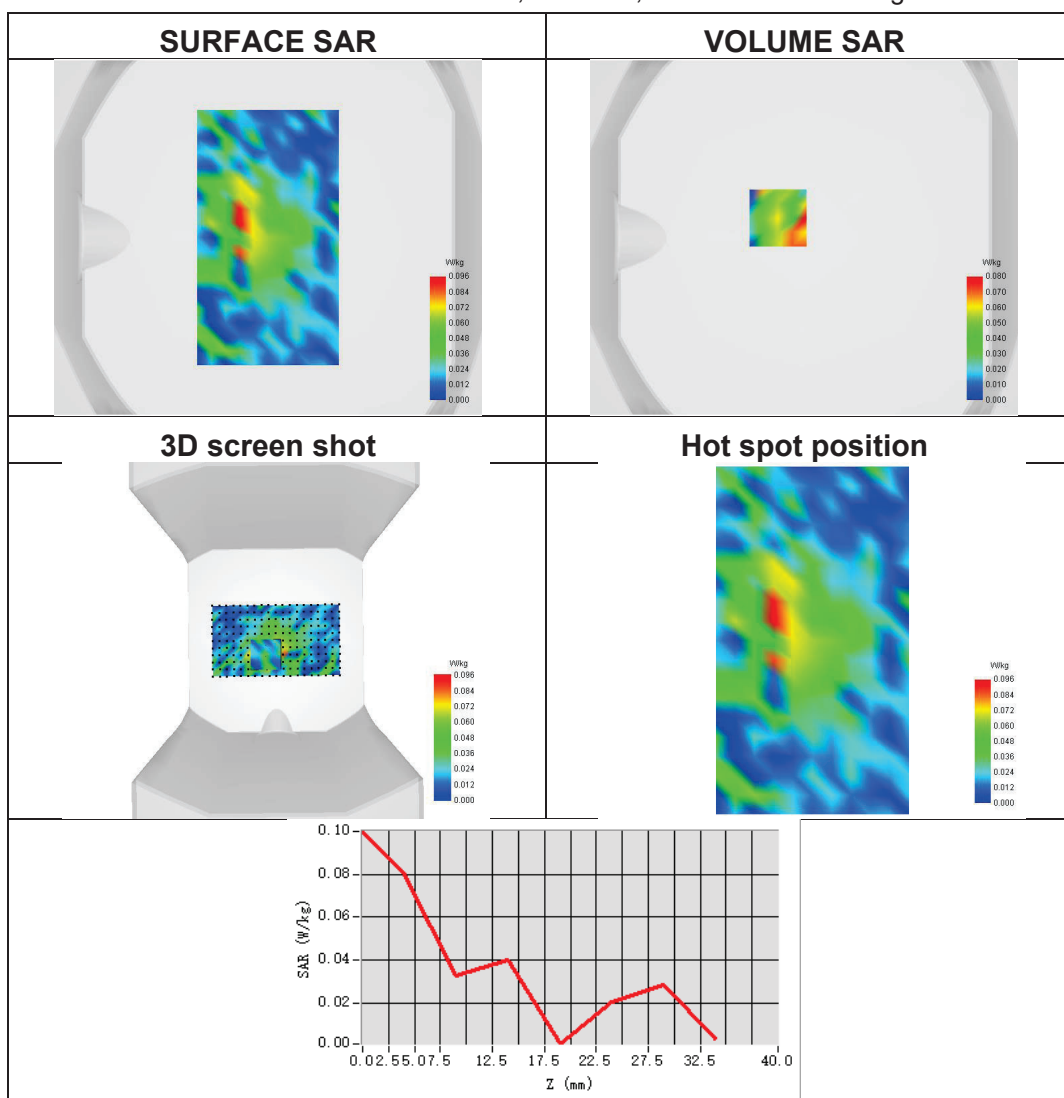




Plot 37:

Test Date	2024-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.081
SAR 1g (W/Kg)	0.152
ConvF	2.24
Relative permittivity	41.12
Conductivity (S/m)	1.41

Maximum location: X=-71.00, Y=-56.00 ; SAR Peak: 0.28 W/kg

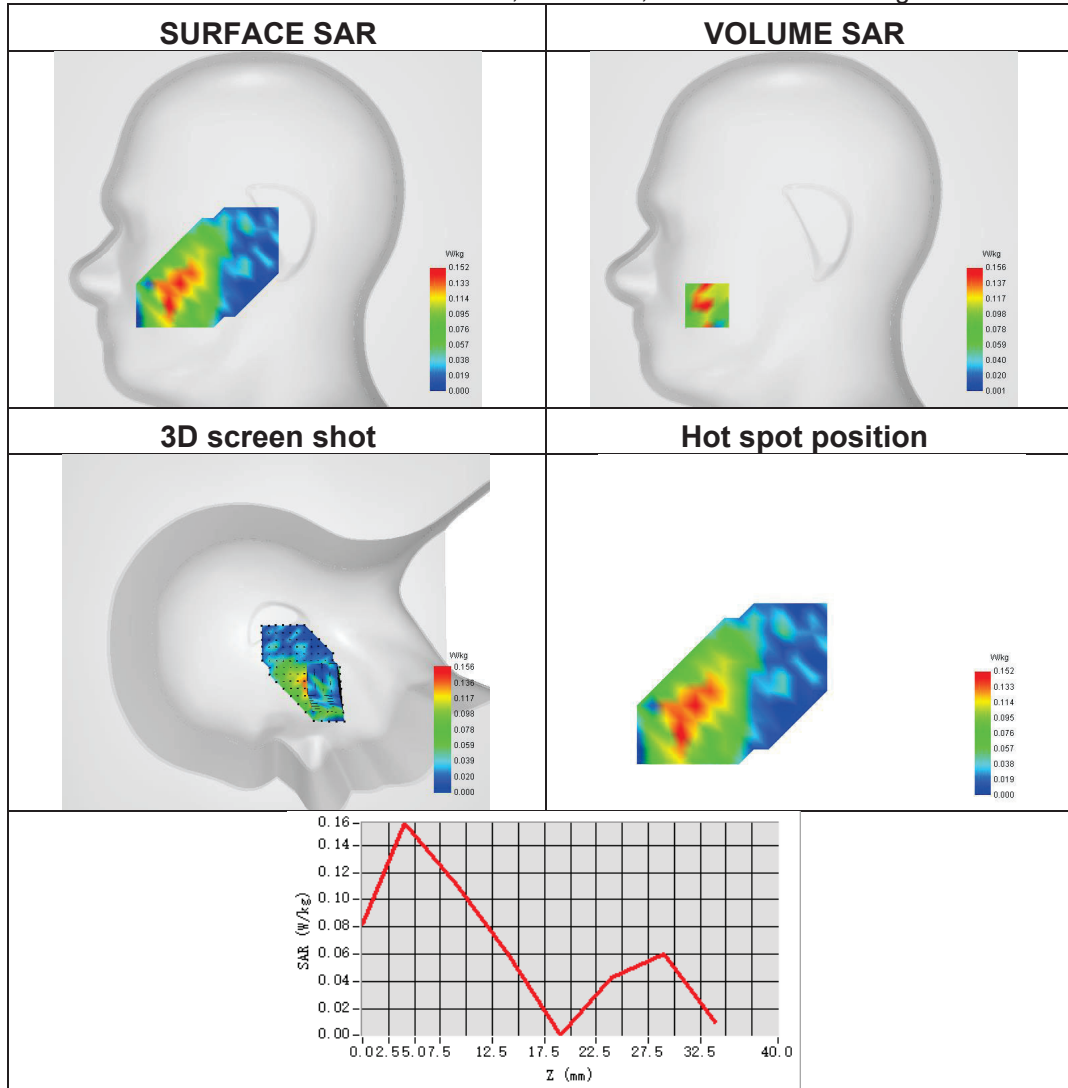




Plot 38:

Test Date	2024-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.358
SAR 1g (W/Kg)	0.608
ConvF	2.24
Relative permittivity	41.12
Conductivity (S/m)	1.41

Maximum location: X=8.00, Y=-8.00 ; SAR Peak: 0.92 W/kg

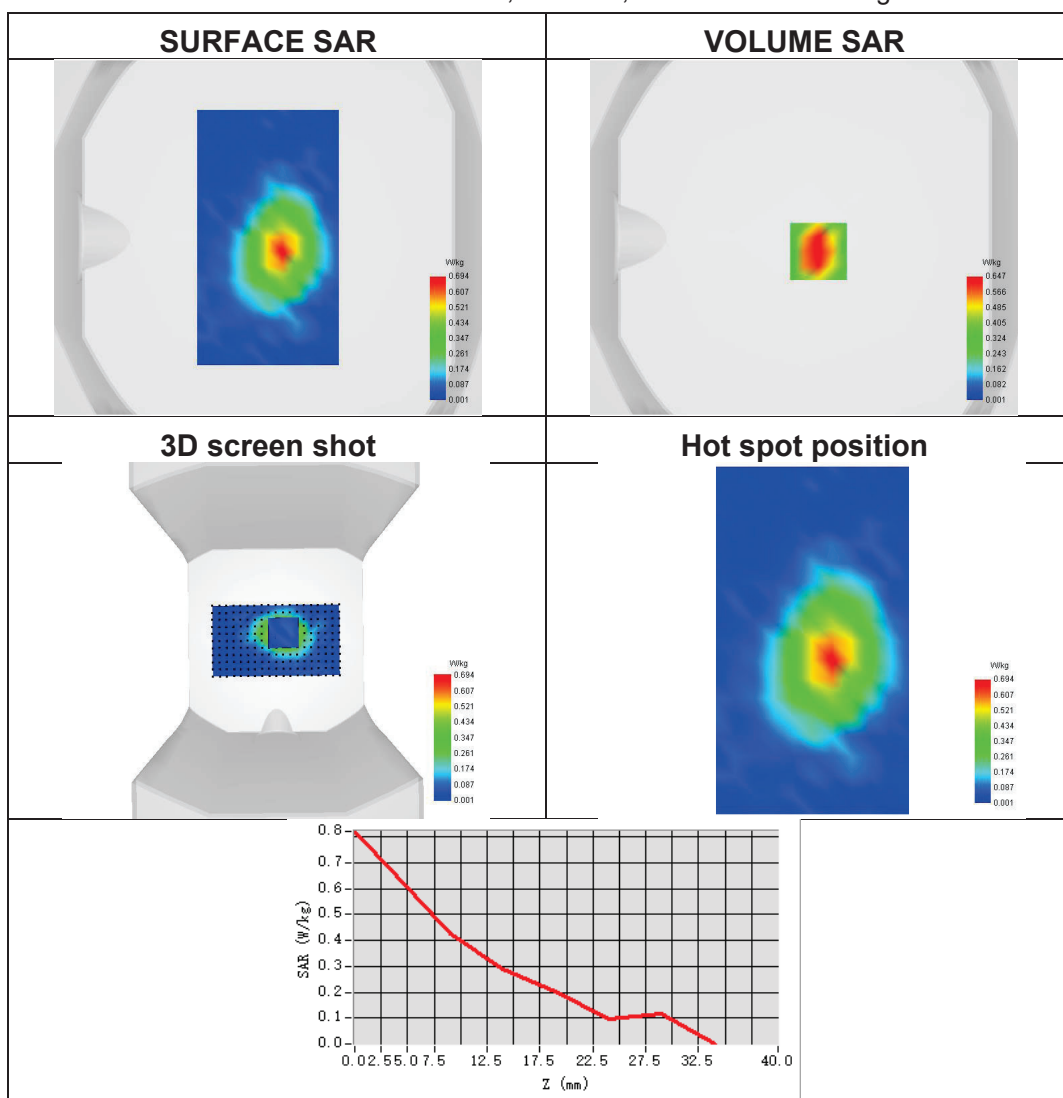




Plot 39:

Test Date	2024-03-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	841.5
SAR 10g (W/Kg)	0.068
SAR 1g (W/Kg)	0.136
ConvF	1.70
Relative permittivity	41.12
Conductivity (S/m)	0.93

Maximum location: X=-16.00, Y=8.00 ; SAR Peak: 0.30 W/kg

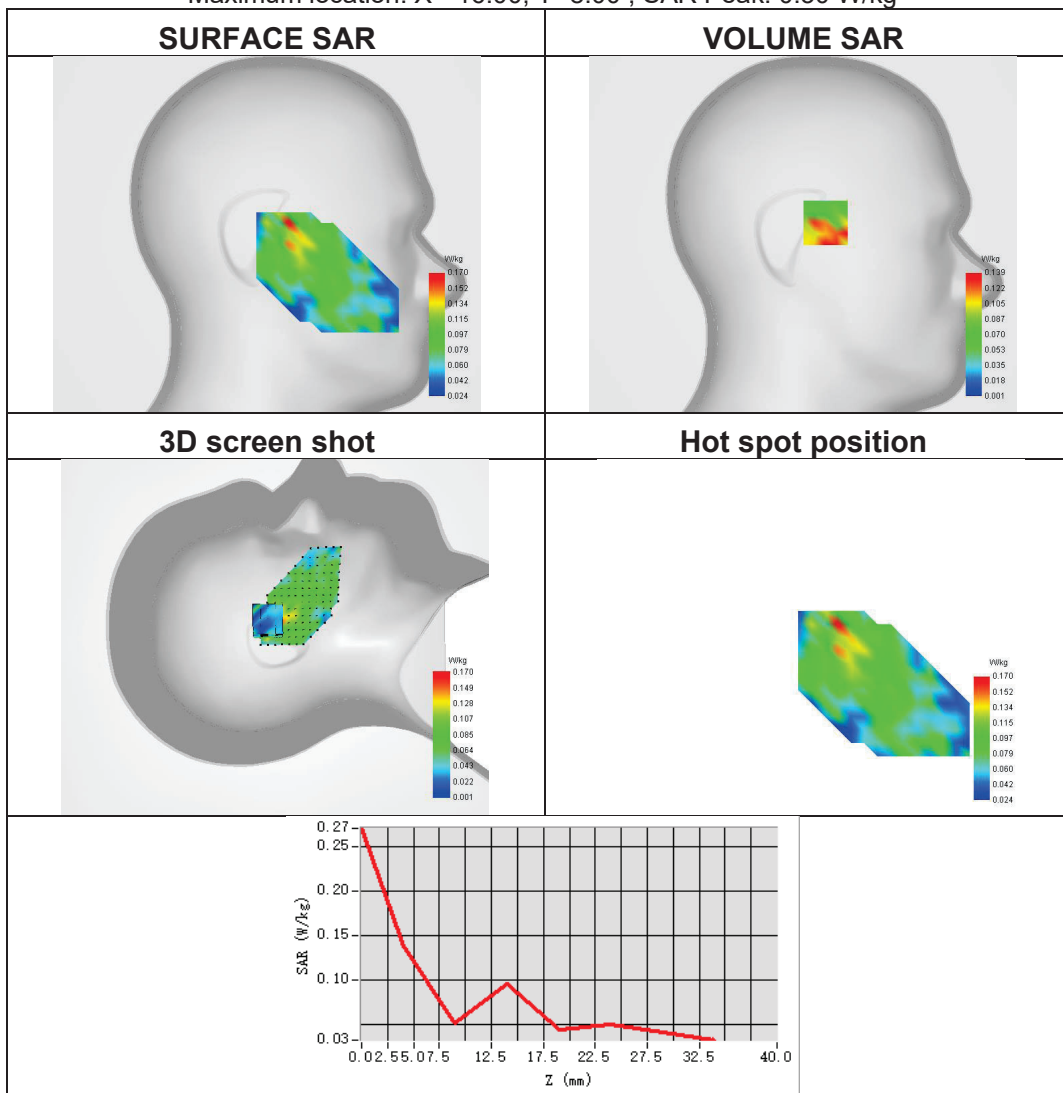



Plot 40:

Test Date	2024-03-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 26
Signal	LTE FDD
Frequency	841.5
SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.212
ConvF	1.70
Relative permittivity	41.12
Conductivity (S/m)	0.93

Maximum location: X=-1.00, Y=-8.00 ; SAR Peak: 0.35 W/kg

