



FCC RADIO TEST REPORT

FCC ID : PY7-50241N
Equipment : GSM/WCDMA/LTE Phone with BT,
DTS/UNII a/b/g/n/ac/ax, GPS, and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27

The product was received on Jul. 28, 2020 and testing was started from Aug. 28, 2020 and completed on Sep. 02, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test.....	6
1.2 Modification of EUT	6
1.3 Emission Designator	7
1.4 Testing Location	8
1.5 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	11
2.5 Frequency List of Low/Middle/High Channels	11
3 Conducted Test Items	13
3.1 Measuring Instruments	13
3.2 Conducted Output Power and ERP/EIRP	14
3.3 Peak-to-Average Ratio	15
3.4 Occupied Bandwidth.....	16
3.5 Conducted Band Edge	17
3.6 Conducted Spurious Emission	18
3.7 Frequency Stability	19
4 Radiated Test Items	20
4.1 Measuring Instruments	20
4.2 Radiated Spurious Emission Measurement	22
5 List of Measuring Equipment.....	23
6 Uncertainty of Evaluation	25
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG042240-01B	01	Initial issue of report	Sep. 22, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (Band 5)	Pass	
	§27.50 (b)(10) §27.50 (c)(10)	Effective Radiated Power (Band 12) (Band 13)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)		
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2)(4) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 66)	Pass	-
		Conducted Band Edge Measurement (Band 7)		
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 66)	Pass	-
		Conducted Spurious Emission (Band 7)		
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	\$2.1053 \$22.917 (a) \$24.238 (a) \$27.53 (c)(2) \$27.53 (f) \$27.53 (g) \$27.53 (h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 66)	Pass	Under limit 10.20 dB at 1560.000 MHz
	\$2.1051 \$27.53 (m)(4)	Radiated Spurious Emission (Band 7)		

Remark: The FCC ID: PY7-50241N and FCC ID: PY7-77310Z are HW identical, the difference is only SW, and each supported bands are handled by only SW. Only LTE Band 2, 4, and 66 are added in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac/ax, NFC and GNSS.

Product Specification subjective to this standard	
Antenna Type	Loop Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	5.108	QV7100YZ3Y	Conducted Measurement
		QV7100XB3Y	Radiated Spurious Emission
		QV7100PH3Y	ERP/EIRP Test
		QV7100CJ3Y	

Accessory List	
AC Adapter	Model Name : UCH32
	S/N: 6218W30200215
Earphone	Model Name : MH750
	S/N : N/A
USB Cable	Model Name.: UCB24
	S/N : N/A

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Emission Designator

LTE Band 2		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M09G7D	-	0.1156	1M09W7D	-	0.0986	1M10W7D	-	0.0774
3	1851.5 ~ 1908.5	2M73G7D	-	0.1159	2M71W7D	-	0.1012	2M71W7D	-	0.0794
5	1852.5 ~ 1907.5	4M51G7D	-	0.1159	4M50W7D	-	0.1000	4M50W7D	-	0.0783
10	1855.0 ~ 1905.0	9M09G7D	0.0048	0.1148	9M05W7D	-	0.1000	9M01W7D	-	0.0778
15	1857.5 ~ 1902.5	13M4G7D	-	0.1159	13M4W7D	-	0.0986	13M5W7D	-	0.0769
20	1860.0 ~ 1900.0	17M9G7D	-	0.1161	17M9W7D	-	0.0995	17M9W7D	-	0.0764
LTE Band 4		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7~1754.3	-	-	0.1183	-	-	0.1019	-	-	0.0791
3	1711.5~1753.5	-	-	0.1197	-	-	0.1033	-	-	0.0804
5	1712.5~1752.5	-	-	0.1197	-	-	0.1021	-	-	0.0794
10	1715.0~1750.0	-	-	0.1175	-	-	0.1021	-	-	0.0793
15	1717.5~1747.5	-	-	0.1191	-	-	0.1014	-	-	0.0776
20	1720.0~1745.0	-	-	0.1199	-	-	0.1028	-	-	0.0782
LTE Band 66		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1779.3	1M09G7D	-	0.1191	1M09W7D	-	0.1019	1M09W7D	-	0.0793
3	1711.5 ~ 1778.5	2M73G7D	-	0.1199	2M73W7D	-	0.1040	2M72W7D	-	0.0815
5	1712.5 ~ 1777.5	4M51G7D	-	0.1199	4M49W7D	-	0.1026	4M53W7D	-	0.0796
10	1715.0 ~ 1775.0	9M11G7D	0.0070	0.1189	9M03W7D	-	0.1028	9M09W7D	-	0.0794
15	1717.5 ~ 1772.5	13M5G7D	-	0.1186	13M4W7D	-	0.1012	13M5W7D	-	0.0789
20	1720.0 ~ 1770.0	17M9G7D	-	0.1202	17M9W7D	-	0.1028	17M9W7D	-	0.0791



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY
Test Engineer	Luffy Lin
Temperature	23~24°C
Relative Humidity	52~53%

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH15-HY
Test Engineer	Leo Lee, Mancy Chou and Bigshow Wang
Temperature	22~24°C
Relative Humidity	50~58%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168


D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z Plane with Accessory for Band 2, 66) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v	v	v		v	v	v	v
	4	Covered by Band 66														
	66						v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v			v	v	v	v
	4	Covered by Band 66														
	66	v	v	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v		v	v		v
	4	Covered by Band 66														
	66	v	v	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	v			v	v	v
	4	Covered by Band 66														
	66	v	v	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	2				v			v					v		v	
	4	Covered by Band 66														
	66				v			v					v		v	
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v	v			v	v	v
	66	v	v	v	v	v	v	v	v	v	v			v	v	v

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	2	Worst Case												v	v	v
	4	Covered by Band 66														
	66	Worst Case												v	v	v
Remark	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Wider operating range bandwidth covers narrower one when the power is higher or the same.															

2.2 Connection Diagram of Test System

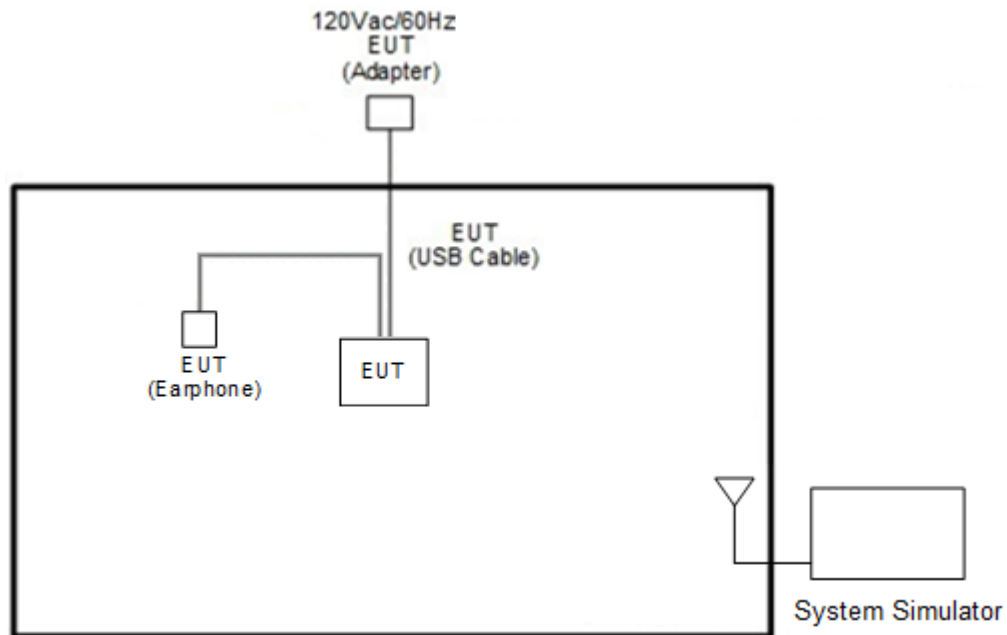

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3



LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

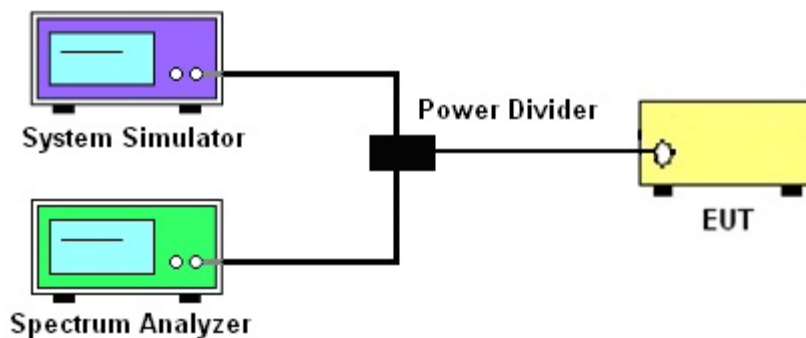

3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4 and Band 66

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698-746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, 1755-1780 MHz, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 7

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated emissions below 30MHz

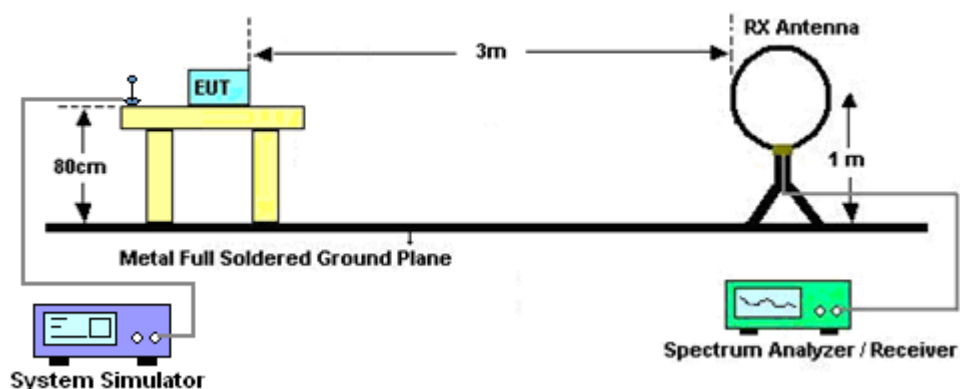


For radiated test from 30MHz to 1GHz

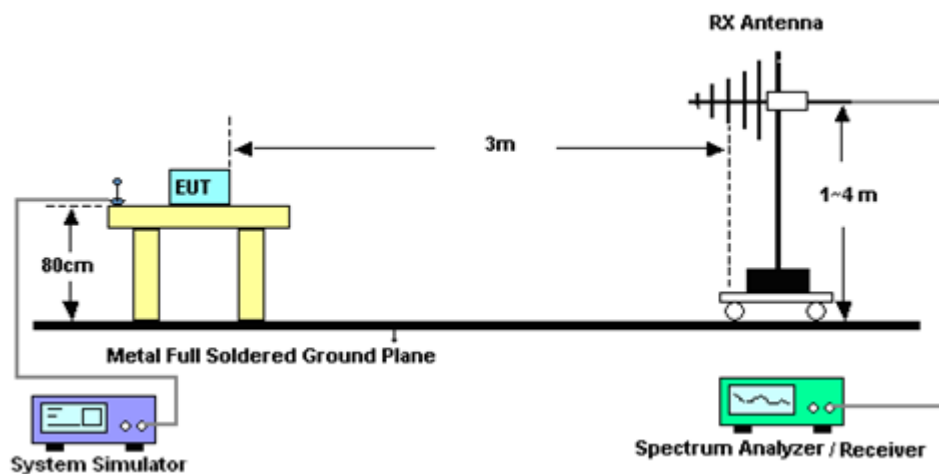

For radiated test from 1GHz to 18GHz

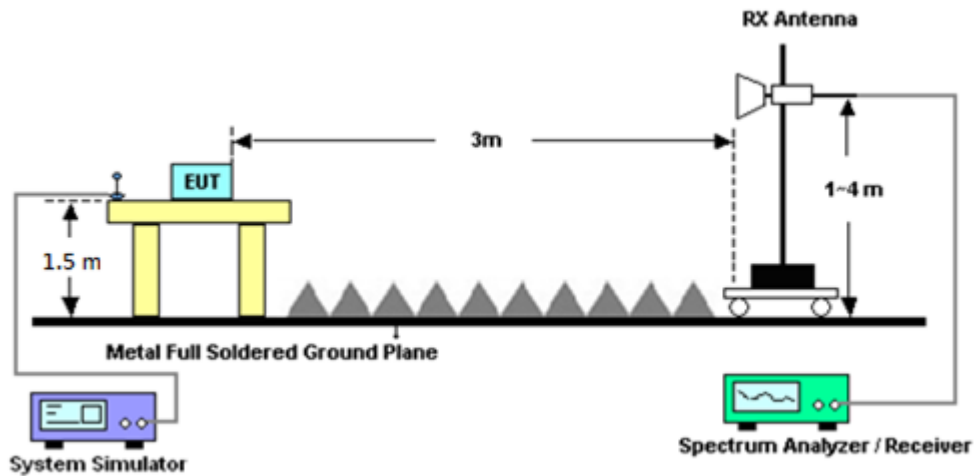

For radiated emissions above 18GHz

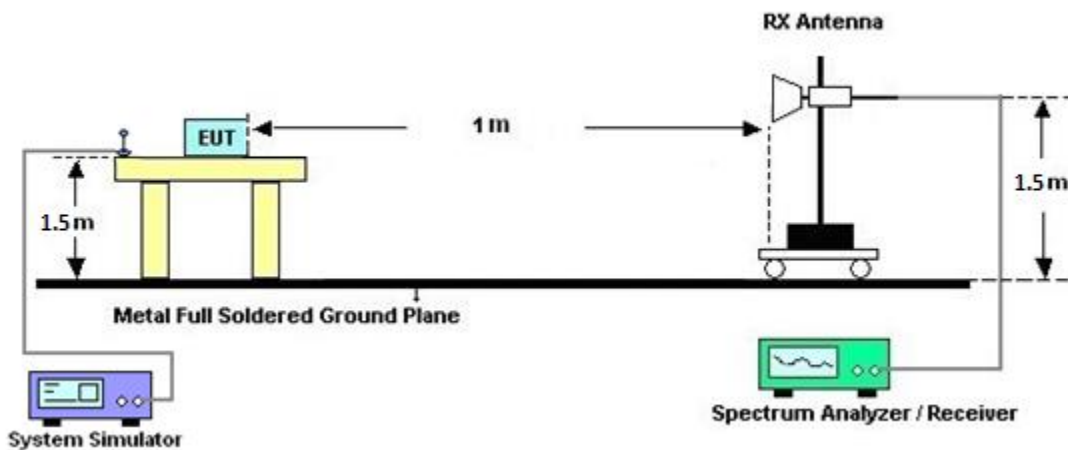

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8821C	62620025341	-	Oct. 24, 2019	Aug. 28, 2020~Sep. 01, 2020	Oct. 23, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 15, 2019	Aug. 28, 2020~Sep. 01, 2020	Nov. 14, 2020	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SU-241	92003713	-30℃ ~95℃	May 15, 2020	Aug. 28, 2020~Sep. 01, 2020	May 14, 2021	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 09, 2019	Aug. 28, 2020~Sep. 01, 2020	Oct. 08, 2020	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 13, 2020	Aug. 28, 2020~Sep. 01, 2020	Jan. 12, 2021	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	Sep. 01, 2020~Sep. 02, 2020	Jan. 08, 2021	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00800N1D01N-06	41912&05	30MHz to 1GHz	Feb. 09, 2020	Sep. 01, 2020~Sep. 02, 2020	Feb. 08, 2021	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 27, 2019	Sep. 01, 2020~Sep. 02, 2020	Dec. 26, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1620	1-18GHz	Oct. 28, 2019	Sep. 01, 2020~Sep. 02, 2020	Oct. 27, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Dec. 10, 2019	Sep. 01, 2020~Sep. 02, 2020	Dec. 09, 2020	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-303	1710001800055006	1GHz~18GHz	May 07, 2020	Sep. 01, 2020~Sep. 02, 2020	May 06, 2021	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 21, 2020	Sep. 01, 2020~Sep. 02, 2020	Aug. 20, 2021	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Sep. 01, 2020~Sep. 02, 2020	Dec. 12, 2020	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Nov. 01, 2019	Sep. 01, 2020~Sep. 02, 2020	Oct. 31, 2020	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	May 04, 2020	Sep. 01, 2020~Sep. 02, 2020	May 03, 2021	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Sep. 01, 2020~Sep. 02, 2020	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Sep. 01, 2020~Sep. 02, 2020	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k5)	RK-000451	N/A	N/A	Sep. 01, 2020~Sep. 02, 2020	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 12, 2020	Sep. 01, 2020~Sep. 02, 2020	Mar. 11, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/4	30M-18G	Apr. 14, 2020	Sep. 01, 2020~Sep. 02, 2020	Apr. 13, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4PE	30M-18G	Apr. 14, 2020	Sep. 01, 2020~Sep. 02, 2020	Apr. 13, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY37710/4	30M-18G	Apr. 17, 2020	Sep. 01, 2020~Sep. 02, 2020	Apr. 16, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz-40GHz	Feb. 25, 2020	Sep. 01, 2020~Sep. 02, 2020	Feb. 24, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz-40GHz	Feb. 25, 2020	Sep. 01, 2020~Sep. 02, 2020	Feb. 24, 2021	Radiation (03CH15-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN4	1.53G Low Pass	Jul. 03, 2020	Sep. 01, 2020~Sep. 02, 2020	Jul. 02, 2021	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-1080-1200-15000-60ST	SN5	1.2GHz High Pass Filter	Jul. 01, 2020	Sep. 01, 2020~Sep. 02, 2020	Jun. 30, 2021	Radiation (03CH15-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WHKX12-2700-3000-18000-60 ST	SN4	3GHz High Pass Filter	Sep. 17, 2019	Sep. 01, 2020~Sep. 02, 2020	Sep. 16, 2020	Radiation (03CH15-HY)
Notch Filter	Wainwright	WRCT800/960-0.2/40-8SSK	SN22	GSM 850	Nov. 02, 2019	Sep. 01, 2020~Sep. 02, 2020	Nov. 01, 2020	Radiation (03CH15-HY)
Notch Filter	Wainwright	WRCD1710-1980-10-40-10SS K	SN2	1710-1980	Oct. 31, 2019	Sep. 01, 2020~Sep. 02, 2020	Oct. 30, 2020	Radiation (03CH15-HY)
Notch Filter	Wainwright	WRCT700/915-20/40-8SSK	SN1	700-915	Mar. 06, 2020	Sep. 01, 2020~Sep. 02, 2020	Mar. 05, 2021	Radiation (03CH15-HY)
Notch Filter	Wainwright	WRCG1710/1755-1690/1775-45/7SS	SN2	AWS Band	Nov. 05, 2019	Sep. 01, 2020~Sep. 02, 2020	Nov. 04, 2020	Radiation (03CH15-HY)
Notch Filter	Wainwright	WTRCFVW8-3300-4200-100-200-40SSK	SN1	N/A	May 26, 2020	Sep. 01, 2020~Sep. 02, 2020	May 25, 2021	Radiation (03CH15-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.06
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.63
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.16
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.75	23.66	23.65
20	1	49		23.65	23.65	23.59
20	1	99		23.59	23.54	23.55
20	50	0		22.83	22.70	22.66
20	50	24		22.81	22.80	22.70
20	50	50		22.80	22.77	22.69
20	100	0		22.85	22.77	22.68
20	1	0	16-QAM	23.08	22.98	22.99
20	1	49		23.03	22.94	22.91
20	1	99		22.94	22.91	22.91
20	50	0		21.86	21.70	21.67
20	50	24		21.86	21.82	21.72
20	50	50		21.82	21.78	21.76
20	100	0		21.85	21.77	21.68
20	1	0	64-QAM	21.93	21.81	21.81
20	1	49		21.90	21.83	21.79
20	1	99		21.84	21.82	21.77
20	50	0		20.86	20.73	20.70
20	50	24		20.89	20.84	20.72
20	50	50		20.84	20.81	20.78
20	100	0		20.86	20.80	20.71
15	1	0	QPSK	23.74	23.69	23.64
15	1	37		23.70	23.65	23.63
15	1	74		23.71	23.64	23.62
15	36	0		22.88	22.72	22.69
15	36	20		22.89	22.85	22.78
15	36	39		22.86	22.81	22.78
15	75	0		22.86	22.80	22.78
15	1	0	16-QAM	23.04	23.00	22.97
15	1	37		23.04	22.97	22.94
15	1	74		23.00	22.96	22.91
15	36	0		21.88	21.73	21.67
15	36	20		21.89	21.83	21.77
15	36	39		21.86	21.82	21.77
15	75	0		21.87	21.81	21.78
15	1	0	64-QAM	21.92	21.86	21.81
15	1	37		21.96	21.91	21.86
15	1	74		21.92	21.88	21.84
15	36	0		20.91	20.74	20.72
15	36	20		20.93	20.86	20.82
15	36	39		20.91	20.85	20.81
15	75	0		20.87	20.83	20.79



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.70	23.65	23.62
10	1	25		23.69	23.63	23.57
10	1	49		23.66	23.66	23.59
10	25	0		22.84	22.71	22.66
10	25	12		22.86	22.80	22.69
10	25	25		22.86	22.80	22.78
10	50	0		22.87	22.81	22.70
10	1	0	16-QAM	23.10	23.00	23.01
10	1	25		23.07	23.02	22.98
10	1	49		23.06	23.02	23.00
10	25	0		21.84	21.69	21.67
10	25	12		21.88	21.82	21.73
10	25	25		21.85	21.82	21.77
10	50	0		21.87	21.82	21.72
10	1	0	64-QAM	22.01	21.87	21.82
10	1	25		21.98	21.94	21.90
10	1	49		21.94	21.95	21.89
10	25	0		20.88	20.74	20.71
10	25	12		20.92	20.86	20.75
10	25	25		20.89	20.85	20.80
10	50	0		20.89	20.86	20.73
5	1	0	QPSK	23.73	23.59	23.60
5	1	12		23.74	23.69	23.70
5	1	24		23.74	23.71	23.68
5	12	0		22.87	22.71	22.73
5	12	7		22.87	22.83	22.77
5	12	13		22.89	22.85	22.74
5	25	0		22.86	22.80	22.75
5	1	0	16-QAM	23.08	22.94	22.93
5	1	12		23.09	23.05	23.00
5	1	24		23.10	23.08	23.02
5	12	0		21.88	21.76	21.78
5	12	7		21.89	21.88	21.84
5	12	13		21.85	21.81	21.83
5	25	0		21.86	21.82	21.77
5	1	0	64-QAM	22.04	21.92	21.91
5	1	12		22.02	21.96	21.90
5	1	24		21.99	21.99	21.95
5	12	0		20.90	20.78	20.80
5	12	7		20.93	20.90	20.84
5	12	13		20.90	20.87	20.81
5	25	0		20.87	20.81	20.79



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.70	23.65	23.61
3	1	8		23.74	23.74	23.71
3	1	14		23.73	23.68	23.67
3	8	0		22.86	22.81	22.72
3	8	4		22.90	22.82	22.77
3	8	7		22.86	22.82	22.78
3	15	0		22.88	22.78	22.78
3	1	0	16-QAM	23.07	23.00	22.96
3	1	8		23.15	23.11	23.08
3	1	14		23.10	23.03	23.00
3	8	0		21.92	21.86	21.80
3	8	4		21.97	21.85	21.82
3	8	7		21.89	21.87	21.85
3	15	0		21.91	21.82	21.80
3	1	0	64-QAM	22.00	21.94	21.87
3	1	8		22.10	22.03	21.99
3	1	14		22.03	21.97	21.93
3	8	0		20.91	20.84	20.82
3	8	4		20.97	20.86	20.88
3	8	7		20.88	20.83	20.84
3	15	0		20.91	20.86	20.80
1.4	1	0	QPSK	23.63	23.60	23.55
1.4	1	3		23.69	23.64	23.63
1.4	1	5		23.65	23.57	23.53
1.4	3	0		23.67	23.65	23.54
1.4	3	1		23.73	23.70	23.58
1.4	3	3		23.69	23.63	23.57
1.4	6	0		22.76	22.69	22.66
1.4	1	0	16-QAM	22.98	22.92	22.86
1.4	1	3		23.04	22.96	22.94
1.4	1	5		22.97	22.92	22.90
1.4	3	0		22.77	22.71	22.65
1.4	3	1		22.81	22.77	22.74
1.4	3	3		22.77	22.71	22.68
1.4	6	0		21.85	21.77	21.72
1.4	1	0	64-QAM	21.93	21.84	21.82
1.4	1	3		21.99	21.93	21.87
1.4	1	5		21.93	21.86	21.82
1.4	3	0		21.87	21.81	21.80
1.4	3	1		21.93	21.88	21.83
1.4	3	3		21.87	21.85	21.78
1.4	6	0		20.77	20.73	20.70



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.61	23.64	23.69
20	1	49		23.42	23.47	23.52
20	1	99		23.46	23.42	23.50
20	50	0		22.71	22.70	22.69
20	50	24		22.70	22.61	22.63
20	50	50		22.63	22.62	22.63
20	100	0		22.63	22.67	22.59
20	1	0	16-QAM	22.92	22.94	23.02
20	1	49		22.78	22.81	22.85
20	1	99		22.80	22.73	22.80
20	50	0		21.68	21.71	21.69
20	50	24		21.71	21.64	21.63
20	50	50		21.63	21.62	21.63
20	100	0		21.65	21.64	21.62
20	1	0	64-QAM	21.10	21.83	21.58
20	1	49		21.61	21.67	21.69
20	1	99		21.67	21.28	21.73
20	50	0		20.68	20.75	20.41
20	50	24		20.71	20.68	20.64
20	50	50		20.66	20.43	20.66
20	100	0		20.69	20.67	20.65
15	1	0	QPSK	23.45	23.66	23.66
15	1	37		23.43	23.50	23.49
15	1	74		23.49	23.50	23.50
15	36	0		22.65	22.72	22.70
15	36	20		22.63	22.67	22.63
15	36	39		22.62	22.68	22.66
15	75	0		22.69	22.65	22.65
15	1	0	16-QAM	22.67	22.96	22.94
15	1	37		22.75	22.82	22.86
15	1	74		22.76	22.78	22.76
15	36	0		21.65	21.72	21.71
15	36	20		21.67	21.63	21.65
15	36	39		21.63	21.66	21.67
15	75	0		21.68	21.65	21.68
15	1	0	64-QAM	21.28	21.80	21.33
15	1	37		21.69	21.74	21.75
15	1	74		21.69	21.29	21.72
15	36	0		20.47	20.76	20.53
15	36	20		20.70	20.72	20.68
15	36	39		20.67	20.45	20.70
15	75	0		20.69	20.70	20.67



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.42	23.60	23.60
10	1	25		23.49	23.57	23.58
10	1	49		23.55	23.58	23.54
10	25	0		22.66	22.65	22.62
10	25	12		22.67	22.69	22.64
10	25	25		22.67	22.76	22.72
10	50	0		22.70	22.66	22.65
10	1	0	16-QAM	22.75	22.98	22.96
10	1	25		22.94	22.99	22.98
10	1	49		22.93	22.94	22.96
10	25	0		21.66	21.63	21.63
10	25	12		21.68	21.67	21.68
10	25	25		21.68	21.74	21.74
10	50	0		21.70	21.65	21.68
10	1	0	64-QAM	21.00	21.79	21.65
10	1	25		21.76	21.89	21.89
10	1	49		21.82	21.38	21.86
10	25	0		20.21	20.68	20.67
10	25	12		20.65	20.72	20.69
10	25	25		20.72	20.58	20.78
10	50	0		20.61	20.69	20.73
5	1	0	QPSK	23.48	23.52	23.60
5	1	12		23.62	23.68	23.65
5	1	24		23.63	23.65	23.65
5	12	0		22.68	22.64	22.70
5	12	7		22.70	22.66	22.76
5	12	13		22.66	22.71	22.73
5	25	0		22.65	22.67	22.69
5	1	0	16-QAM	22.82	22.87	22.94
5	1	12		22.90	22.94	22.95
5	1	24		22.93	22.99	22.98
5	12	0		21.71	21.67	21.74
5	12	7		21.74	21.69	21.77
5	12	13		21.71	21.73	21.73
5	25	0		21.67	21.65	21.73
5	1	0	64-QAM	21.03	21.82	21.88
5	1	12		21.25	21.83	21.83
5	1	24		21.52	21.59	21.90
5	12	0		20.05	20.72	20.79
5	12	7		20.27	20.75	20.84
5	12	13		20.40	20.77	20.80
5	25	0		20.18	20.70	20.74



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.60	23.56	23.58
3	1	8		23.67	23.68	23.67
3	1	14		23.60	23.63	23.63
3	8	0		22.65	22.62	22.69
3	8	4		22.71	22.70	22.73
3	8	7		22.70	22.70	22.71
3	15	0		22.65	22.65	22.69
3	1	0	16-QAM	22.89	22.87	22.91
3	1	8		22.96	23.04	23.00
3	1	14		22.95	22.97	22.97
3	8	0		21.75	21.69	21.77
3	8	4		21.78	21.82	21.79
3	8	7		21.77	21.79	21.74
3	15	0		21.69	21.67	21.74
3	1	0	64-QAM	21.10	21.78	21.82
3	1	8		21.28	21.92	21.95
3	1	14		21.33	21.77	21.86
3	8	0		20.08	20.71	20.78
3	8	4		20.17	20.82	20.79
3	8	7		20.20	20.77	20.77
3	15	0		20.13	20.67	20.71
1.4	1	0	QPSK	23.51	23.54	23.52
1.4	1	3		23.58	23.63	23.61
1.4	1	5		23.52	23.53	23.52
1.4	3	0		23.56	23.58	23.56
1.4	3	1		23.58	23.60	23.59
1.4	3	3		23.58	23.57	23.56
1.4	6	0		22.61	22.62	22.62
1.4	1	0	16-QAM	22.84	22.88	22.84
1.4	1	3		22.90	22.98	22.91
1.4	1	5		22.83	22.89	22.85
1.4	3	0		22.62	22.64	22.64
1.4	3	1		22.70	22.73	22.70
1.4	3	3		22.60	22.64	22.63
1.4	6	0		21.71	21.72	21.70
1.4	1	0	64-QAM	21.08	21.84	21.79
1.4	1	3		21.20	21.88	21.84
1.4	1	5		21.15	21.76	21.77
1.4	3	0		21.09	21.76	21.74
1.4	3	1		21.17	21.83	21.80
1.4	3	3		21.11	21.79	21.77
1.4	6	0		20.06	20.65	20.65



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.64	23.70	23.57
20	1	49		23.54	23.57	23.43
20	1	99		23.49	23.57	23.33
20	50	0		22.64	22.73	22.57
20	50	24		22.72	22.71	22.63
20	50	50		22.66	22.70	22.55
20	100	0		22.65	22.64	22.66
20	1	0	16-QAM	22.97	23.02	22.93
20	1	49		22.88	22.94	22.76
20	1	99		22.87	22.88	22.68
20	50	0		21.64	21.71	21.60
20	50	24		21.71	21.71	21.63
20	50	50		21.67	21.72	21.56
20	100	0		21.67	21.66	21.63
20	1	0	64-QAM	21.76	21.88	21.76
20	1	49		21.76	21.81	21.69
20	1	99		21.74	21.80	21.58
20	50	0		20.67	20.74	20.61
20	50	24		20.74	20.72	20.68
20	50	50		20.68	20.74	20.58
20	100	0		20.70	20.70	20.64
15	1	0	QPSK	23.56	23.64	23.56
15	1	37		23.52	23.62	23.46
15	1	74		23.49	23.58	23.41
15	36	0		22.59	22.69	22.56
15	36	20		22.69	22.69	22.55
15	36	39		22.64	22.72	22.54
15	75	0		22.65	22.67	22.53
15	1	0	16-QAM	22.86	22.95	22.89
15	1	37		22.82	22.95	22.80
15	1	74		22.81	22.86	22.69
15	36	0		21.61	21.68	21.55
15	36	20		21.68	21.67	21.53
15	36	39		21.65	21.71	21.57
15	75	0		21.67	21.66	21.54
15	1	0	64-QAM	21.74	21.79	21.73
15	1	37		21.73	21.87	21.73
15	1	74		21.74	21.77	21.65
15	36	0		20.65	20.73	20.62
15	36	20		20.71	20.72	20.59
15	36	39		20.68	20.74	20.58
15	75	0		20.69	20.68	20.54



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.58	23.65	23.47
10	1	25		23.49	23.59	23.41
10	1	49		23.48	23.55	23.37
10	25	0		22.65	22.68	22.54
10	25	12		22.63	22.67	22.58
10	25	25		22.60	22.71	22.52
10	50	0		22.64	22.68	22.50
10	1	0	16-QAM	22.96	23.02	22.88
10	1	25		22.90	22.98	22.79
10	1	49		22.90	22.96	22.78
10	25	0		21.65	21.68	21.51
10	25	12		21.68	21.69	21.60
10	25	25		21.63	21.71	21.52
10	50	0		21.65	21.68	21.49
10	1	0	64-QAM	21.86	21.88	21.75
10	1	25		21.84	21.90	21.75
10	1	49		21.78	21.83	21.71
10	25	0		20.68	20.73	20.54
10	25	12		20.69	20.72	20.63
10	25	25		20.64	20.75	20.56
10	50	0		20.70	20.70	20.56
5	1	0	QPSK	23.59	23.54	23.49
5	1	12		23.62	23.69	23.50
5	1	24		23.52	23.60	23.44
5	12	0		22.67	22.67	22.57
5	12	7		22.68	22.71	22.59
5	12	13		22.63	22.71	22.51
5	25	0		22.62	22.65	22.53
5	1	0	16-QAM	22.90	22.92	22.83
5	1	12		22.91	23.01	22.82
5	1	24		22.89	22.93	22.78
5	12	0		21.69	21.72	21.62
5	12	7		21.70	21.71	21.62
5	12	13		21.66	21.76	21.55
5	25	0		21.67	21.69	21.60
5	1	0	64-QAM	21.86	21.89	21.72
5	1	12		21.86	21.91	21.71
5	1	24		21.82	21.90	21.66
5	12	0		20.75	20.79	20.68
5	12	7		20.76	20.78	20.67
5	12	13		20.73	20.77	20.60
5	25	0		20.70	20.69	20.59



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.58	23.62	23.50
3	1	8		23.63	23.69	23.54
3	1	14		23.55	23.65	23.43
3	8	0		22.64	22.66	22.57
3	8	4		22.65	22.74	22.59
3	8	7		22.63	22.69	22.53
3	15	0		22.63	22.70	22.58
3	1	0	16-QAM	22.92	22.93	22.80
3	1	8		23.00	23.07	22.86
3	1	14		22.89	22.96	22.82
3	8	0		21.76	21.73	21.62
3	8	4		21.74	21.83	21.64
3	8	7		21.71	21.77	21.60
3	15	0		21.69	21.71	21.61
3	1	0	64-QAM	21.86	21.84	21.74
3	1	8		21.91	22.01	21.79
3	1	14		21.85	21.90	21.72
3	8	0		20.70	20.76	20.65
3	8	4		20.76	20.80	20.66
3	8	7		20.74	20.80	20.62
3	15	0		20.71	20.70	20.58
1.4	1	0	QPSK	23.49	23.60	23.40
1.4	1	3		23.54	23.64	23.47
1.4	1	5		23.50	23.57	23.39
1.4	3	0		23.54	23.60	23.44
1.4	3	1		23.60	23.66	23.46
1.4	3	3		23.52	23.61	23.44
1.4	6	0		22.57	22.70	22.49
1.4	1	0	16-QAM	22.84	22.93	22.74
1.4	1	3		22.88	22.98	22.76
1.4	1	5		22.84	22.89	22.71
1.4	3	0		22.64	22.70	22.51
1.4	3	1		22.69	22.74	22.55
1.4	3	3		22.62	22.71	22.50
1.4	6	0		21.66	21.72	21.58
1.4	1	0	64-QAM	21.80	21.85	21.67
1.4	1	3		21.86	21.89	21.71
1.4	1	5		21.78	21.84	21.65
1.4	3	0		21.74	21.84	21.63
1.4	3	1		21.80	21.87	21.69
1.4	3	3		21.72	21.81	21.61
1.4	6	0		20.62	20.68	20.51

LTE Band 2


Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.57	4.90	5.36	5.94	PASS
Middle CH	3.54	4.96	5.28	5.88	
Highest CH	3.57	5.13	5.13	5.88	
Mode	LTE Band 2 / 20MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	6.99	6.41	-	-	PASS
Middle CH	6.90	6.46	-	-	
Highest CH	7.33	6.46	-	-	




LTE Band 2 / 20MHz / QPSK

Lowest Channel / 1RB

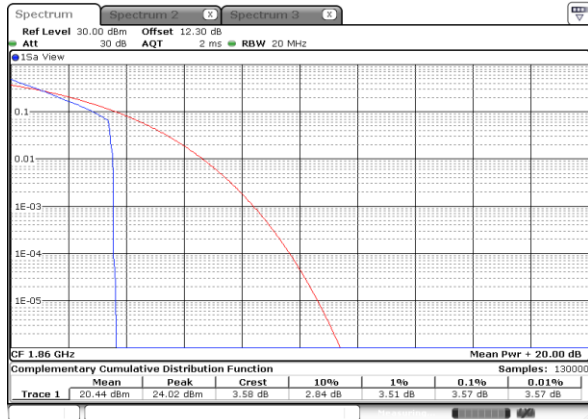


Date: 28 AUG 2020 13:44:00

Lowest Channel / Full RB

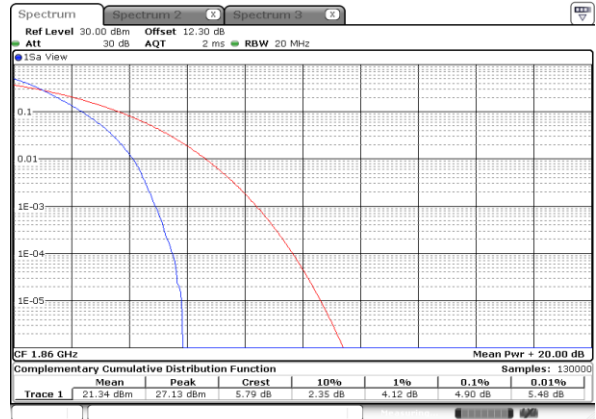


Date: 28 AUG 2020 13:44:11

Middle Channel / 1RB

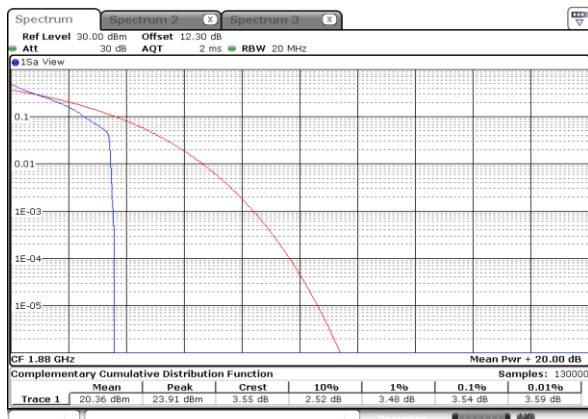


Date: 28 AUG 2020 13:44:22

Middle Channel / Full RB

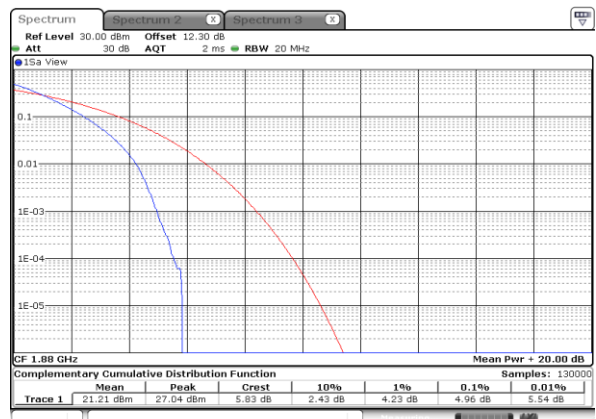


Date: 28 AUG 2020 13:44:35

Highest Channel / 1RB

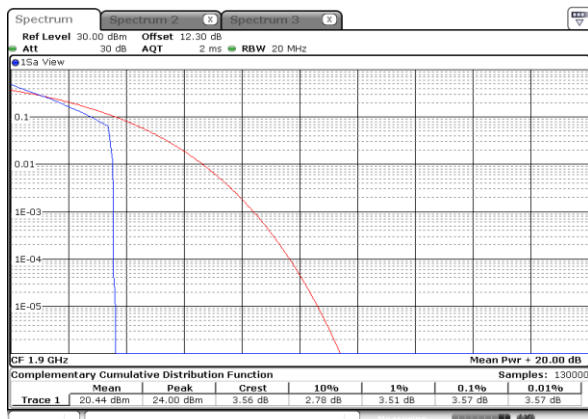

Date: 28 AUG 2020 13:44:47

Highest Channel / Full RB

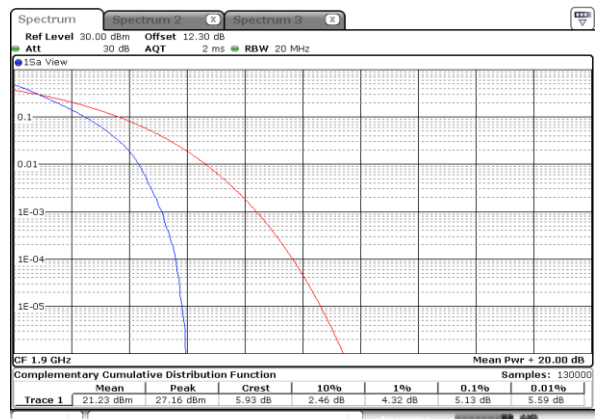


Date: 28 AUG 2020 13:44:58




LTE Band 2 / 20MHz / 16QAM

Lowest Channel / 1RB

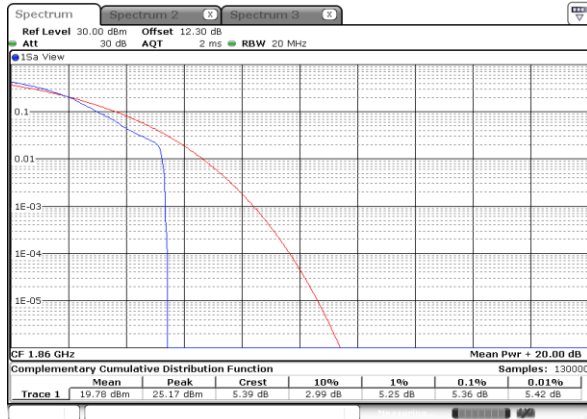


Date: 28 AUG 2020 13:42:45

Lowest Channel / Full RB

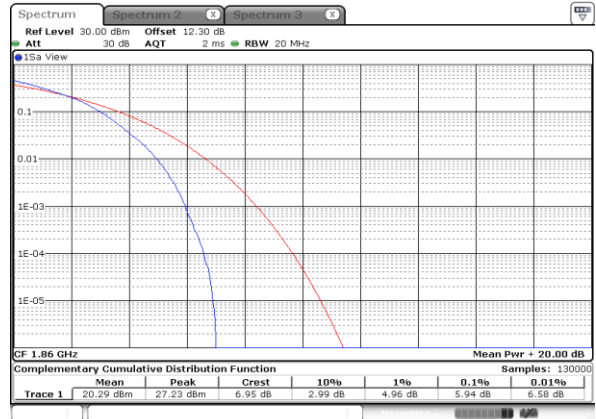


Date: 28 AUG 2020 13:42:57

Middle Channel / 1RB

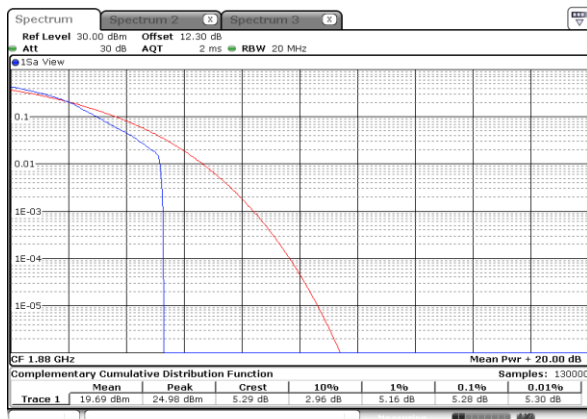


Date: 28 AUG 2020 13:43:09

Middle Channel / Full RB

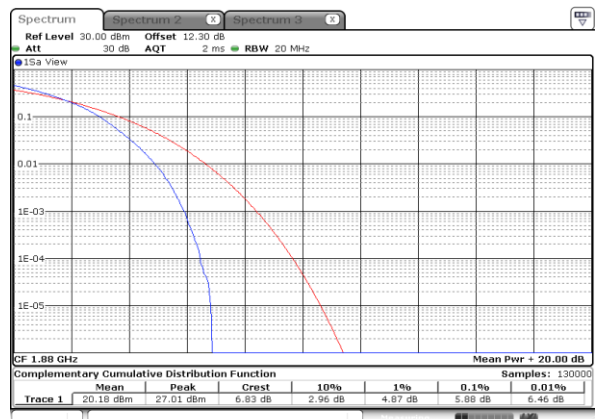


Date: 28 AUG 2020 13:43:20

Highest Channel / 1RB

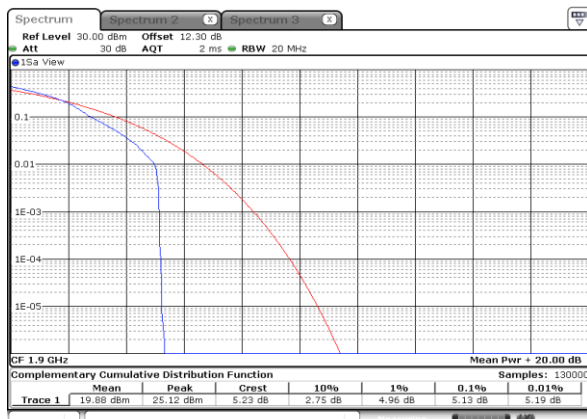

Date: 28 AUG 2020 13:43:38

Highest Channel / Full RB

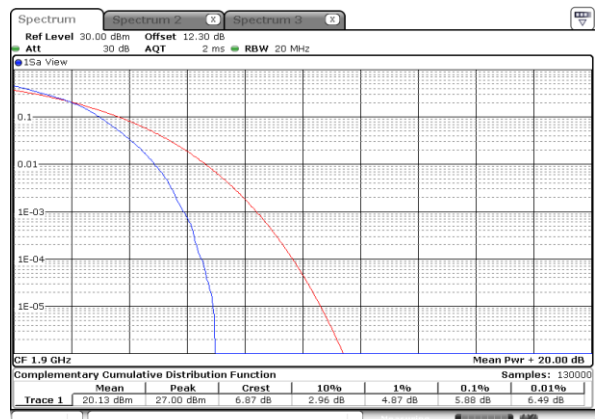


Date: 28 AUG 2020 13:43:49




LTE Band 2 / 20MHz / 64QAM

Lowest Channel / 1RB

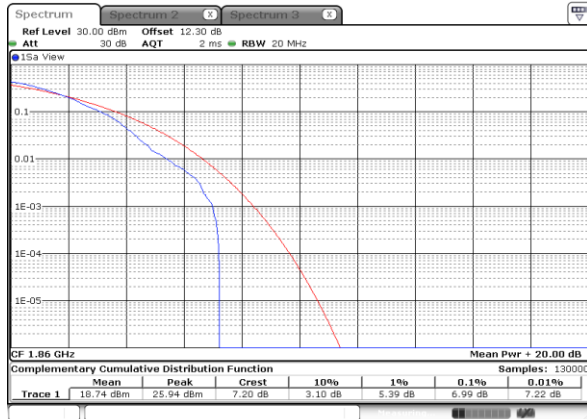


Date: 28 AUG 2020 13:45:11

Lowest Channel / Full RB

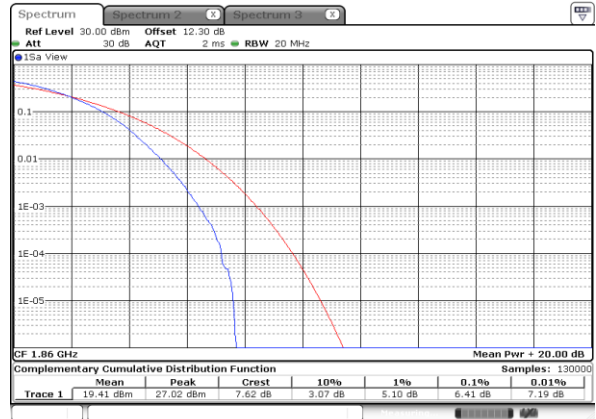


Date: 28 AUG 2020 13:45:22

Middle Channel / 1RB

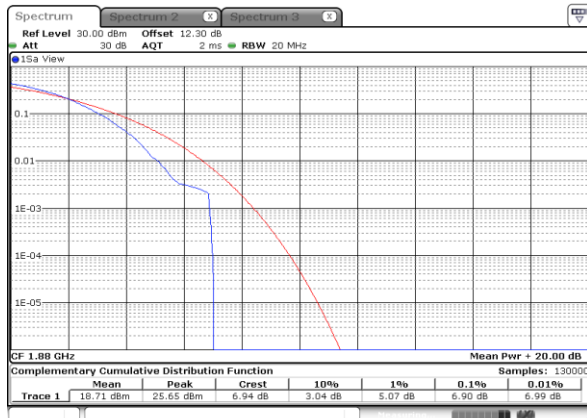


Date: 28 AUG 2020 13:45:42

Middle Channel / Full RB

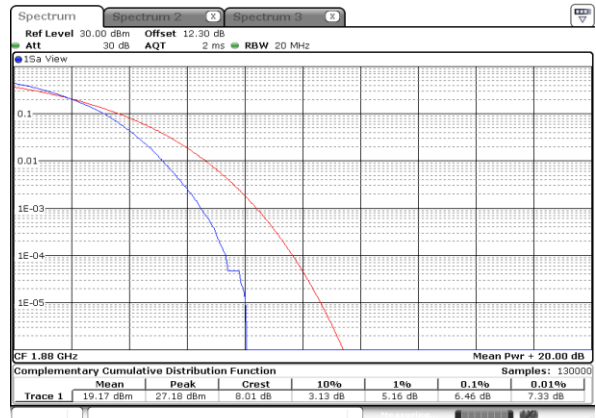


Date: 28 AUG 2020 13:46:00

Highest Channel / 1RB

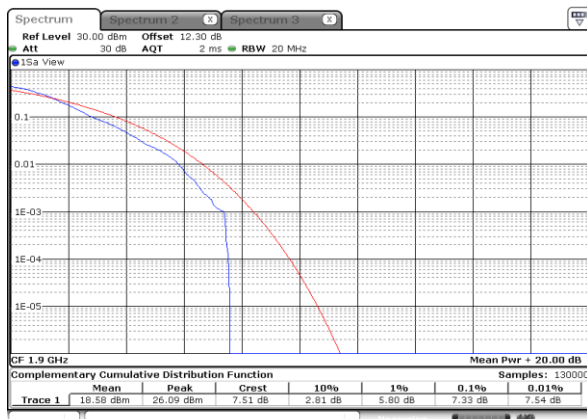

Date: 28 AUG 2020 13:46:14

Highest Channel / Full RB

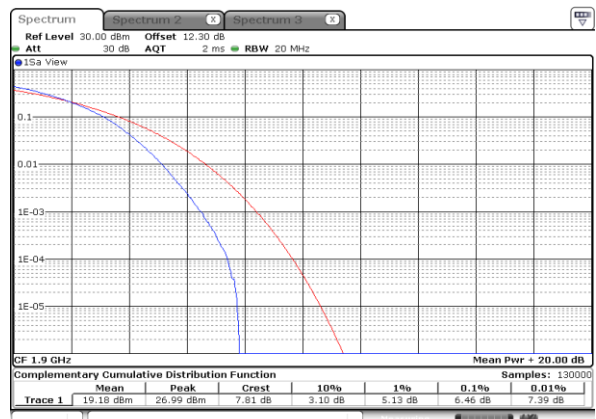

Date: 28 AUG 2020 13:46:30


**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.24	1.23	3.04	3.01	4.84	4.98	9.75	9.79	14.42	14.42	18.94	18.70
Middle CH	1.23	1.22	3.07	3.04	4.94	4.92	9.61	9.77	14.36	14.42	19.02	19.14
Highest CH	1.23	1.23	2.98	2.99	4.93	4.87	9.73	9.89	14.57	14.60	19.26	18.94
Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.20	-	3.00	-	4.87	-	9.93	-	14.24	-	18.66	-
Middle CH	1.22	-	3.00	-	4.81	-	9.75	-	14.51	-	19.10	-
Highest CH	1.23	-	3.05	-	4.96	-	9.77	-	14.33	-	18.66	-




LTE Band 2

Lowest Channel / 1.4MHz / QPSK

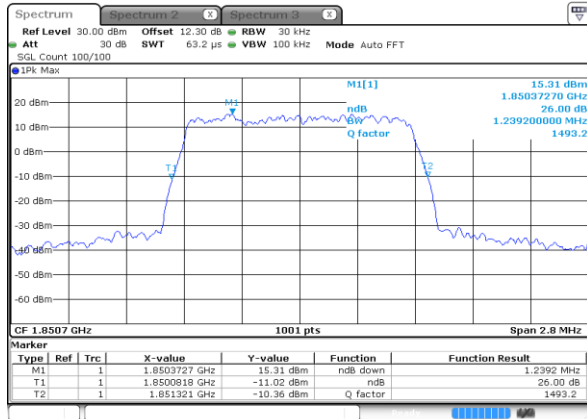


Date: 28 AUG 2020 11:01:35

Lowest Channel / 1.4MHz / 16QAM

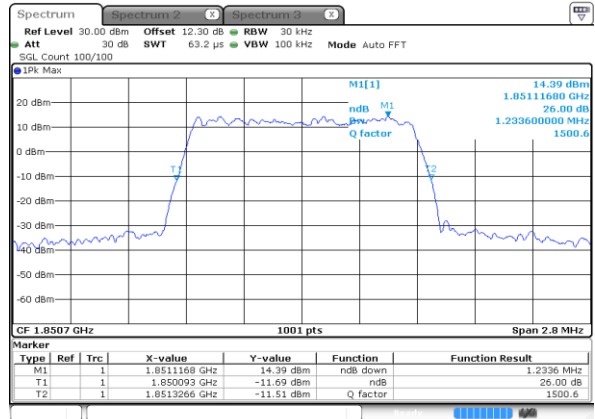


Date: 28 AUG 2020 11:01:47

Middle Channel / 1.4MHz / QPSK

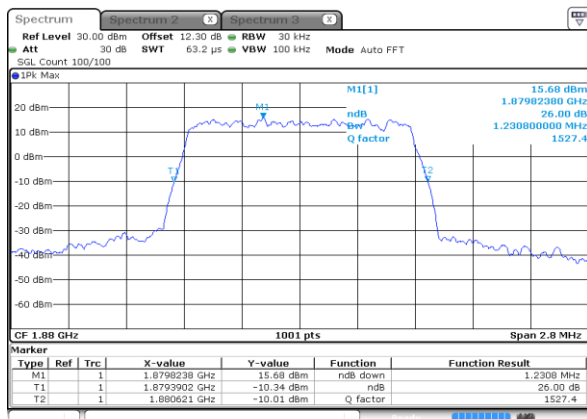


Date: 28 AUG 2020 11:08:02

Middle Channel / 1.4MHz / 16QAM

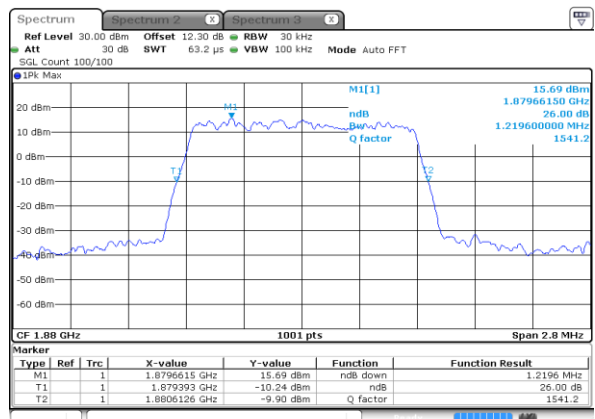


Date: 28 AUG 2020 11:08:13

Highest Channel / 1.4MHz / QPSK

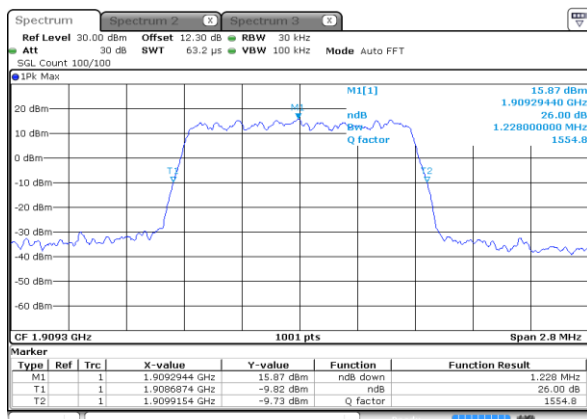

Date: 28 AUG 2020 11:10:12

Highest Channel / 1.4MHz / 16QAM

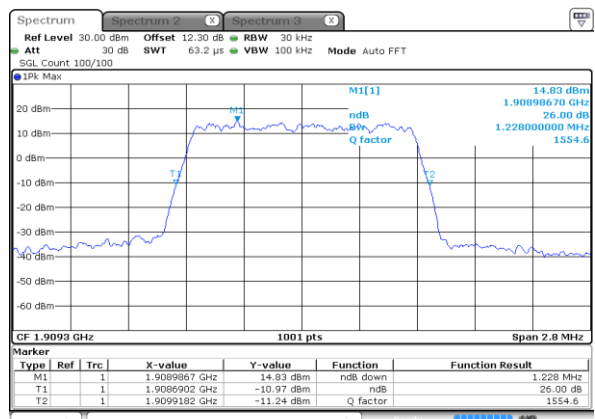


Date: 28 AUG 2020 11:10:24




LTE Band 2


Lowest Channel / 3MHz / QPSK

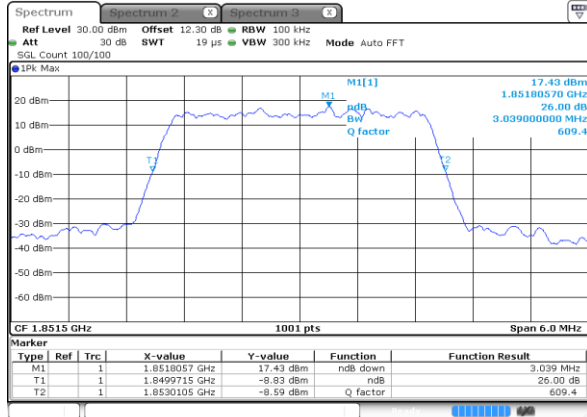


Lowest Channel / 3MHz / 16QAM

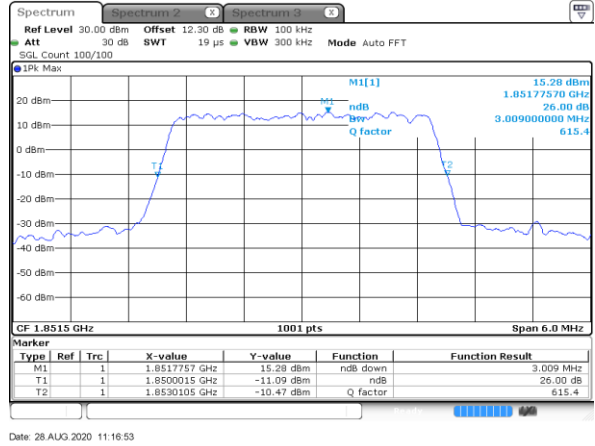


Middle Channel / 3MHz / QPSK

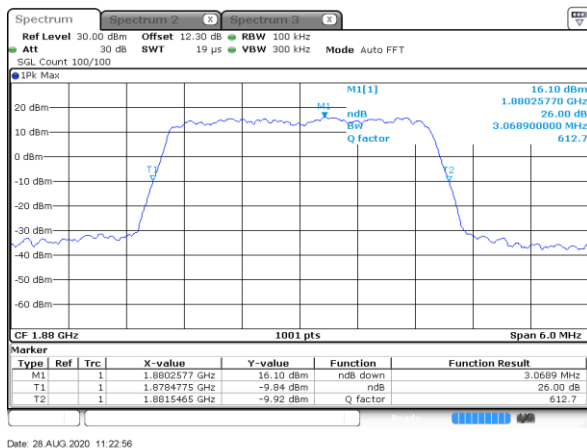


Middle Channel / 3MHz / 16QAM

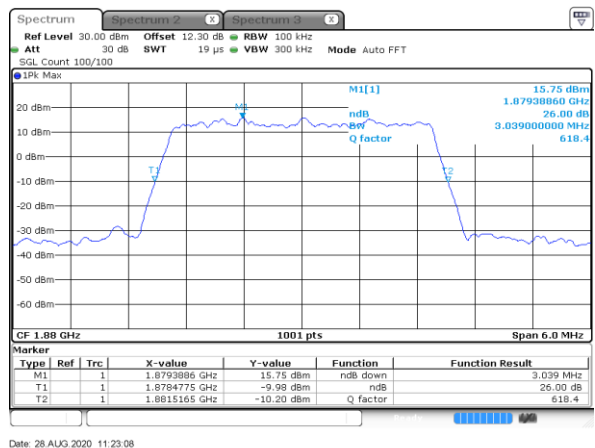

Highest Channel / 3MHz / QPSK

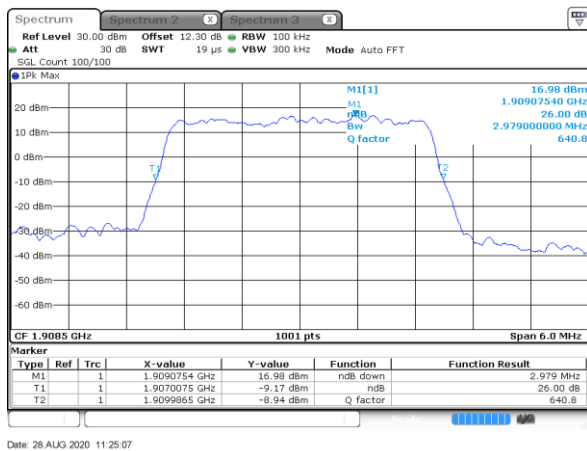


Highest Channel / 3MHz / 16QAM

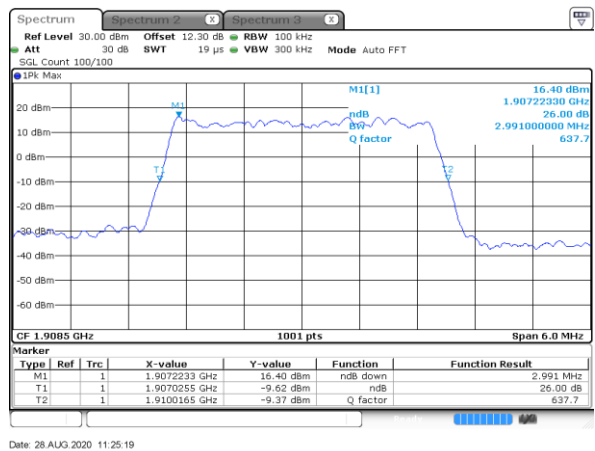




LTE Band 2

Lowest Channel / 5MHz / QPSK

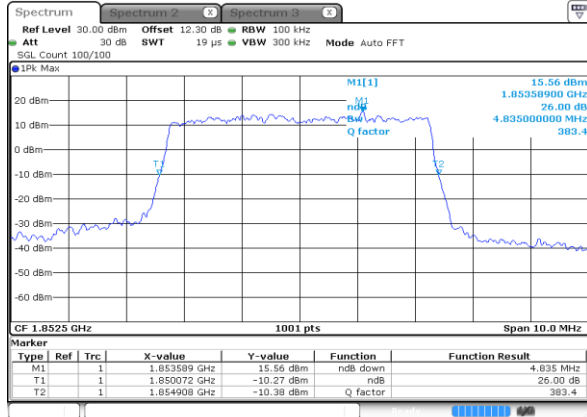


Date: 28 AUG 2020 11:31:23

Lowest Channel / 5MHz / 16QAM

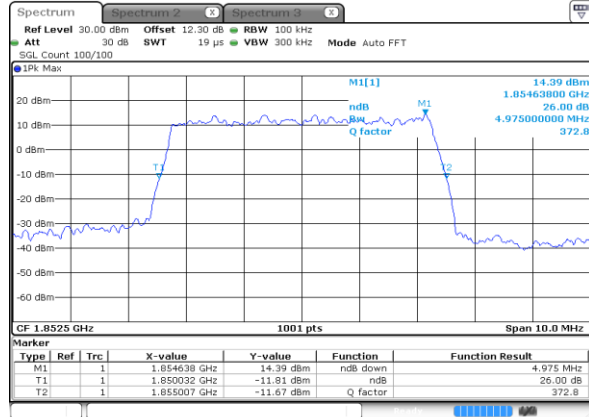


Date: 28 AUG 2020 11:31:35

Middle Channel / 5MHz / QPSK

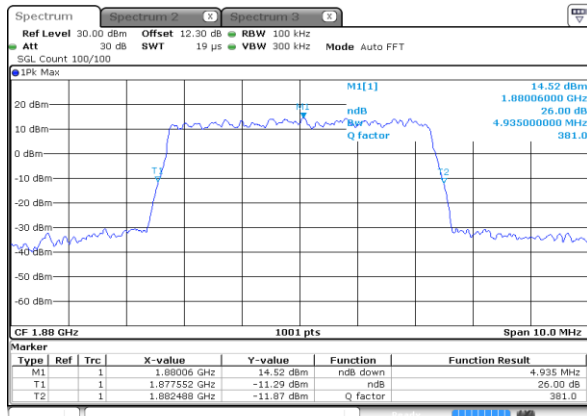


Date: 28 AUG 2020 11:37:37

Middle Channel / 5MHz / 16QAM

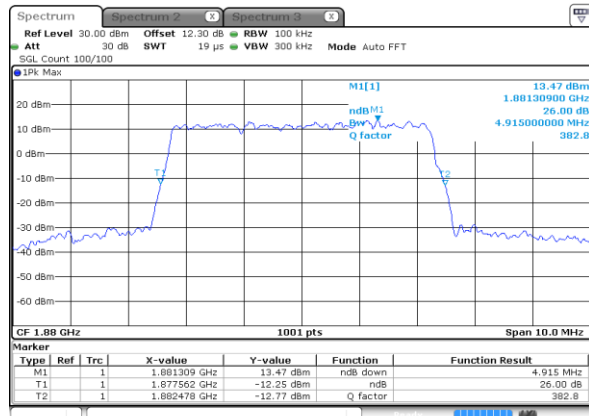


Date: 28 AUG 2020 11:37:48

Highest Channel / 5MHz / QPSK

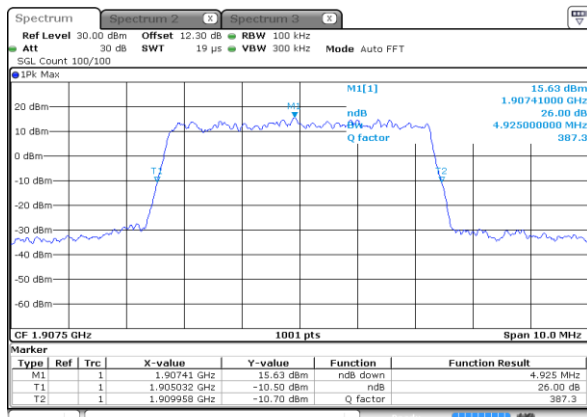

Date: 28 AUG 2020 11:39:47

Highest Channel / 5MHz / 16QAM

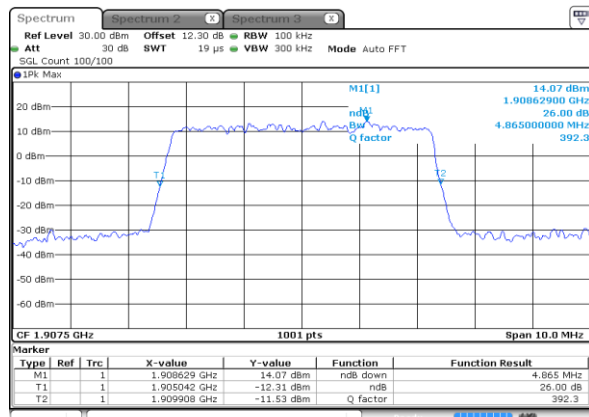


Date: 28 AUG 2020 11:39:59




LTE Band 2

Lowest Channel / 10MHz / QPSK

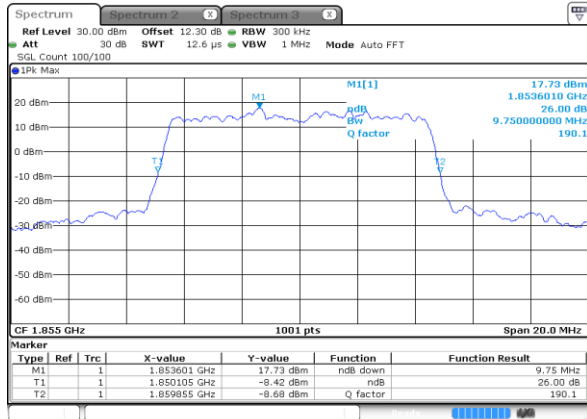


Date: 28 AUG 2020 11:46:04

Lowest Channel / 10MHz / 16QAM

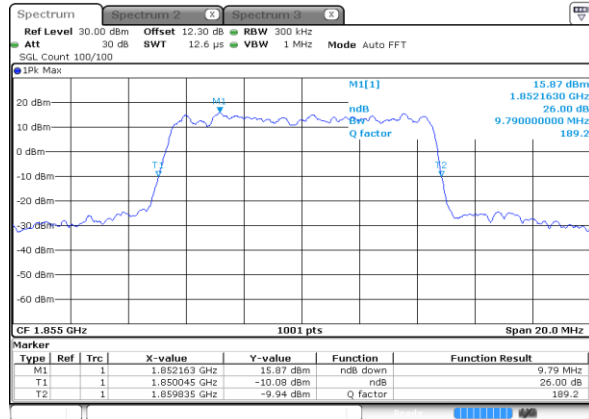


Date: 28 AUG 2020 11:46:15

Middle Channel / 10MHz / QPSK

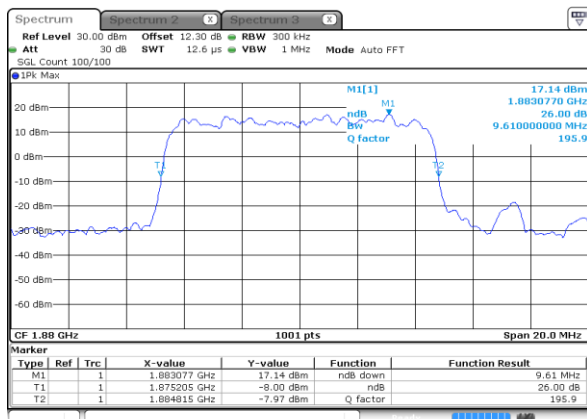


Date: 28 AUG 2020 11:52:17

Middle Channel / 10MHz / 16QAM

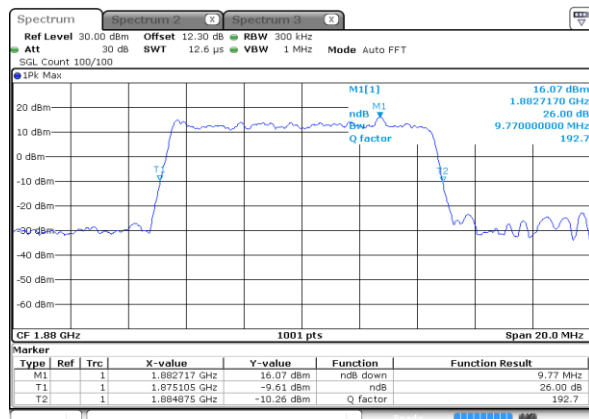


Date: 28 AUG 2020 11:52:28

Highest Channel / 10MHz / QPSK

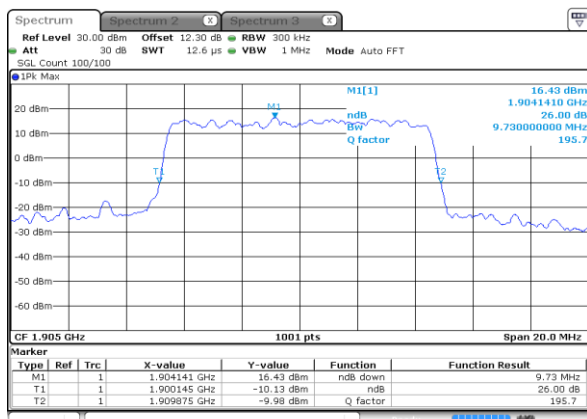

Date: 28 AUG 2020 11:54:28

Highest Channel / 10MHz / 16QAM

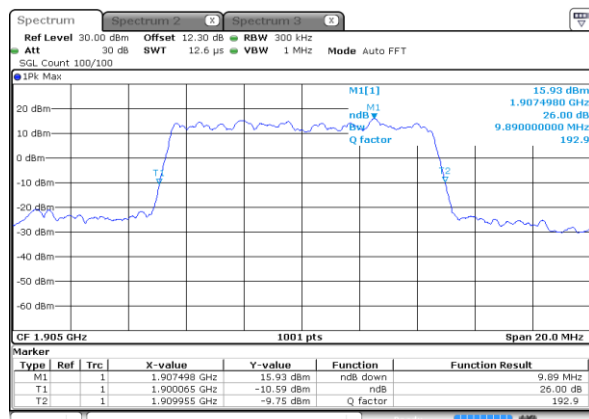


Date: 28 AUG 2020 11:54:40




LTE Band 2


Lowest Channel / 15MHz / QPSK

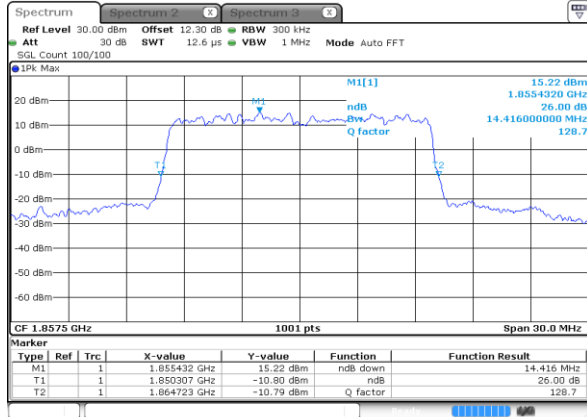


Lowest Channel / 15MHz / 16QAM

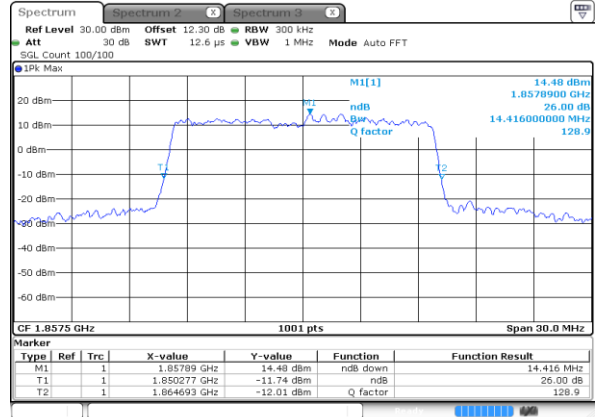


Middle Channel / 15MHz / QPSK

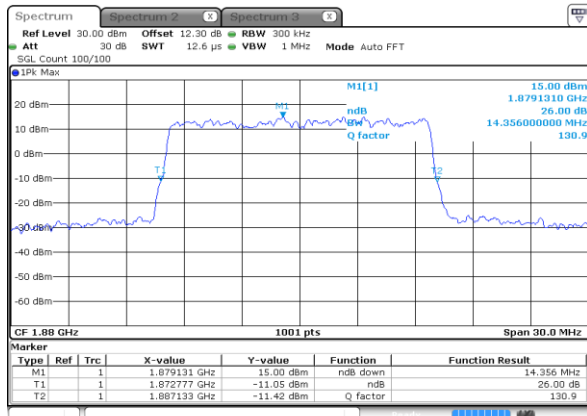


Middle Channel / 15MHz / 16QAM

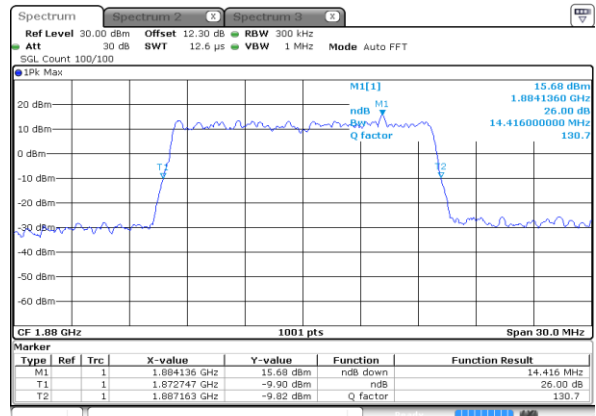

Highest Channel / 15MHz / QPSK

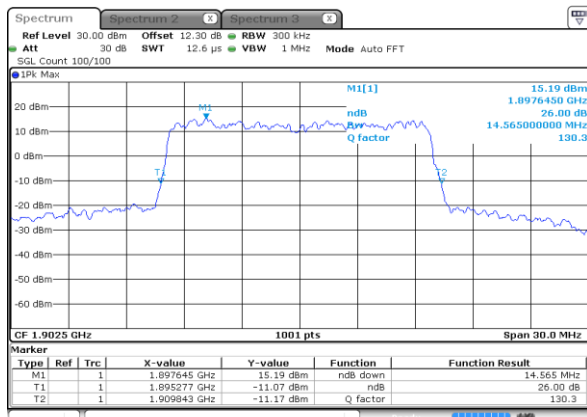


Highest Channel / 15MHz / 16QAM

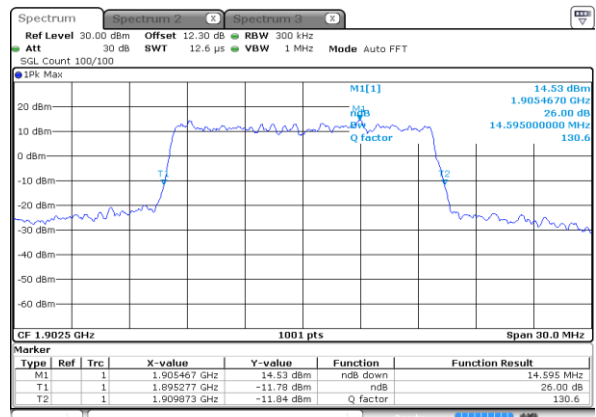




LTE Band 2


Lowest Channel / 20MHz / QPSK

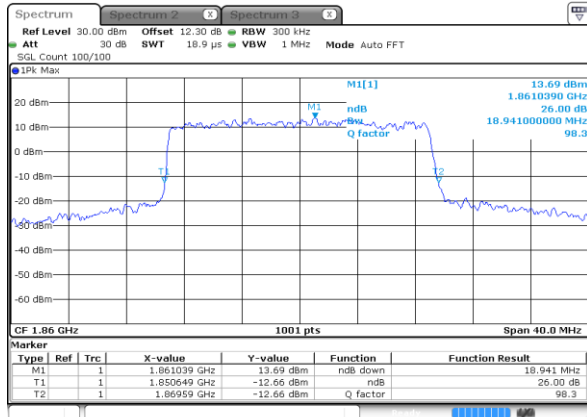


Lowest Channel / 20MHz / 16QAM

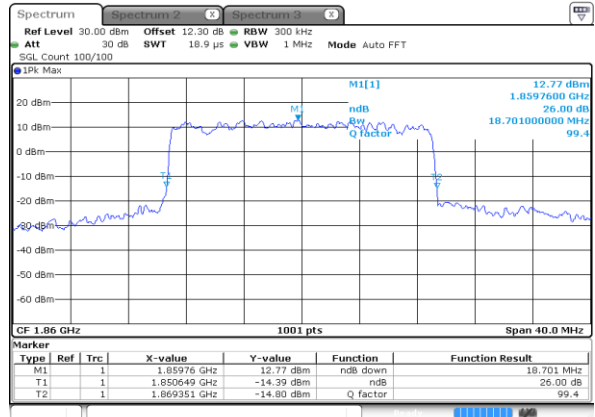


Middle Channel / 20MHz / QPSK

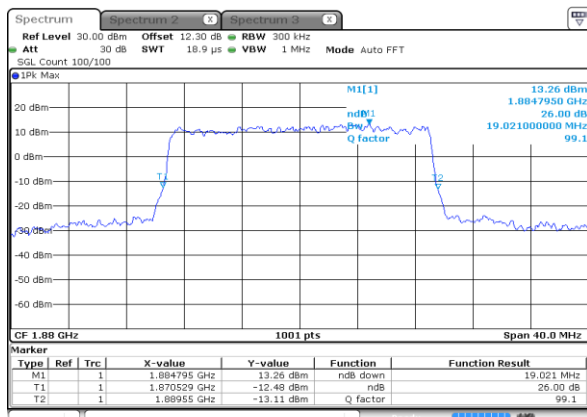


Middle Channel / 20MHz / 16QAM

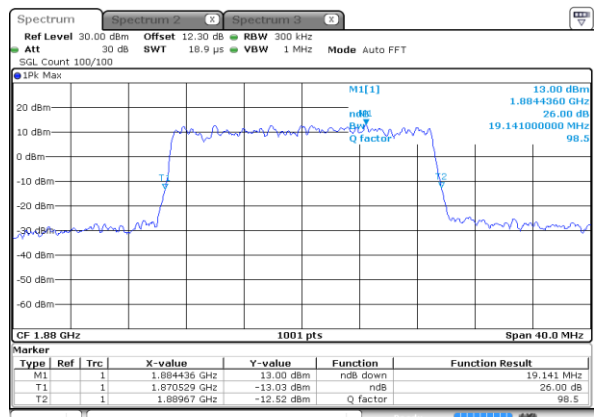

Highest Channel / 20MHz / QPSK

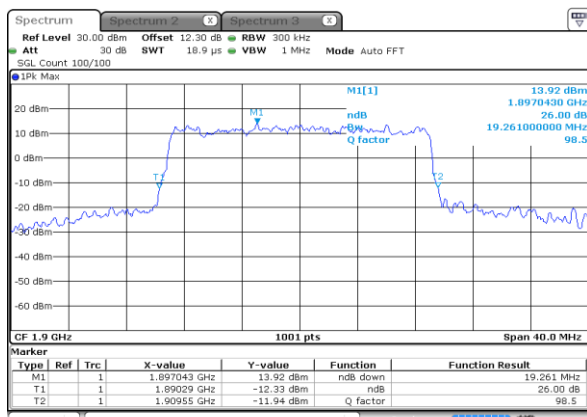


Highest Channel / 20MHz / 16QAM

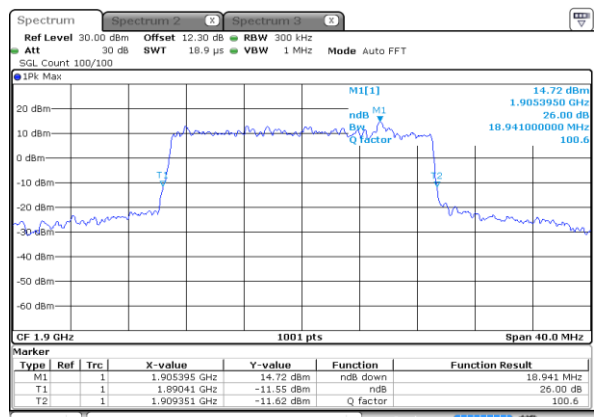




LTE Band 2


Lowest Channel / 1.4MHz / 64QAM

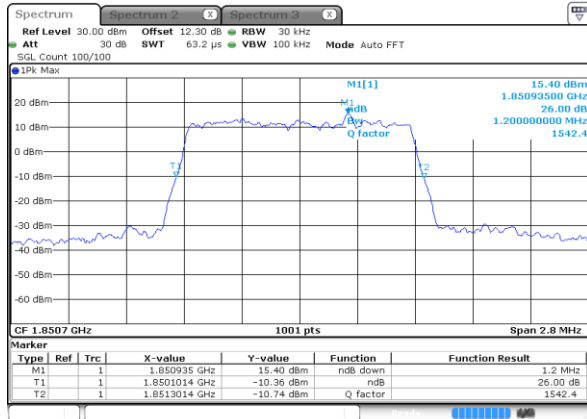


Lowest Channel / 3MHz / 64QAM

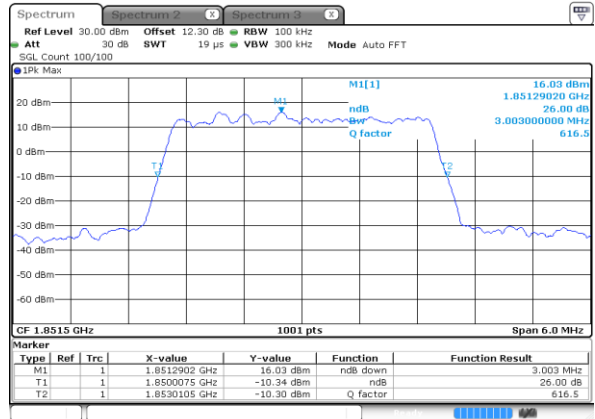


Middle Channel / 1.4MHz / 64QAM

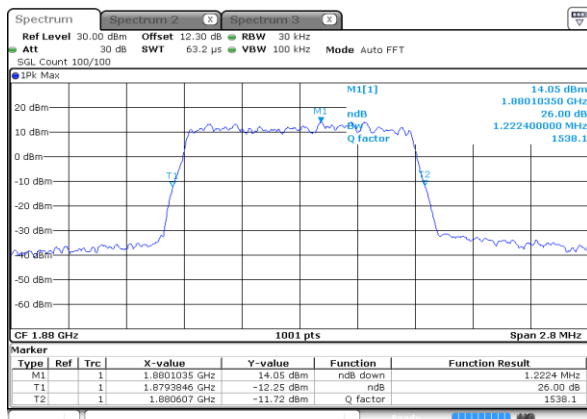


Middle Channel / 3MHz / 64QAM

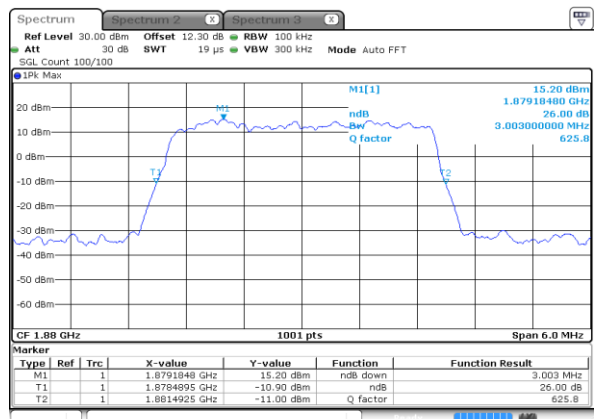

Highest Channel / 1.4MHz / 64QAM

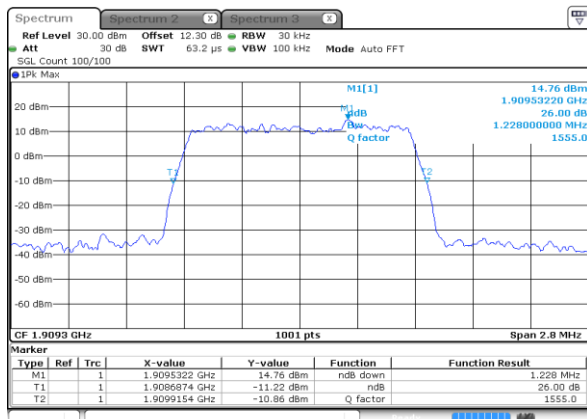


Highest Channel / 3MHz / 64QAM

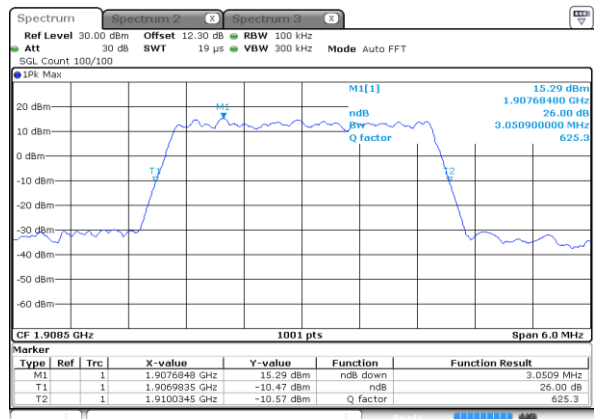




LTE Band 2

Lowest Channel / 5MHz / 64QAM

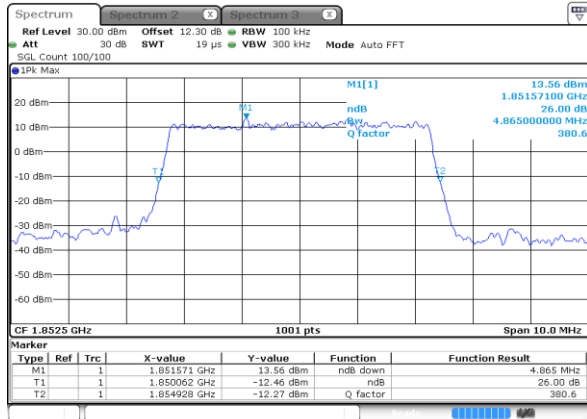


Date: 28 AUG 2020 12:37:14

Lowest Channel / 10MHz / 64QAM

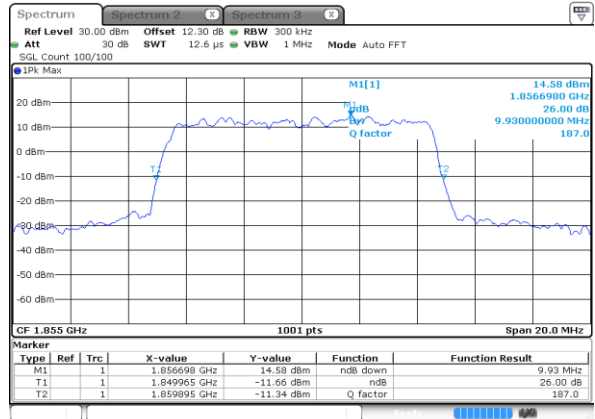


Date: 28 AUG 2020 12:44:34

Middle Channel / 5MHz / 64QAM

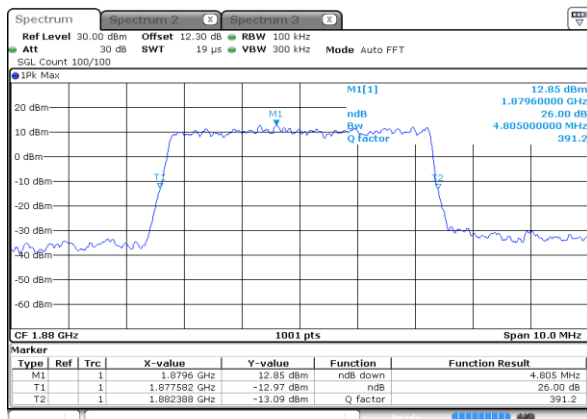


Date: 28 AUG 2020 12:40:20

Middle Channel / 10MHz / 64QAM

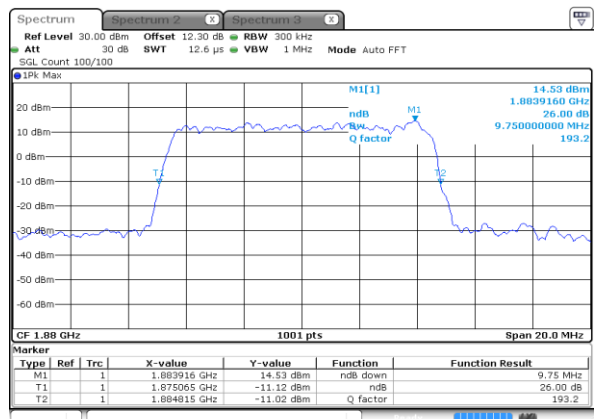


Date: 28 AUG 2020 12:47:41

Highest Channel / 5MHz / 64QAM

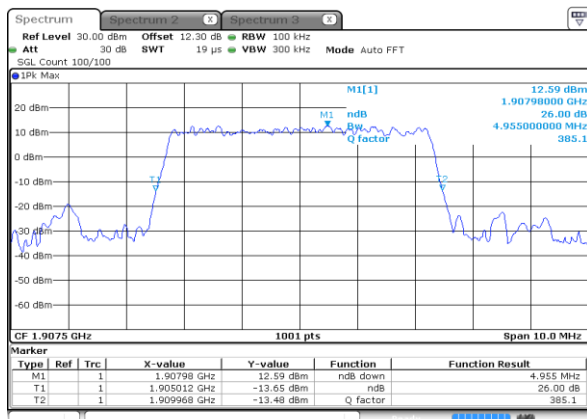

Date: 28 AUG 2020 12:41:26

Highest Channel / 10MHz / 64QAM

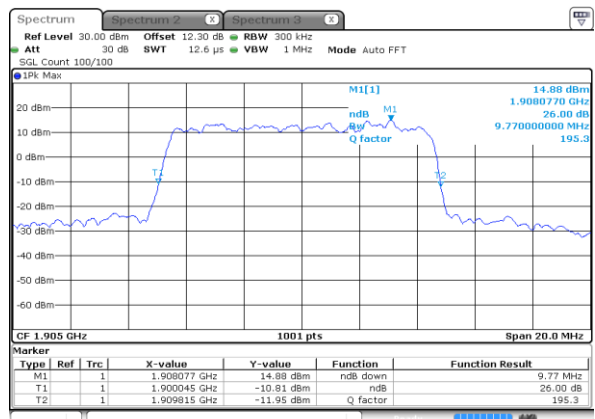


Date: 28 AUG 2020 12:48:47




LTE Band 2

Lowest Channel / 15MHz / 64QAM

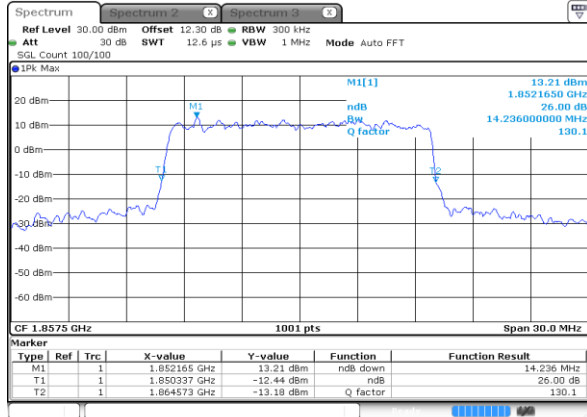


Date: 28 AUG 2020 12:51:55

Lowest Channel / 20MHz / 64QAM

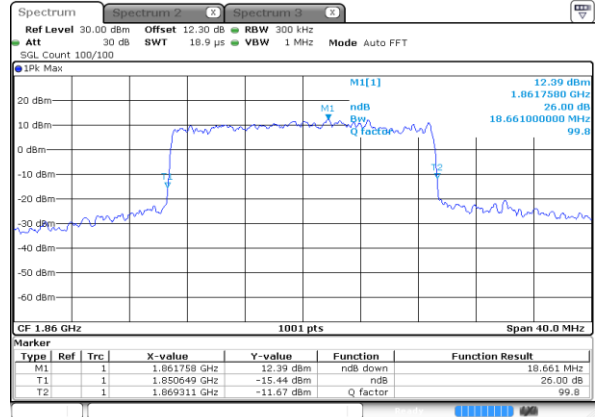


Date: 28 AUG 2020 12:59:15

Middle Channel / 15MHz / 64QAM

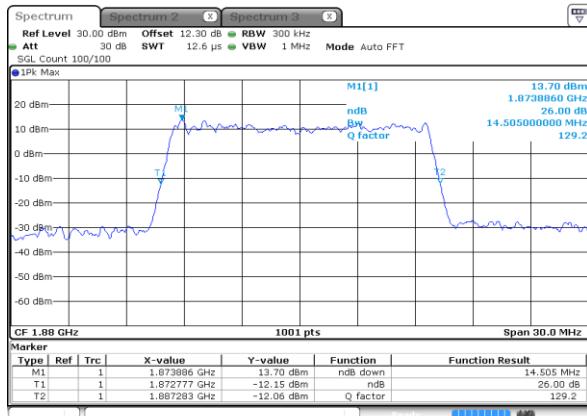


Date: 28 AUG 2020 12:55:02

Middle Channel / 20MHz / 64QAM

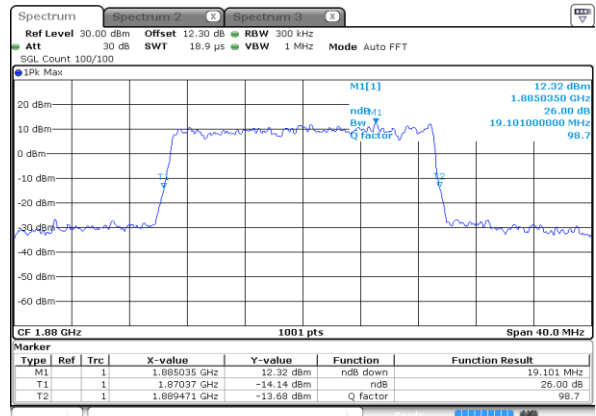


Date: 28 AUG 2020 13:02:22

Highest Channel / 15MHz / 64QAM

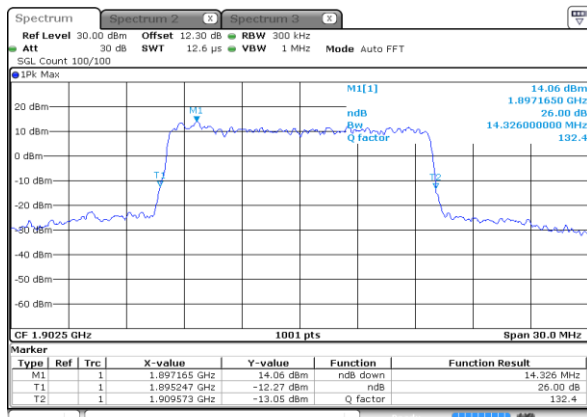

Date: 28 AUG 2020 12:56:07

Highest Channel / 20MHz / 64QAM

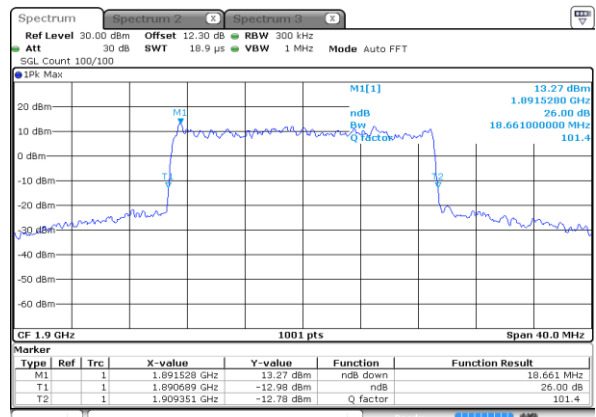

Date: 28 AUG 2020 13:03:27


**Occupied Bandwidth**

Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.71	2.70	4.51	4.48	9.03	9.05	13.40	13.43	17.90	17.78
Middle CH	1.09	1.09	2.70	2.71	4.47	4.50	9.01	8.93	13.40	13.40	17.86	17.94
Highest CH	1.09	1.09	2.73	2.71	4.48	4.50	9.09	9.01	13.37	13.40	17.94	17.94
Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.10	-	2.71	-	4.47	-	9.01	-	13.49	-	17.86	-
Middle CH	1.09	-	2.70	-	4.50	-	9.01	-	13.49	-	17.82	-
Highest CH	1.09	-	2.71	-	4.48	-	8.97	-	13.43	-	17.90	-




LTE Band 2


Lowest Channel / 1.4MHz / QPSK

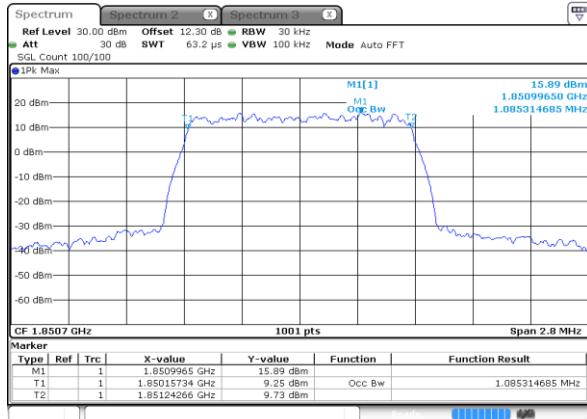


Lowest Channel / 1.4MHz / 16QAM

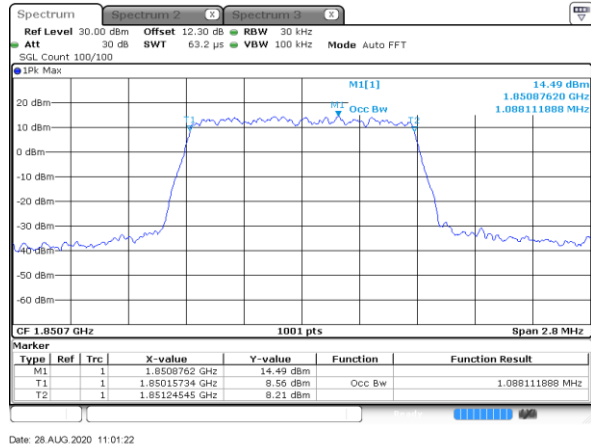


Middle Channel / 1.4MHz / QPSK

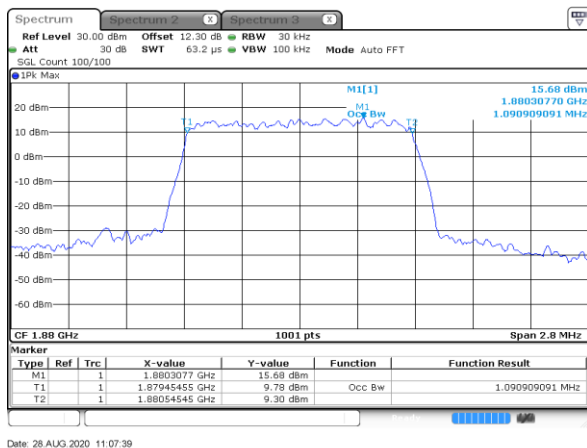


Middle Channel / 1.4MHz / 16QAM

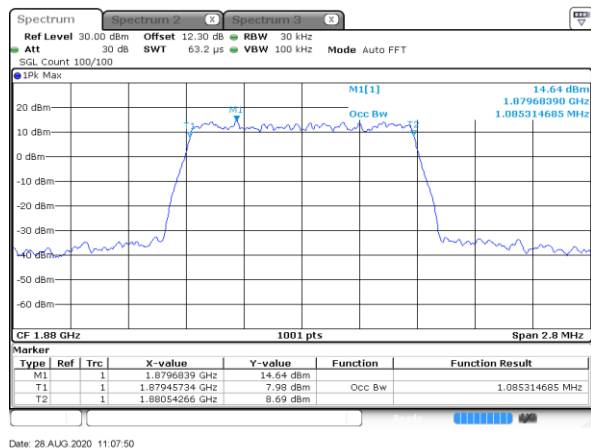

Highest Channel / 1.4MHz / QPSK

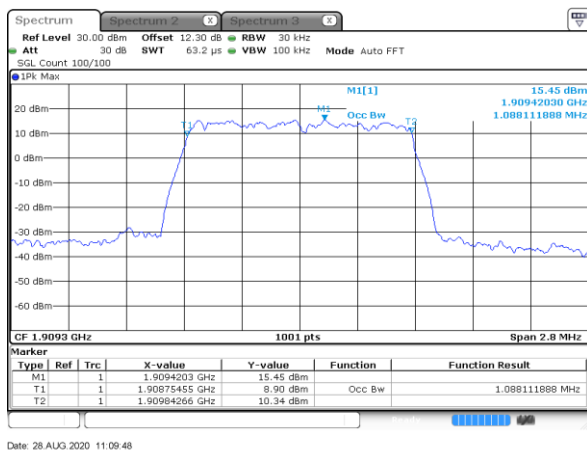


Highest Channel / 1.4MHz / 16QAM

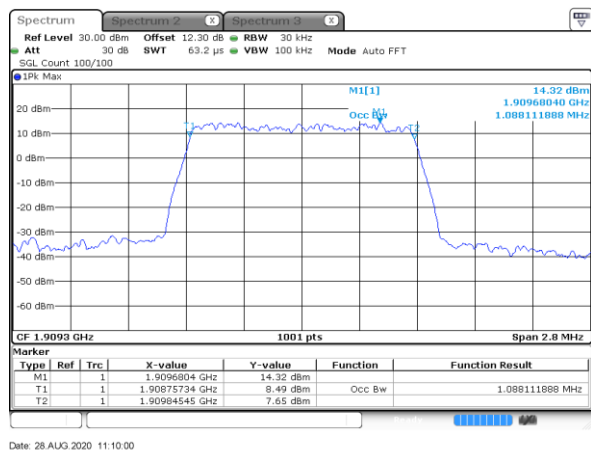




LTE Band 2


Lowest Channel / 3MHz / QPSK

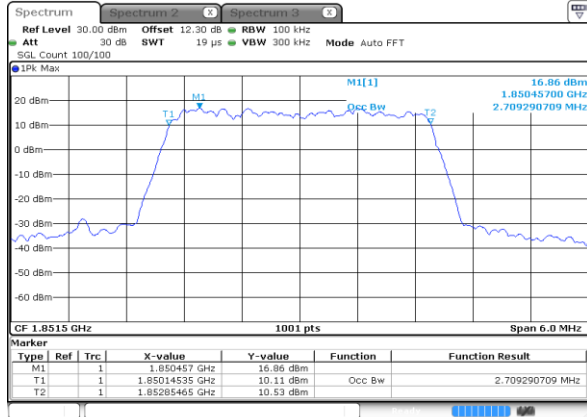


Lowest Channel / 3MHz / 16QAM

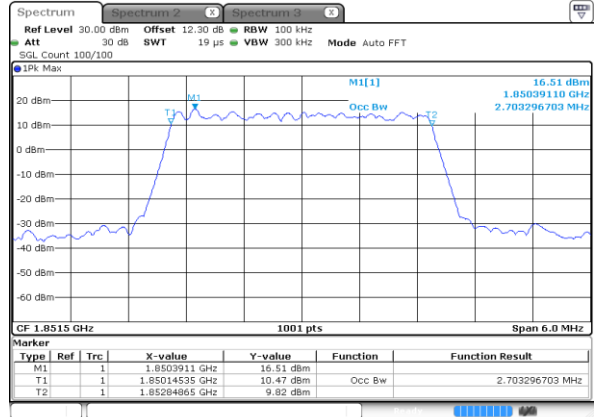


Middle Channel / 3MHz / QPSK

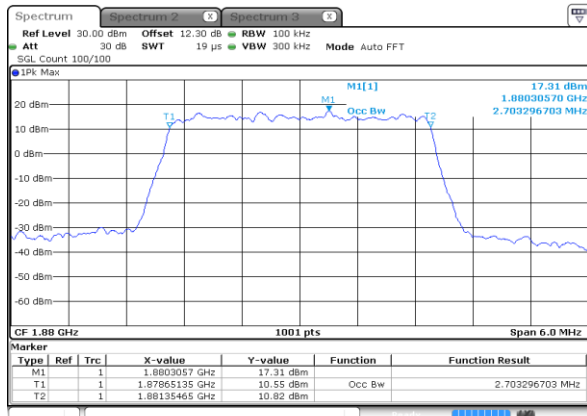


Middle Channel / 3MHz / 16QAM

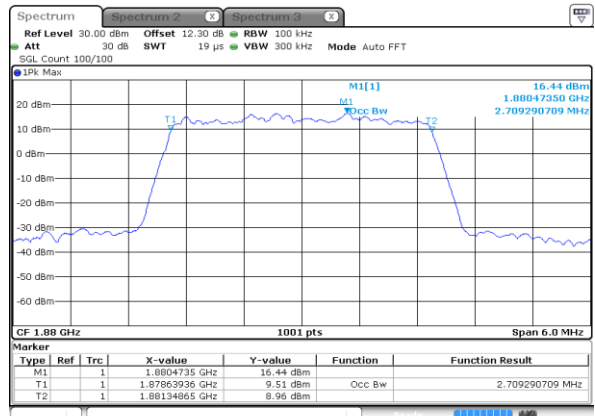

Highest Channel / 3MHz / QPSK

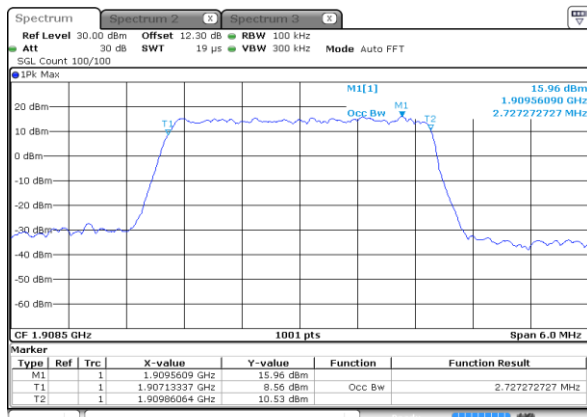


Highest Channel / 3MHz / 16QAM

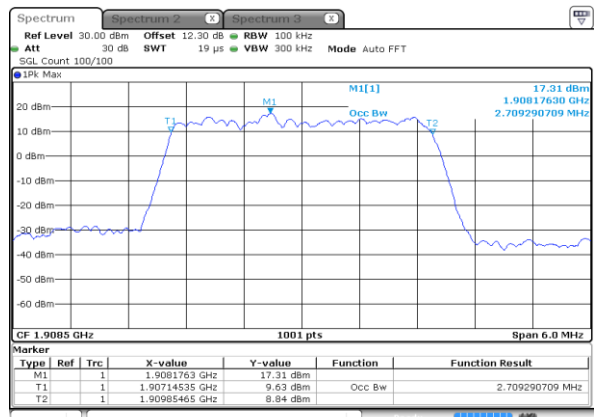




LTE Band 2


Lowest Channel / 5MHz / QPSK

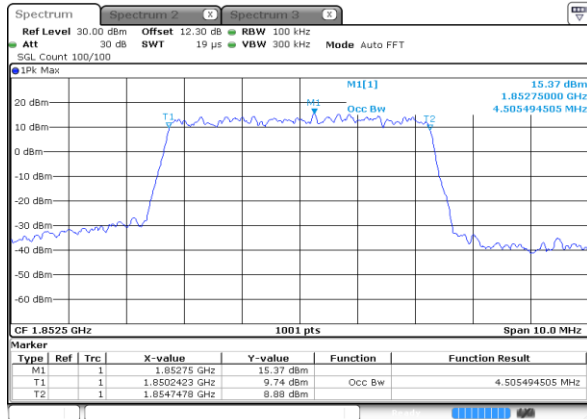


Lowest Channel / 5MHz / 16QAM

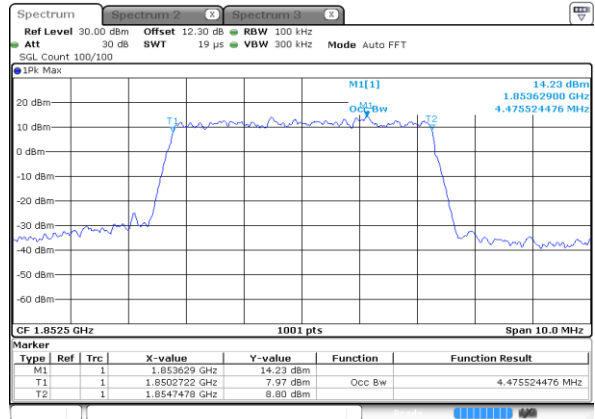


Middle Channel / 5MHz / QPSK

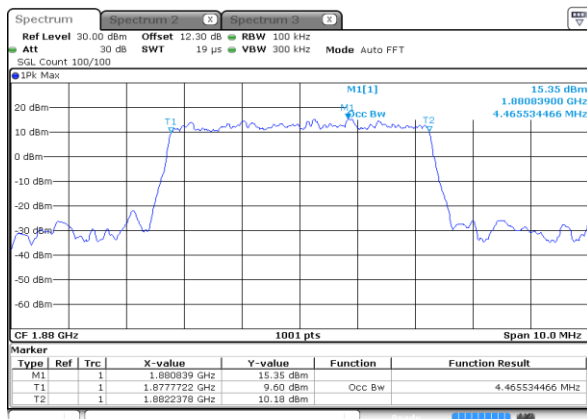


Middle Channel / 5MHz / 16QAM

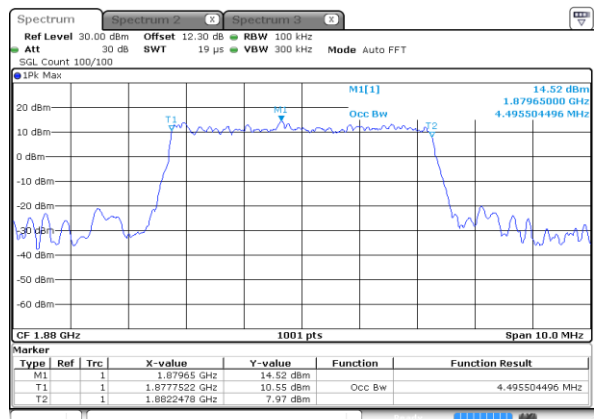

Highest Channel / 5MHz / QPSK

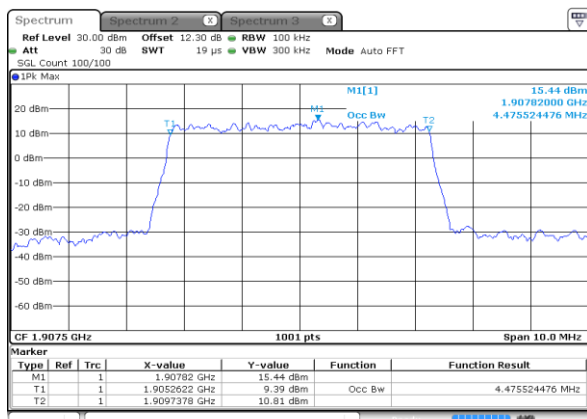


Highest Channel / 5MHz / 16QAM

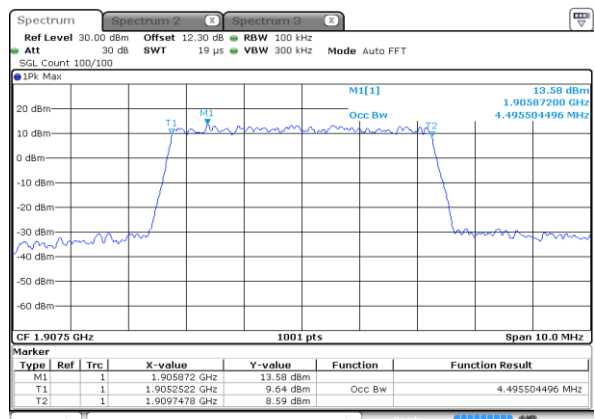




LTE Band 2


Lowest Channel / 10MHz / QPSK

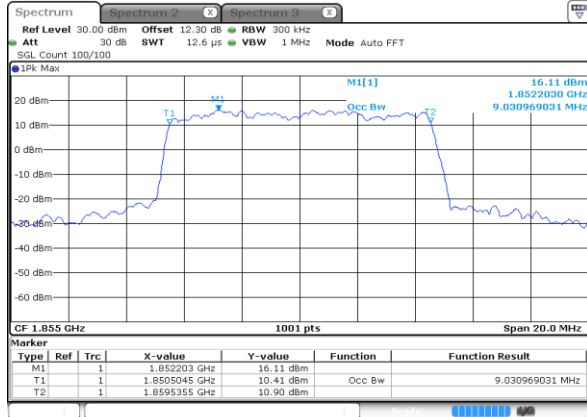


Lowest Channel / 10MHz / 16QAM

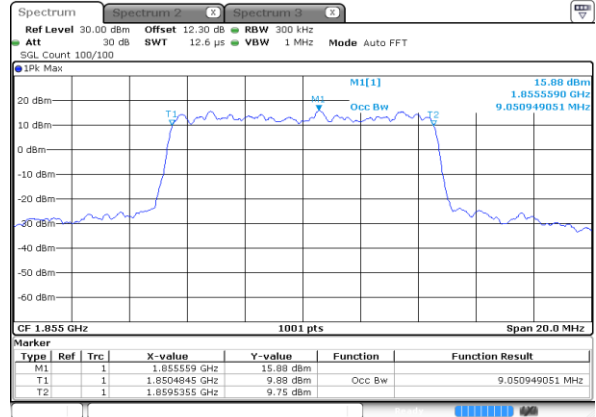


Middle Channel / 10MHz / QPSK

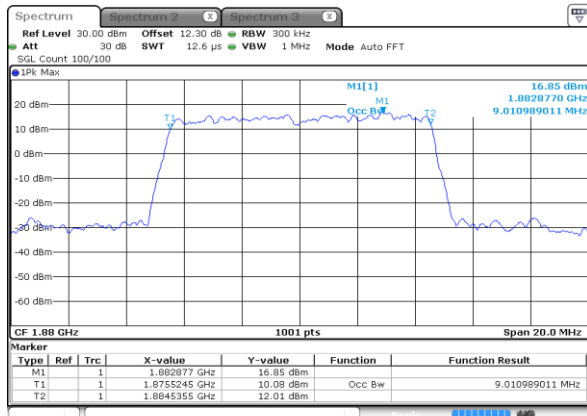


Middle Channel / 10MHz / 16QAM

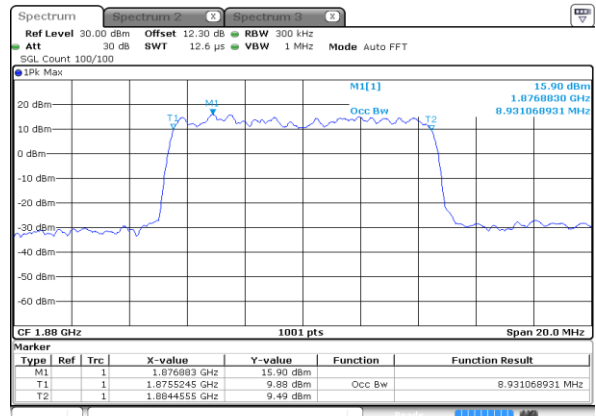

Highest Channel / 10MHz / QPSK

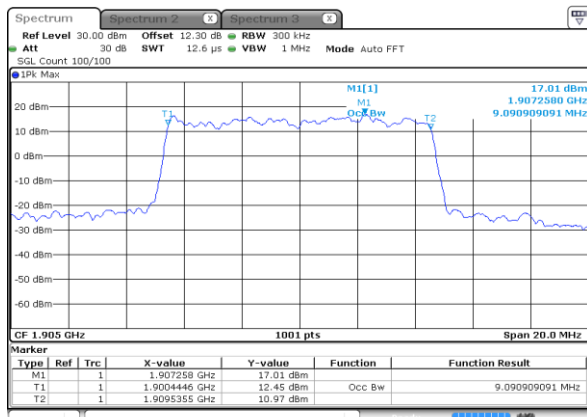


Highest Channel / 10MHz / 16QAM

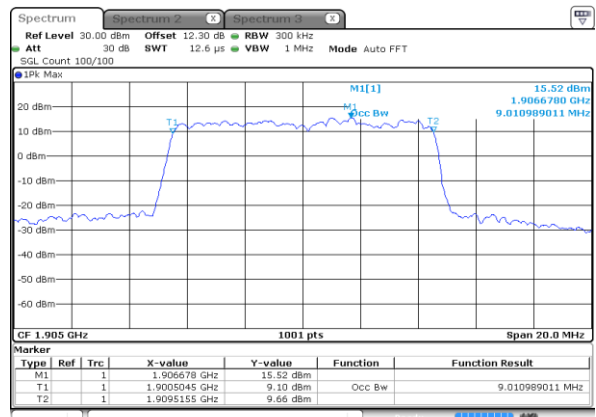




LTE Band 2


Lowest Channel / 15MHz / QPSK

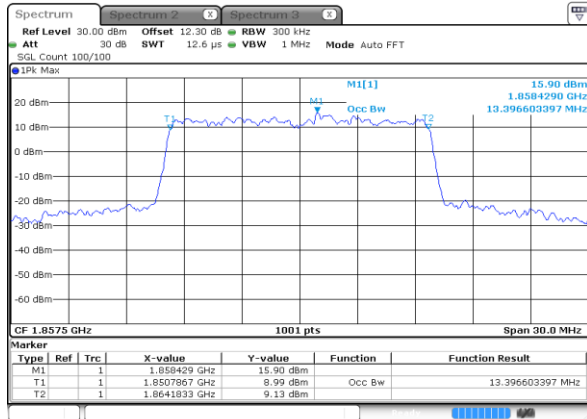


Lowest Channel / 15MHz / 16QAM

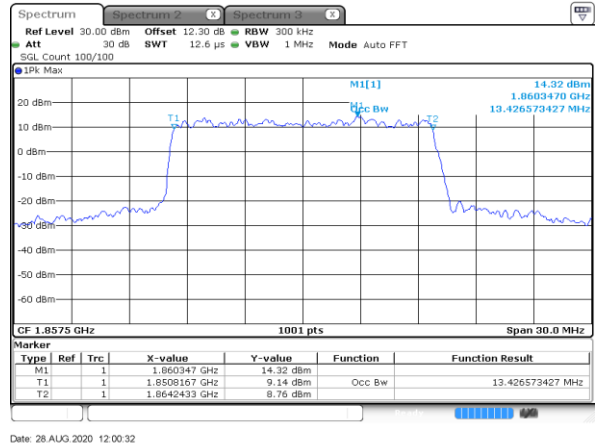


Middle Channel / 15MHz / QPSK

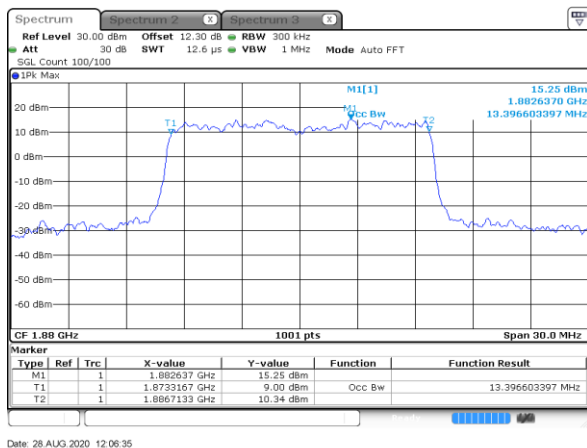


Middle Channel / 15MHz / 16QAM

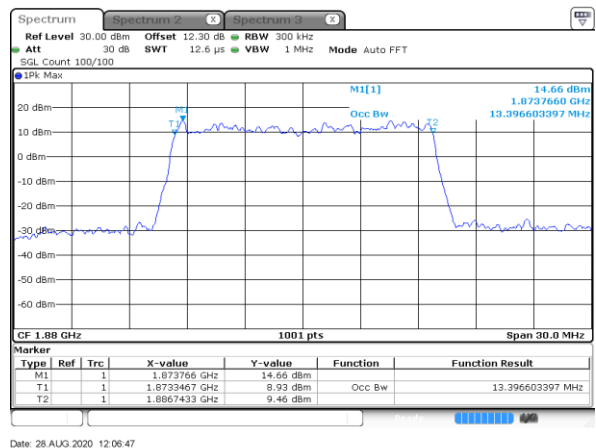

Highest Channel / 15MHz / QPSK

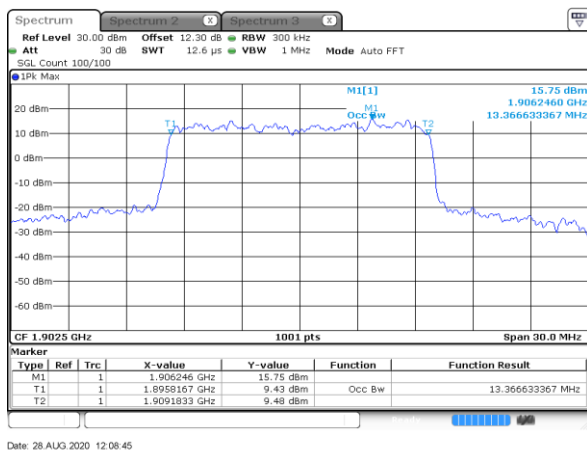


Highest Channel / 15MHz / 16QAM

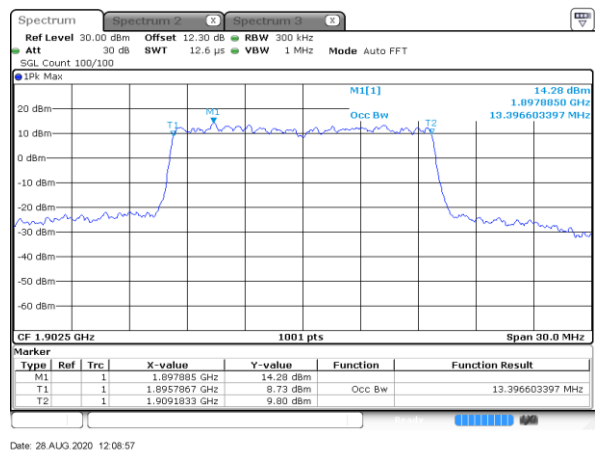




LTE Band 2


Lowest Channel / 20MHz / QPSK

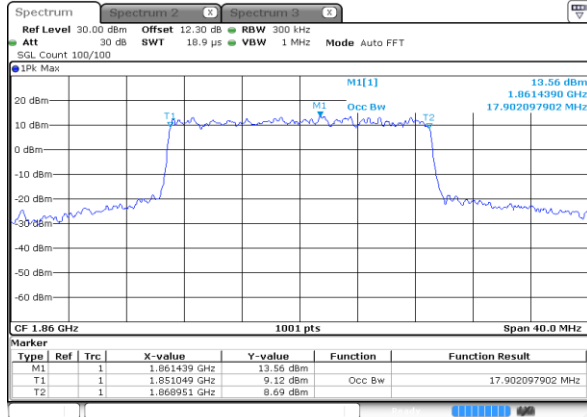


Lowest Channel / 20MHz / 16QAM

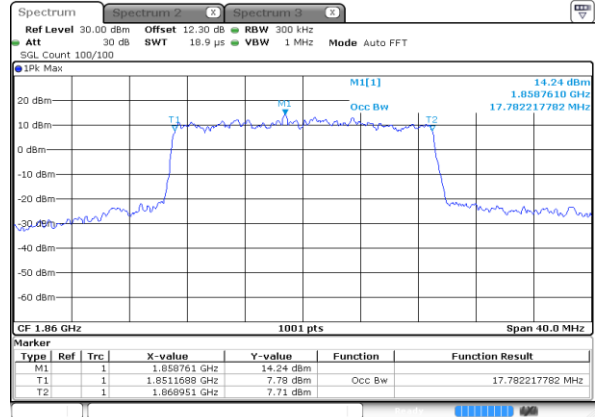


Middle Channel / 20MHz / QPSK

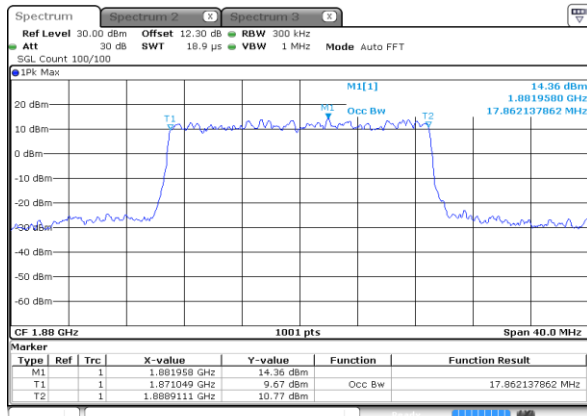

Middle Channel / 20MHz / 16QAM

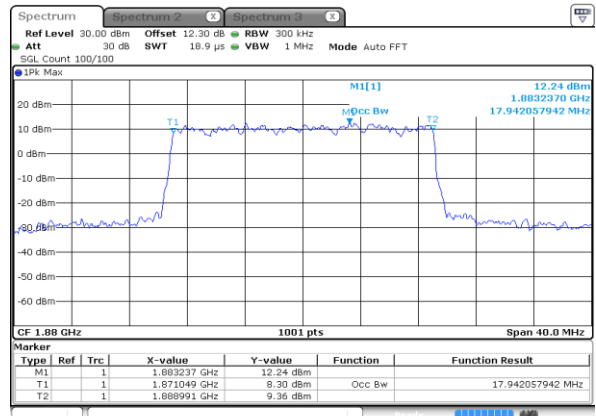

Highest Channel / 20MHz / QPSK

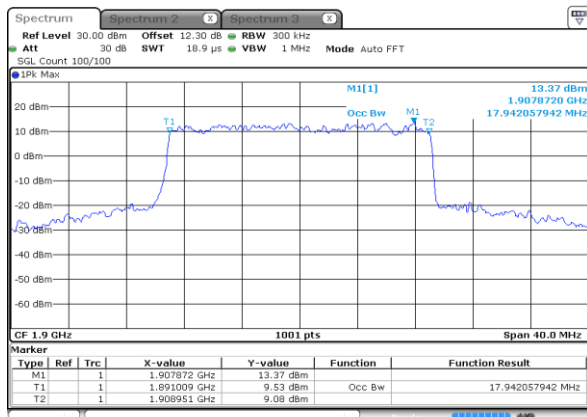

Highest Channel / 20MHz / 16QAM

