


Appendix C. Radiated Emission Measurement

1X1

Below 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

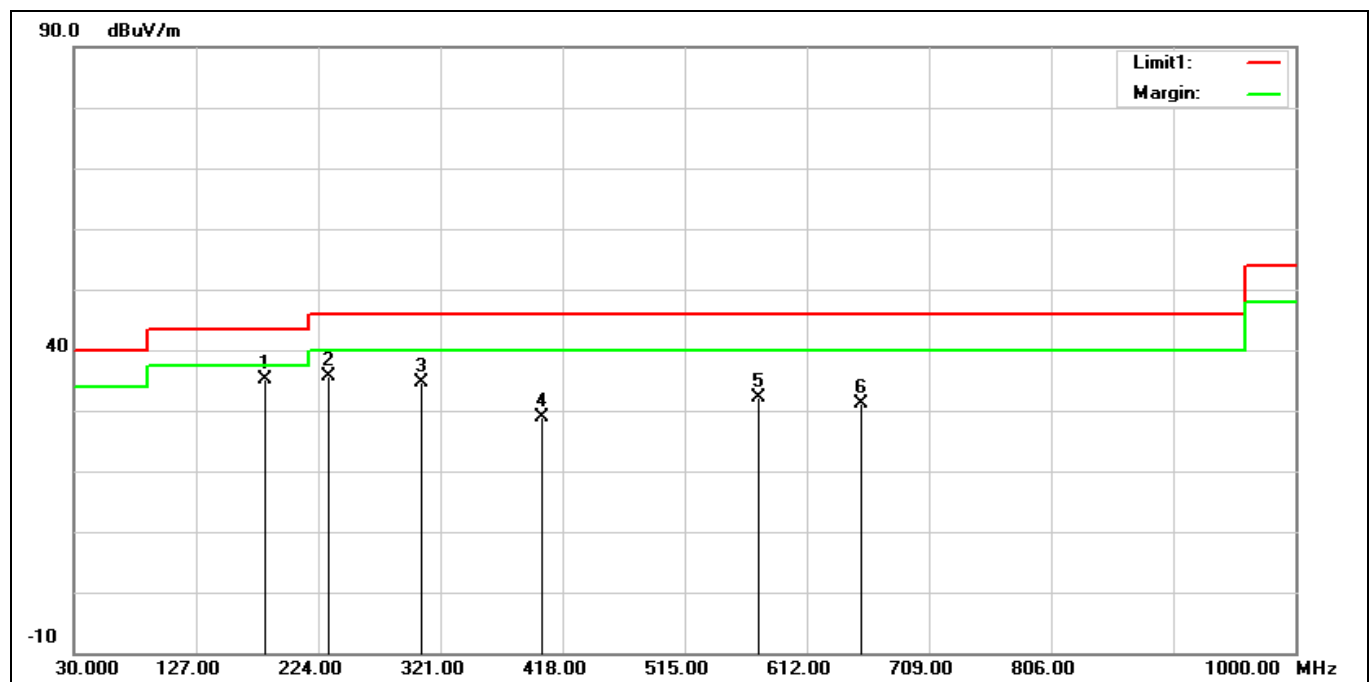


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	181.3200	43.11	-8.02	35.09	43.50	-8.41	QP
2	232.7300	43.81	-8.07	35.74	46.00	-10.26	QP
3	306.4500	40.00	-5.35	34.65	46.00	-11.35	QP
4	401.5100	32.21	-3.44	28.77	46.00	-17.23	QP
5	574.1700	32.46	-0.45	32.01	46.00	-13.99	QP
6	655.6500	30.28	0.95	31.23	46.00	-14.77	QP

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11a 5180 MHz

Remark:

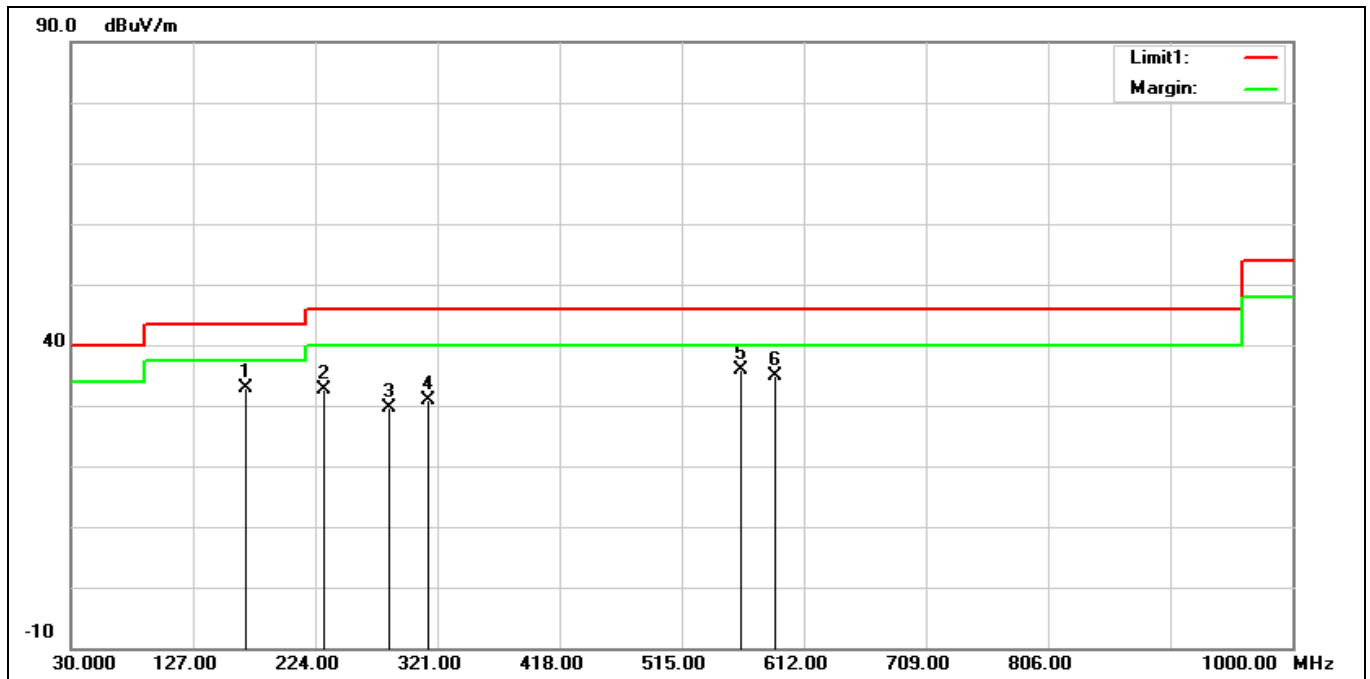


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	168.7100	39.73	-6.76	32.97	43.50	-10.53	QP
2	230.7900	40.80	-8.22	32.58	46.00	-13.42	QP
3	283.1700	35.43	-5.84	29.59	46.00	-16.41	QP
4	313.2400	36.06	-5.23	30.83	46.00	-15.17	QP
5*	561.5600	36.53	-0.77	35.76	46.00	-10.24	QP
6	589.6900	35.05	-0.05	35.00	46.00	-11.00	QP

Harmonic

Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

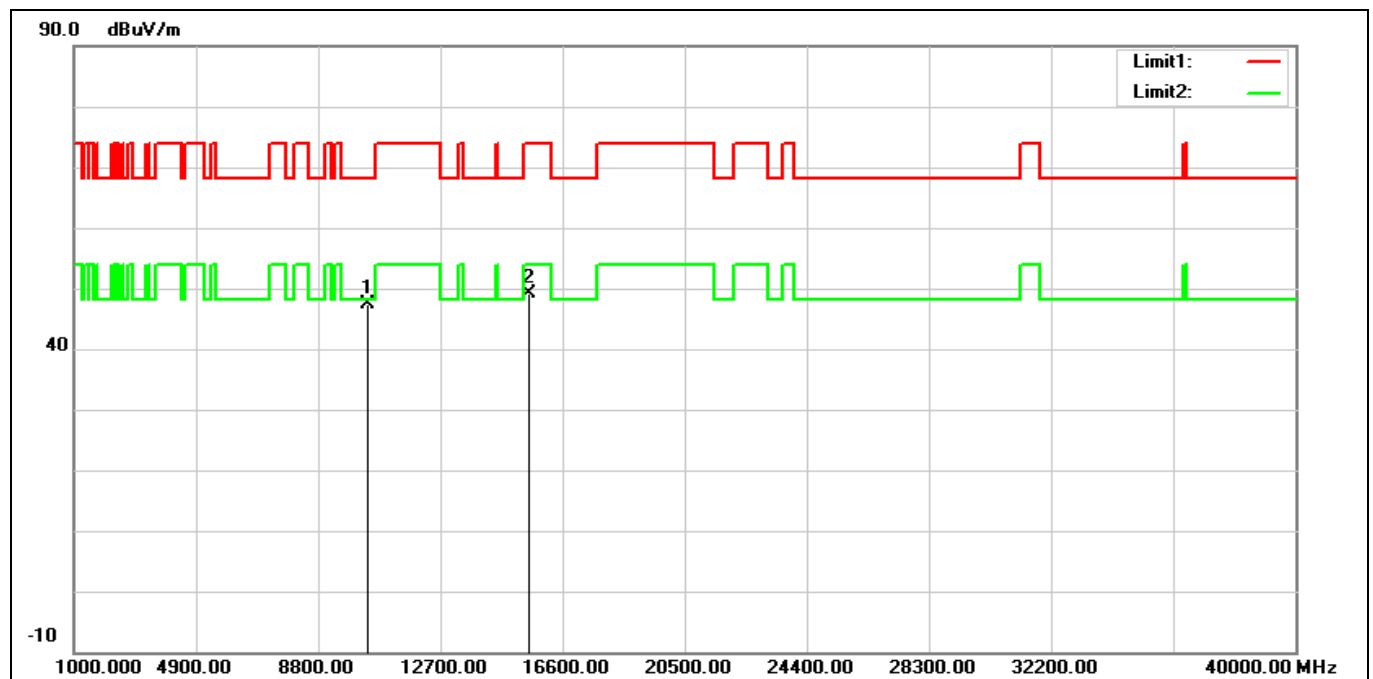


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.01	13.36	47.37	68.20	-20.83	peak
2	15540.000	32.42	16.77	49.19	74.00	-24.81	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5180 MHz

Remark:

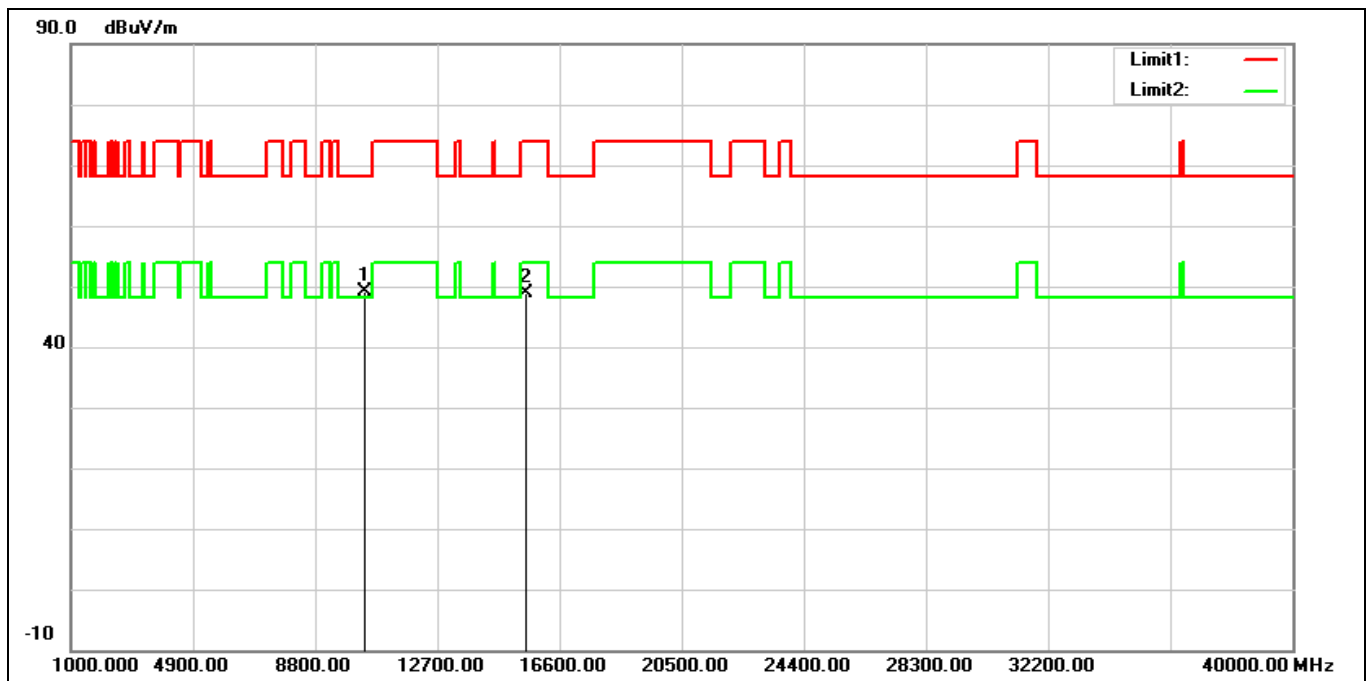


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	35.67	13.36	49.03	68.20	-19.17	peak
2	15540.000	32.20	16.77	48.97	74.00	-25.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5200 MHz		
Remark:			

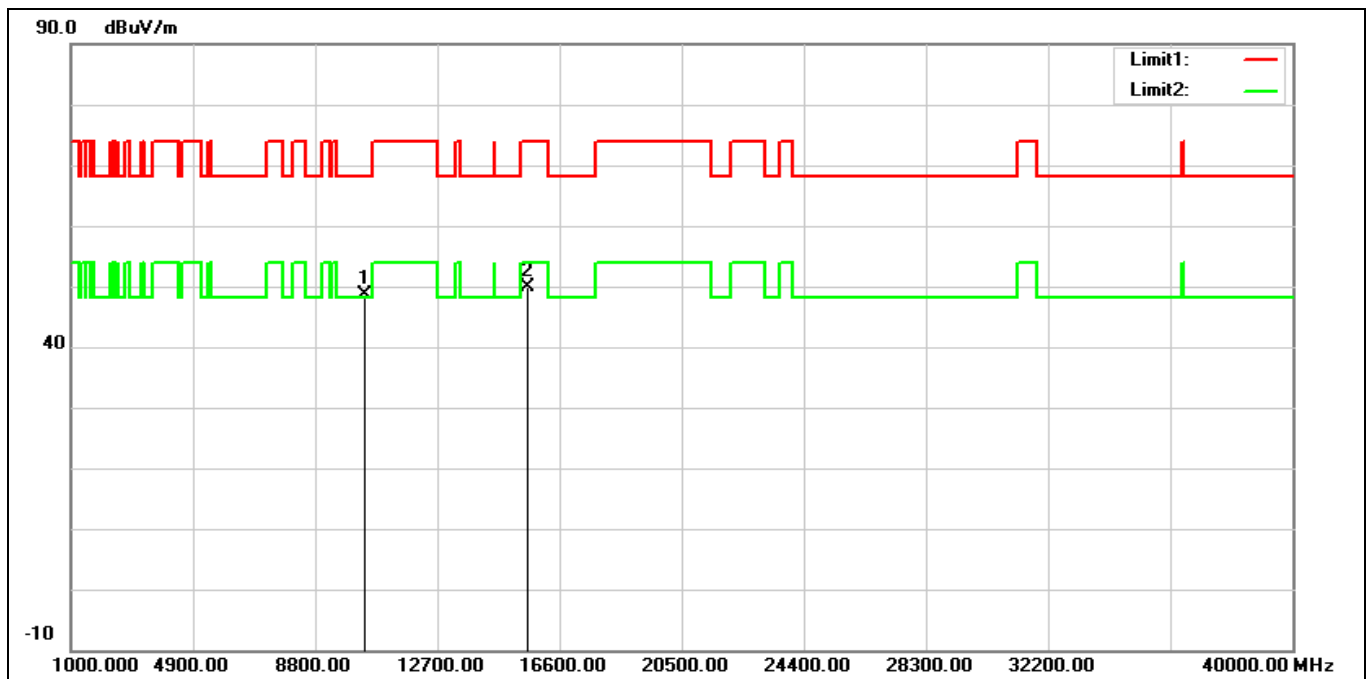


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.10	13.51	48.61	68.20	-19.59	peak
2	15600.000	33.33	16.66	49.99	74.00	-24.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

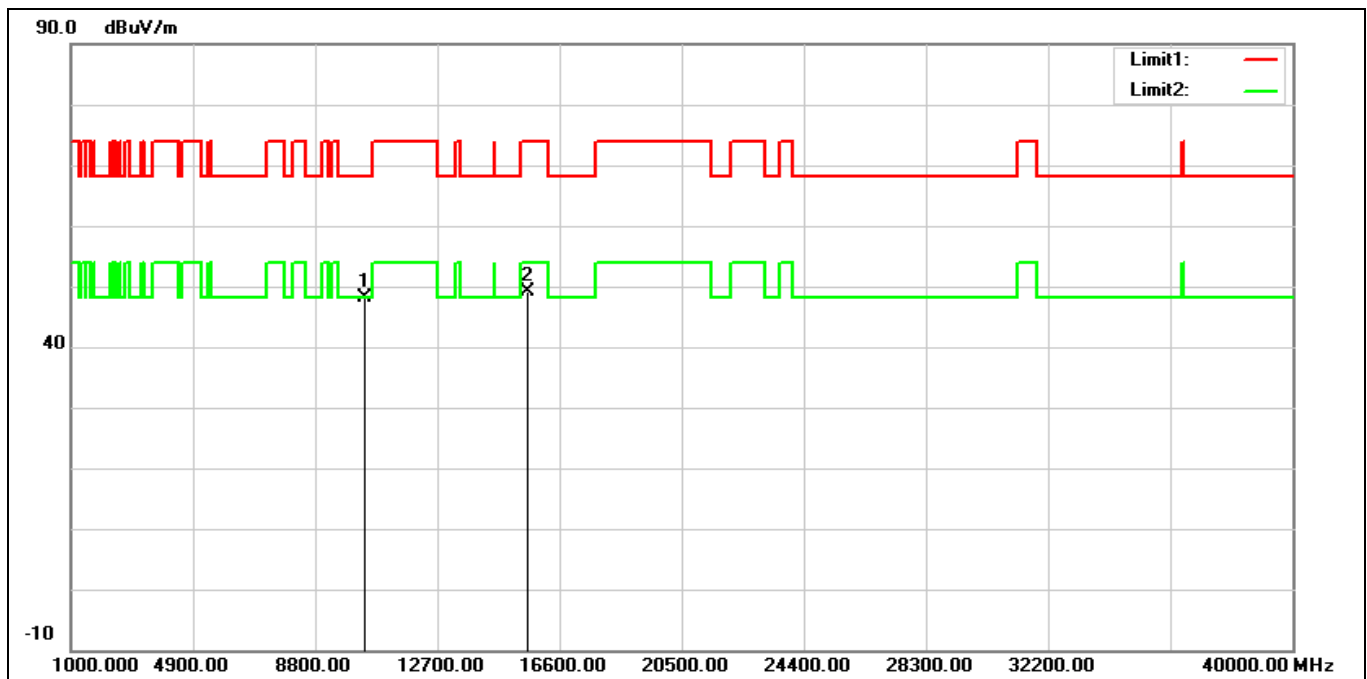

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.69	13.51	48.20	68.20	-20.00	peak
2	15600.000	32.52	16.66	49.18	74.00	-24.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

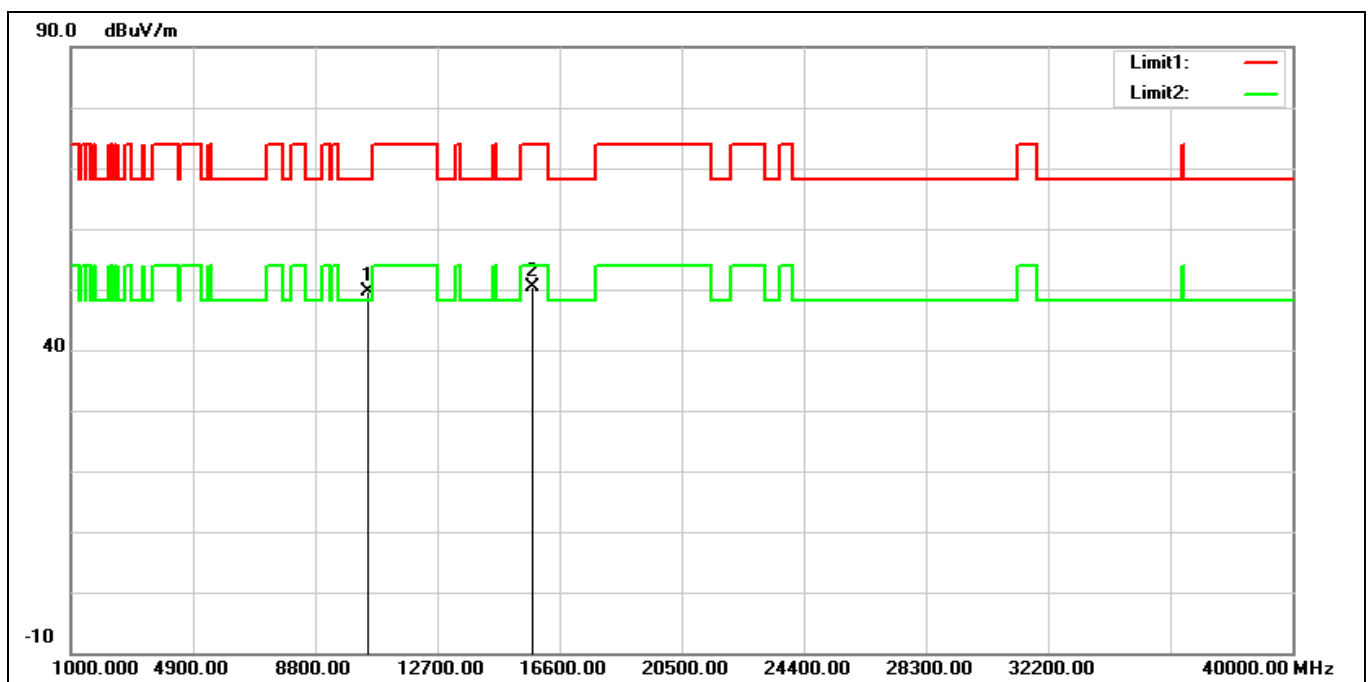


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.95	13.58	49.53	68.20	-18.67	peak
2	15720.000	33.69	16.57	50.26	74.00	-23.74	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5240 MHz

Remark:

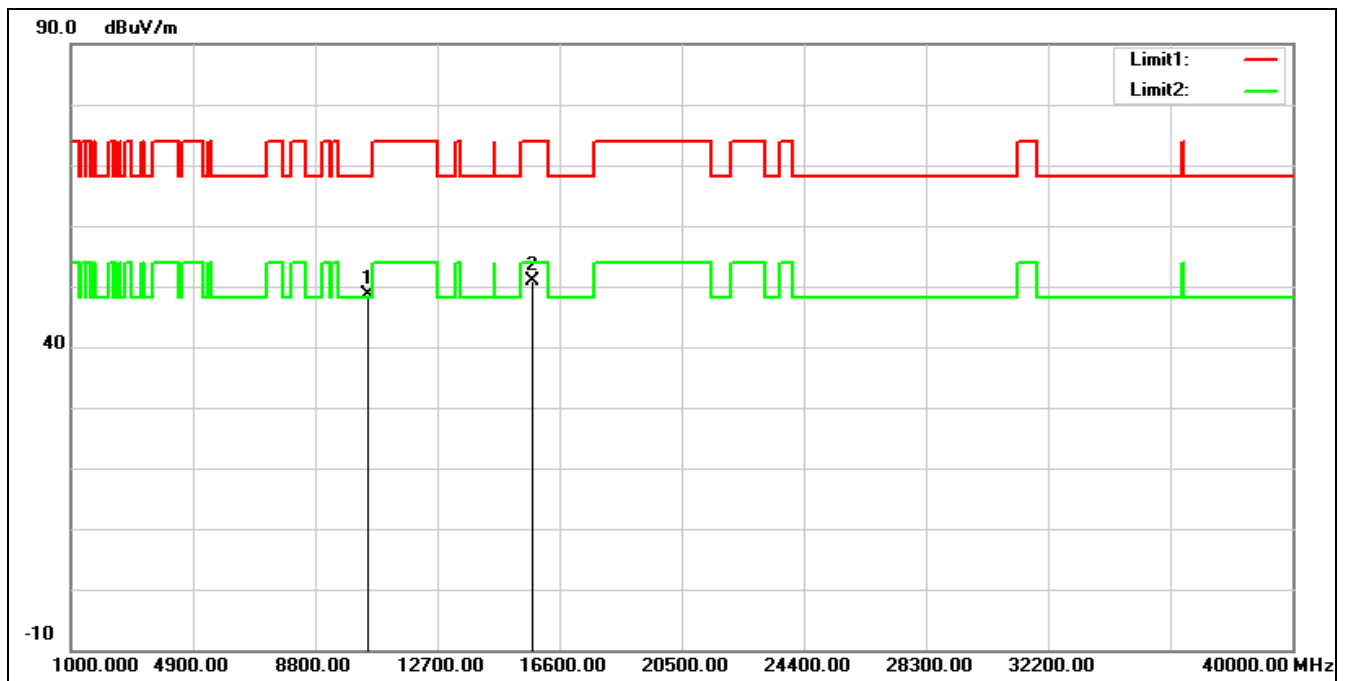


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.09	13.58	48.67	68.20	-19.53	peak
2	15720.000	34.31	16.57	50.88	74.00	-23.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

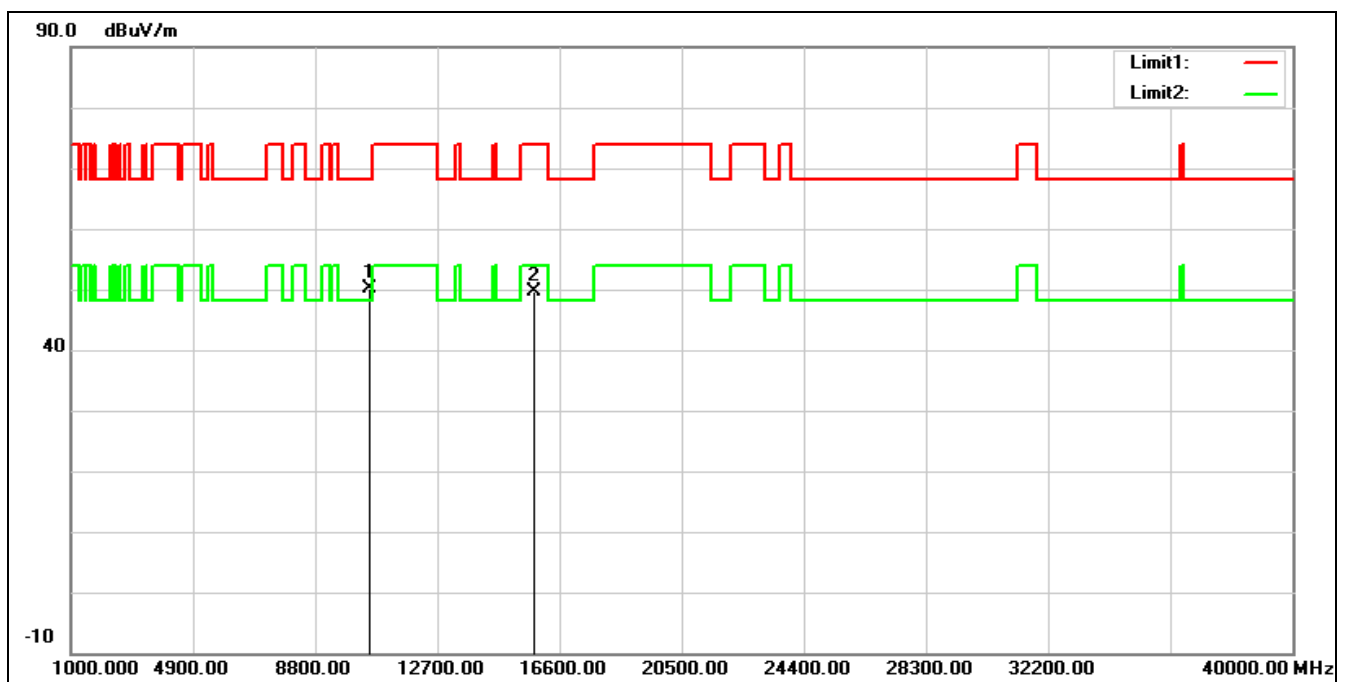


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	36.42	13.61	50.03	68.20	-18.17	peak
2	15780.000	33.14	16.52	49.66	74.00	-24.34	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5260 MHz
Remark:

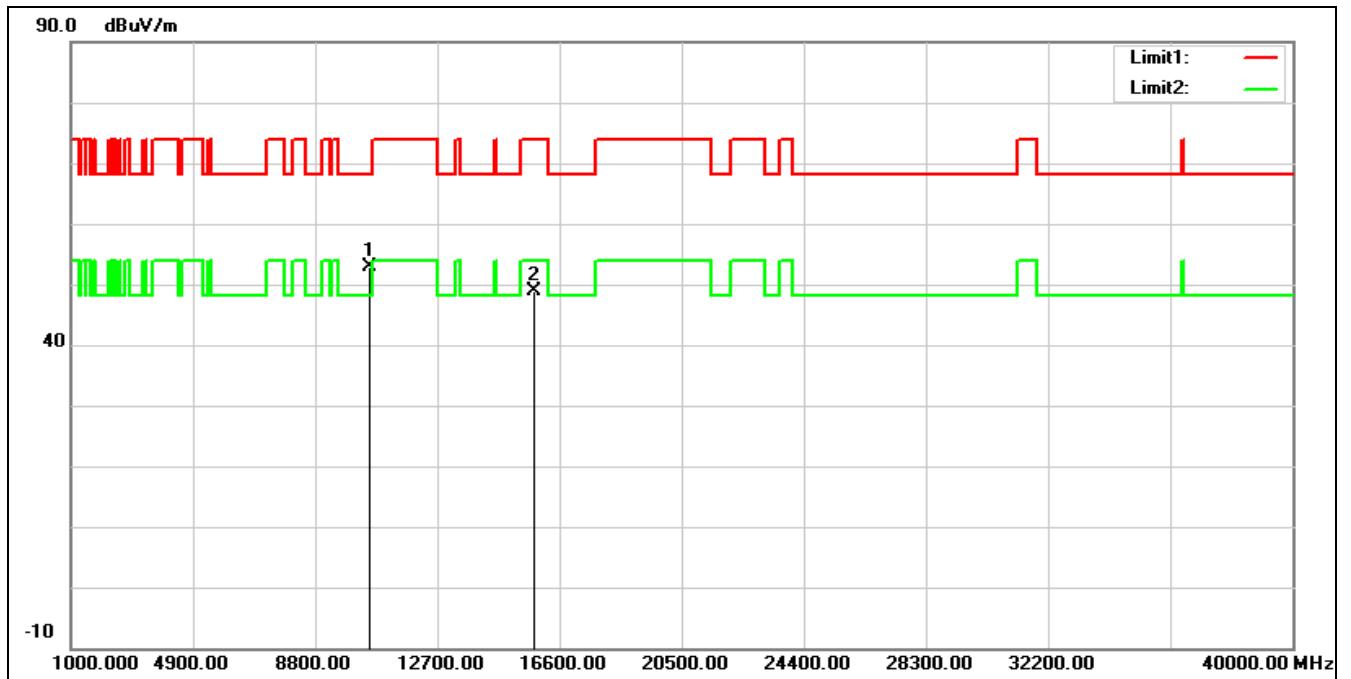


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	39.17	13.61	52.78	68.20	-15.42	peak
2	15780.000	32.27	16.52	48.79	74.00	-25.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

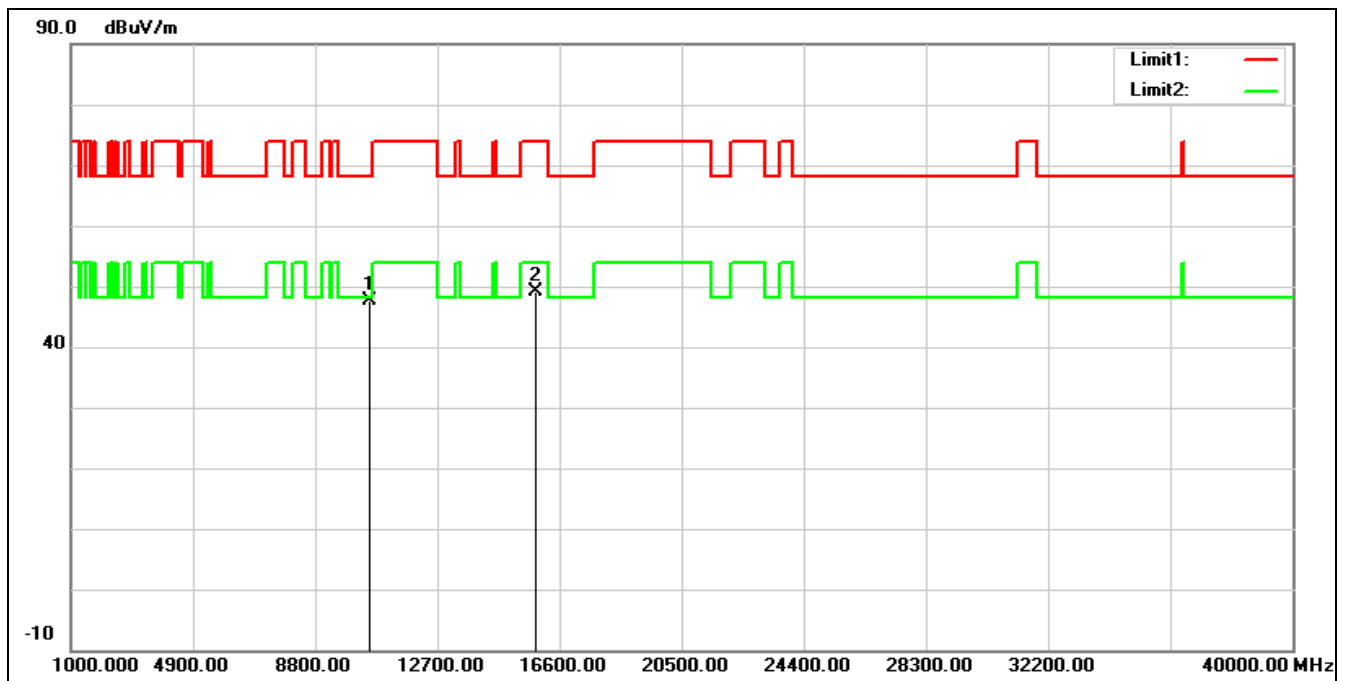


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	33.93	13.63	47.56	68.20	-20.64	peak
2	15840.000	32.73	16.40	49.13	74.00	-24.87	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5280 MHz
Remark:

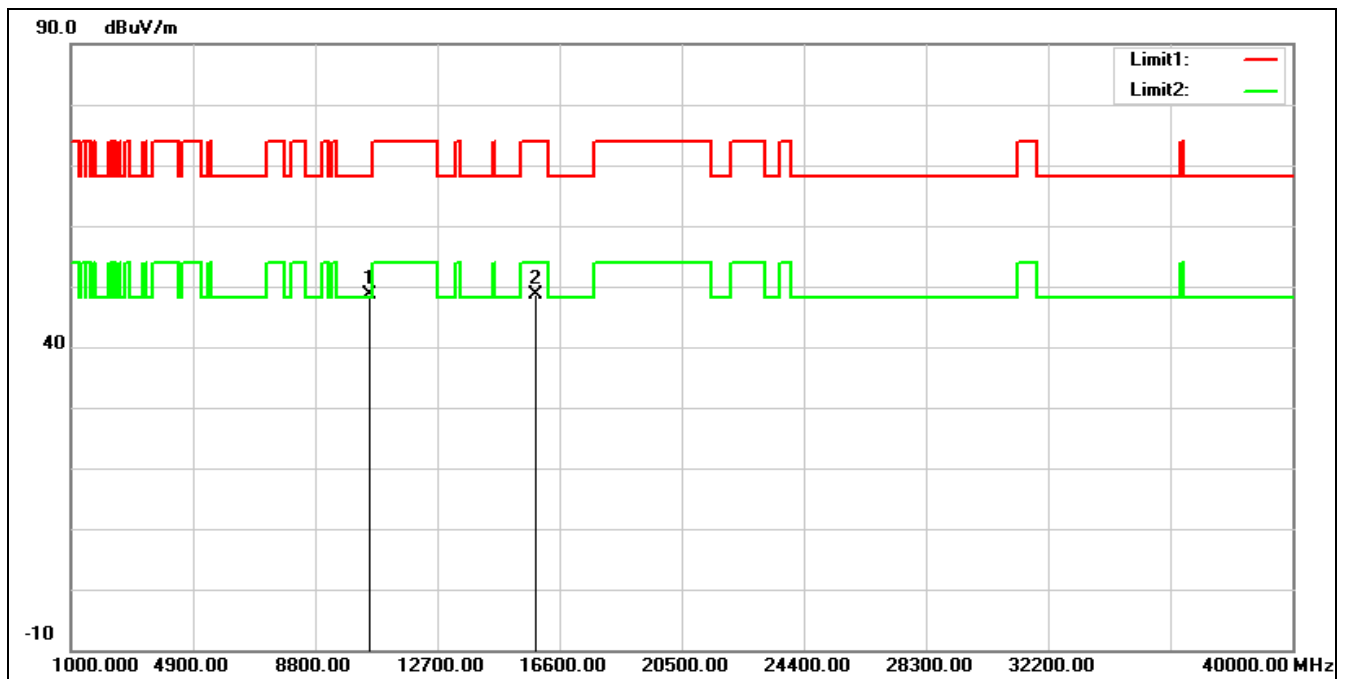


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.98	13.63	48.61	68.20	-19.59	peak
2	15840.000	32.20	16.40	48.60	74.00	-25.40	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5320 MHz
Remark:

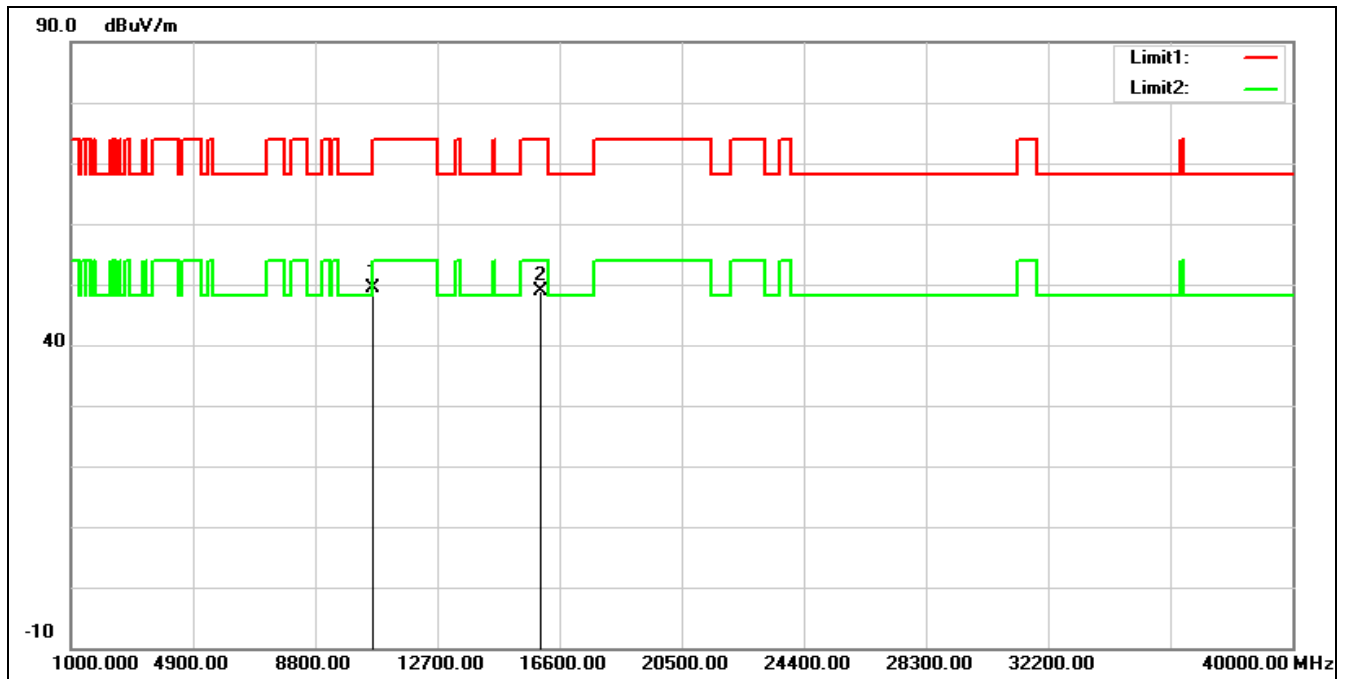


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10640.000	35.80	13.70	49.50	74.00	-24.50	peak
2	15960.000	32.89	16.06	48.95	74.00	-25.05	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5320 MHz
Remark:

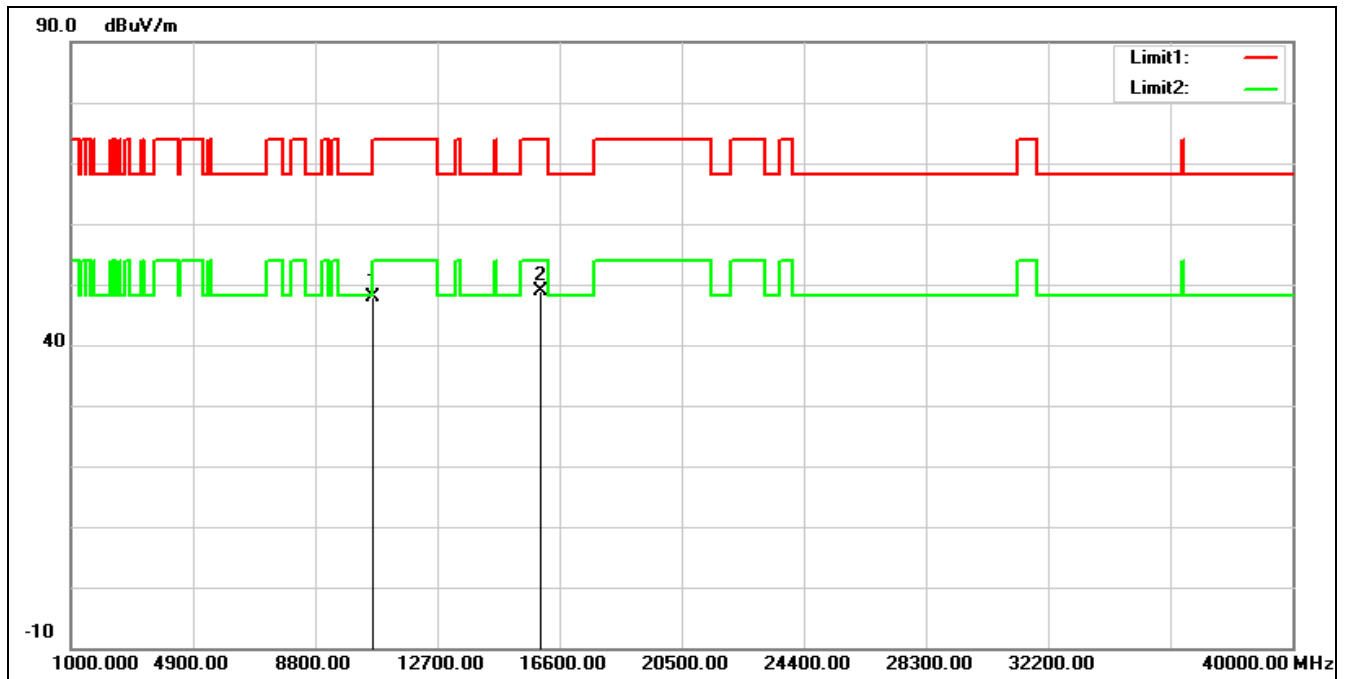


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.12	13.70	47.82	74.00	-26.18	peak
2*	15960.000	32.87	16.06	48.93	74.00	-25.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

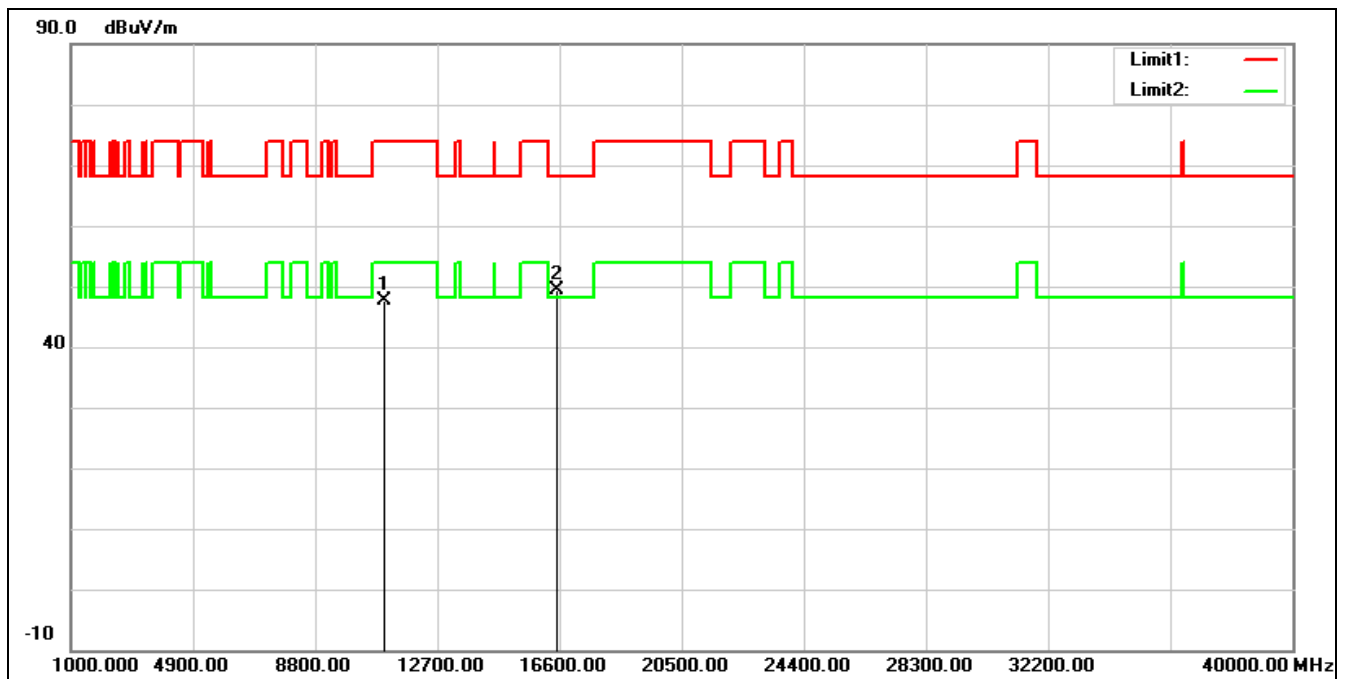


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.45	14.30	47.75	74.00	-26.25	peak
2*	16500.000	32.72	16.69	49.41	68.20	-18.79	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5500 MHz
Remark:

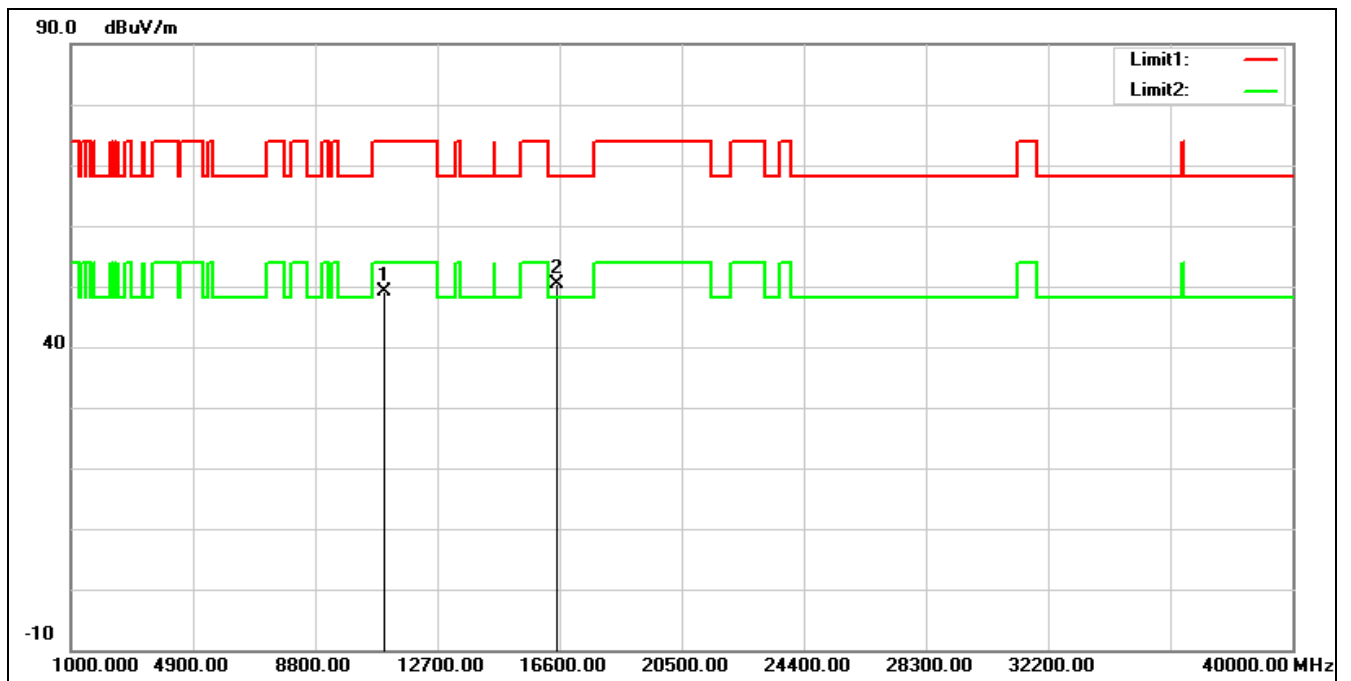

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.85	14.30	49.15	74.00	-24.85	peak
2*	16500.000	33.73	16.69	50.42	68.20	-17.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5560 MHz		
Remark:			

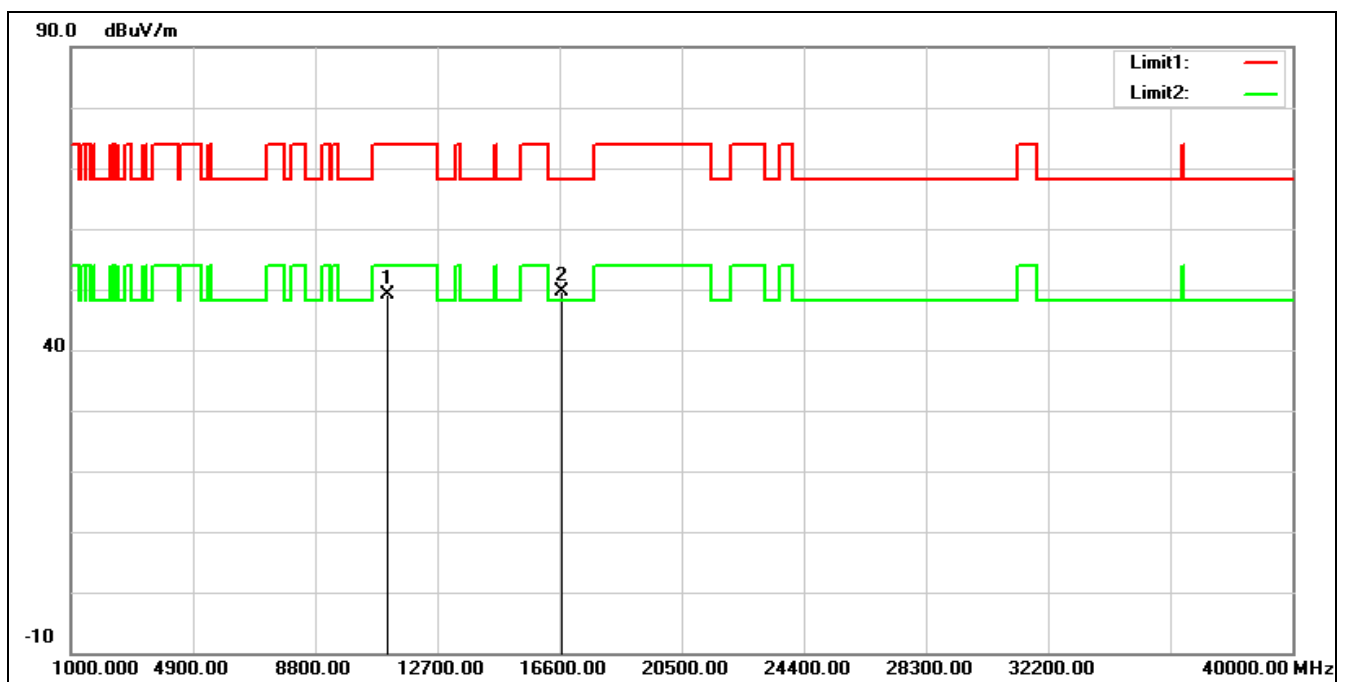


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.52	14.52	49.04	74.00	-24.96	peak
2*	16680.000	31.78	17.91	49.69	68.20	-18.51	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5560 MHz

Remark:

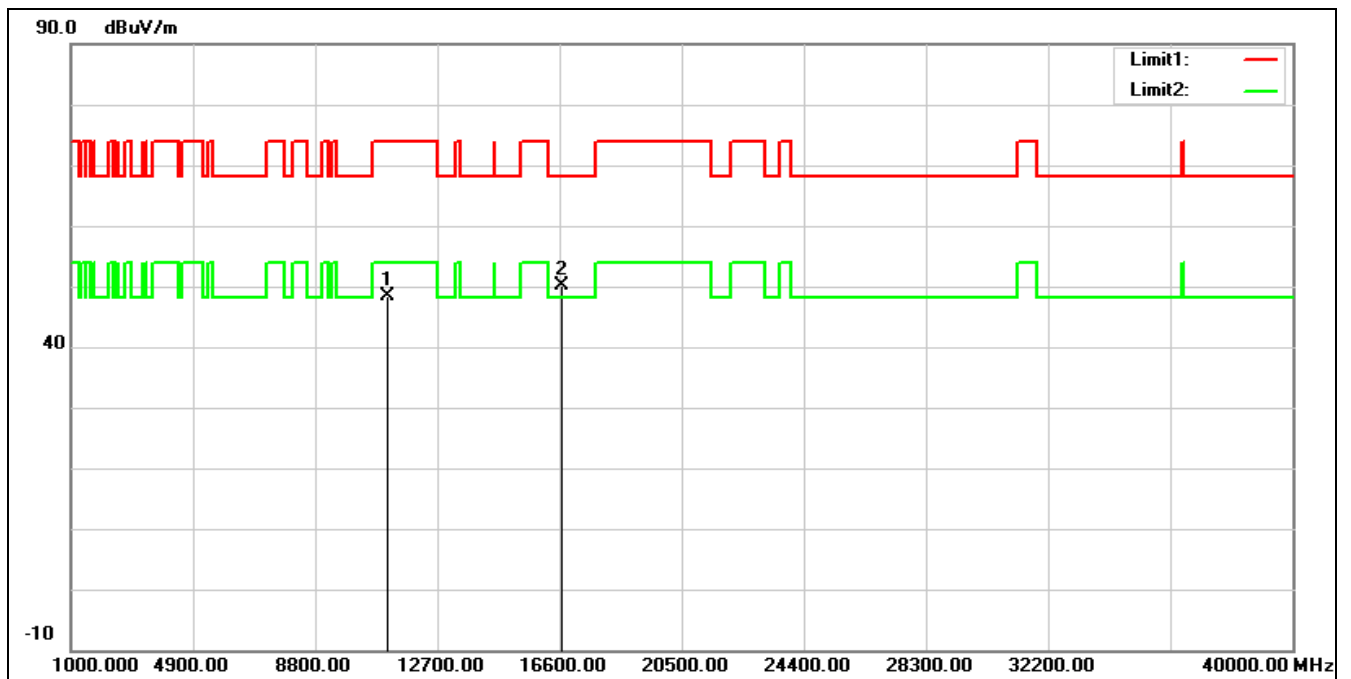


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.80	14.52	48.32	74.00	-25.68	peak
2*	16680.000	32.28	17.91	50.19	68.20	-18.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

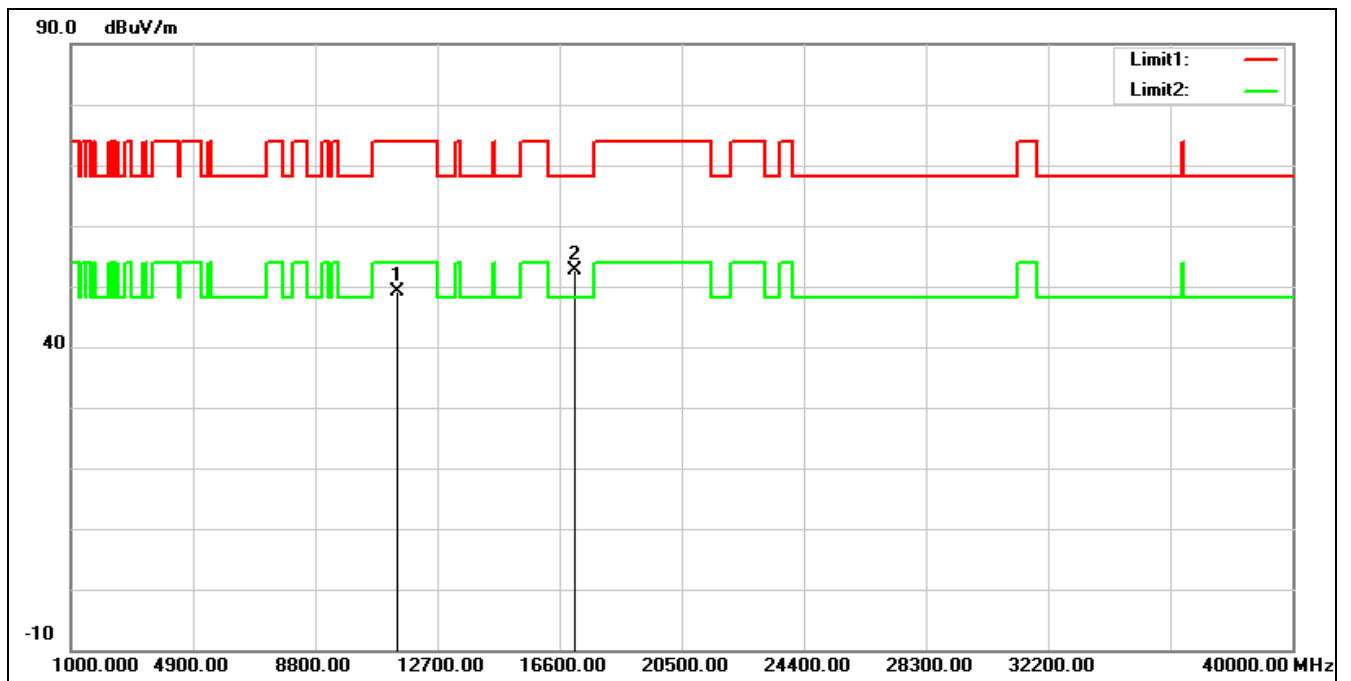


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.47	14.66	49.13	74.00	-24.87	peak
2*	17100.000	32.10	20.57	52.67	68.20	-15.53	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5700 MHz
Remark:

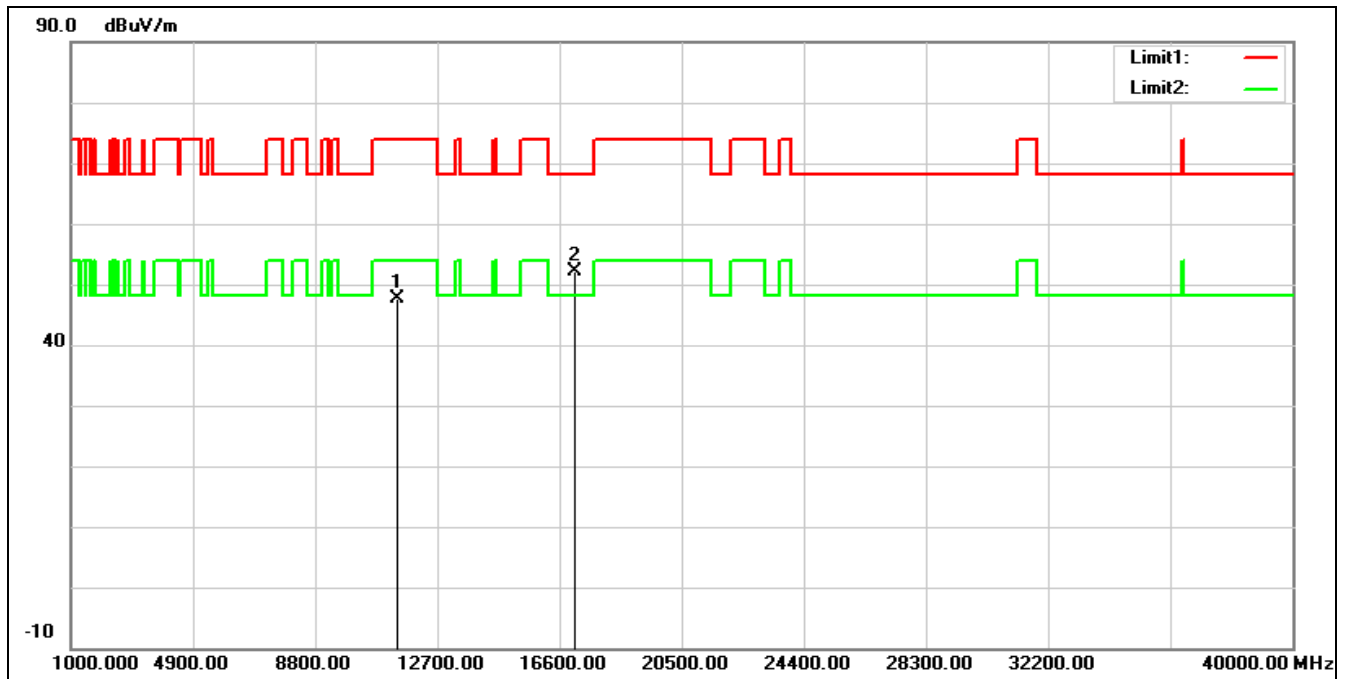

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.03	14.66	47.69	74.00	-26.31	peak
2*	17100.000	31.65	20.57	52.22	68.20	-15.98	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5720 MHz
Remark:

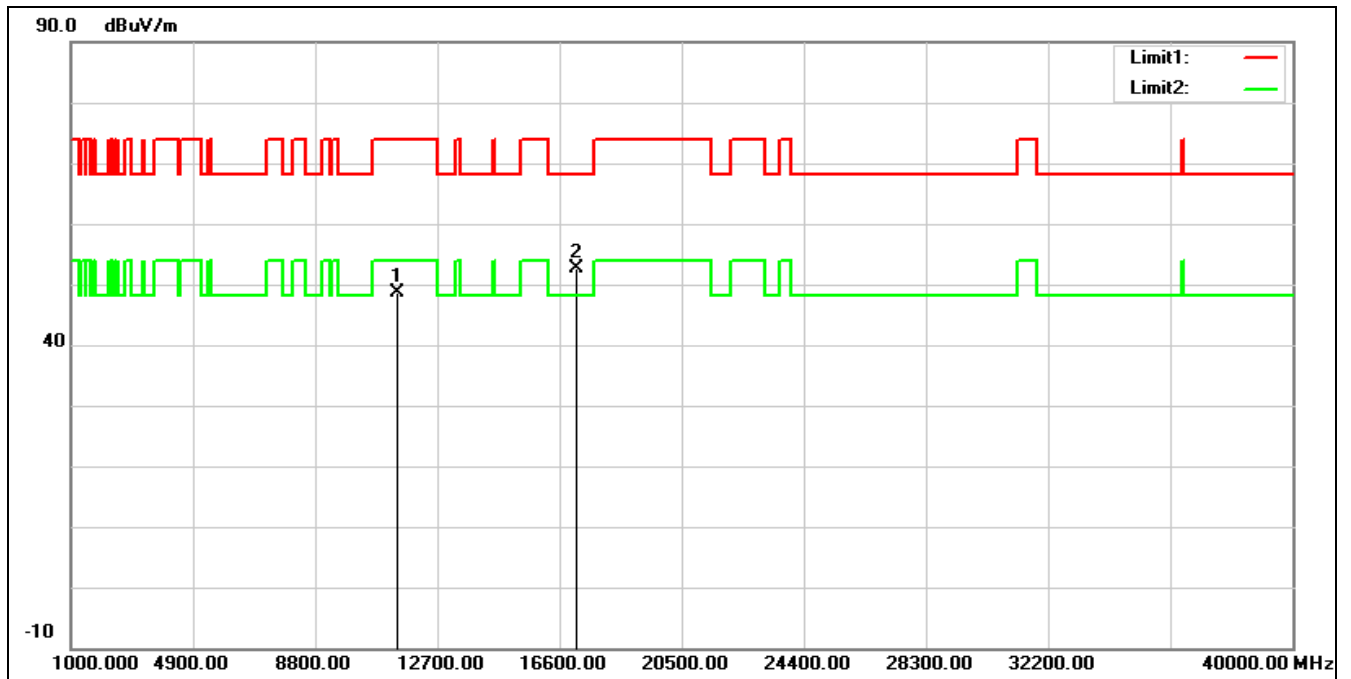


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	33.86	14.84	48.70	74.00	-25.30	peak
2*	17160.000	31.75	20.96	52.71	68.20	-15.49	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5720 MHz

Remark:

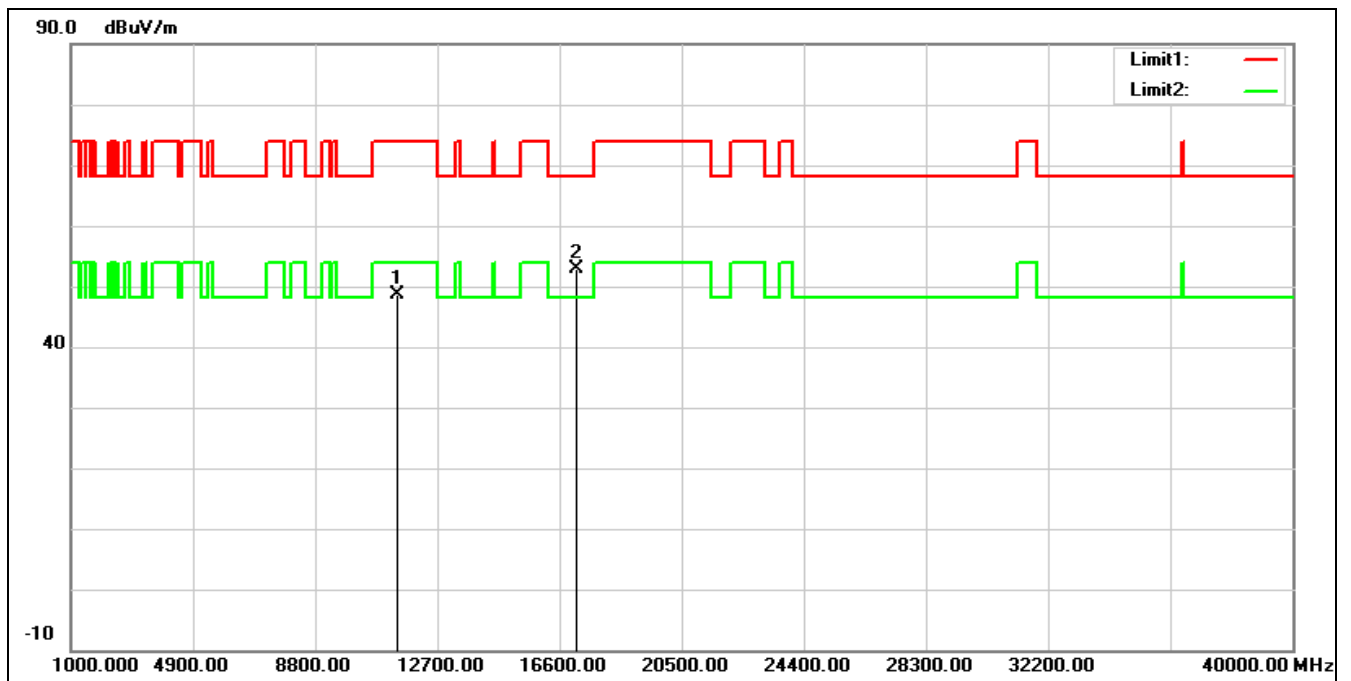


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	33.73	14.84	48.57	74.00	-25.43	peak
2*	17160.000	31.84	20.96	52.80	68.20	-15.40	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

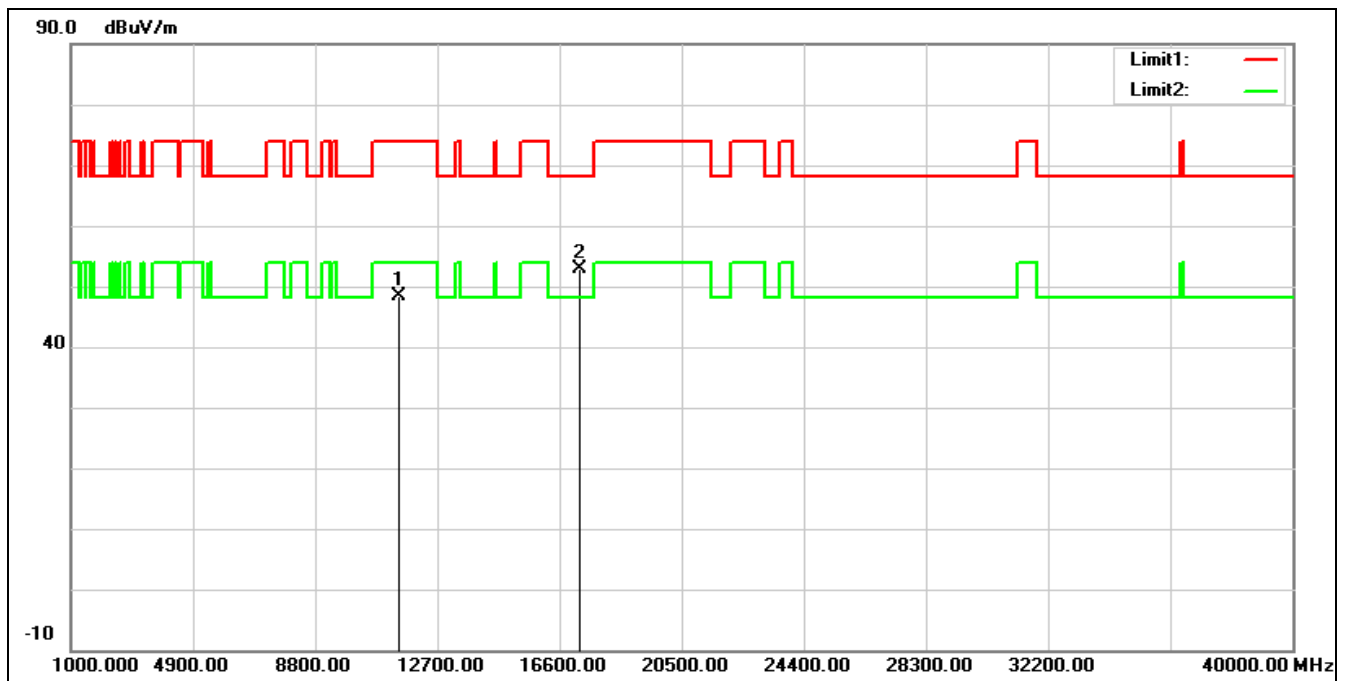


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.23	15.07	48.30	74.00	-25.70	peak
2*	17235.000	31.34	21.53	52.87	68.20	-15.33	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5745 MHz
Remark:

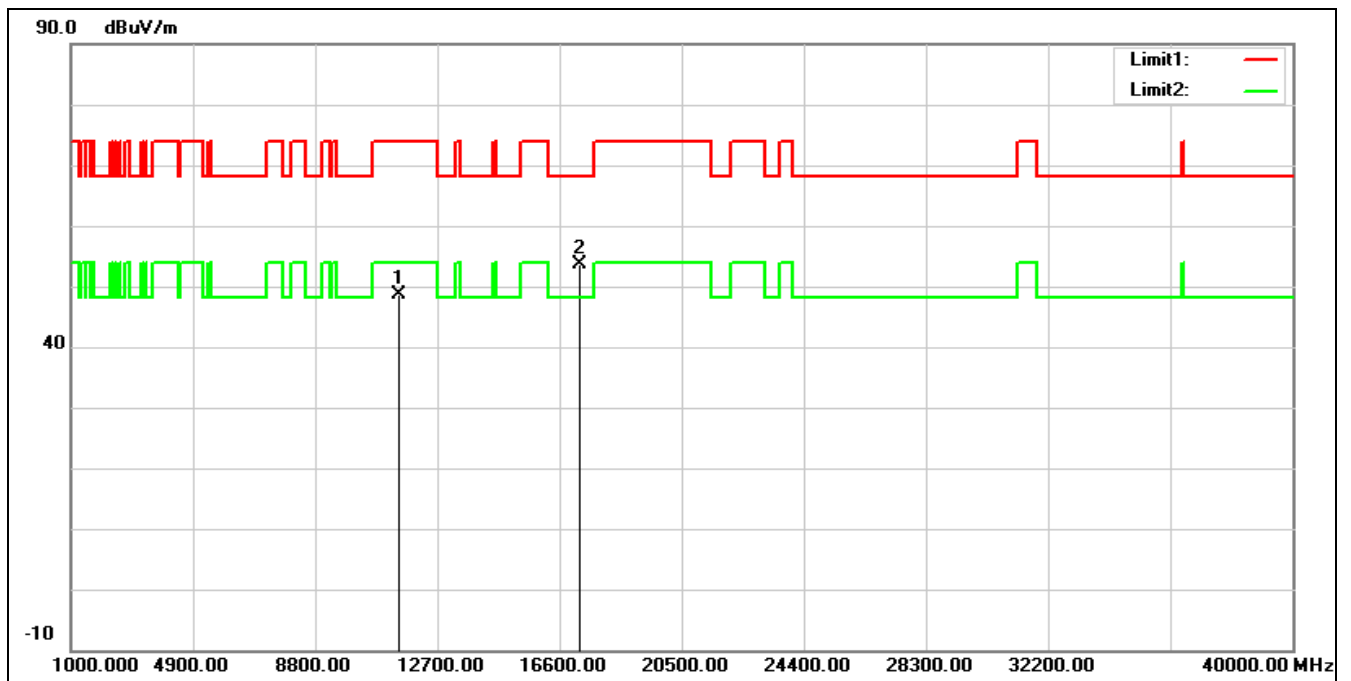


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.63	15.07	48.70	74.00	-25.30	peak
2*	17235.000	32.02	21.53	53.55	68.20	-14.65	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5785 MHz
Remark:

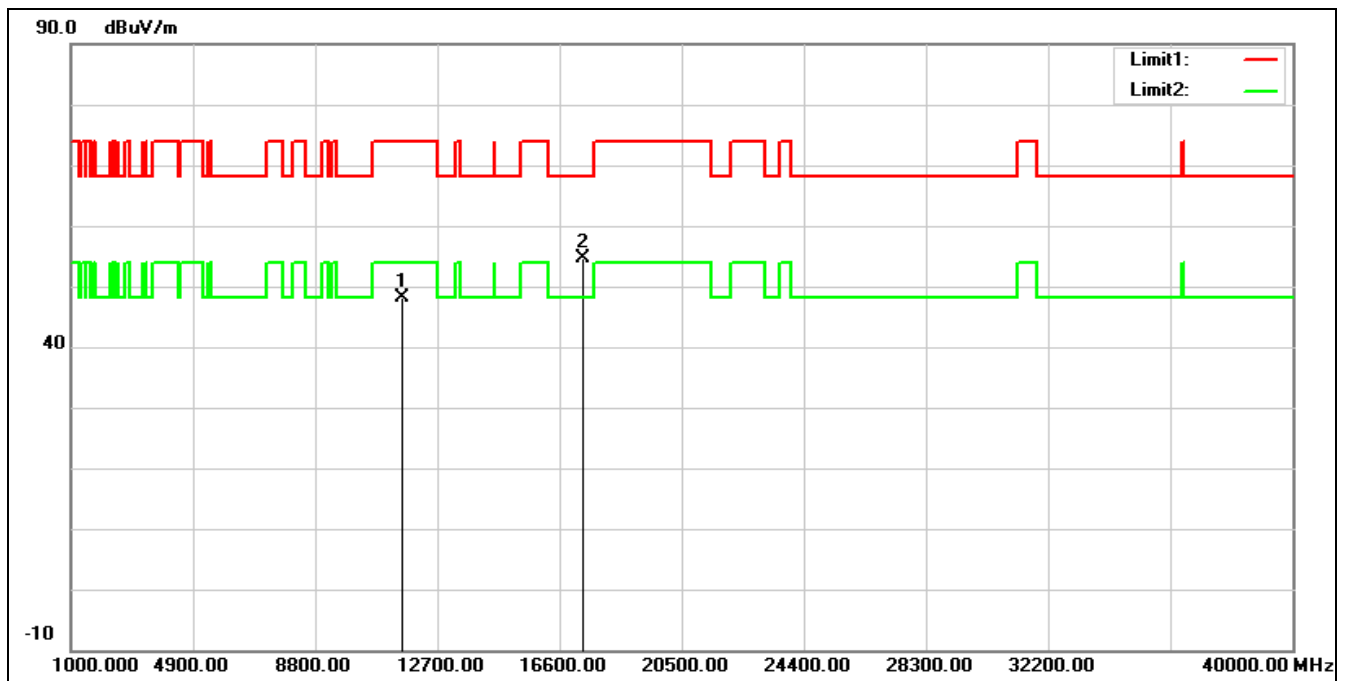

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.18	14.84	48.02	74.00	-25.98	peak
2*	17355.000	32.31	22.35	54.66	68.20	-13.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			

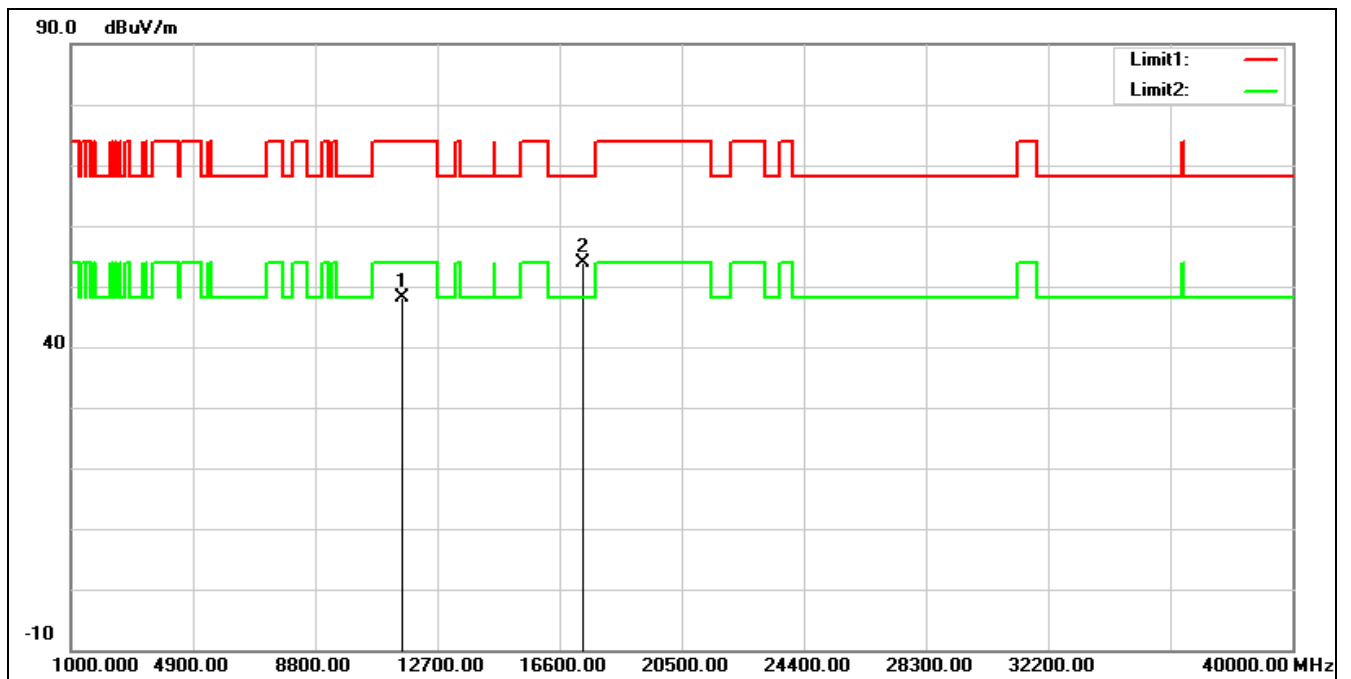


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.41	14.84	48.25	74.00	-25.75	peak
2*	17355.000	31.58	22.35	53.93	68.20	-14.27	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11a 5825 MHz

Remark:

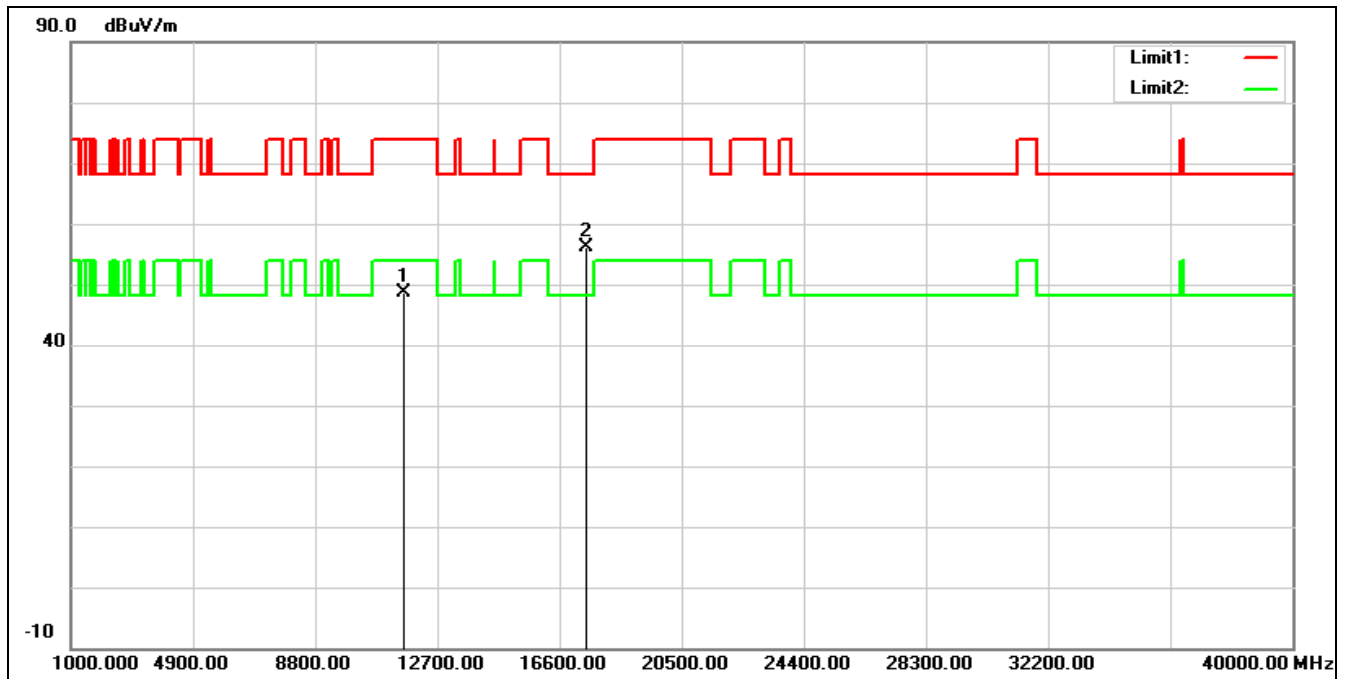


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.96	14.56	48.52	74.00	-25.48	peak
2*	17475.000	32.86	23.20	56.06	68.20	-12.14	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11a 5825 MHz

Remark:

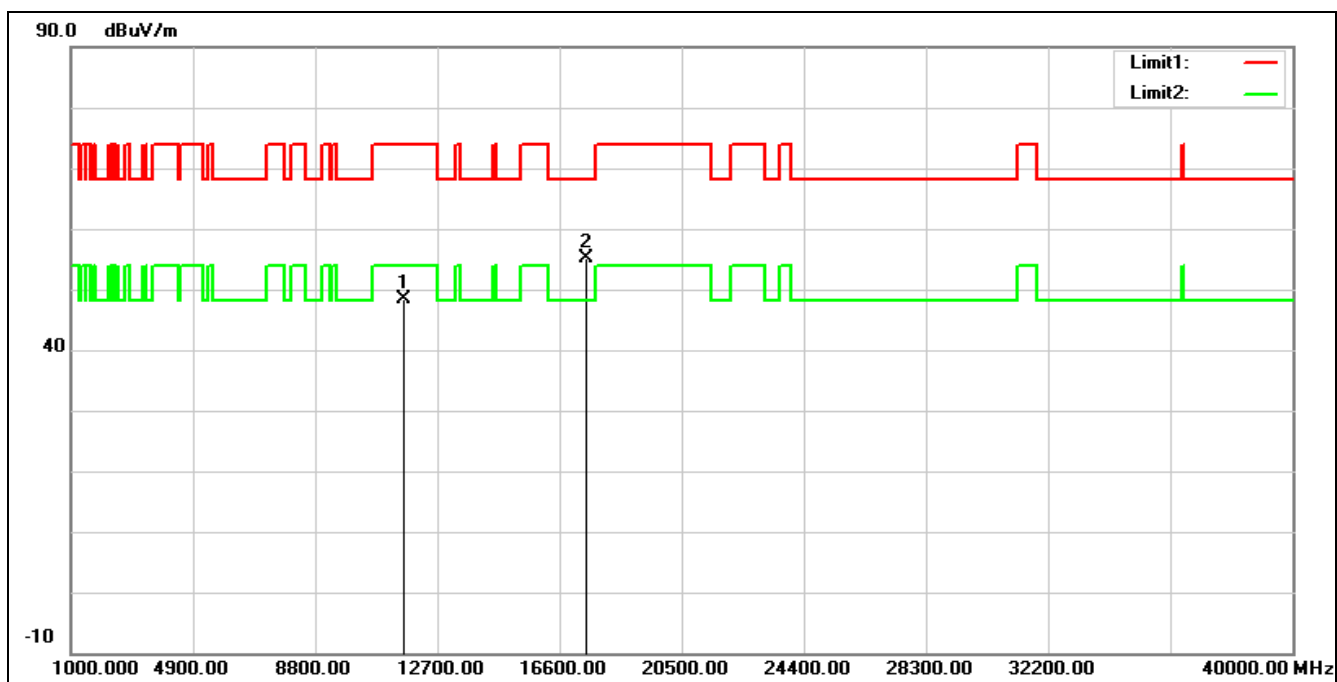


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.93	14.56	48.49	74.00	-25.51	peak
2*	17475.000	32.05	23.20	55.25	68.20	-12.95	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5180 MHz

Remark:

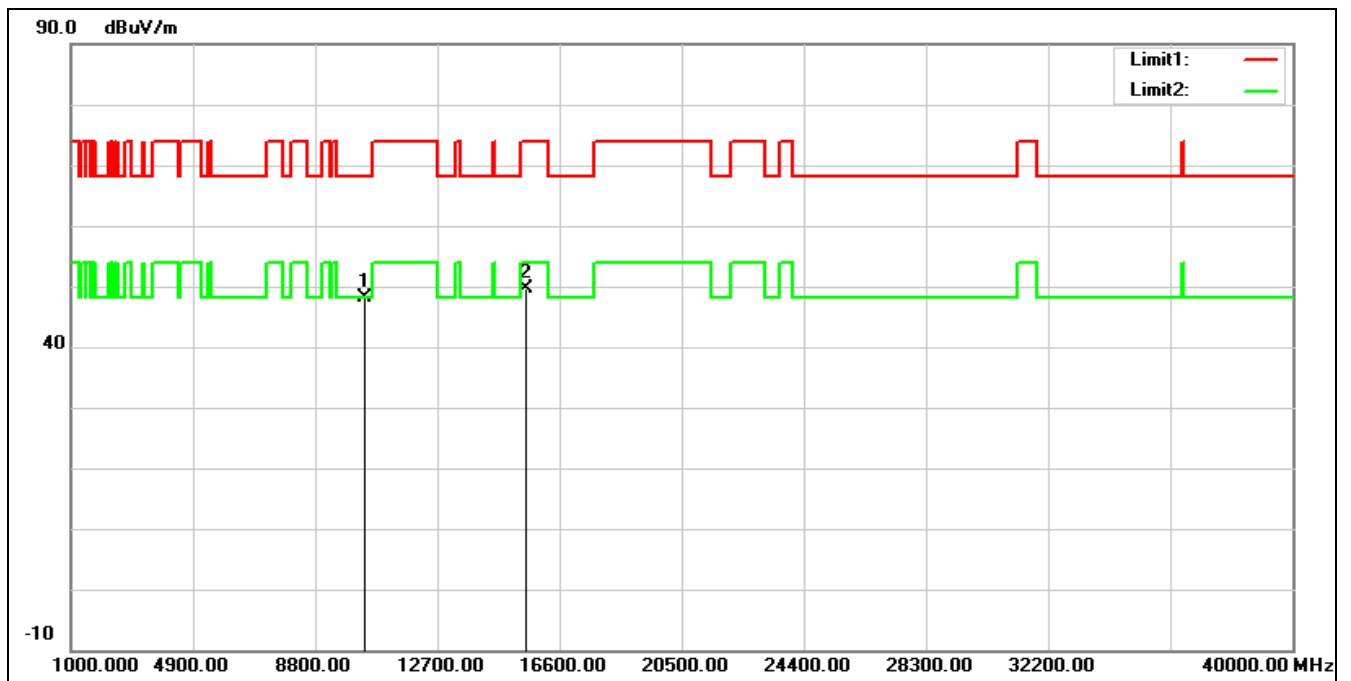


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.89	13.36	48.25	68.20	-19.95	peak
2	15540.000	32.76	16.77	49.53	74.00	-24.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5180 MHz		
Remark:			

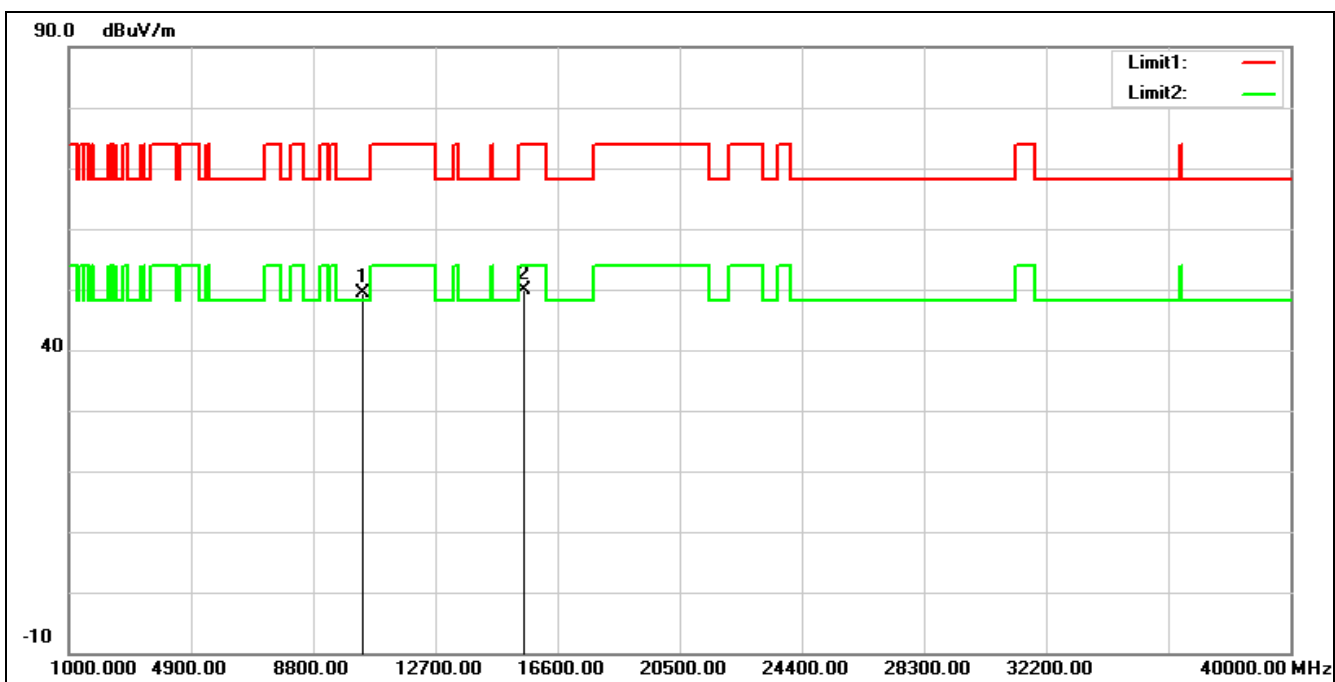

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	36.14	13.36	49.50	68.20	-18.70	peak
2	15540.000	33.21	16.77	49.98	74.00	-24.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5200 MHz		
Remark:			

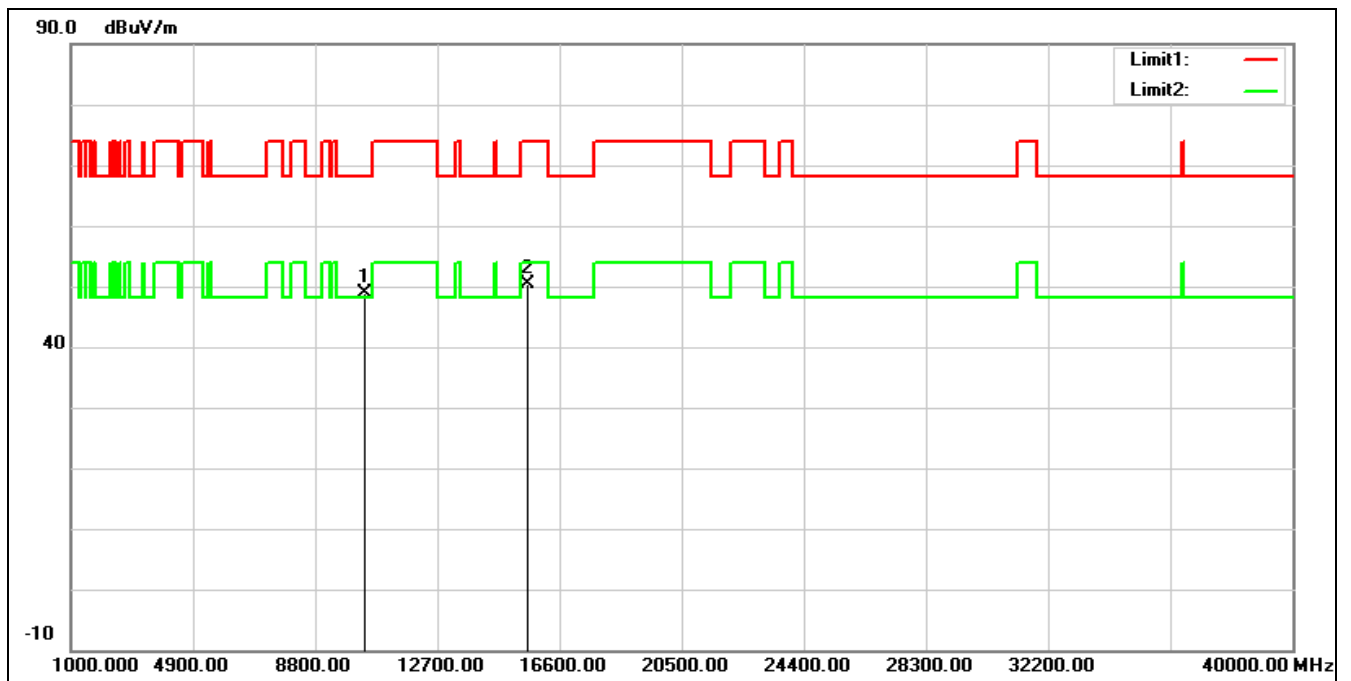


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.46	13.51	48.97	68.20	-19.23	peak
2	15600.000	33.83	16.66	50.49	74.00	-23.51	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5200 MHz

Remark:

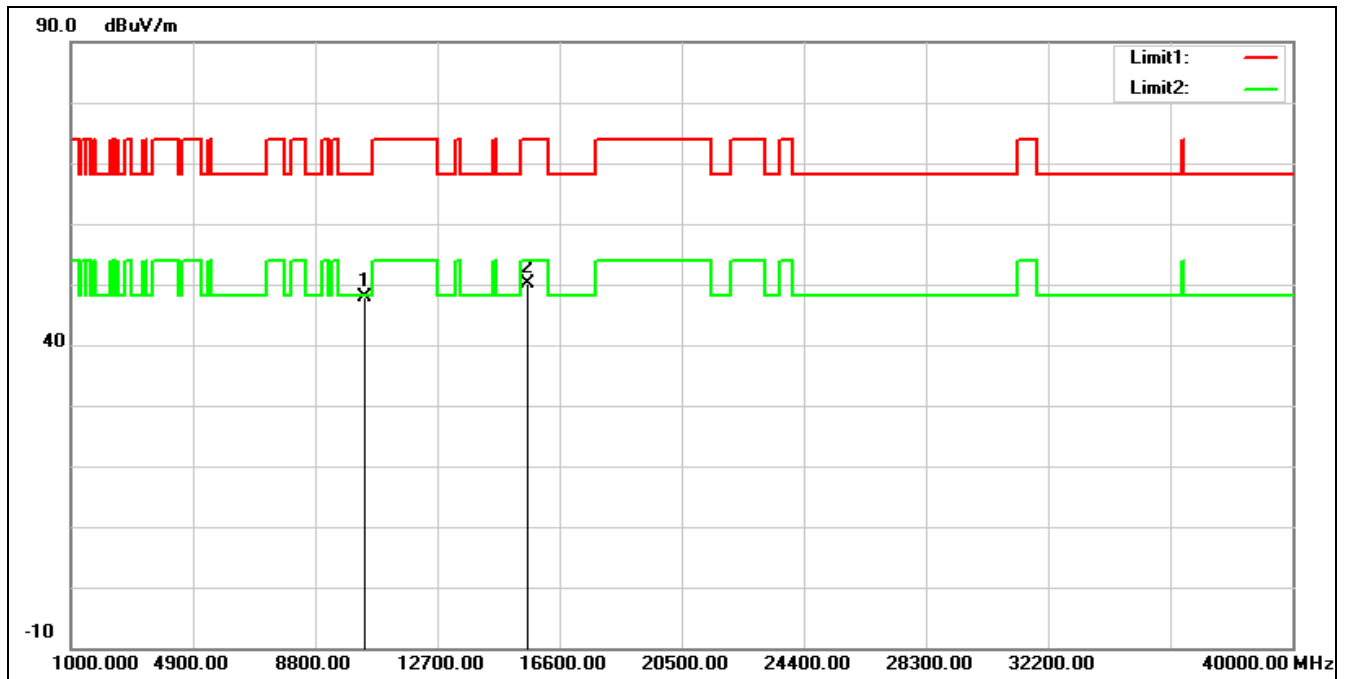


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.37	13.51	47.88	68.20	-20.32	peak
2	15600.000	33.39	16.66	50.05	74.00	-23.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5240 MHz		
Remark:			

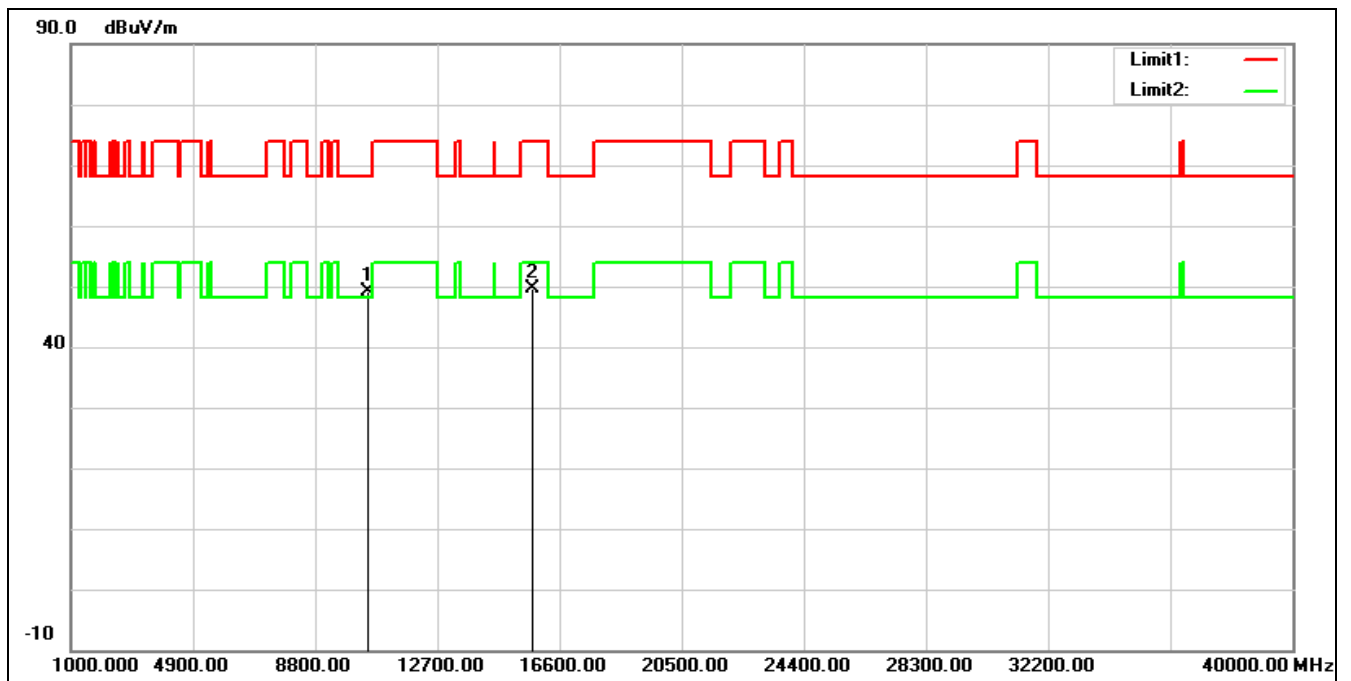


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.45	13.58	49.03	68.20	-19.17	peak
2	15720.000	33.17	16.57	49.74	74.00	-24.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5240 MHz		
Remark:			

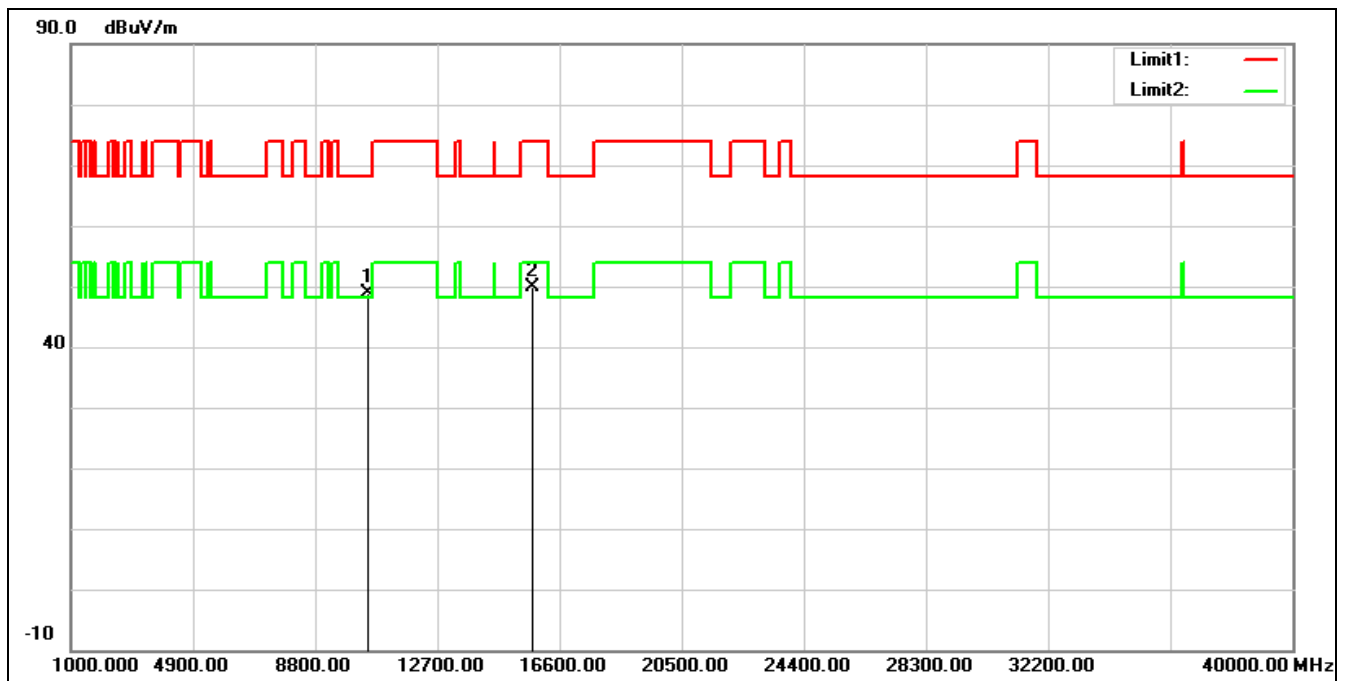

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.34	13.58	48.92	68.20	-19.28	peak
2	15720.000	33.31	16.57	49.88	74.00	-24.12	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5260 MHz
Remark:

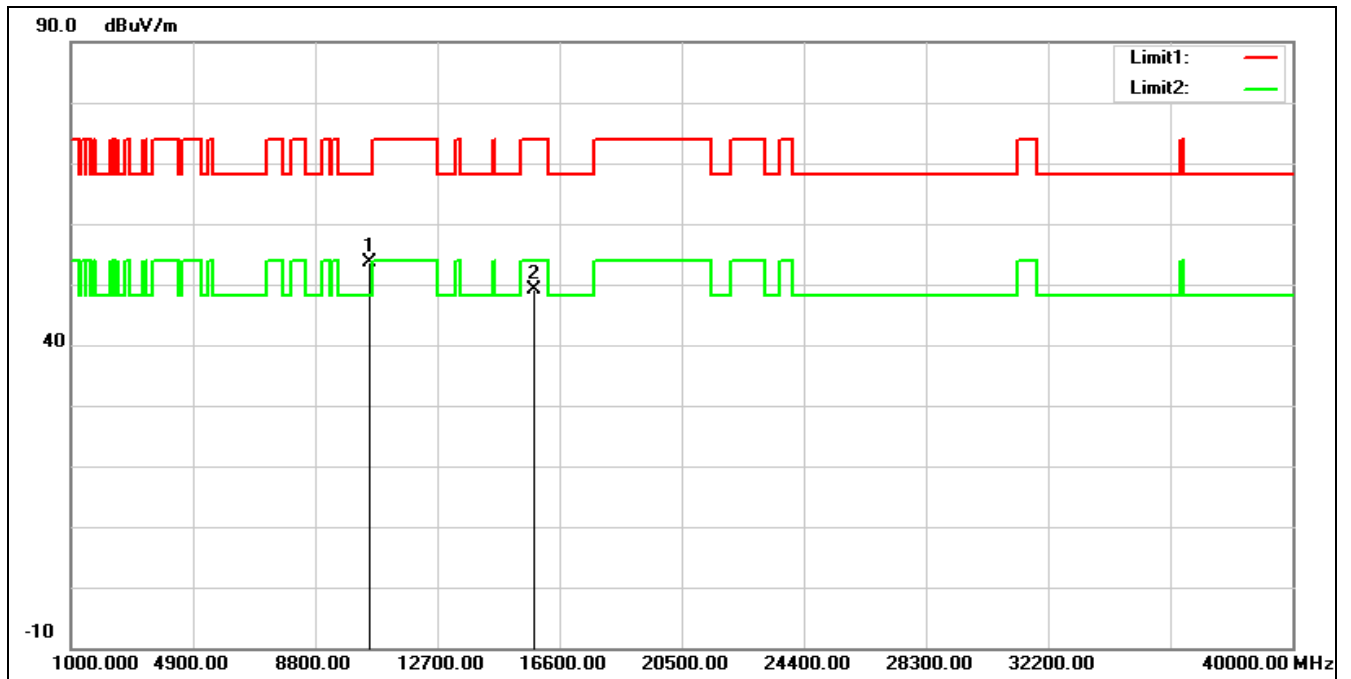


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	39.90	13.61	53.51	68.20	-14.69	peak
2	15780.000	32.60	16.52	49.12	74.00	-24.88	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5260 MHz

Remark:

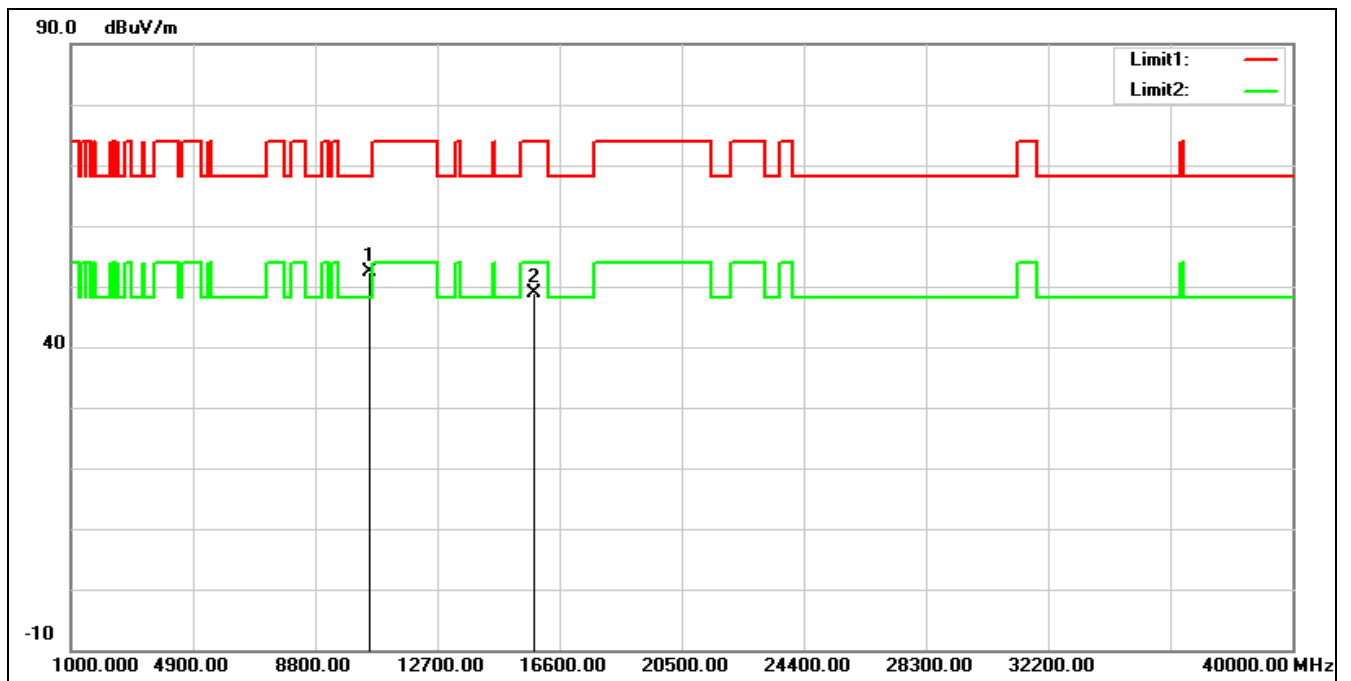

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	38.85	13.61	52.46	68.20	-15.74	peak
2	15780.000	32.42	16.52	48.94	74.00	-25.06	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5280 MHz
Remark:

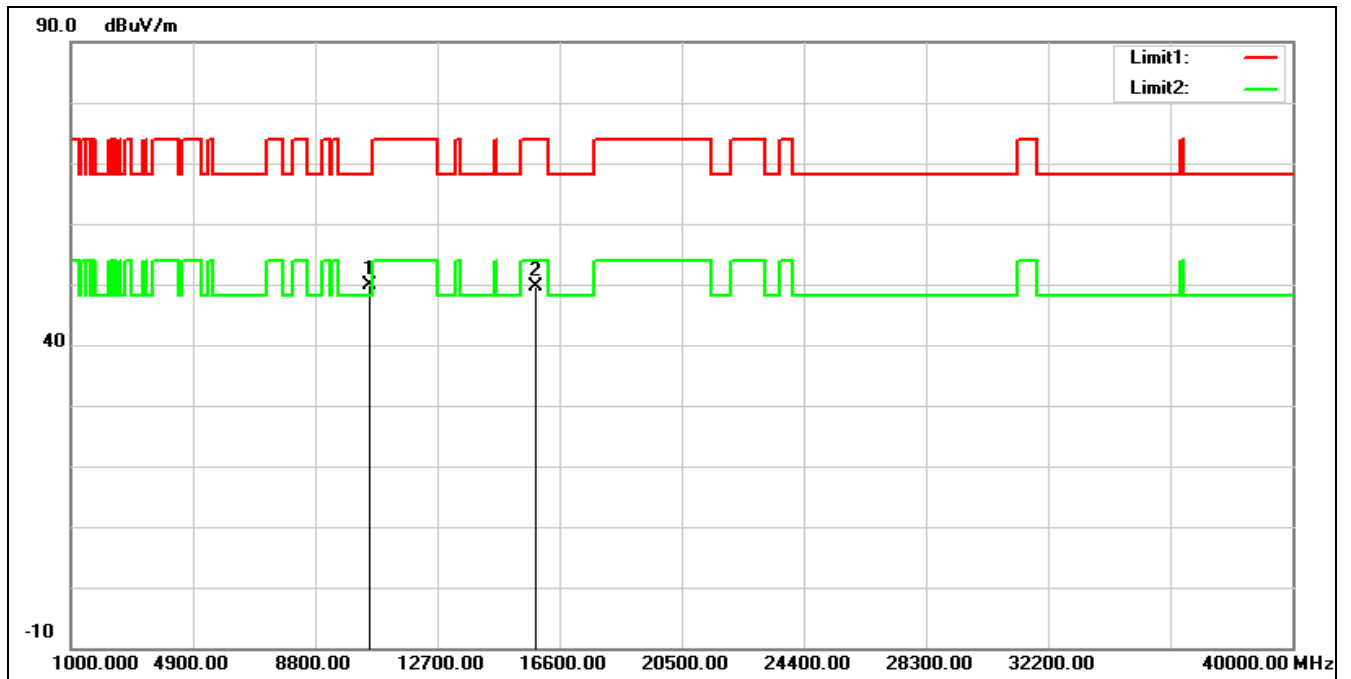


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	36.16	13.63	49.79	68.20	-18.41	peak
2	15840.000	33.11	16.40	49.51	74.00	-24.49	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5280 MHz

Remark:

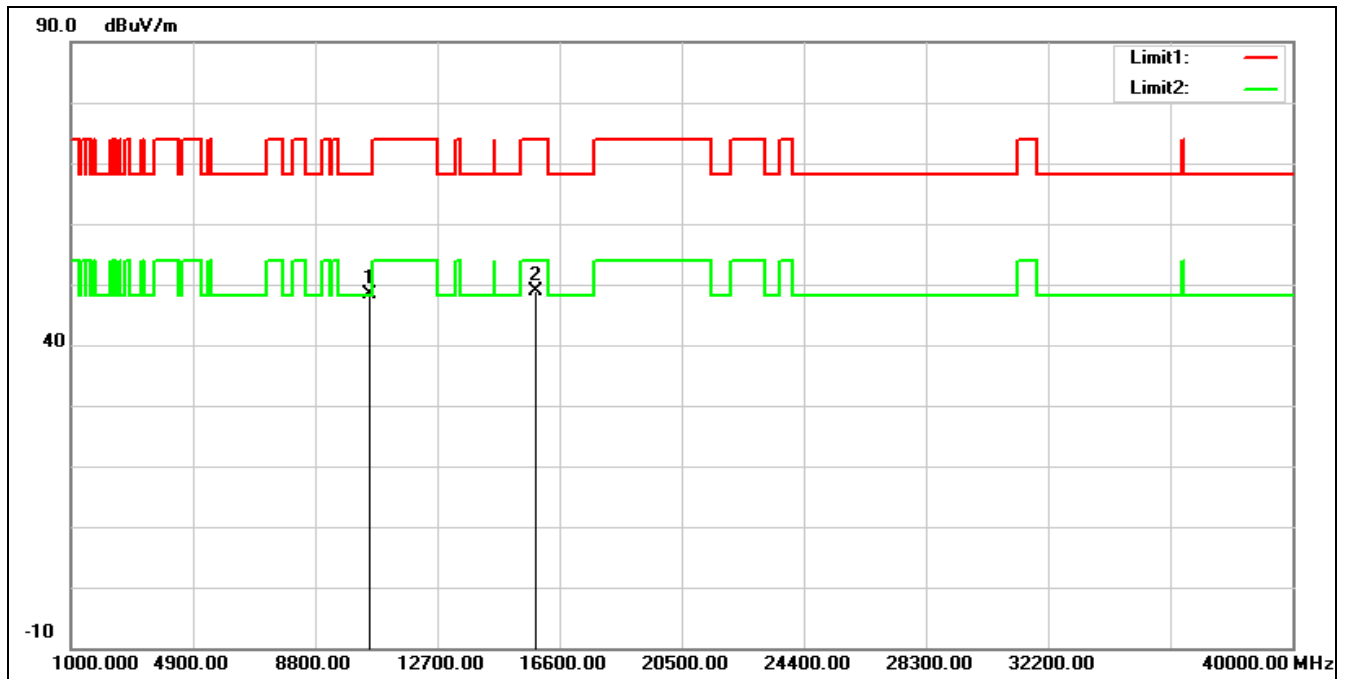

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.74	13.63	48.37	68.20	-19.83	peak
2	15840.000	32.55	16.40	48.95	74.00	-25.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5320 MHz		
Remark:			

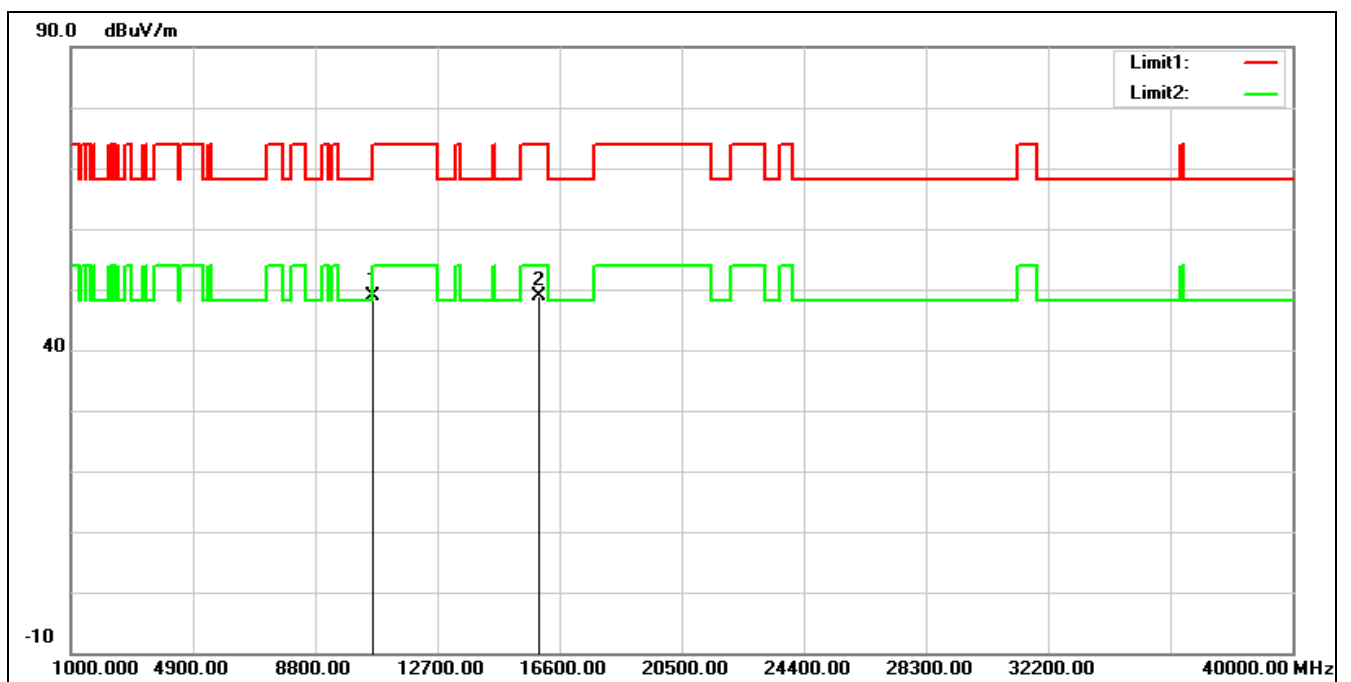


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.20	13.70	48.90	74.00	-25.10	peak
2*	15960.000	32.89	16.06	48.95	74.00	-25.05	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5320 MHz

Remark:

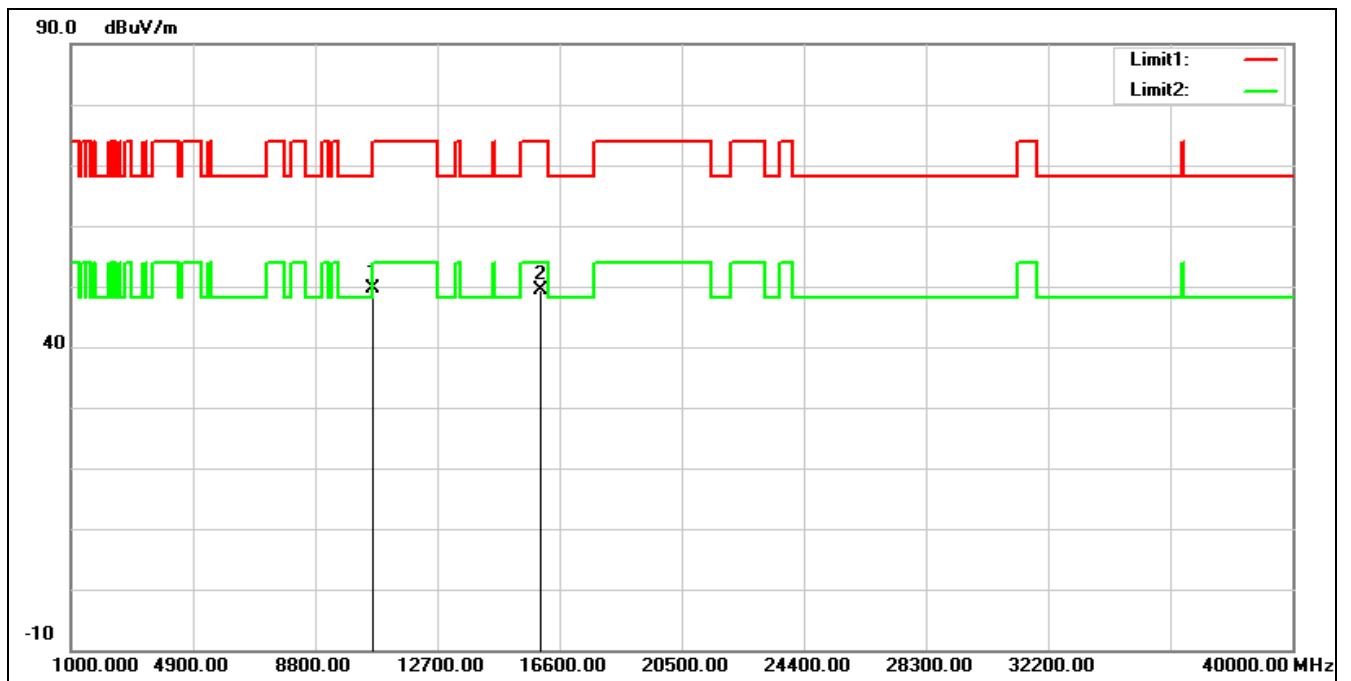

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10640.000	35.81	13.70	49.51	74.00	-24.49	peak
2	15960.000	33.21	16.06	49.27	74.00	-24.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5500 MHz		
Remark:			

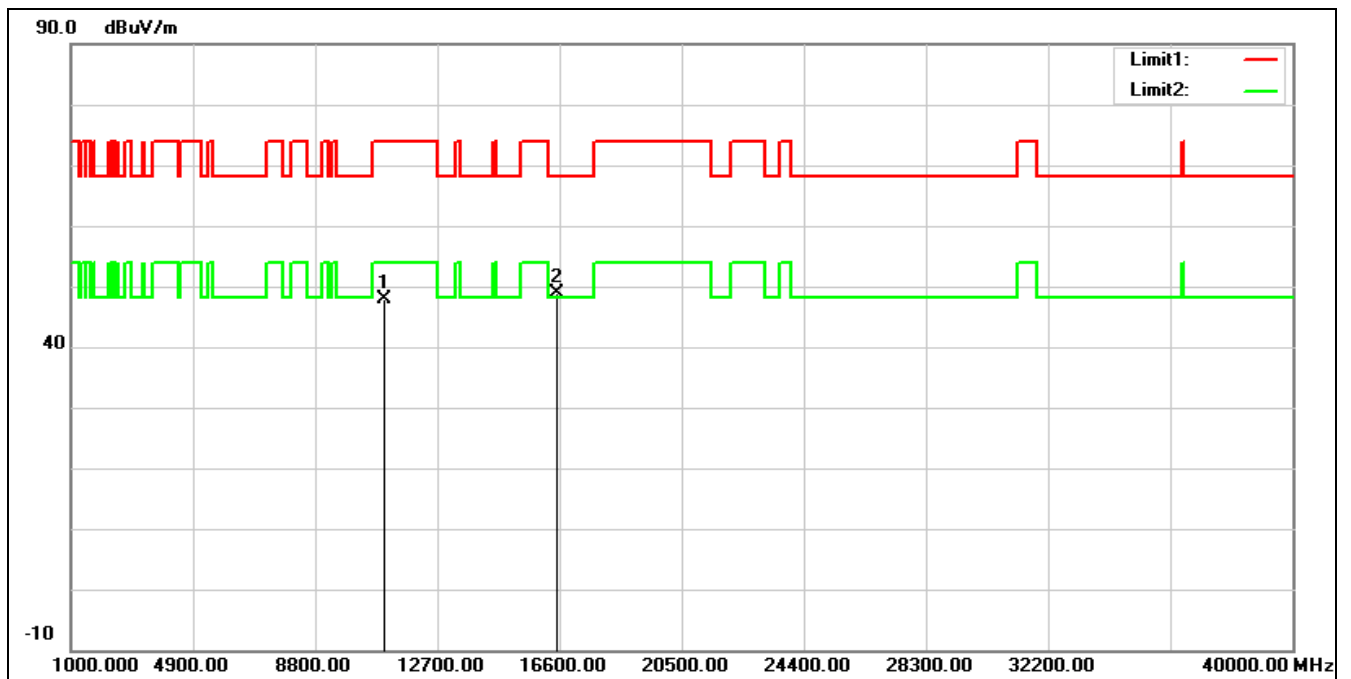


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.65	14.30	47.95	74.00	-26.05	peak
2*	16500.000	32.13	16.69	48.82	68.20	-19.38	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5500 MHz

Remark:

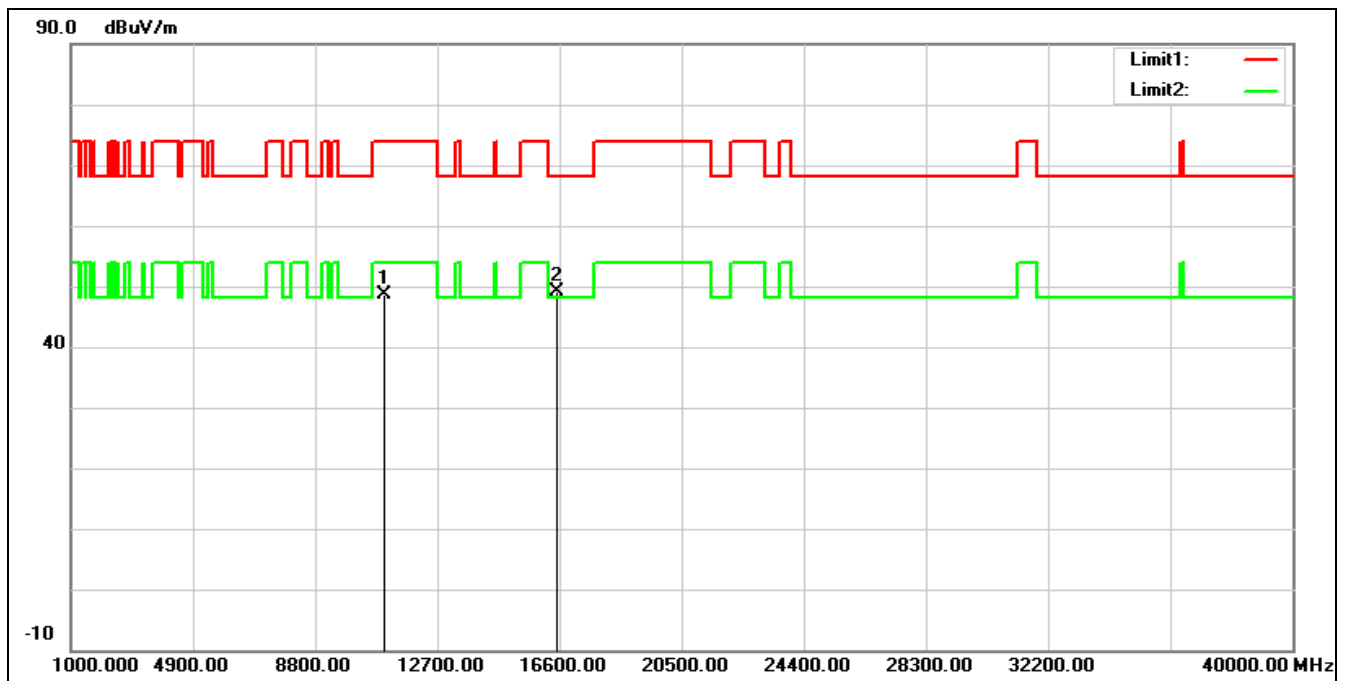


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.40	14.30	48.70	74.00	-25.30	peak
2*	16500.000	32.52	16.69	49.21	68.20	-18.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5560 MHz		
Remark:			

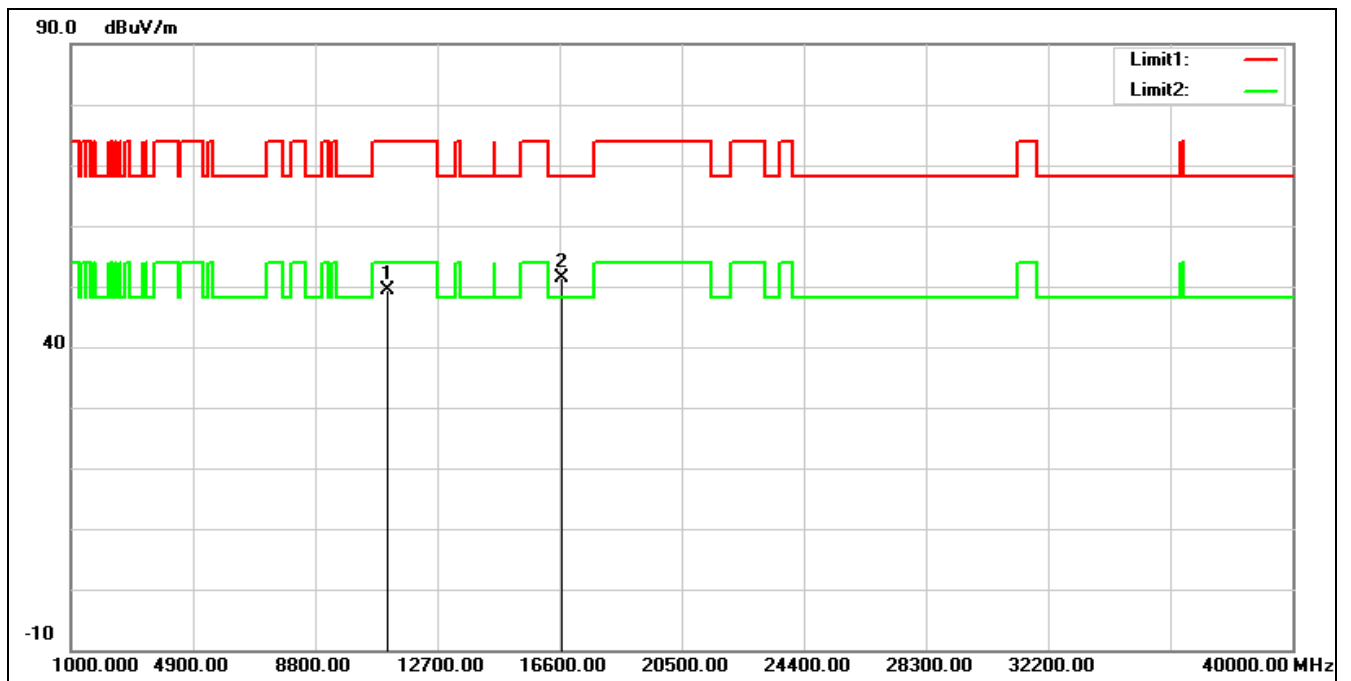

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.85	14.52	49.37	74.00	-24.63	peak
2*	16680.000	33.48	17.91	51.39	68.20	-16.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5560 MHz		
Remark:			

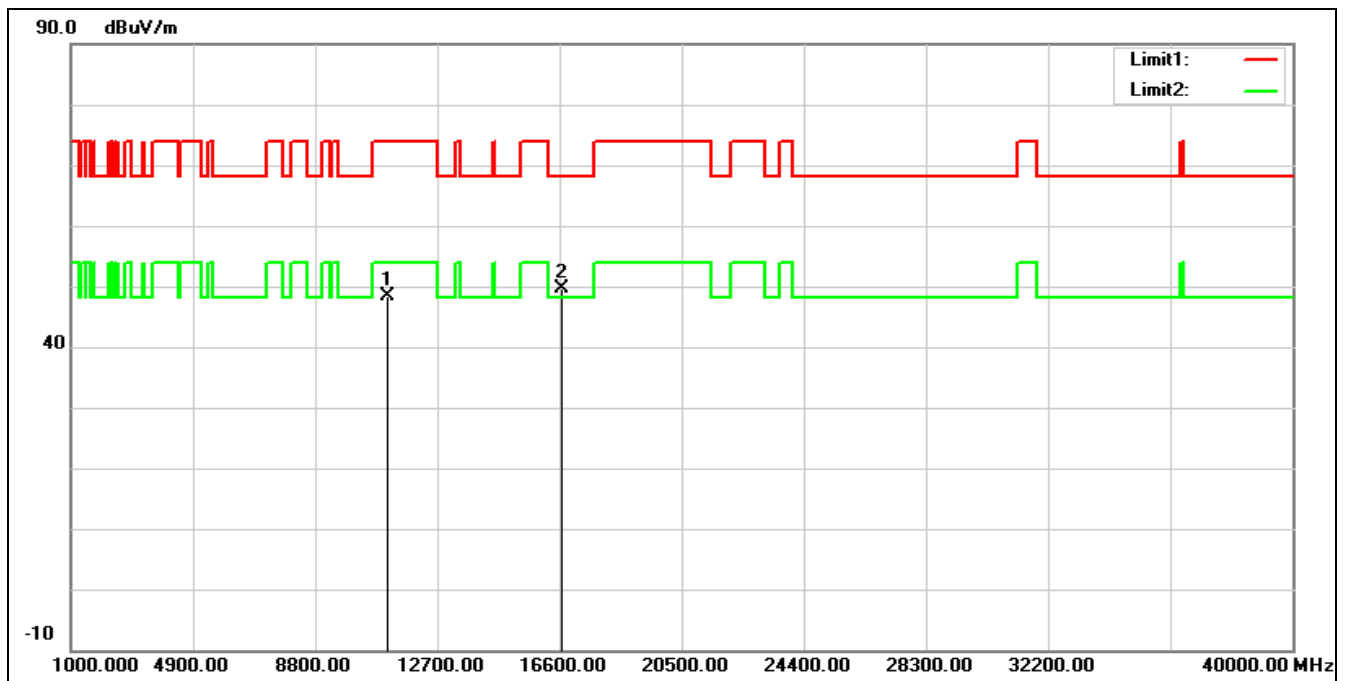


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.82	14.52	48.34	74.00	-25.66	peak
2*	16680.000	31.79	17.91	49.70	68.20	-18.50	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5700 MHz

Remark:

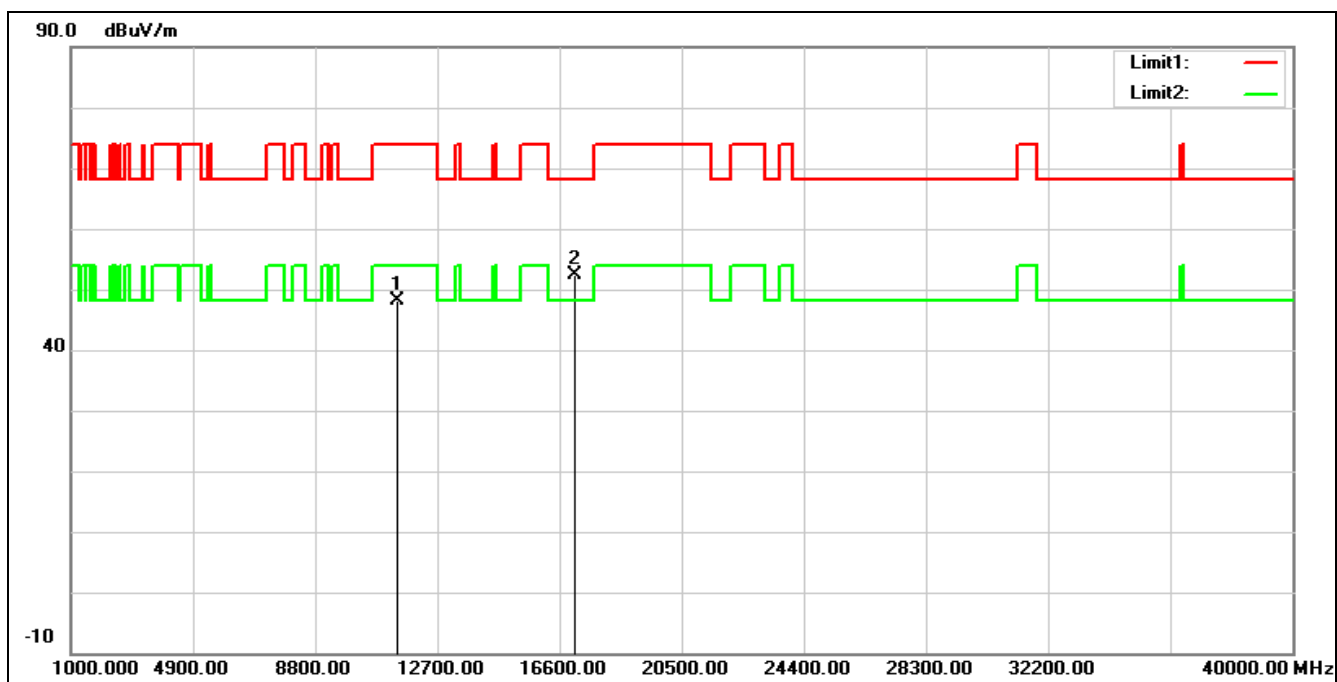

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.45	14.66	48.11	74.00	-25.89	peak
2*	17100.000	31.78	20.57	52.35	68.20	-15.85	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5700 MHz
Remark:

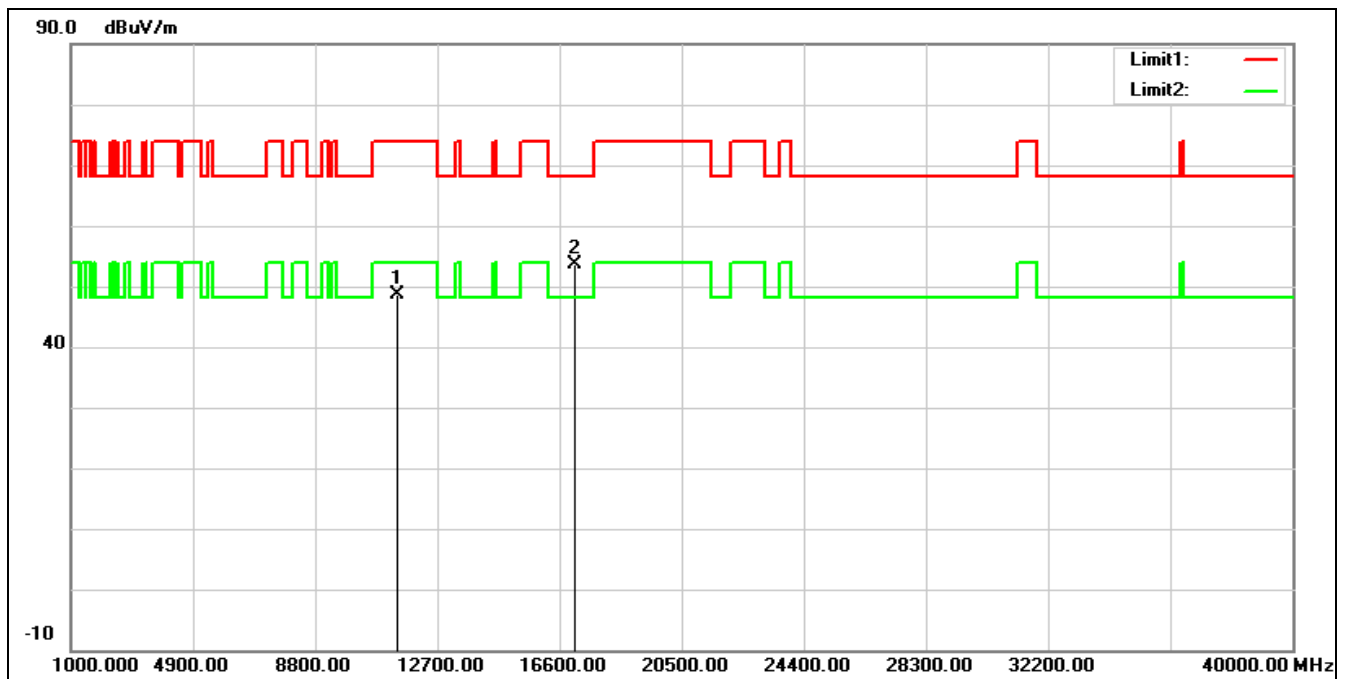


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.87	14.66	48.53	74.00	-25.47	peak
2*	17100.000	33.00	20.57	53.57	68.20	-14.63	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5720 MHz

Remark:

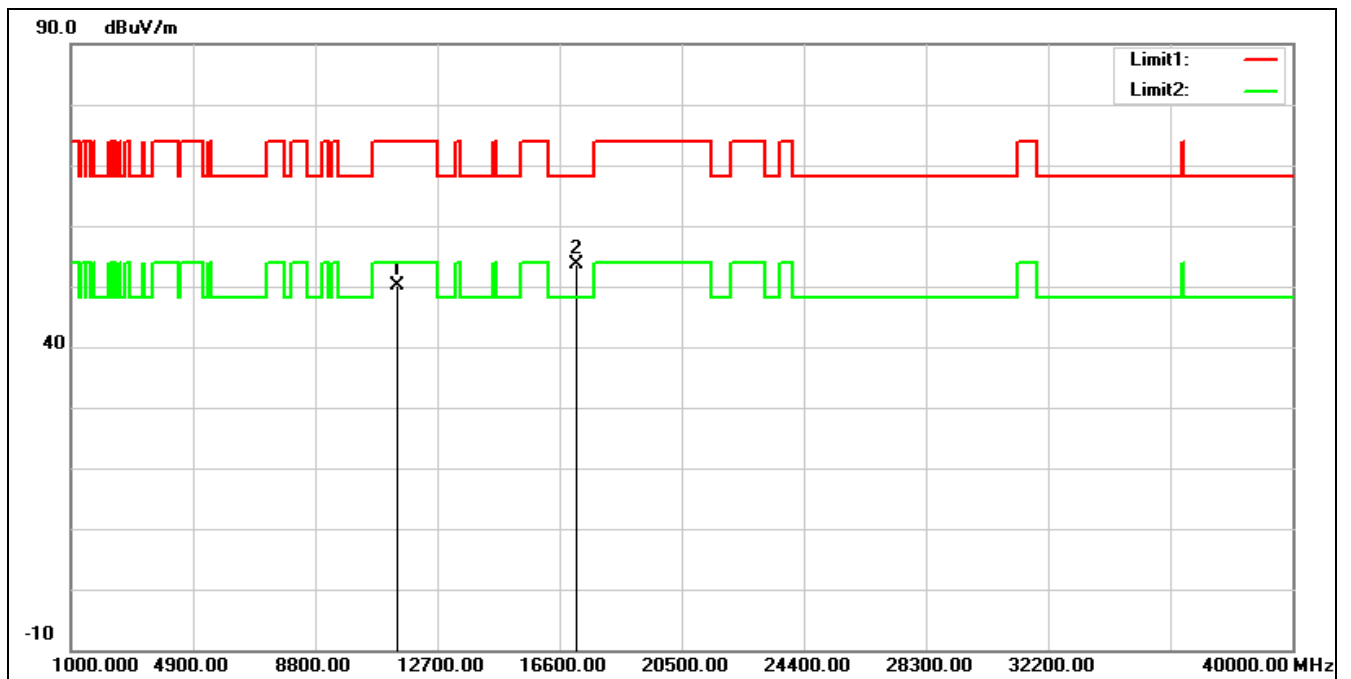


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	35.21	14.84	50.05	74.00	-23.95	peak
2*	17160.000	32.75	20.96	53.71	68.20	-14.49	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5720 MHz

Remark:

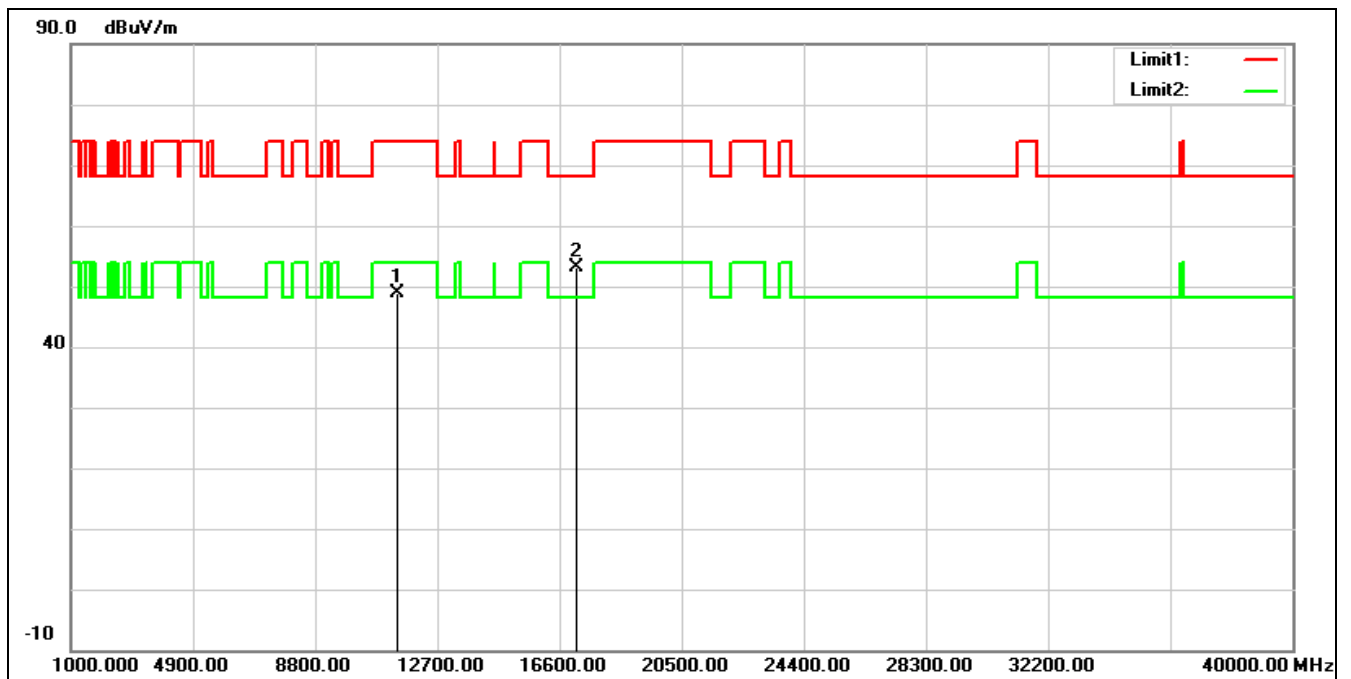


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	33.98	14.84	48.82	74.00	-25.18	peak
2*	17160.000	32.25	20.96	53.21	68.20	-14.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5745 MHz		
Remark:			

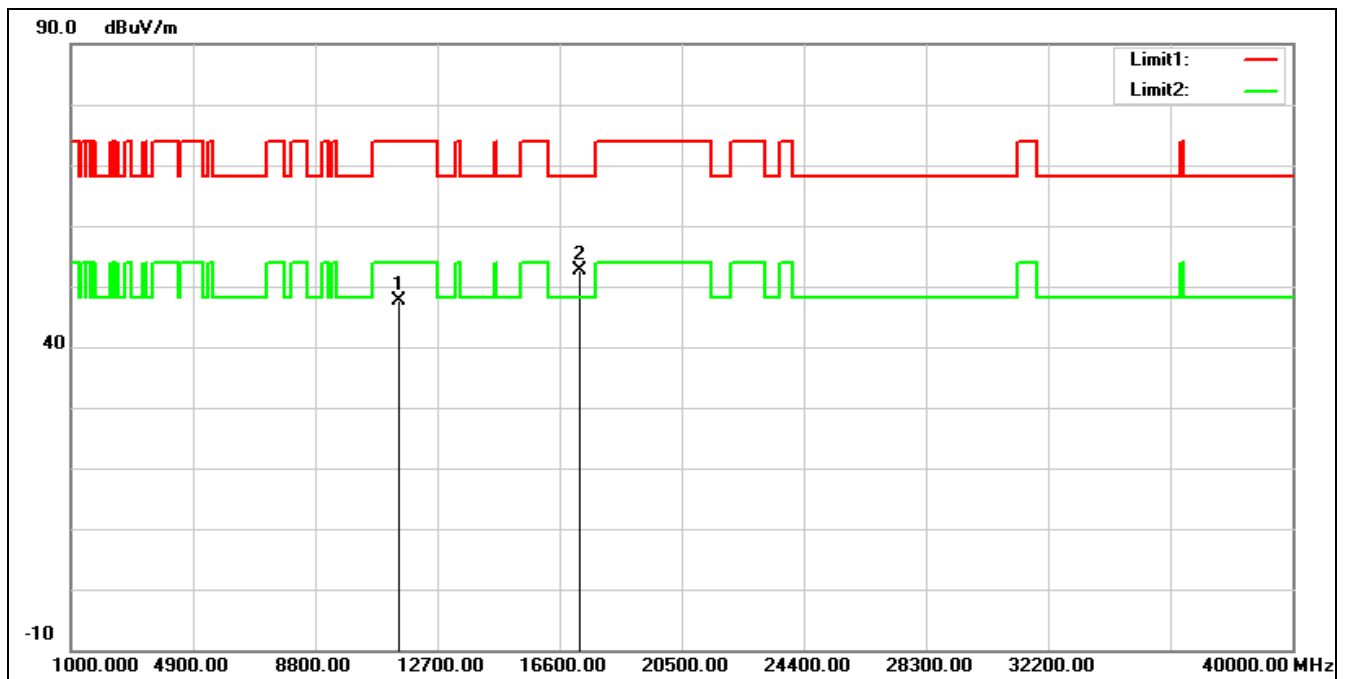


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.66	15.07	47.73	74.00	-26.27	peak
2*	17235.000	31.17	21.53	52.70	68.20	-15.50	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5745 MHz
Remark:

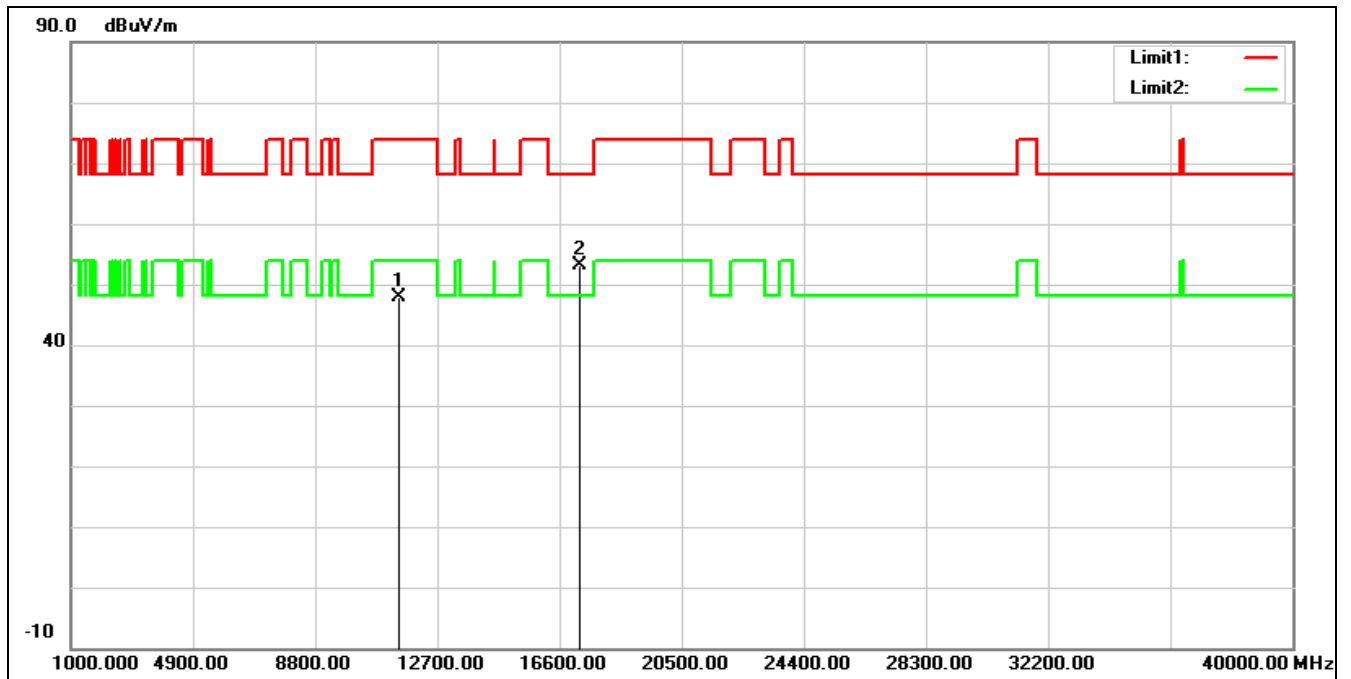


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.83	15.07	47.90	74.00	-26.10	peak
2*	17235.000	31.50	21.53	53.03	68.20	-15.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

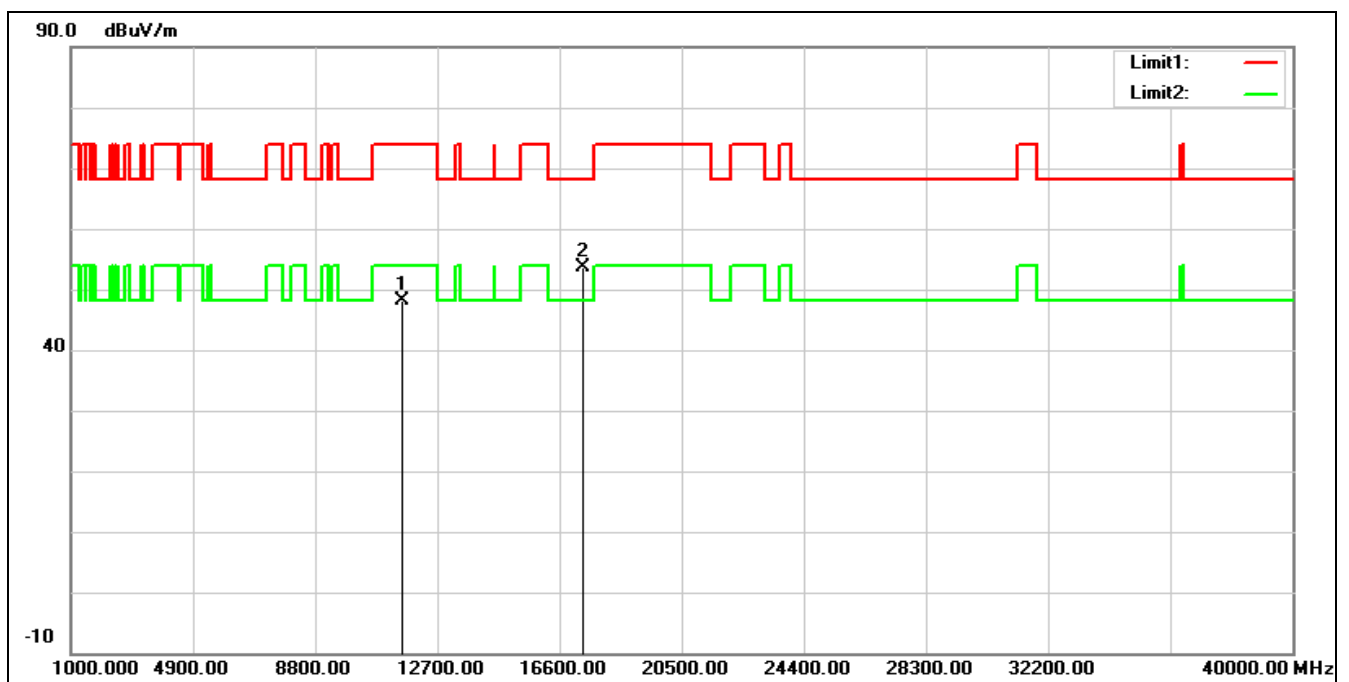

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.23	14.84	48.07	74.00	-25.93	peak
2*	17355.000	31.27	22.35	53.62	68.20	-14.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

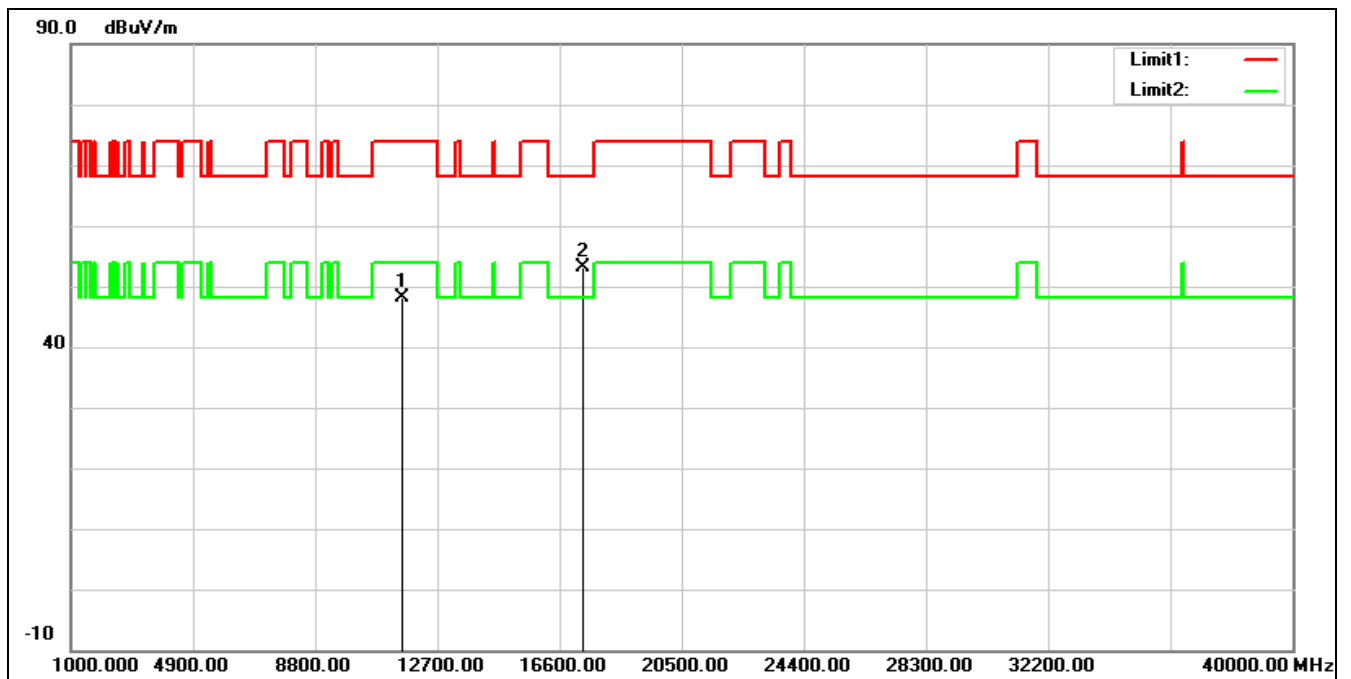


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.26	14.84	48.10	74.00	-25.90	peak
2*	17355.000	30.68	22.35	53.03	68.20	-15.17	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5825 MHz

Remark:

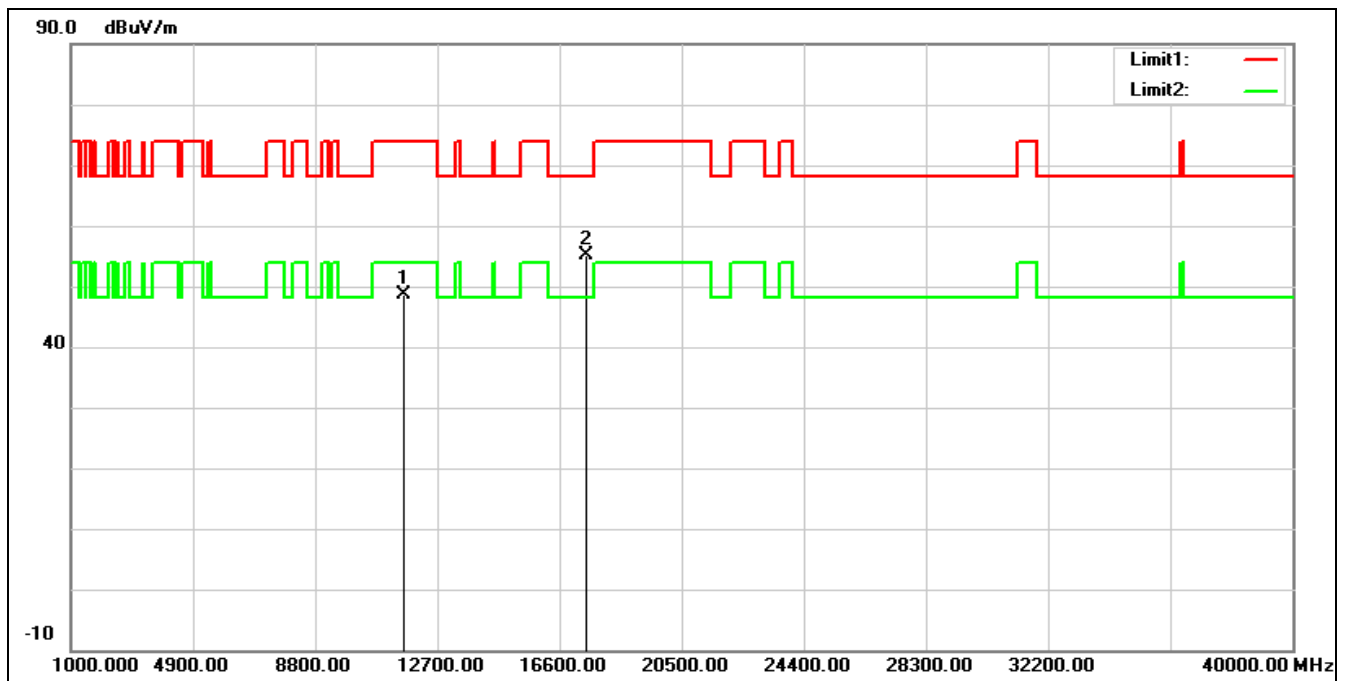


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.05	14.56	48.61	74.00	-25.39	peak
2*	17475.000	31.88	23.20	55.08	68.20	-13.12	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5825 MHz
Remark:

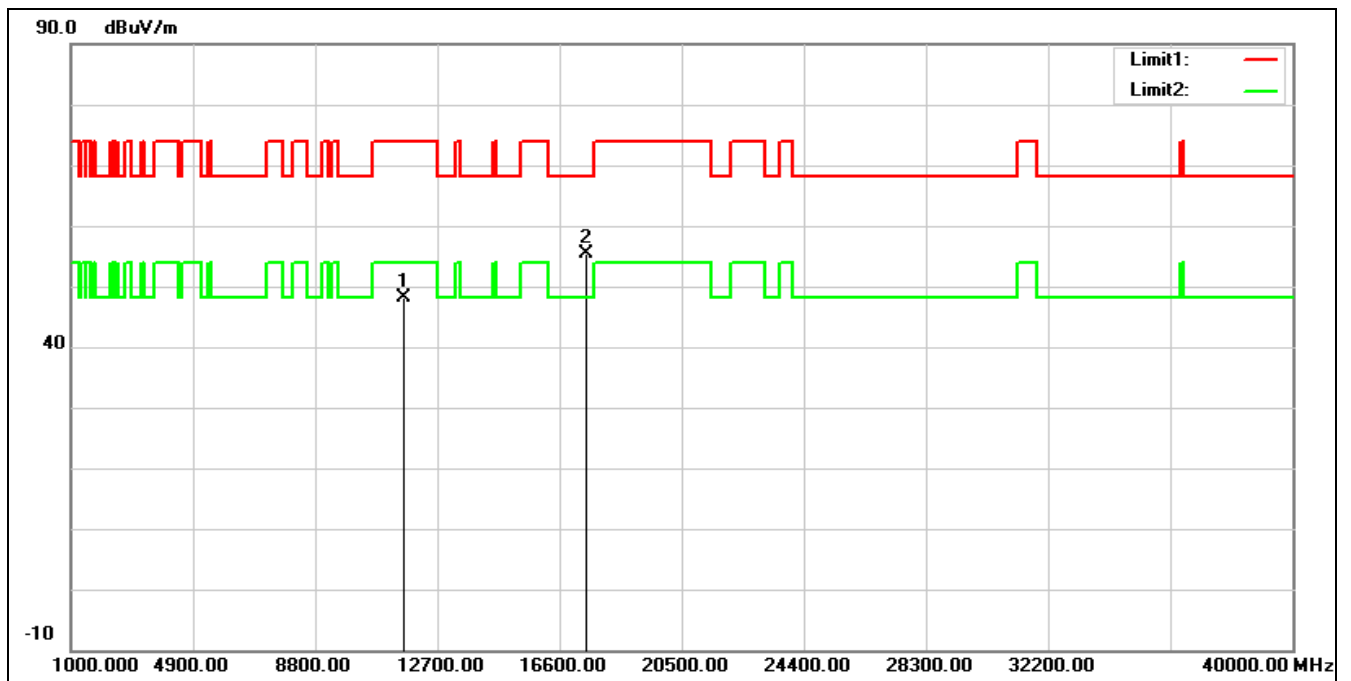

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.46	14.56	48.02	74.00	-25.98	peak
2*	17475.000	32.22	23.20	55.42	68.20	-12.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5190 MHz		
Remark:			

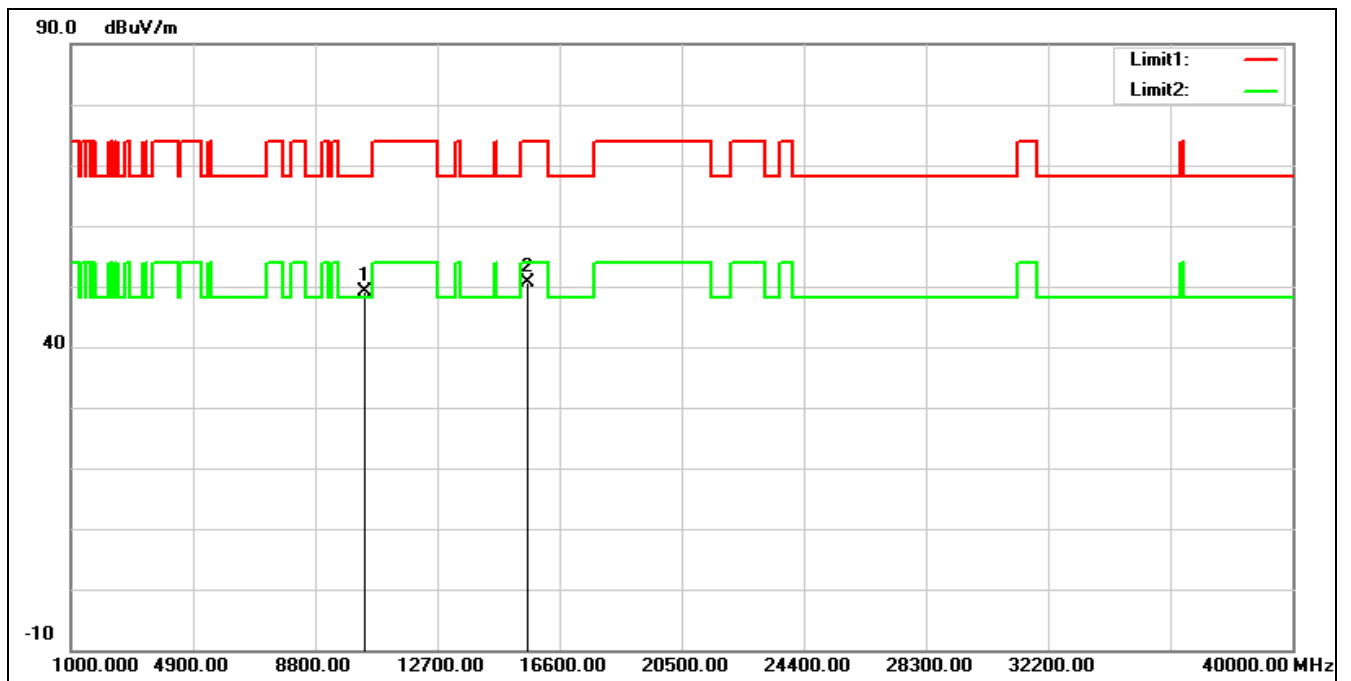


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	35.76	13.44	49.20	68.20	-19.00	peak
2	15570.000	33.98	16.72	50.70	74.00	-23.30	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5190 MHz

Remark:

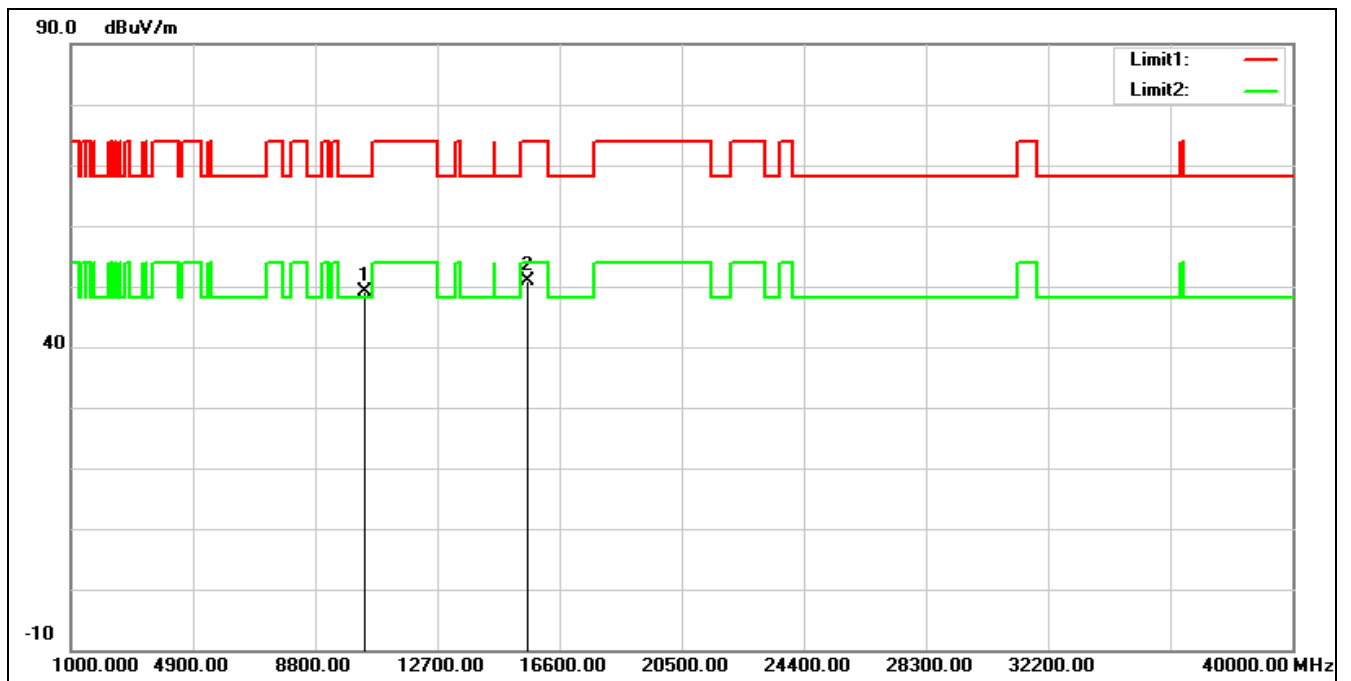

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	35.70	13.44	49.14	68.20	-19.06	peak
2	15570.000	34.25	16.72	50.97	74.00	-23.03	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5230 MHz
Remark:

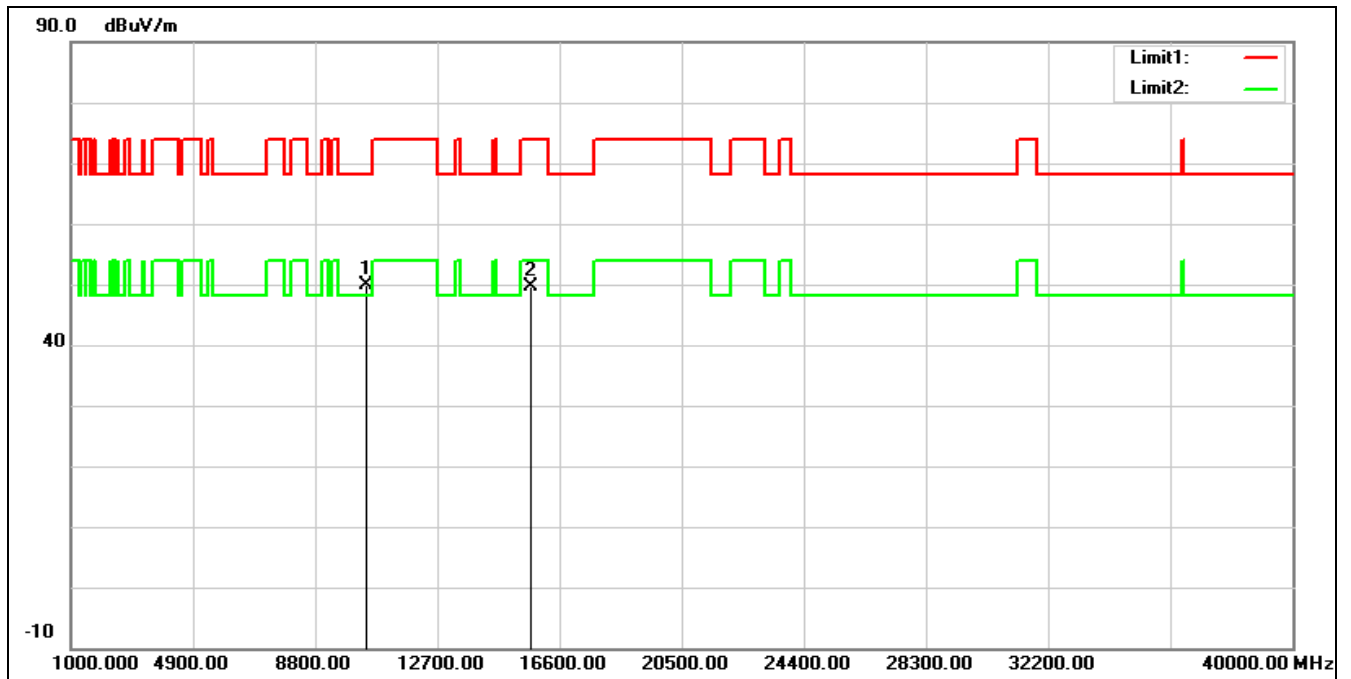


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	36.31	13.57	49.88	68.20	-18.32	peak
2	15690.000	33.12	16.59	49.71	74.00	-24.29	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5230 MHz

Remark:

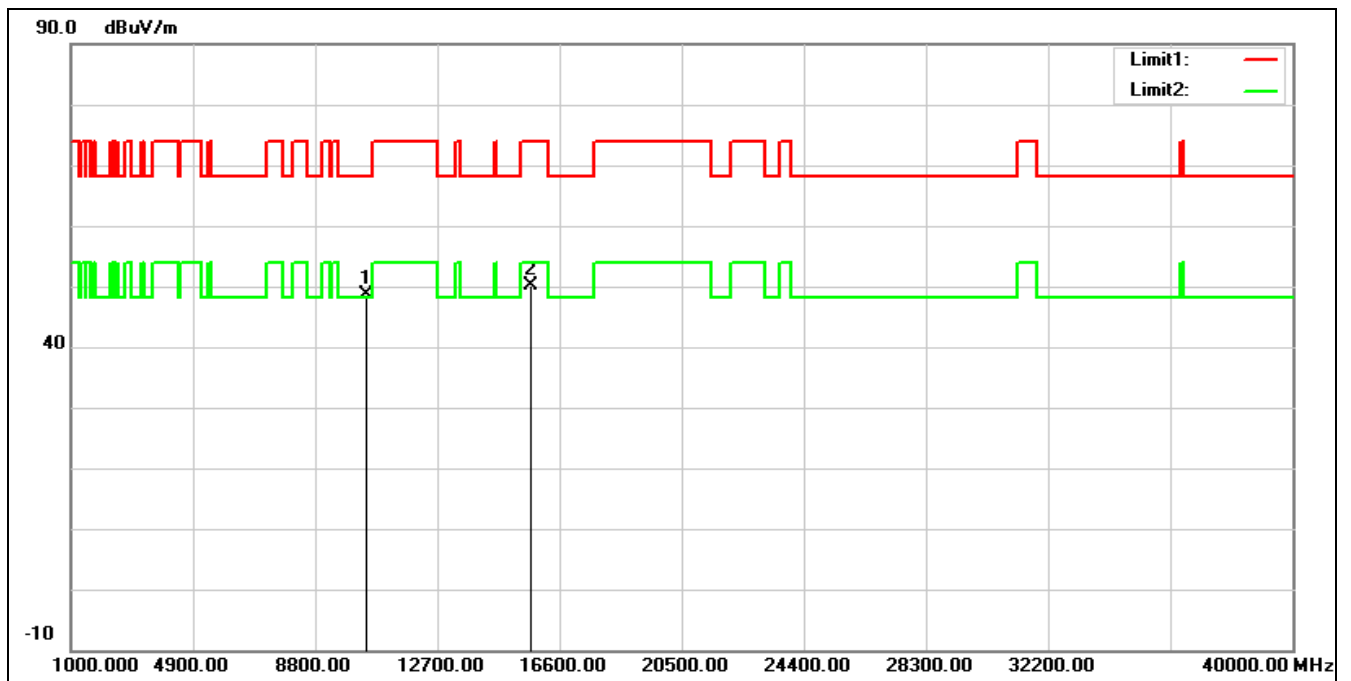


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	34.94	13.57	48.51	68.20	-19.69	peak
2	15690.000	33.56	16.59	50.15	74.00	-23.85	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5270 MHz

Remark:

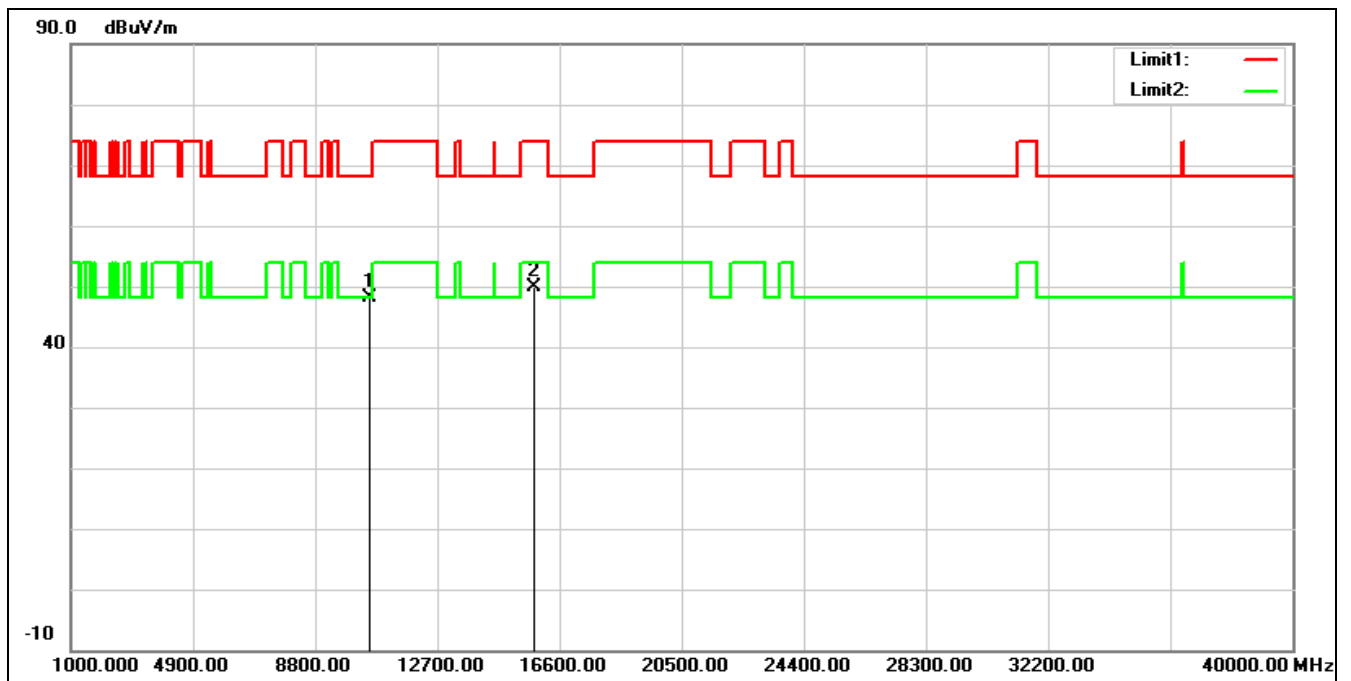


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	34.51	13.61	48.12	68.20	-20.08	peak
2	15810.000	33.49	16.48	49.97	74.00	-24.03	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5270 MHz
Remark:

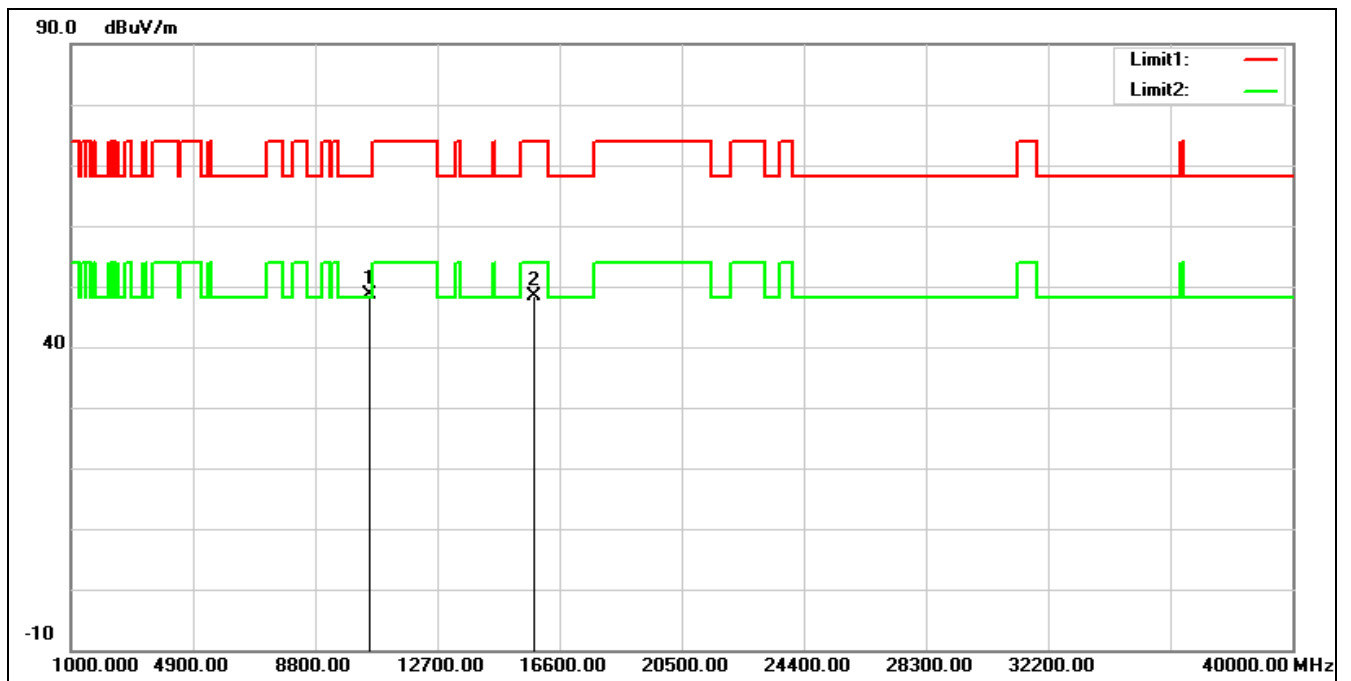


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	35.11	13.61	48.72	68.20	-19.48	peak
2	15810.000	31.92	16.48	48.40	74.00	-25.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5310 MHz		
Remark:			

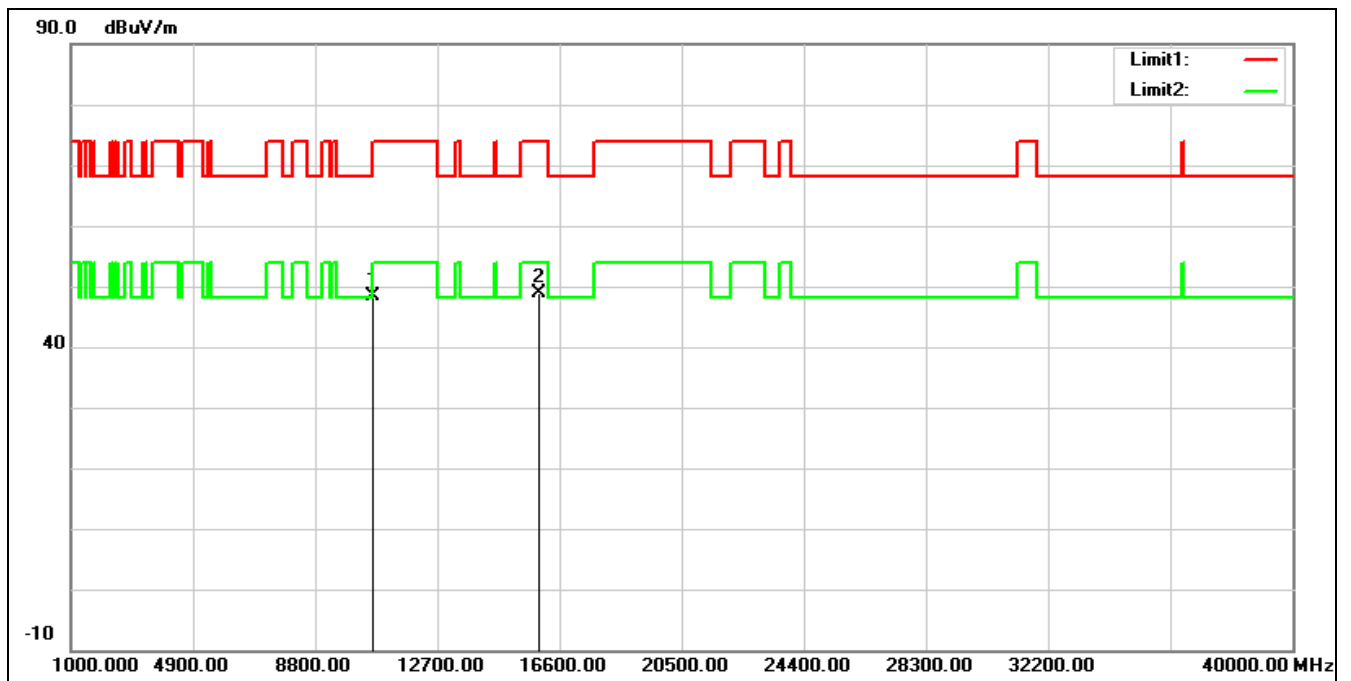


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.71	13.66	48.37	74.00	-25.63	peak
2*	15930.000	32.65	16.15	48.80	74.00	-25.20	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5310 MHz
Remark:

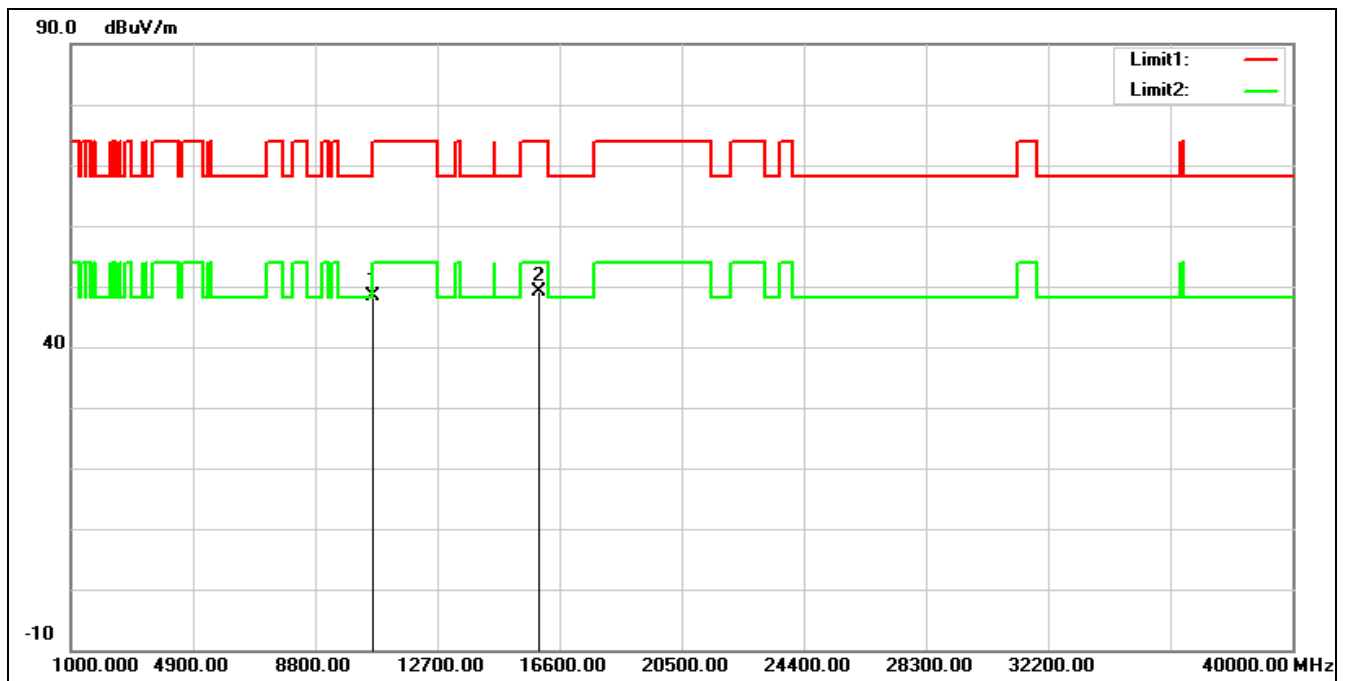


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.61	13.66	48.27	74.00	-25.73	peak
2*	15930.000	32.89	16.15	49.04	74.00	-24.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5510 MHz		
Remark:			

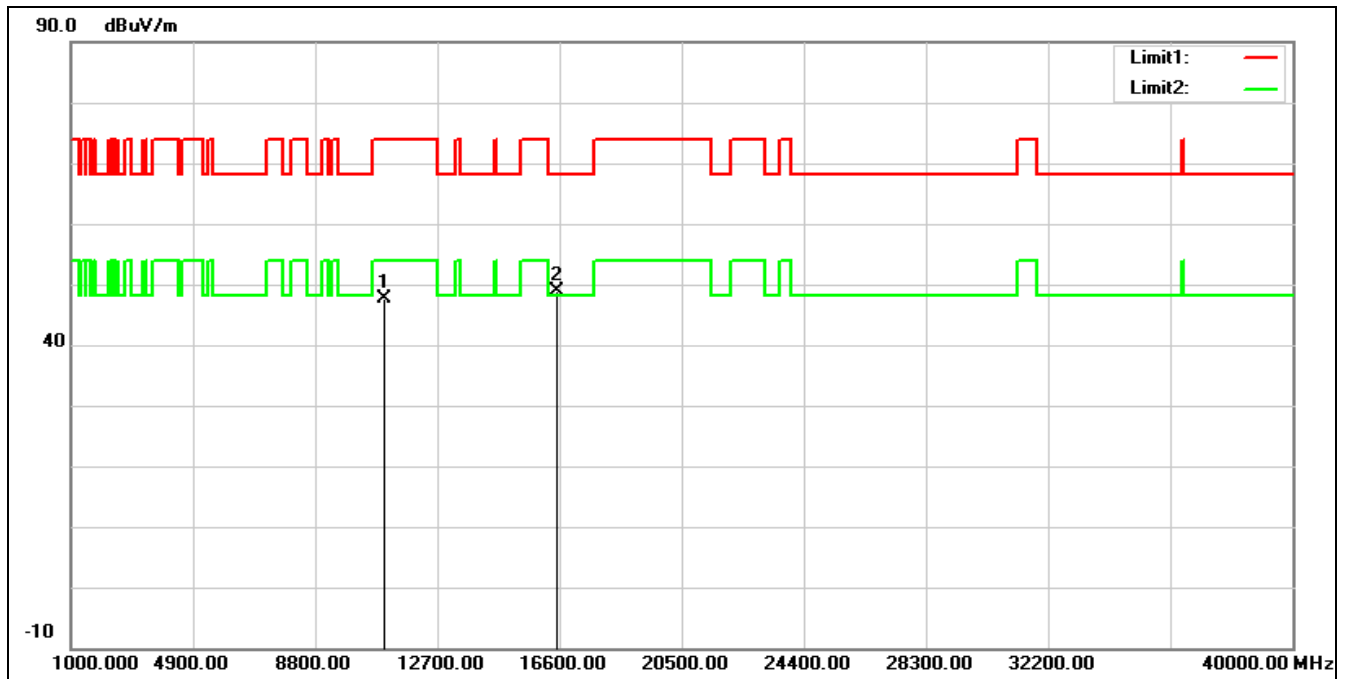


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.38	14.35	47.73	74.00	-26.27	peak
2*	16530.000	31.87	16.91	48.78	68.20	-19.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5510 MHz		
Remark:			

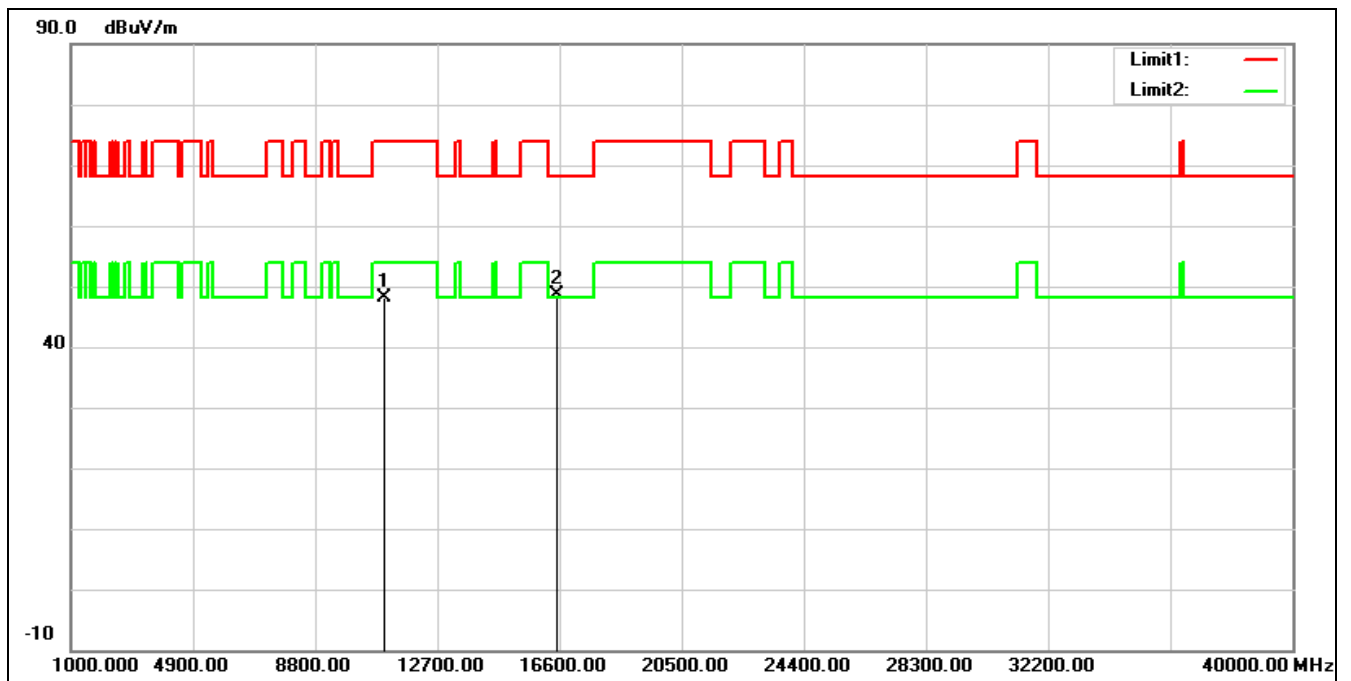


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.88	14.35	48.23	74.00	-25.77	peak
2*	16530.000	31.75	16.91	48.66	68.20	-19.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5550 MHz		
Remark:			

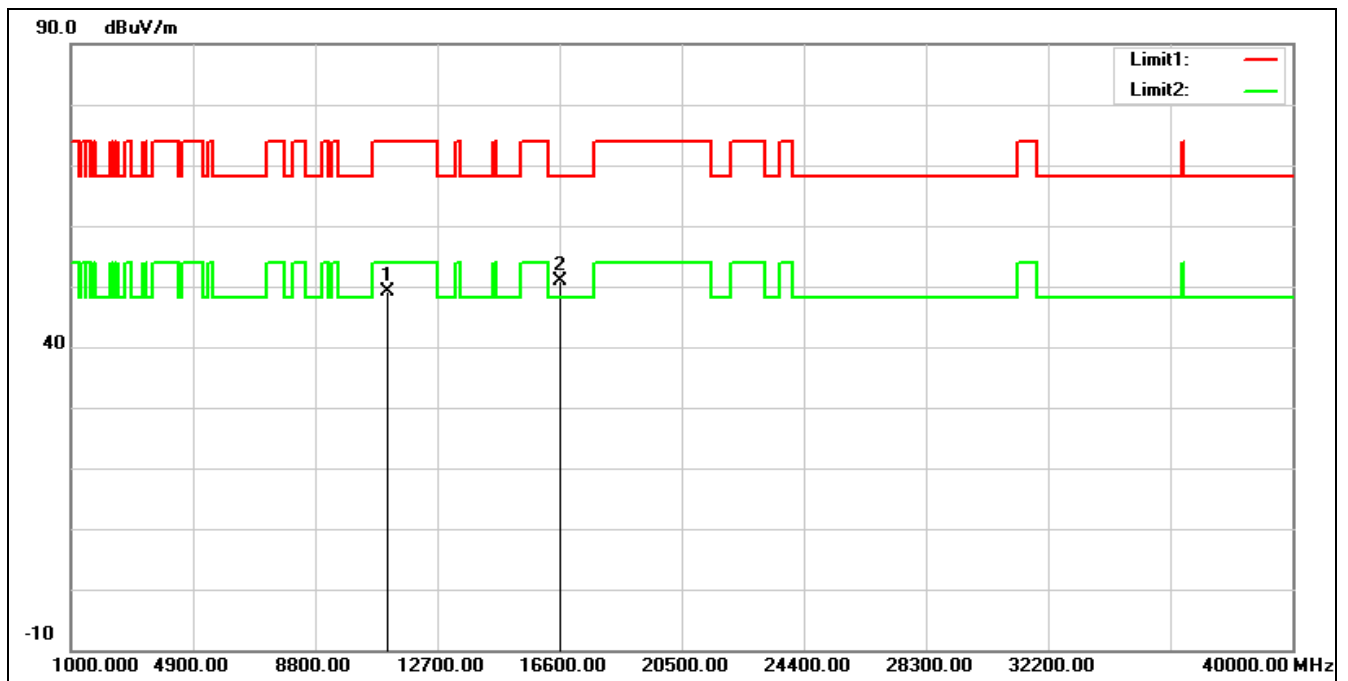


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.57	14.56	49.13	74.00	-24.87	peak
2*	16650.000	33.18	17.73	50.91	68.20	-17.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5550 MHz		
Remark:			

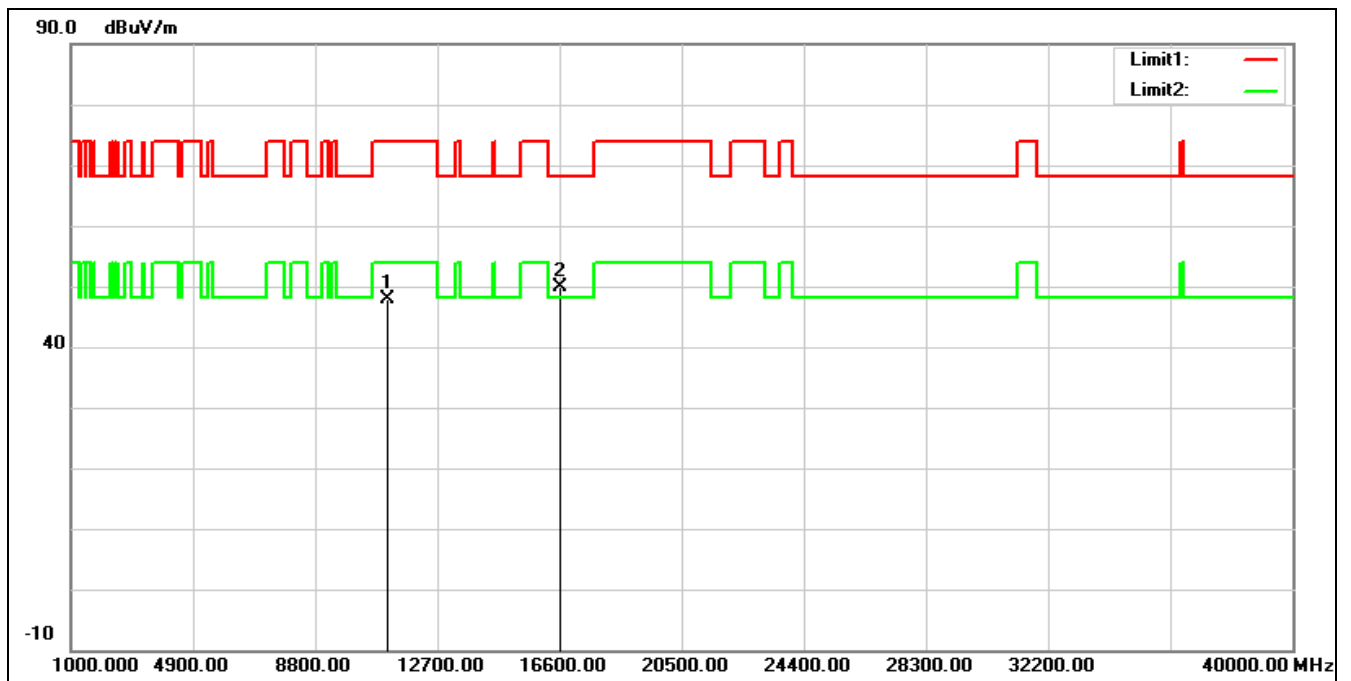

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.32	14.56	47.88	74.00	-26.12	peak
2*	16650.000	32.22	17.73	49.95	68.20	-18.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5670 MHz		
Remark:			

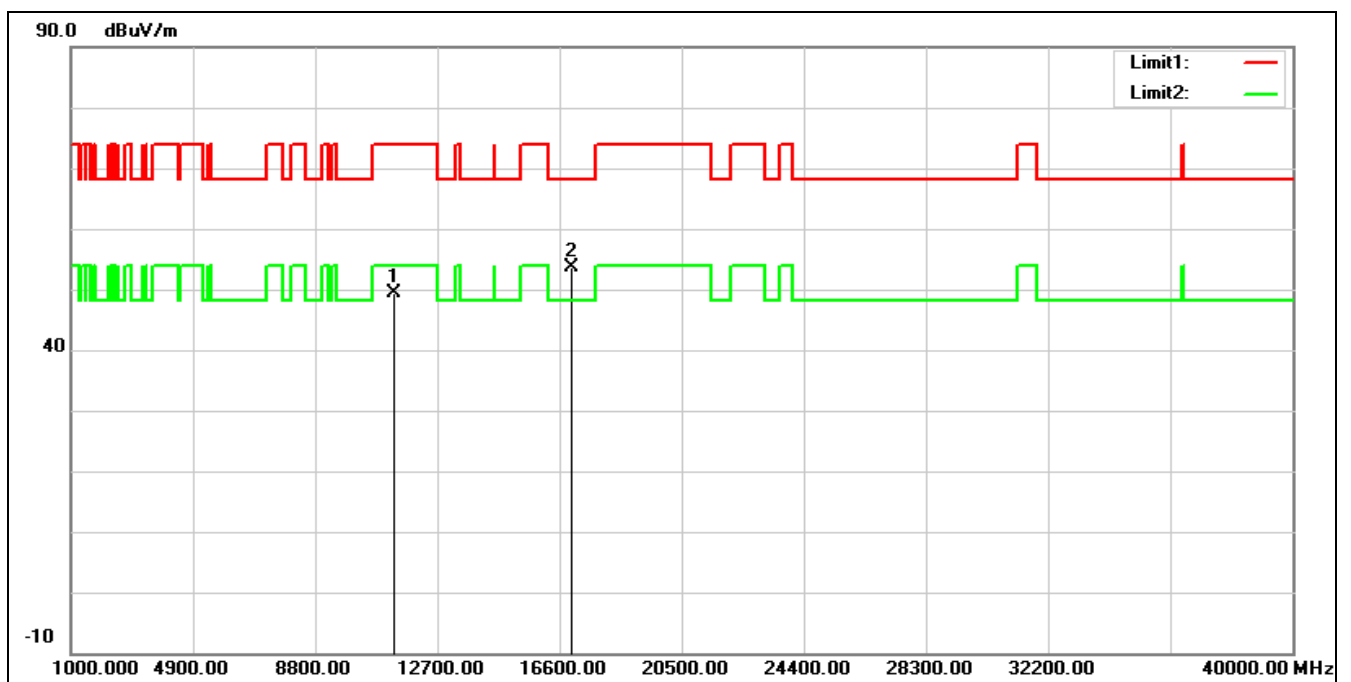


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.87	14.50	49.37	74.00	-24.63	peak
2*	17010.000	33.69	20.06	53.75	68.20	-14.45	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5670 MHz

Remark:

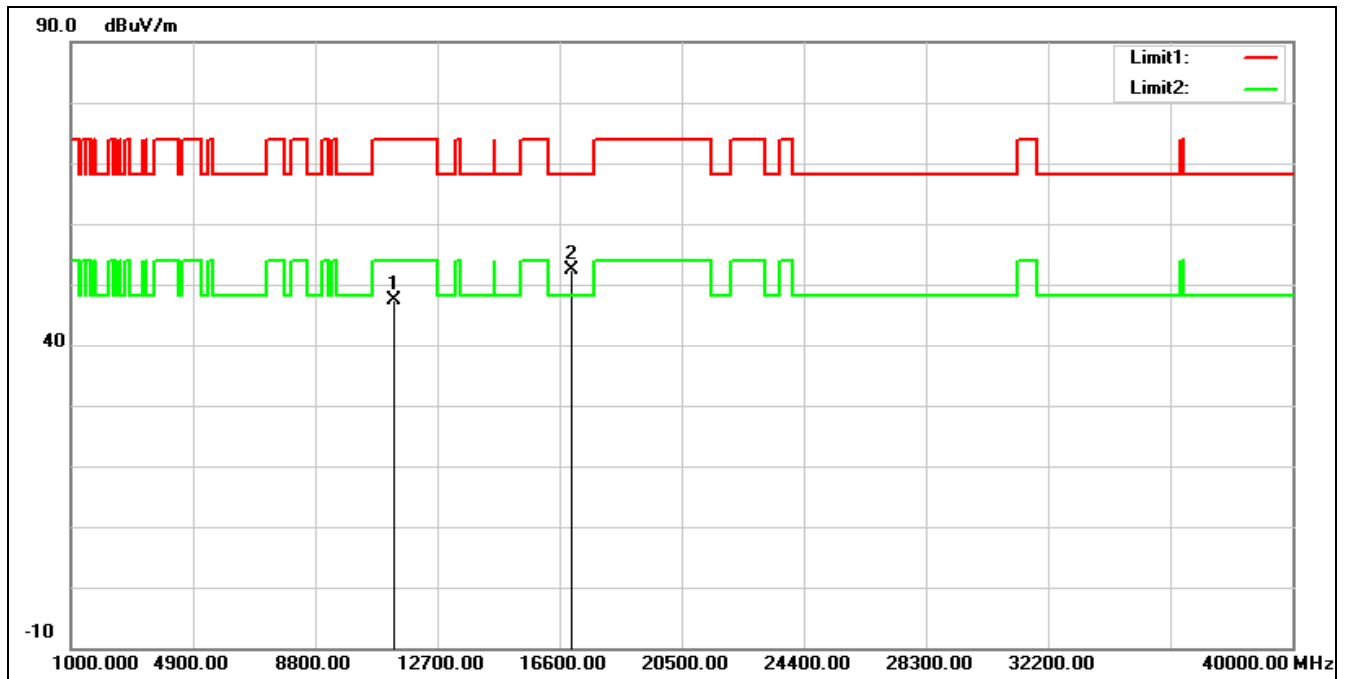


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.99	14.50	47.49	74.00	-26.51	peak
2*	17010.000	32.25	20.06	52.31	68.20	-15.89	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5710 MHz
Remark:

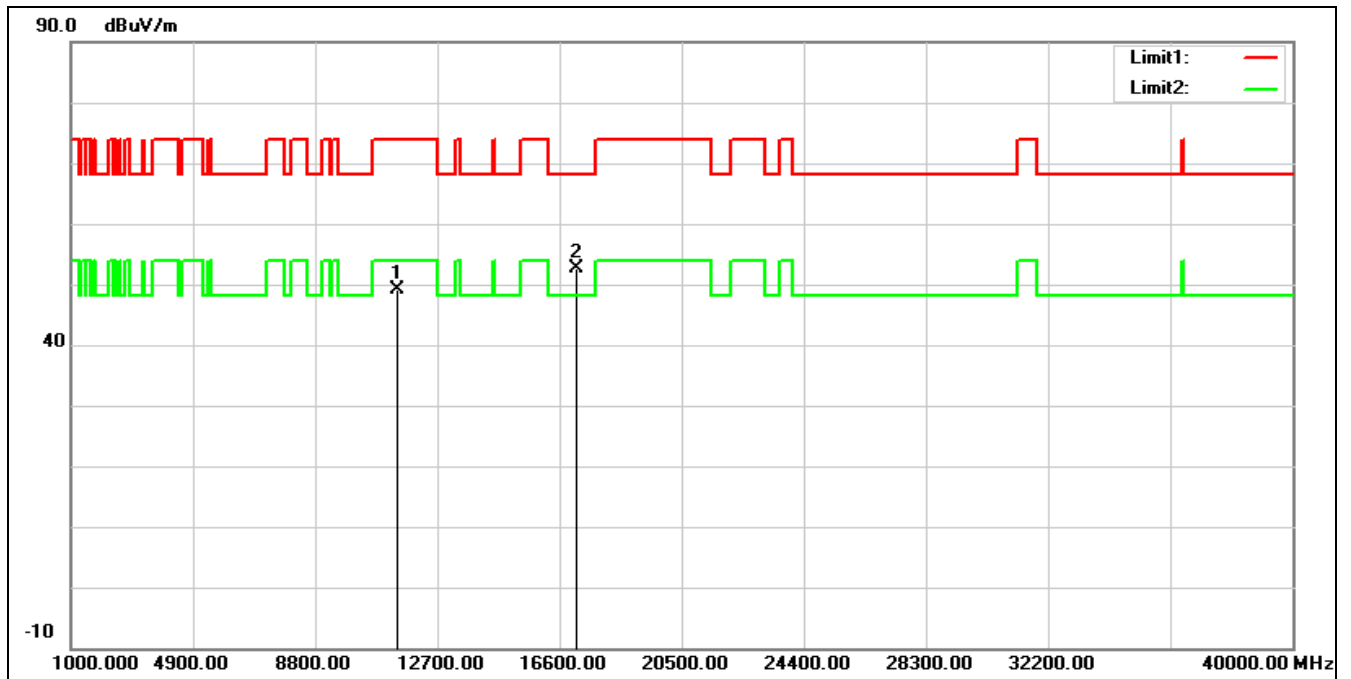


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	34.40	14.75	49.15	74.00	-24.85	peak
2*	17130.000	31.83	20.77	52.60	68.20	-15.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5710 MHz		
Remark:			

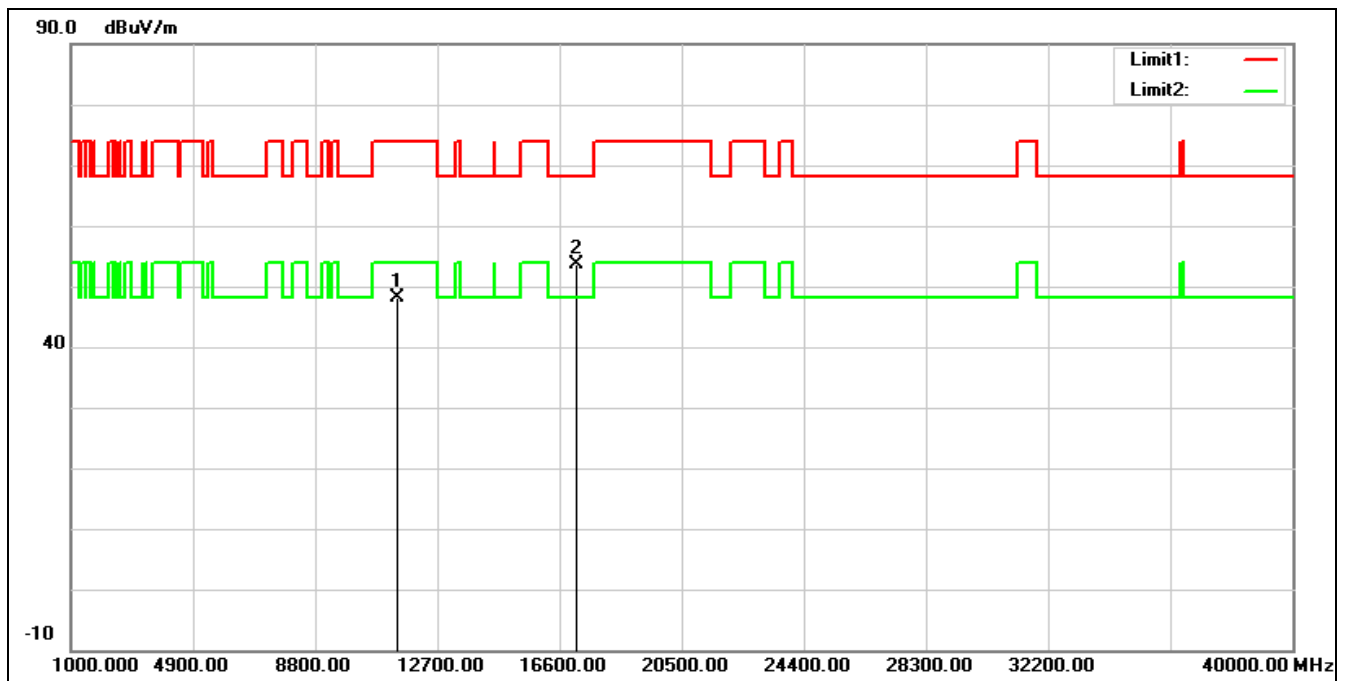


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.46	14.75	48.21	74.00	-25.79	peak
2*	17130.000	32.78	20.77	53.55	68.20	-14.65	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5755 MHz
Remark:

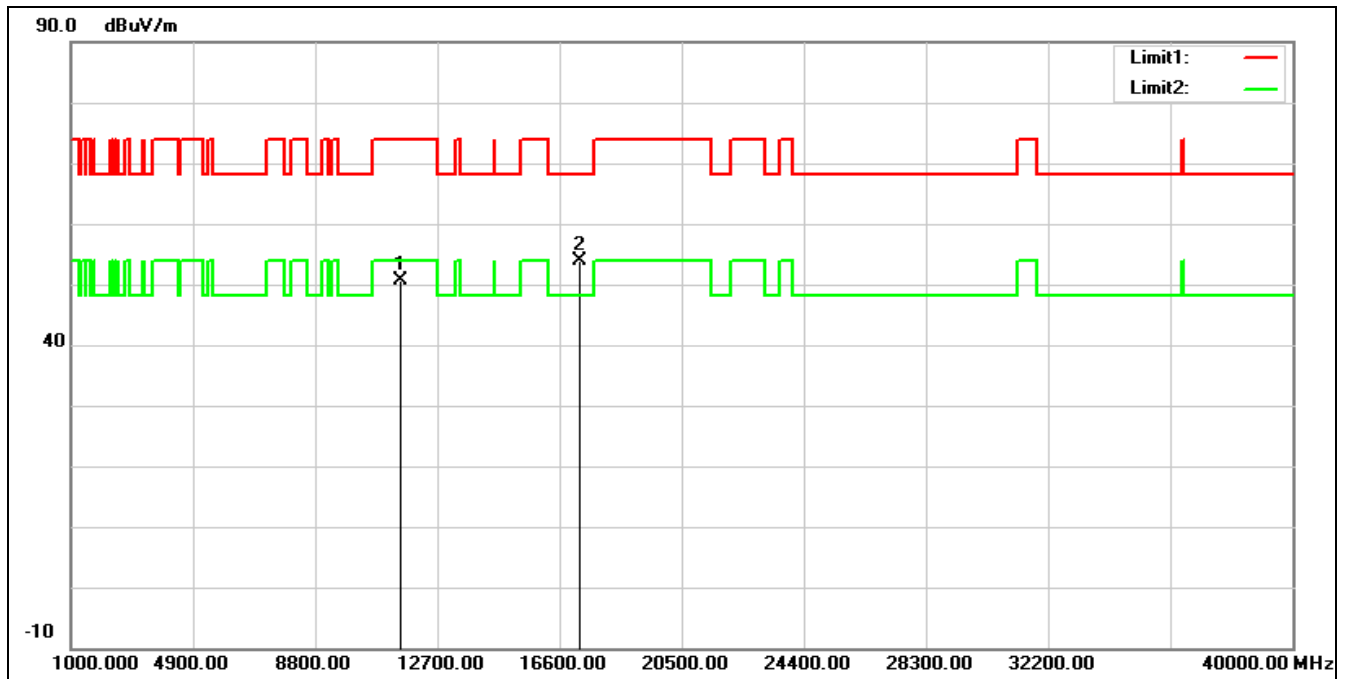

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.48	15.09	50.57	74.00	-23.43	peak
2*	17265.000	32.18	21.79	53.97	68.20	-14.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5755 MHz		
Remark:			

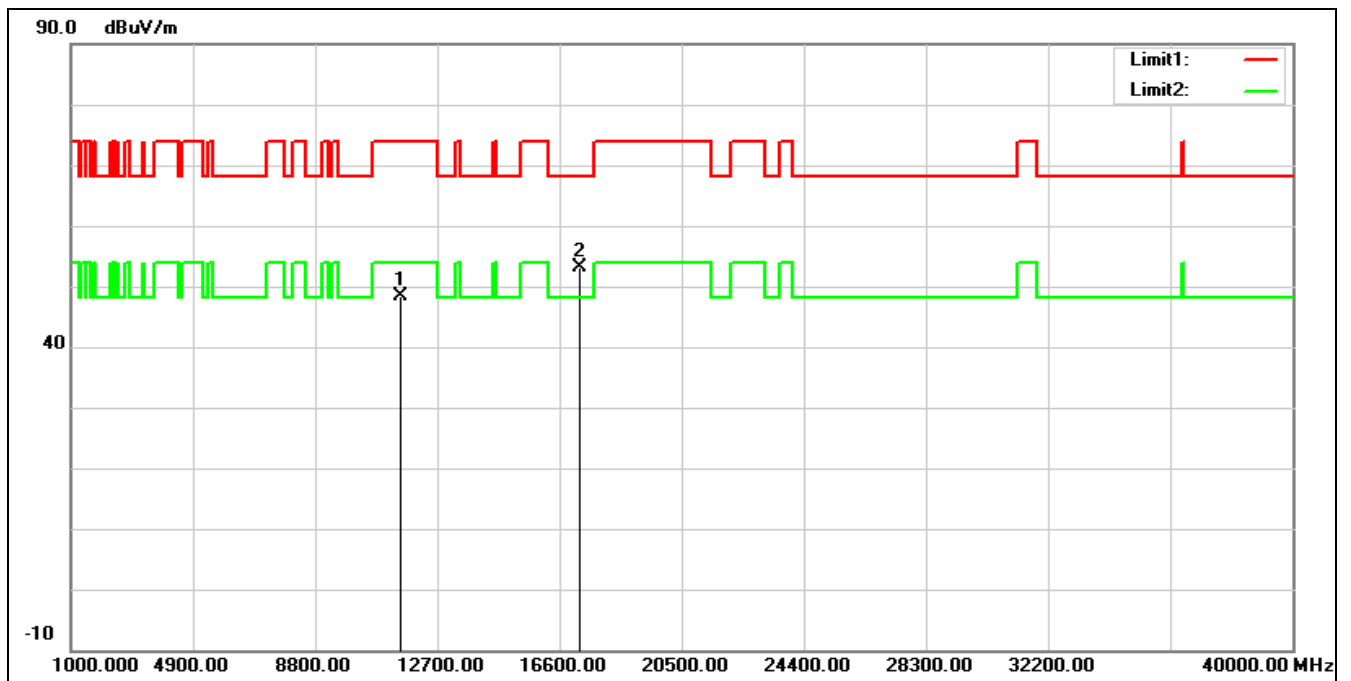


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.38	15.09	48.47	74.00	-25.53	peak
2*	17265.000	31.36	21.79	53.15	68.20	-15.05	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5795 MHz

Remark:

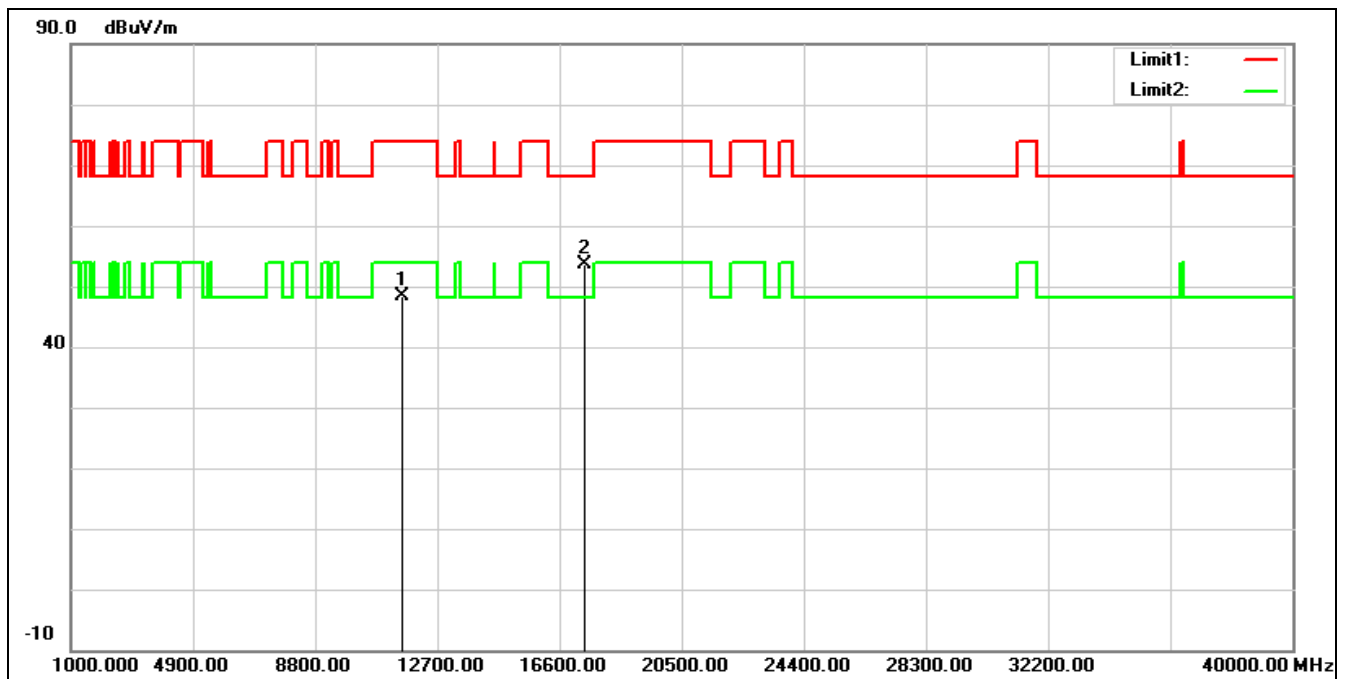

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.57	14.76	48.33	74.00	-25.67	peak
2*	17385.000	31.04	22.48	53.52	68.20	-14.68	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5795 MHz
Remark:

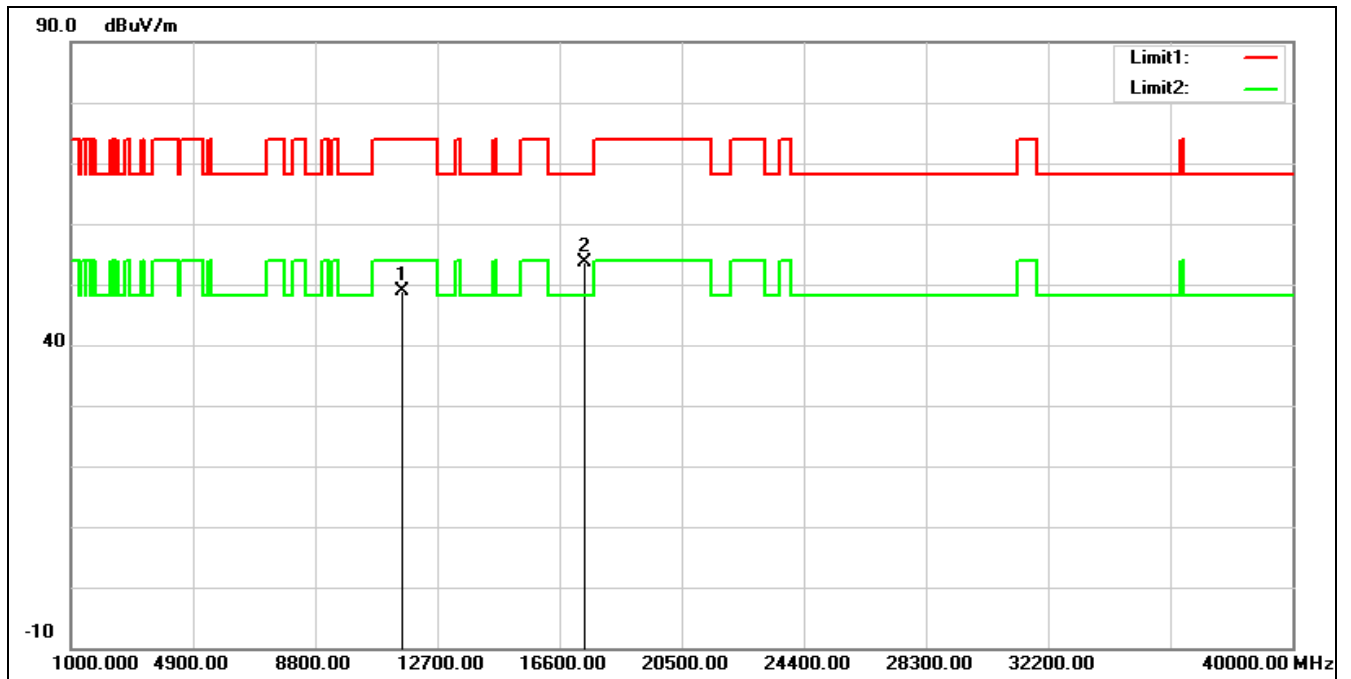


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.17	14.76	48.93	74.00	-25.07	peak
2*	17385.000	31.21	22.48	53.69	68.20	-14.51	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT80 5210 MHz

Remark:

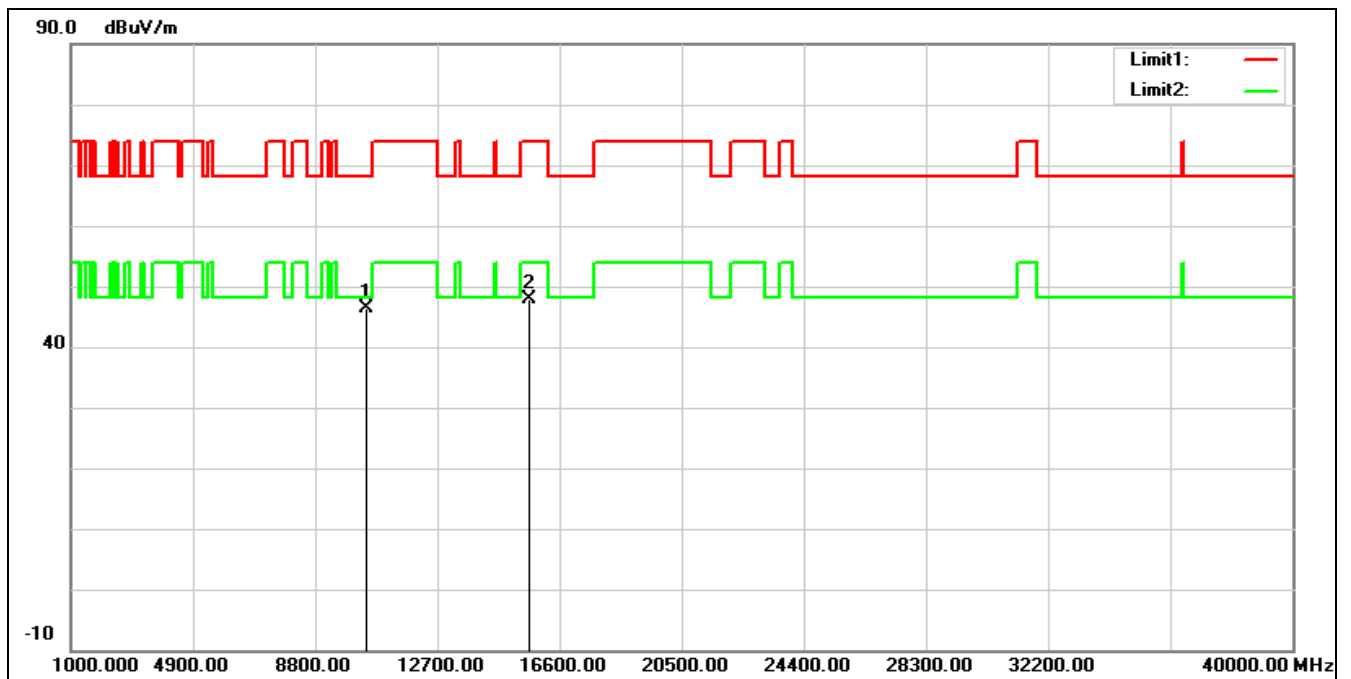

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	32.93	13.53	46.46	68.20	-21.74	peak
2	15630.000	31.33	16.64	47.97	74.00	-26.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5210 MHz		
Remark:			

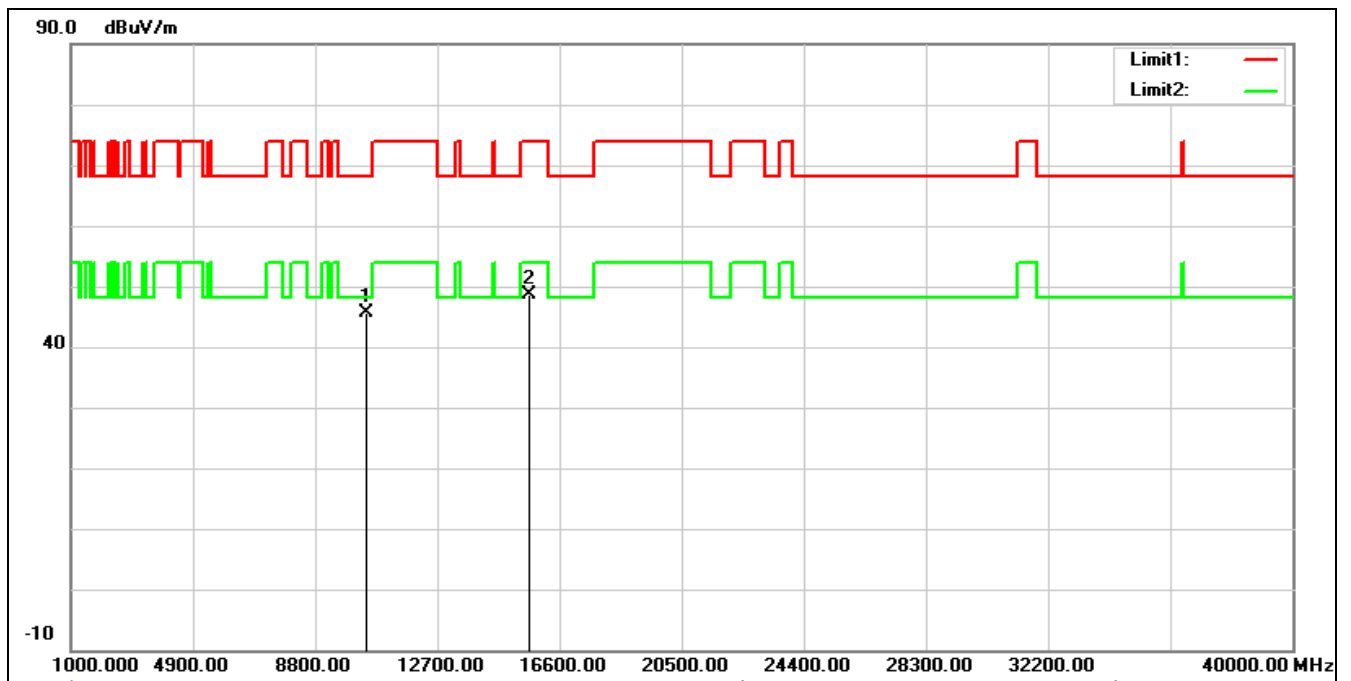


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	32.01	13.53	45.54	68.20	-22.66	peak
2	15630.000	31.95	16.64	48.59	74.00	-25.41	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT80 5290 MHz

Remark:

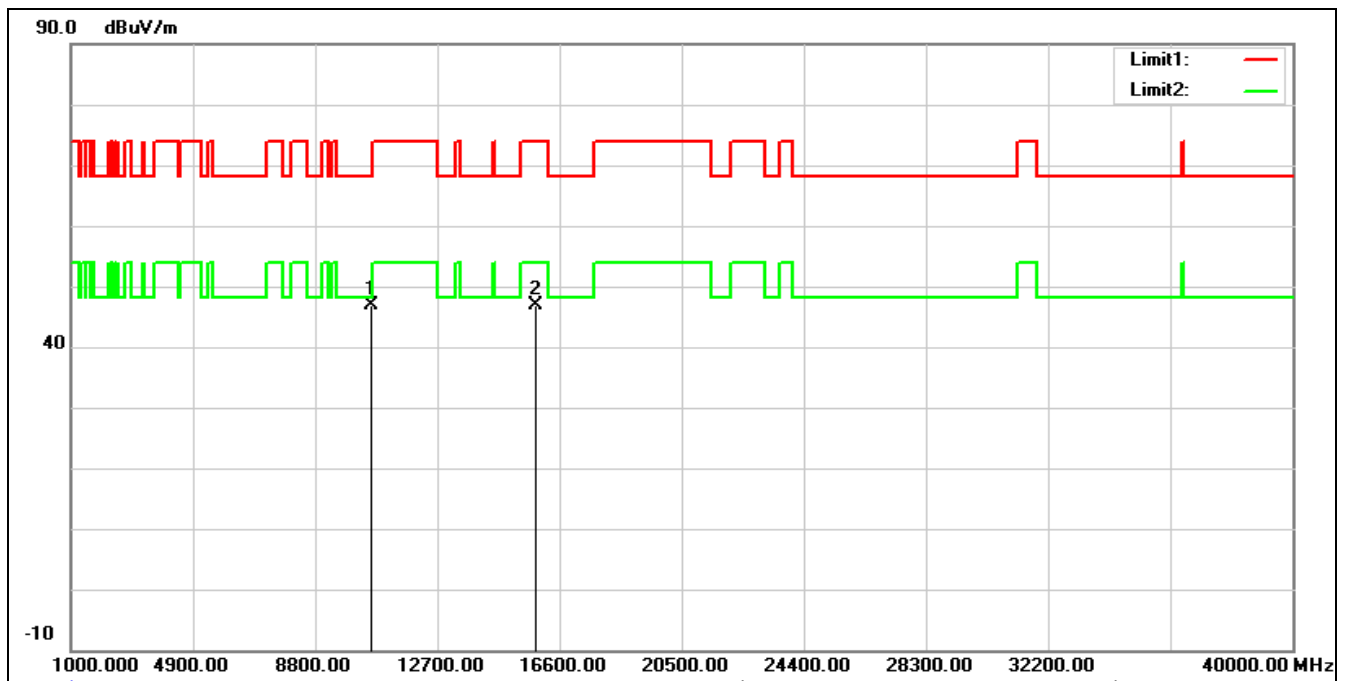


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	33.20	13.63	46.83	68.20	-21.37	peak
2	15870.000	30.67	16.31	46.98	74.00	-27.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5290 MHz		
Remark:			

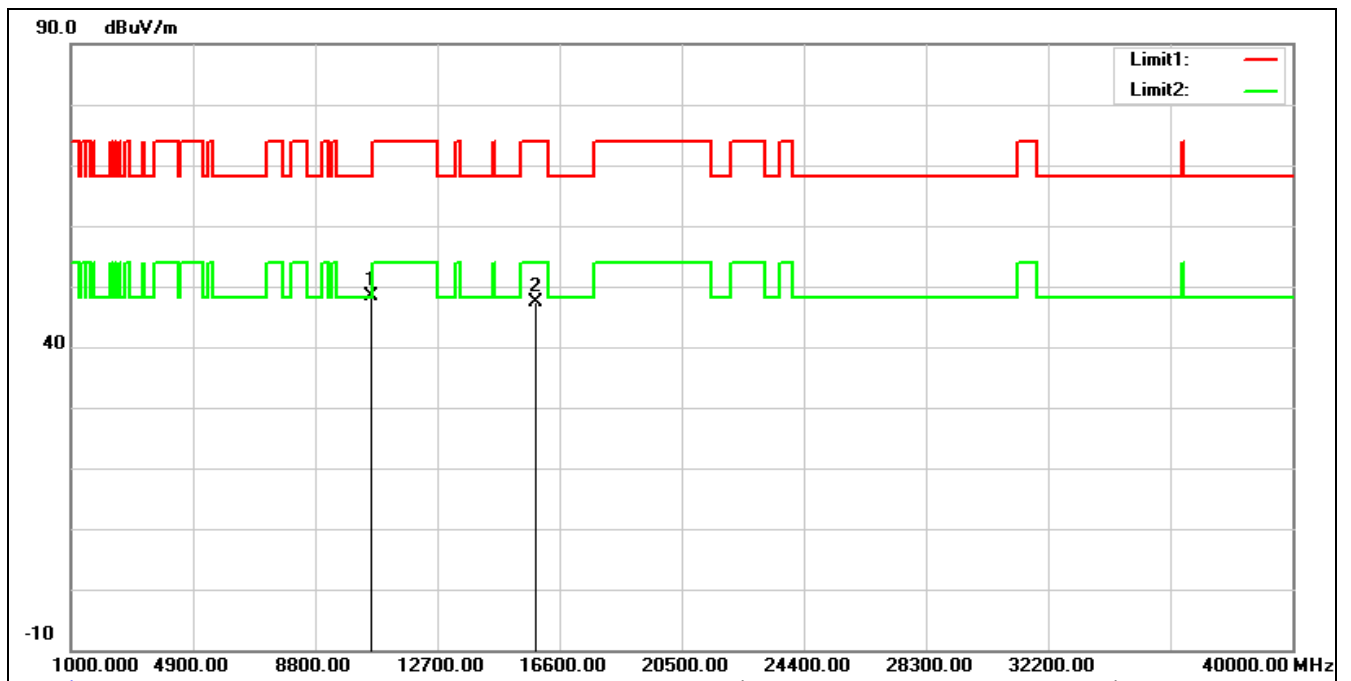


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	34.85	13.63	48.48	68.20	-19.72	peak
2	15870.000	30.98	16.31	47.29	74.00	-26.71	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5530 MHz		
Remark:			

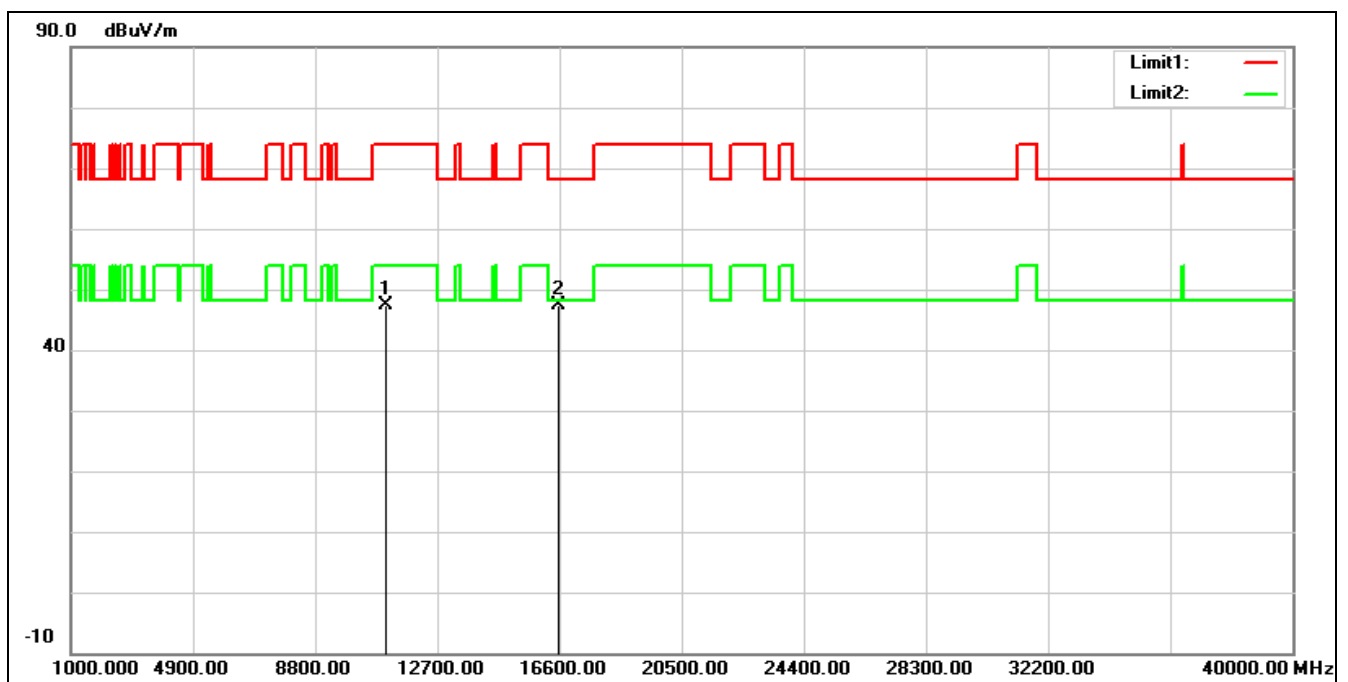

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.87	14.46	47.33	74.00	-26.67	peak
2*	16590.000	29.94	17.34	47.28	68.20	-20.92	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT80 5530 MHz
Remark:

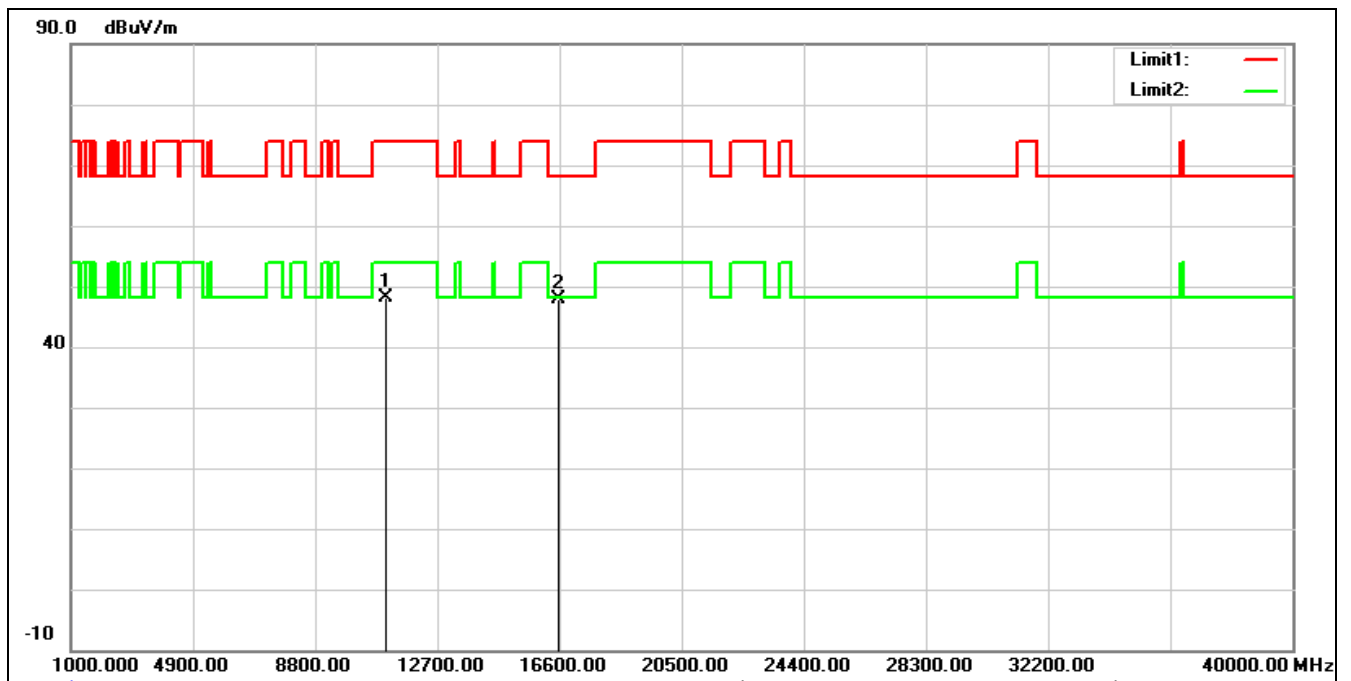


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.72	14.46	48.18	74.00	-25.82	peak
2*	16590.000	30.59	17.34	47.93	68.20	-20.27	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT80 5610 MHz

Remark:

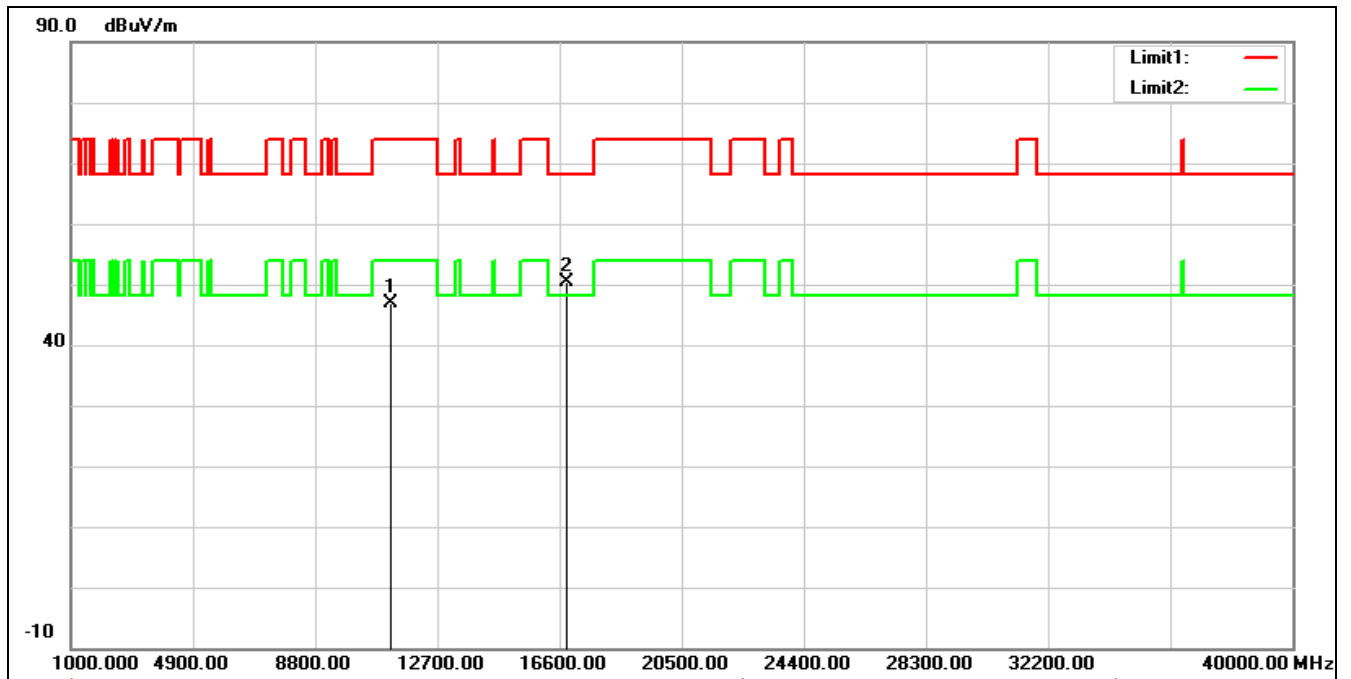


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	32.66	14.34	47.00	74.00	-27.00	peak
2*	16830.000	31.42	19.08	50.50	68.20	-17.70	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT80 5610 MHz
Remark:

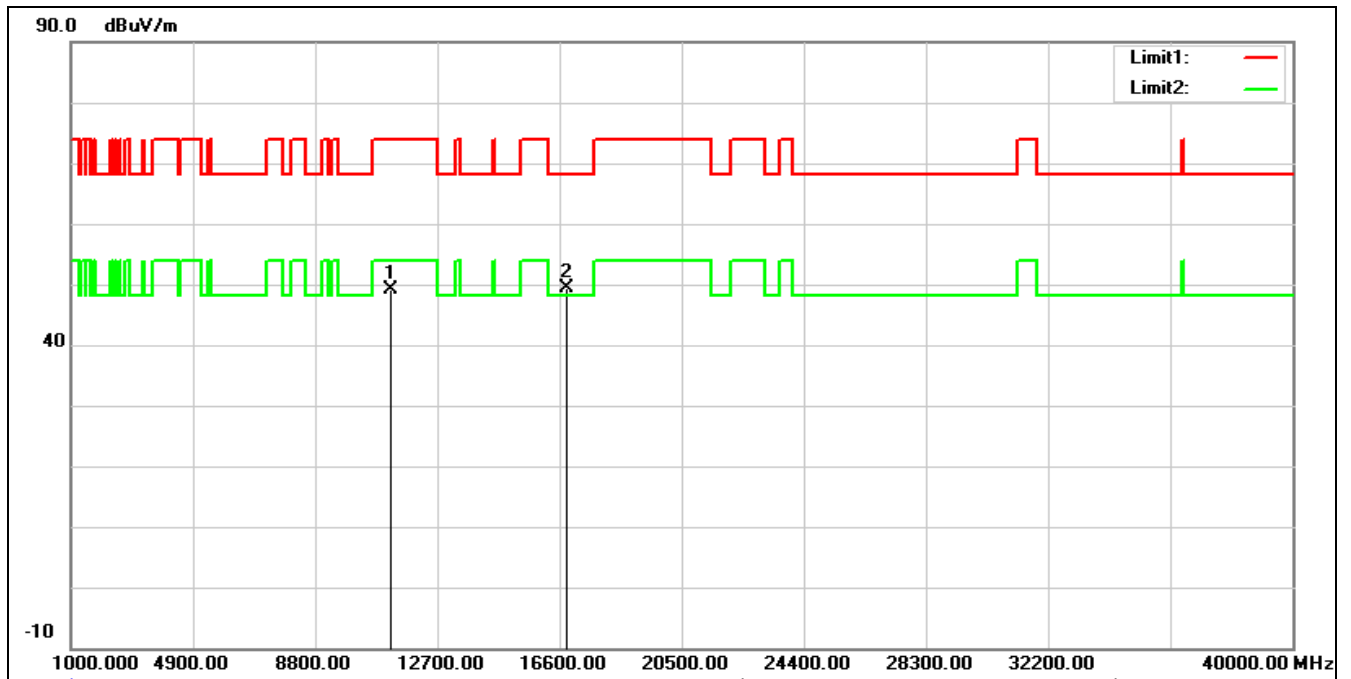


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.81	14.34	49.15	74.00	-24.85	peak
2*	16830.000	30.41	19.08	49.49	68.20	-18.71	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

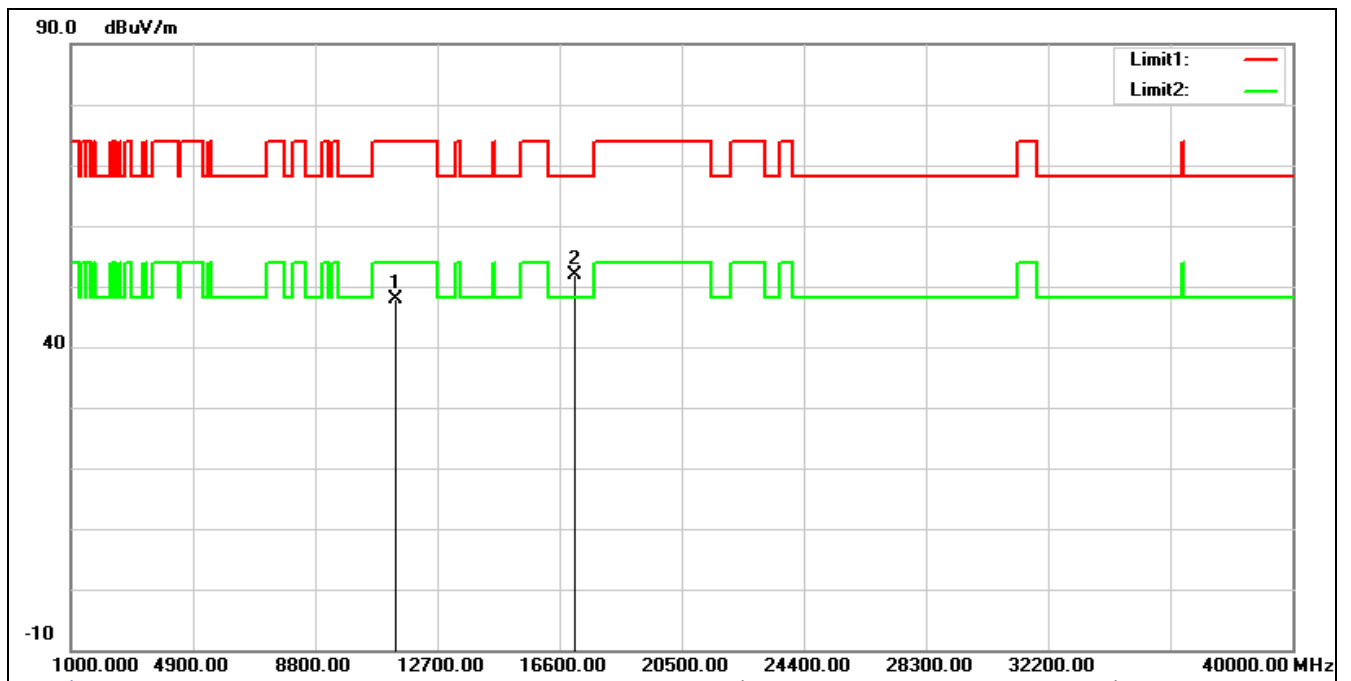


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.38	14.60	47.98	74.00	-26.02	peak
2*	17070.000	31.45	20.40	51.85	68.20	-16.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

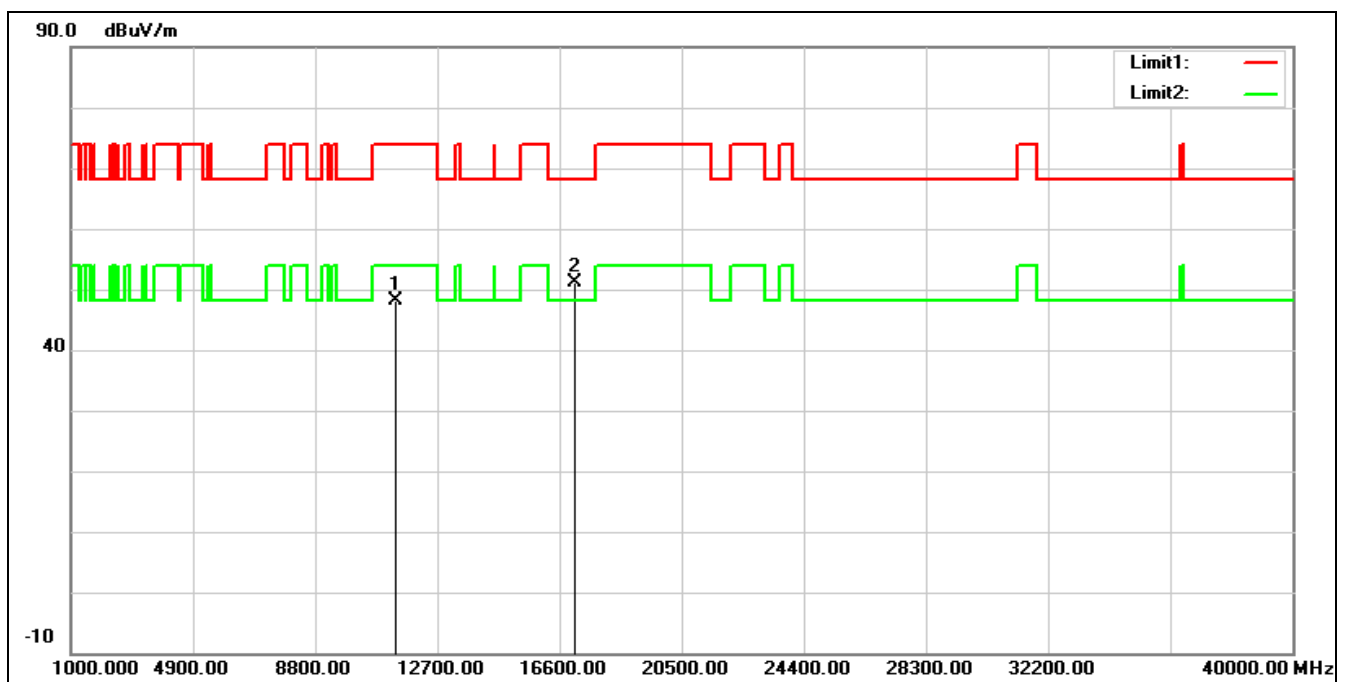


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.62	14.60	48.22	74.00	-25.78	peak
2*	17070.000	30.81	20.40	51.21	68.20	-16.99	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT80 5775 MHz
Remark:

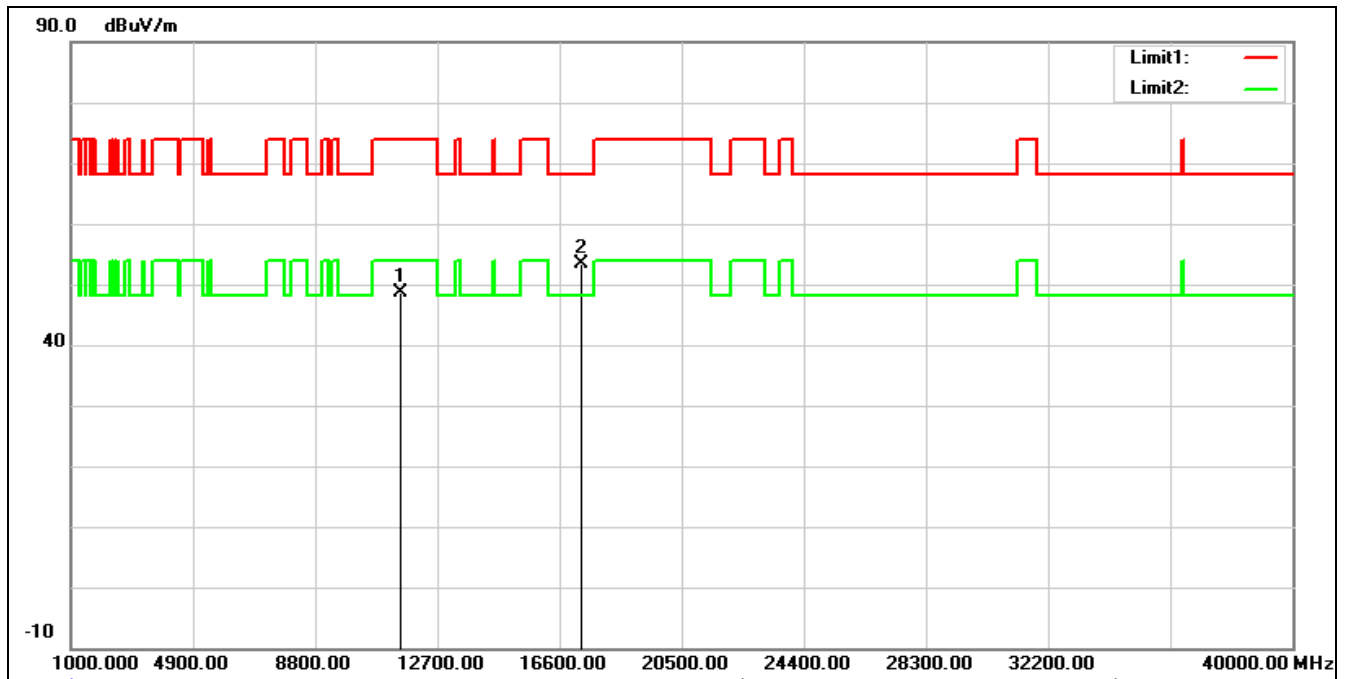

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.73	14.92	48.65	74.00	-25.35	peak
2*	17325.000	31.19	22.20	53.39	68.20	-14.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			

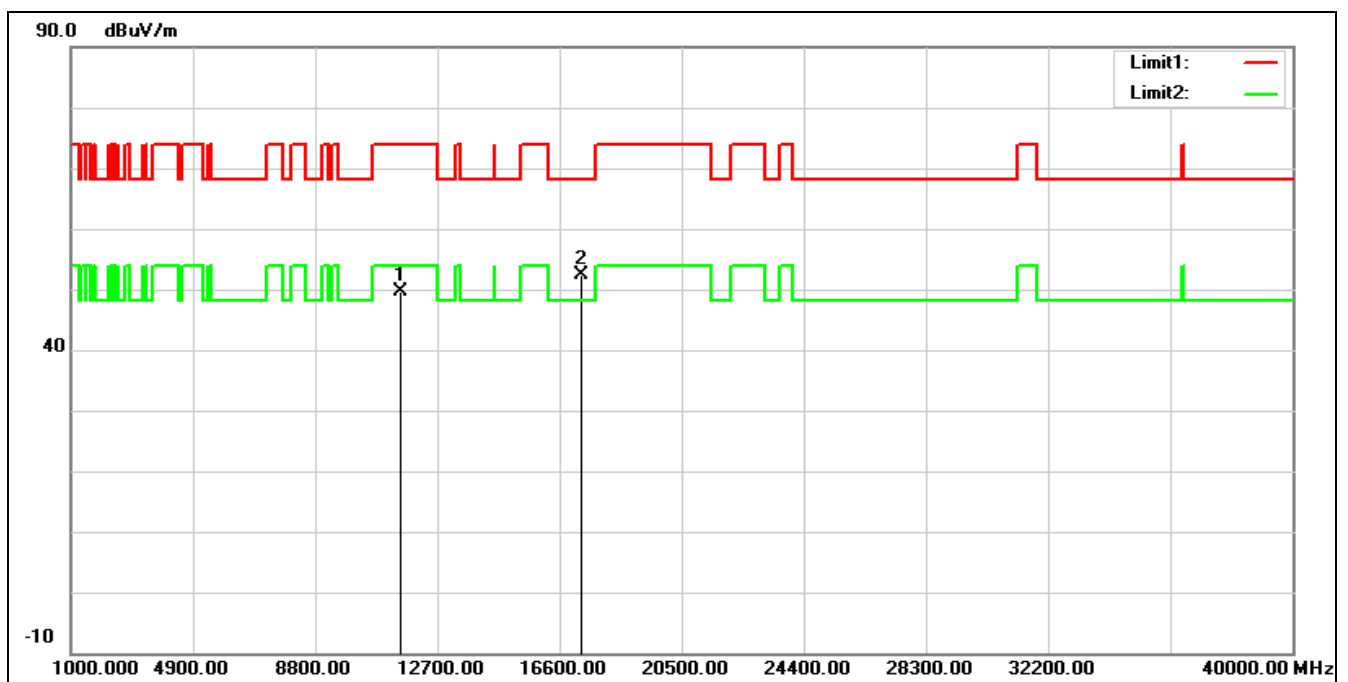


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	34.60	14.92	49.52	74.00	-24.48	peak
2*	17325.000	30.08	22.20	52.28	68.20	-15.92	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT160 5250 MHz

Remark:

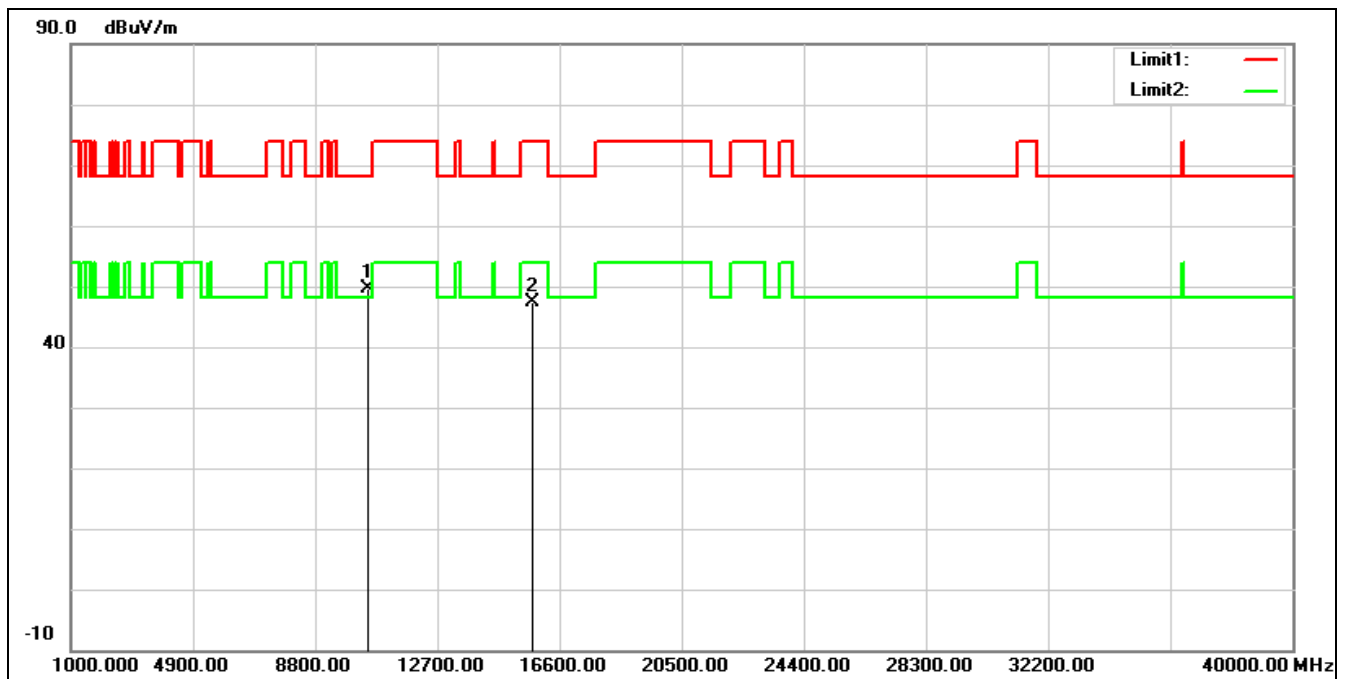


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	35.99	13.60	49.59	68.20	-18.61	peak
2	15750.000	30.74	16.55	47.29	74.00	-26.71	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT160 5250 MHz
Remark:

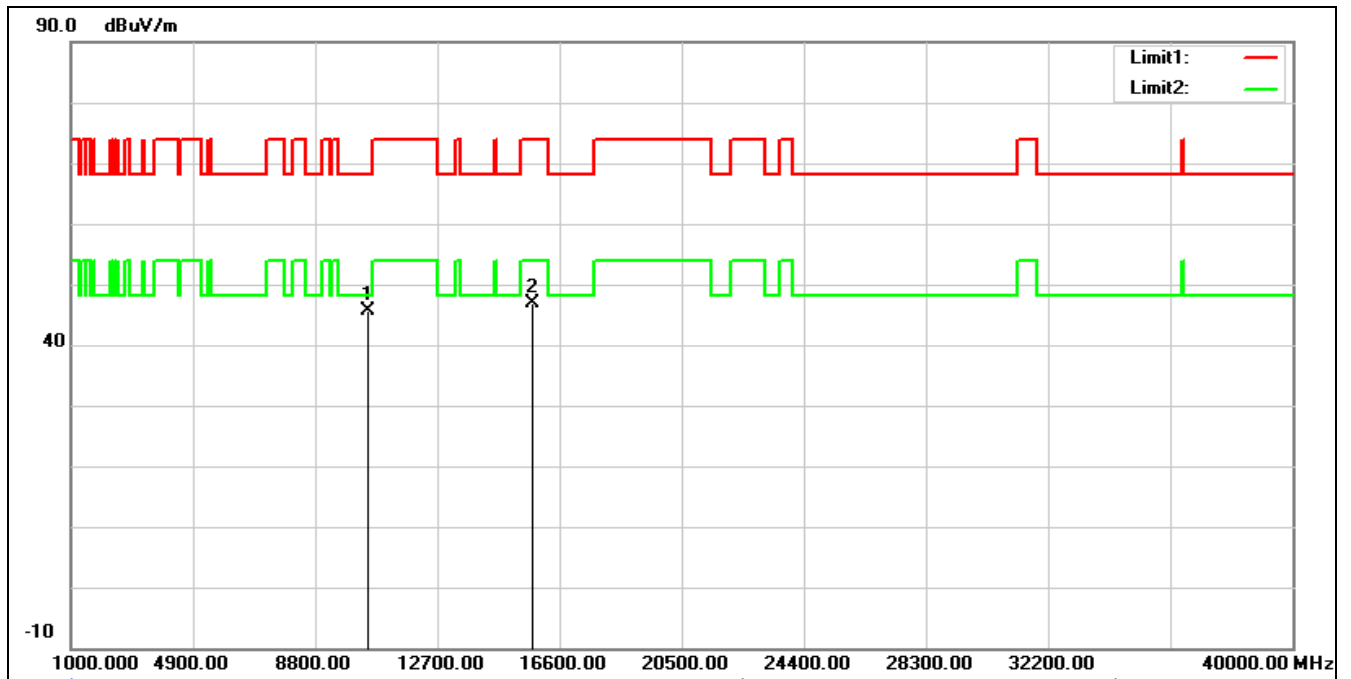


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	32.01	13.60	45.61	68.20	-22.59	peak
2	15750.000	30.27	16.55	46.82	74.00	-27.18	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT160 5570 MHz
Remark:

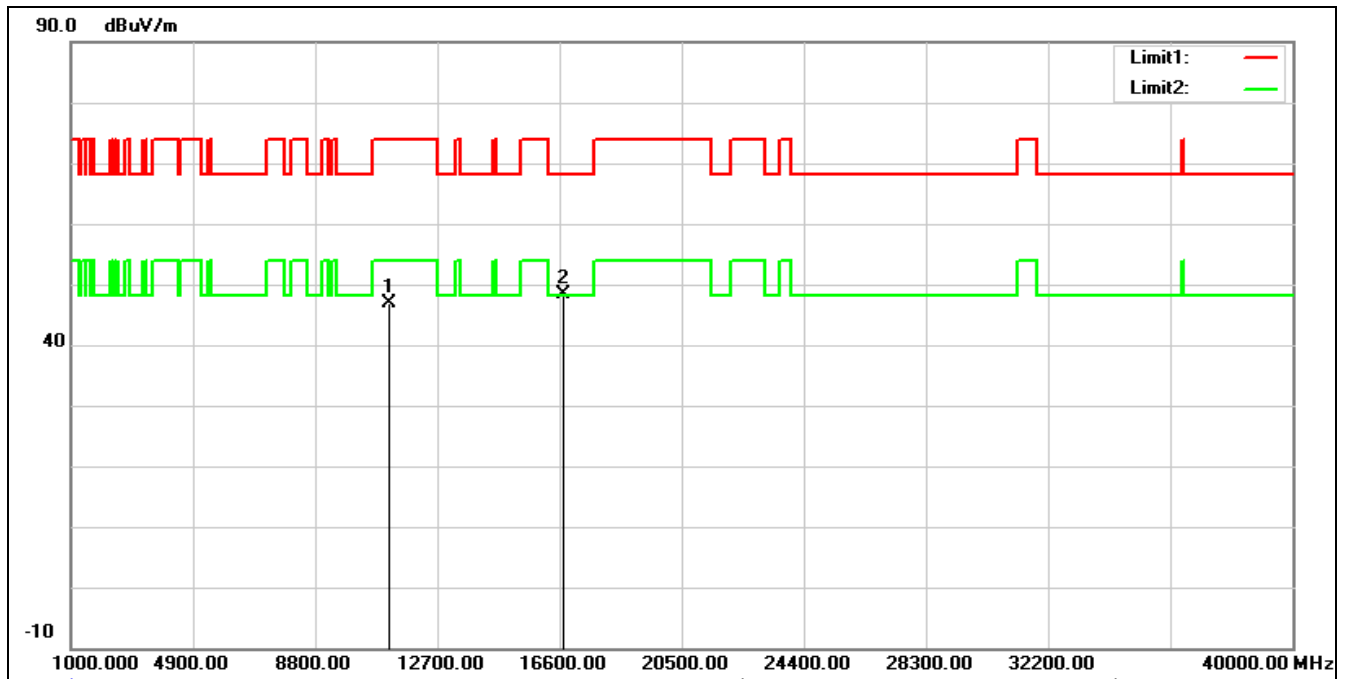


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	32.35	14.47	46.82	74.00	-27.18	peak
2*	16710.000	30.23	18.12	48.35	68.20	-19.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			

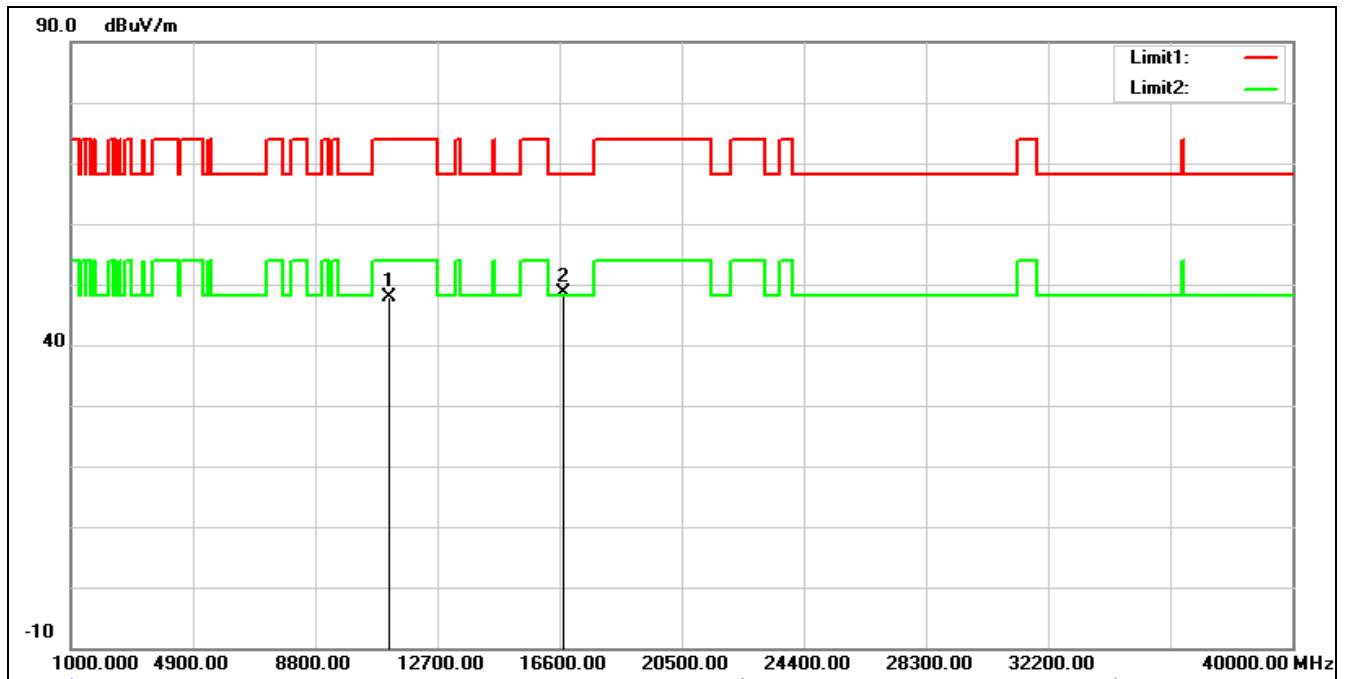

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.47	14.47	47.94	74.00	-26.06	peak
2*	16710.000	30.52	18.12	48.64	68.20	-19.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5180 MHz		
Remark:			

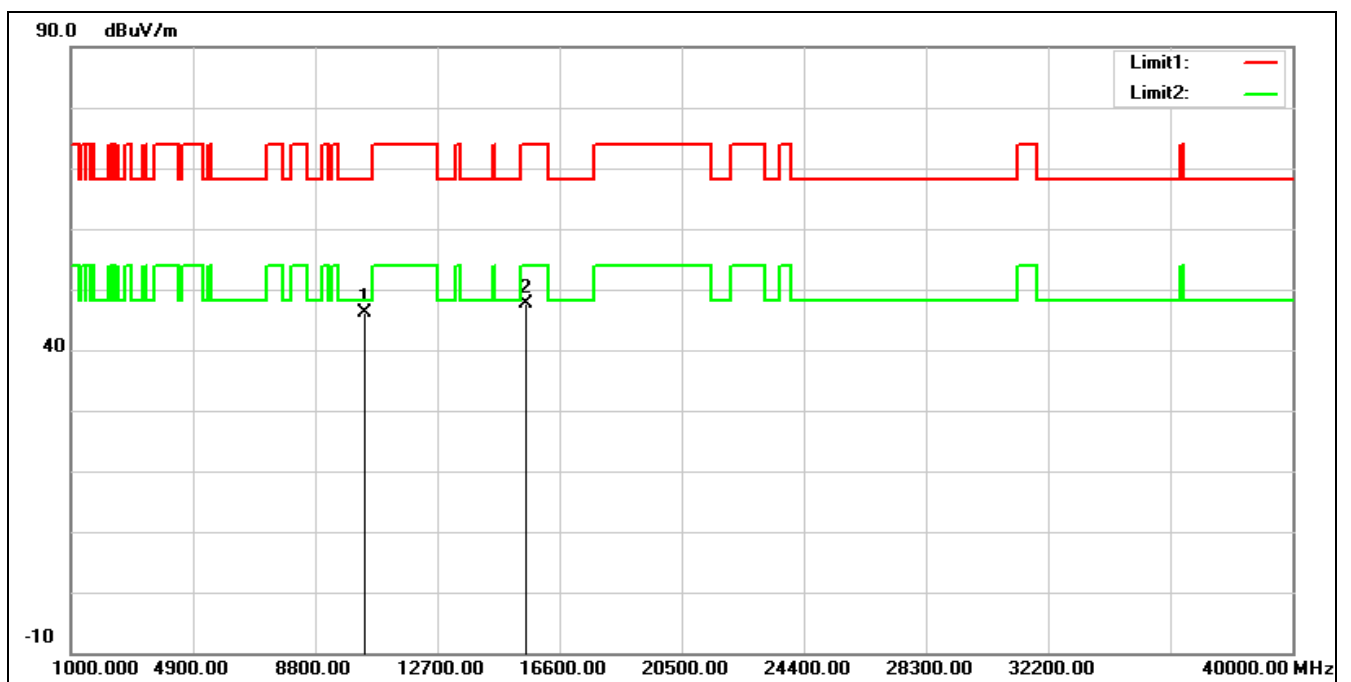


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	32.88	13.36	46.24	68.20	-21.96	peak
2	15540.000	30.93	16.77	47.70	74.00	-26.30	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5180 MHz

Remark:

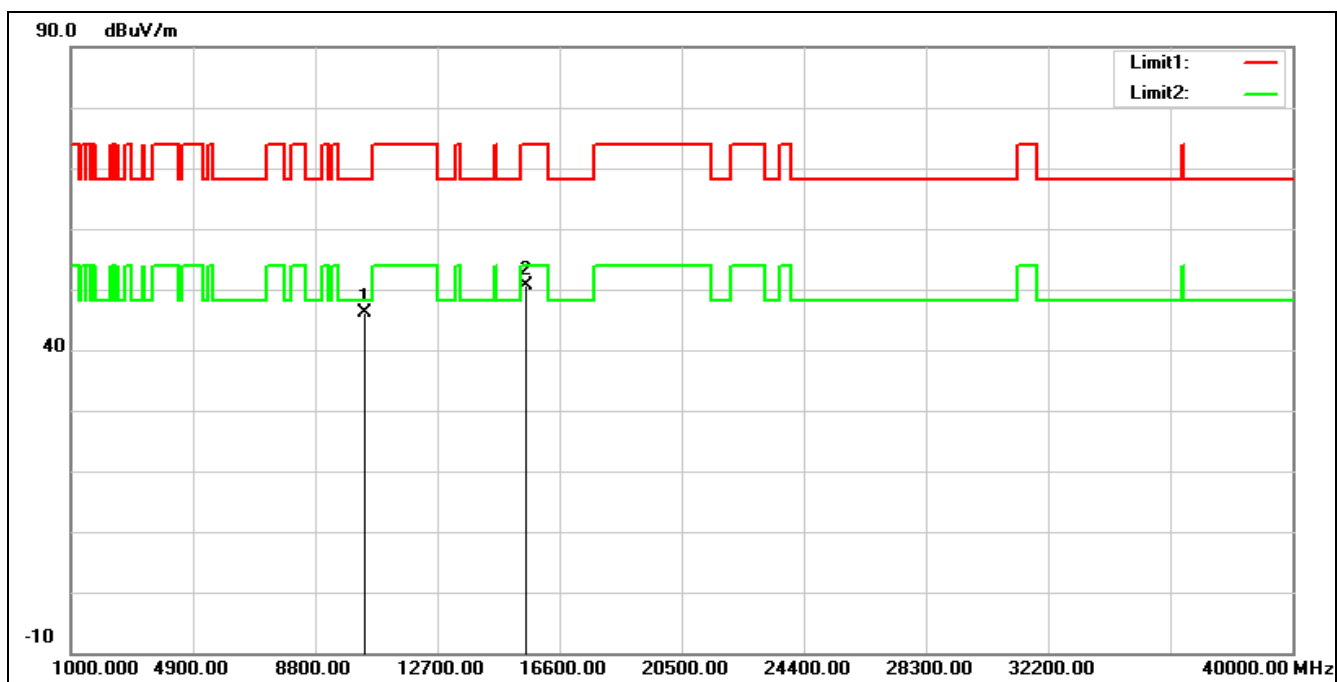


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	32.87	13.36	46.23	68.20	-21.97	peak
2	15540.000	33.93	16.77	50.70	74.00	-23.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5200 MHz		
Remark:			

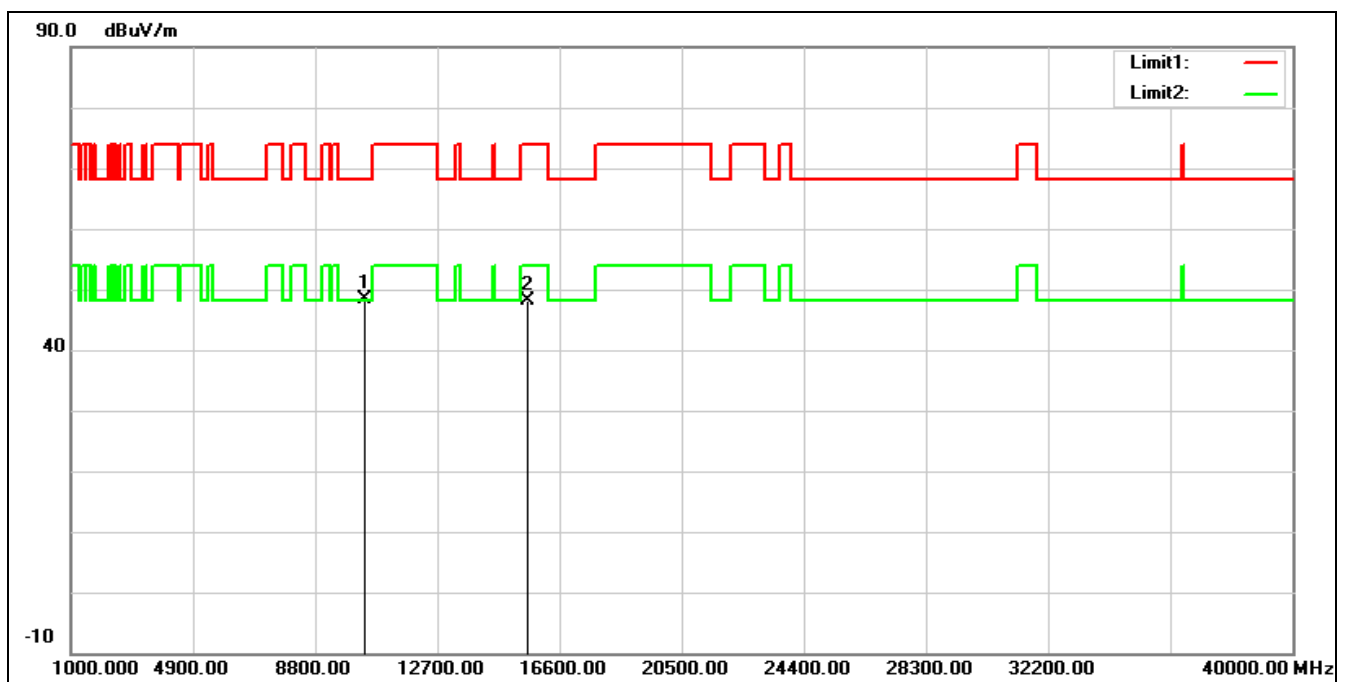


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.75	13.51	48.26	68.20	-19.94	peak
2	15600.000	31.47	16.66	48.13	74.00	-25.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5200 MHz		
Remark:			

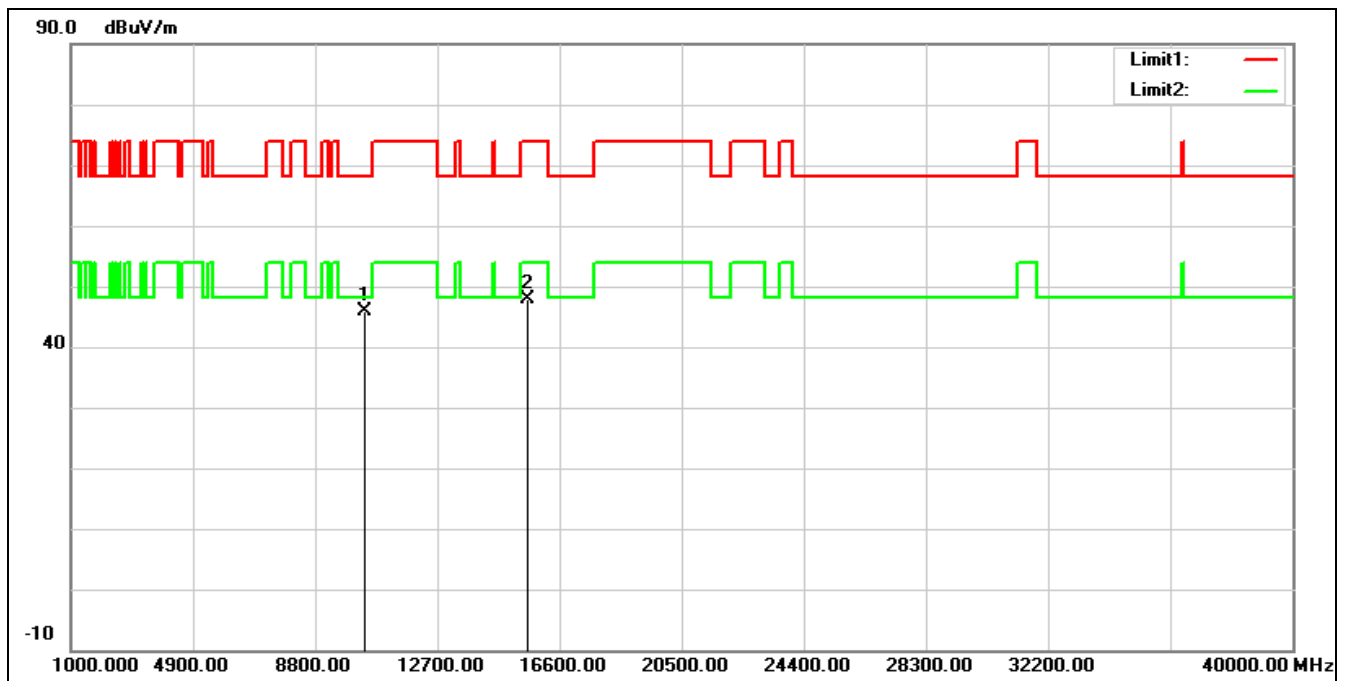

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	32.43	13.51	45.94	68.20	-22.26	peak
2	15600.000	31.18	16.66	47.84	74.00	-26.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5240 MHz		
Remark:			

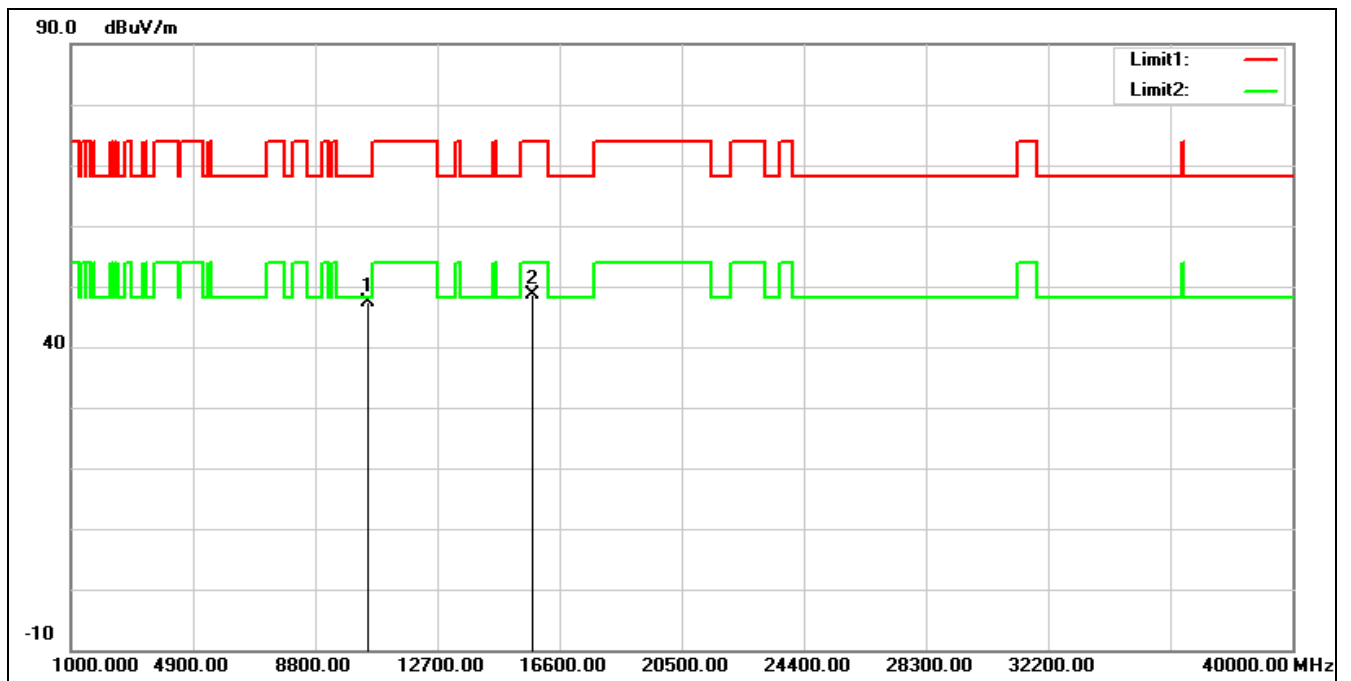


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	33.83	13.58	47.41	68.20	-20.79	peak
2	15720.000	32.03	16.57	48.60	74.00	-25.40	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5240 MHz

Remark:

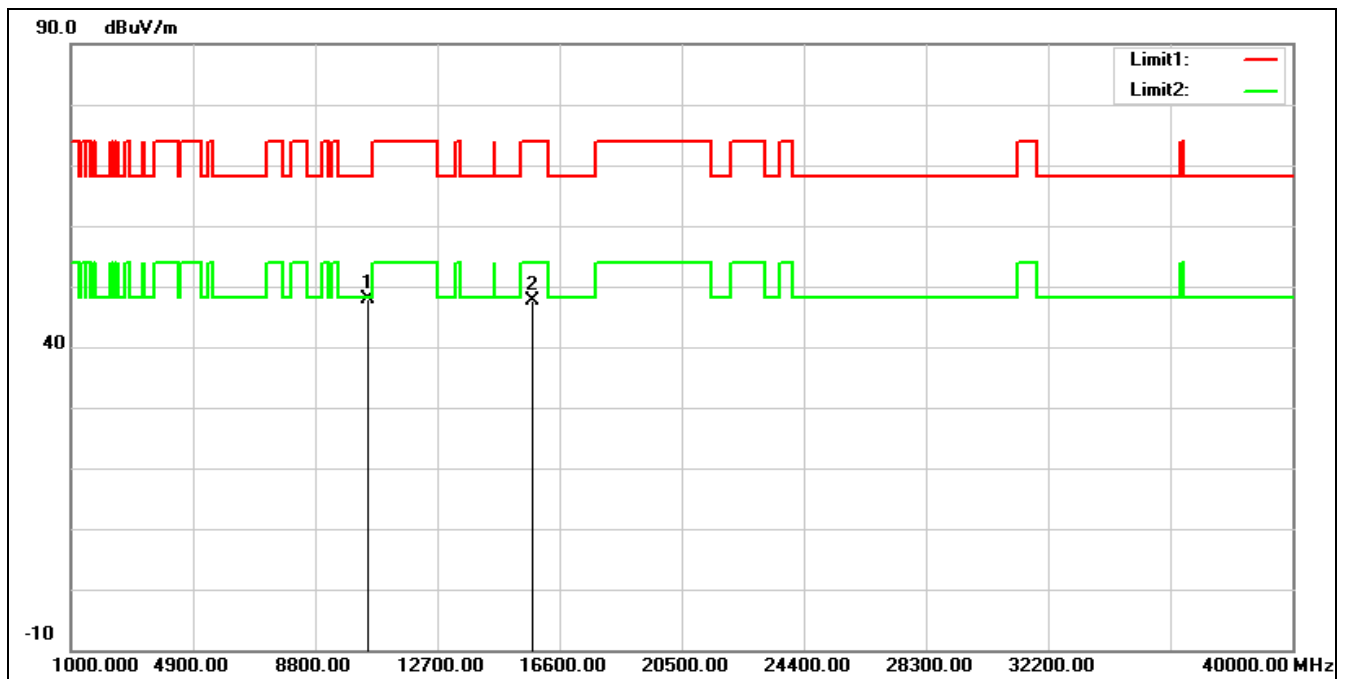

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	34.26	13.58	47.84	68.20	-20.36	peak
2	15720.000	31.00	16.57	47.57	74.00	-26.43	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5260 MHz
Remark:

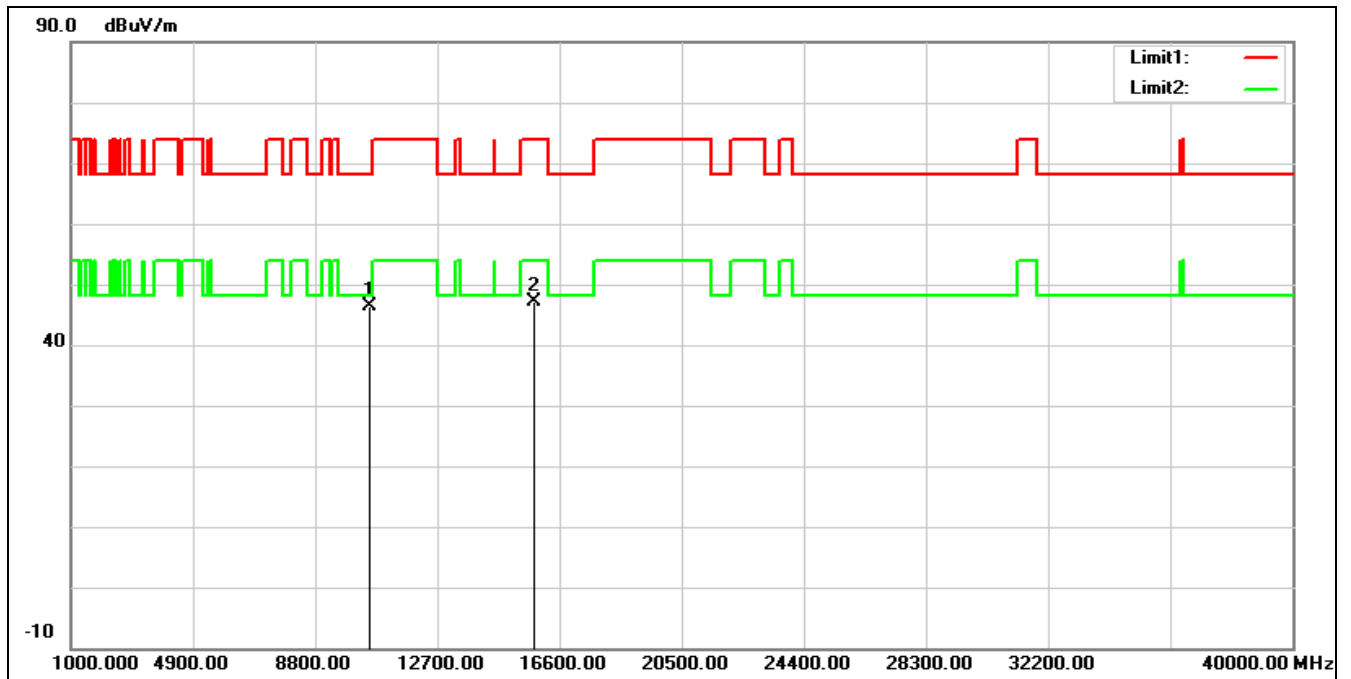


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	32.84	13.61	46.45	68.20	-21.75	peak
2	15780.000	30.68	16.52	47.20	74.00	-26.80	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5260 MHz

Remark:

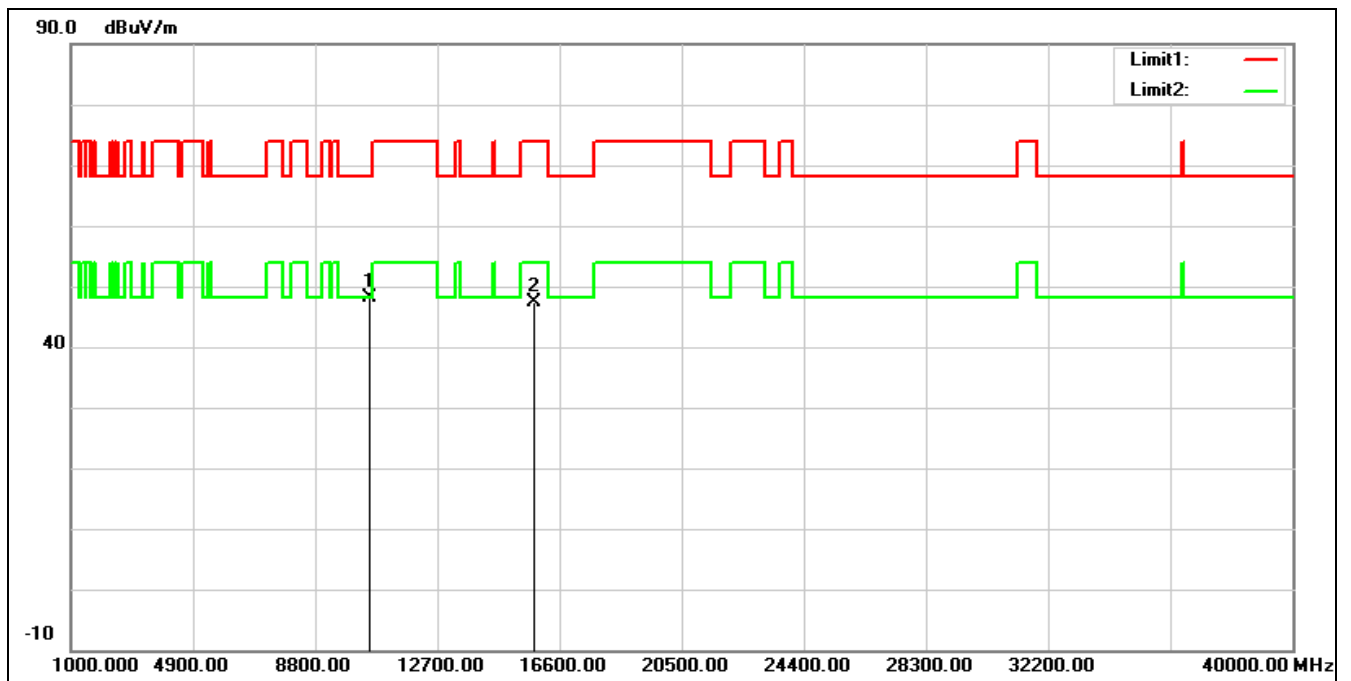


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.58	13.61	48.19	68.20	-20.01	peak
2	15780.000	30.86	16.52	47.38	74.00	-26.62	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5280 MHz

Remark:

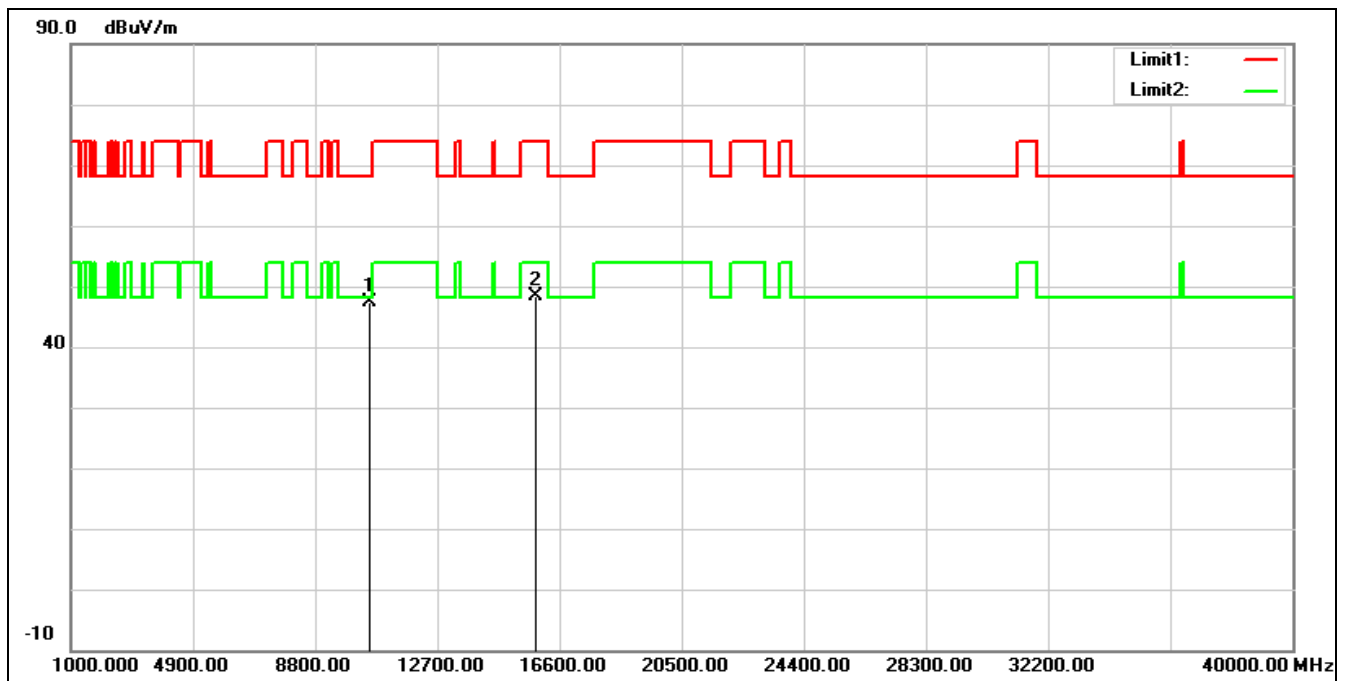


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	33.83	13.63	47.46	68.20	-20.74	peak
2	15840.000	32.02	16.40	48.42	74.00	-25.58	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5280 MHz

Remark:

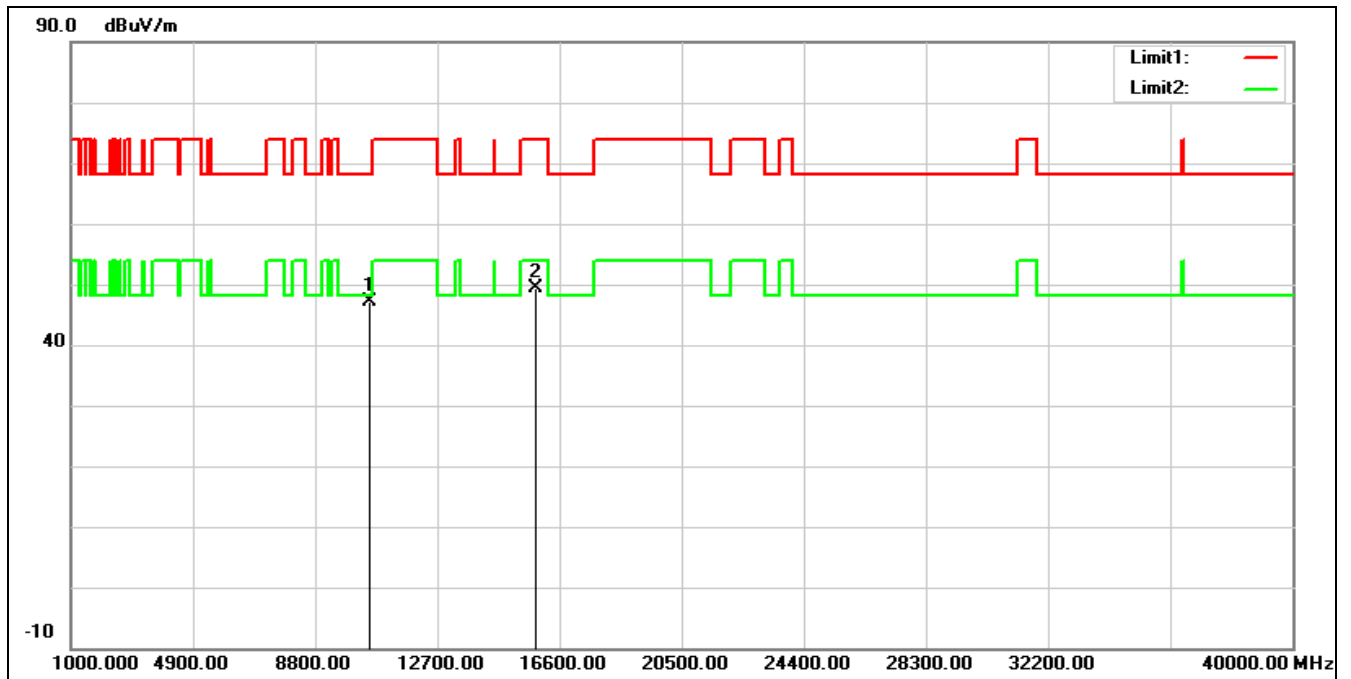


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	33.49	13.63	47.12	68.20	-21.08	peak
2	15840.000	32.88	16.40	49.28	74.00	-24.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5320 MHz		
Remark:			

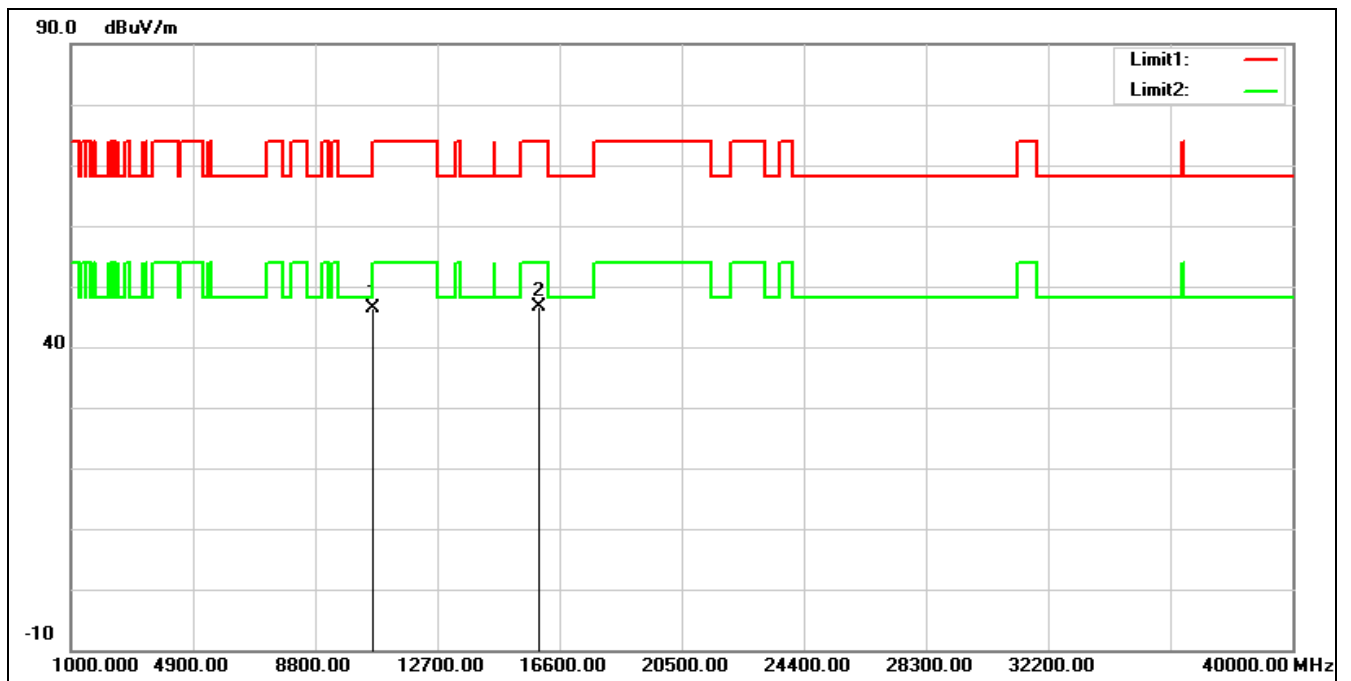

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.69	13.70	46.39	74.00	-27.61	peak
2*	15960.000	30.54	16.06	46.60	74.00	-27.40	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5320 MHz		
Remark:			

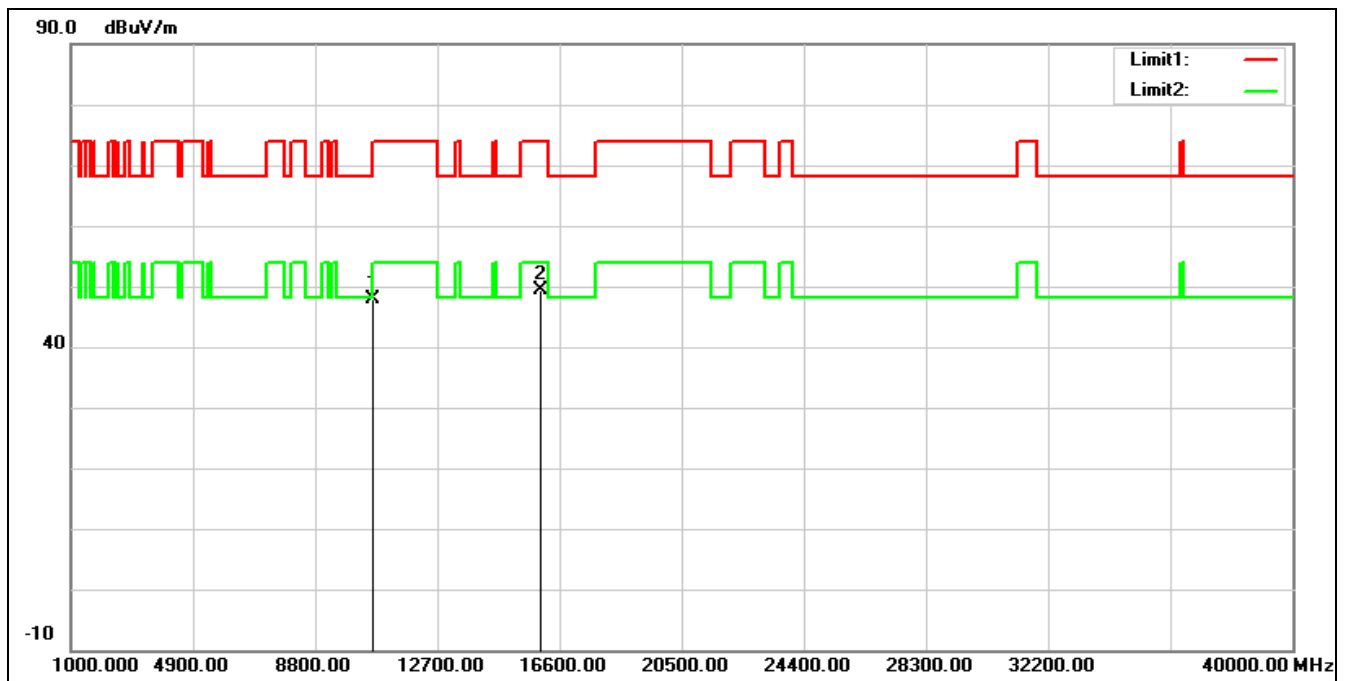


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.20	13.70	47.90	74.00	-26.10	peak
2*	15960.000	33.32	16.06	49.38	74.00	-24.62	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5500 MHz

Remark:

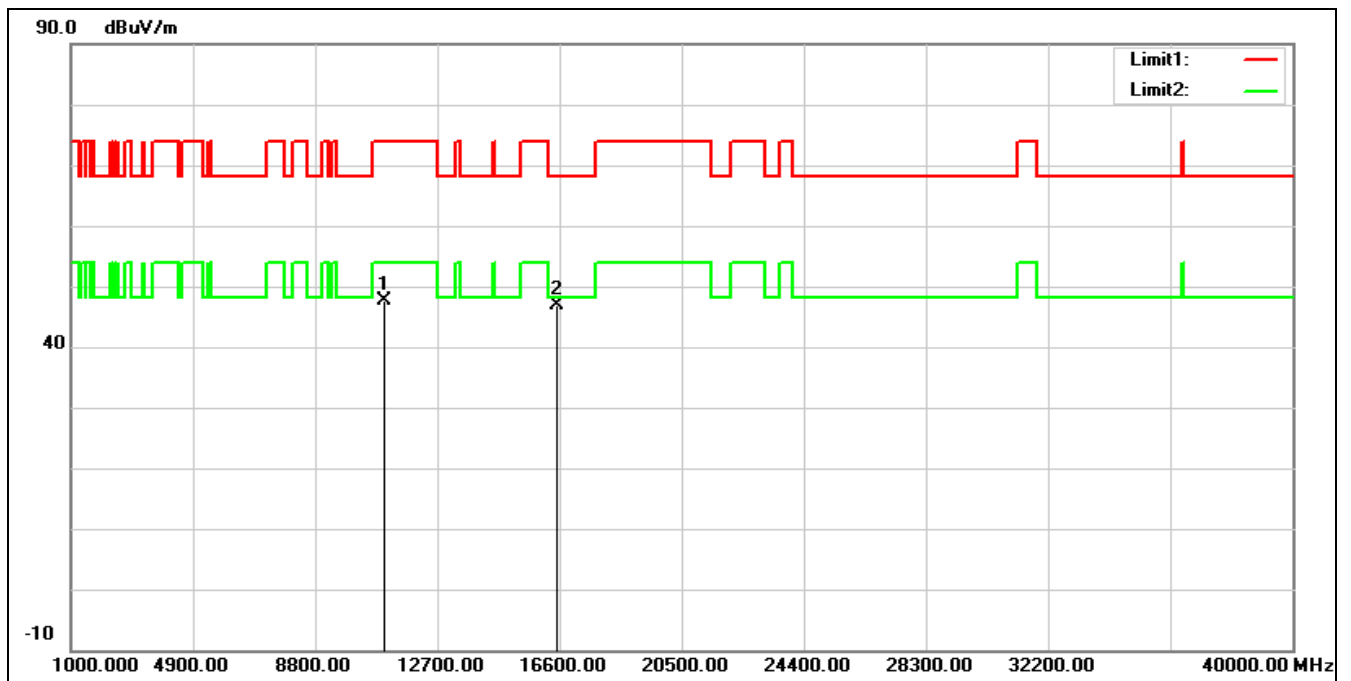


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.38	14.30	47.68	74.00	-26.32	peak
2*	16500.000	30.16	16.69	46.85	68.20	-21.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5500 MHz		
Remark:			

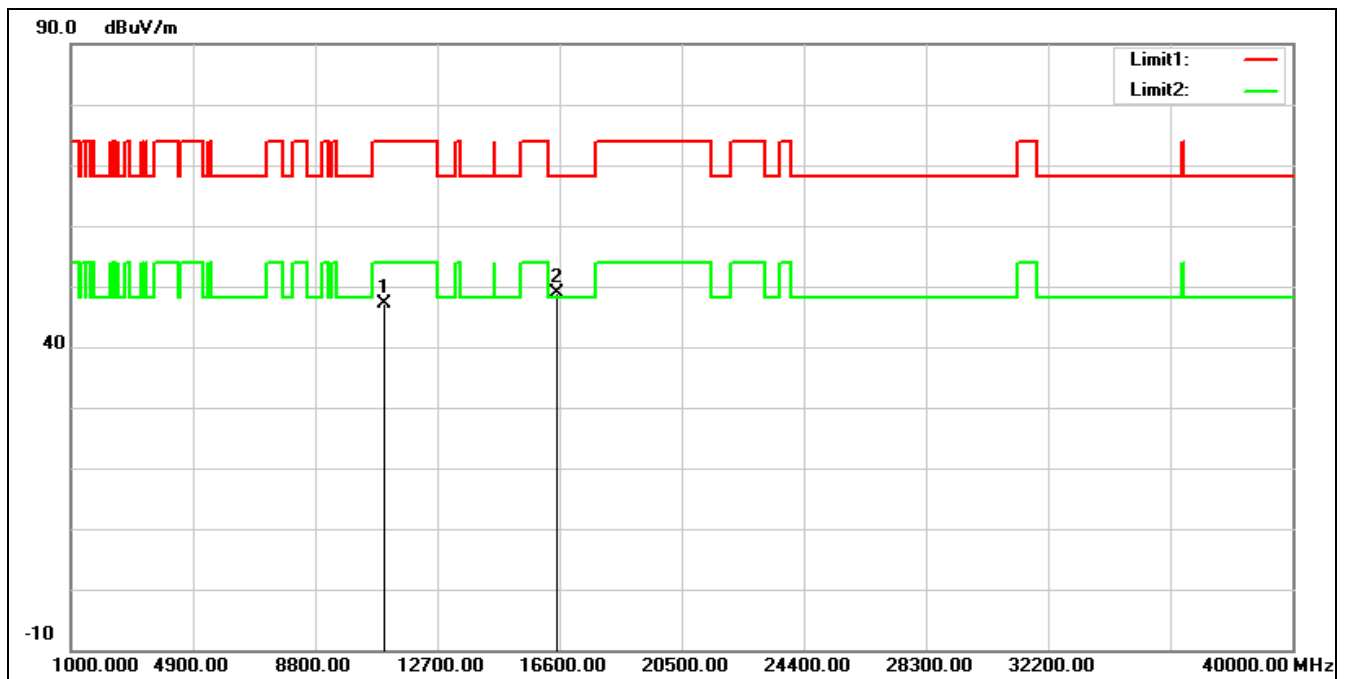


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.92	14.30	47.22	74.00	-26.78	peak
2*	16500.000	32.13	16.69	48.82	68.20	-19.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5560 MHz		
Remark:			

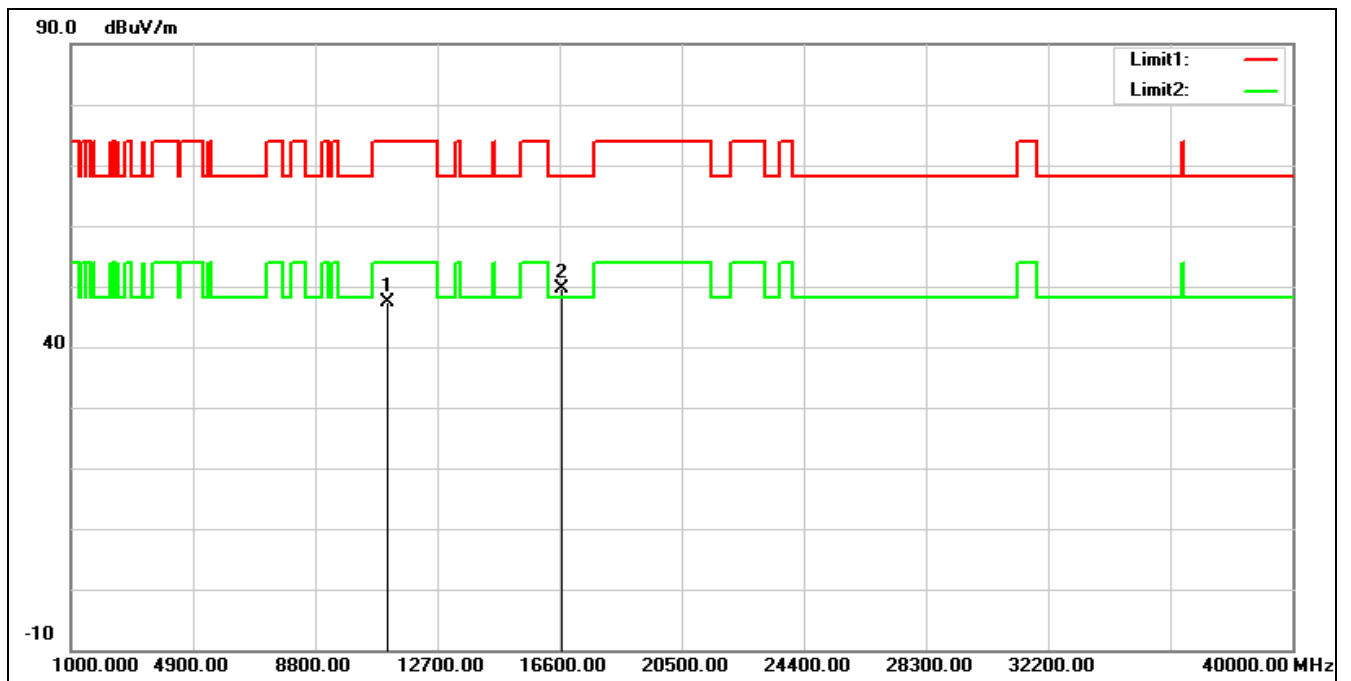

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.75	14.52	47.27	74.00	-26.73	peak
2*	16680.000	31.78	17.91	49.69	68.20	-18.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5560 MHz		
Remark:			

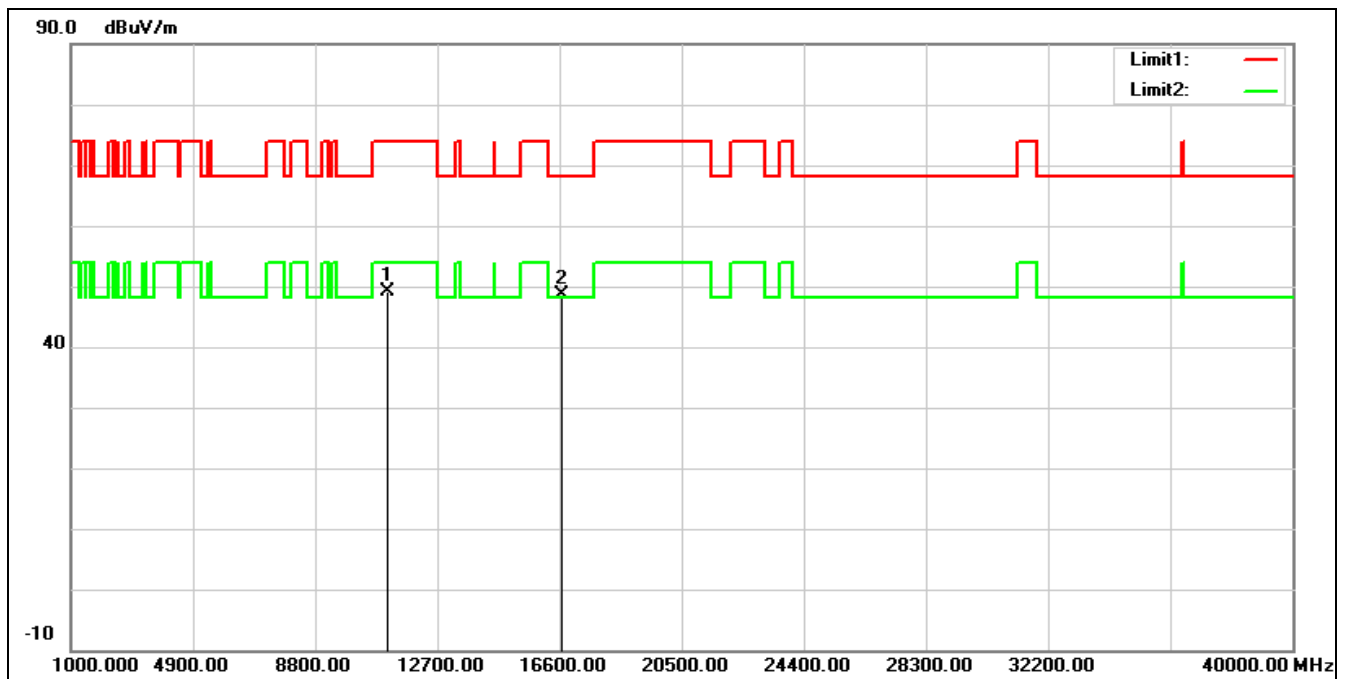


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.57	14.52	49.09	74.00	-24.91	peak
2*	16680.000	30.65	17.91	48.56	68.20	-19.64	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5700 MHz

Remark:

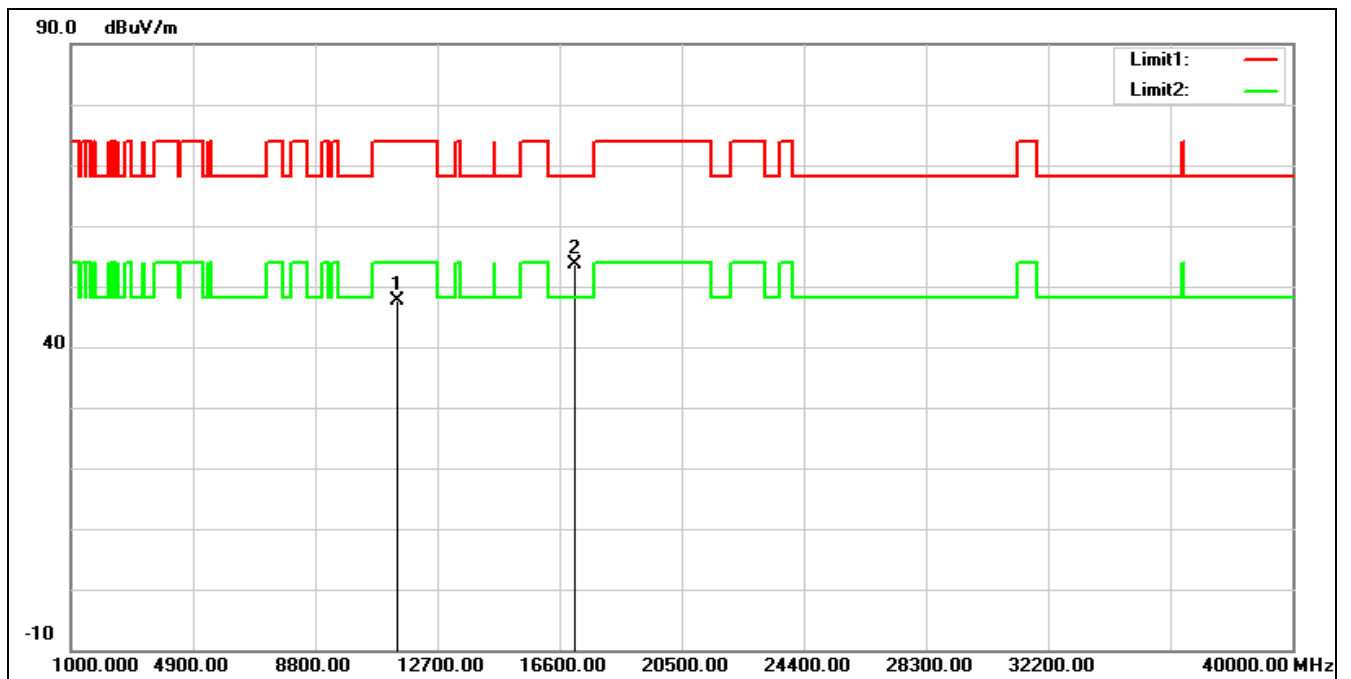

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.87	14.66	47.53	74.00	-26.47	peak
2*	17100.000	32.96	20.57	53.53	68.20	-14.67	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5700 MHz		
Remark:			

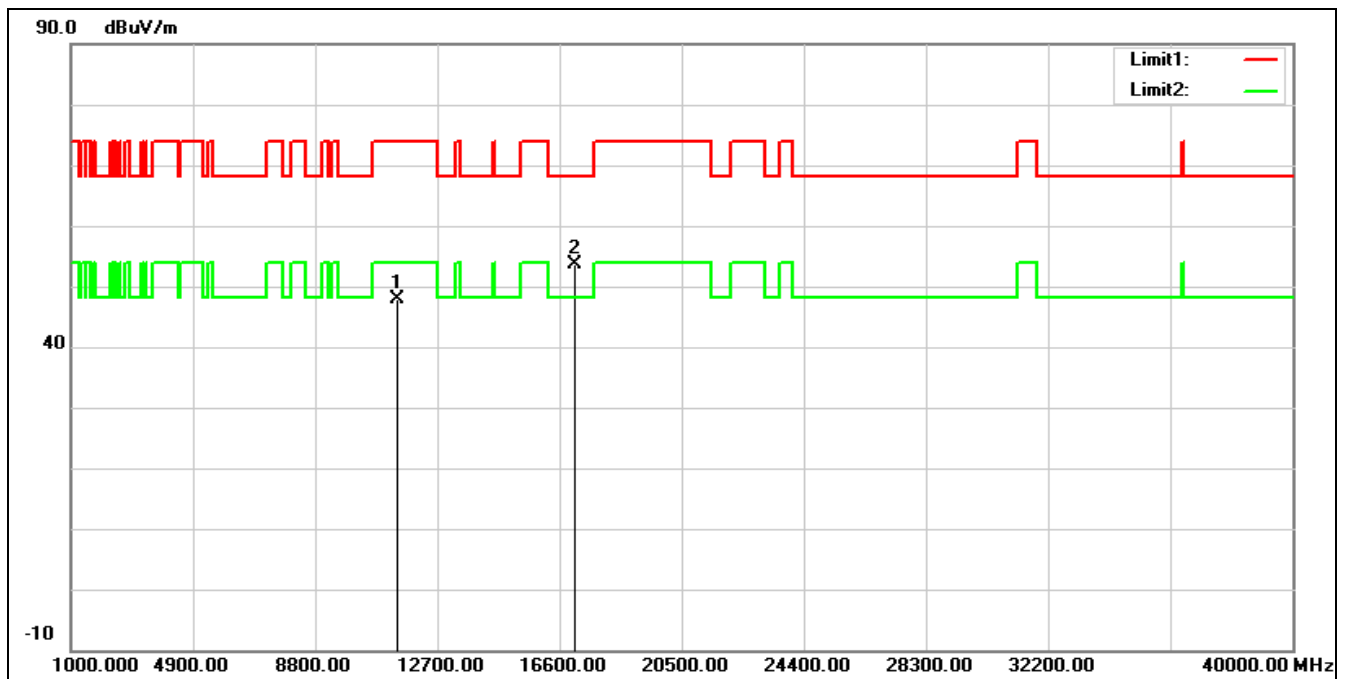


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.12	14.66	47.78	74.00	-26.22	peak
2*	17100.000	33.16	20.57	53.73	68.20	-14.47	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5720 MHz

Remark:

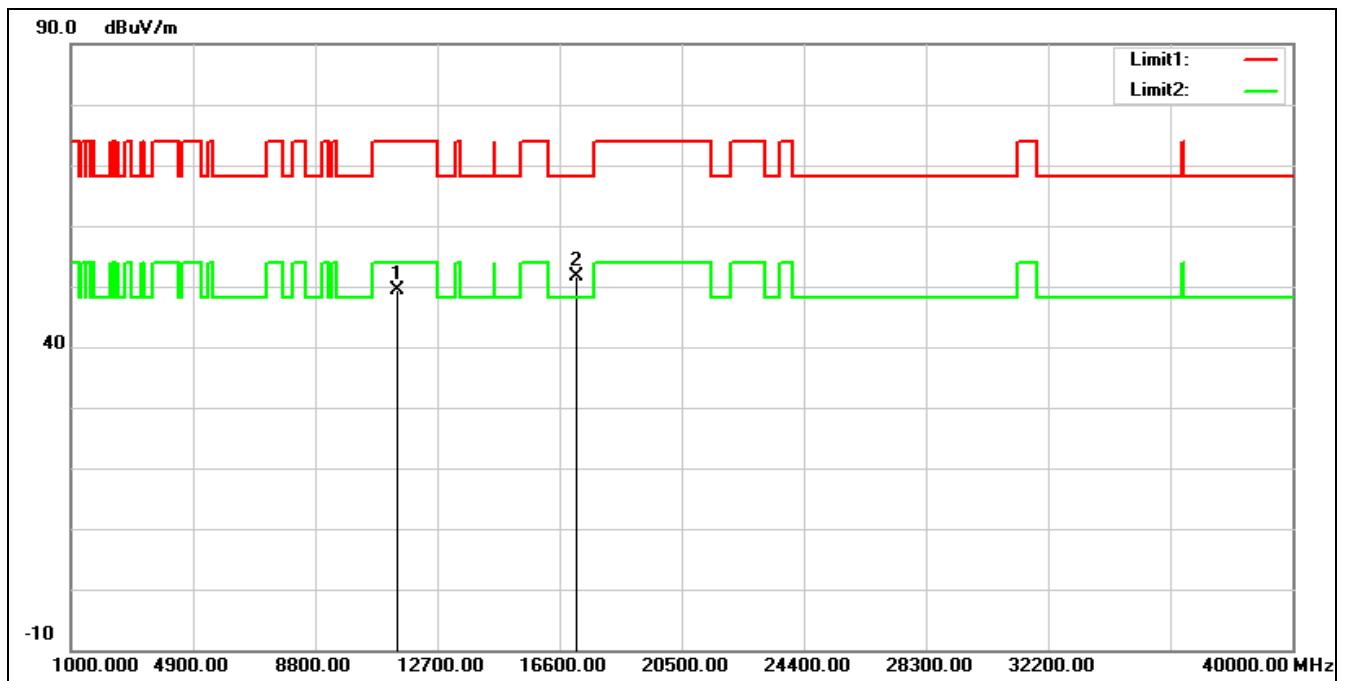


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.51	14.84	49.35	74.00	-24.65	peak
2*	17160.000	30.58	20.96	51.54	68.20	-16.66	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5720 MHz

Remark:

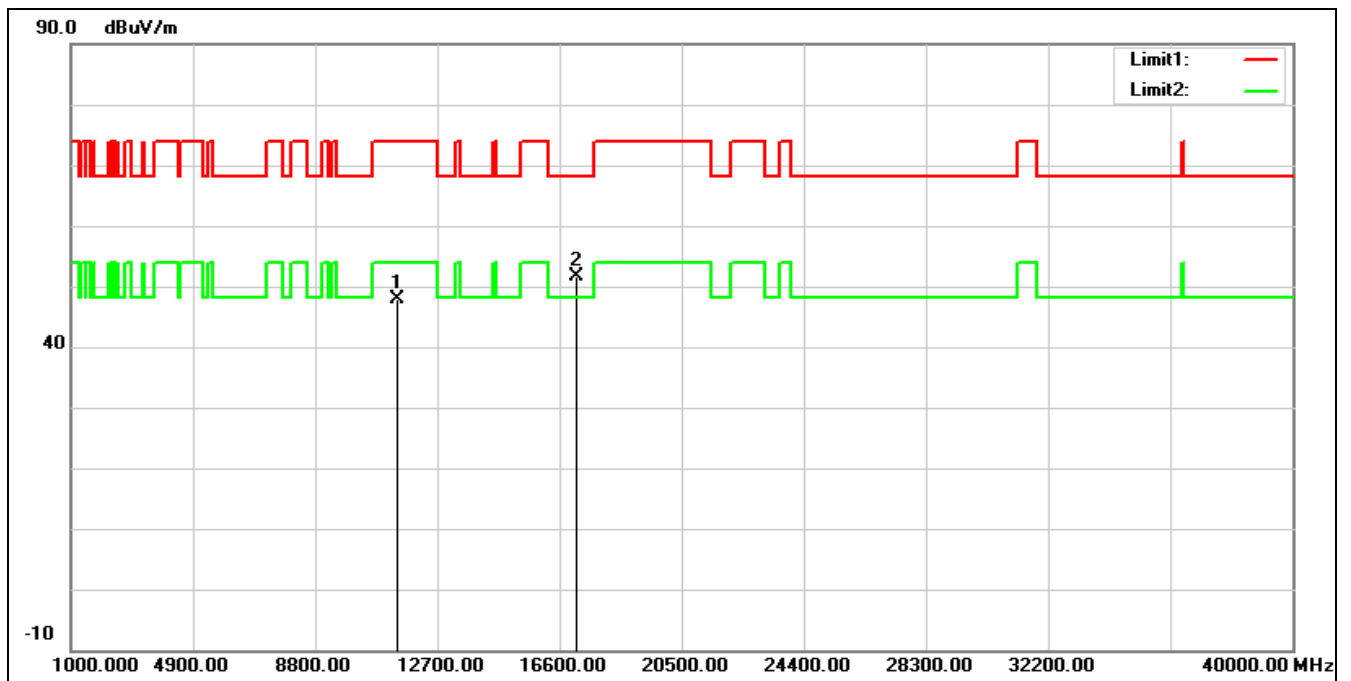


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	33.13	14.84	47.97	74.00	-26.03	peak
2*	17160.000	30.72	20.96	51.68	68.20	-16.52	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5745 MHz
Remark:

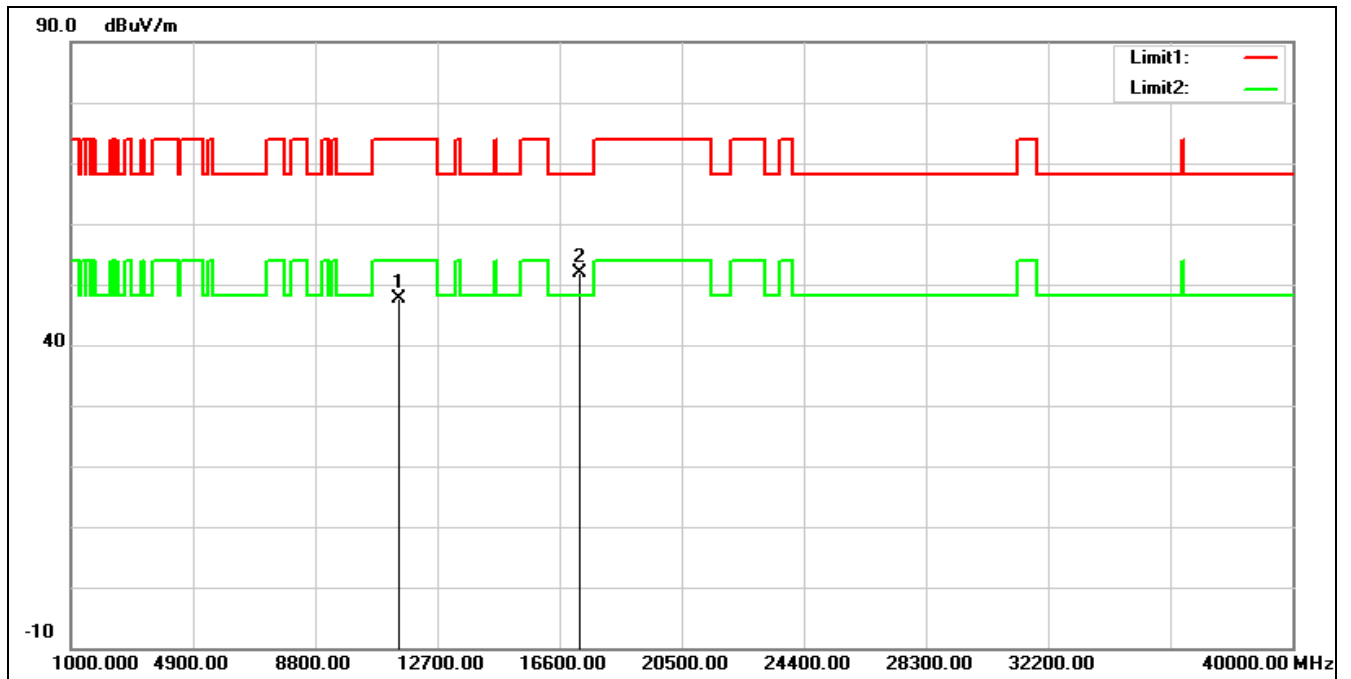


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.67	15.07	47.74	74.00	-26.26	peak
2*	17235.000	30.37	21.53	51.90	68.20	-16.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5745 MHz		
Remark:			

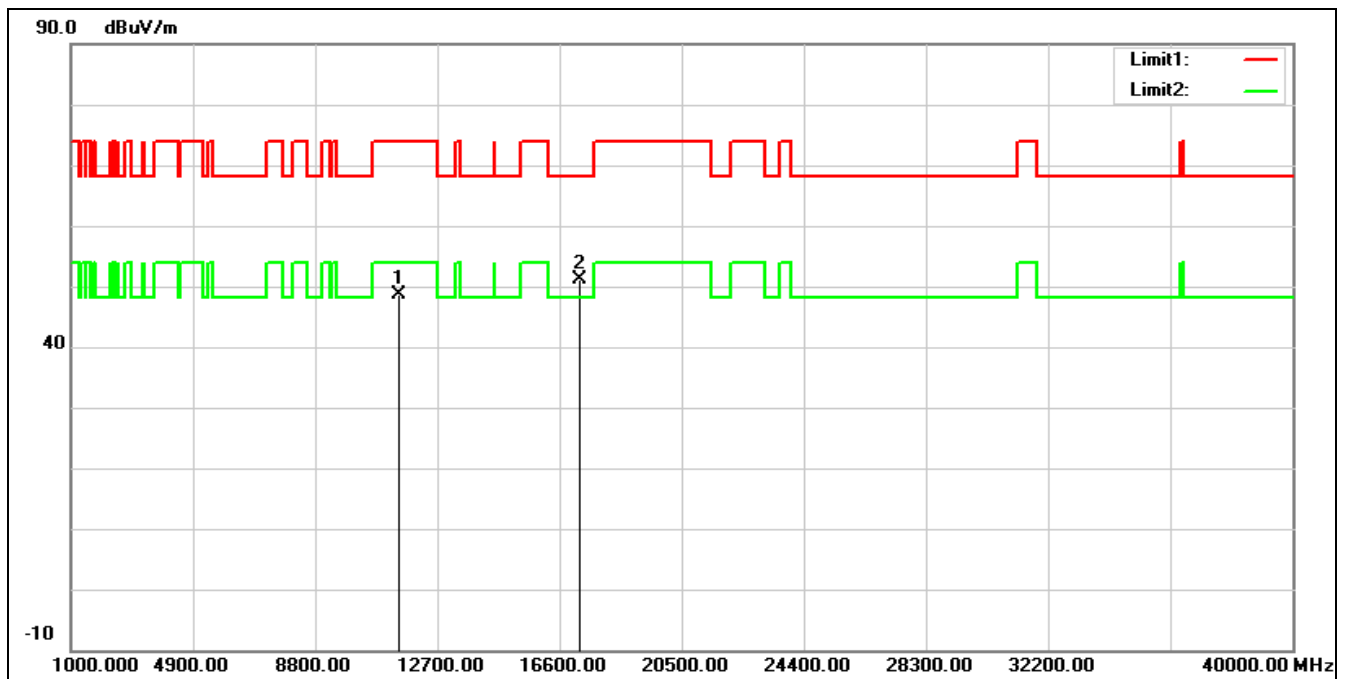


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.47	15.07	48.54	74.00	-25.46	peak
2*	17235.000	29.72	21.53	51.25	68.20	-16.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

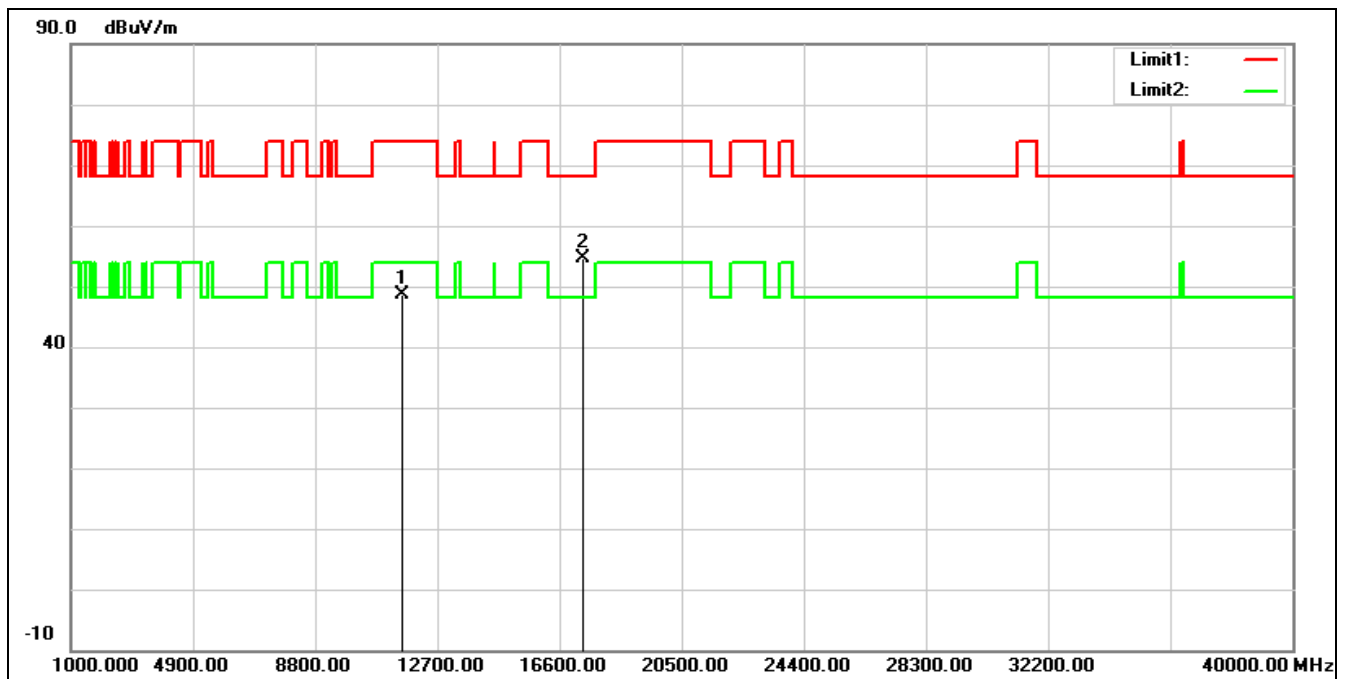


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.90	14.84	48.74	74.00	-25.26	peak
2*	17355.000	32.17	22.35	54.52	68.20	-13.68	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5785 MHz
Remark:

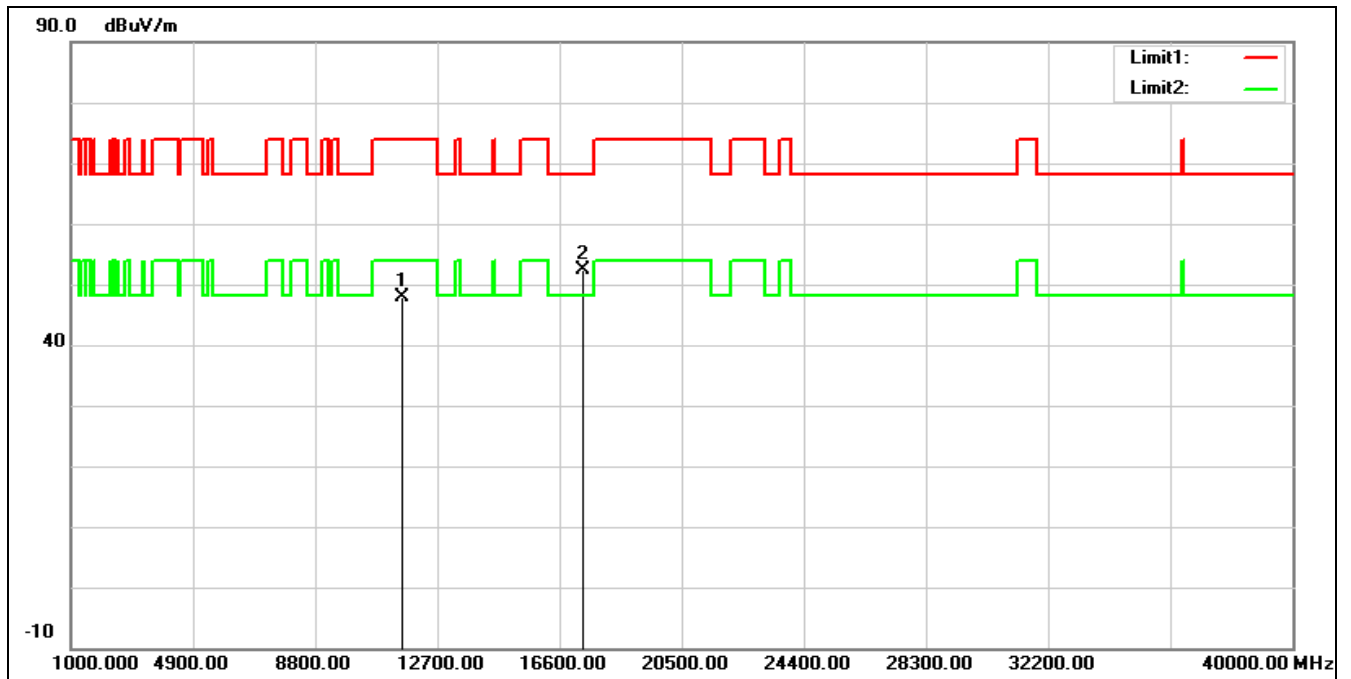

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.08	14.84	47.92	74.00	-26.08	peak
2*	17355.000	29.96	22.35	52.31	68.20	-15.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5825 MHz		
Remark:			

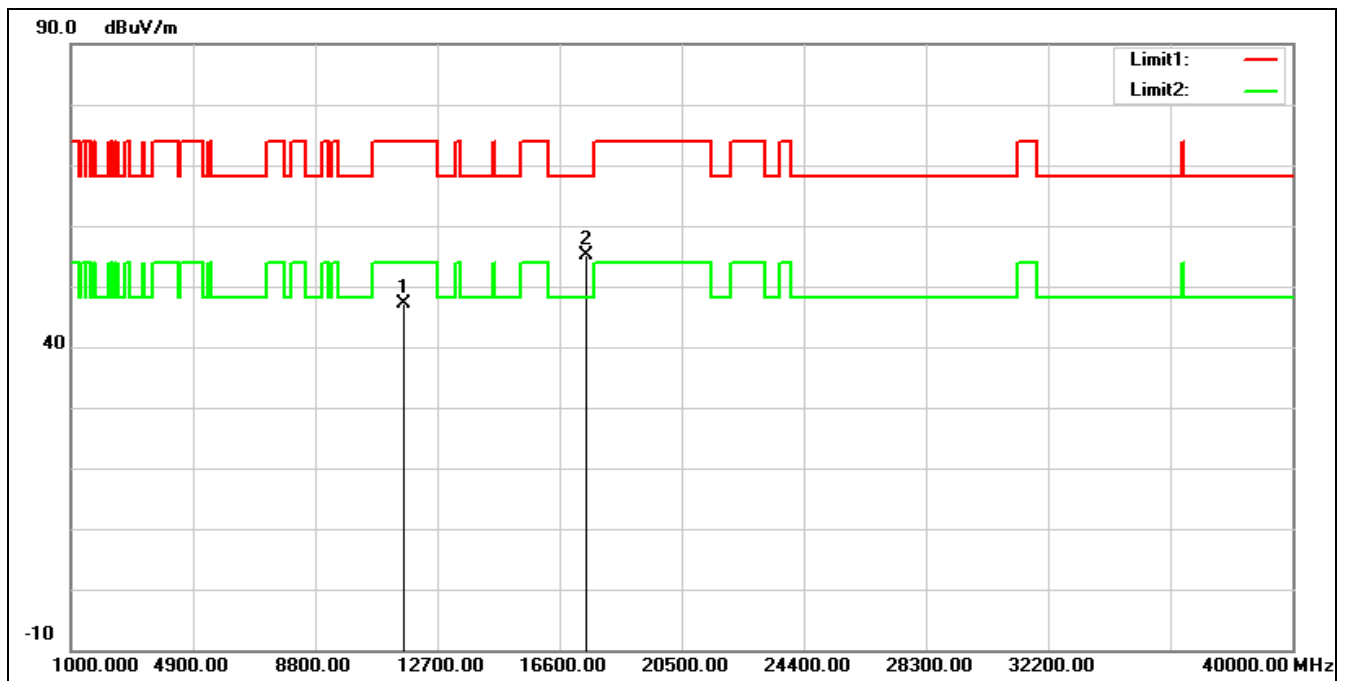


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	32.45	14.56	47.01	74.00	-26.99	peak
2*	17475.000	31.87	23.20	55.07	68.20	-13.13	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5825 MHz

Remark:

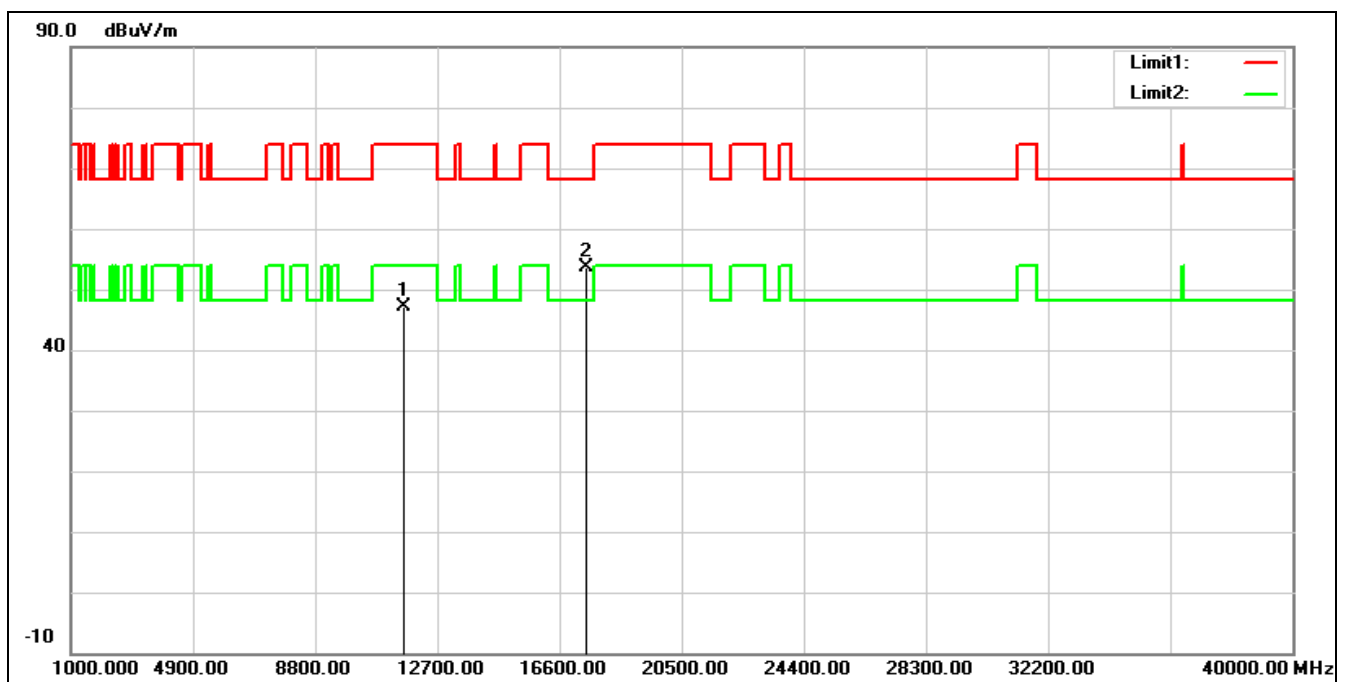


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	32.57	14.56	47.13	74.00	-26.87	peak
2*	17475.000	30.32	23.20	53.52	68.20	-14.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5190 MHz		
Remark:			

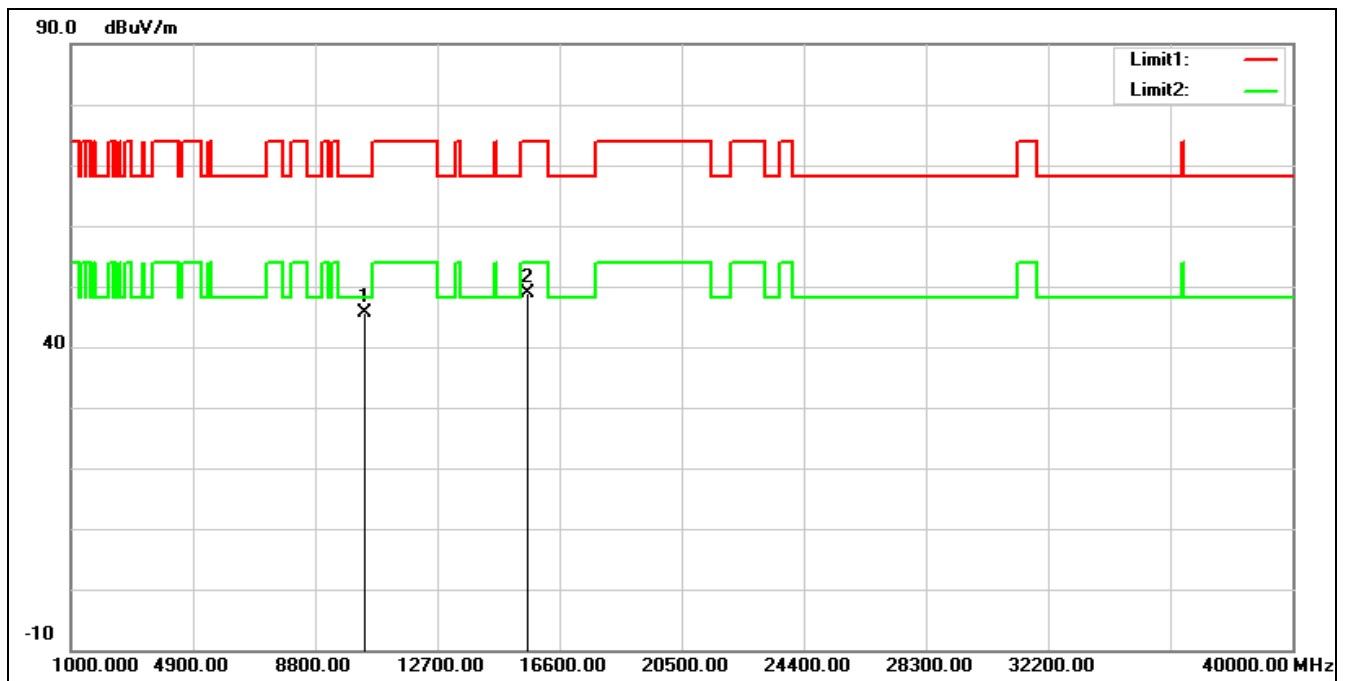

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	32.07	13.44	45.51	68.20	-22.69	peak
2	15570.000	32.14	16.72	48.86	74.00	-25.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5190 MHz		
Remark:			

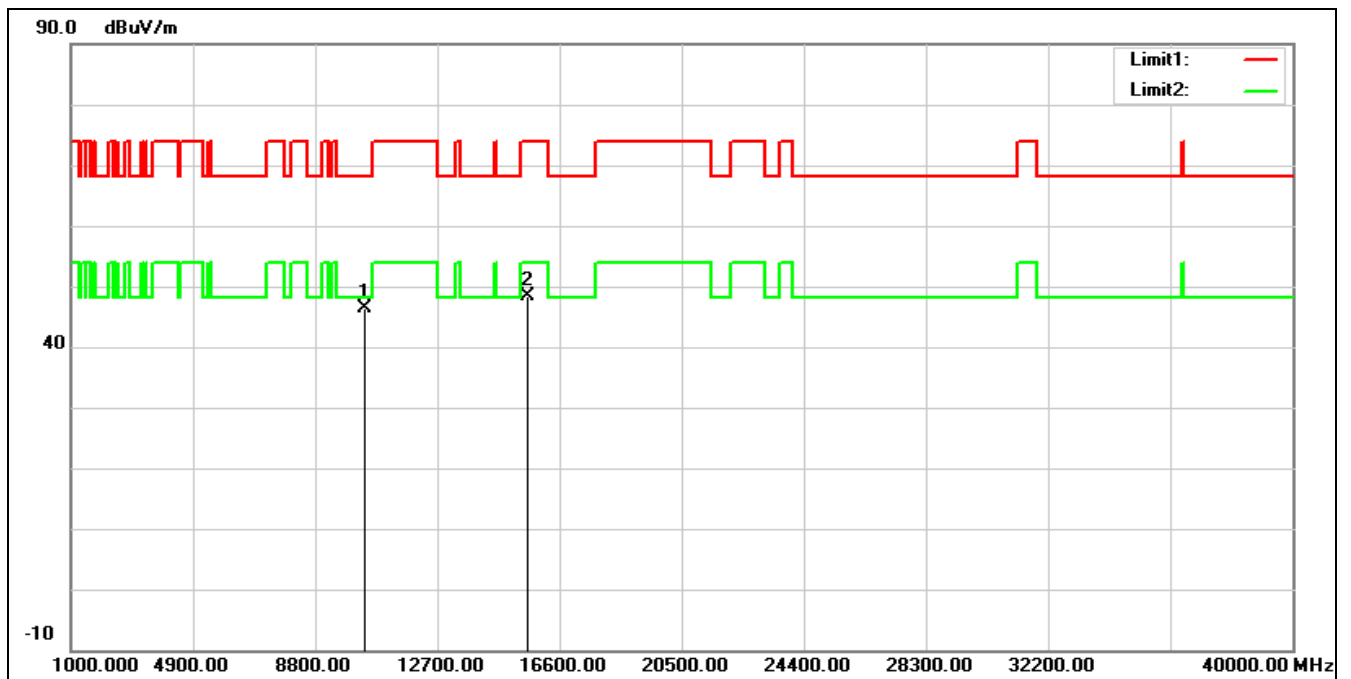


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	32.93	13.44	46.37	68.20	-21.83	peak
2	15570.000	31.77	16.72	48.49	74.00	-25.51	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT40 5230 MHz

Remark:

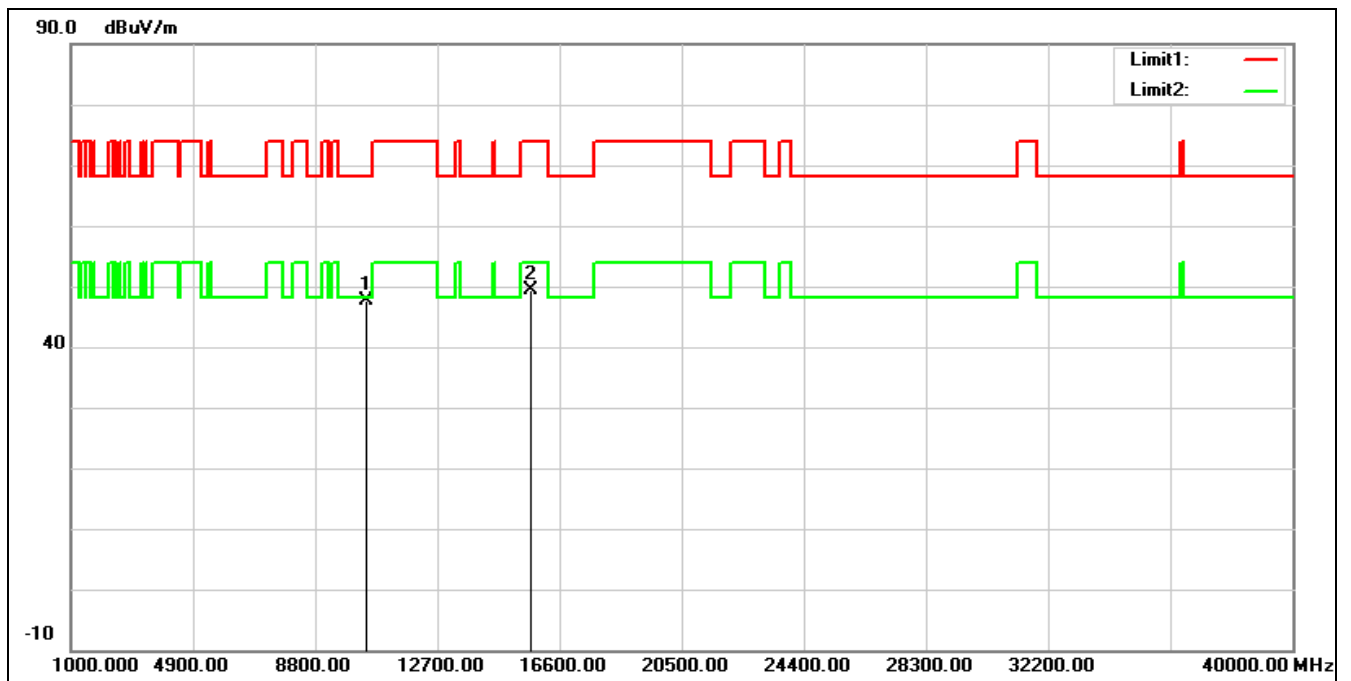


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	34.04	13.57	47.61	68.20	-20.59	peak
2	15690.000	32.77	16.59	49.36	74.00	-24.64	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5230 MHz
Remark:

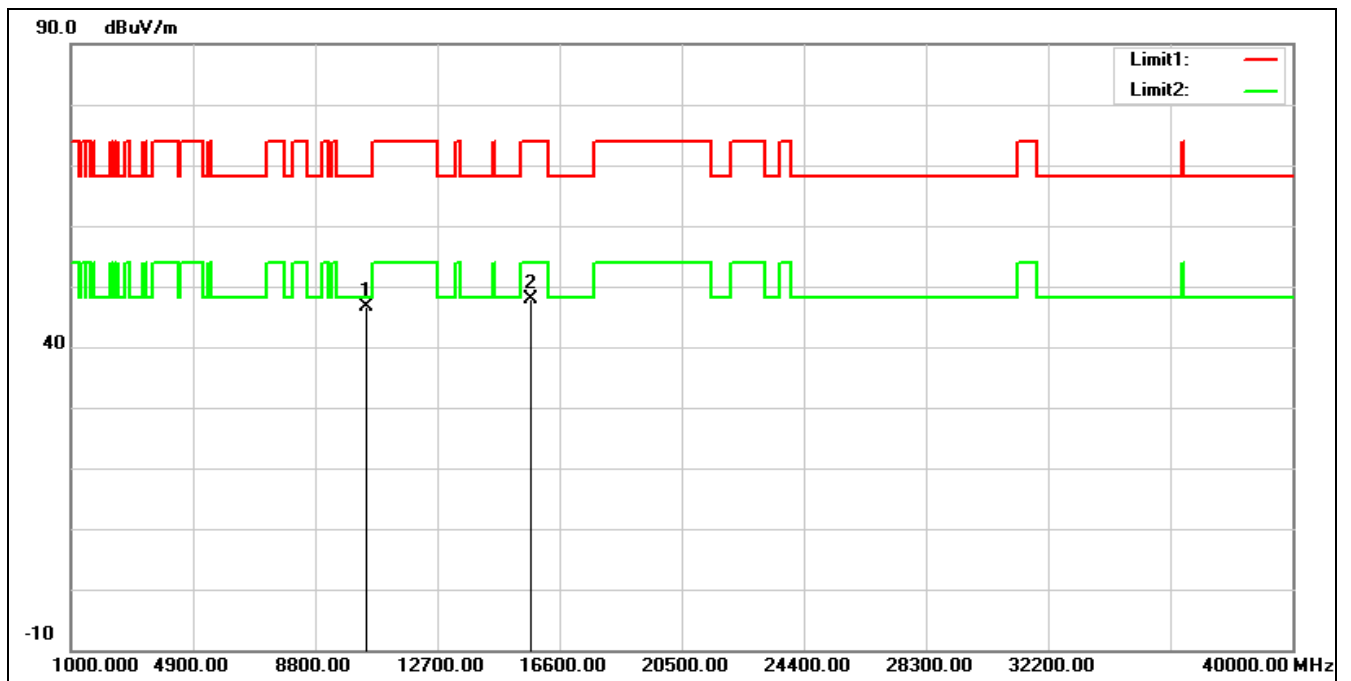


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	33.09	13.57	46.66	68.20	-21.54	peak
2	15690.000	31.17	16.59	47.76	74.00	-26.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5270 MHz		
Remark:			

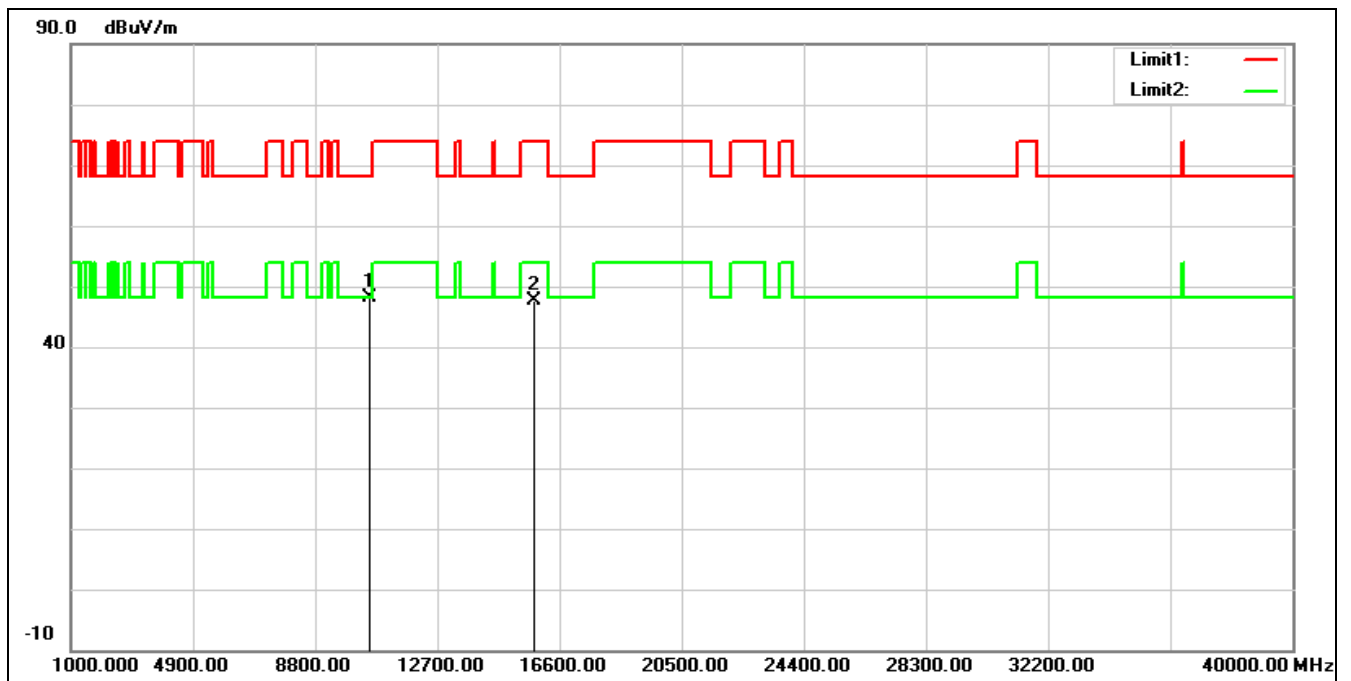


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	34.45	13.61	48.06	68.20	-20.14	peak
2	15810.000	31.06	16.48	47.54	74.00	-26.46	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5270 MHz
Remark:

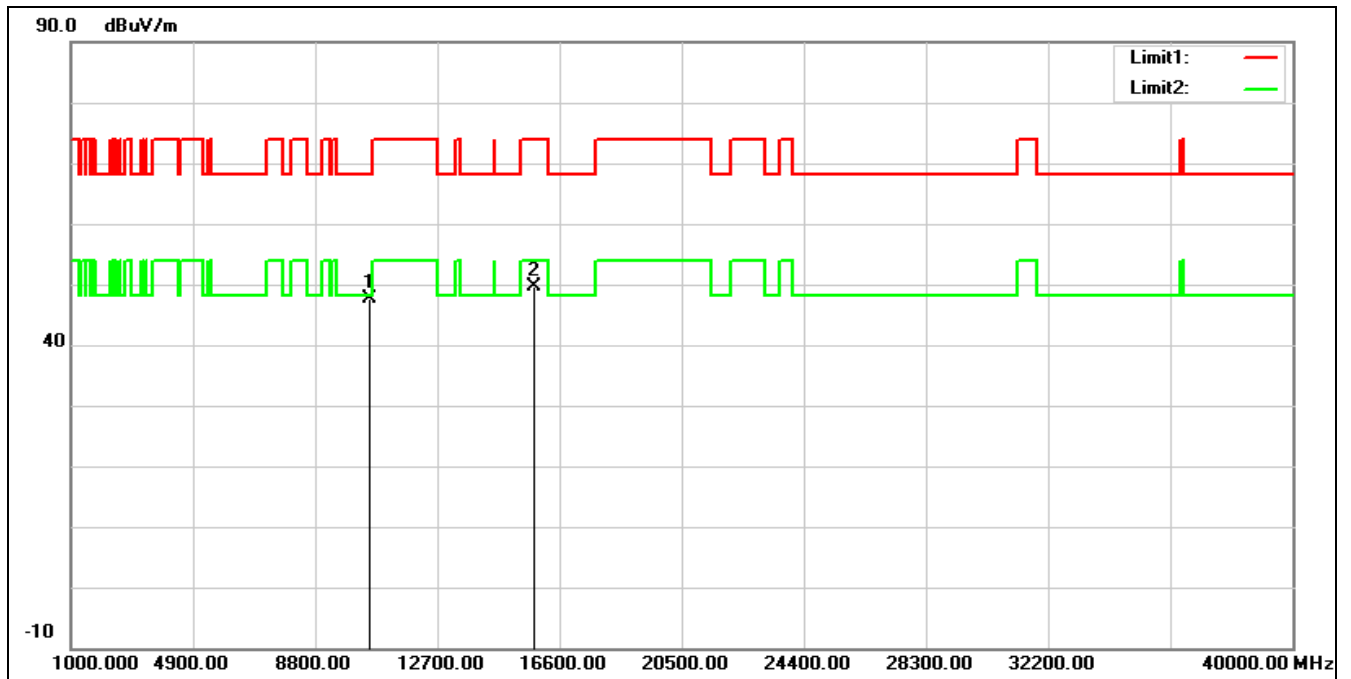


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	34.04	13.61	47.65	68.20	-20.55	peak
2	15810.000	33.07	16.48	49.55	74.00	-24.45	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5310 MHz
Remark:

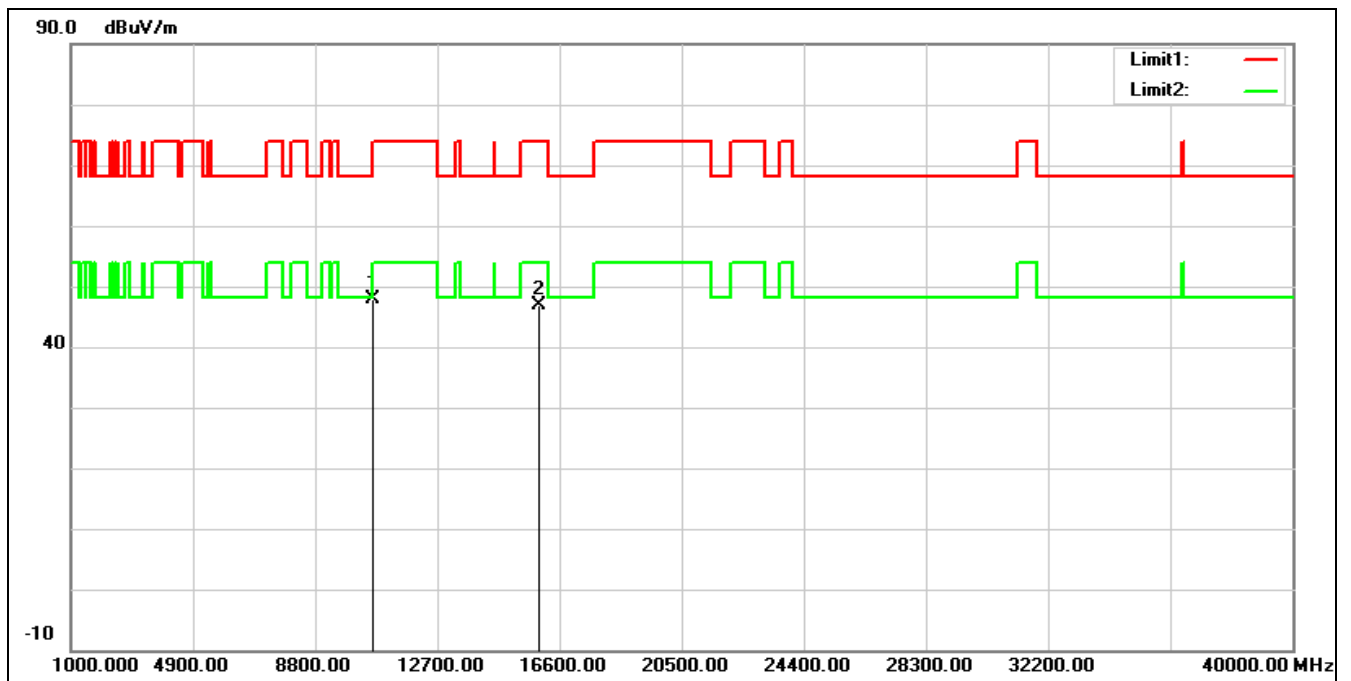

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10620.000	34.20	13.66	47.86	74.00	-26.14	peak
2	15930.000	30.80	16.15	46.95	74.00	-27.05	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5310 MHz
Remark:

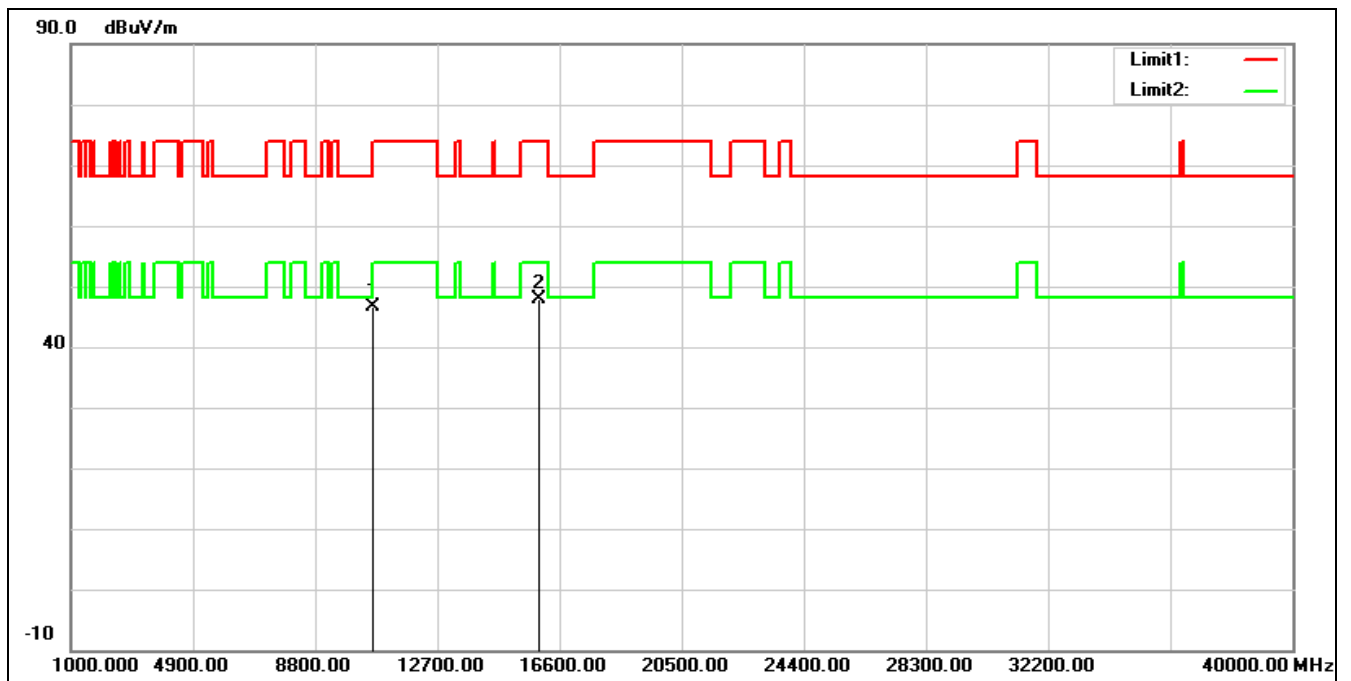


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	32.92	13.66	46.58	74.00	-27.42	peak
2*	15930.000	31.78	16.15	47.93	74.00	-26.07	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5510 MHz

Remark:

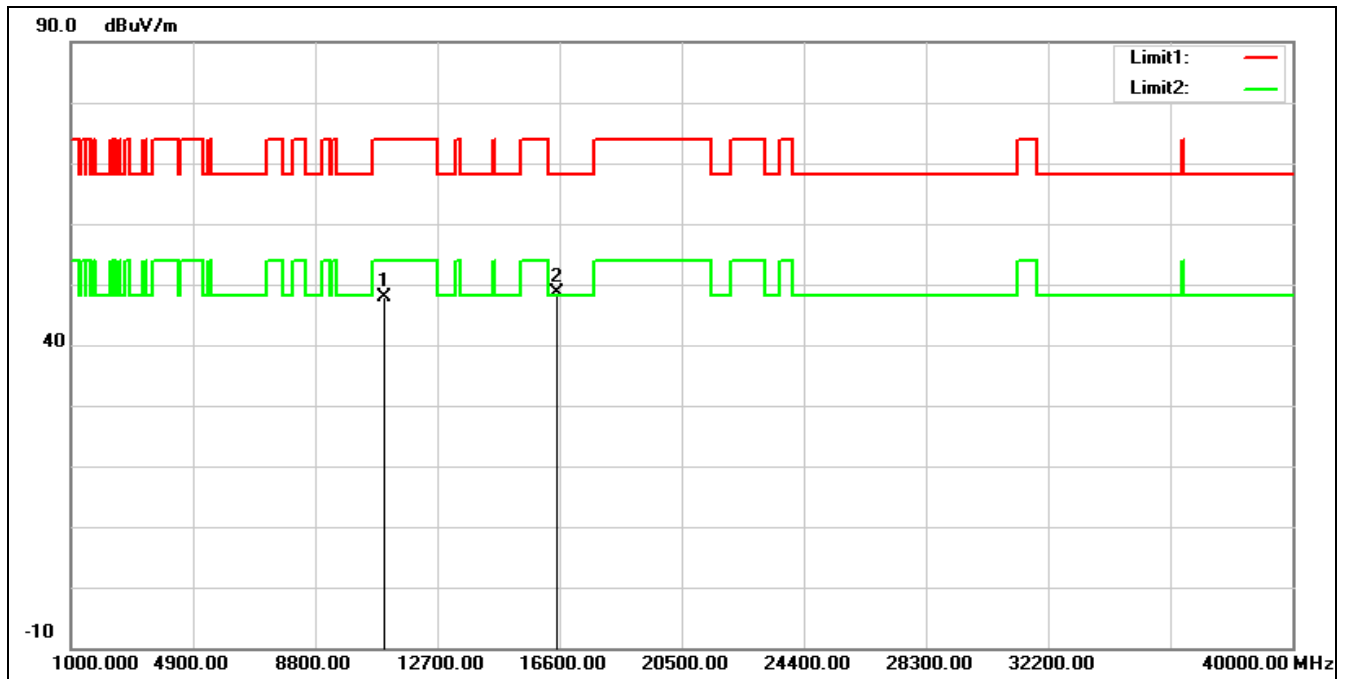


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.61	14.35	47.96	74.00	-26.04	peak
2*	16530.000	31.70	16.91	48.61	68.20	-19.59	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5510 MHz

Remark:

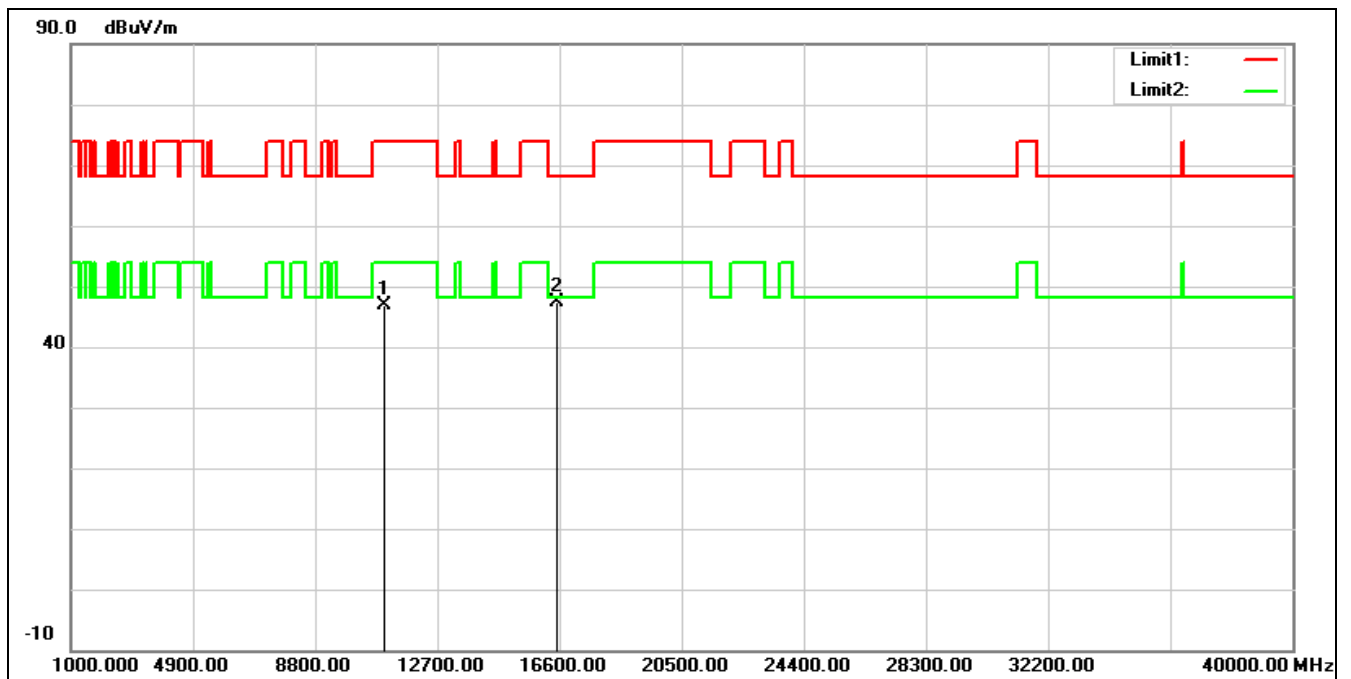


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	32.48	14.35	46.83	74.00	-27.17	peak
2*	16530.000	30.36	16.91	47.27	68.20	-20.93	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5550 MHz		
Remark:			

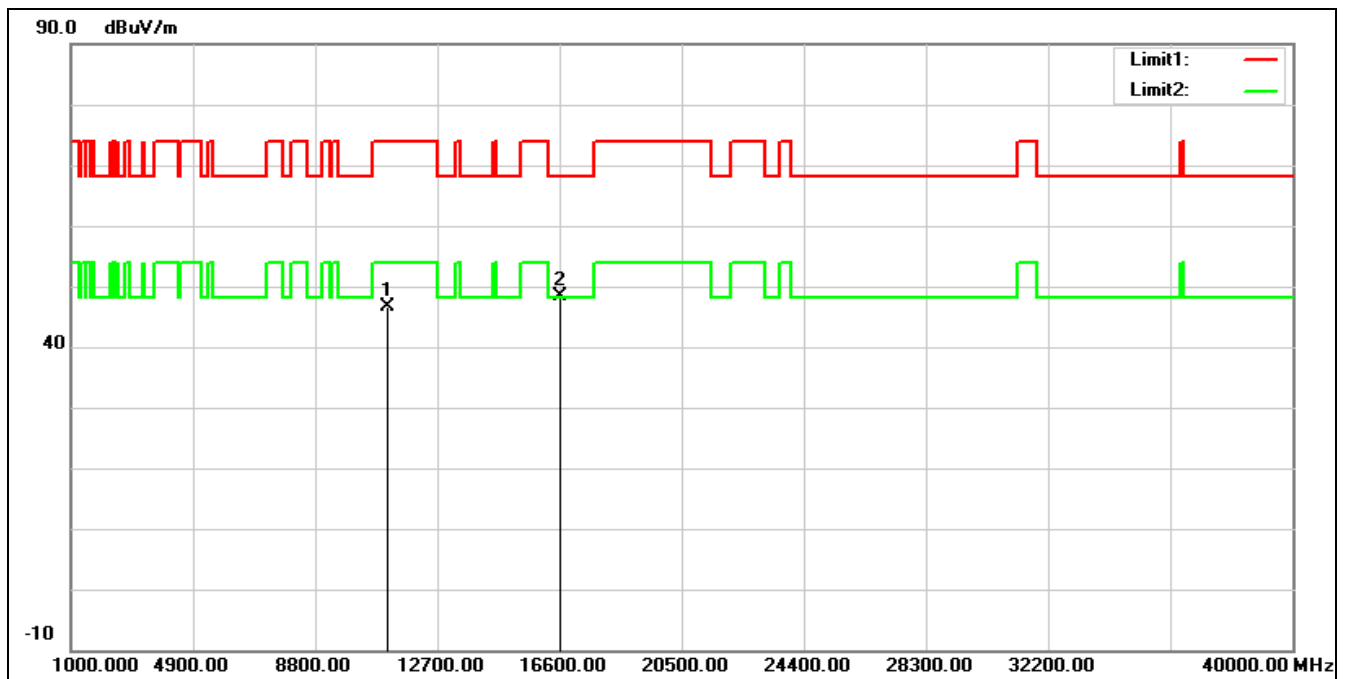


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	32.15	14.56	46.71	74.00	-27.29	peak
2*	16650.000	30.68	17.73	48.41	68.20	-19.79	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5550 MHz		
Remark:			

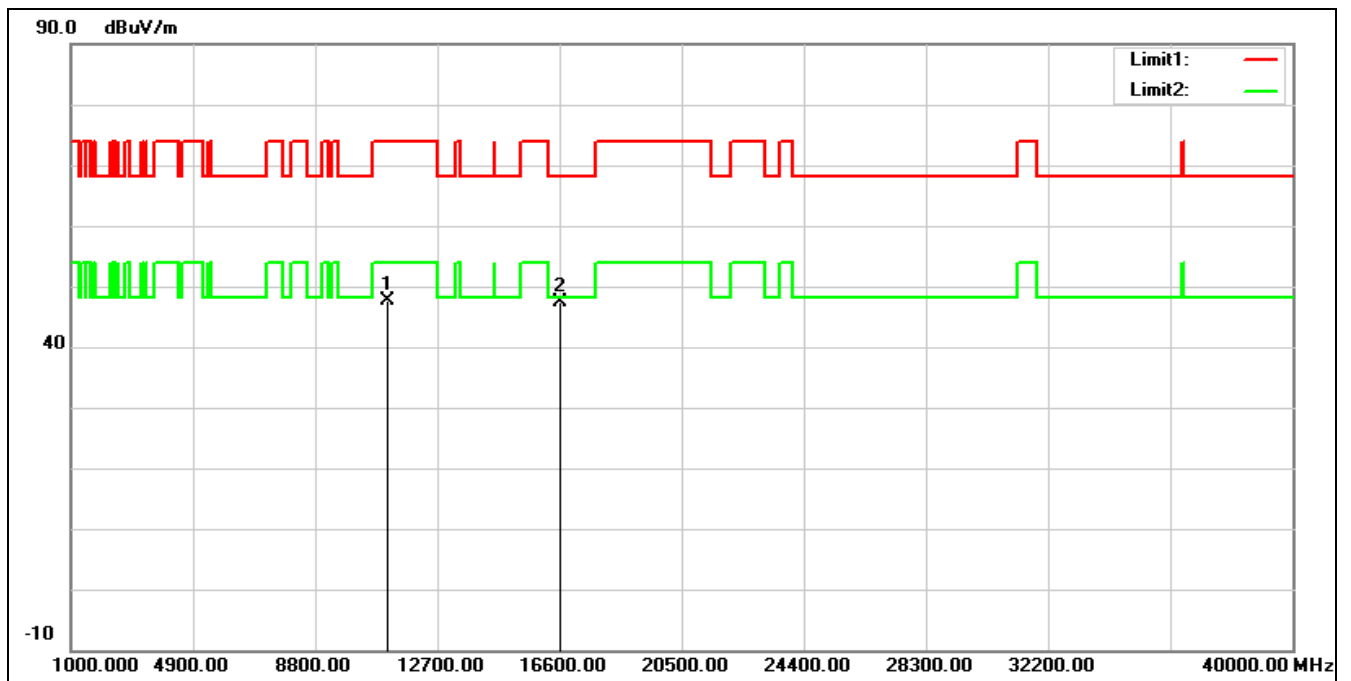


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.08	14.56	47.64	74.00	-26.36	peak
2*	16650.000	29.69	17.73	47.42	68.20	-20.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5670 MHz		
Remark:			

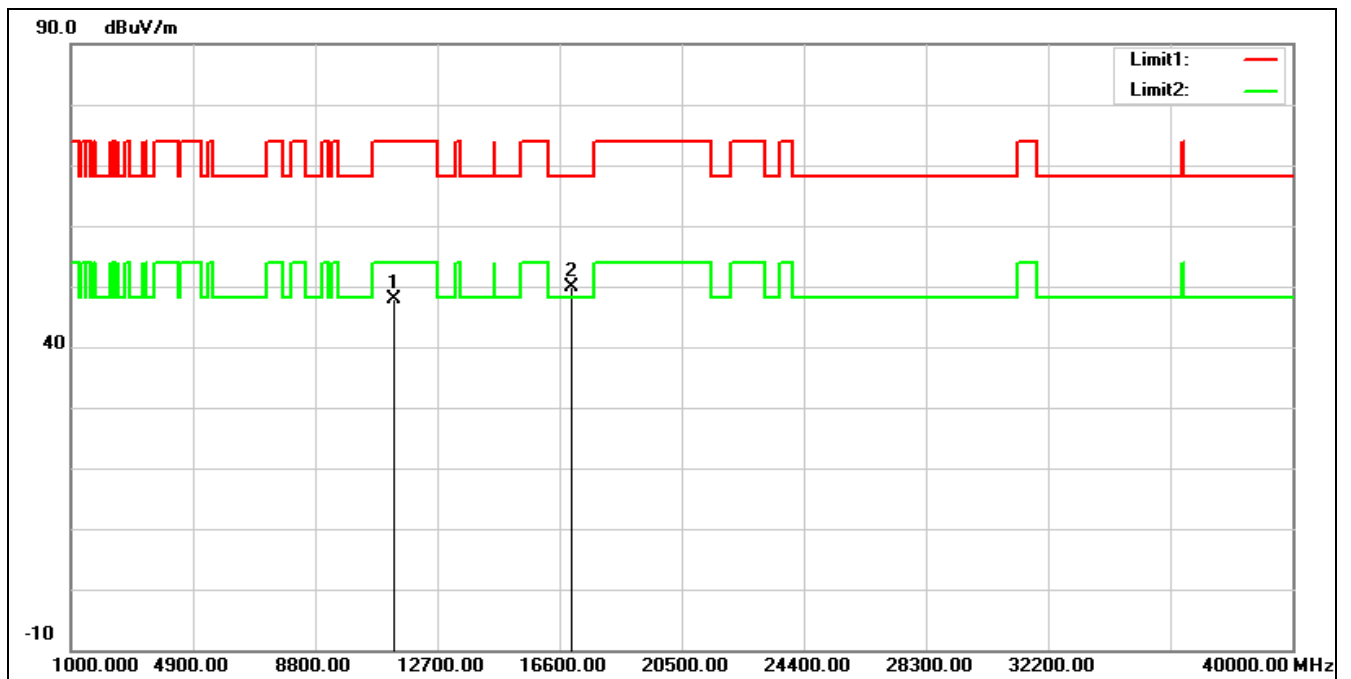

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.28	14.50	47.78	74.00	-26.22	peak
2*	17010.000	29.83	20.06	49.89	68.20	-18.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5670 MHz		
Remark:			

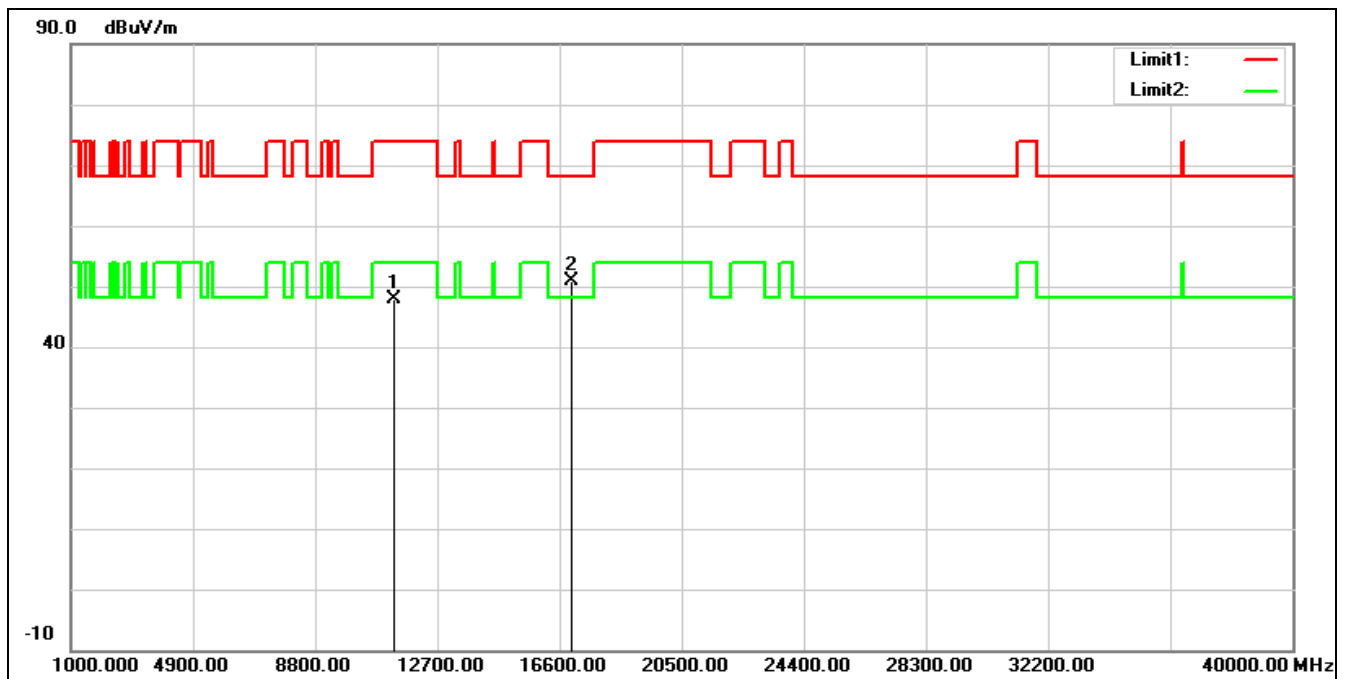


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.35	14.50	47.85	74.00	-26.15	peak
2*	17010.000	30.80	20.06	50.86	68.20	-17.34	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT40 5710 MHz

Remark:

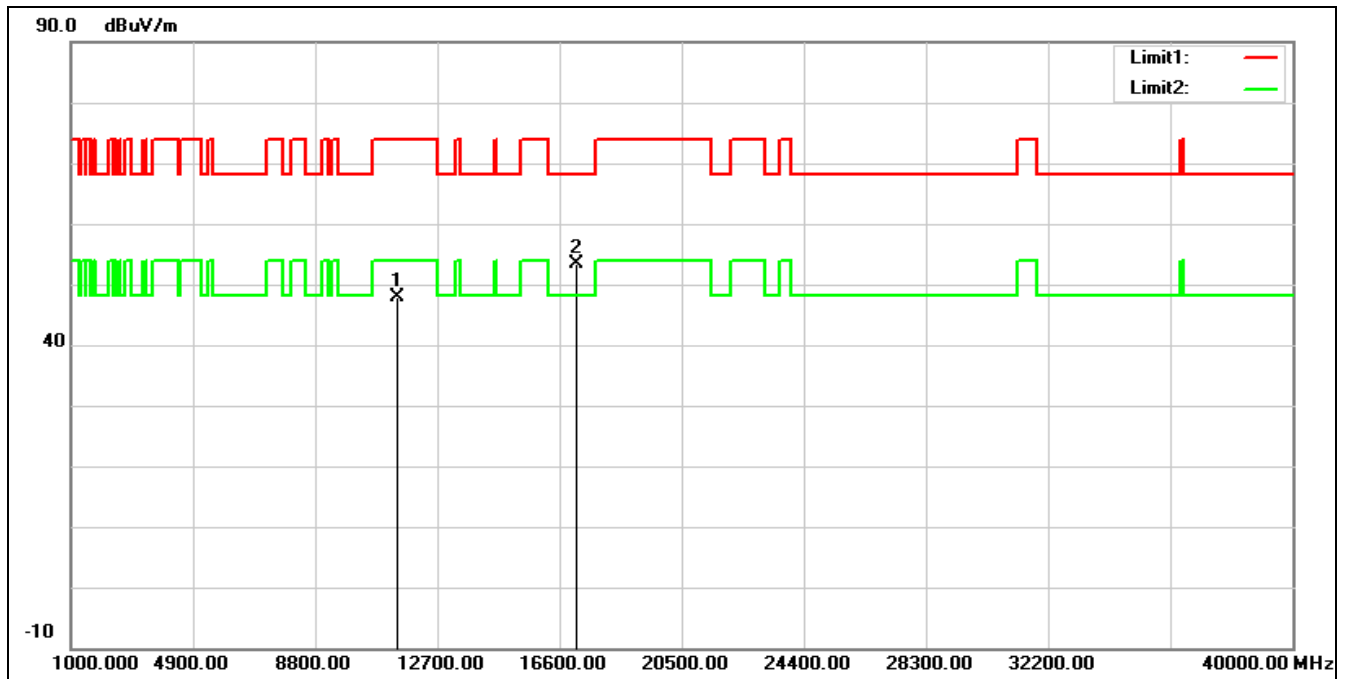


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.21	14.75	47.96	74.00	-26.04	peak
2*	17130.000	32.64	20.77	53.41	68.20	-14.79	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5710 MHz		
Remark:			

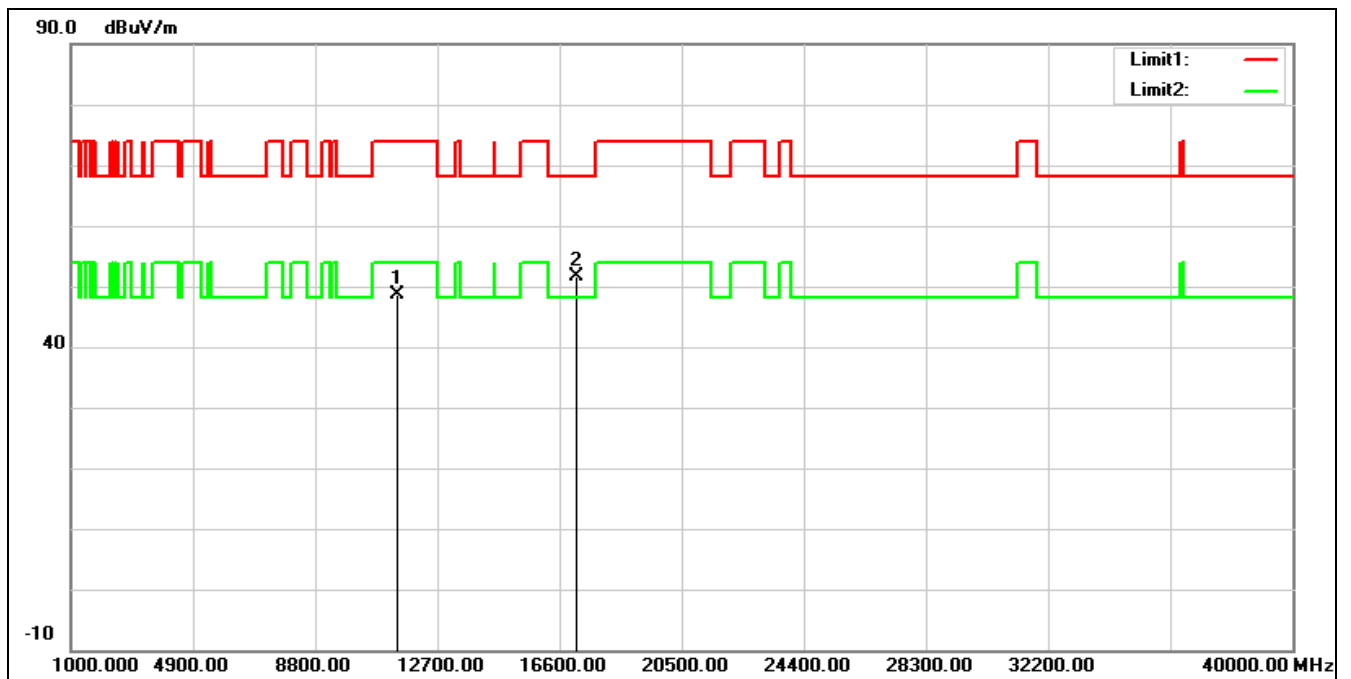


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.77	14.75	48.52	74.00	-25.48	peak
2*	17130.000	30.95	20.77	51.72	68.20	-16.48	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5755 MHz
Remark:

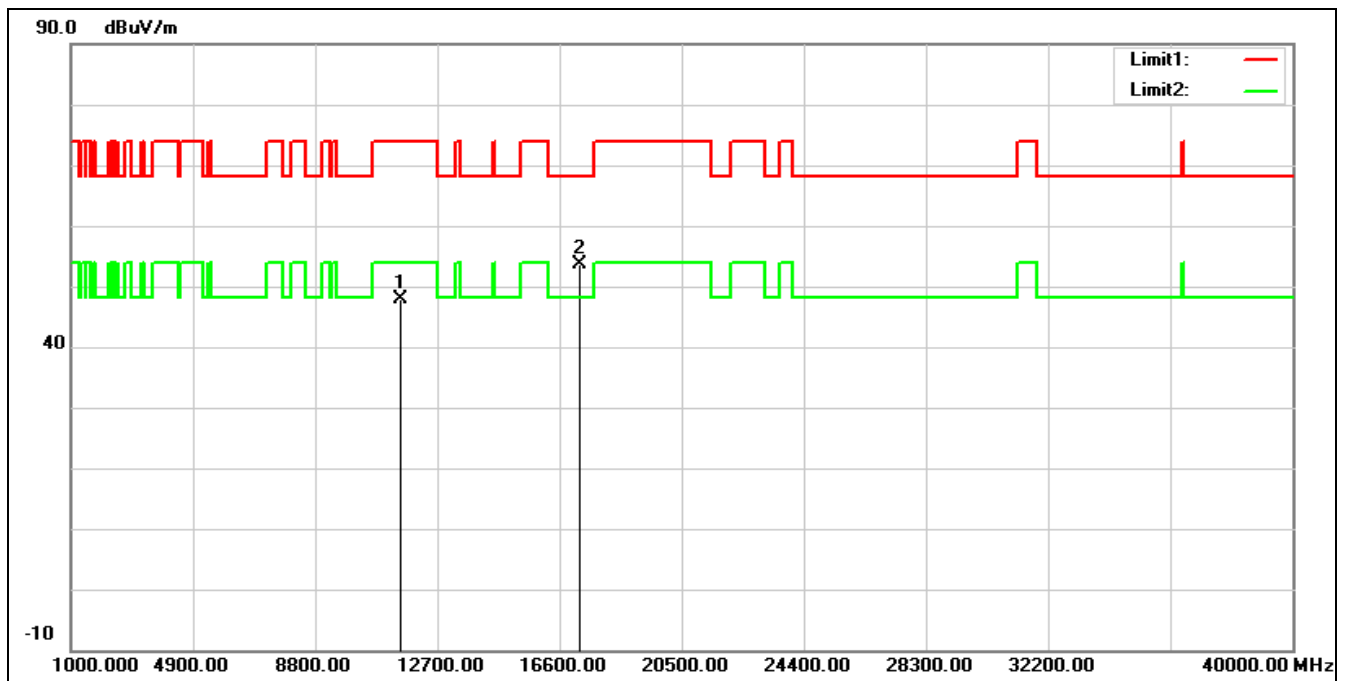


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	32.67	15.09	47.76	74.00	-26.24	peak
2*	17265.000	31.76	21.79	53.55	68.20	-14.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5755 MHz		
Remark:			

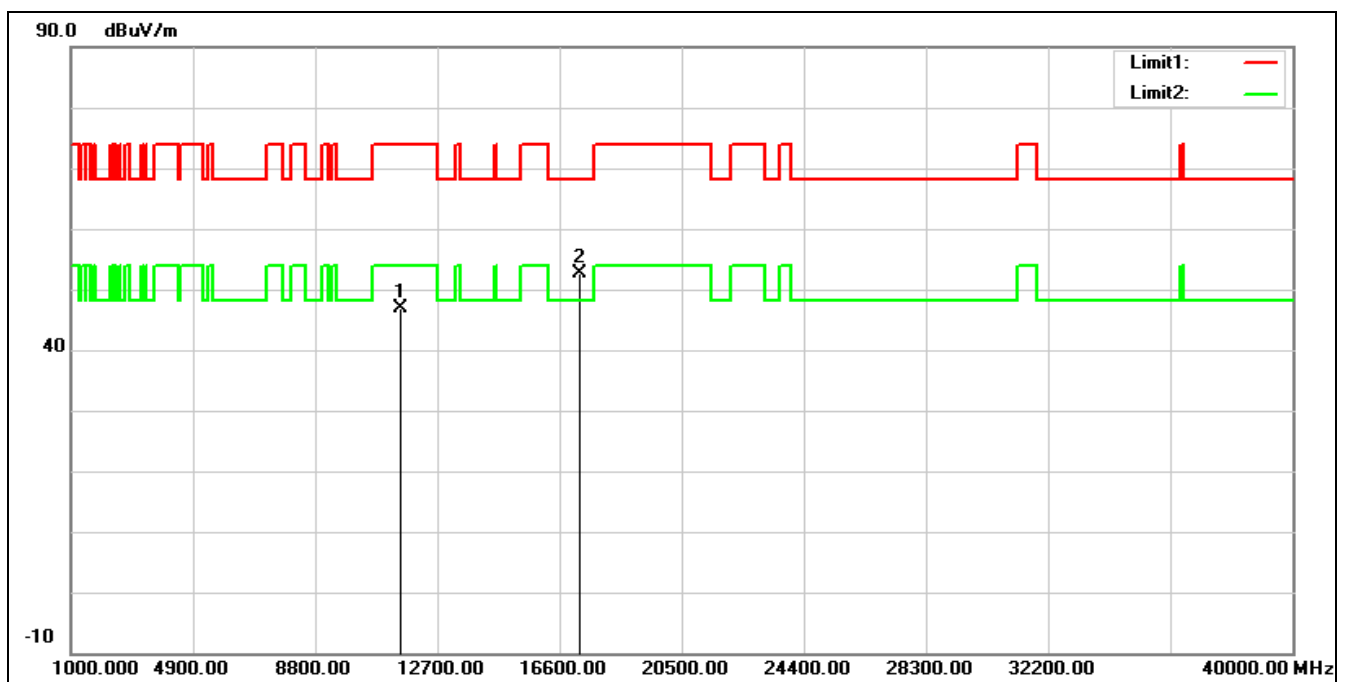


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	31.80	15.09	46.89	74.00	-27.11	peak
2*	17265.000	30.91	21.79	52.70	68.20	-15.50	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5795 MHz
Remark:

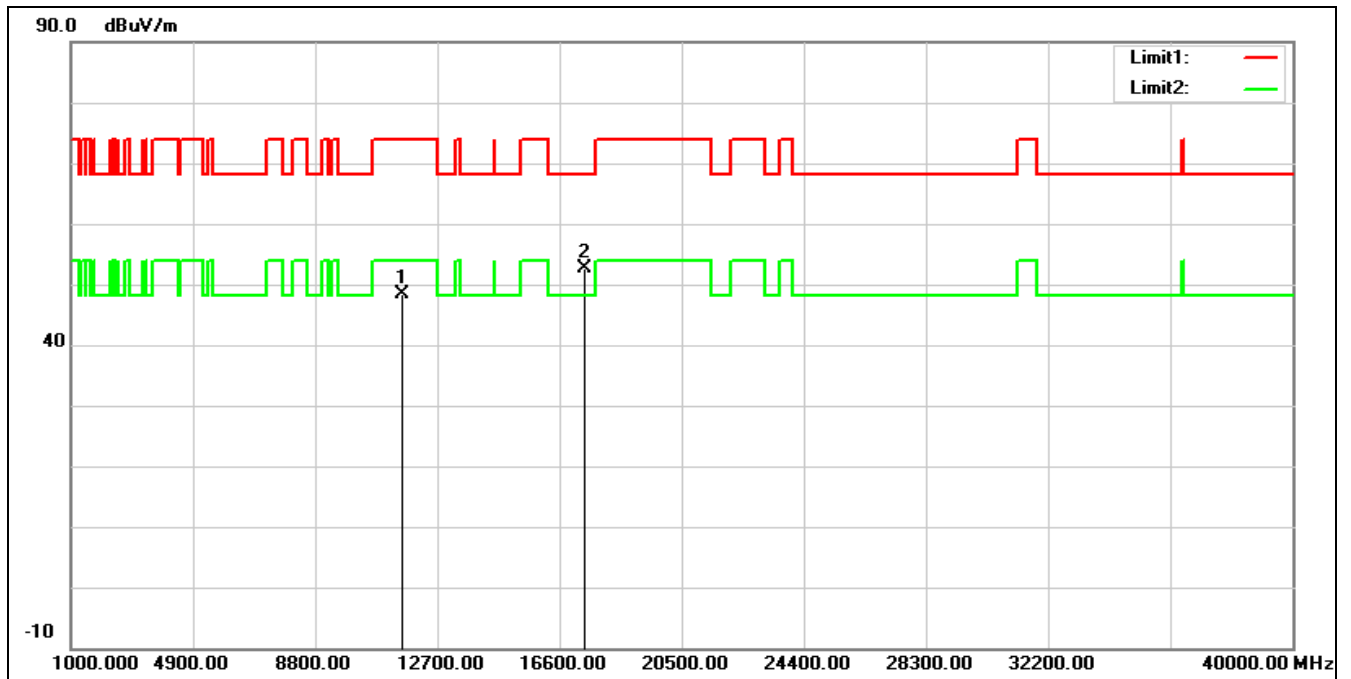


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.60	14.76	48.36	74.00	-25.64	peak
2*	17385.000	30.18	22.48	52.66	68.20	-15.54	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5795 MHz
Remark:

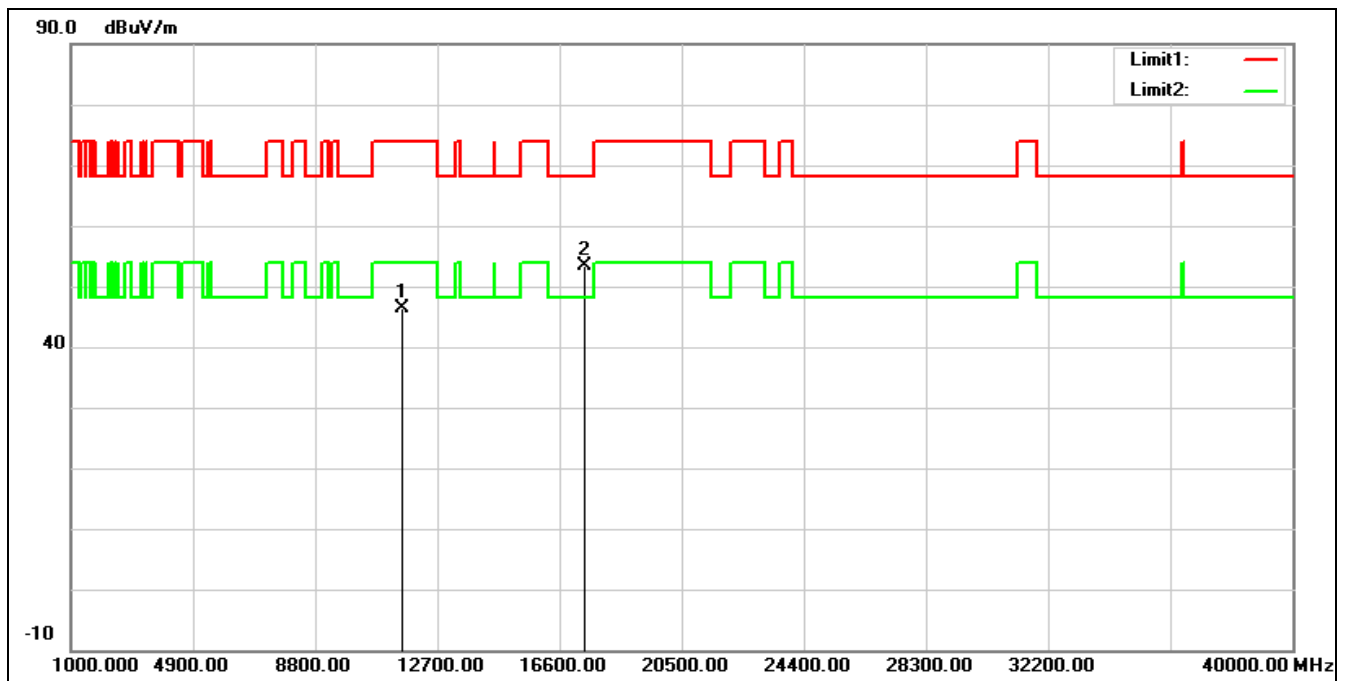


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	31.68	14.76	46.44	74.00	-27.56	peak
2*	17385.000	30.84	22.48	53.32	68.20	-14.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5210 MHz		
Remark:			

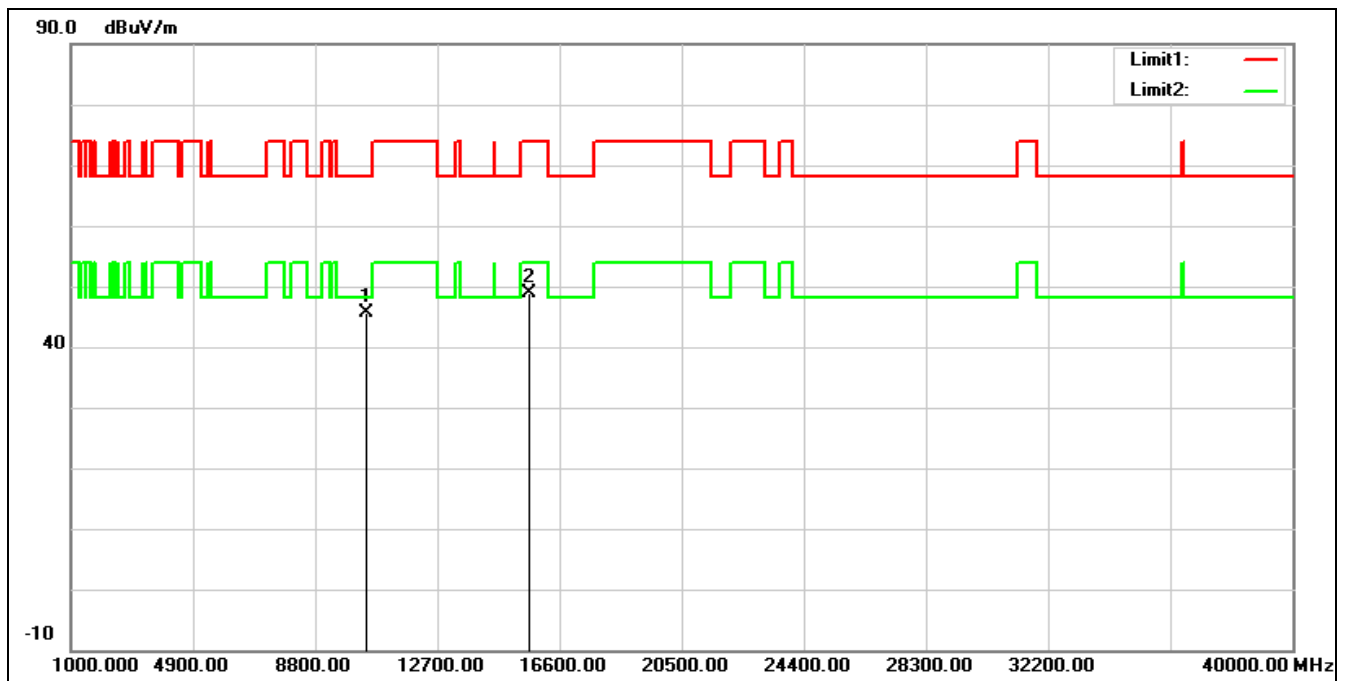


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	32.21	13.53	45.74	68.20	-22.46	peak
2	15630.000	32.13	16.64	48.77	74.00	-25.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5210 MHz		
Remark:			

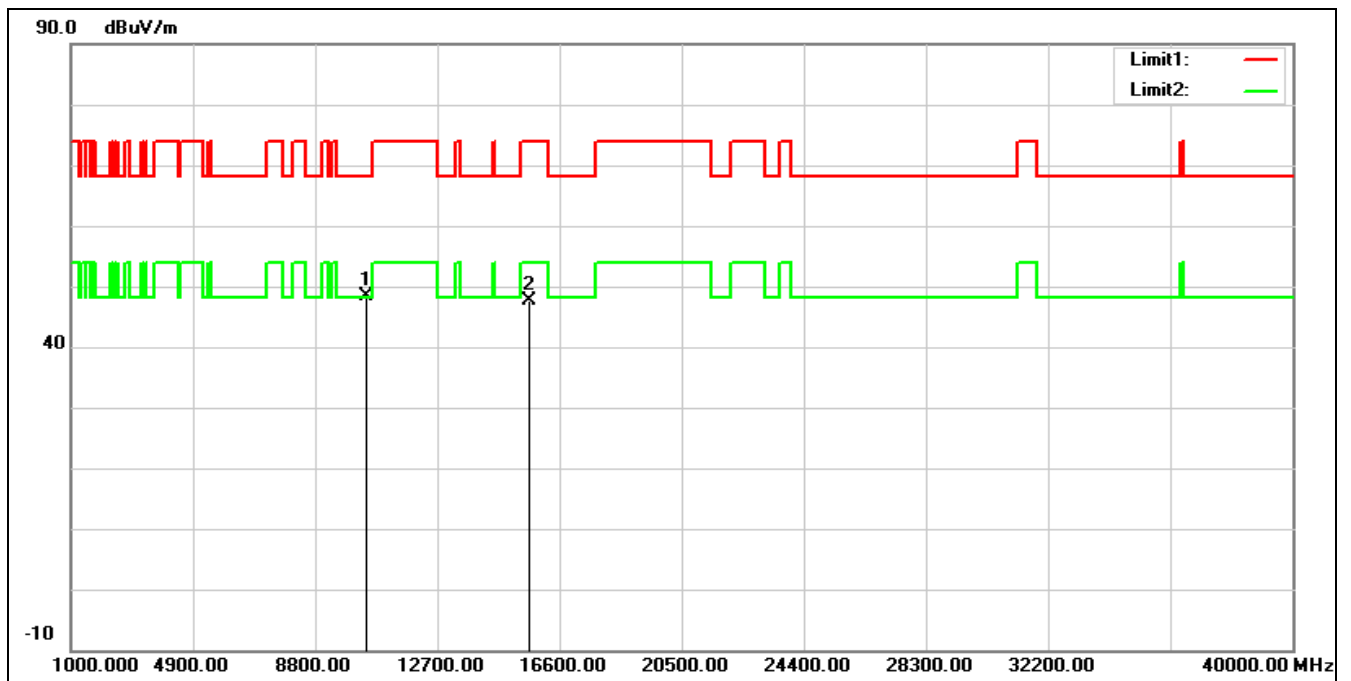


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	34.80	13.53	48.33	68.20	-19.87	peak
2	15630.000	31.10	16.64	47.74	74.00	-26.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5290 MHz		
Remark:			

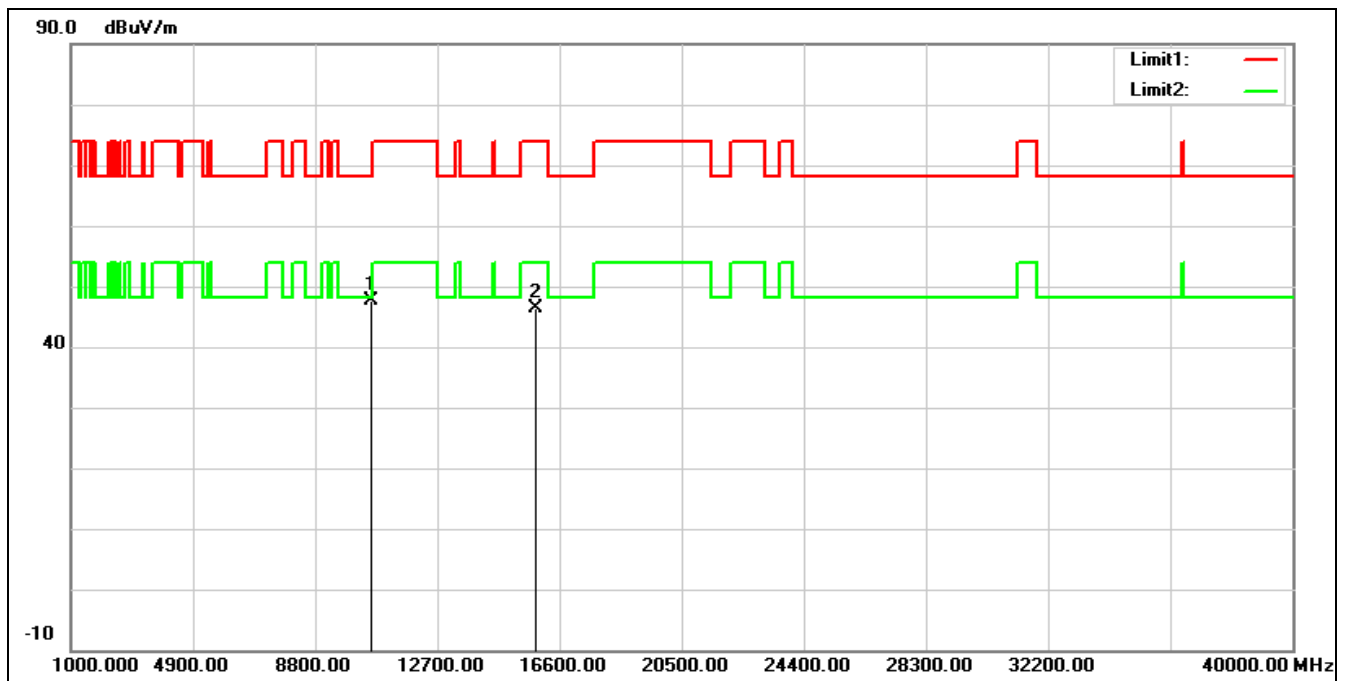

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	33.88	13.63	47.51	68.20	-20.69	peak
2	15870.000	30.08	16.31	46.39	74.00	-27.61	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5290 MHz		
Remark:			

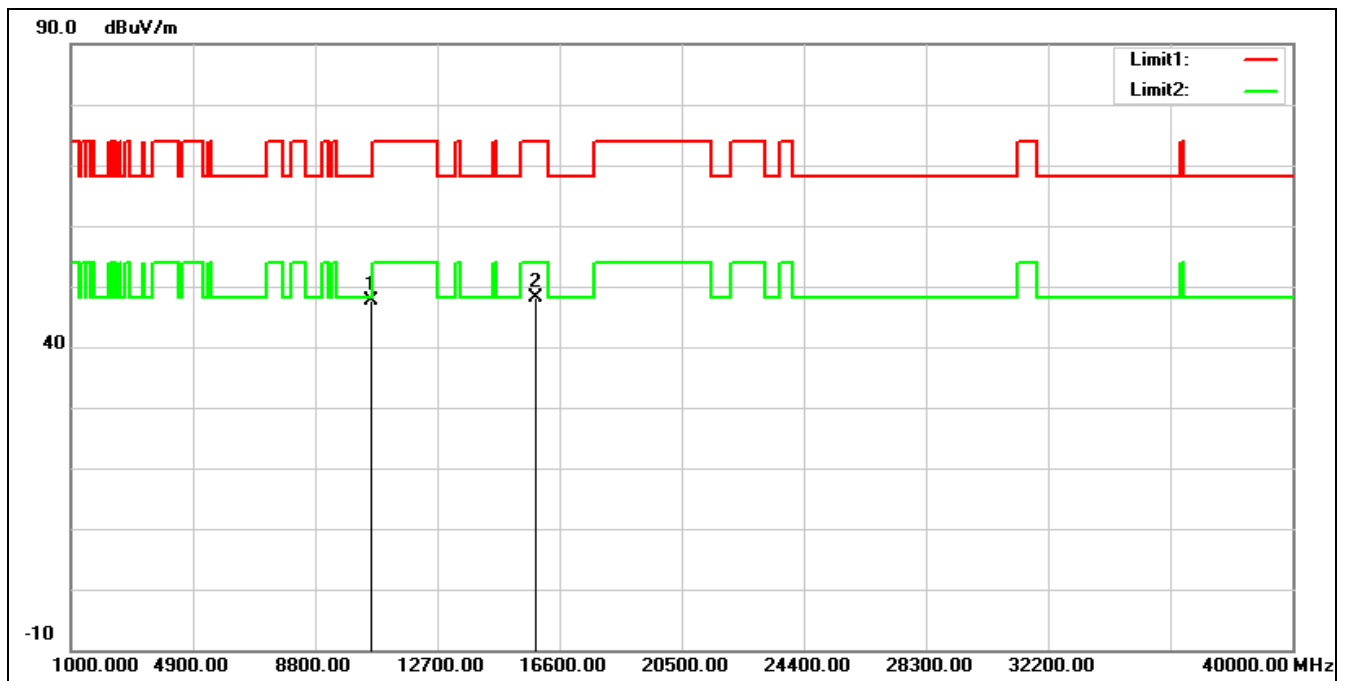


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	33.93	13.63	47.56	68.20	-20.64	peak
2	15870.000	31.94	16.31	48.25	74.00	-25.75	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5530 MHz

Remark:

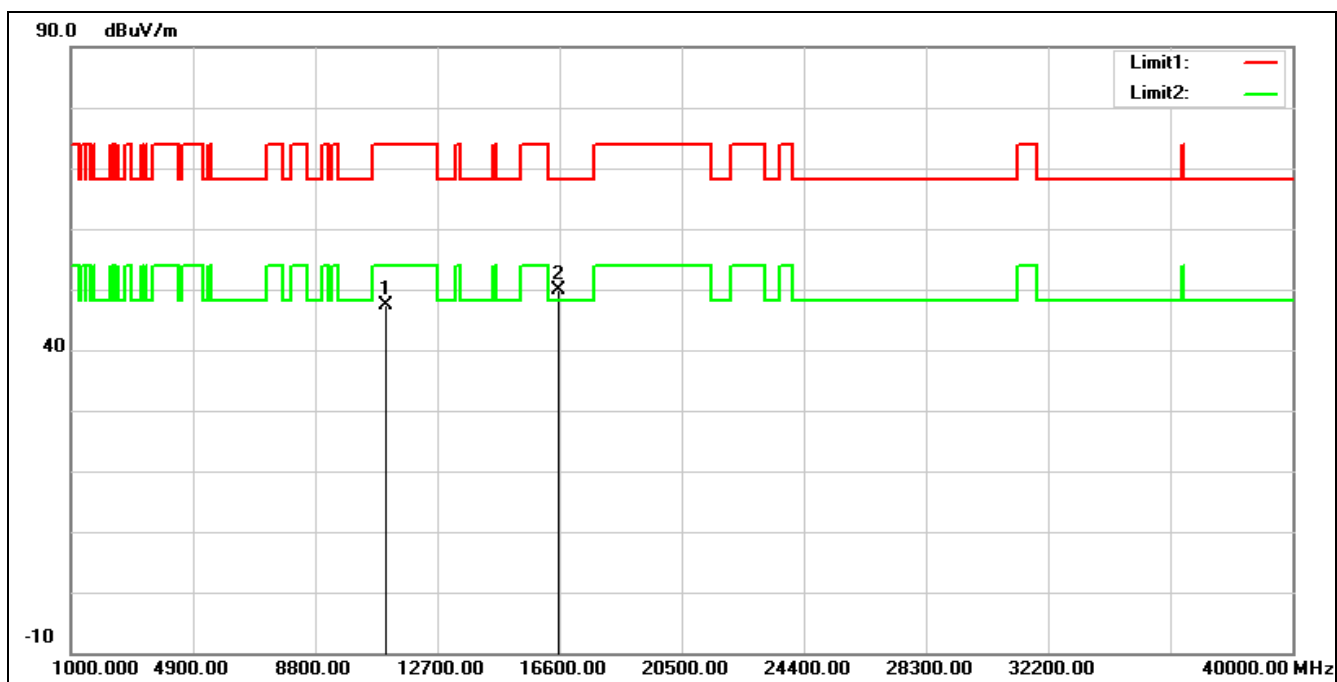

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.93	14.46	47.39	74.00	-26.61	peak
2*	16590.000	32.55	17.34	49.89	68.20	-18.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5530 MHz		
Remark:			

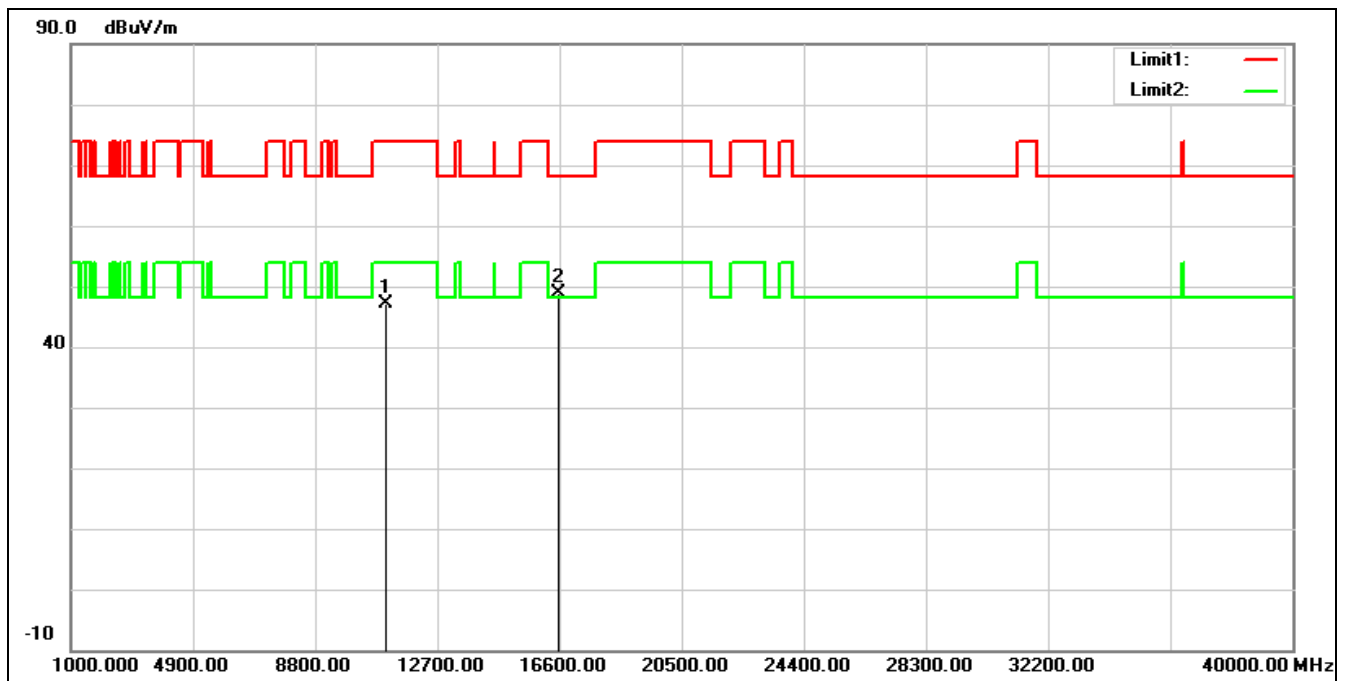


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.64	14.46	47.10	74.00	-26.90	peak
2*	16590.000	31.56	17.34	48.90	68.20	-19.30	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5610 MHz

Remark:

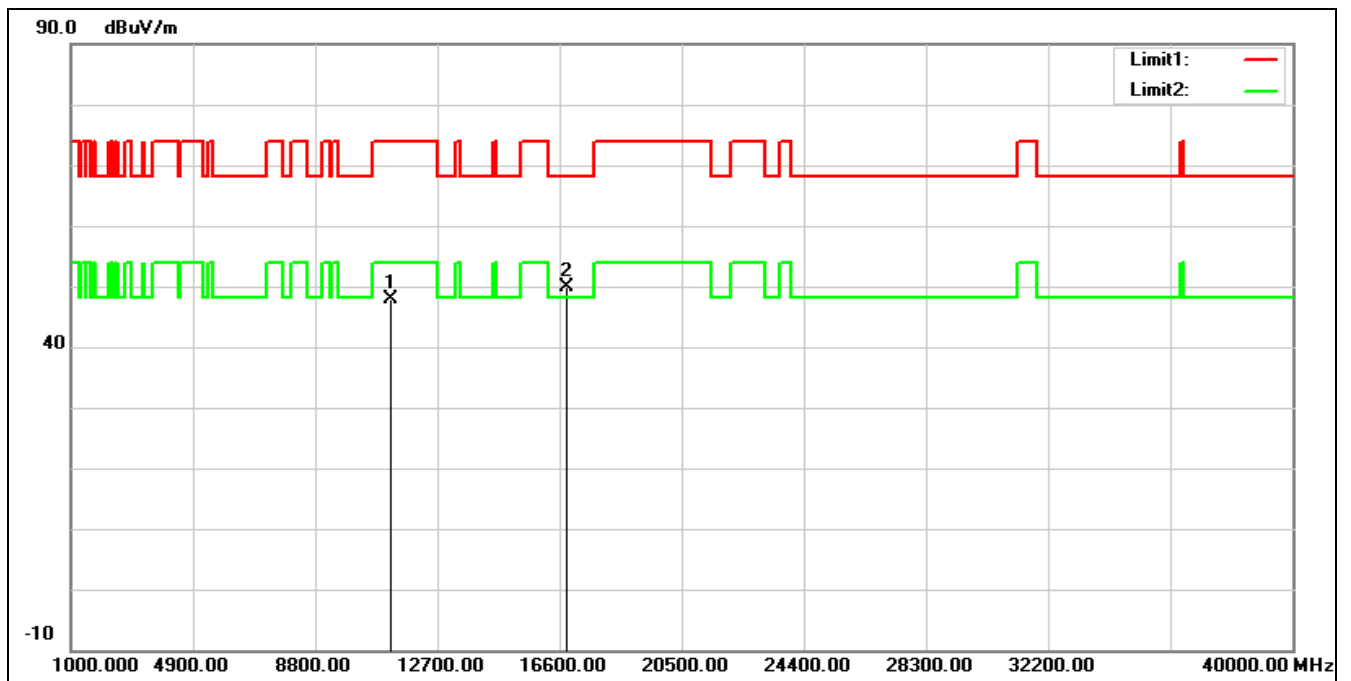


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	33.58	14.34	47.92	74.00	-26.08	peak
2*	16830.000	30.75	19.08	49.83	68.20	-18.37	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 5610 MHz
Remark:

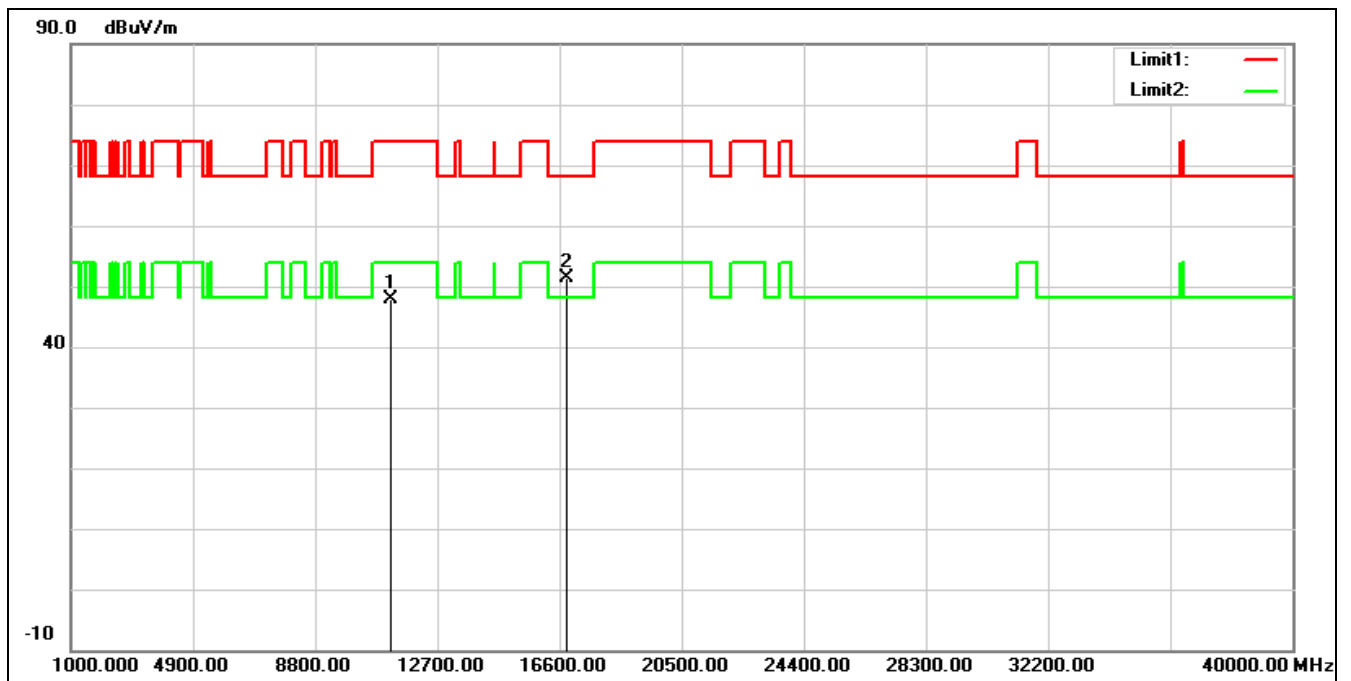

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	33.63	14.34	47.97	74.00	-26.03	peak
2*	16830.000	32.21	19.08	51.29	68.20	-16.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

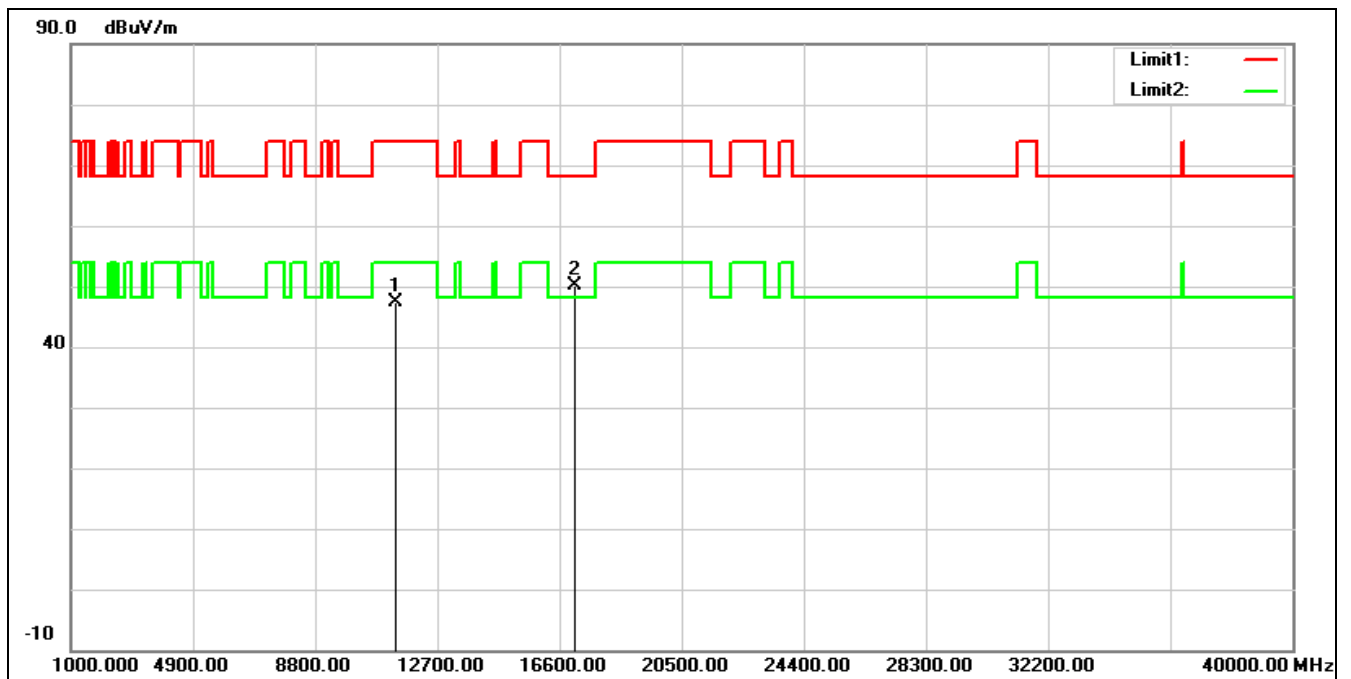


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	32.71	14.60	47.31	74.00	-26.69	peak
2*	17070.000	29.61	20.40	50.01	68.20	-18.19	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT80 5690 MHz

Remark:

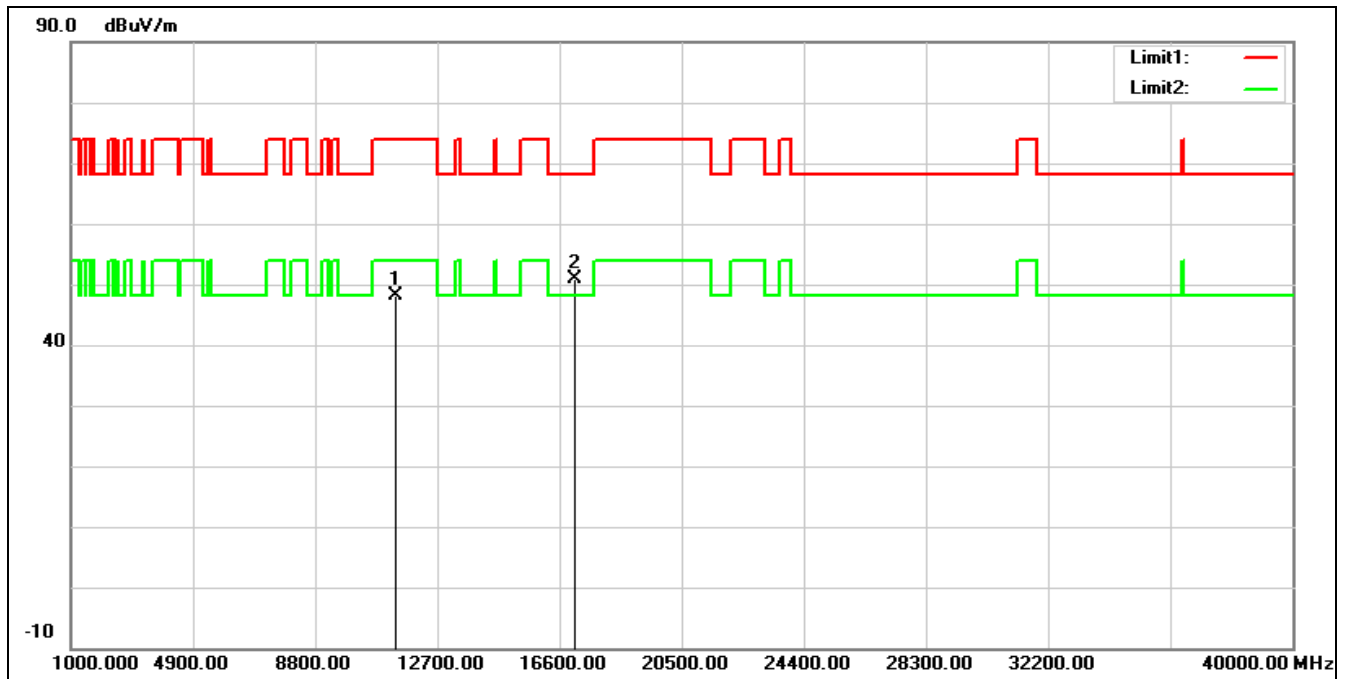


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.51	14.60	48.11	74.00	-25.89	peak
2*	17070.000	30.47	20.40	50.87	68.20	-17.33	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5775 MHz

Remark:

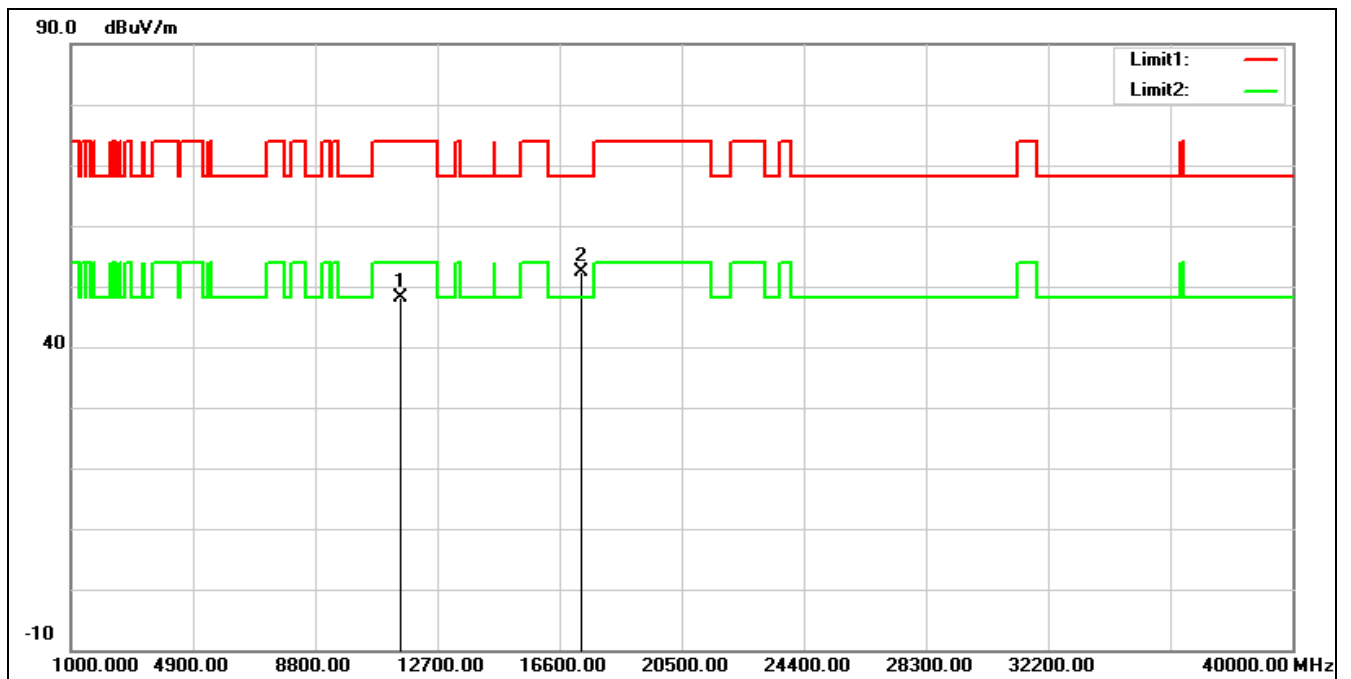

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.26	14.92	48.18	74.00	-25.82	peak
2*	17325.000	30.28	22.20	52.48	68.20	-15.72	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 5775 MHz
Remark:

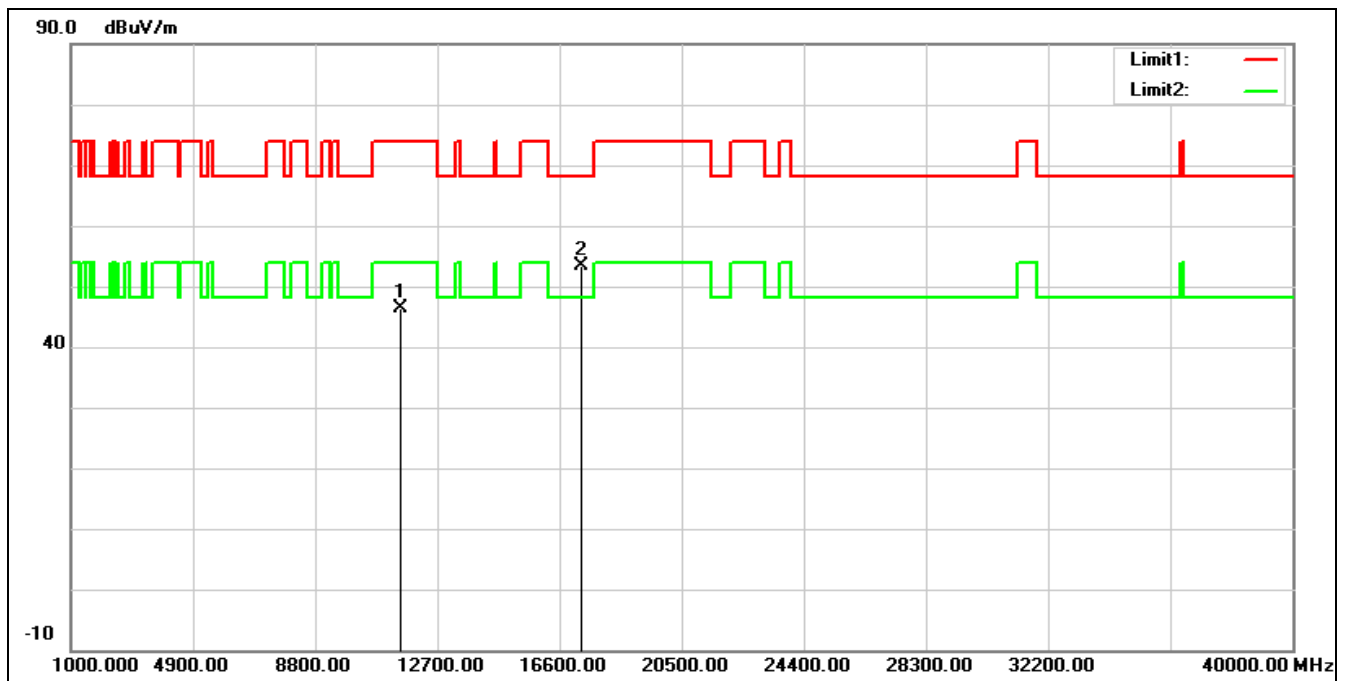


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	31.56	14.92	46.48	74.00	-27.52	peak
2*	17325.000	31.17	22.20	53.37	68.20	-14.83	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT160 5250 MHz

Remark:

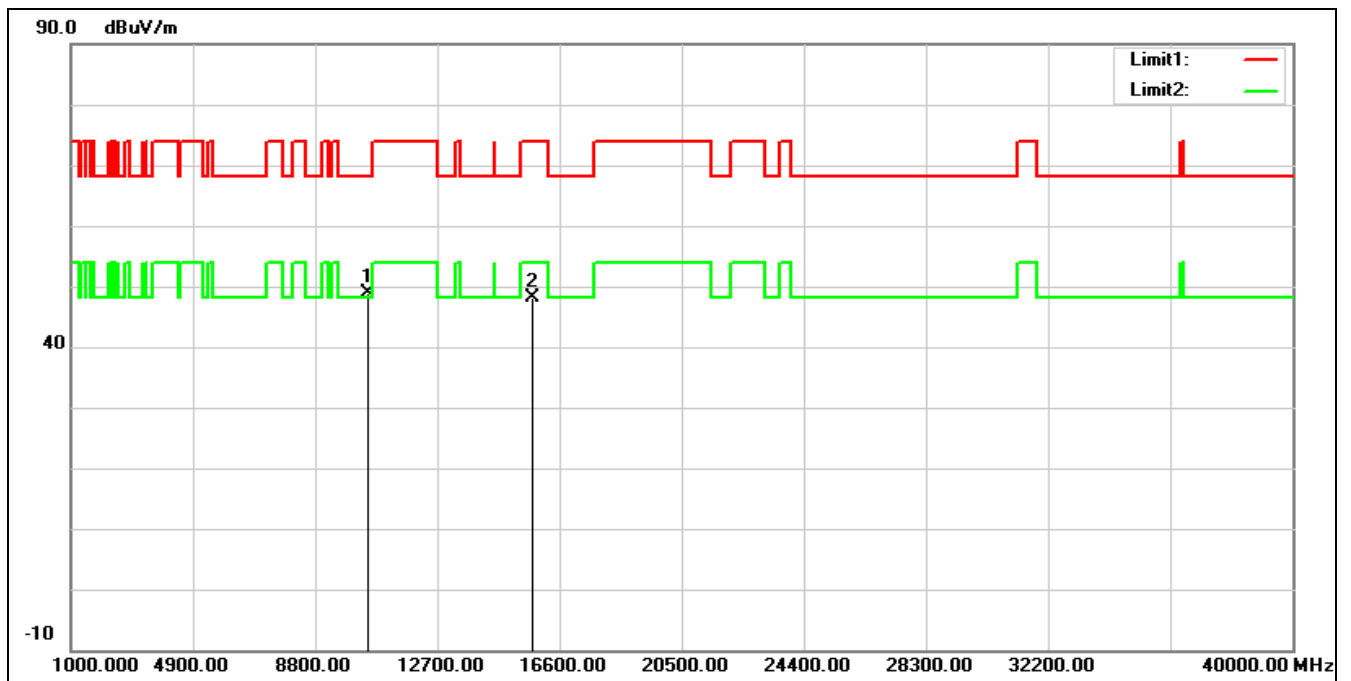


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	35.24	13.60	48.84	68.20	-19.36	peak
2	15750.000	31.70	16.55	48.25	74.00	-25.75	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT160 5250 MHz

Remark:

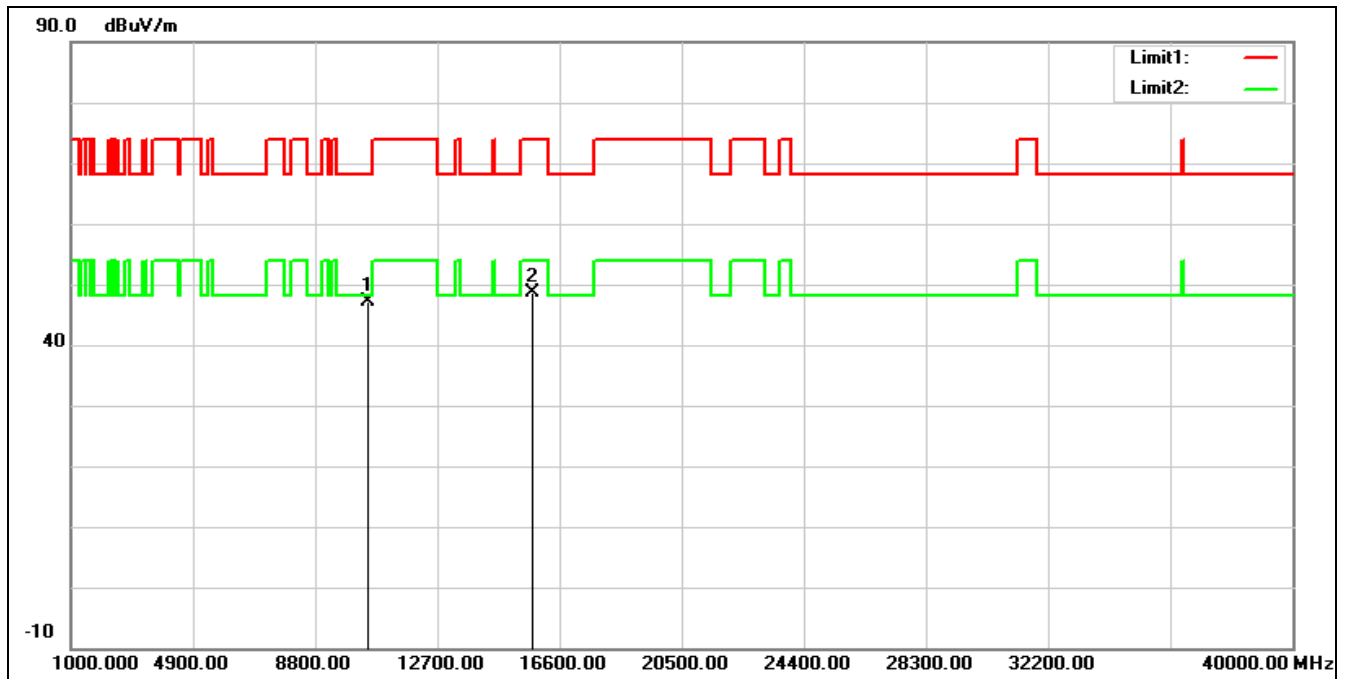


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.54	13.60	47.14	68.20	-21.06	peak
2	15750.000	32.13	16.55	48.68	74.00	-25.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

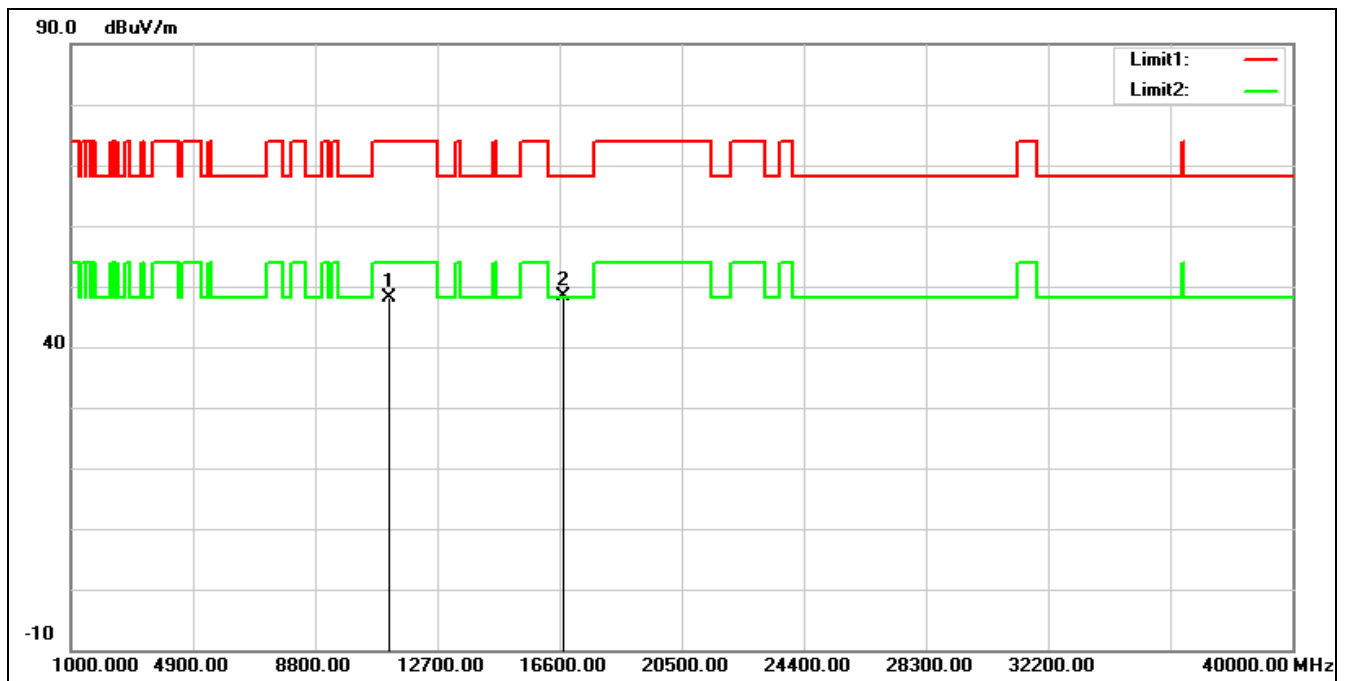

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.67	14.47	48.14	74.00	-25.86	peak
2*	16710.000	30.20	18.12	48.32	68.20	-19.88	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT160 5570 MHz
Remark:

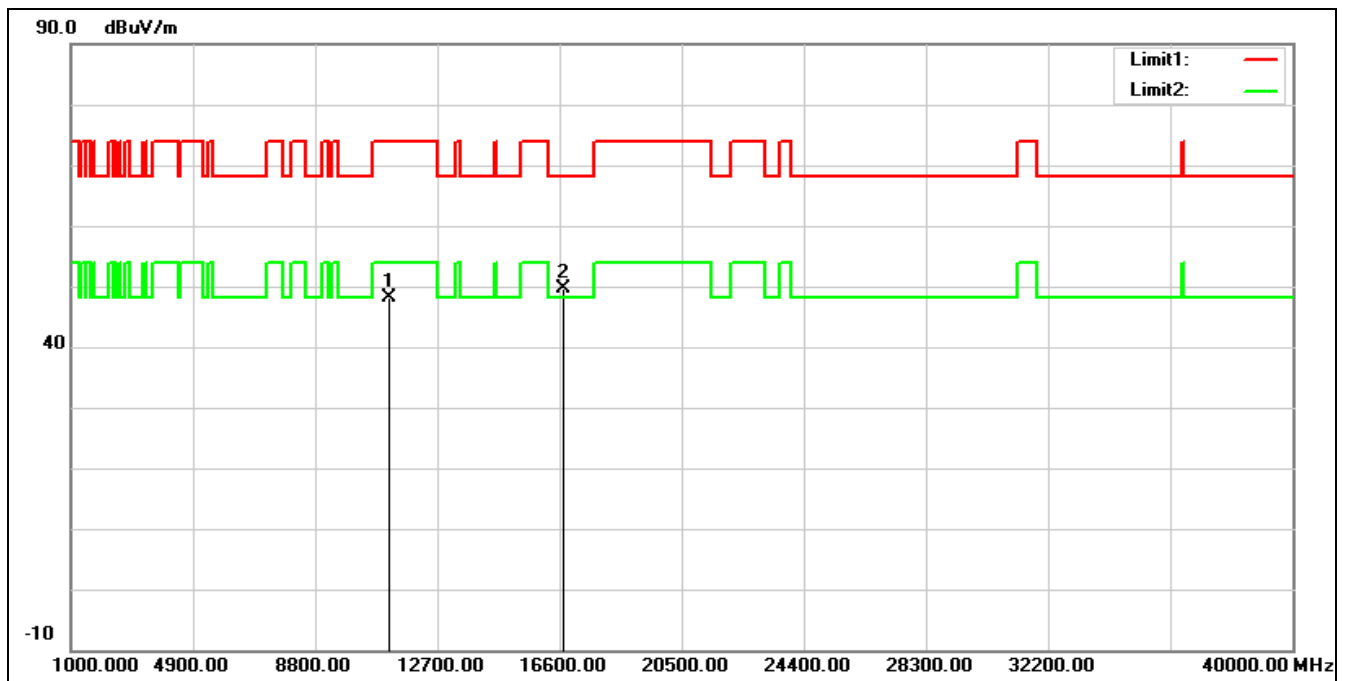


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.58	14.47	48.05	74.00	-25.95	peak
2*	16710.000	31.41	18.12	49.53	68.20	-18.67	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE

Remark:

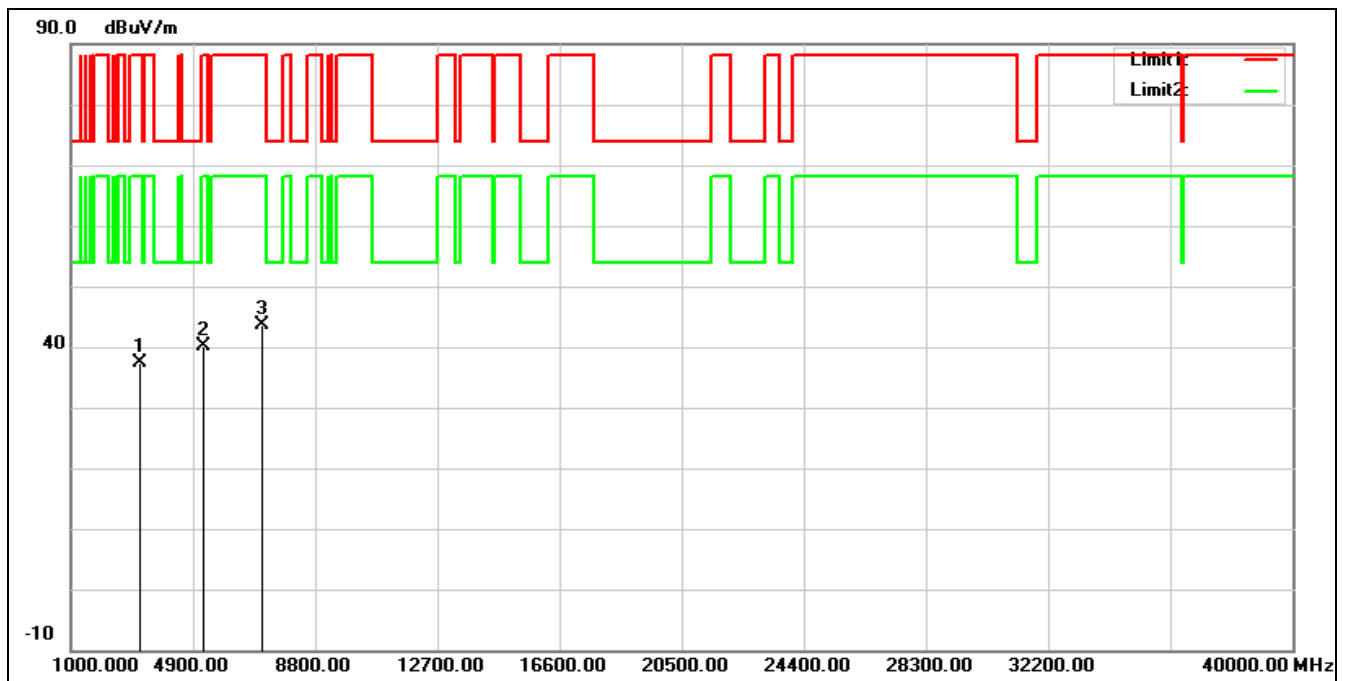

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3159.000	41.56	-4.16	37.40	88.20	-50.80	peak
2	5182.000	39.02	1.23	40.25	88.20	-47.95	peak
3*	7103.000	36.95	6.63	43.58	88.20	-44.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE		
Remark:			

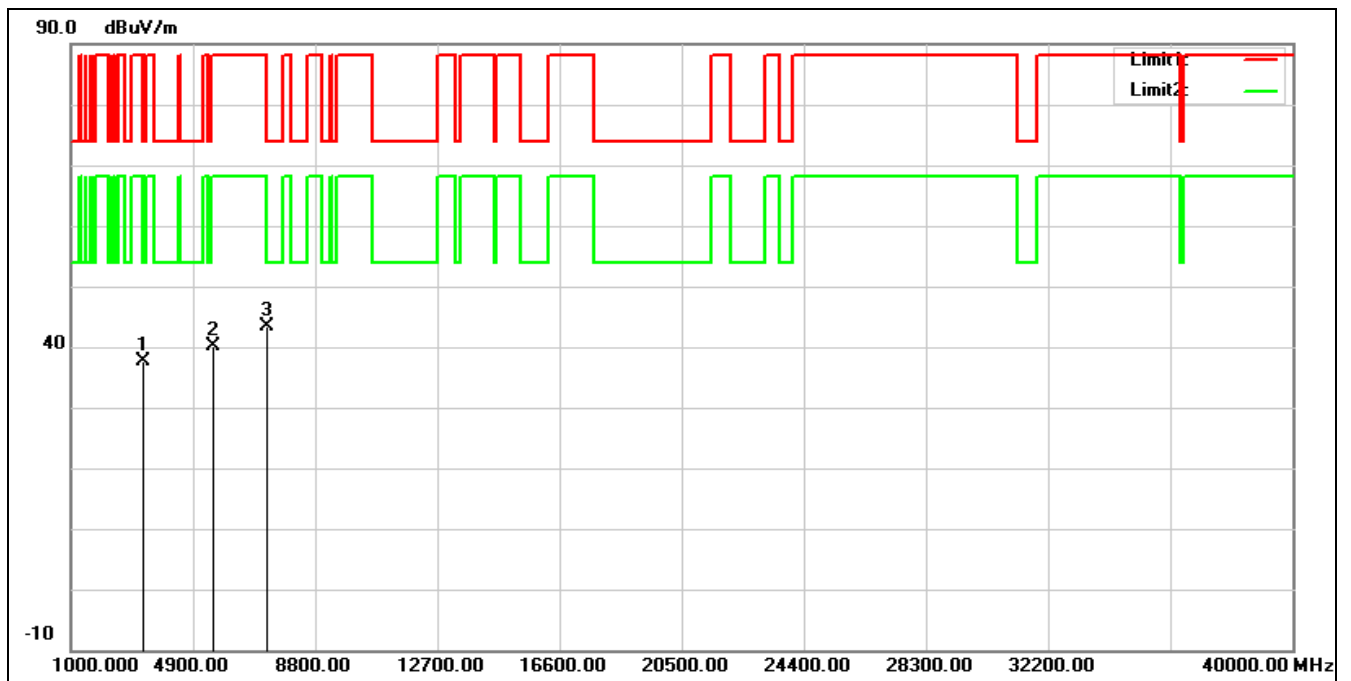


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3278.000	42.06	-4.48	37.58	88.20	-50.62	peak
2	5505.000	38.40	1.79	40.19	88.20	-48.01	peak
3*	7239.000	36.27	7.15	43.42	88.20	-44.78	peak

Band Edge

Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

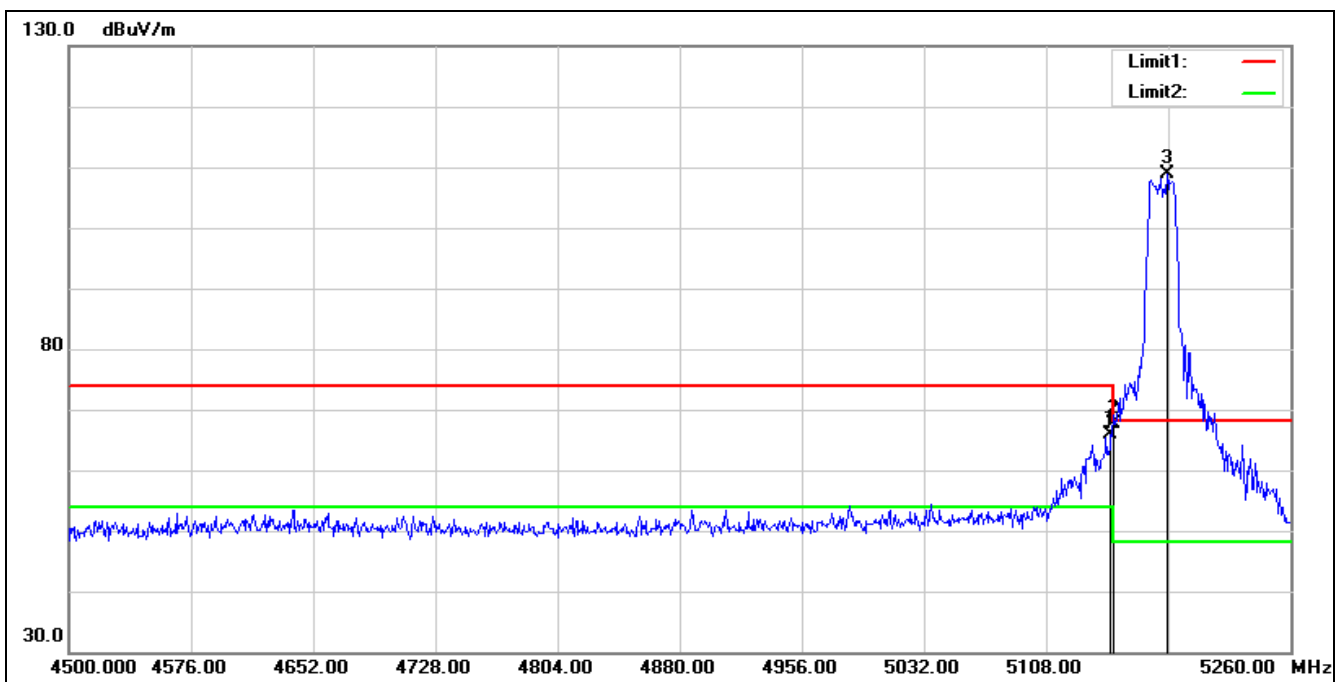


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	64.53	1.38	65.91	74.00	-8.09	peak
2	5150.000	66.34	1.38	67.72	74.00	-6.28	peak
3*	5183.240	107.72	1.22	108.94	68.20	40.74	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5180 MHz

Remark:

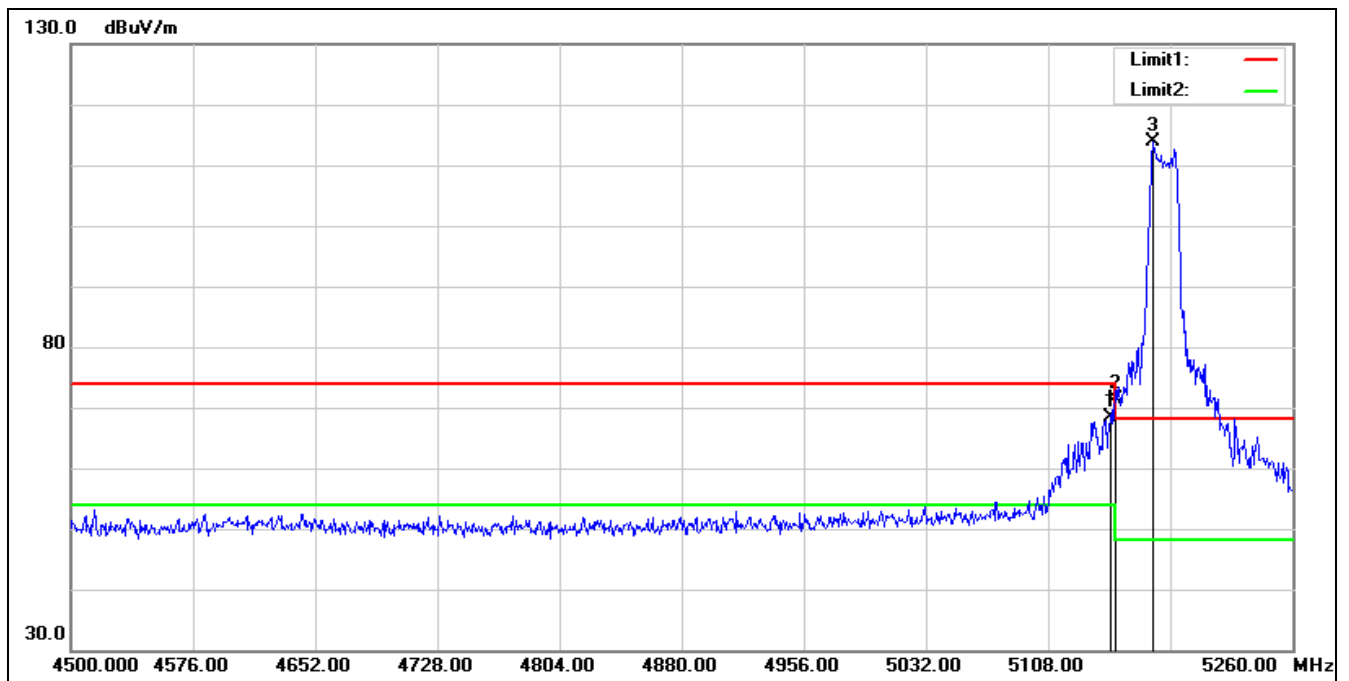


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	67.10	1.39	68.49	74.00	-5.51	peak
2	5150.000	70.08	1.38	71.46	74.00	-2.54	peak
3*	5173.360	112.62	1.26	113.88	68.20	45.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5200 MHz		
Remark:			

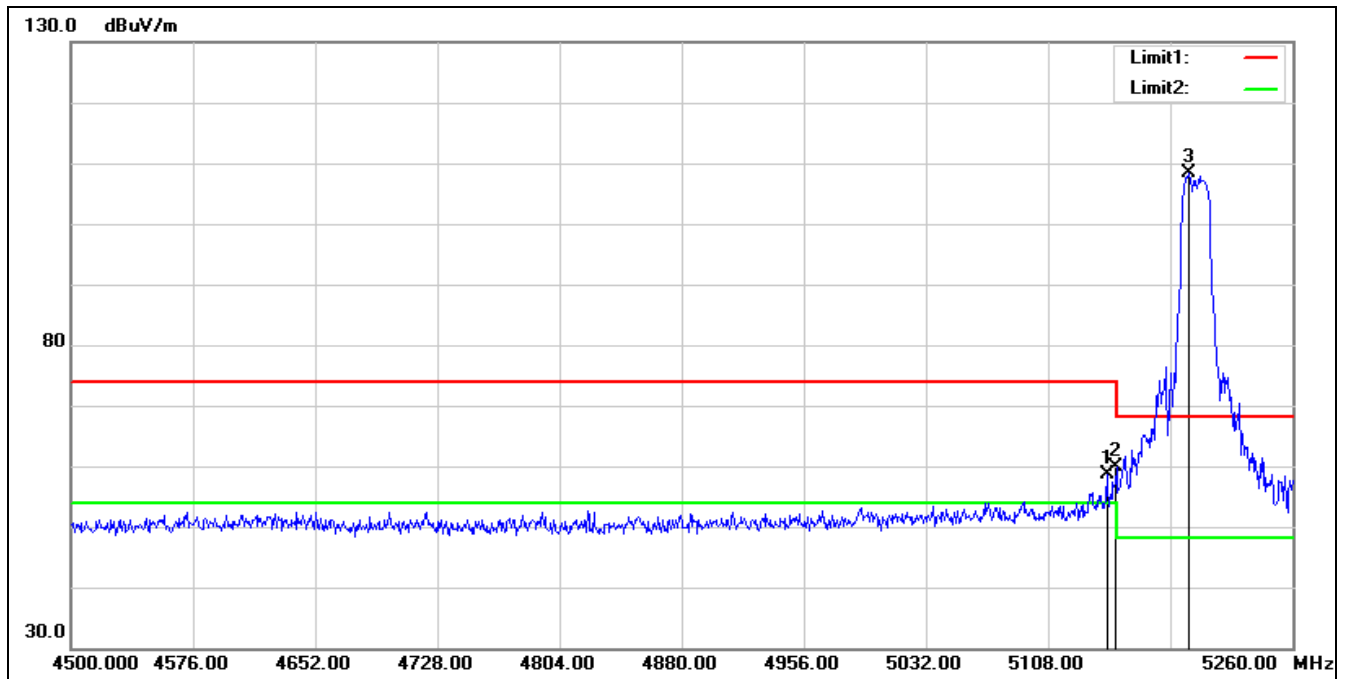


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.480	57.35	1.38	58.73	74.00	-15.27	peak
2	5150.000	58.51	1.38	59.89	74.00	-14.11	peak
3*	5195.400	107.20	1.16	108.36	68.20	40.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

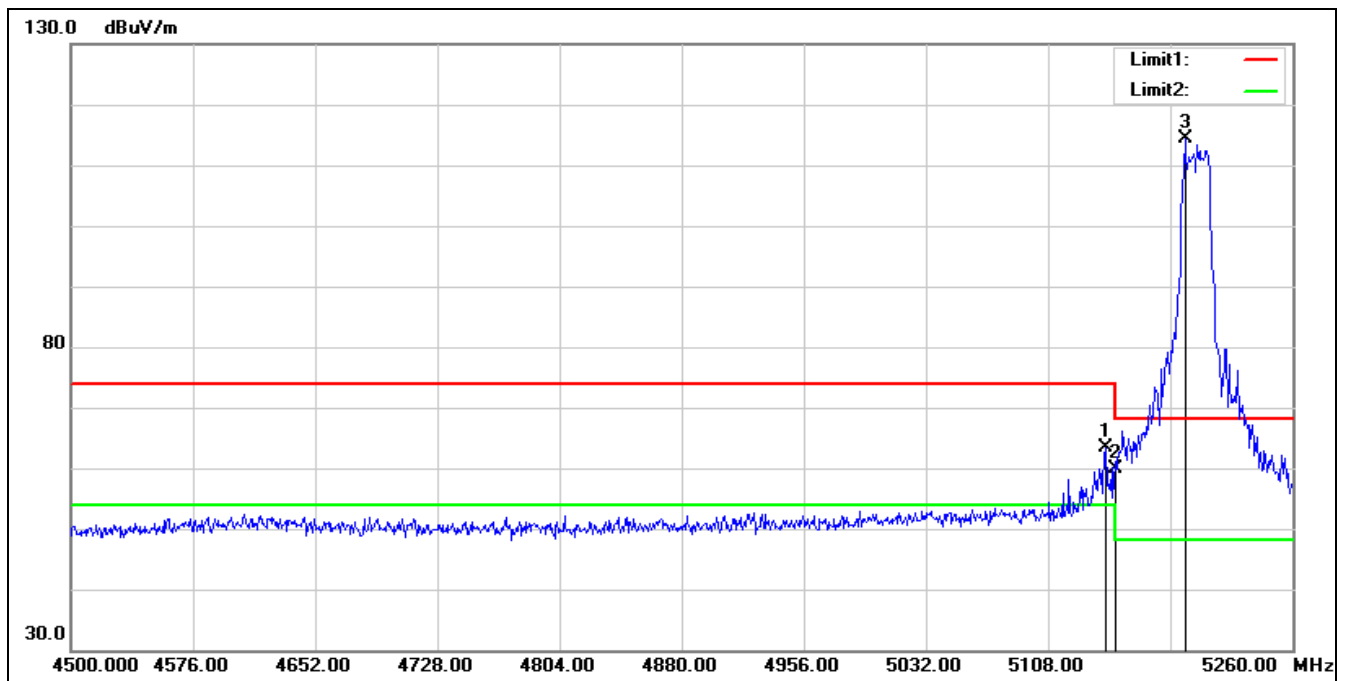


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.720	61.96	1.38	63.34	74.00	-10.66	peak
2	5150.000	58.60	1.38	59.98	74.00	-14.02	peak
3*	5193.120	113.19	1.17	114.36	68.20	46.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

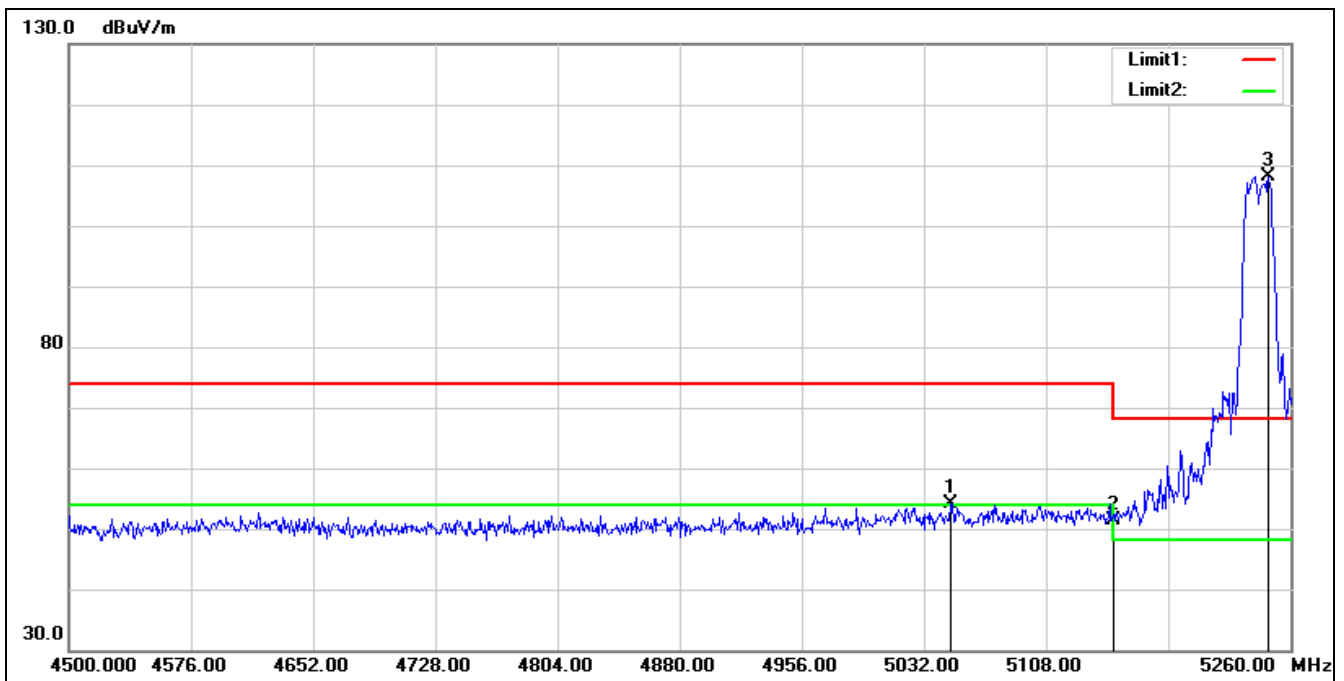


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5048.720	52.96	1.15	54.11	74.00	-19.89	peak
2	5150.000	50.06	1.38	51.44	74.00	-22.56	peak
3*	5246.320	107.28	0.83	108.11	68.20	39.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5240 MHz		
Remark:			

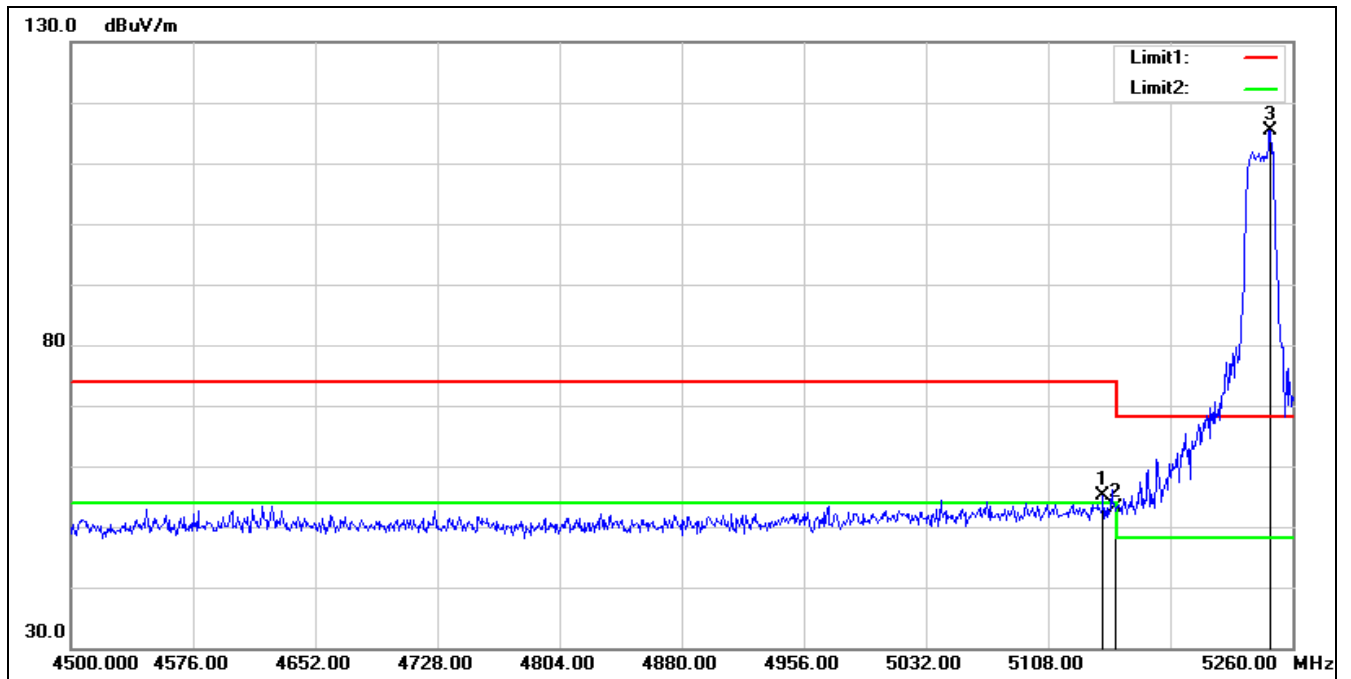


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.200	53.75	1.39	55.14	74.00	-18.86	peak
2	5150.000	51.69	1.38	53.07	74.00	-20.93	peak
3*	5246.320	114.51	0.83	115.34	68.20	47.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

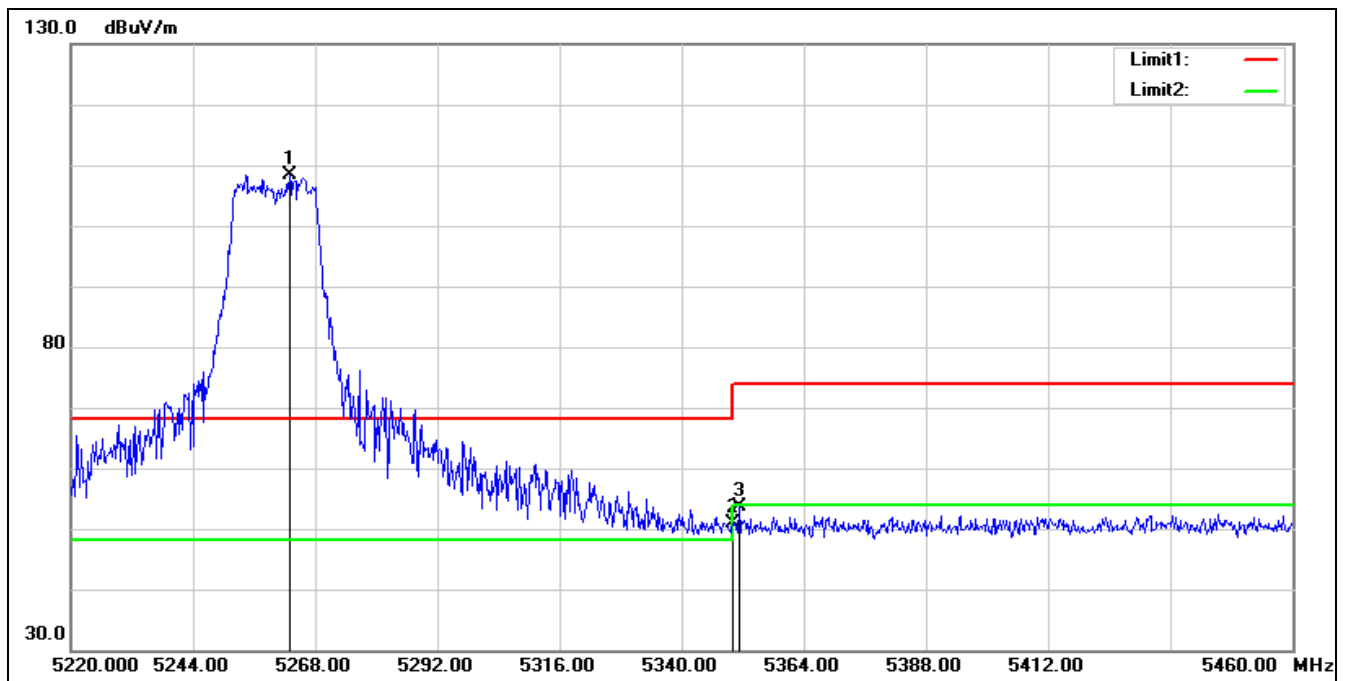


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5262.960	107.56	0.77	108.33	68.20	40.13	peak
2	5350.000	49.79	1.02	50.81	74.00	-23.19	peak
3	5351.280	52.69	1.03	53.72	74.00	-20.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5260 MHz		
Remark:			

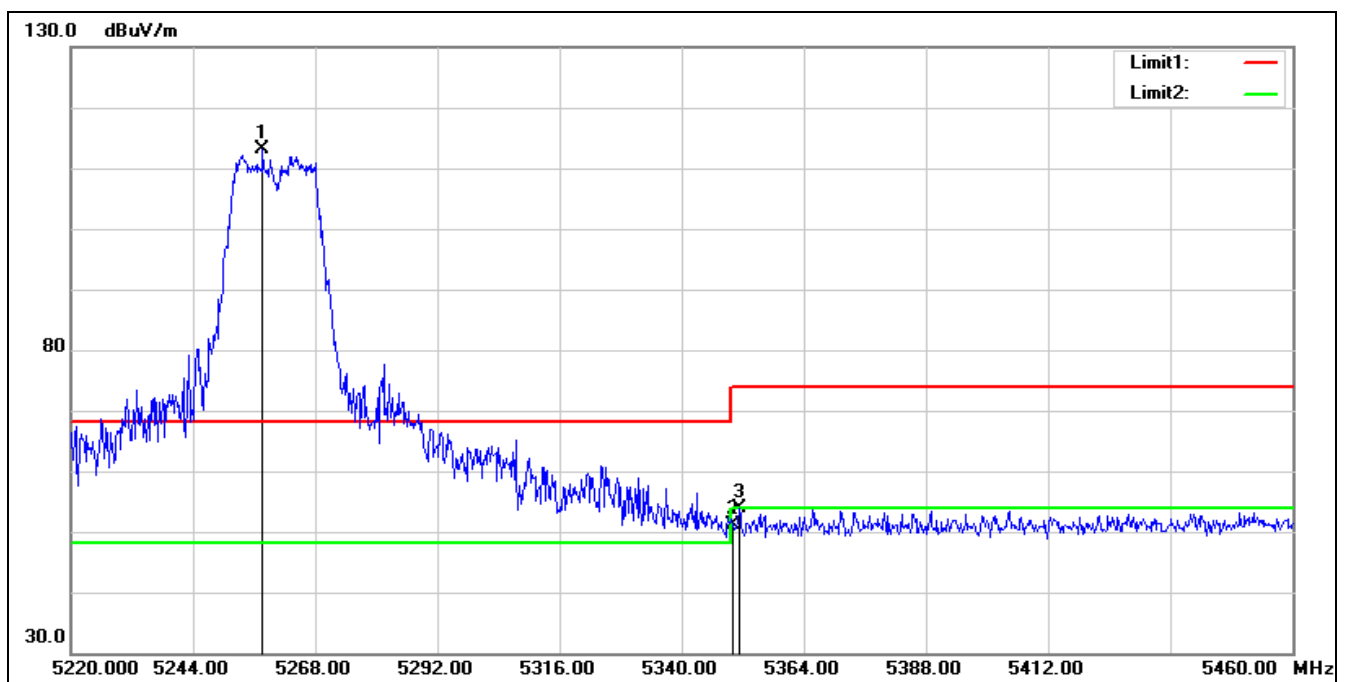

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5257.680	112.27	0.78	113.05	68.20	44.85	peak
2	5350.000	50.08	1.02	51.10	74.00	-22.90	peak
3	5351.280	52.80	1.03	53.83	74.00	-20.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

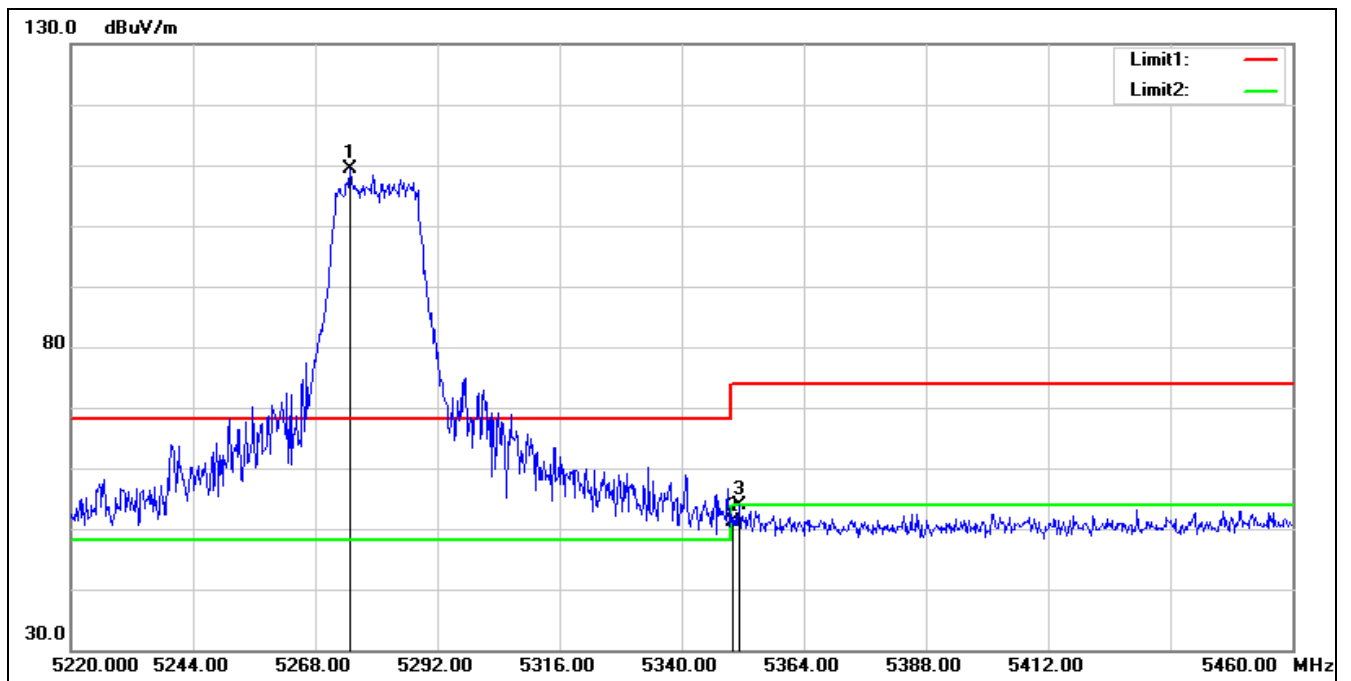


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5274.720	108.77	0.73	109.50	68.20	41.30	peak
2	5350.000	49.99	1.02	51.01	74.00	-22.99	peak
3	5351.280	52.91	1.03	53.94	74.00	-20.06	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5280 MHz

Remark:

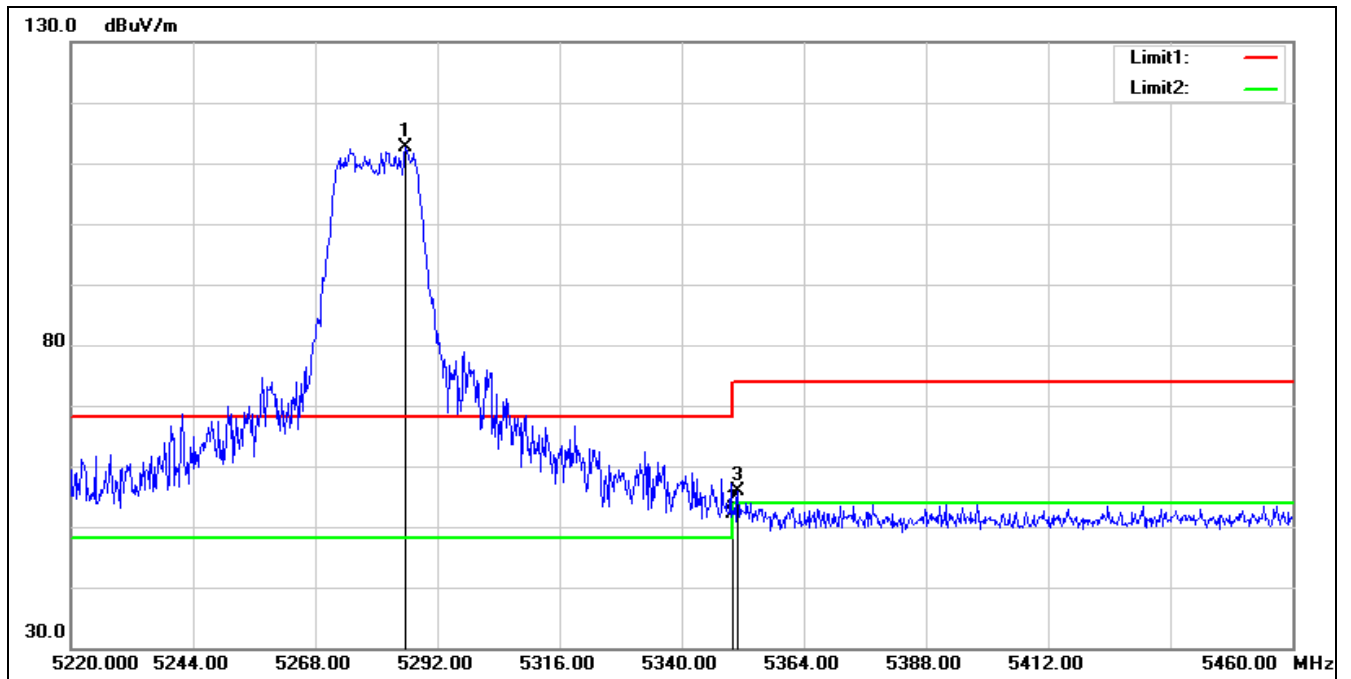

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5285.760	111.97	0.71	112.68	68.20	44.48	peak
2	5350.000	51.23	1.02	52.25	74.00	-21.75	peak
3	5351.040	54.76	1.03	55.79	74.00	-18.21	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5320 MHz
Remark:

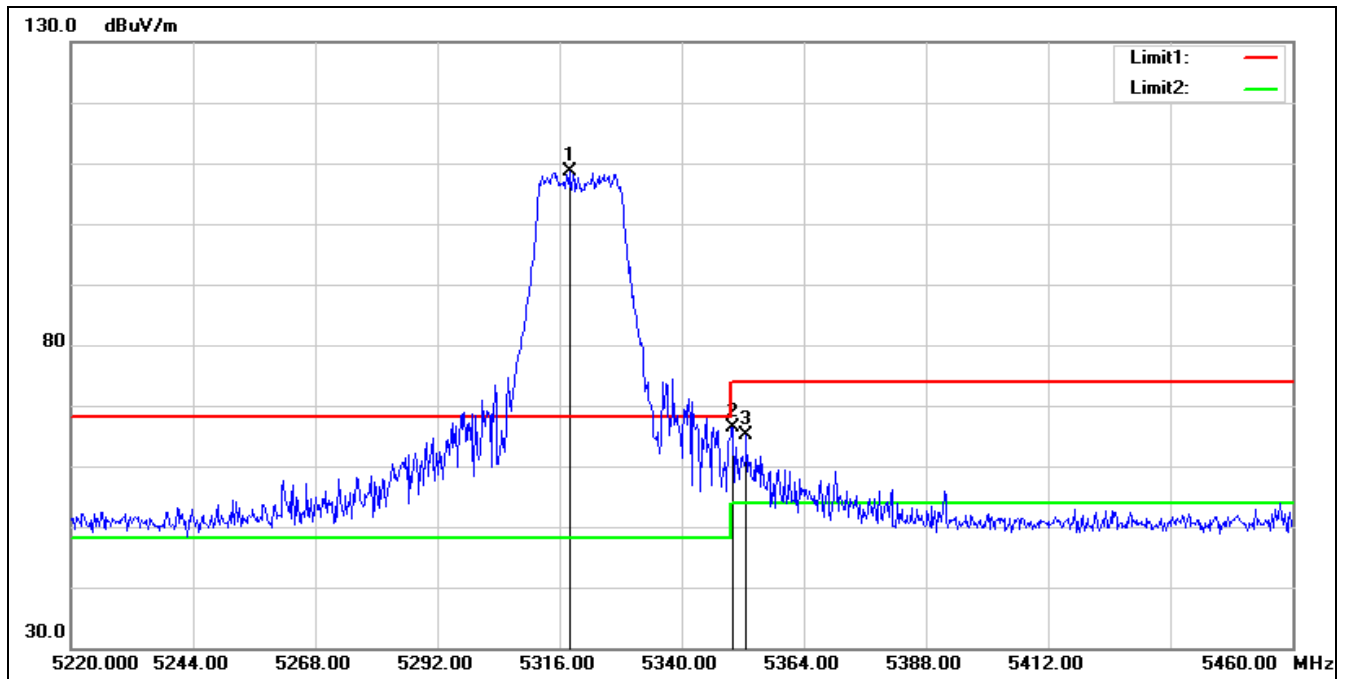


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5317.920	107.74	0.79	108.53	68.20	40.33	peak
2	5350.000	65.30	1.02	66.32	74.00	-7.68	peak
3	5352.720	64.16	1.04	65.20	74.00	-8.80	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5320 MHz

Remark:

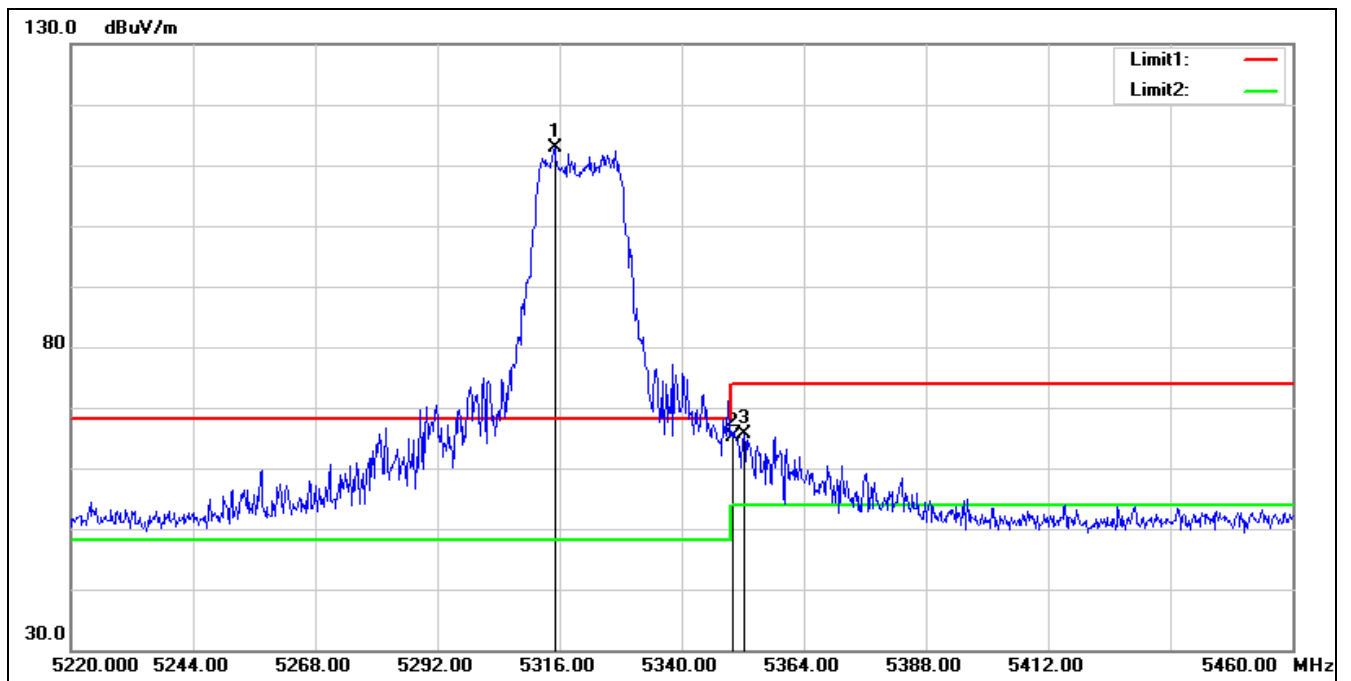


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5315.040	112.09	0.77	112.86	68.20	44.66	peak
2	5350.000	64.12	1.02	65.14	74.00	-8.86	peak
3	5352.240	64.64	1.03	65.67	74.00	-8.33	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5500 MHz
Remark:

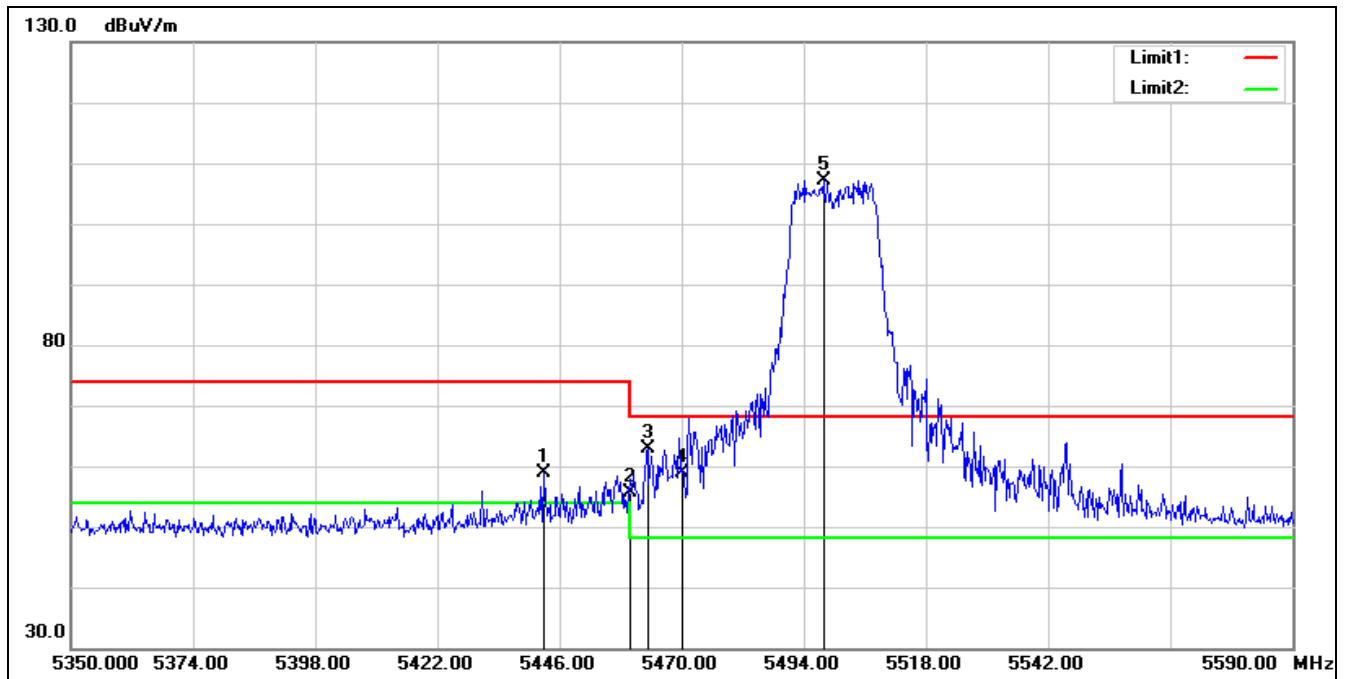

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5442.880	57.09	1.69	58.78	74.00	-15.22	peak
2	5460.000	53.97	1.75	55.72	74.00	-18.28	peak
3	5463.280	61.24	1.75	62.99	68.20	-5.21	peak
4	5470.000	57.04	1.77	58.81	68.20	-9.39	peak
5*	5497.840	105.34	1.80	107.14	68.20	38.94	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5500 MHz
Remark:

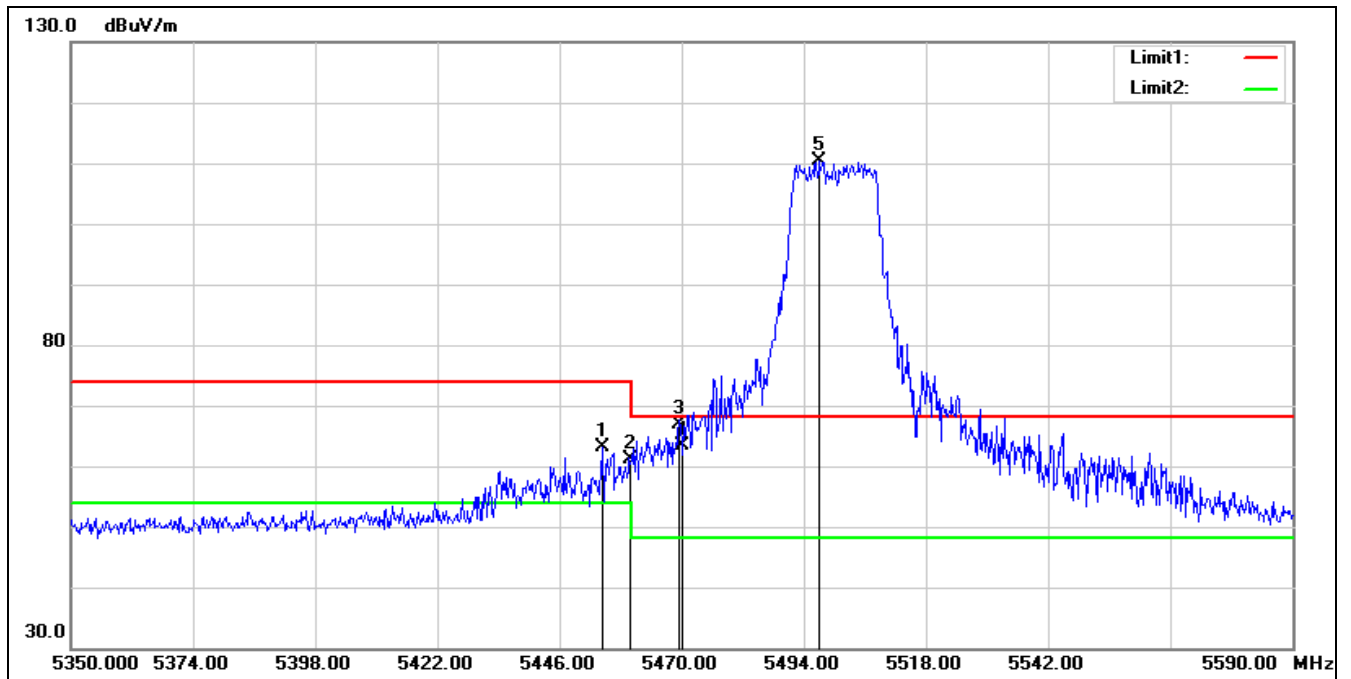


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	61.49	1.75	63.24	74.00	-10.76	peak
2	5460.000	59.48	1.75	61.23	74.00	-12.77	peak
3	5469.520	65.23	1.77	67.00	68.20	-1.20	peak
4	5470.000	61.56	1.77	63.33	68.20	-4.87	peak
5*	5497.120	108.65	1.80	110.45	68.20	42.25	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11a 5560 MHz

Remark:

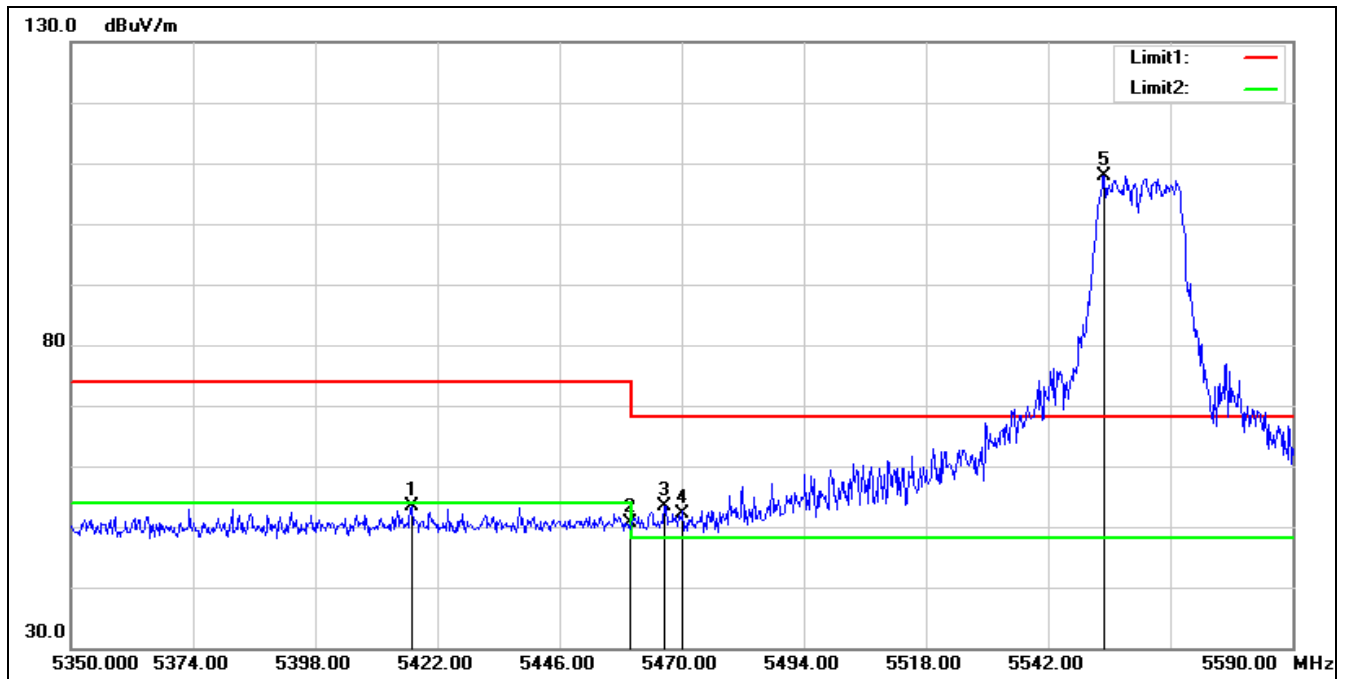


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.960	51.94	1.50	53.44	74.00	-20.56	peak
2	5460.000	48.81	1.75	50.56	74.00	-23.44	peak
3	5466.640	51.54	1.76	53.30	68.20	-14.90	peak
4	5470.000	50.45	1.77	52.22	68.20	-15.98	peak
5*	5553.040	106.09	1.78	107.87	68.20	39.67	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5560 MHz
Remark:

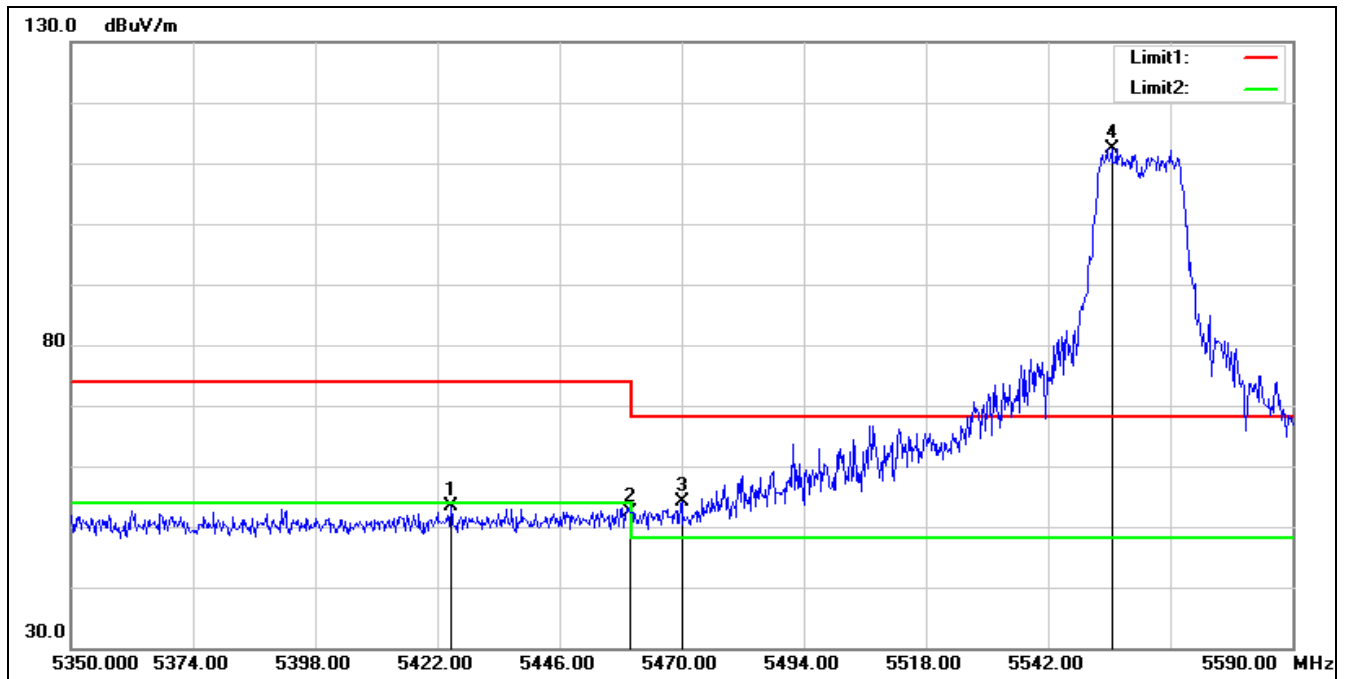


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.640	51.86	1.56	53.42	74.00	-20.58	peak
2	5460.000	50.63	1.75	52.38	74.00	-21.62	peak
3	5470.000	52.40	1.77	54.17	68.20	-14.03	peak
4*	5554.480	110.65	1.77	112.42	68.20	44.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

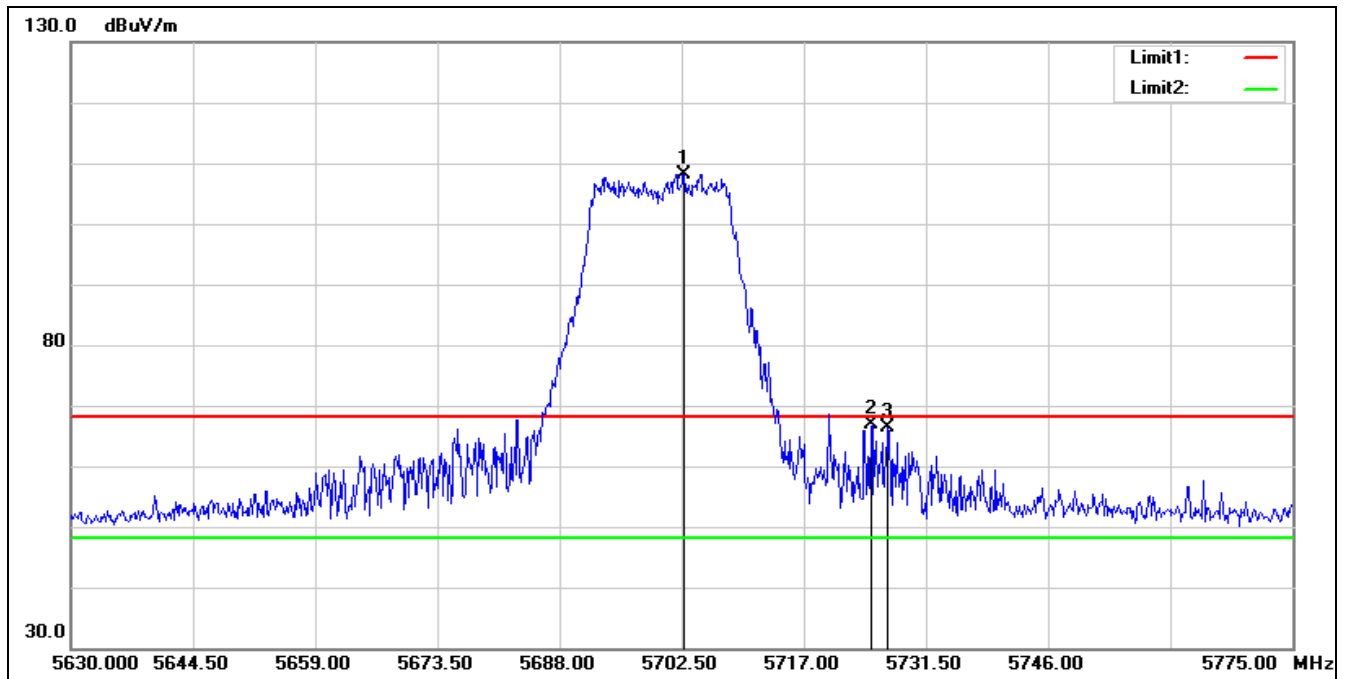


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5702.790	106.65	1.57	108.22	68.20	40.02	peak
2	5725.000	65.05	1.78	66.83	68.20	-1.37	peak
3	5727.005	64.67	1.80	66.47	68.20	-1.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

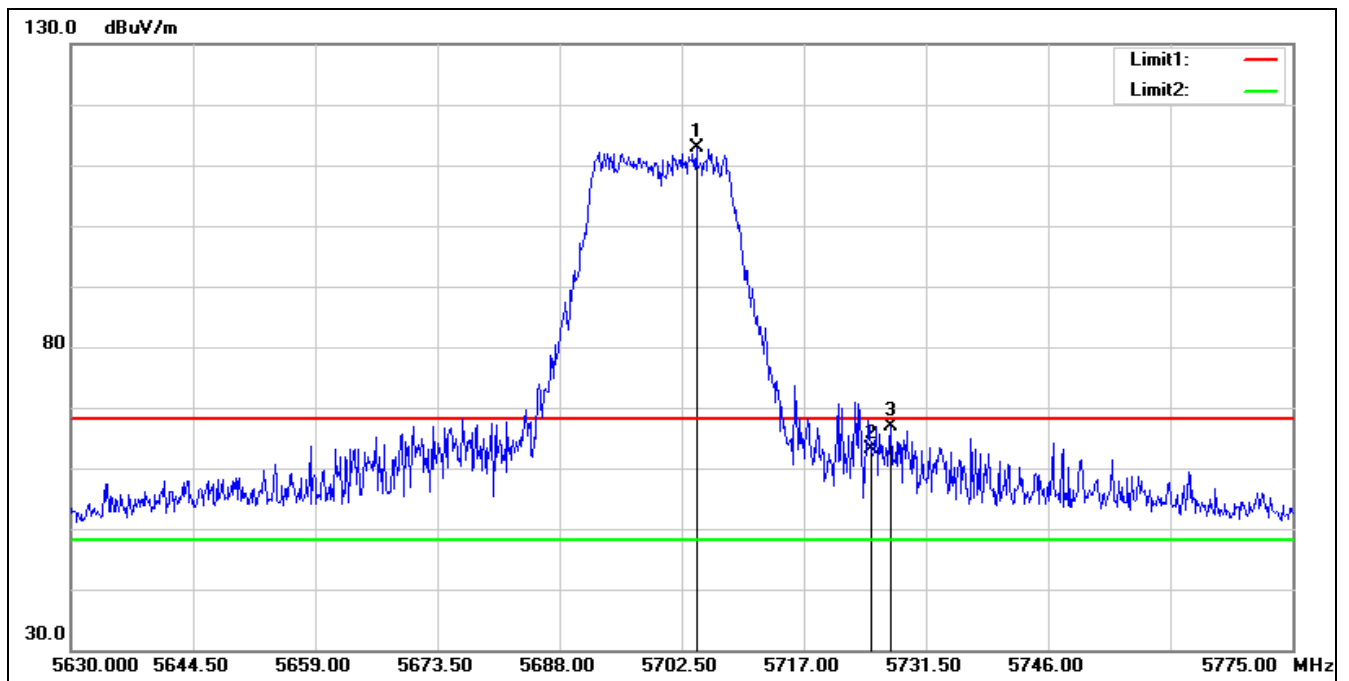

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5704.240	111.23	1.58	112.81	68.20	44.61	peak
2	5725.000	61.37	1.78	63.15	68.20	-5.05	peak
3	5727.295	65.11	1.80	66.91	68.20	-1.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			

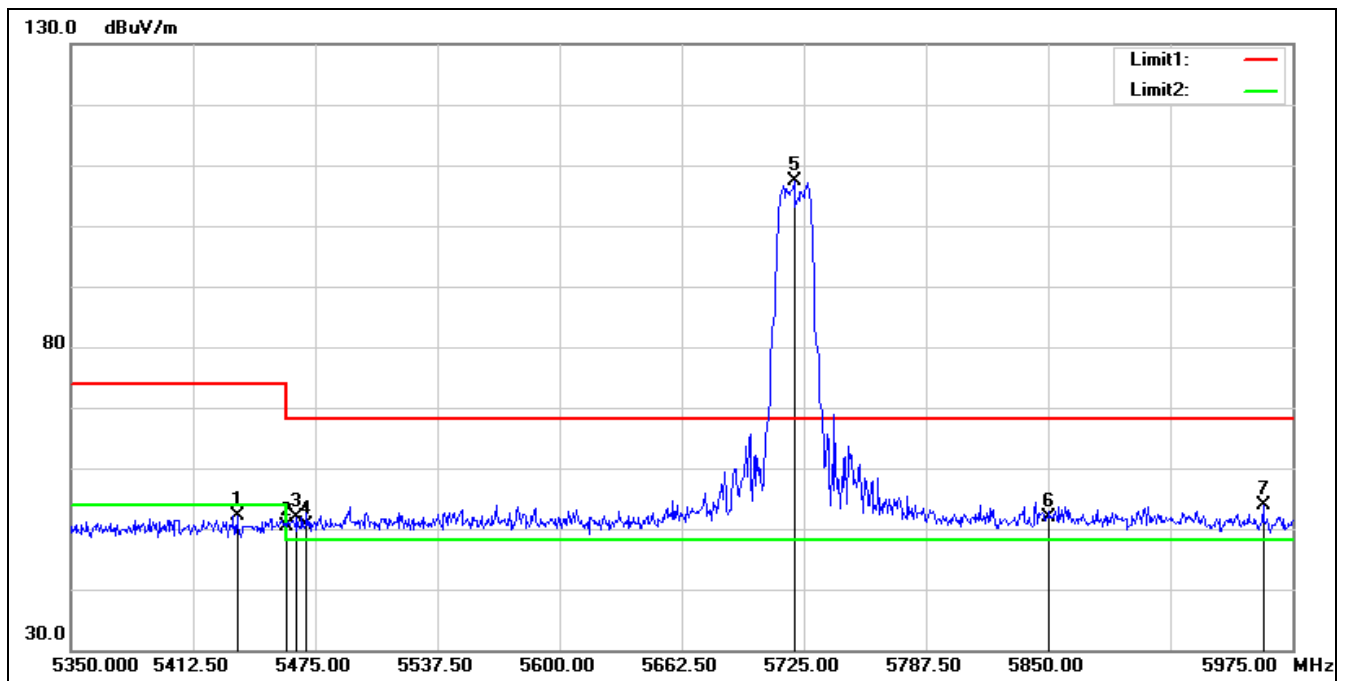

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5435.000	50.59	1.63	52.22	74.00	-21.78	peak
2	5460.000	48.62	1.75	50.37	74.00	-23.63	peak
3	5465.625	50.16	1.76	51.92	68.20	-16.28	peak
4	5470.000	48.94	1.77	50.71	68.20	-17.49	peak
5*	5720.000	105.72	1.74	107.46	68.20	39.26	peak
6	5850.000	49.60	2.29	51.89	68.20	-16.31	peak
7	5960.000	51.72	2.08	53.80	68.20	-14.40	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5720 MHz

Remark:

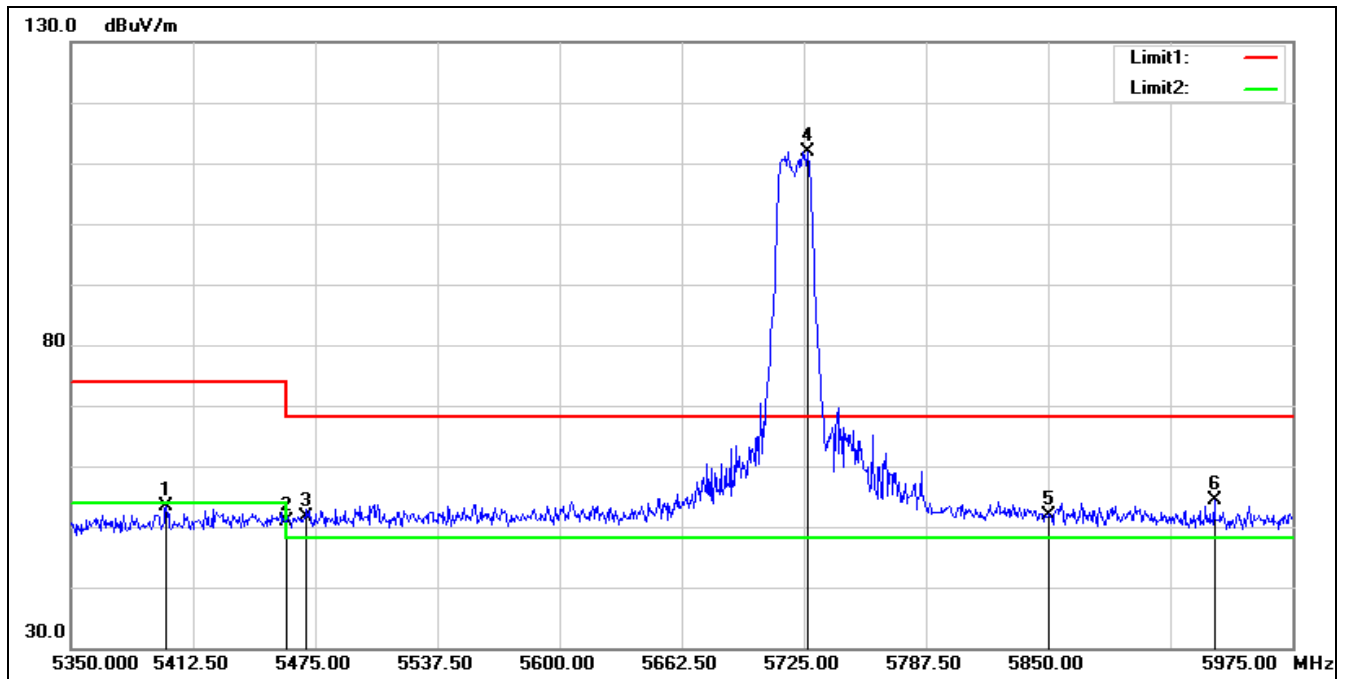

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5398.750	52.08	1.37	53.45	74.00	-20.55	peak
2	5460.000	49.25	1.75	51.00	74.00	-23.00	peak
3	5470.000	49.81	1.77	51.58	68.20	-16.62	peak
4*	5726.875	110.11	1.80	111.91	68.20	43.71	peak
5	5850.000	49.57	2.29	51.86	68.20	-16.34	peak
6	5935.000	52.21	2.16	54.37	68.20	-13.83	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5745 MHz
Remark:

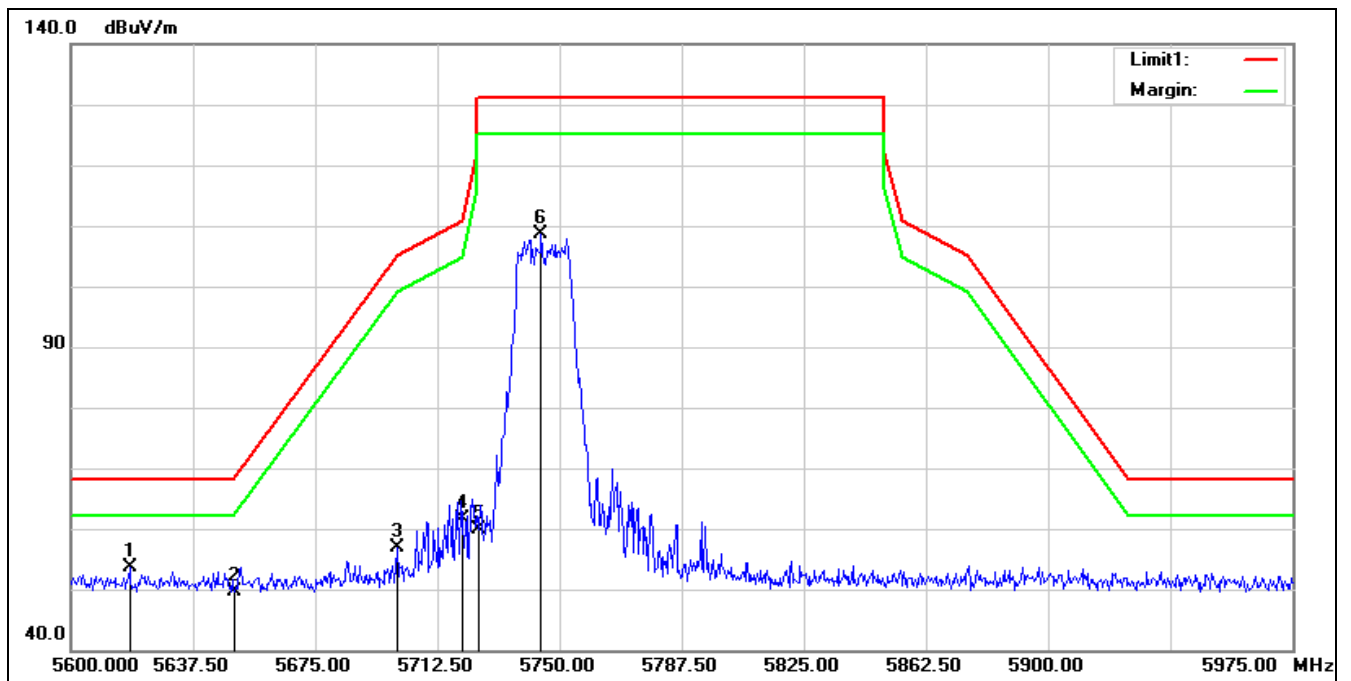


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5618.000	51.93	1.62	53.55	68.20	-14.65	peak
2	5650.000	48.10	1.56	49.66	68.20	-18.54	peak
3	5700.000	55.43	1.54	56.97	105.20	-48.23	peak
4	5720.000	59.90	1.74	61.64	110.80	-49.16	peak
5	5725.000	58.17	1.78	59.95	122.20	-62.25	peak
6	5744.375	106.76	1.97	108.73	131.20	-22.47	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5745 MHz

Remark:

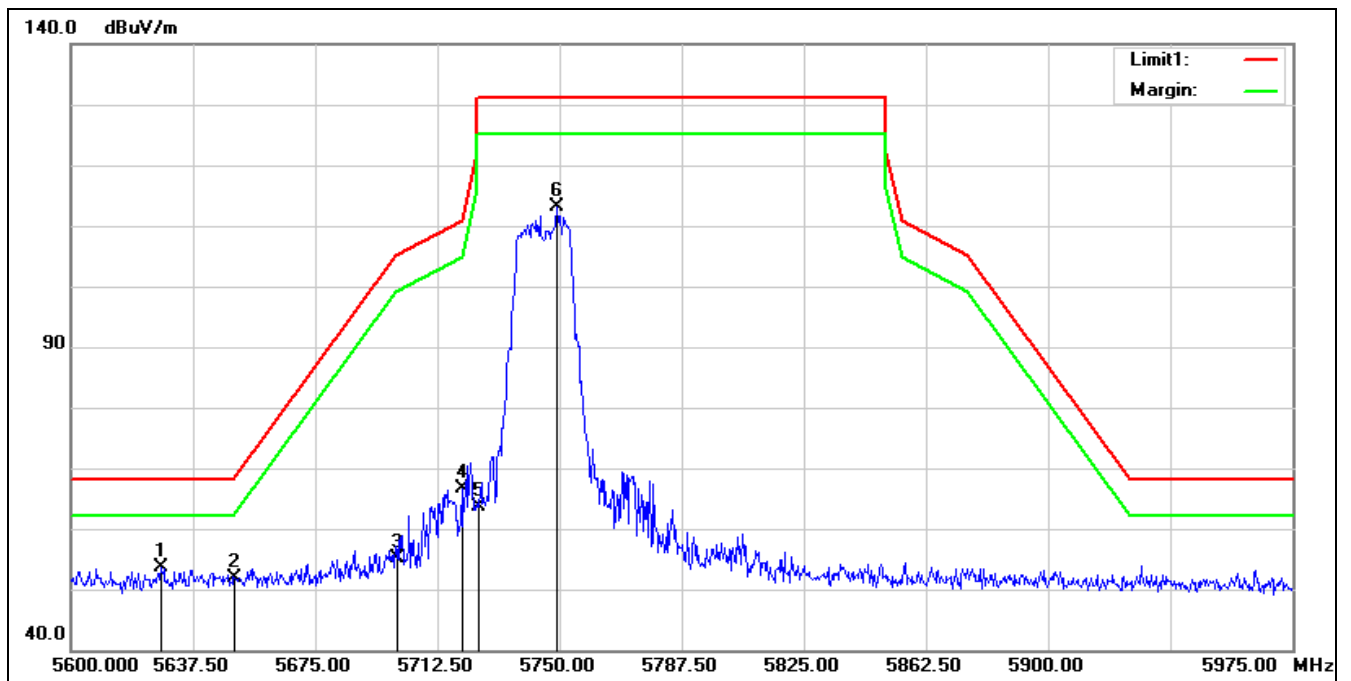

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5627.750	51.91	1.60	53.51	68.20	-14.69	peak
2	5650.000	50.28	1.56	51.84	68.20	-16.36	peak
3	5700.000	53.55	1.54	55.09	105.20	-50.11	peak
4	5720.000	64.96	1.74	66.70	110.80	-44.10	peak
5	5725.000	61.74	1.78	63.52	122.20	-58.68	peak
6	5749.250	111.04	2.02	113.06	131.20	-18.14	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5785 MHz		
Remark:			

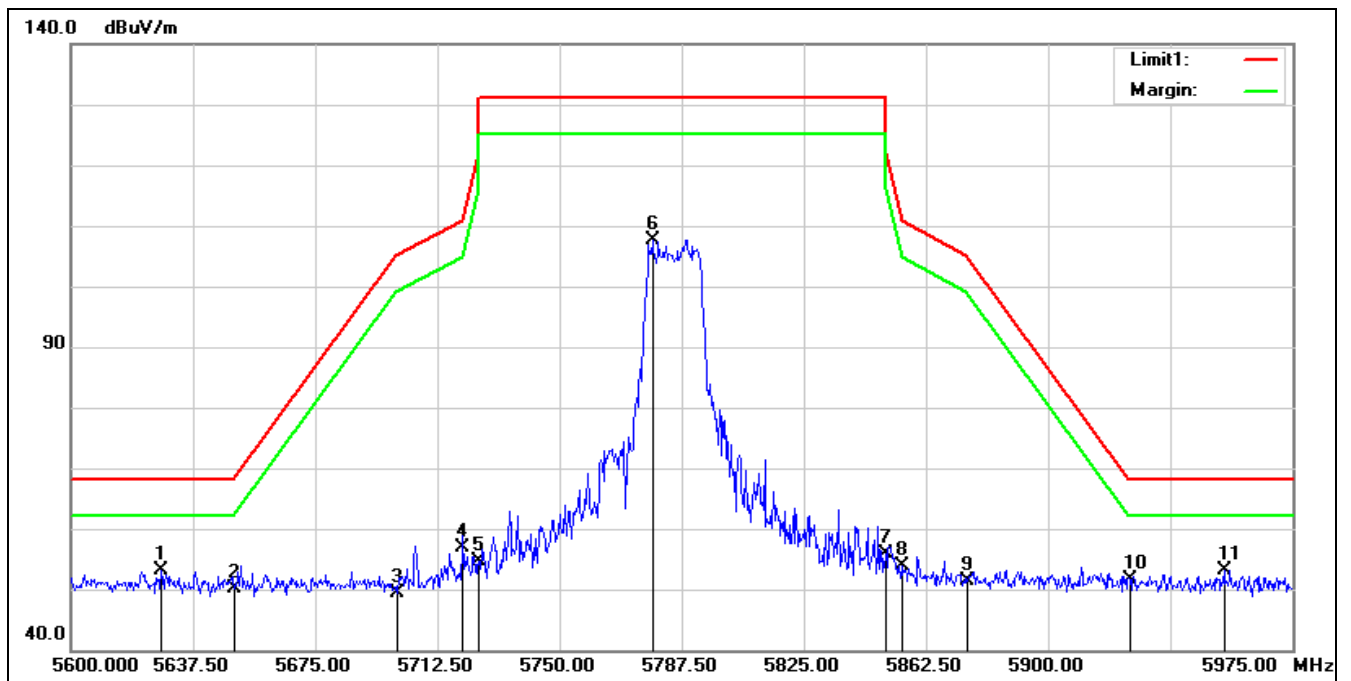

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5785 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5627.750	51.59	1.60	53.19	68.20	-15.01	peak
2	5650.000	48.68	1.56	50.24	68.20	-17.96	peak
3	5700.000	47.73	1.54	49.27	105.20	-55.93	peak
4	5720.000	55.06	1.74	56.80	110.80	-54.00	peak
5	5725.000	52.90	1.78	54.68	122.20	-67.52	peak
6	5778.500	105.57	2.13	107.70	131.20	-23.50	peak
7	5850.000	53.55	2.29	55.84	122.20	-66.36	peak
8	5855.000	51.54	2.31	53.85	110.80	-56.95	peak
9	5875.000	49.09	2.34	51.43	105.20	-53.77	peak
10	5925.000	49.34	2.23	51.57	68.20	-16.63	peak
11	5954.000	51.07	2.08	53.15	68.20	-15.05	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			

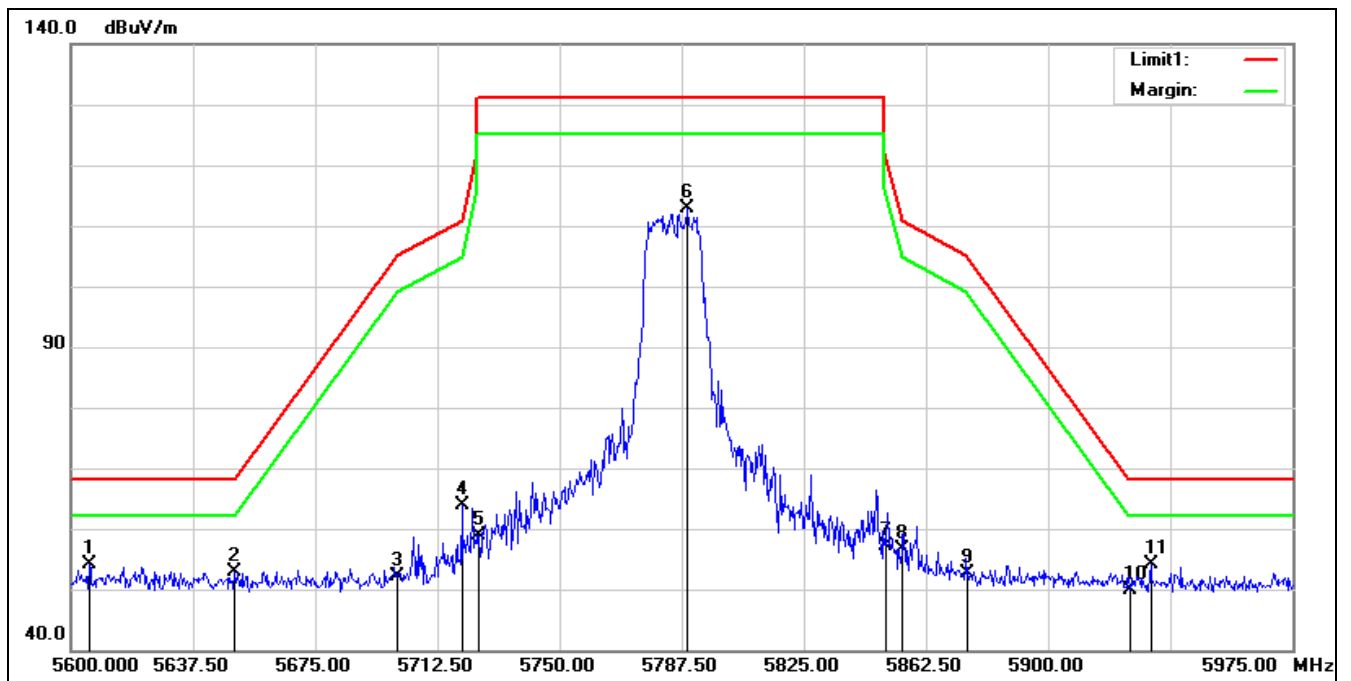

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5605.625	52.40	1.66	54.06	68.20	-14.14	peak
2	5650.000	51.24	1.56	52.80	68.20	-15.40	peak
3	5700.000	50.64	1.54	52.18	105.20	-53.02	peak
4	5720.000	62.02	1.74	63.76	110.80	-47.04	peak
5	5725.000	57.09	1.78	58.87	122.20	-63.33	peak
6	5789.375	110.81	2.17	112.98	131.20	-18.22	peak
7	5850.000	54.84	2.29	57.13	122.20	-65.07	peak
8	5855.000	54.29	2.31	56.60	110.80	-54.20	peak
9	5875.000	50.25	2.34	52.59	105.20	-52.61	peak
10	5925.000	47.73	2.23	49.96	68.20	-18.24	peak
11*	5931.500	51.99	2.18	54.17	68.20	-14.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

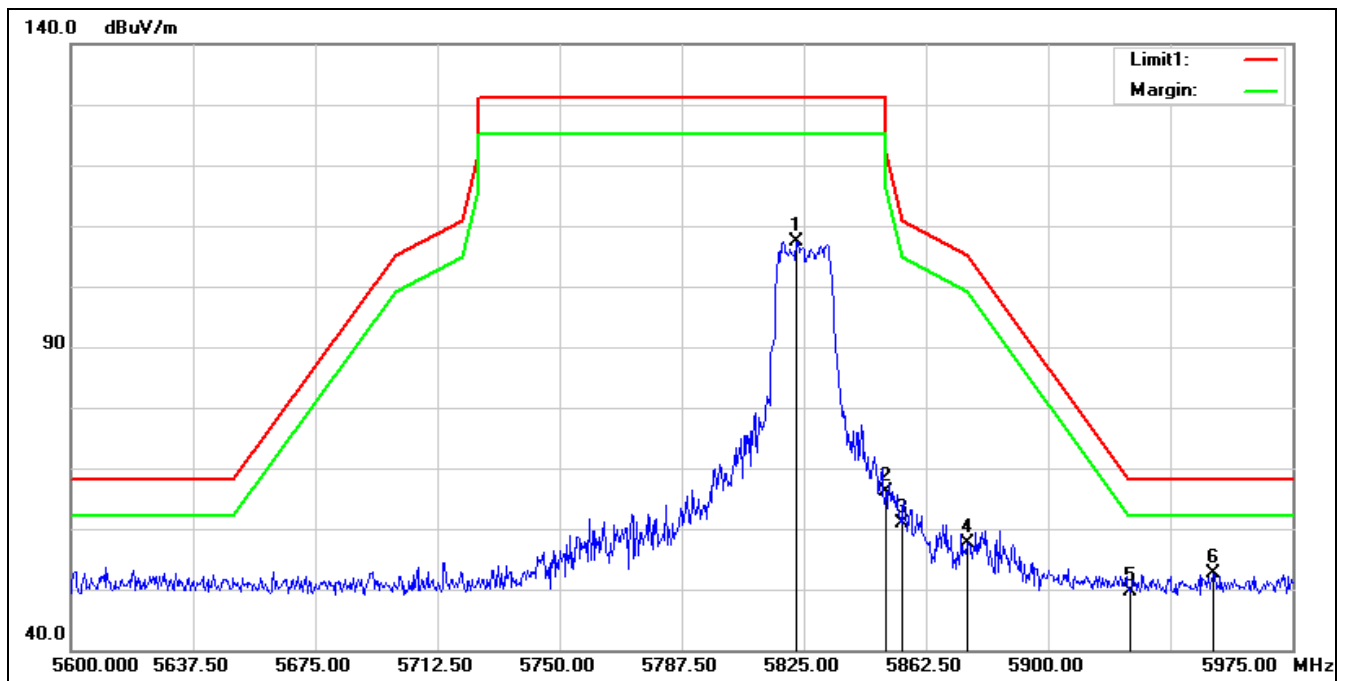


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5822.750	105.13	2.25	107.38	131.20	-23.82	peak
2	5850.000	63.76	2.29	66.05	122.20	-56.15	peak
3	5855.000	58.46	2.31	60.77	110.80	-50.03	peak
4	5875.000	55.37	2.34	57.71	105.20	-47.49	peak
5	5925.000	47.44	2.23	49.67	68.20	-18.53	peak
6*	5950.625	50.48	2.06	52.54	68.20	-15.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

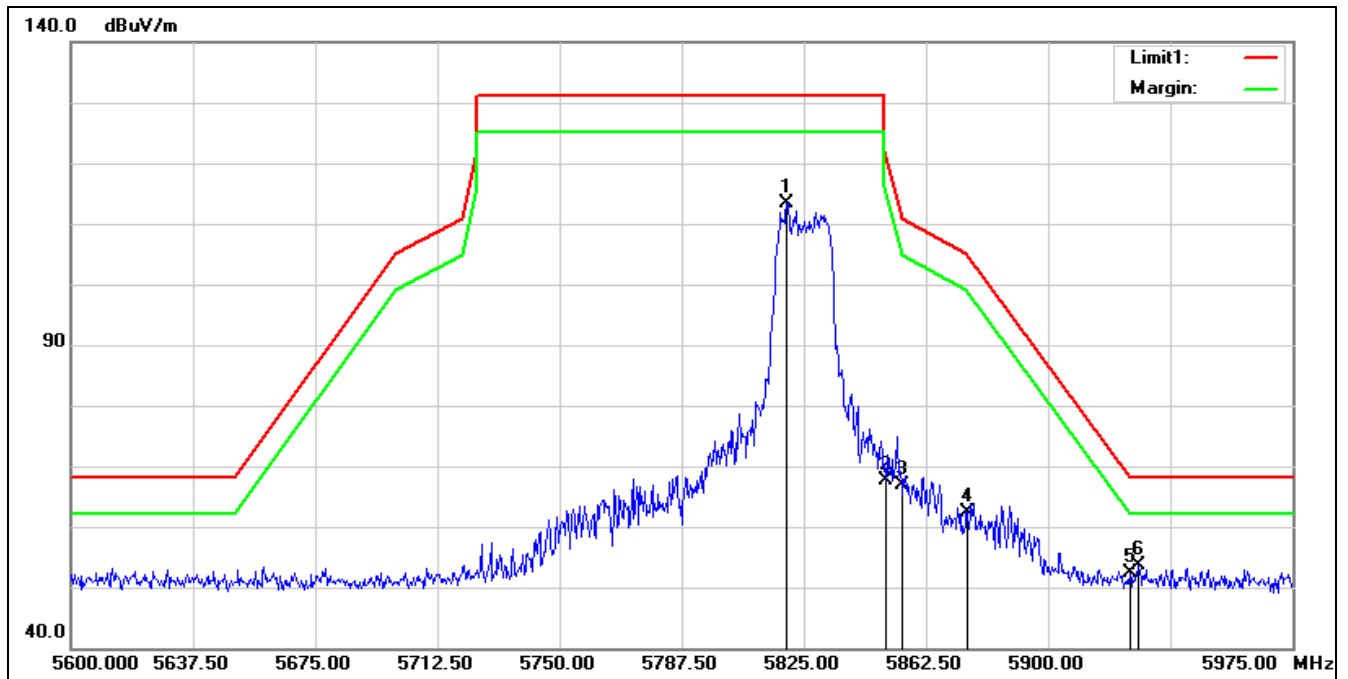


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5819.750	111.25	2.24	113.49	131.20	-17.71	peak
2	5850.000	65.46	2.29	67.75	122.20	-54.45	peak
3	5855.000	64.63	2.31	66.94	110.80	-43.86	peak
4	5875.000	59.96	2.34	62.30	105.20	-42.90	peak
5	5925.000	50.26	2.23	52.49	68.20	-15.71	peak
6*	5927.750	51.43	2.20	53.63	68.20	-14.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5180 MHz		
Remark:			

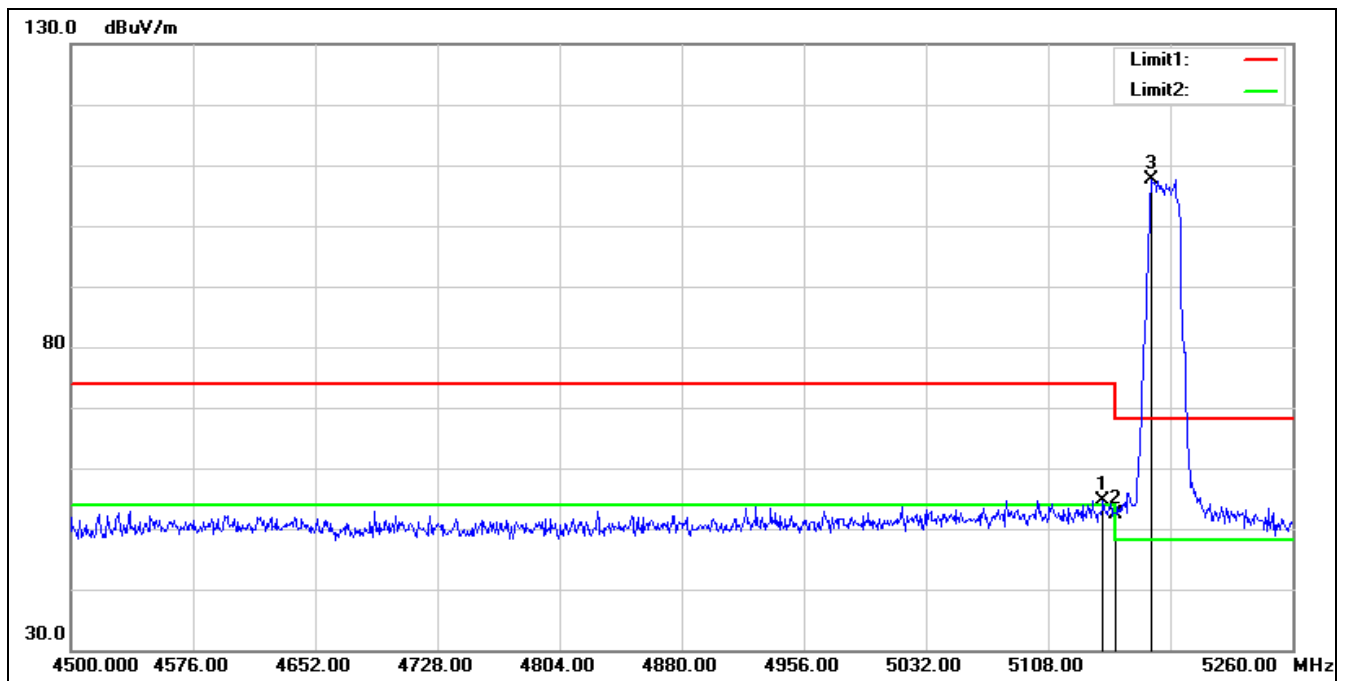

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.200	53.34	1.39	54.73	74.00	-19.27	peak
2	5150.000	50.96	1.38	52.34	74.00	-21.66	peak
3*	5171.840	106.33	1.27	107.60	68.20	39.40	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5180 MHz		
Remark:			

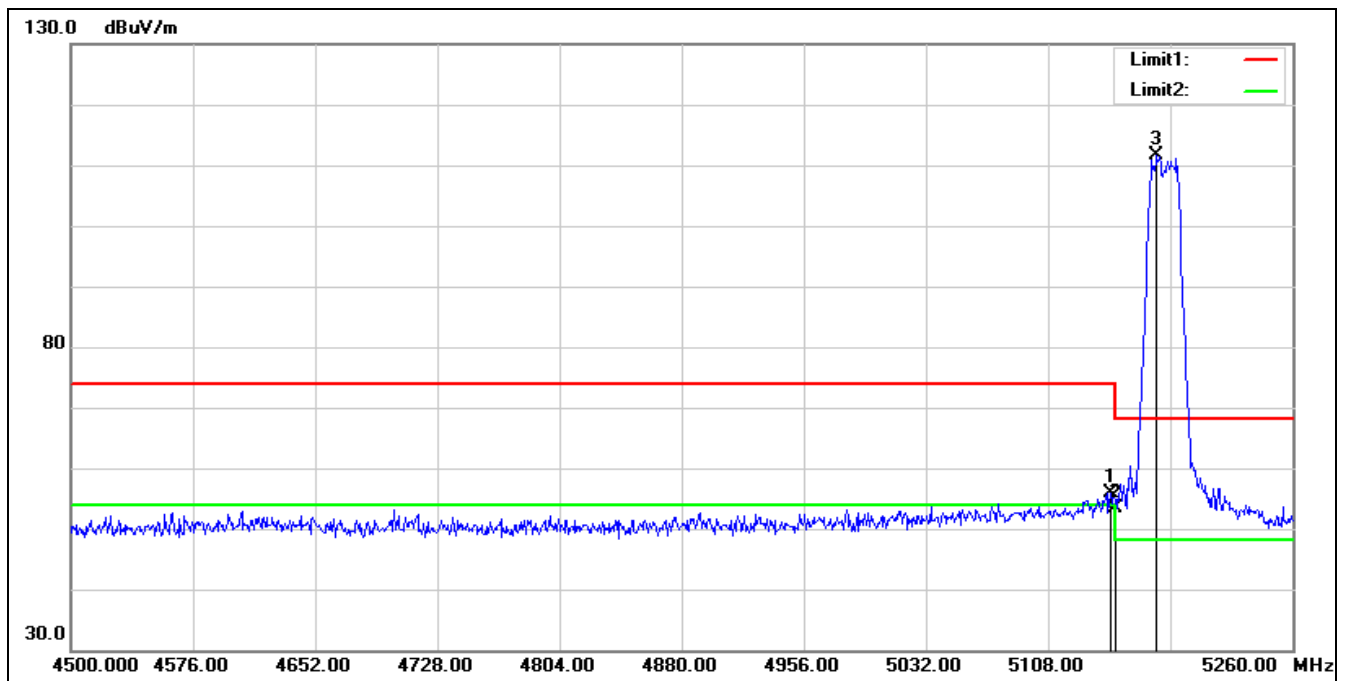


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	54.58	1.39	55.97	74.00	-18.03	peak
2	5150.000	52.08	1.38	53.46	74.00	-20.54	peak
3*	5175.640	110.46	1.26	111.72	68.20	43.52	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5200 MHz

Remark:

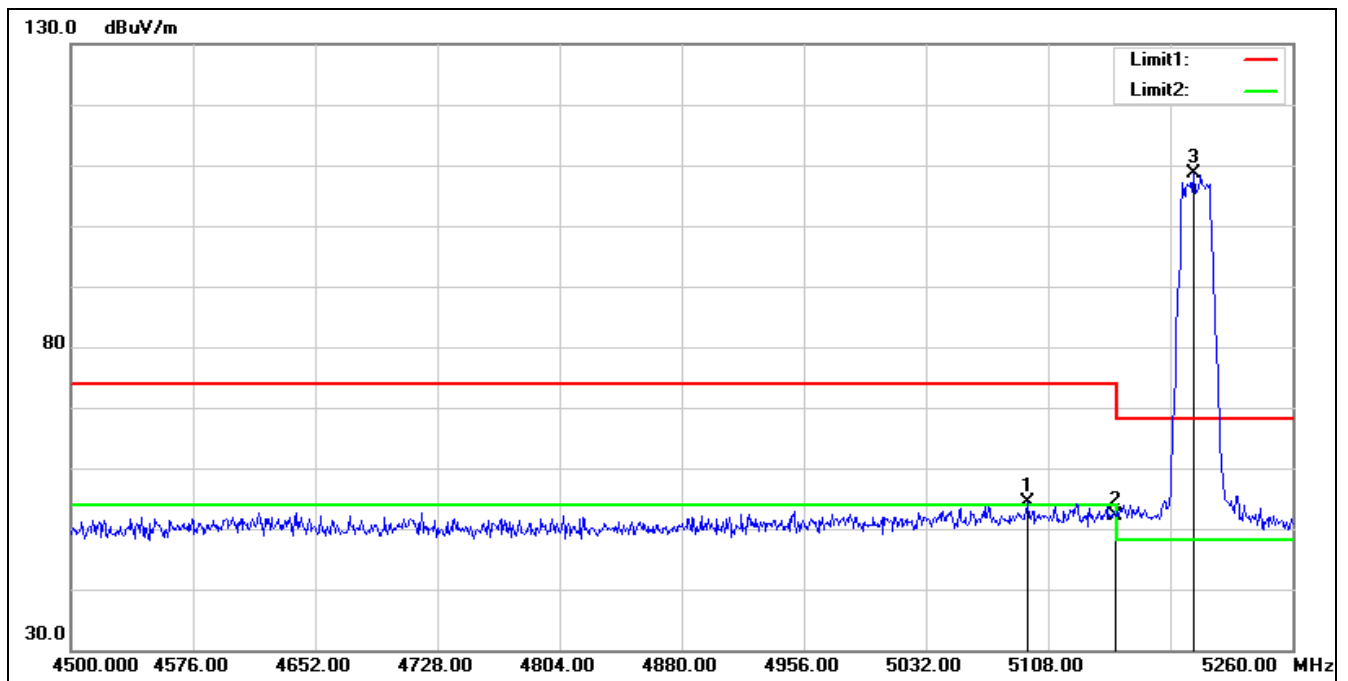

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5095.080	52.86	1.40	54.26	74.00	-19.74	peak
2	5150.000	50.80	1.38	52.18	74.00	-21.82	peak
3*	5198.440	107.52	1.15	108.67	68.20	40.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5200 MHz		
Remark:			

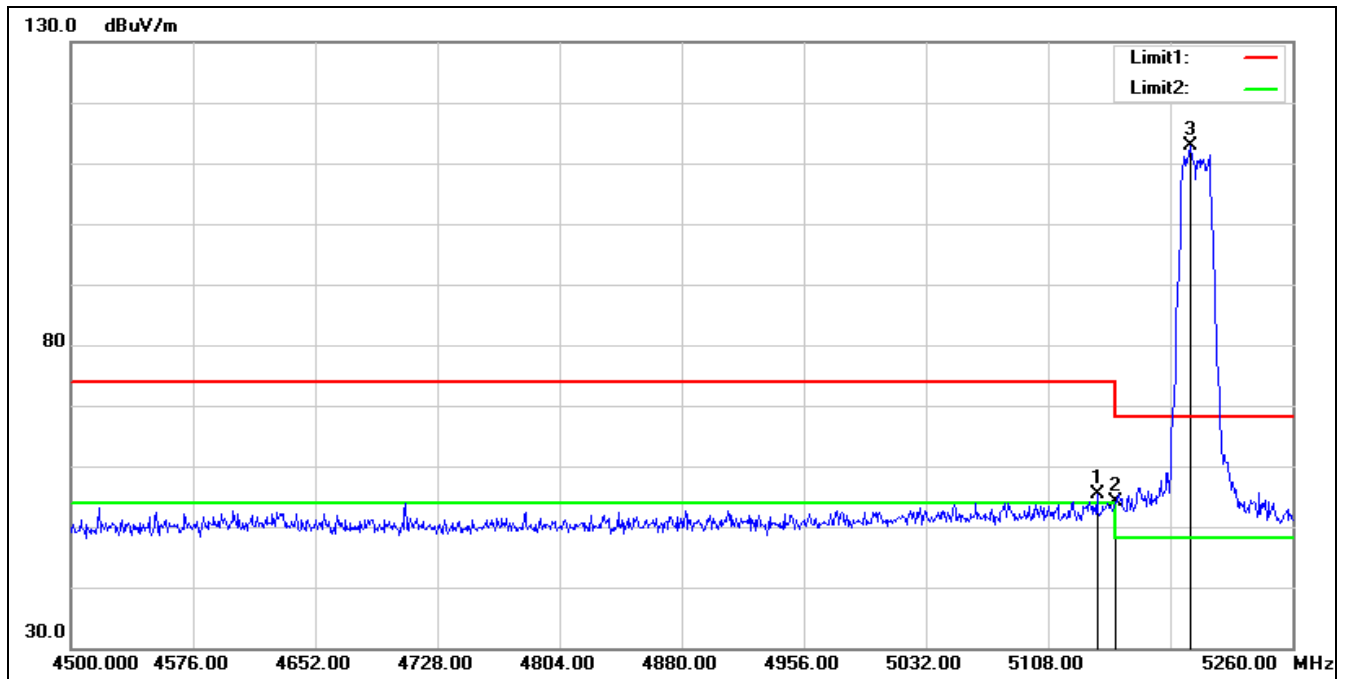


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.400	53.88	1.39	55.27	74.00	-18.73	peak
2	5150.000	52.74	1.38	54.12	74.00	-19.88	peak
3*	5196.920	111.72	1.15	112.87	68.20	44.67	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5240 MHz

Remark:

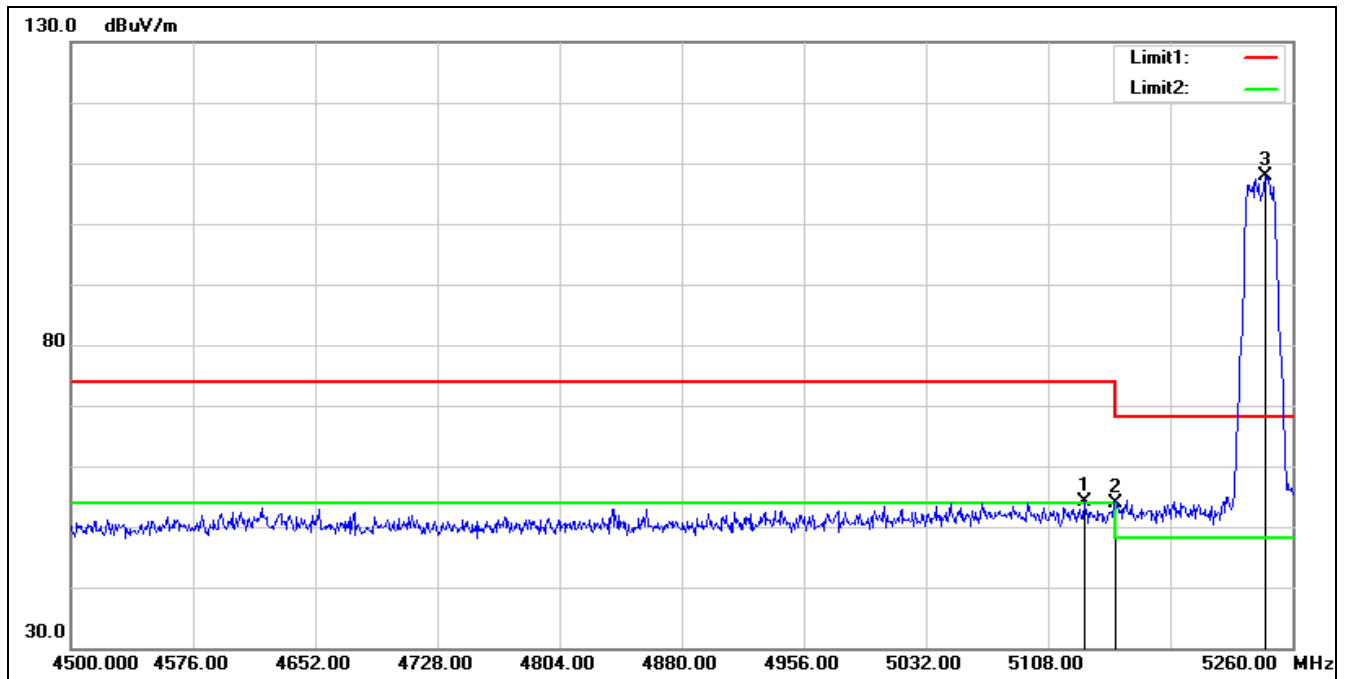


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5130.800	52.76	1.39	54.15	74.00	-19.85	peak
2	5150.000	52.58	1.38	53.96	74.00	-20.04	peak
3*	5243.280	107.00	0.85	107.85	68.20	39.65	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5240 MHz

Remark:

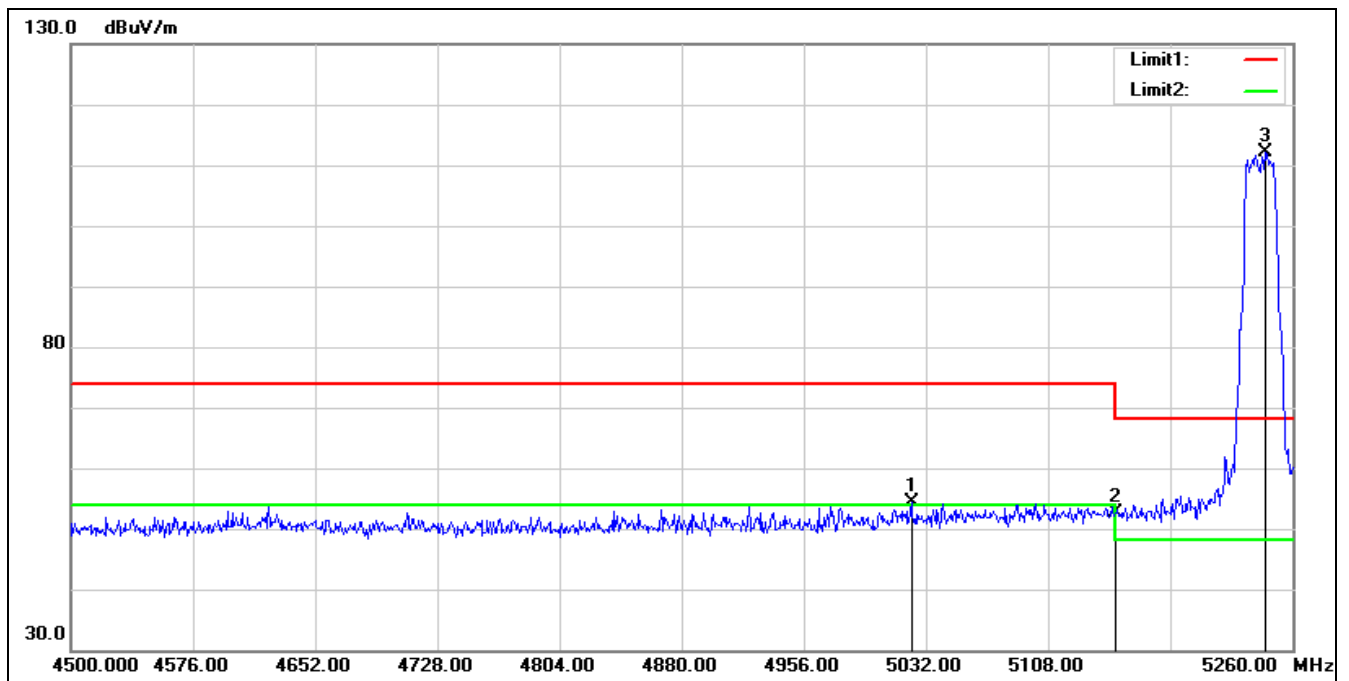


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5022.880	53.52	0.86	54.38	74.00	-19.62	peak
2	5150.000	51.13	1.38	52.51	74.00	-21.49	peak
3*	5243.280	111.34	0.85	112.19	68.20	43.99	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5260 MHz
Remark:

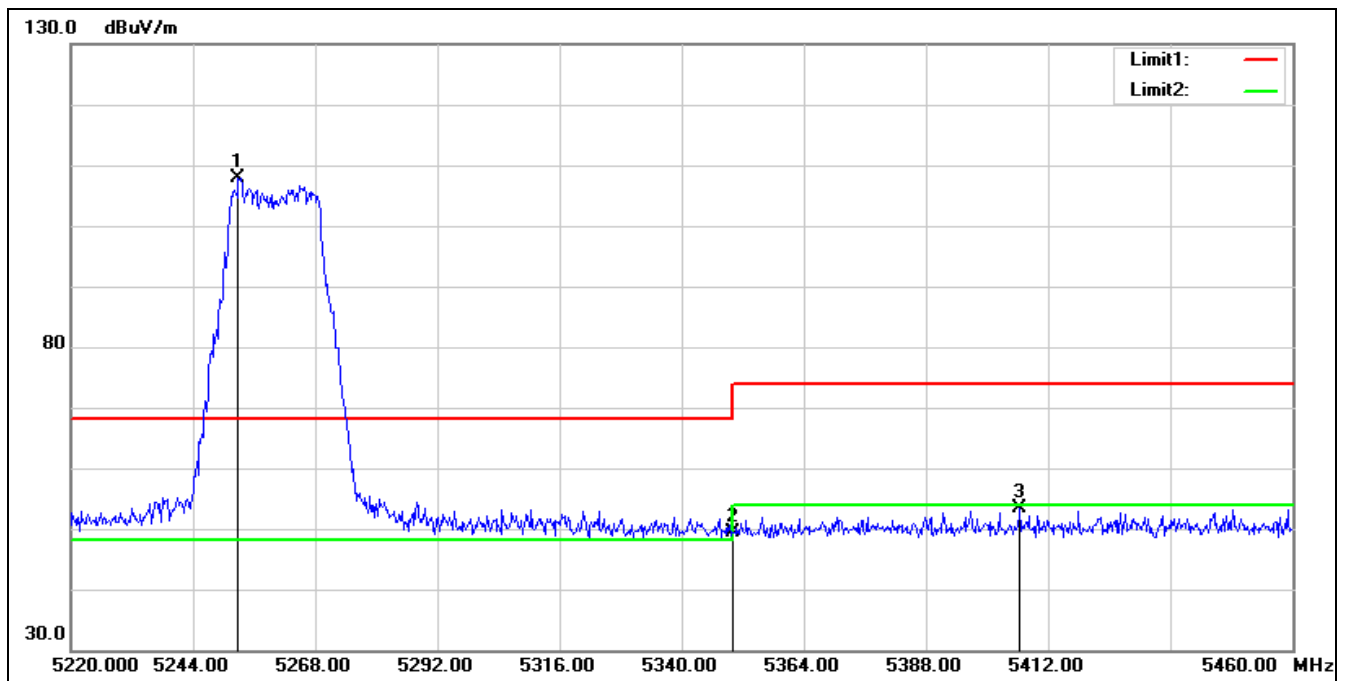


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5252.880	107.17	0.79	107.96	68.20	39.76	peak
2	5350.000	48.42	1.02	49.44	74.00	-24.56	peak
3	5406.480	51.89	1.43	53.32	74.00	-20.68	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5260 MHz
Remark:

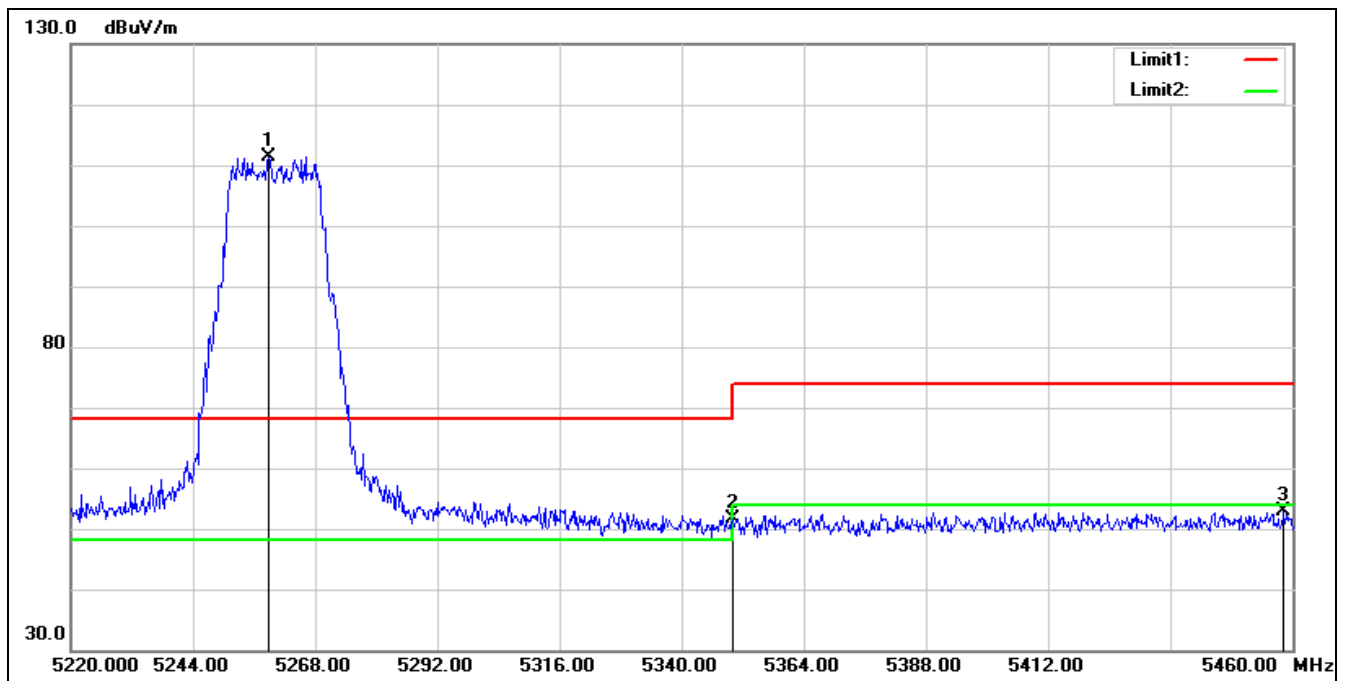

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5258.880	110.59	0.77	111.36	68.20	43.16	peak
2	5350.000	50.49	1.02	51.51	74.00	-22.49	peak
3	5458.320	51.11	1.75	52.86	74.00	-21.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5280 MHz		
Remark:			

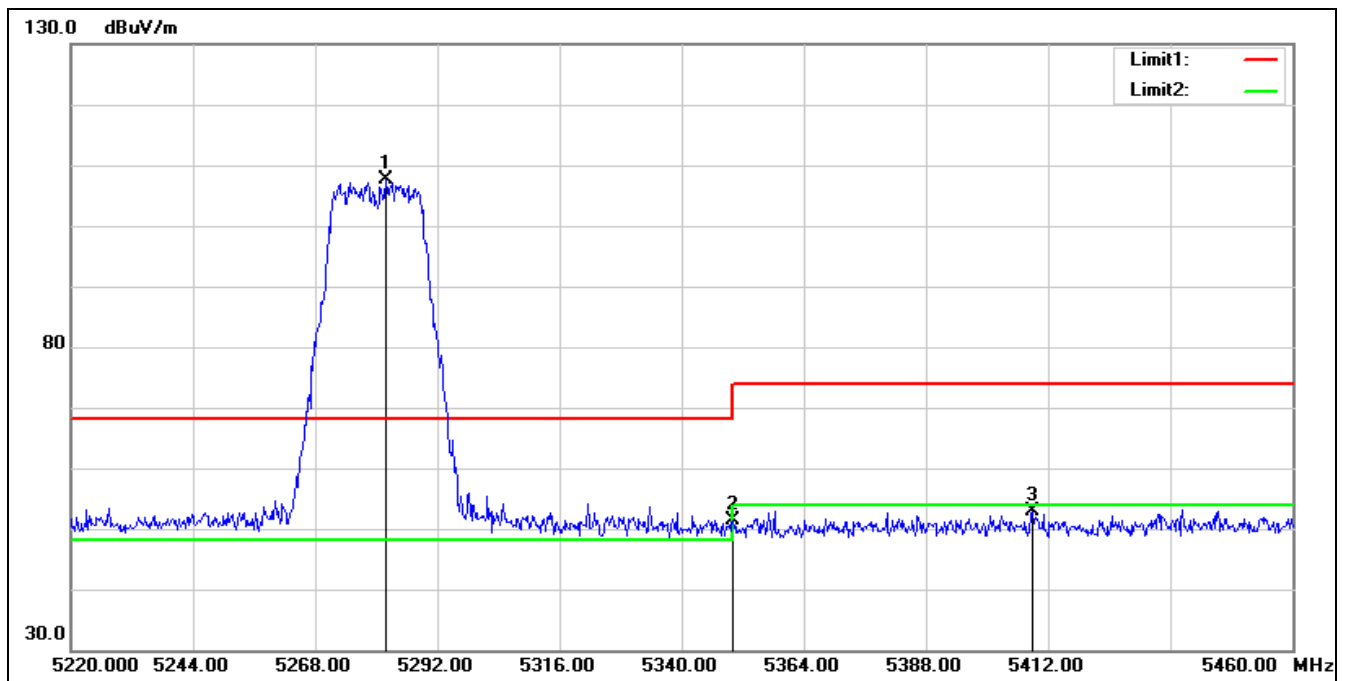


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5281.920	107.02	0.71	107.73	68.20	39.53	peak
2	5350.000	50.38	1.02	51.40	74.00	-22.60	peak
3	5408.880	51.40	1.44	52.84	74.00	-21.16	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5280 MHz

Remark:

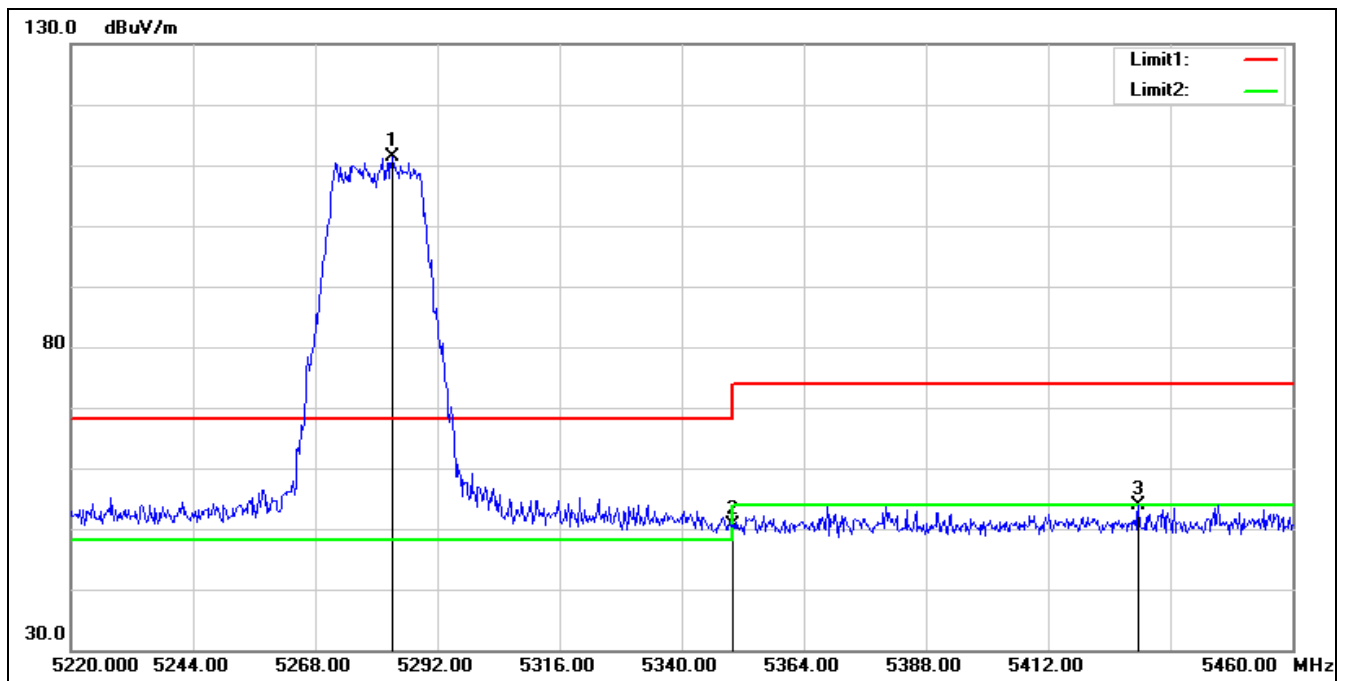

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5283.120	110.65	0.71	111.36	68.20	43.16	peak
2	5350.000	49.72	1.02	50.74	74.00	-23.26	peak
3	5429.760	52.26	1.60	53.86	74.00	-20.14	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5320 MHz
Remark:

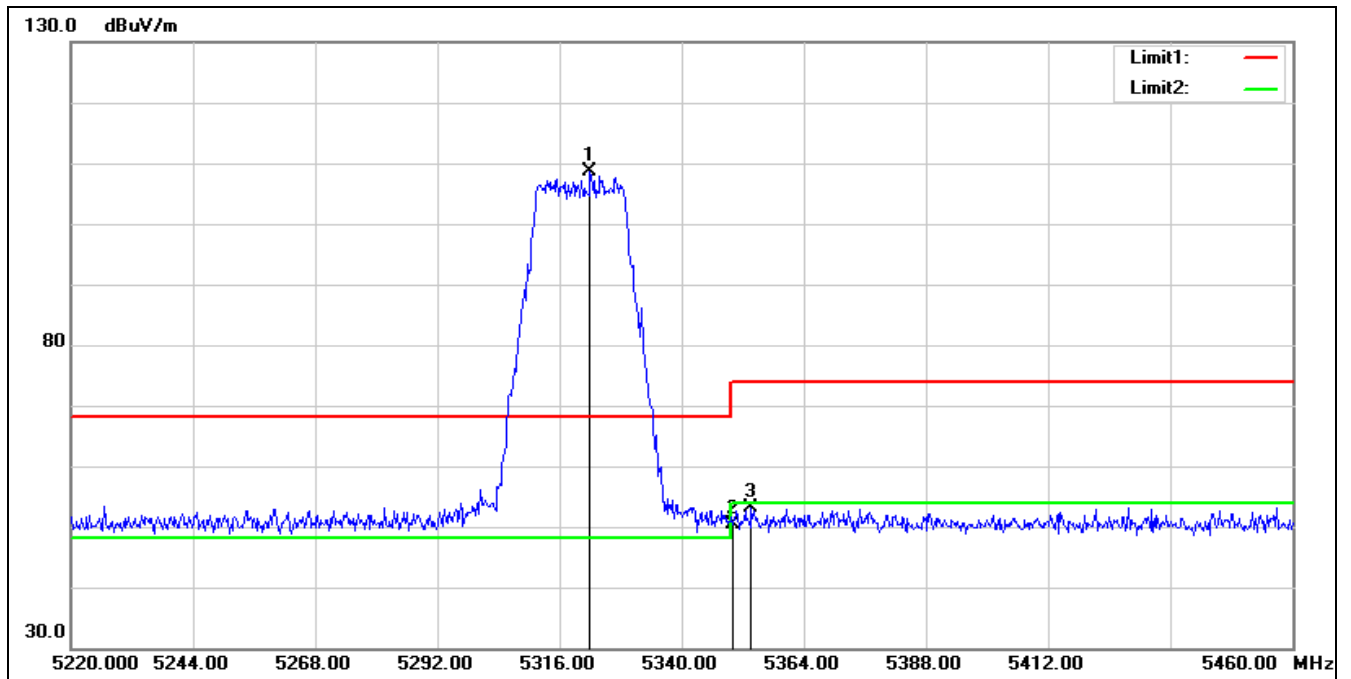


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5322.000	107.72	0.81	108.53	68.20	40.33	peak
2	5350.000	49.34	1.02	50.36	74.00	-23.64	peak
3	5353.680	52.18	1.04	53.22	74.00	-20.78	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5320 MHz

Remark:

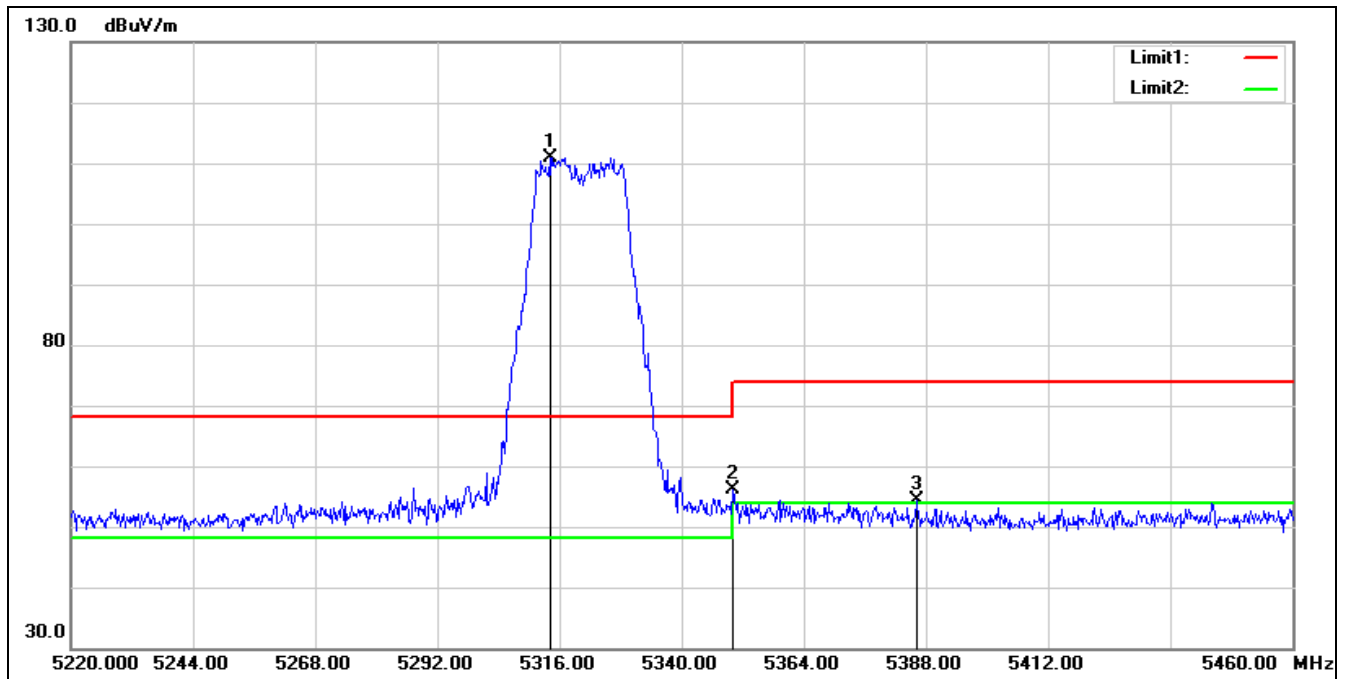


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5314.080	110.12	0.76	110.88	68.20	42.68	peak
2	5350.000	55.04	1.02	56.06	74.00	-17.94	peak
3	5386.080	53.03	1.29	54.32	74.00	-19.68	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5500 MHz
Remark:

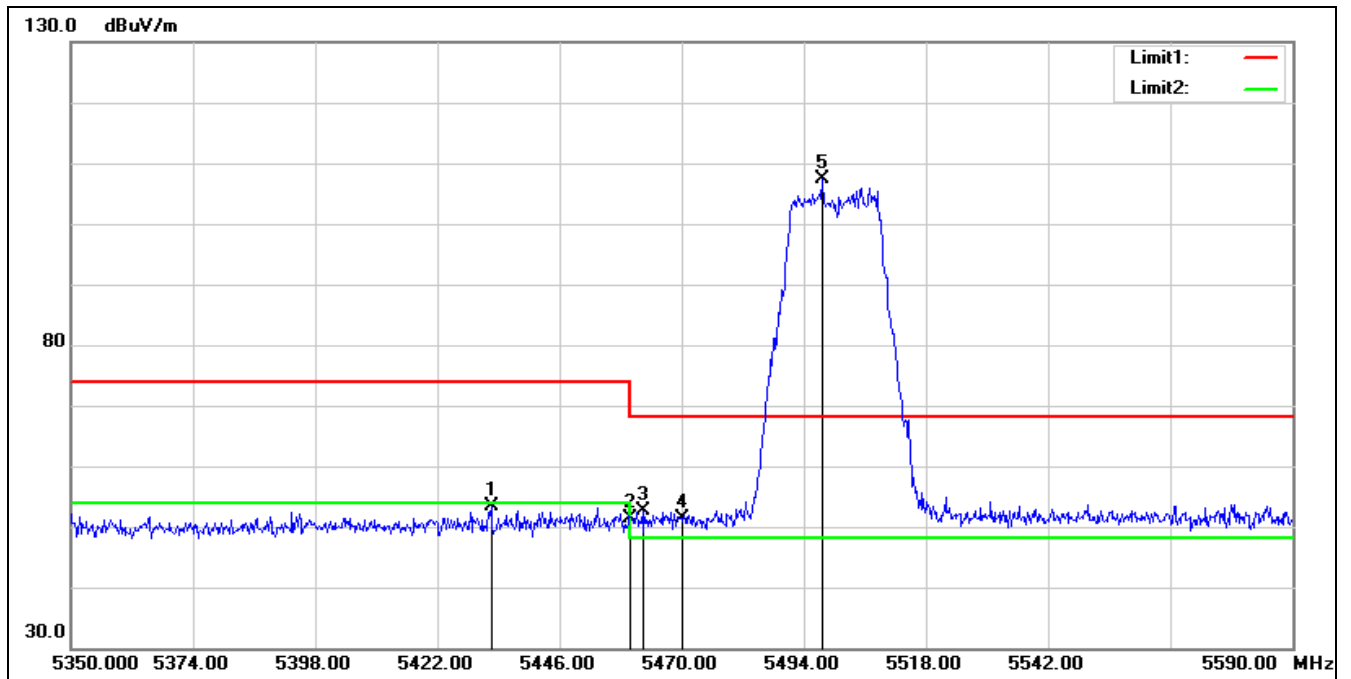


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.560	51.68	1.62	53.30	74.00	-20.70	peak
2	5460.000	49.62	1.75	51.37	74.00	-22.63	peak
3	5462.320	50.95	1.75	52.70	68.20	-15.50	peak
4	5470.000	49.53	1.77	51.30	68.20	-16.90	peak
5*	5497.600	105.60	1.80	107.40	68.20	39.20	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5500 MHz
Remark:

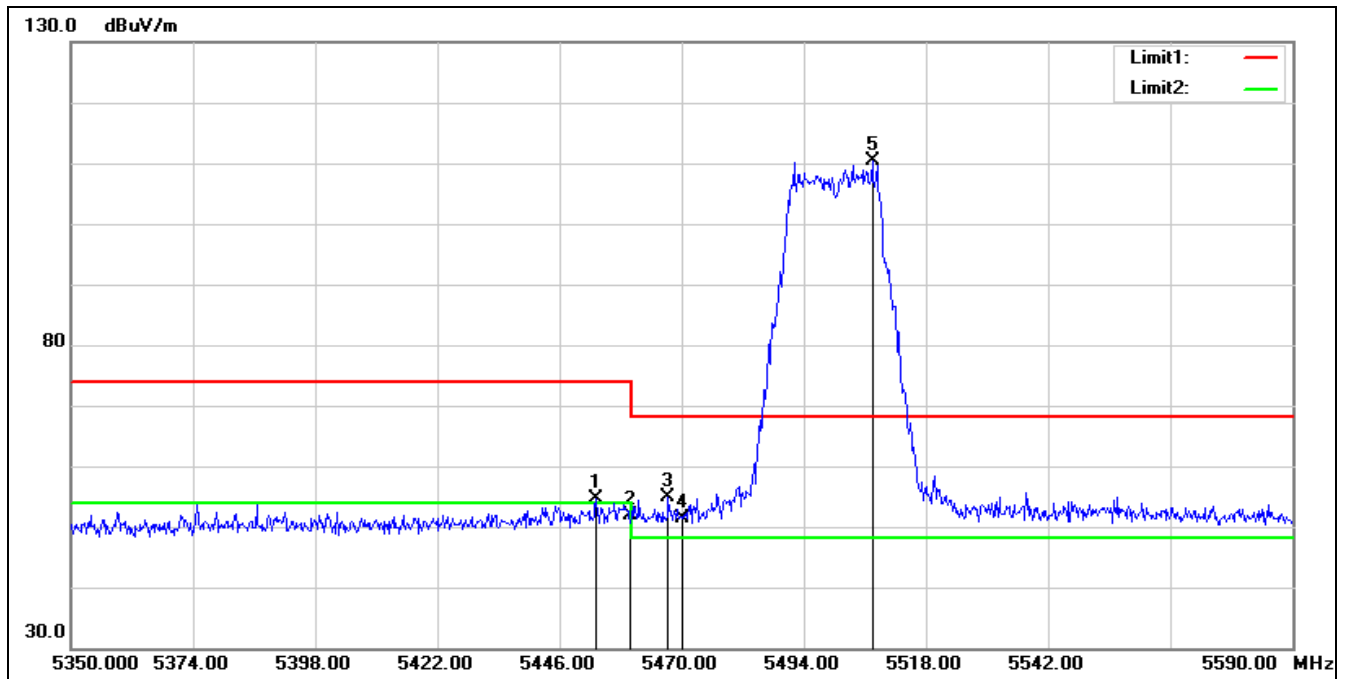

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.200	52.98	1.75	54.73	74.00	-19.27	peak
2	5460.000	50.07	1.75	51.82	74.00	-22.18	peak
3	5467.360	53.23	1.76	54.99	68.20	-13.21	peak
4	5470.000	49.61	1.77	51.38	68.20	-16.82	peak
5*	5507.440	108.58	1.80	110.38	68.20	42.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5560 MHz		
Remark:			

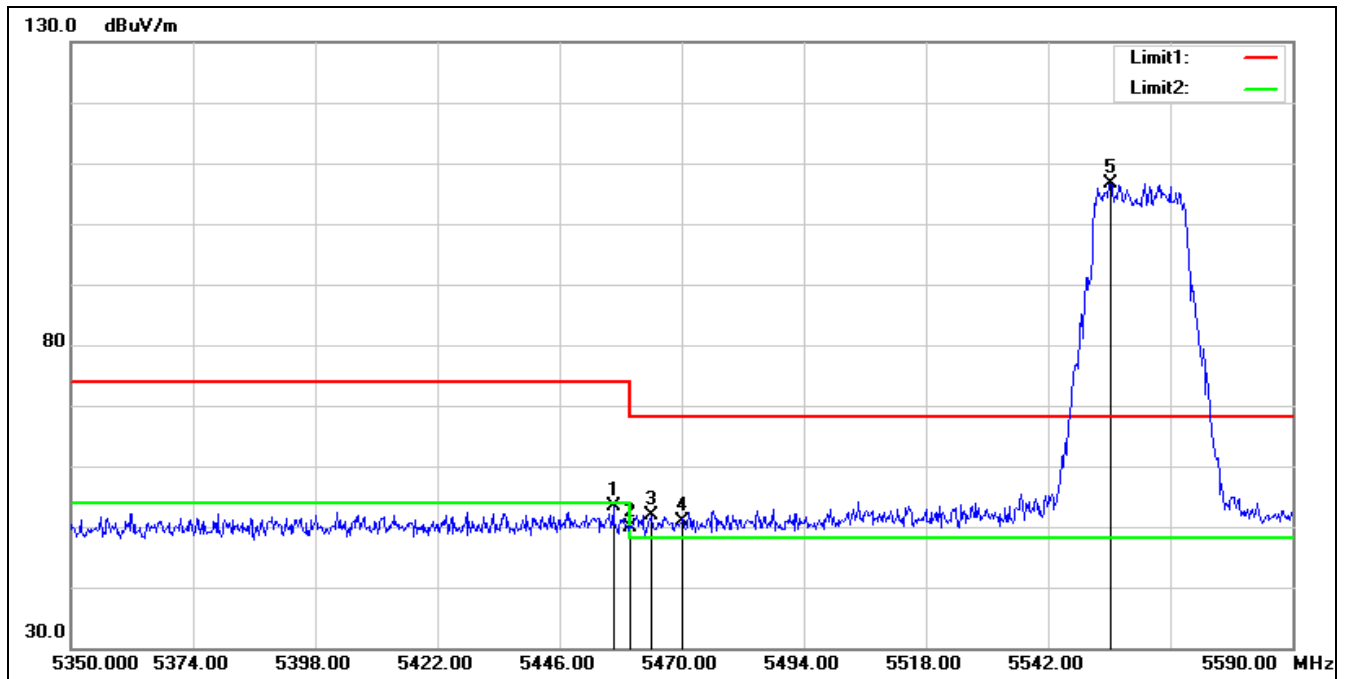


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.560	51.61	1.75	53.36	74.00	-20.64	peak
2	5460.000	48.25	1.75	50.00	74.00	-24.00	peak
3	5464.000	50.12	1.75	51.87	68.20	-16.33	peak
4	5470.000	49.01	1.77	50.78	68.20	-17.42	peak
5*	5554.240	104.87	1.77	106.64	68.20	38.44	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5560 MHz

Remark:

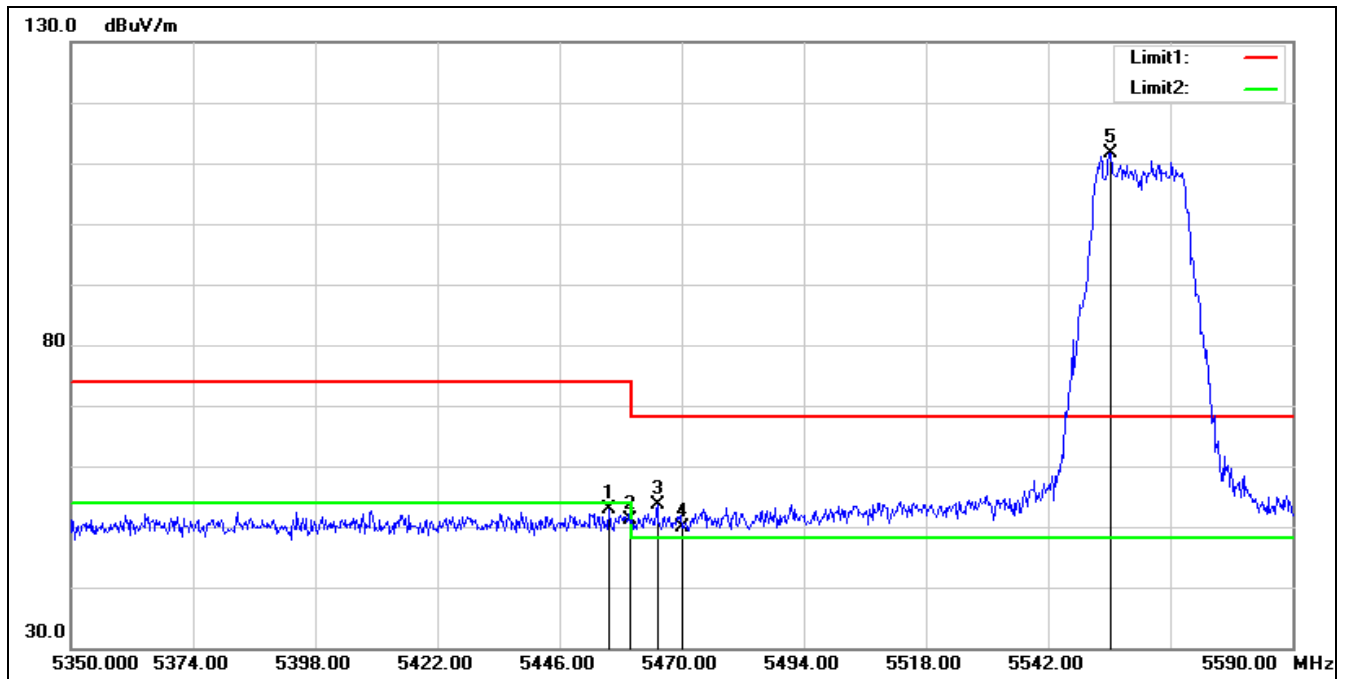


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.600	51.03	1.75	52.78	74.00	-21.22	peak
2	5460.000	49.45	1.75	51.20	74.00	-22.80	peak
3	5465.200	51.76	1.75	53.51	68.20	-14.69	peak
4	5470.000	47.99	1.77	49.76	68.20	-18.44	peak
5*	5554.240	109.81	1.77	111.58	68.20	43.38	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5700 MHz

Remark:

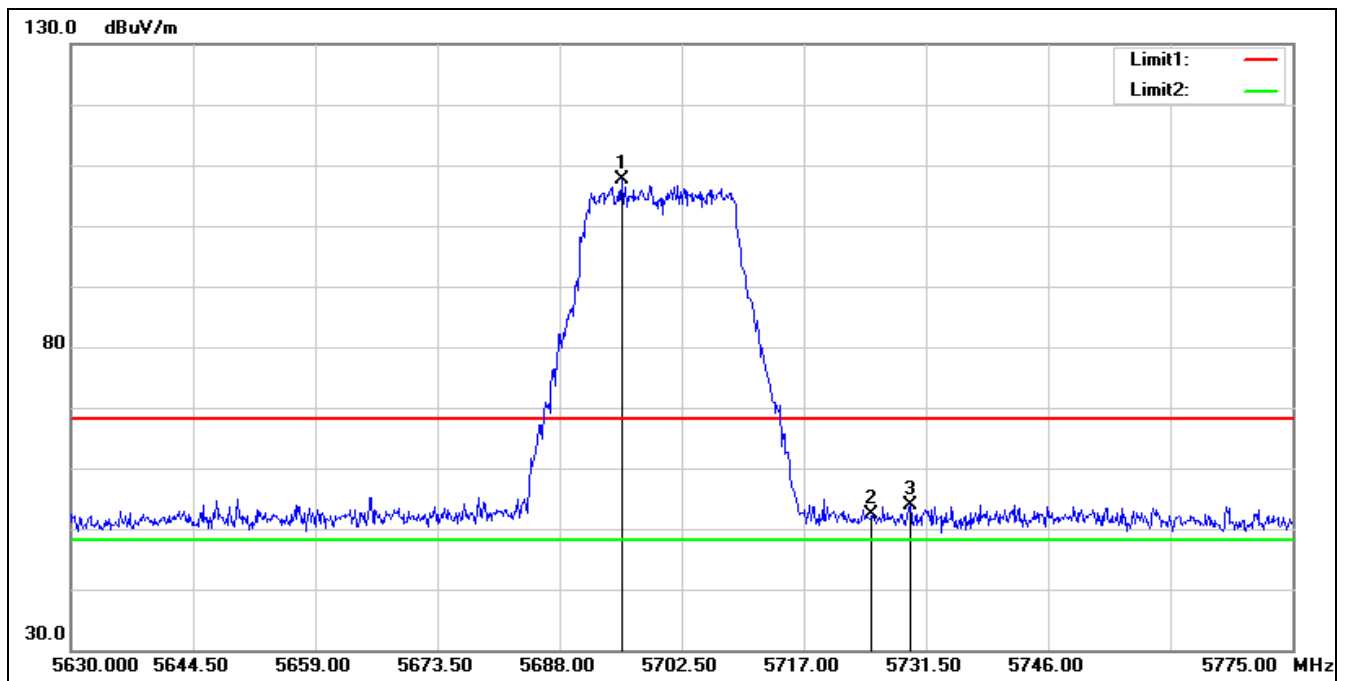


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5695.395	106.07	1.54	107.61	68.20	39.41	peak
2	5725.000	50.52	1.78	52.30	68.20	-15.90	peak
3	5729.615	52.03	1.84	53.87	68.20	-14.33	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5700 MHz

Remark:

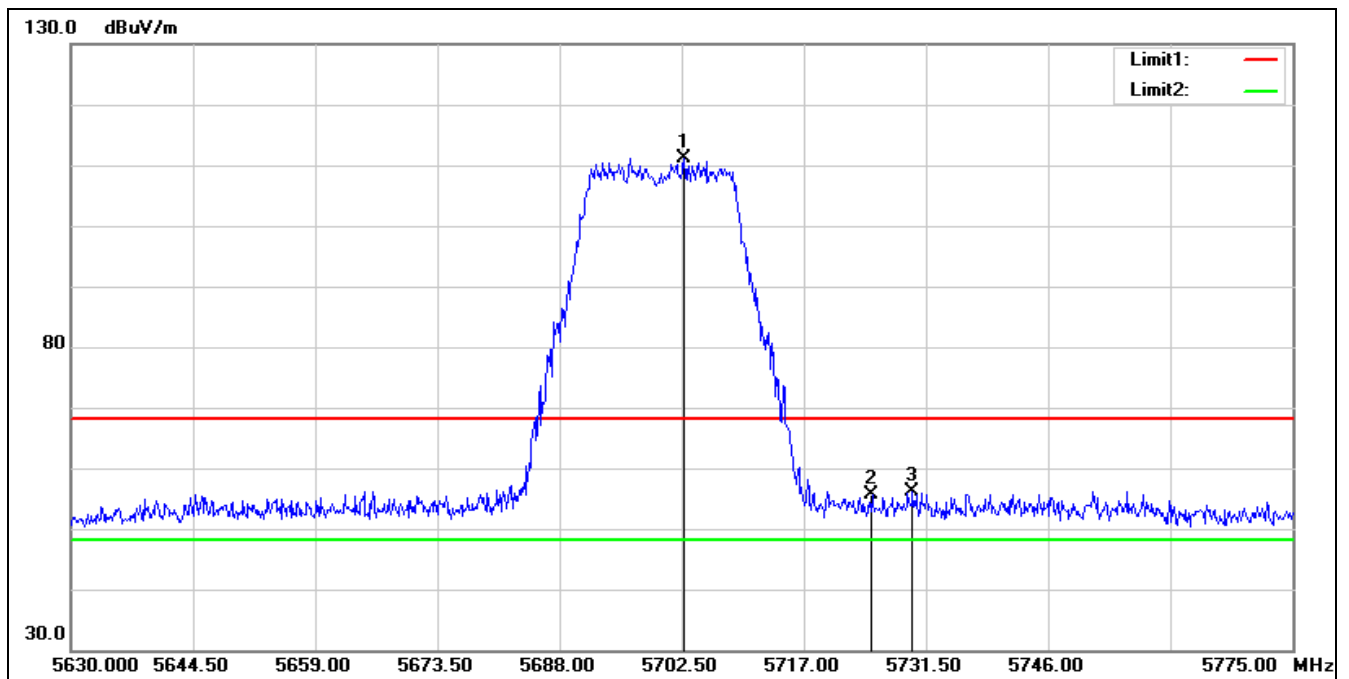

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5702.790	109.63	1.57	111.20	68.20	43.00	peak
2	5725.000	53.95	1.78	55.73	68.20	-12.47	peak
3	5729.905	54.24	1.84	56.08	68.20	-12.12	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5720 MHz		
Remark:			

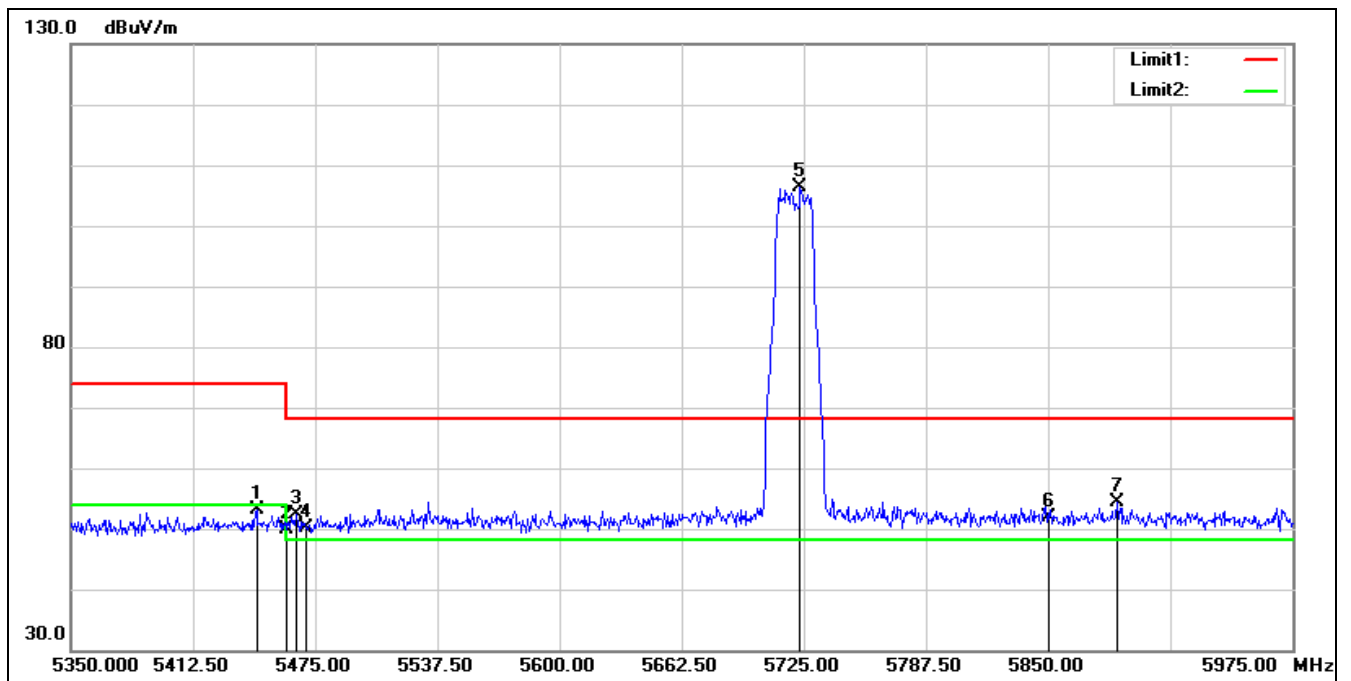

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.000	51.46	1.70	53.16	74.00	-20.84	peak
2	5460.000	48.10	1.75	49.85	74.00	-24.15	peak
3	5465.000	50.53	1.75	52.28	68.20	-15.92	peak
4	5470.000	48.35	1.77	50.12	68.20	-18.08	peak
5*	5723.125	104.66	1.76	106.42	68.20	38.22	peak
6	5850.000	49.59	2.29	51.88	68.20	-16.32	peak
7	5885.625	52.00	2.36	54.36	68.20	-13.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5720 MHz		
Remark:			

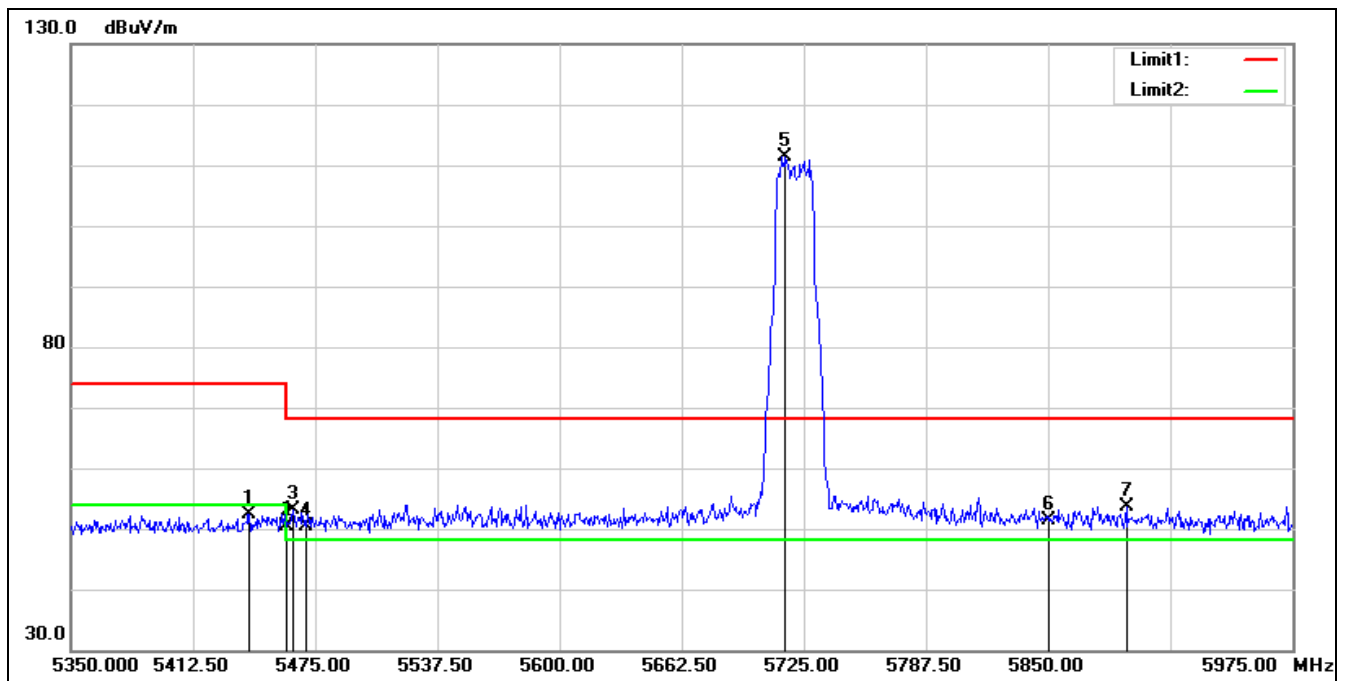

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5720 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.250	50.71	1.68	52.39	74.00	-21.61	peak
2	5460.000	48.64	1.75	50.39	74.00	-23.61	peak
3	5463.750	51.49	1.75	53.24	68.20	-14.96	peak
4	5470.000	48.62	1.77	50.39	68.20	-17.81	peak
5*	5715.625	109.64	1.70	111.34	68.20	43.14	peak
6	5850.000	49.21	2.29	51.50	68.20	-16.70	peak
7	5890.000	51.37	2.36	53.73	68.20	-14.47	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5745 MHz

Remark:

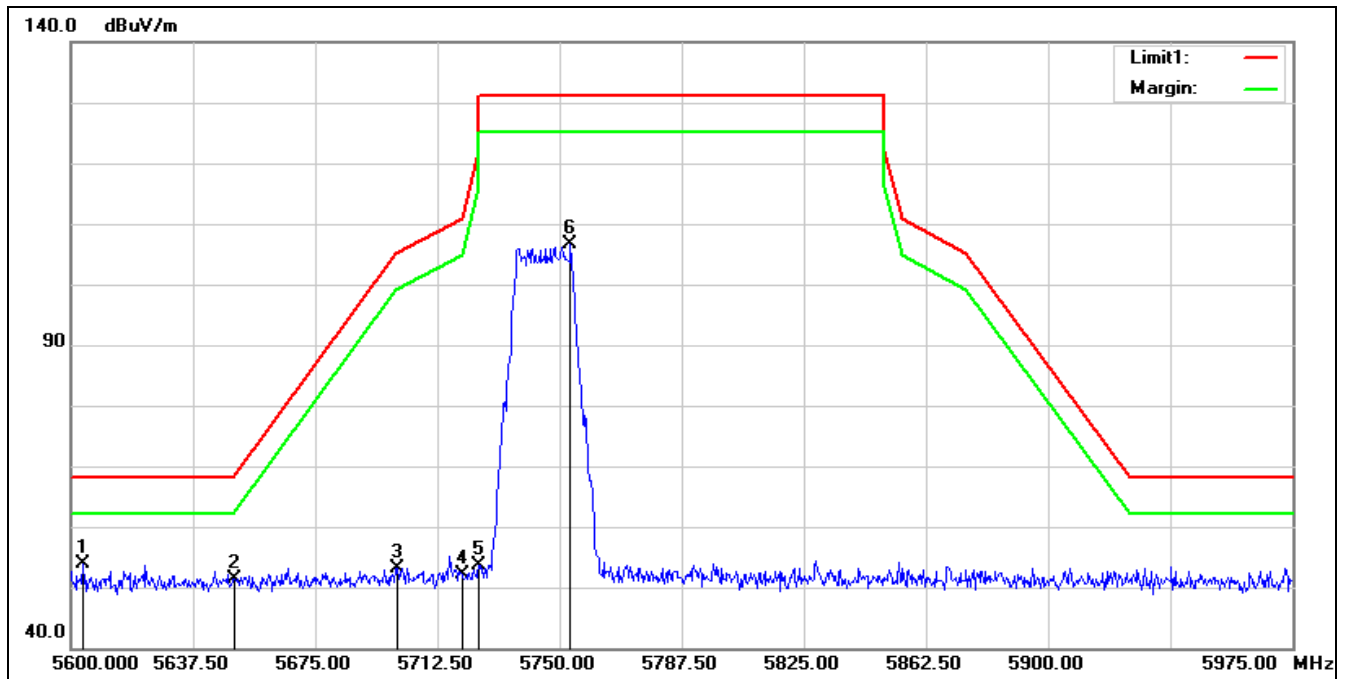


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5603.750	52.34	1.65	53.99	68.20	-14.21	peak
2	5650.000	49.78	1.56	51.34	68.20	-16.86	peak
3	5700.000	51.48	1.54	53.02	105.20	-52.18	peak
4	5720.000	50.40	1.74	52.14	110.80	-58.66	peak
5	5725.000	51.85	1.78	53.63	122.20	-68.57	peak
6	5753.375	104.60	2.03	106.63	131.20	-24.57	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5745 MHz

Remark:

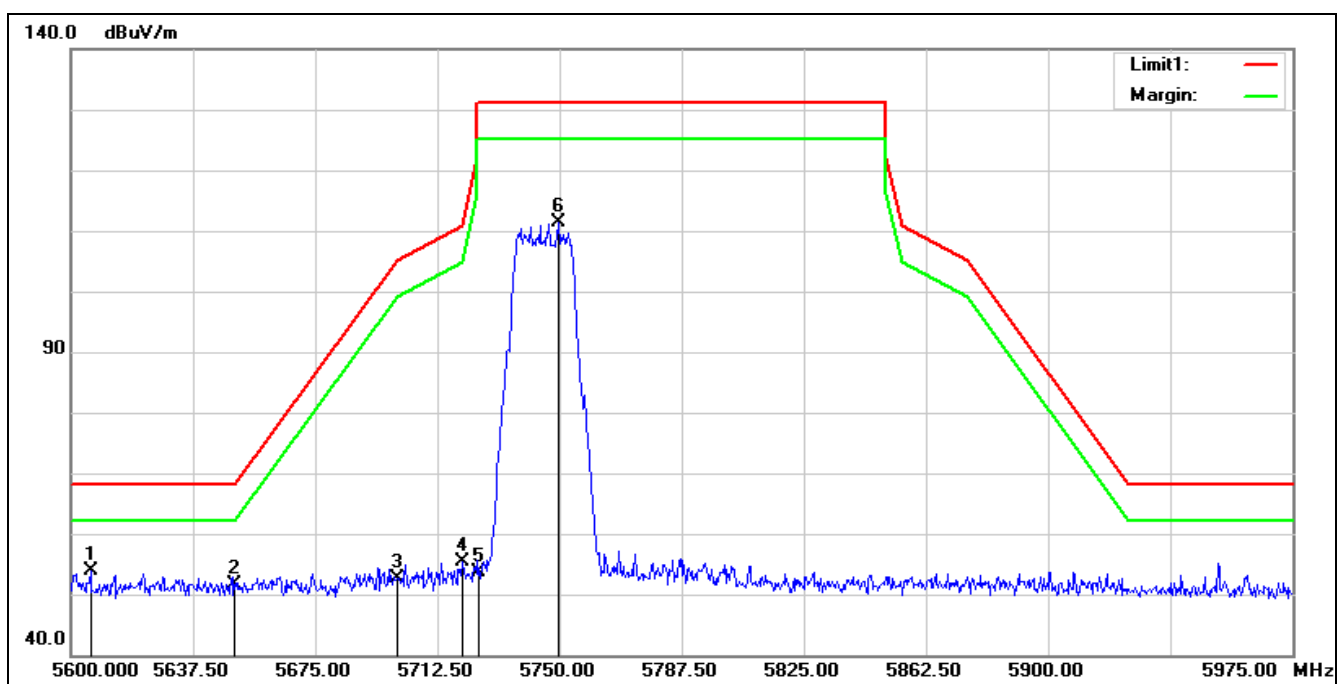

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5606.000	52.18	1.66	53.84	68.20	-14.36	peak
2	5650.000	50.06	1.56	51.62	68.20	-16.58	peak
3	5700.000	51.06	1.54	52.60	105.20	-52.60	peak
4	5720.000	53.53	1.74	55.27	110.80	-55.53	peak
5	5725.000	51.79	1.78	53.57	122.20	-68.63	peak
6	5749.625	109.25	2.03	111.28	131.20	-19.92	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

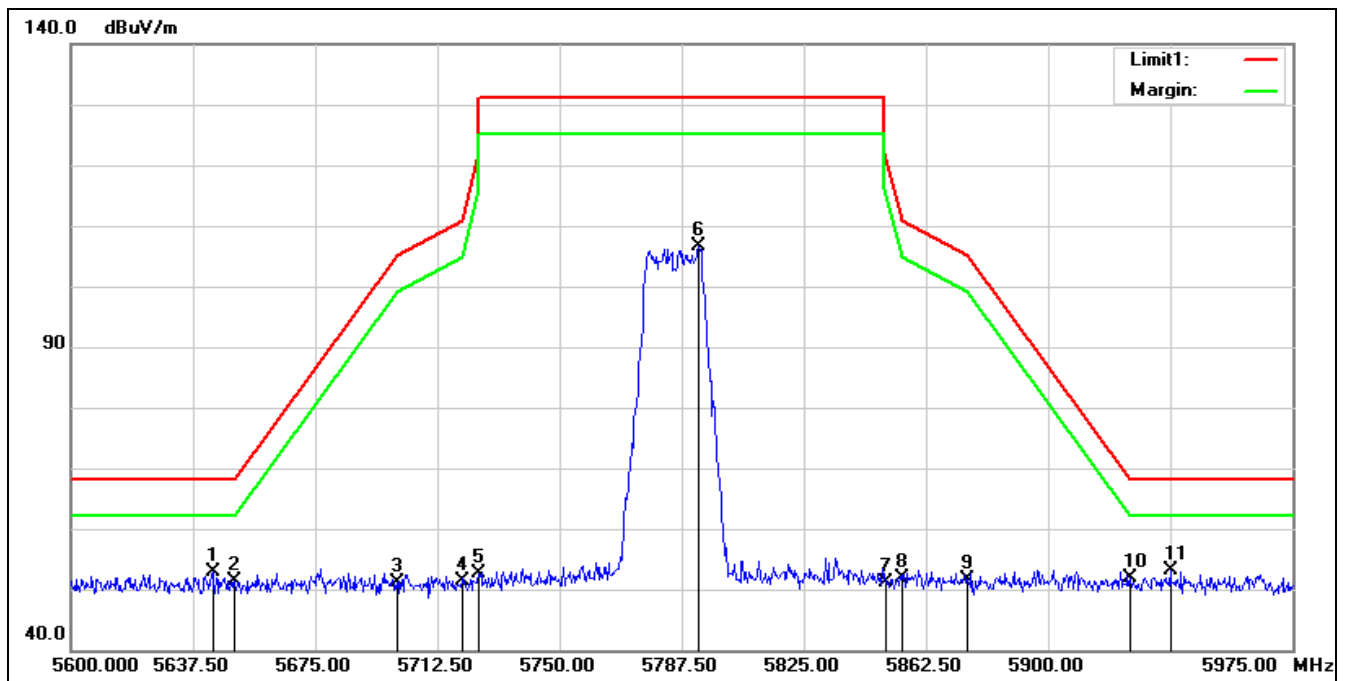

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5643.500	51.27	1.56	52.83	68.20	-15.37	peak
2	5650.000	49.85	1.56	51.41	68.20	-16.79	peak
3	5700.000	49.69	1.54	51.23	105.20	-53.97	peak
4	5720.000	49.64	1.74	51.38	110.80	-59.42	peak
5	5725.000	50.73	1.78	52.51	122.20	-69.69	peak
6	5792.750	104.47	2.18	106.65	131.20	-24.55	peak
7	5850.000	48.76	2.29	51.05	122.20	-71.15	peak
8	5855.000	49.47	2.31	51.78	110.80	-59.02	peak
9	5875.000	49.24	2.34	51.58	105.20	-53.62	peak
10	5925.000	49.62	2.23	51.85	68.20	-16.35	peak
11*	5937.500	50.90	2.14	53.04	68.20	-15.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

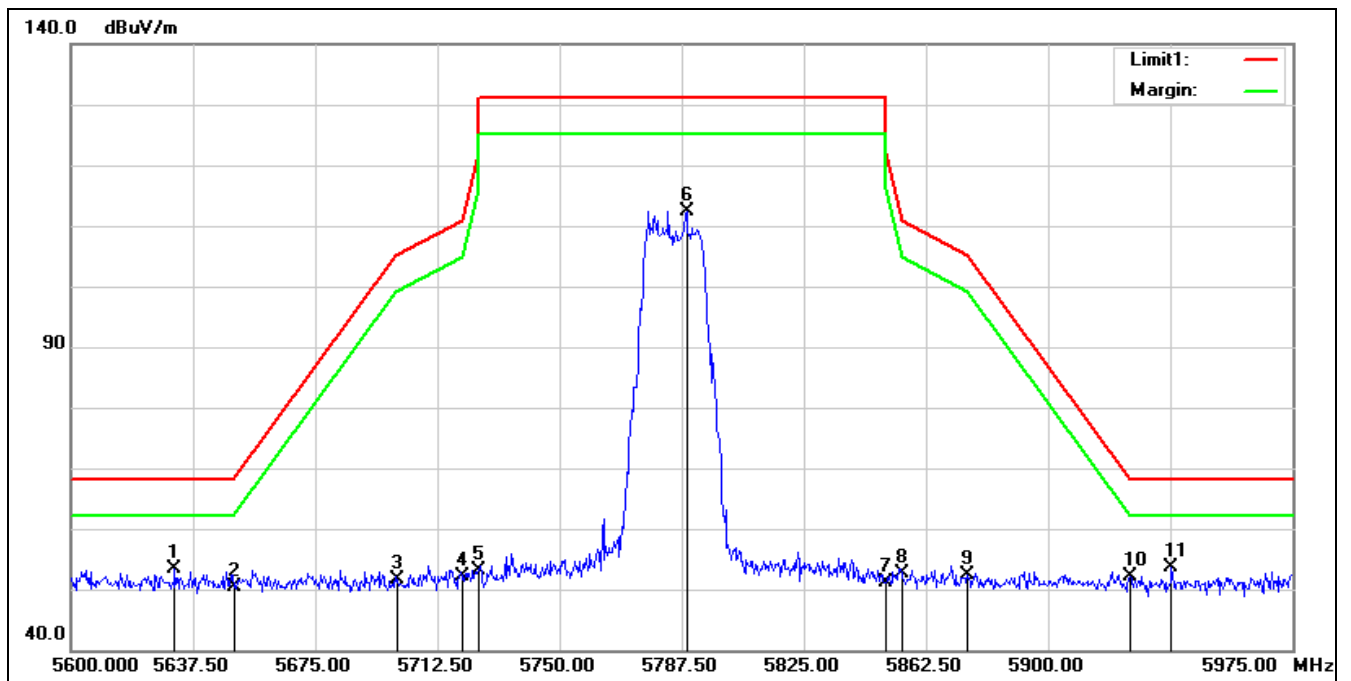

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5631.875	51.68	1.60	53.28	68.20	-14.92	peak
2	5650.000	48.76	1.56	50.32	68.20	-17.88	peak
3	5700.000	50.20	1.54	51.74	105.20	-53.46	peak
4	5720.000	50.35	1.74	52.09	110.80	-58.71	peak
5	5725.000	51.25	1.78	53.03	122.20	-69.17	peak
6	5789.000	110.27	2.18	112.45	131.20	-18.75	peak
7	5850.000	48.96	2.29	51.25	122.20	-70.95	peak
8	5855.000	50.22	2.31	52.53	110.80	-58.27	peak
9	5875.000	49.92	2.34	52.26	105.20	-52.94	peak
10	5925.000	49.82	2.23	52.05	68.20	-16.15	peak
11*	5937.875	51.61	2.14	53.75	68.20	-14.45	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5825 MHz

Remark:

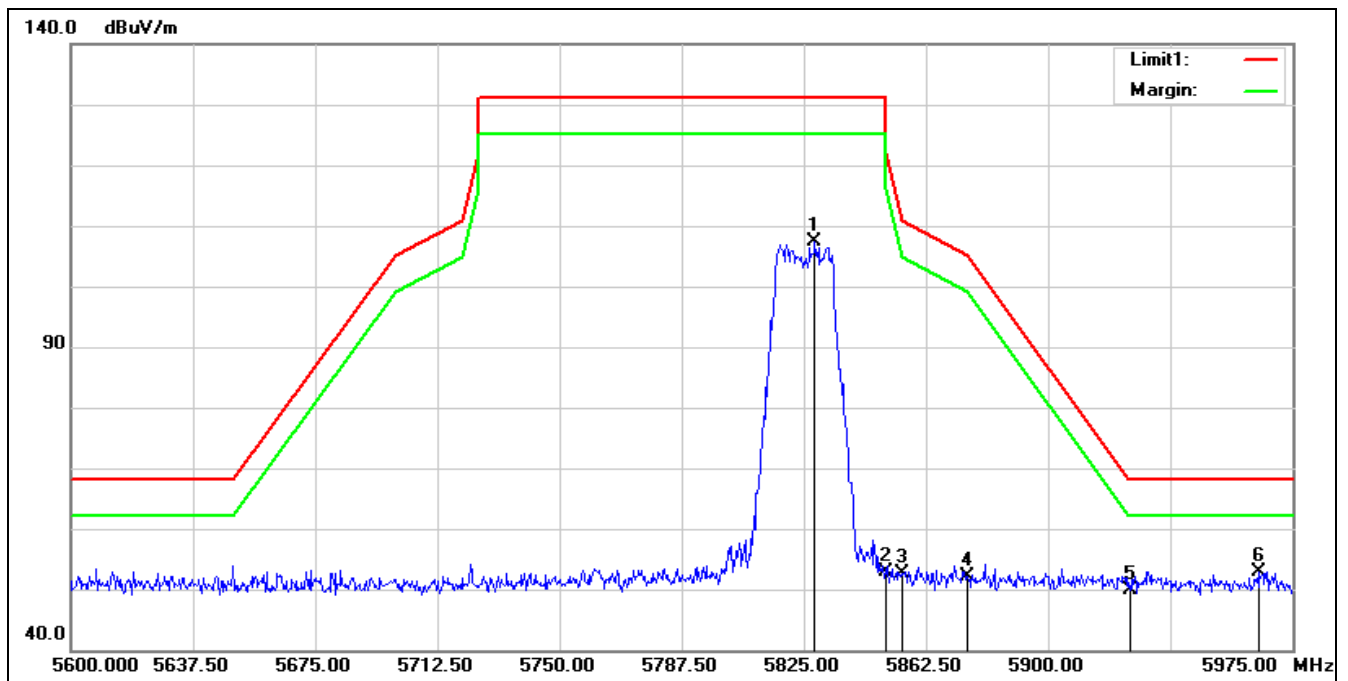


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5828.375	105.00	2.27	107.27	131.20	-23.93	peak
2	5850.000	50.47	2.29	52.76	122.20	-69.44	peak
3	5855.000	50.21	2.31	52.52	110.80	-58.28	peak
4	5875.000	49.67	2.34	52.01	105.20	-53.19	peak
5	5925.000	47.75	2.23	49.98	68.20	-18.22	peak
6*	5964.875	50.90	2.09	52.99	68.20	-15.21	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5825 MHz

Remark:

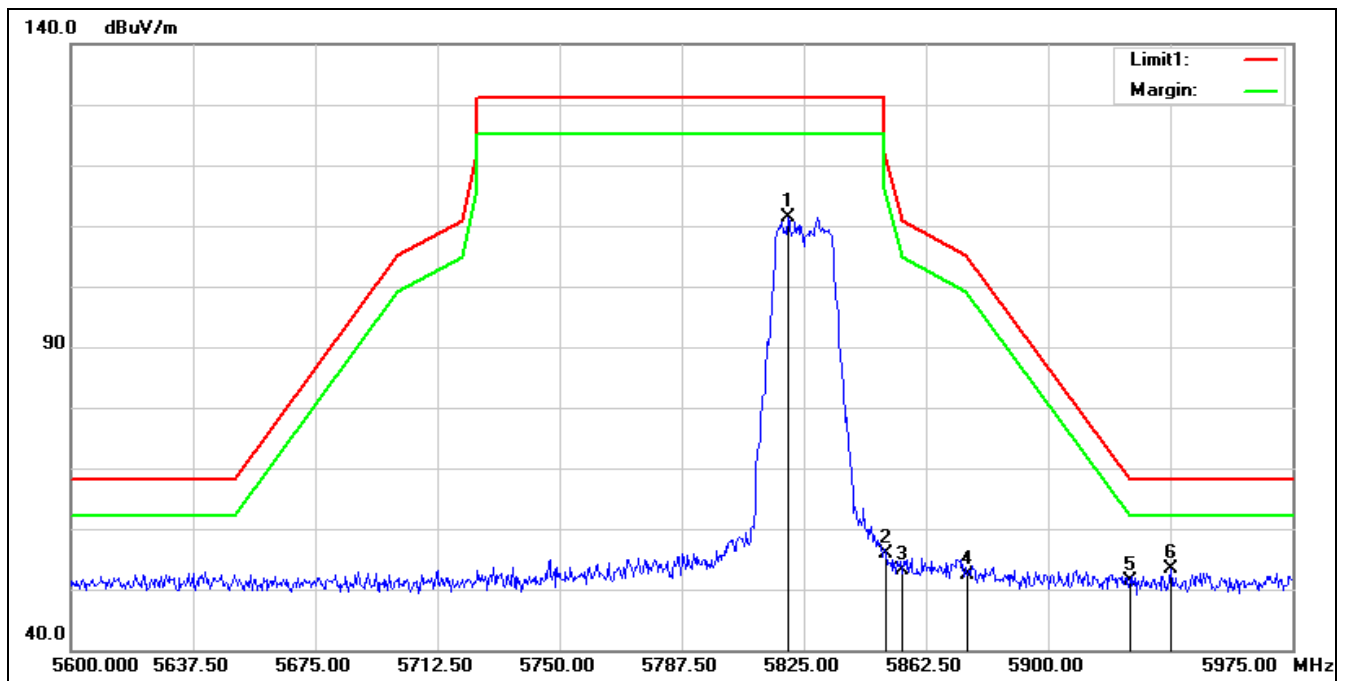


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5820.125	109.12	2.24	111.36	131.20	-19.84	peak
2	5850.000	53.57	2.29	55.86	122.20	-66.34	peak
3	5855.000	50.93	2.31	53.24	110.80	-57.56	peak
4	5875.000	50.10	2.34	52.44	105.20	-52.76	peak
5	5925.000	49.22	2.23	51.45	68.20	-16.75	peak
6*	5937.875	51.23	2.14	53.37	68.20	-14.83	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5190 MHz
Remark:

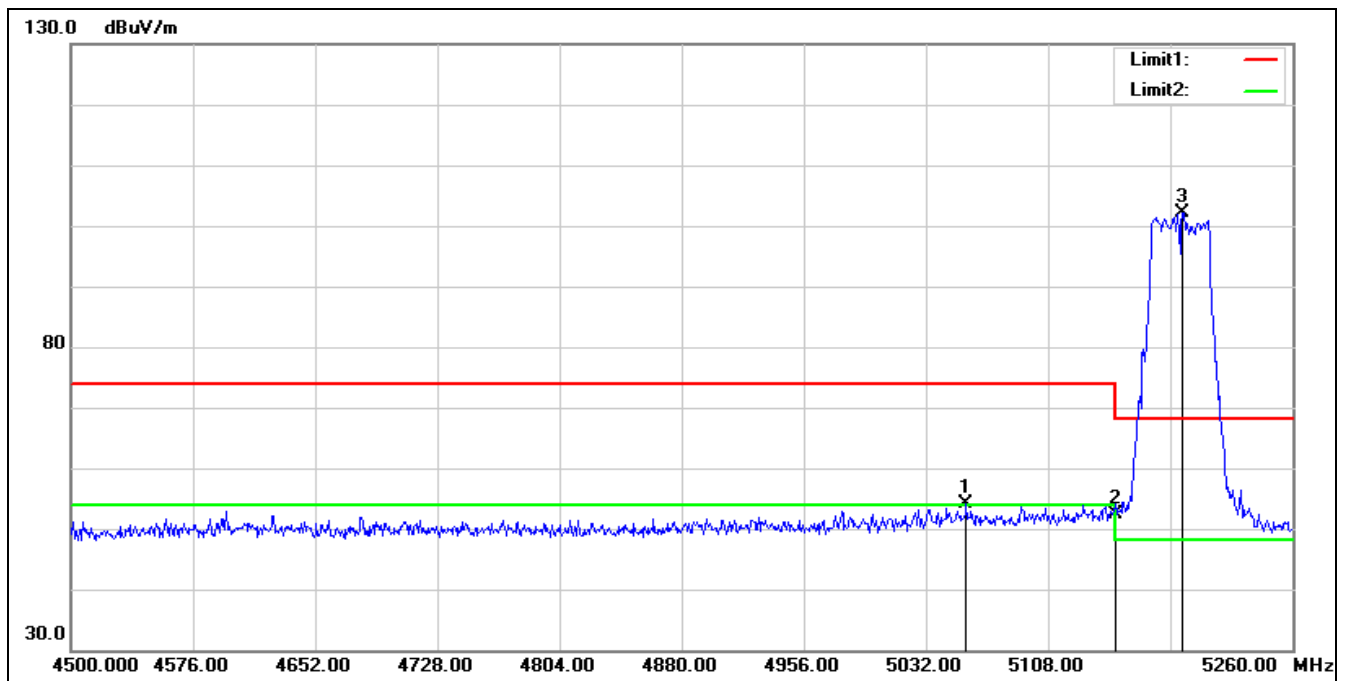

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5057.080	53.00	1.20	54.20	74.00	-19.80	peak
2	5150.000	51.02	1.38	52.40	74.00	-21.60	peak
3*	5191.600	100.99	1.18	102.17	68.20	33.97	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5190 MHz		
Remark:			

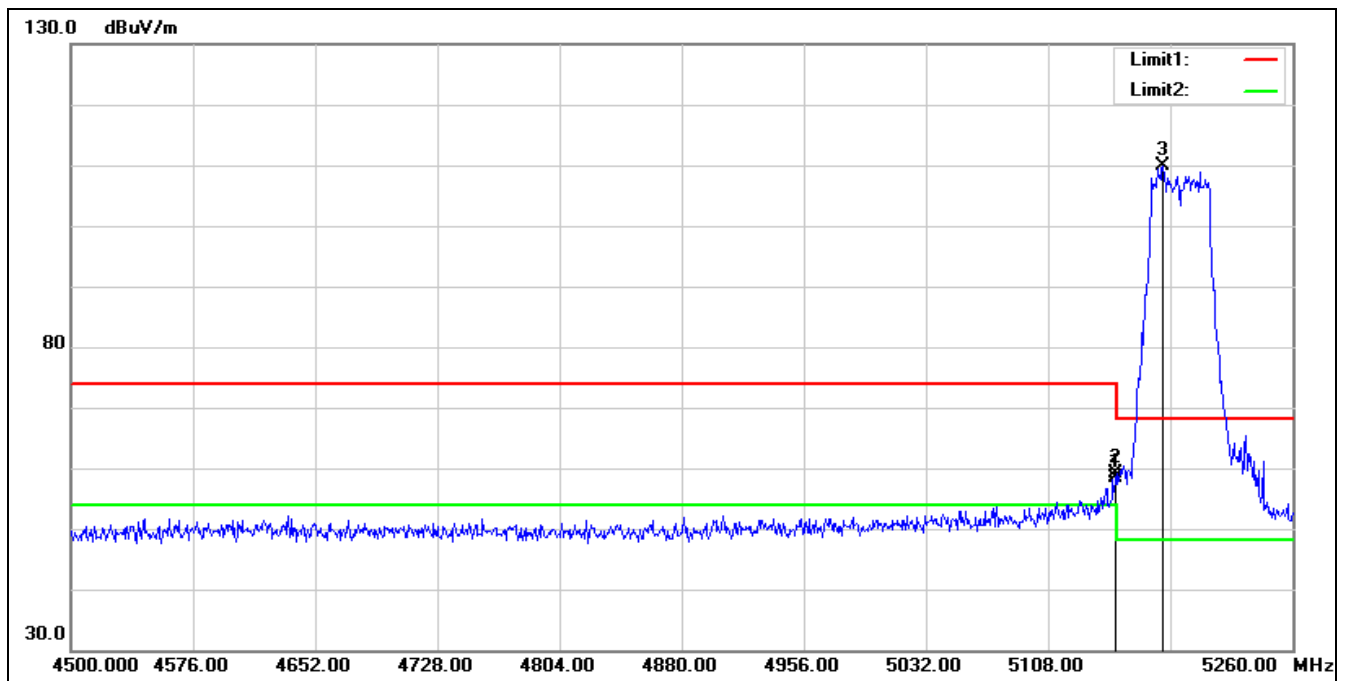


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.800	57.03	1.38	58.41	74.00	-15.59	peak
2	5150.000	57.66	1.38	59.04	74.00	-14.96	peak
3*	5179.440	108.57	1.24	109.81	68.20	41.61	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5230 MHz

Remark:

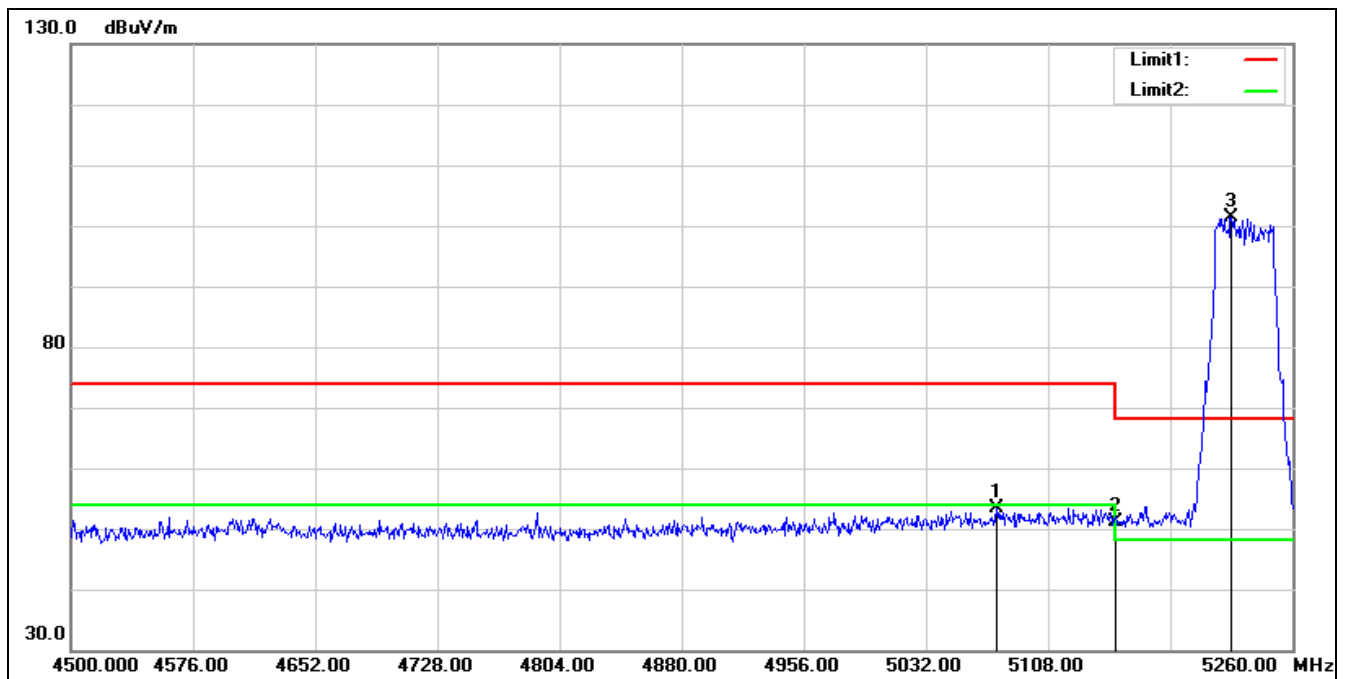


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5076.080	52.14	1.29	53.43	74.00	-20.57	peak
2	5150.000	49.75	1.38	51.13	74.00	-22.87	peak
3*	5222.000	100.49	0.99	101.48	68.20	33.28	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5230 MHz

Remark:

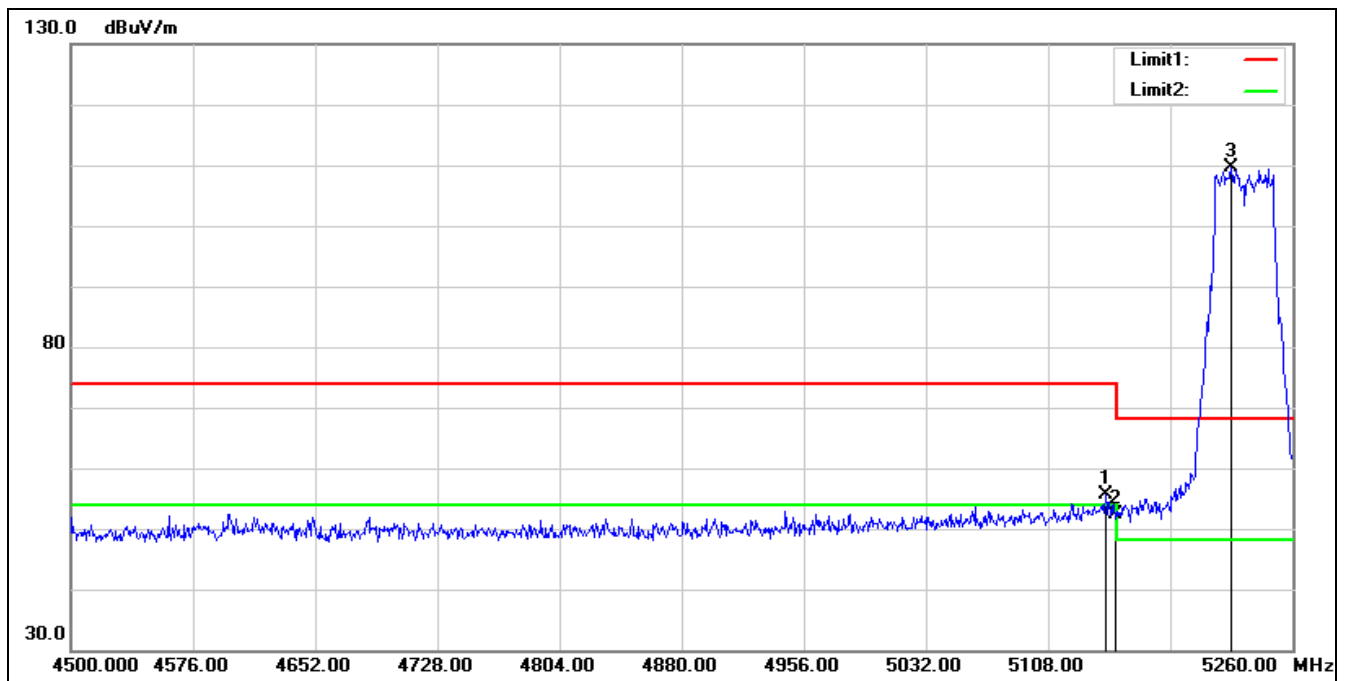


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.720	54.24	1.38	55.62	74.00	-18.38	peak
2	5150.000	50.93	1.38	52.31	74.00	-21.69	peak
3*	5222.000	108.53	0.99	109.52	68.20	41.32	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5270 MHz

Remark:

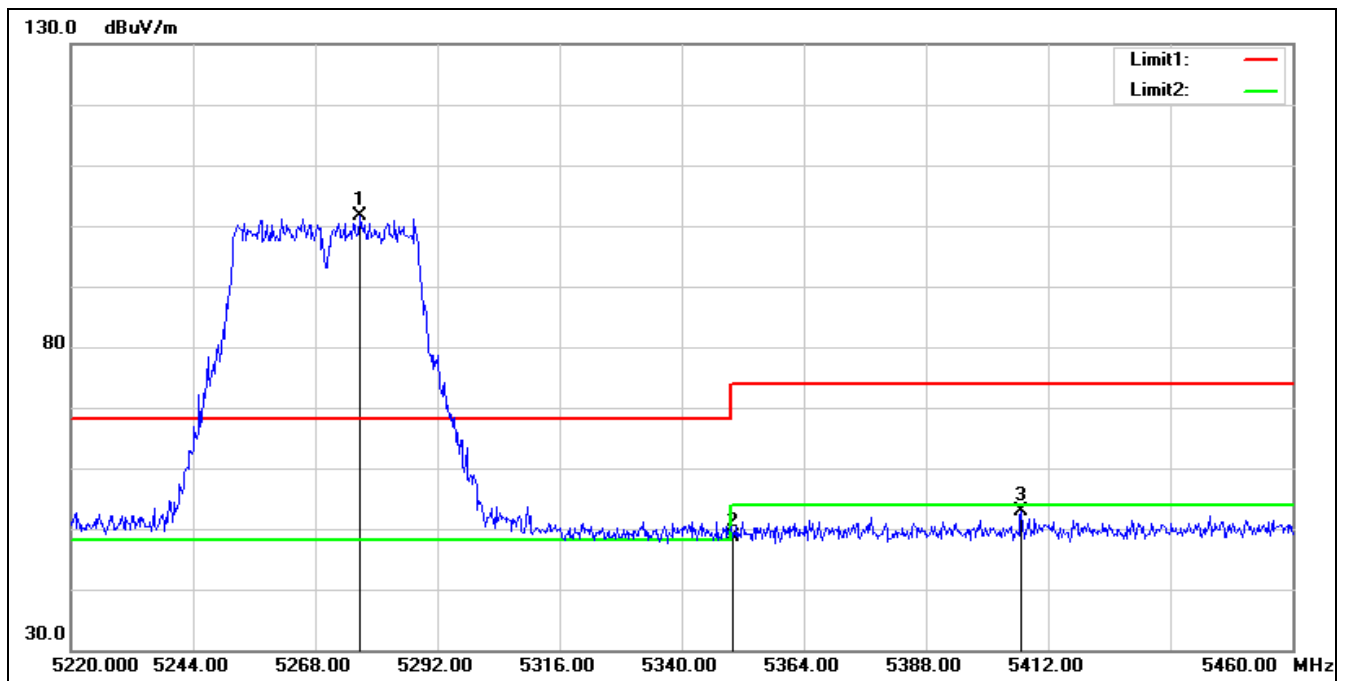

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5276.880	100.90	0.72	101.62	68.20	33.42	peak
2	5350.000	47.57	1.02	48.59	74.00	-25.41	peak
3	5406.720	51.36	1.43	52.79	74.00	-21.21	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5270 MHz
Remark:

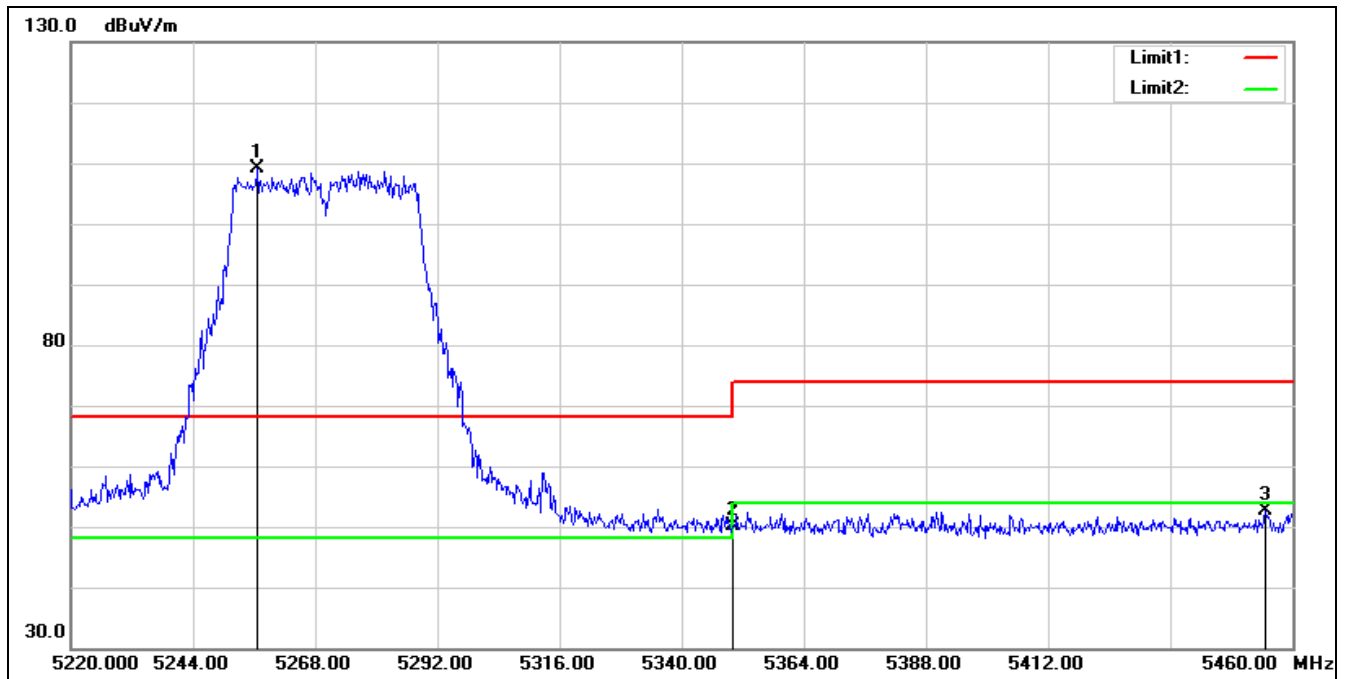


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5256.720	108.41	0.77	109.18	68.20	40.98	peak
2	5350.000	48.99	1.02	50.01	74.00	-23.99	peak
3	5454.720	50.90	1.75	52.65	74.00	-21.35	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5310 MHz

Remark:

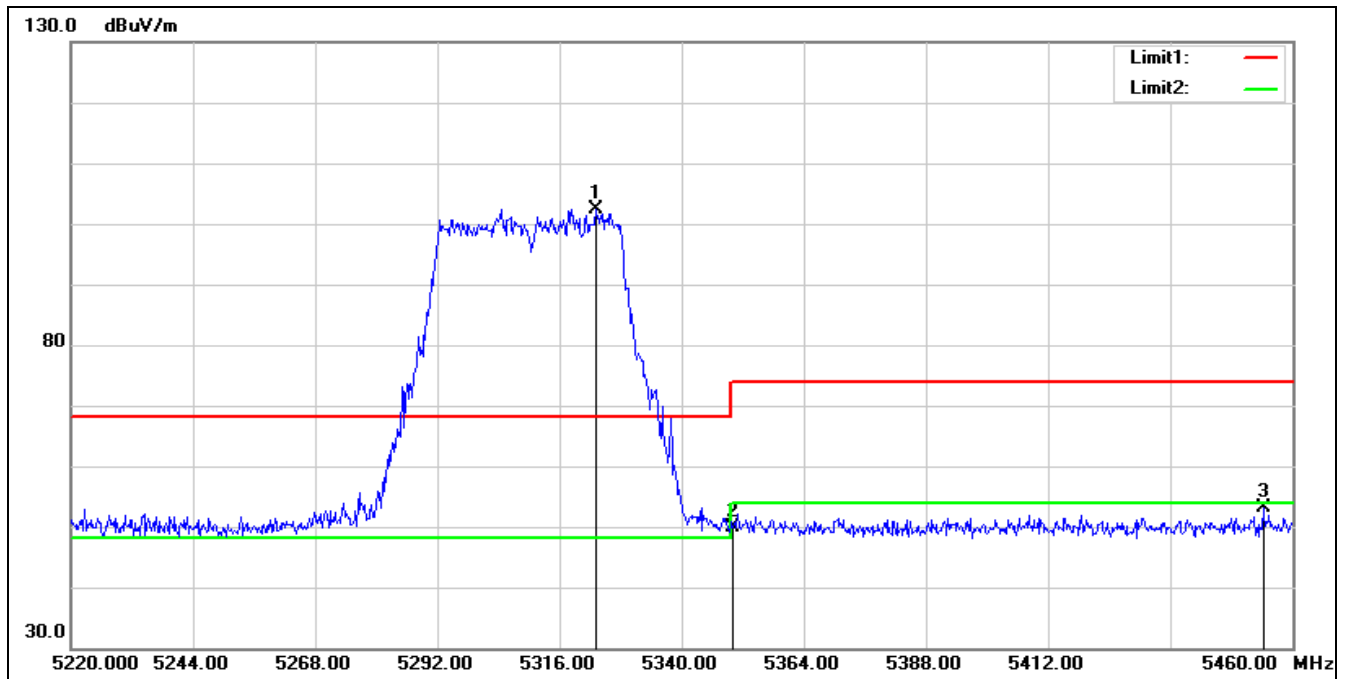


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5323.200	101.63	0.83	102.46	68.20	34.26	peak
2	5350.000	48.93	1.02	49.95	74.00	-24.05	peak
3	5454.240	51.41	1.75	53.16	74.00	-20.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5310 MHz		
Remark:			

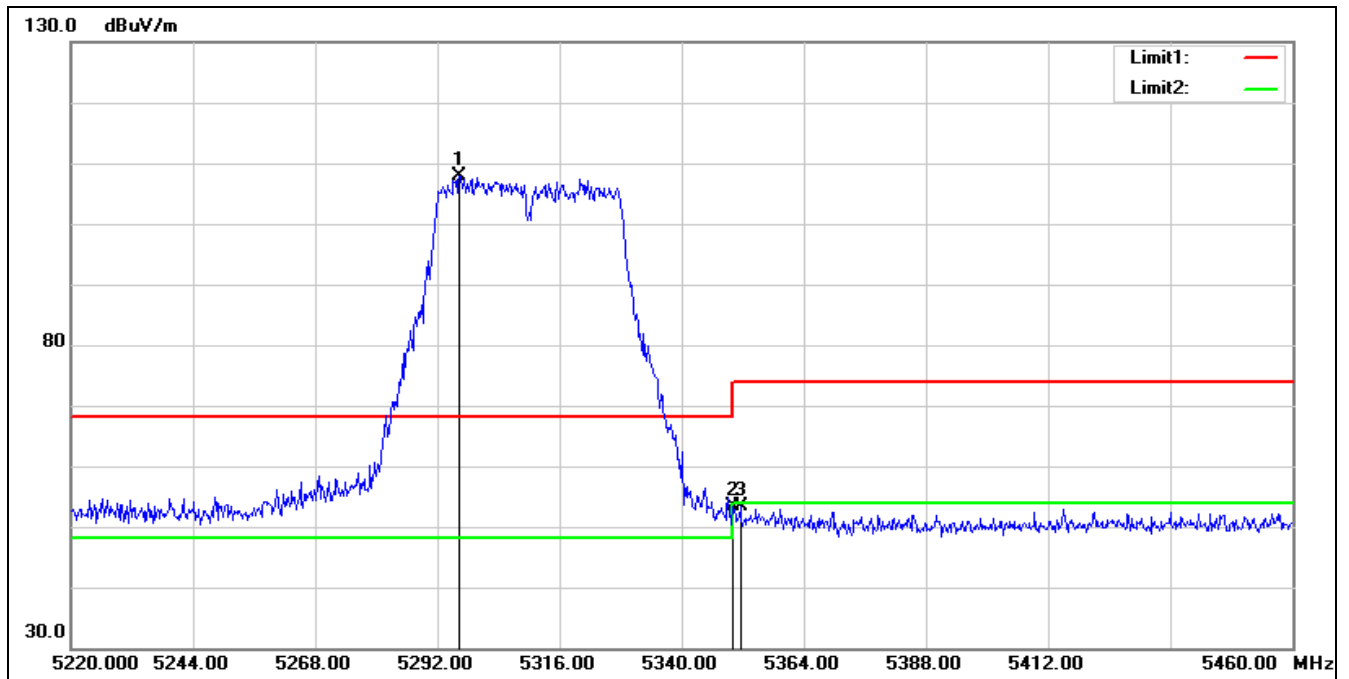

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5296.320	107.29	0.66	107.95	68.20	39.75	peak
2	5350.000	52.24	1.02	53.26	74.00	-20.74	peak
3	5351.520	52.38	1.03	53.41	74.00	-20.59	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5510 MHz
Remark:

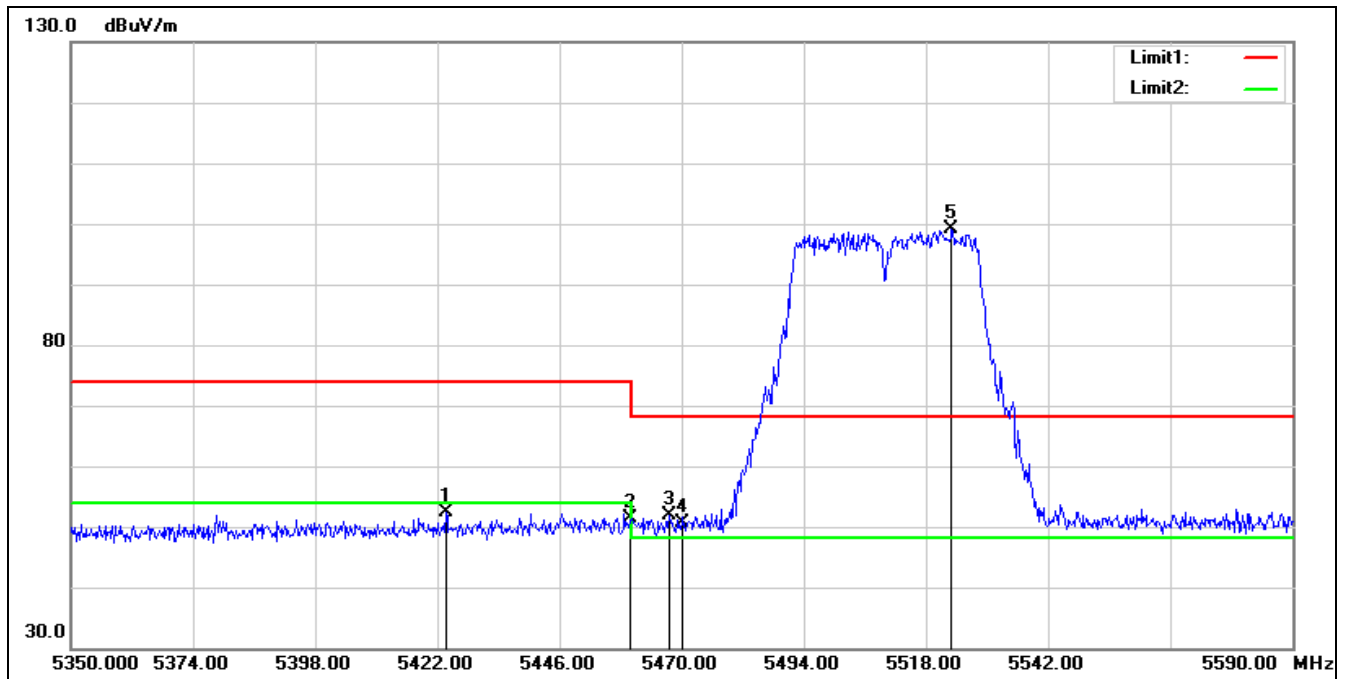


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5423.680	50.87	1.55	52.42	74.00	-21.58	peak
2	5460.000	49.64	1.75	51.39	74.00	-22.61	peak
3	5467.600	50.20	1.76	51.96	68.20	-16.24	peak
4	5470.000	48.81	1.77	50.58	68.20	-17.62	peak
5*	5523.040	97.40	1.80	99.20	68.20	31.00	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5510 MHz

Remark:

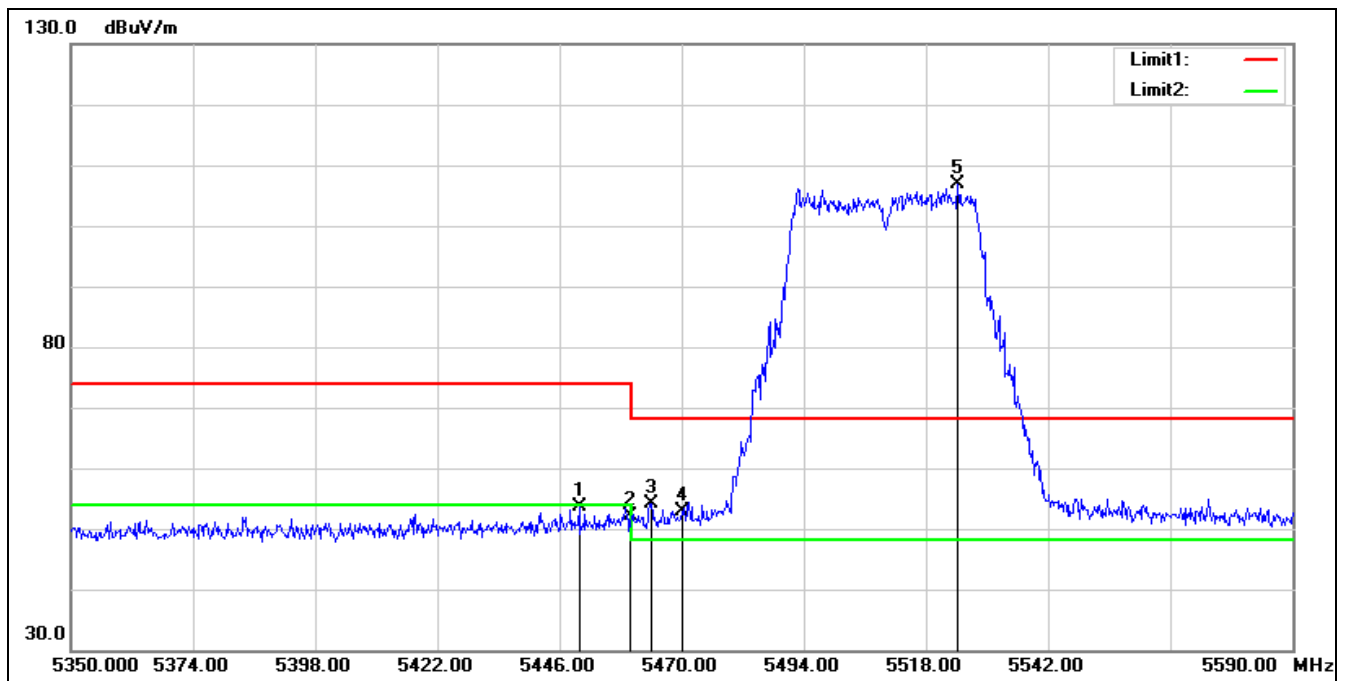


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.840	51.82	1.74	53.56	74.00	-20.44	peak
2	5460.000	50.44	1.75	52.19	74.00	-21.81	peak
3	5464.000	52.47	1.75	54.22	68.20	-13.98	peak
4	5470.000	51.16	1.77	52.93	68.20	-15.27	peak
5*	5524.240	104.98	1.80	106.78	68.20	38.58	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5550 MHz

Remark:

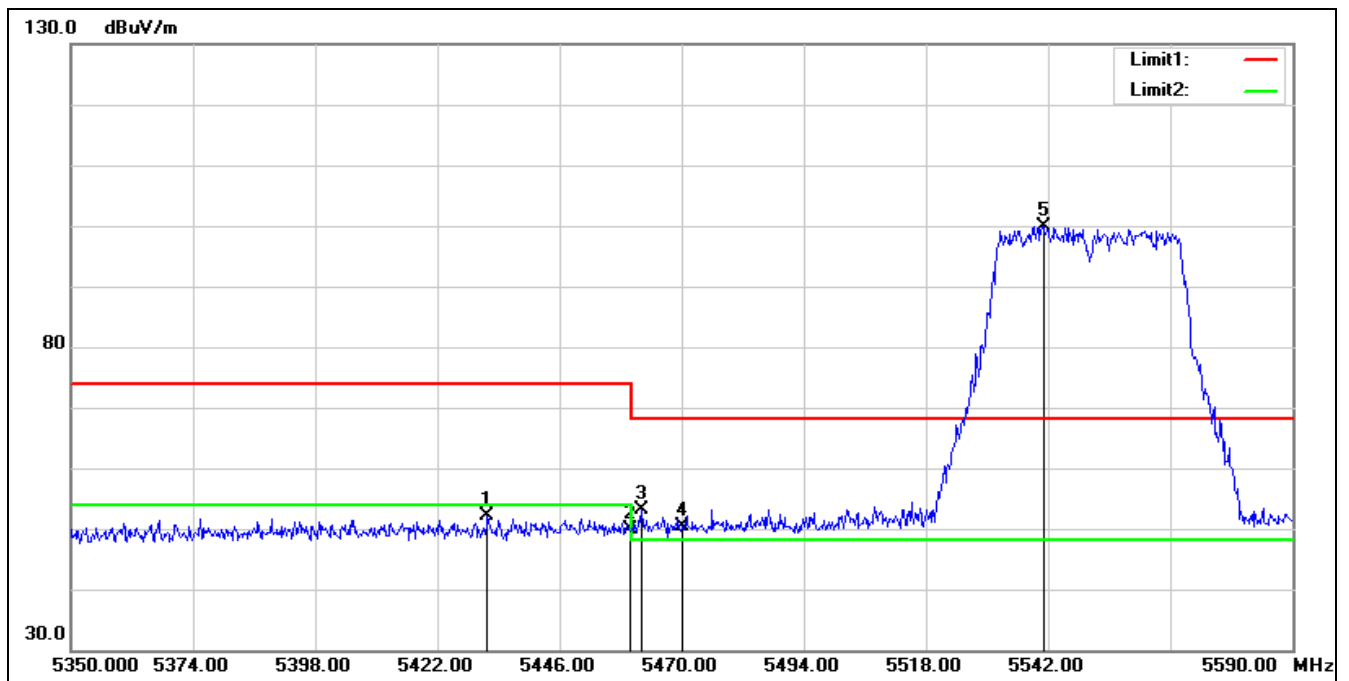


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.840	50.63	1.61	52.24	74.00	-21.76	peak
2	5460.000	48.10	1.75	49.85	74.00	-24.15	peak
3	5462.080	51.49	1.75	53.24	68.20	-14.96	peak
4	5470.000	48.63	1.77	50.40	68.20	-17.80	peak
5*	5541.040	98.09	1.79	99.88	68.20	31.68	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5550 MHz

Remark:

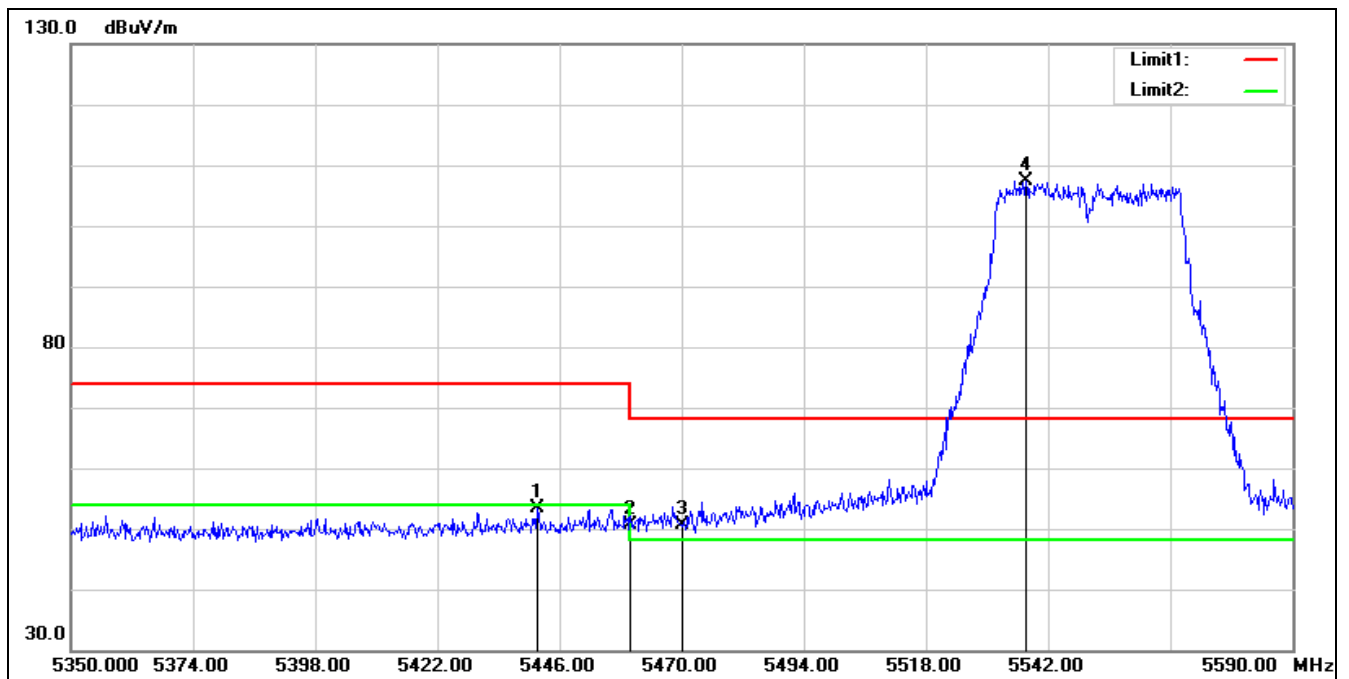


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.680	51.59	1.68	53.27	74.00	-20.73	peak
2	5460.000	48.98	1.75	50.73	74.00	-23.27	peak
3	5470.000	48.83	1.77	50.60	68.20	-17.60	peak
4*	5537.680	105.61	1.79	107.40	68.20	39.20	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5670 MHz

Remark:

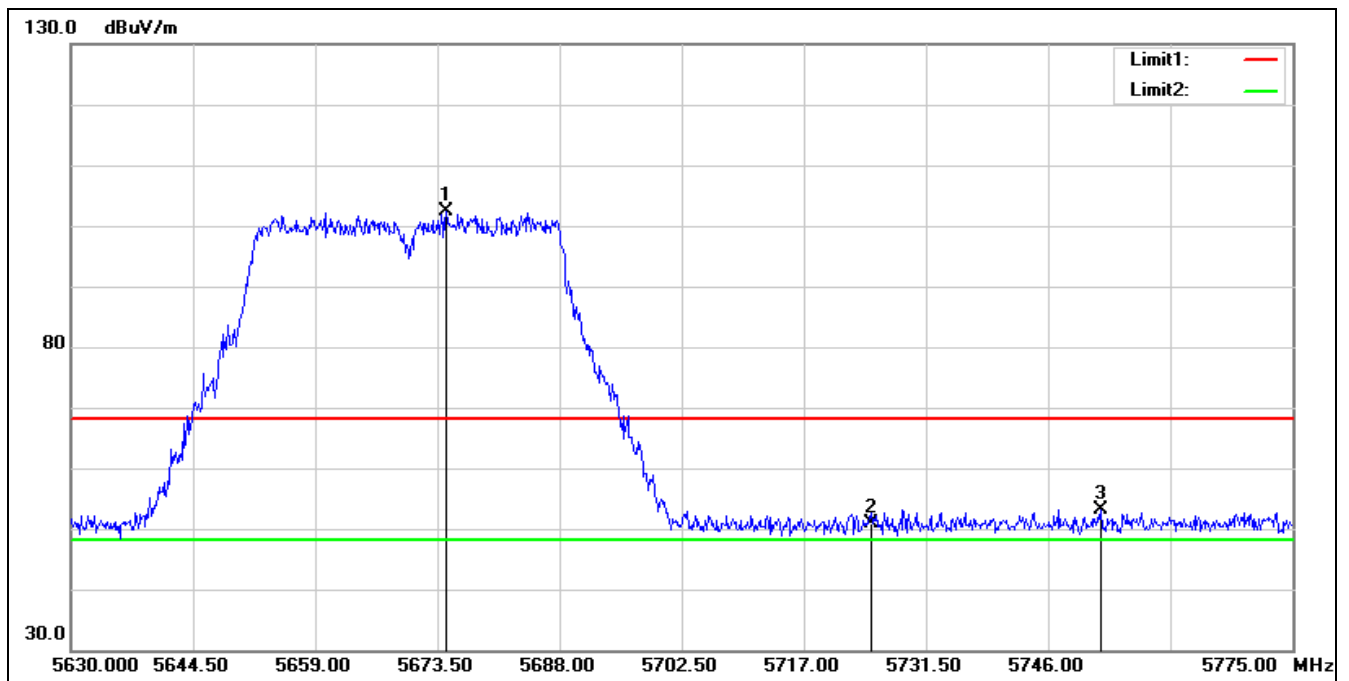


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5674.515	100.78	1.55	102.33	68.20	34.13	peak
2	5725.000	49.18	1.78	50.96	68.20	-17.24	peak
3	5752.235	51.09	2.03	53.12	68.20	-15.08	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5670 MHz

Remark:

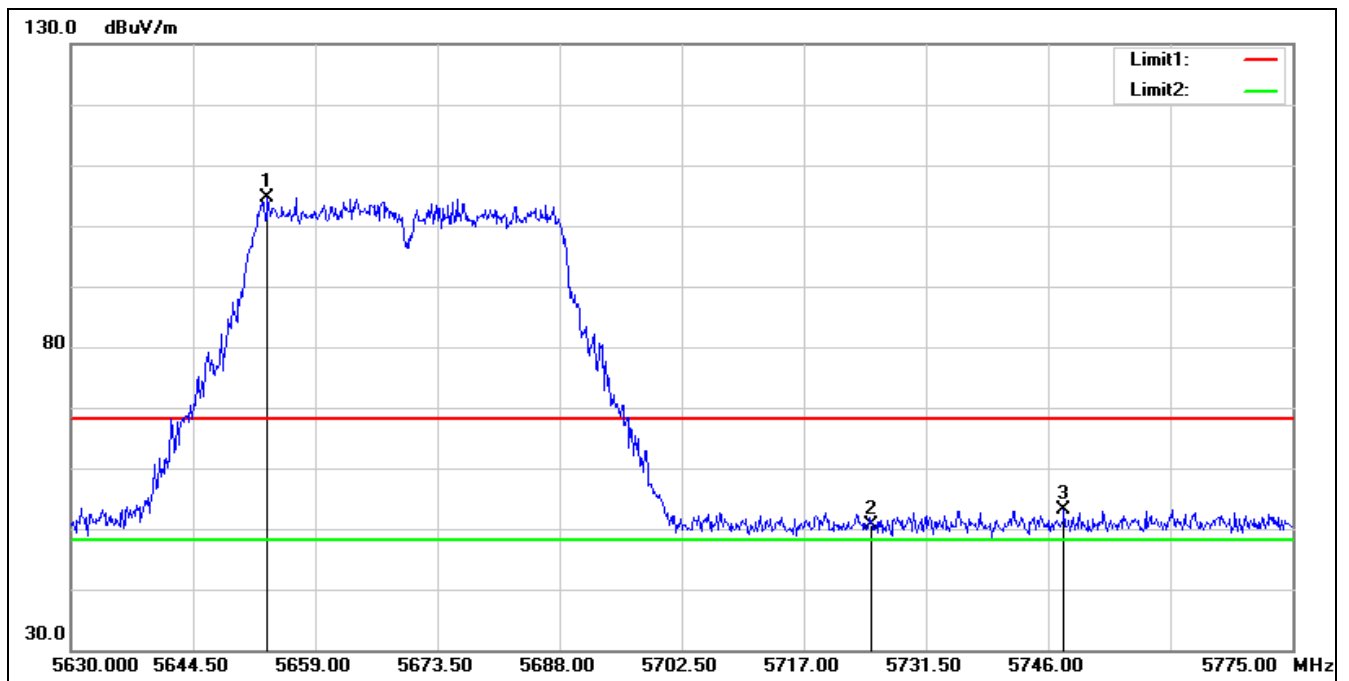


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5653.345	103.09	1.55	104.64	68.20	36.44	peak
2	5725.000	48.74	1.78	50.52	68.20	-17.68	peak
3	5747.885	51.22	2.01	53.23	68.20	-14.97	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5710 MHz

Remark:

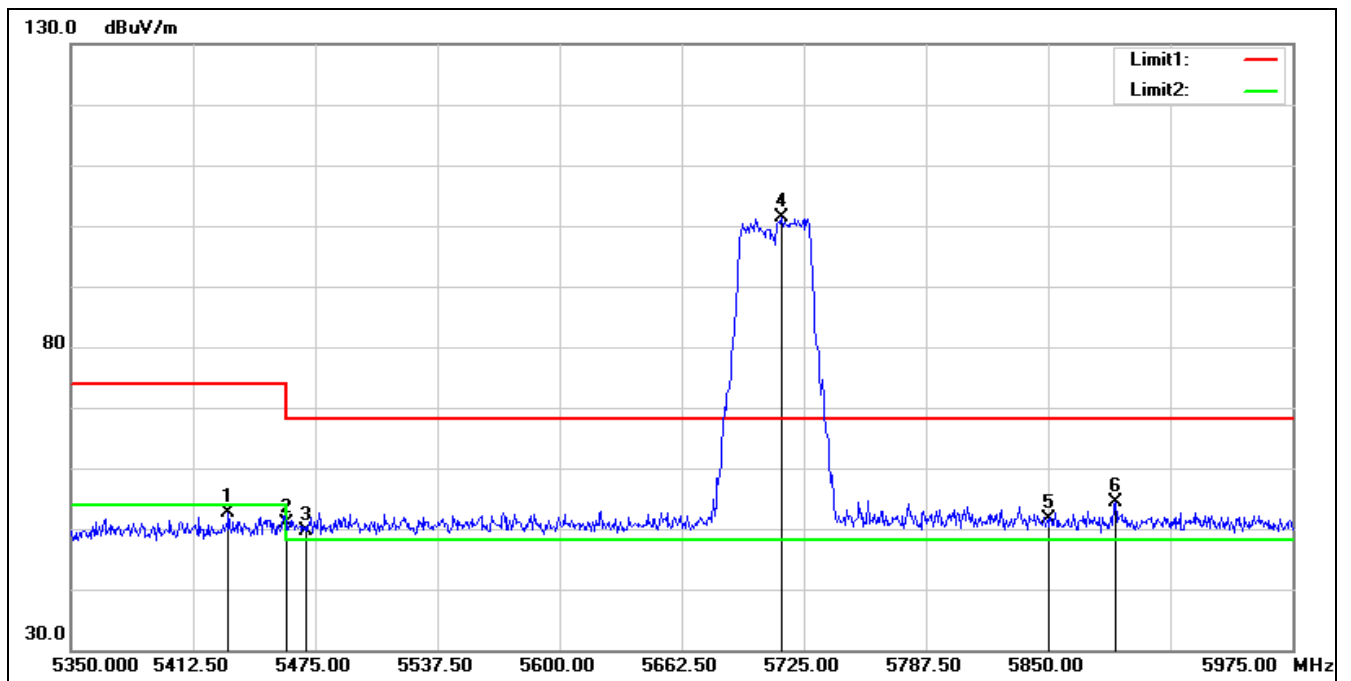


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.625	51.01	1.60	52.61	74.00	-21.39	peak
2	5460.000	49.17	1.75	50.92	74.00	-23.08	peak
3	5470.000	47.87	1.77	49.64	68.20	-18.56	peak
4*	5713.750	99.64	1.67	101.31	68.20	33.11	peak
5	5850.000	49.27	2.29	51.56	68.20	-16.64	peak
6	5884.375	52.01	2.36	54.37	68.20	-13.83	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5710 MHz

Remark:

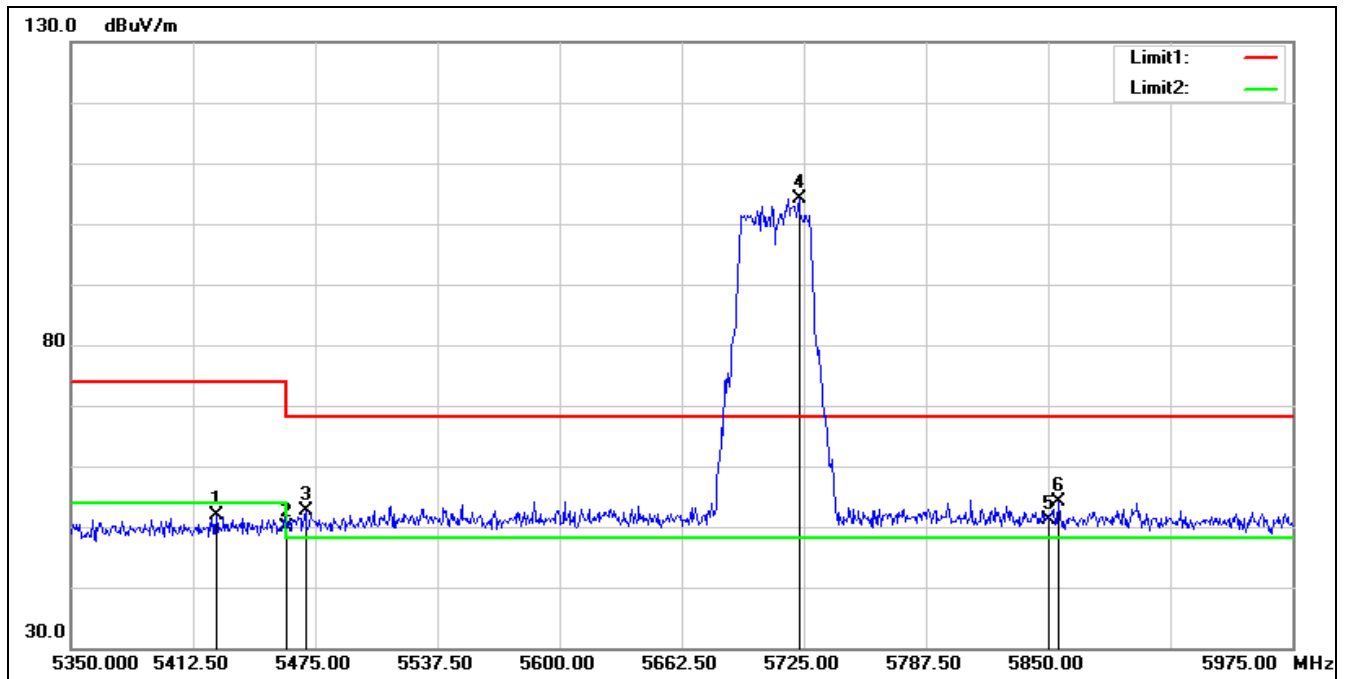


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.375	50.31	1.56	51.87	74.00	-22.13	peak
2	5460.000	48.24	1.75	49.99	74.00	-24.01	peak
3	5470.000	50.77	1.77	52.54	68.20	-15.66	peak
4*	5722.500	102.41	1.76	104.17	68.20	35.97	peak
5	5850.000	48.80	2.29	51.09	68.20	-17.11	peak
6	5855.000	51.84	2.31	54.15	68.20	-14.05	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5755 MHz

Remark:

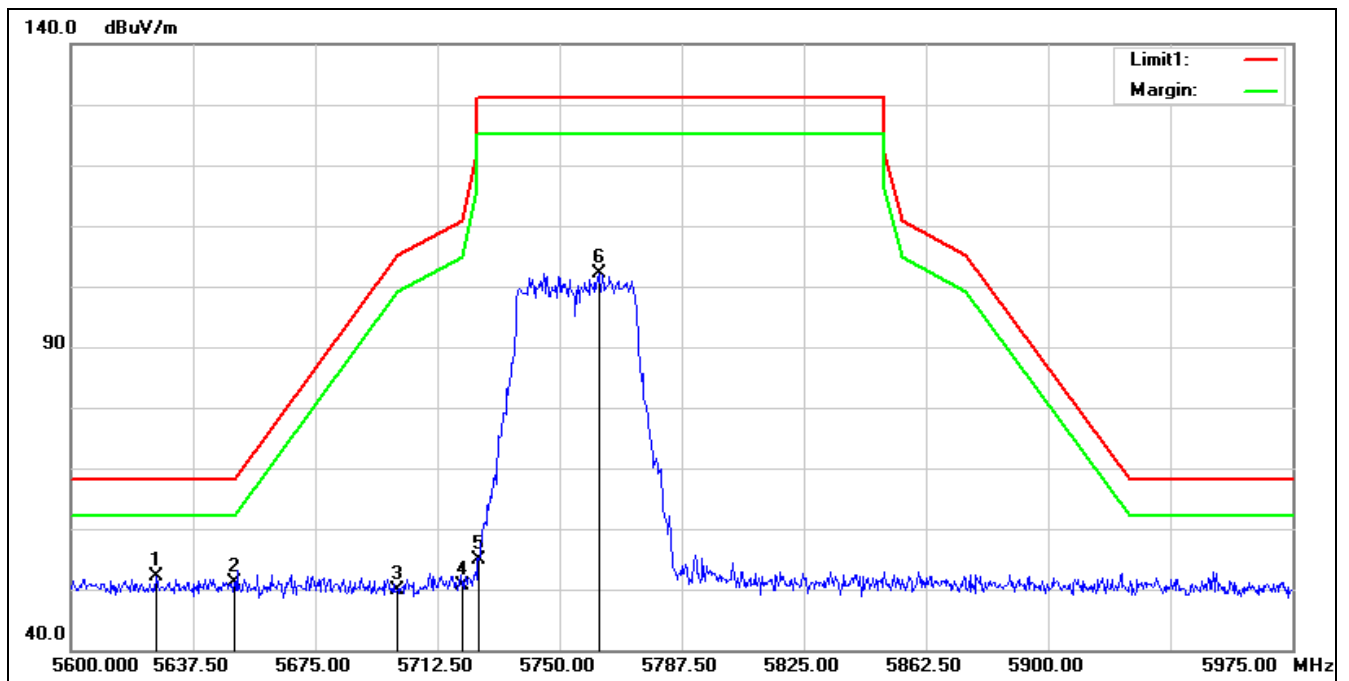

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5626.250	50.56	1.61	52.17	68.20	-16.03	peak
2	5650.000	49.55	1.56	51.11	68.20	-17.09	peak
3	5700.000	48.34	1.54	49.88	105.20	-55.32	peak
4	5720.000	48.85	1.74	50.59	110.80	-60.21	peak
5	5725.000	53.09	1.78	54.87	122.20	-67.33	peak
6	5762.375	100.12	2.07	102.19	131.20	-29.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5755 MHz		
Remark:			

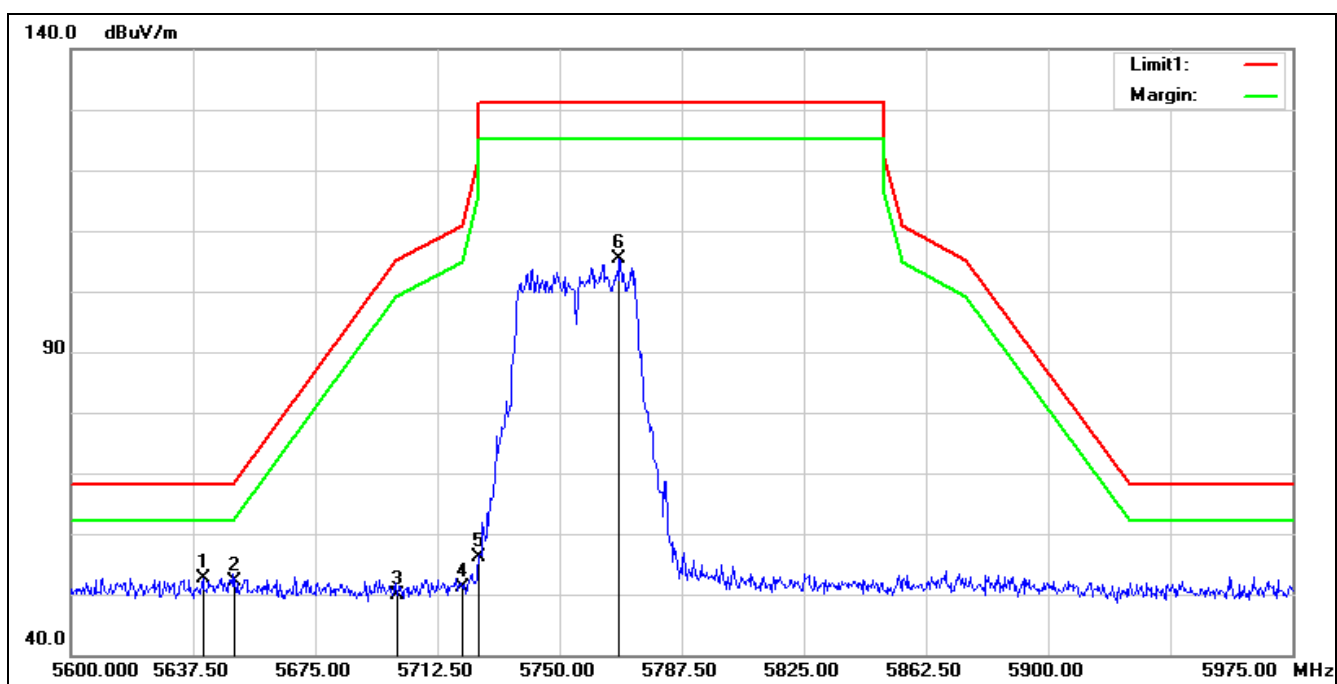


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5640.500	51.17	1.58	52.75	68.20	-15.45	peak
2	5650.000	50.52	1.56	52.08	68.20	-16.12	peak
3	5700.000	48.28	1.54	49.82	105.20	-55.38	peak
4	5720.000	49.28	1.74	51.02	110.80	-59.78	peak
5	5725.000	54.40	1.78	56.18	122.20	-66.02	peak
6	5768.375	103.23	2.09	105.32	131.20	-25.88	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5795 MHz

Remark:

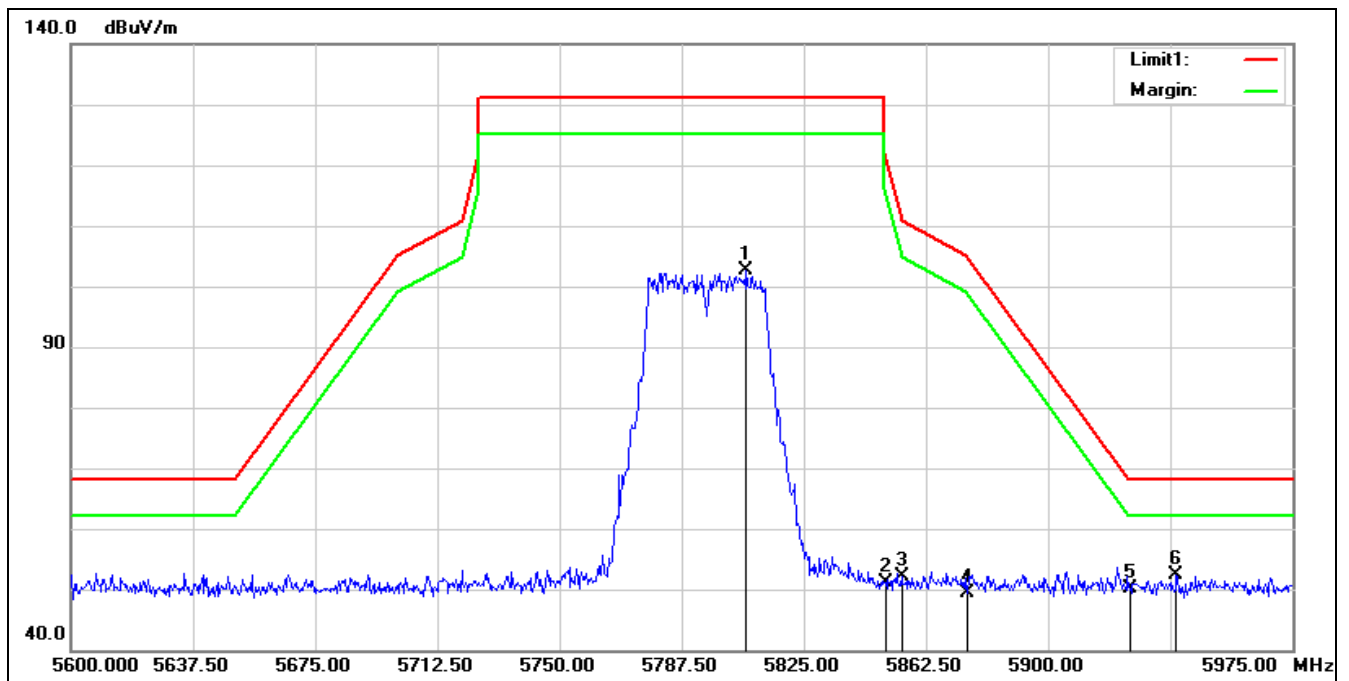


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5807.375	100.48	2.22	102.70	131.20	-28.50	peak
2	5850.000	48.81	2.29	51.10	122.20	-71.10	peak
3	5855.000	49.92	2.31	52.23	110.80	-58.57	peak
4	5875.000	47.07	2.34	49.41	105.20	-55.79	peak
5	5925.000	47.79	2.23	50.02	68.20	-18.18	peak
6*	5939.375	50.18	2.13	52.31	68.20	-15.89	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5795 MHz

Remark:

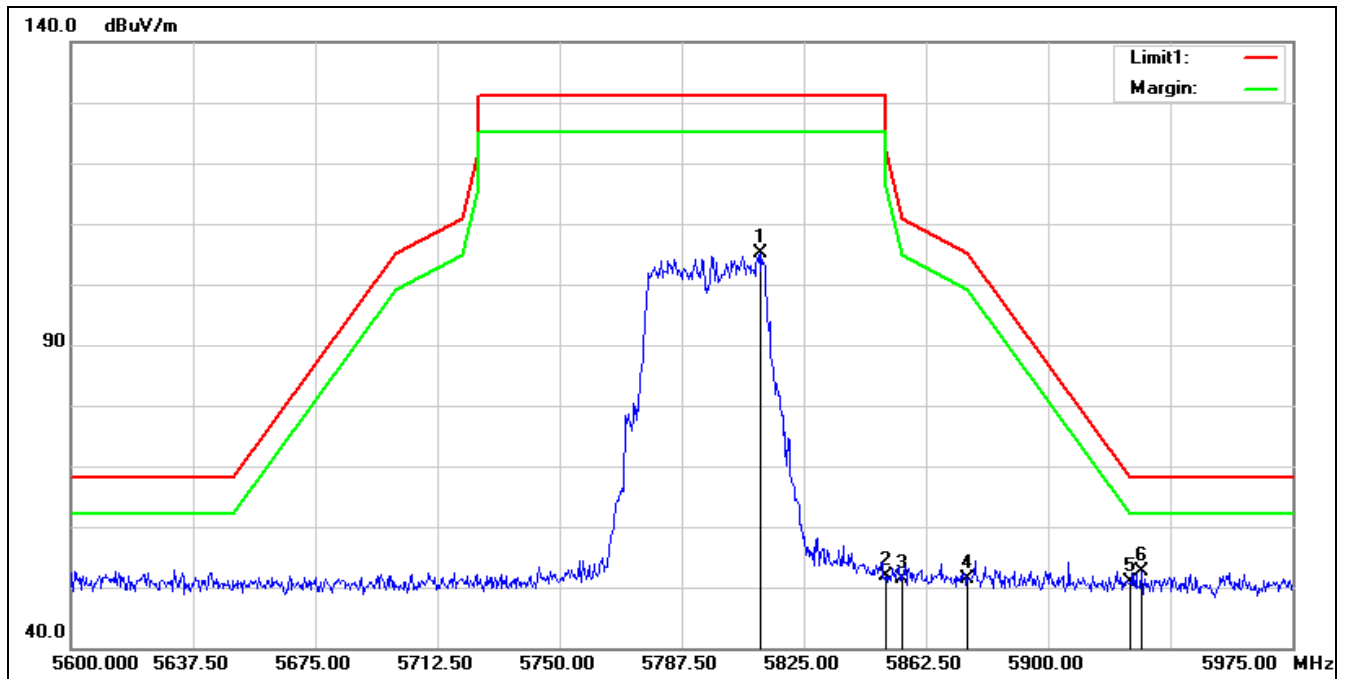


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5811.875	102.79	2.22	105.01	131.20	-26.19	peak
2	5850.000	49.68	2.29	51.97	122.20	-70.23	peak
3	5855.000	48.98	2.31	51.29	110.80	-59.51	peak
4	5875.000	49.12	2.34	51.46	105.20	-53.74	peak
5	5925.000	48.60	2.23	50.83	68.20	-17.37	peak
6*	5928.875	50.39	2.20	52.59	68.20	-15.61	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT80 5210 MHz

Remark:

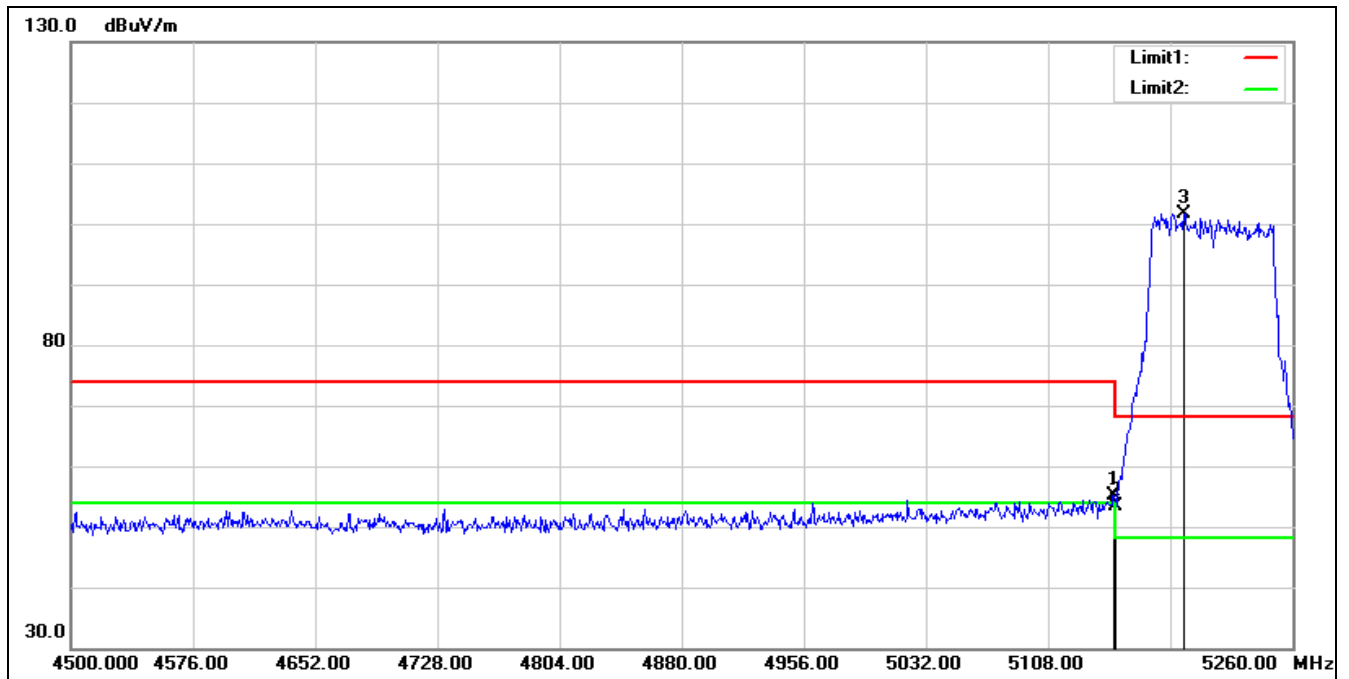


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	53.82	1.38	55.20	74.00	-18.80	peak
2	5150.000	52.00	1.38	53.38	74.00	-20.62	peak
3*	5192.360	100.47	1.18	101.65	68.20	33.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5210 MHz		
Remark:			

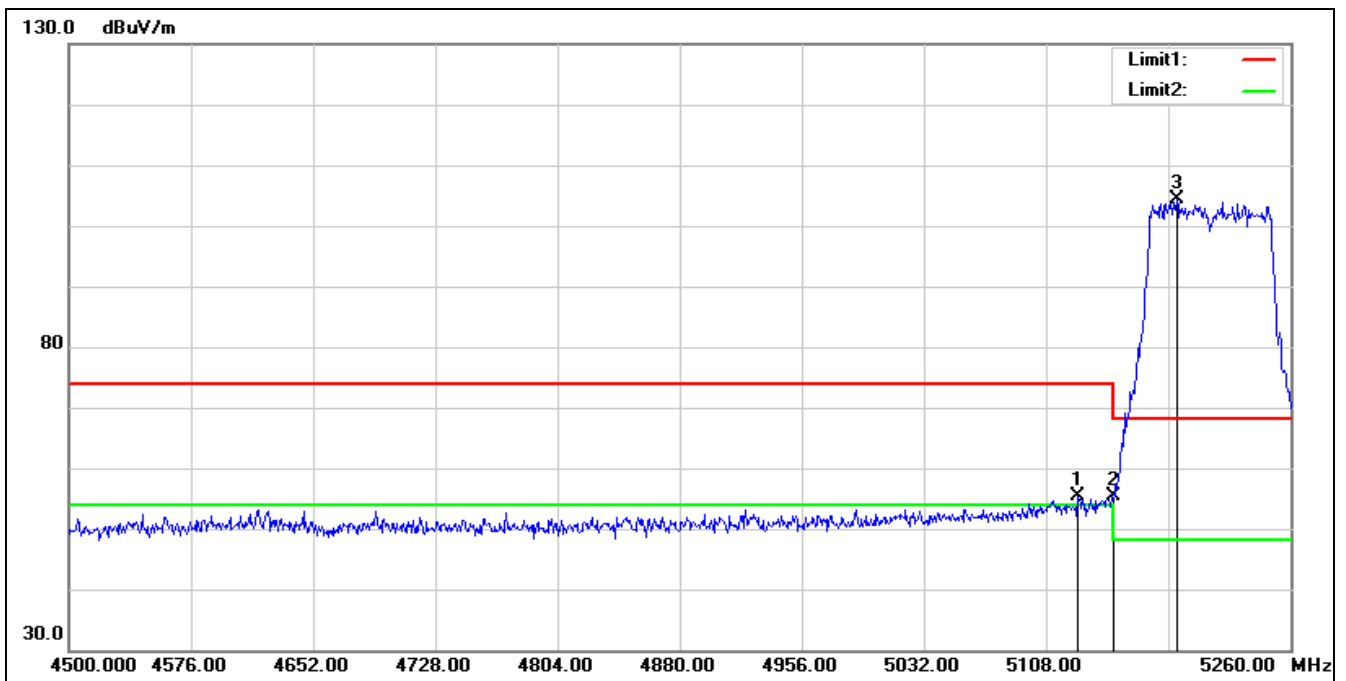


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5127.760	54.10	1.39	55.49	74.00	-18.51	peak
2	5150.000	54.11	1.38	55.49	74.00	-18.51	peak
3*	5189.320	103.29	1.19	104.48	68.20	36.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5290 MHz		
Remark:			

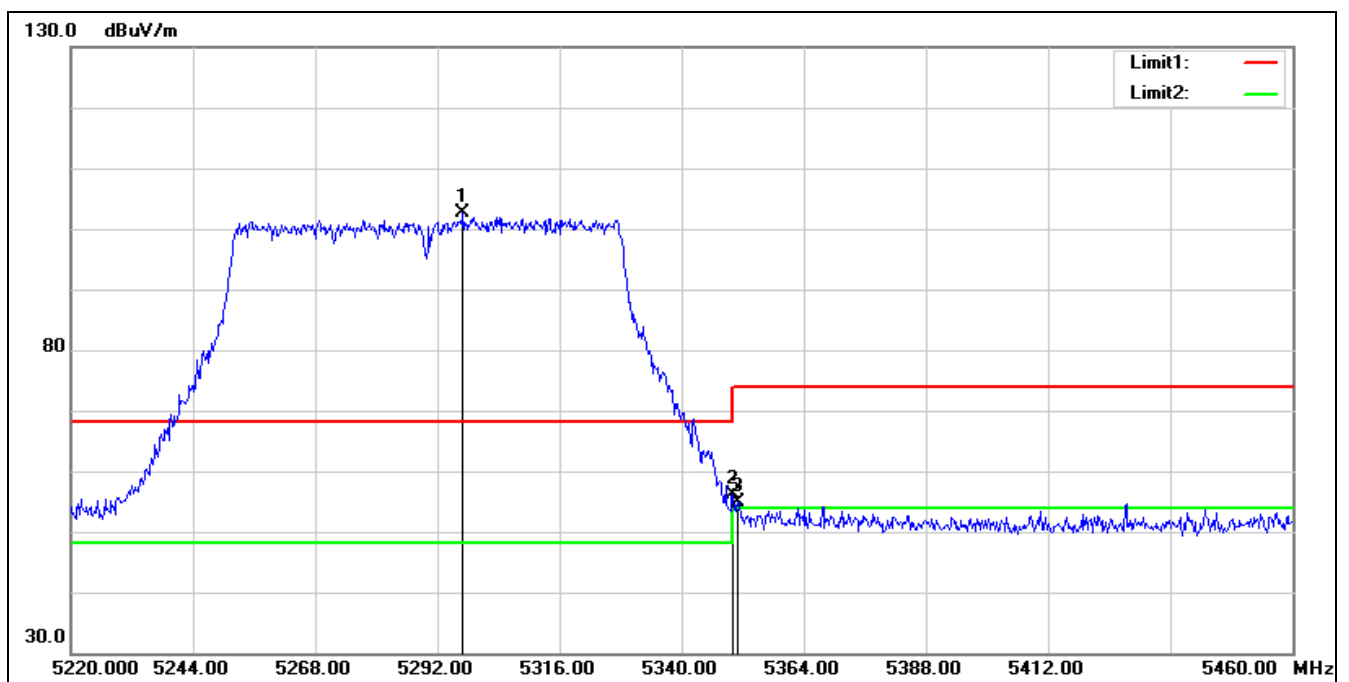

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5297.040	102.02	0.66	102.68	68.20	34.48	peak
2	5350.000	54.99	1.02	56.01	74.00	-17.99	peak
3	5351.040	53.95	1.03	54.98	74.00	-19.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5290 MHz		
Remark:			

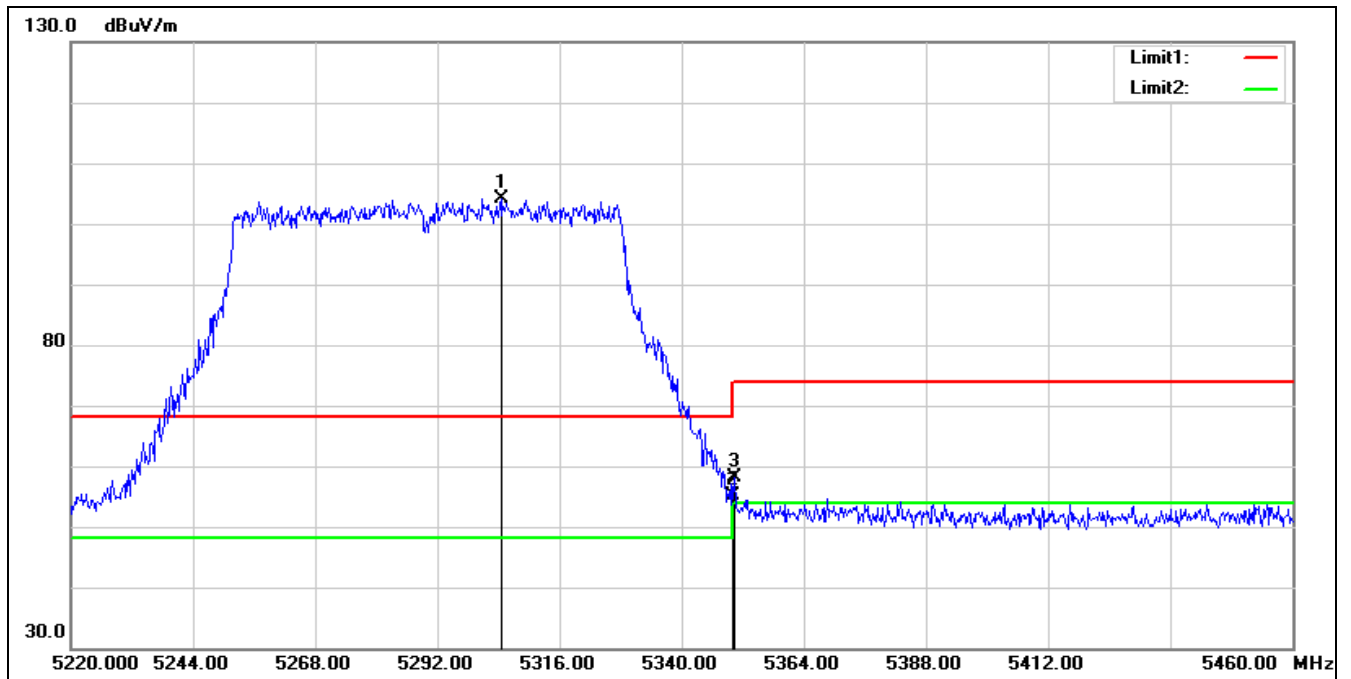


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5304.480	103.45	0.70	104.15	68.20	35.95	peak
2	5350.000	54.00	1.02	55.02	74.00	-18.98	peak
3	5350.320	57.17	1.02	58.19	74.00	-15.81	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT80 5530 MHz

Remark:

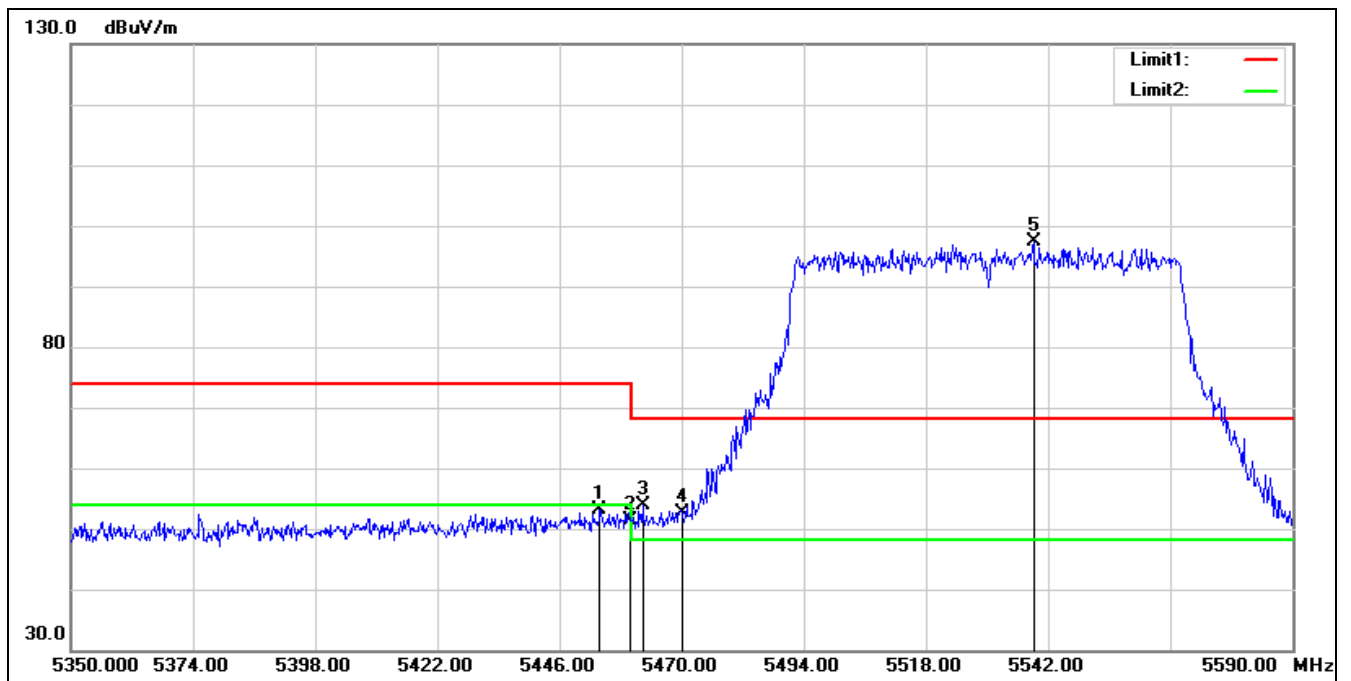


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.920	51.35	1.75	53.10	74.00	-20.90	peak
2	5460.000	49.60	1.75	51.35	74.00	-22.65	peak
3	5462.320	52.20	1.75	53.95	68.20	-14.25	peak
4	5470.000	50.82	1.77	52.59	68.20	-15.61	peak
5*	5539.120	95.51	1.79	97.30	68.20	29.10	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT80 5530 MHz

Remark:

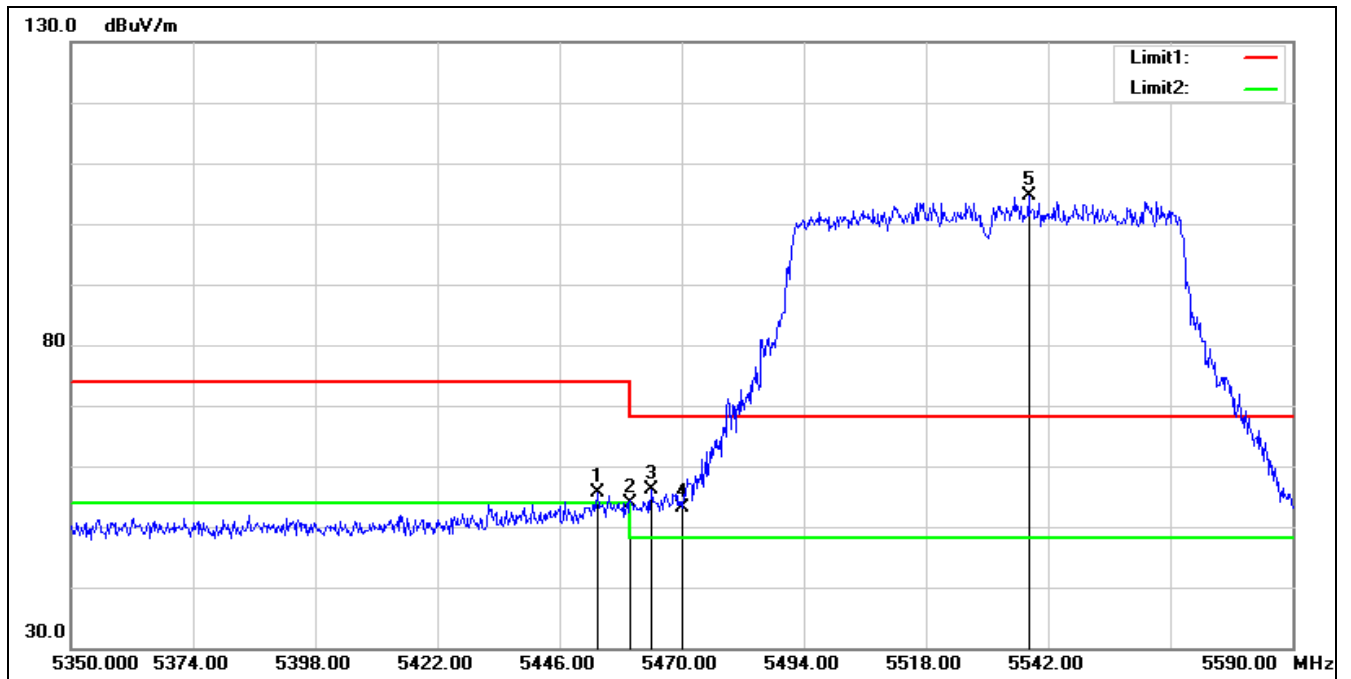


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.440	53.90	1.75	55.65	74.00	-18.35	peak
2	5460.000	52.20	1.75	53.95	74.00	-20.05	peak
3	5464.000	54.26	1.75	56.01	68.20	-12.19	peak
4	5470.000	51.34	1.77	53.11	68.20	-15.09	peak
5*	5538.160	102.87	1.79	104.66	68.20	36.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			

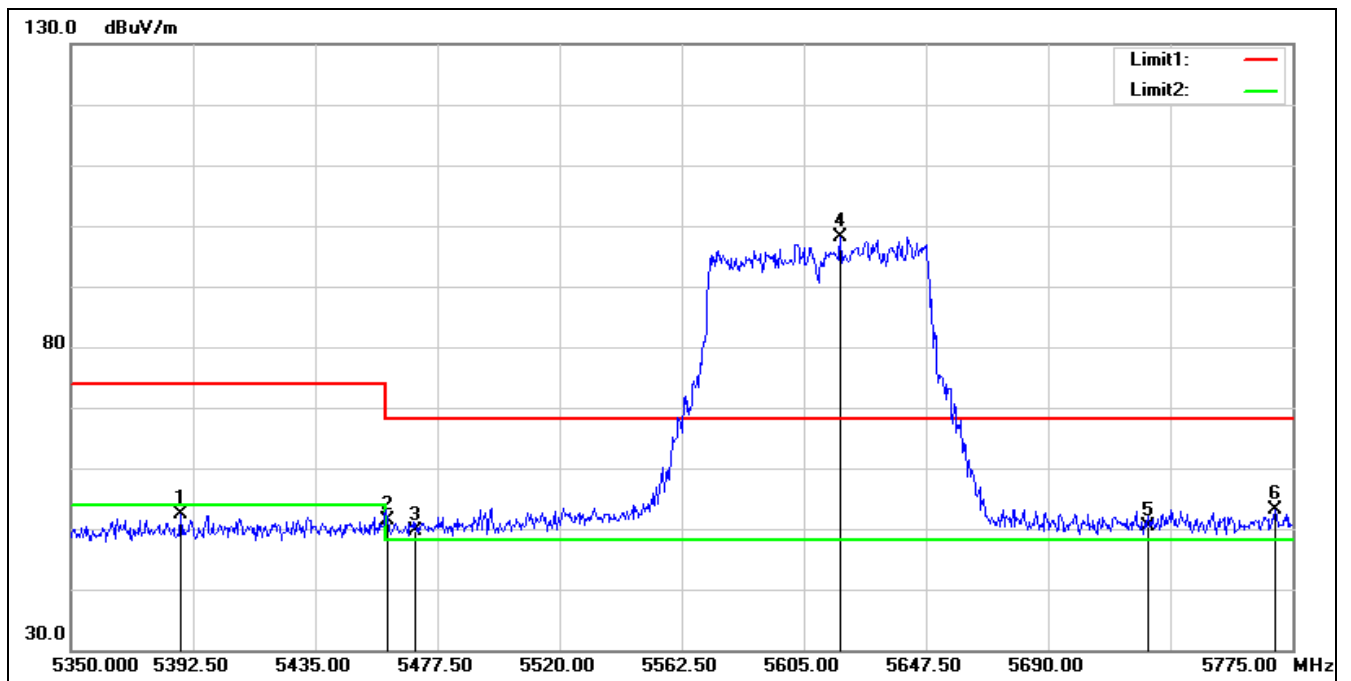

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5388.250	51.16	1.30	52.46	74.00	-21.54	peak
2	5460.000	49.70	1.75	51.45	74.00	-22.55	peak
3	5470.000	47.81	1.77	49.58	68.20	-18.62	peak
4*	5617.750	96.54	1.62	98.16	68.20	29.96	peak
5	5725.000	48.56	1.78	50.34	68.20	-17.86	peak
6	5769.050	50.95	2.10	53.05	68.20	-15.15	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			

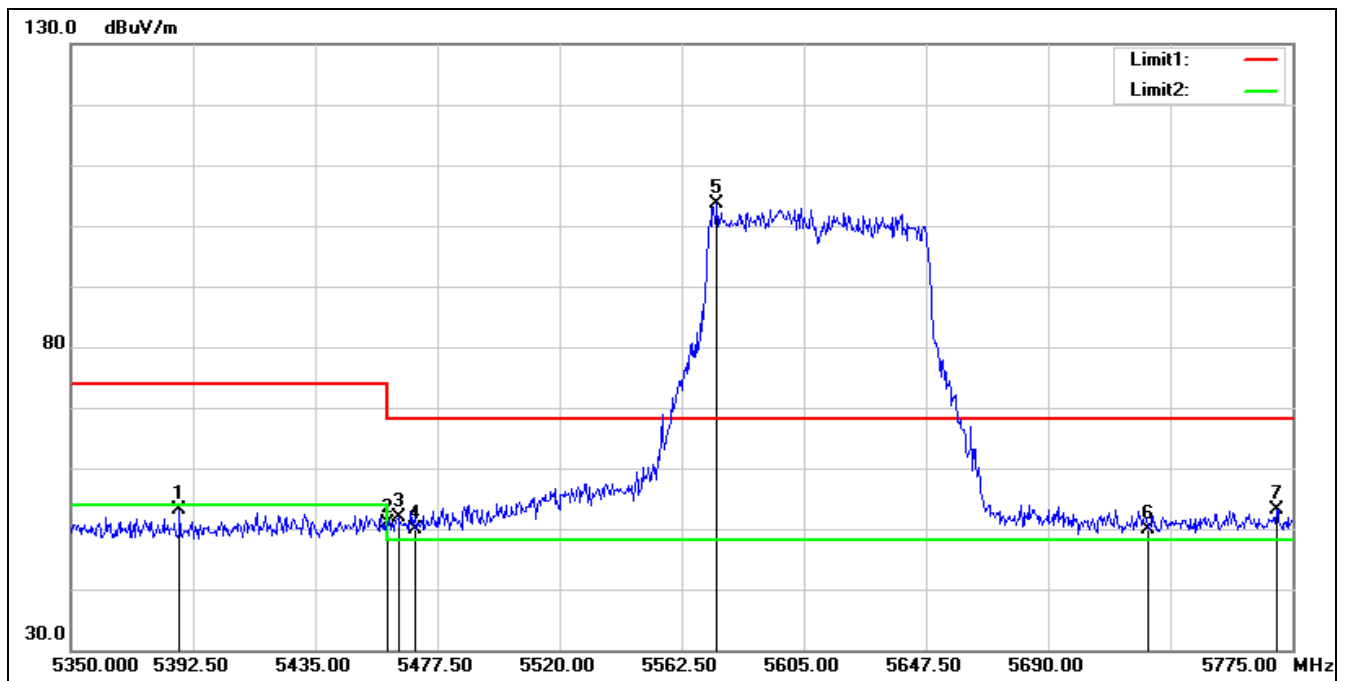

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5387.825	51.86	1.30	53.16	74.00	-20.84	peak
2	5460.000	49.07	1.75	50.82	74.00	-23.18	peak
3	5463.900	50.07	1.75	51.82	68.20	-16.38	peak
4	5470.000	48.21	1.77	49.98	68.20	-18.22	peak
5*	5574.825	101.86	1.72	103.58	68.20	35.38	peak
6	5725.000	48.09	1.78	49.87	68.20	-18.33	peak
7	5769.475	51.07	2.10	53.17	68.20	-15.03	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

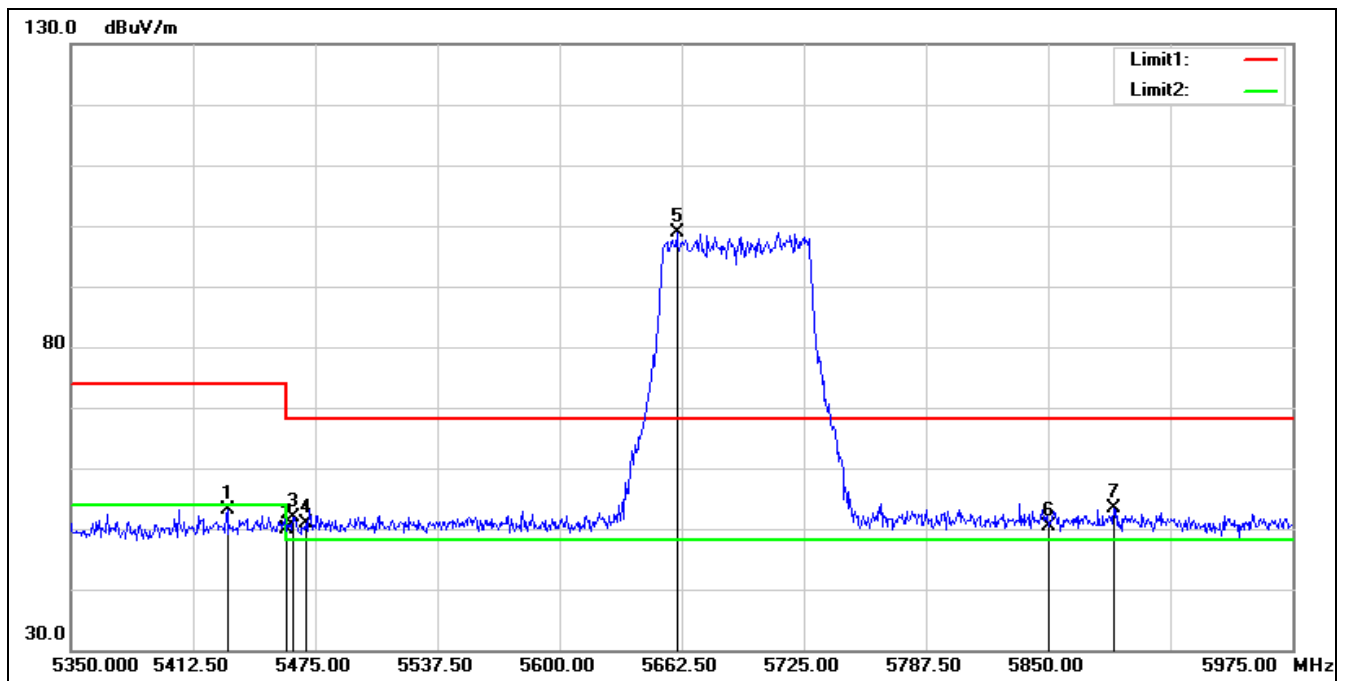

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.000	51.56	1.60	53.16	74.00	-20.84	peak
2	5460.000	48.24	1.75	49.99	74.00	-24.01	peak
3	5463.750	50.12	1.75	51.87	68.20	-16.33	peak
4	5470.000	49.18	1.77	50.95	68.20	-17.25	peak
5*	5660.000	97.37	1.56	98.93	68.20	30.73	peak
6	5850.000	48.09	2.29	50.38	68.20	-17.82	peak
7	5883.750	50.93	2.36	53.29	68.20	-14.91	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

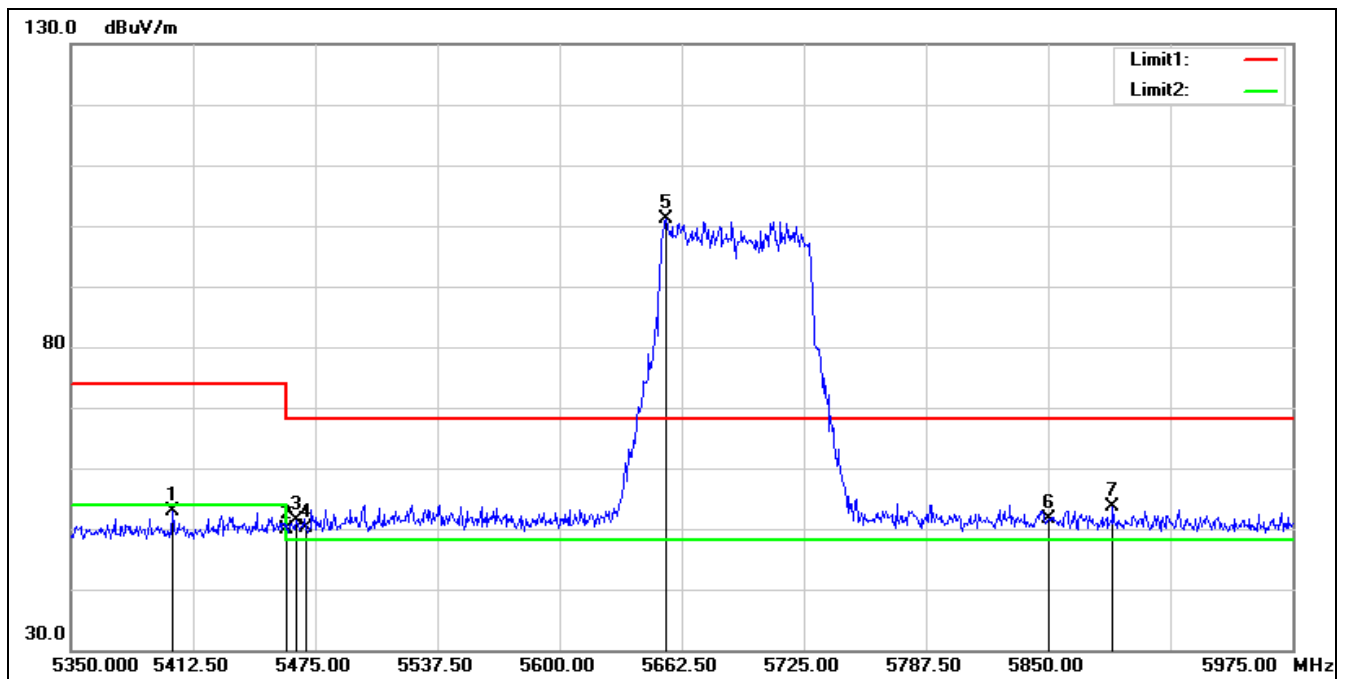

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5401.875	51.38	1.39	52.77	74.00	-21.23	peak
2	5460.000	48.25	1.75	50.00	74.00	-24.00	peak
3	5465.625	49.66	1.76	51.42	68.20	-16.78	peak
4	5470.000	48.28	1.77	50.05	68.20	-18.15	peak
5*	5654.375	99.62	1.55	101.17	68.20	32.97	peak
6	5850.000	49.42	2.29	51.71	68.20	-16.49	peak
7	5883.125	51.27	2.36	53.63	68.20	-14.57	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			

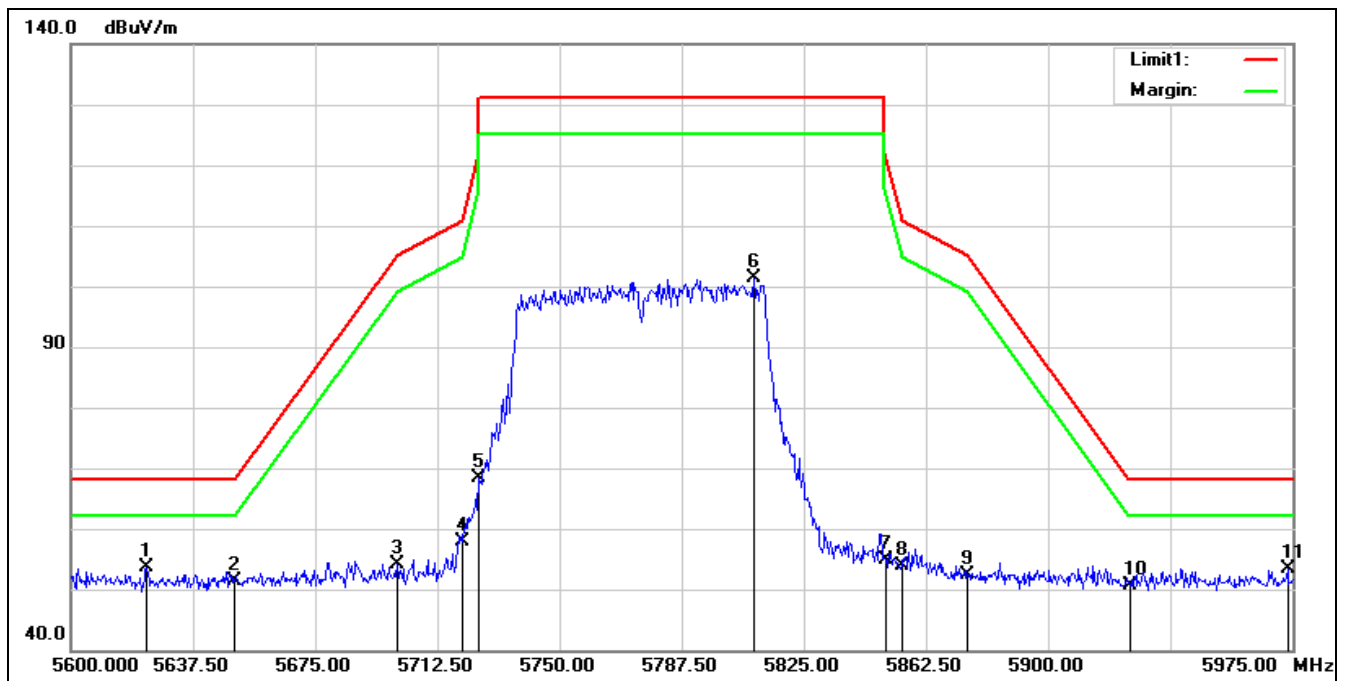

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5623.250	52.09	1.61	53.70	68.20	-14.50	peak
2	5650.000	49.89	1.56	51.45	68.20	-16.75	peak
3	5700.000	52.61	1.54	54.15	105.20	-51.05	peak
4	5720.000	56.26	1.74	58.00	110.80	-52.80	peak
5	5725.000	66.62	1.78	68.40	122.20	-53.80	peak
6	5809.625	99.26	2.22	101.48	131.20	-29.72	peak
7	5850.000	52.58	2.29	54.87	122.20	-67.33	peak
8	5855.000	51.66	2.31	53.97	110.80	-56.83	peak
9	5875.000	49.94	2.34	52.28	105.20	-52.92	peak
10	5925.000	48.36	2.23	50.59	68.20	-17.61	peak
11	5973.500	51.31	2.11	53.42	68.20	-14.78	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			

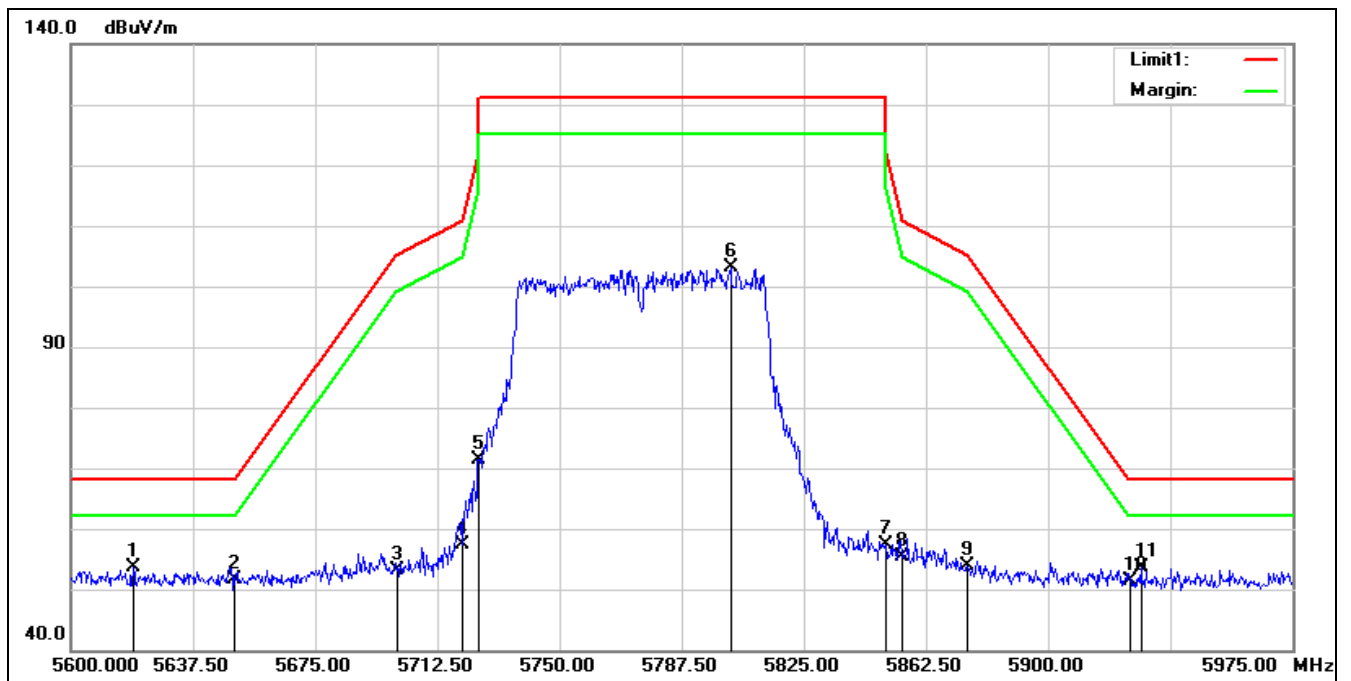

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5619.125	52.11	1.63	53.74	68.20	-14.46	peak
2	5650.000	49.99	1.56	51.55	68.20	-16.65	peak
3	5700.000	51.69	1.54	53.23	105.20	-51.97	peak
4	5720.000	55.72	1.74	57.46	110.80	-53.34	peak
5	5725.000	69.62	1.78	71.40	122.20	-50.80	peak
6	5802.500	101.00	2.22	103.22	131.20	-27.98	peak
7	5850.000	55.16	2.29	57.45	122.20	-64.75	peak
8	5855.000	53.17	2.31	55.48	110.80	-55.32	peak
9	5875.000	51.55	2.34	53.89	105.20	-51.31	peak
10	5925.000	49.23	2.23	51.46	68.20	-16.74	peak
11	5928.500	51.34	2.20	53.54	68.20	-14.66	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT160 5250 MHz
Remark:

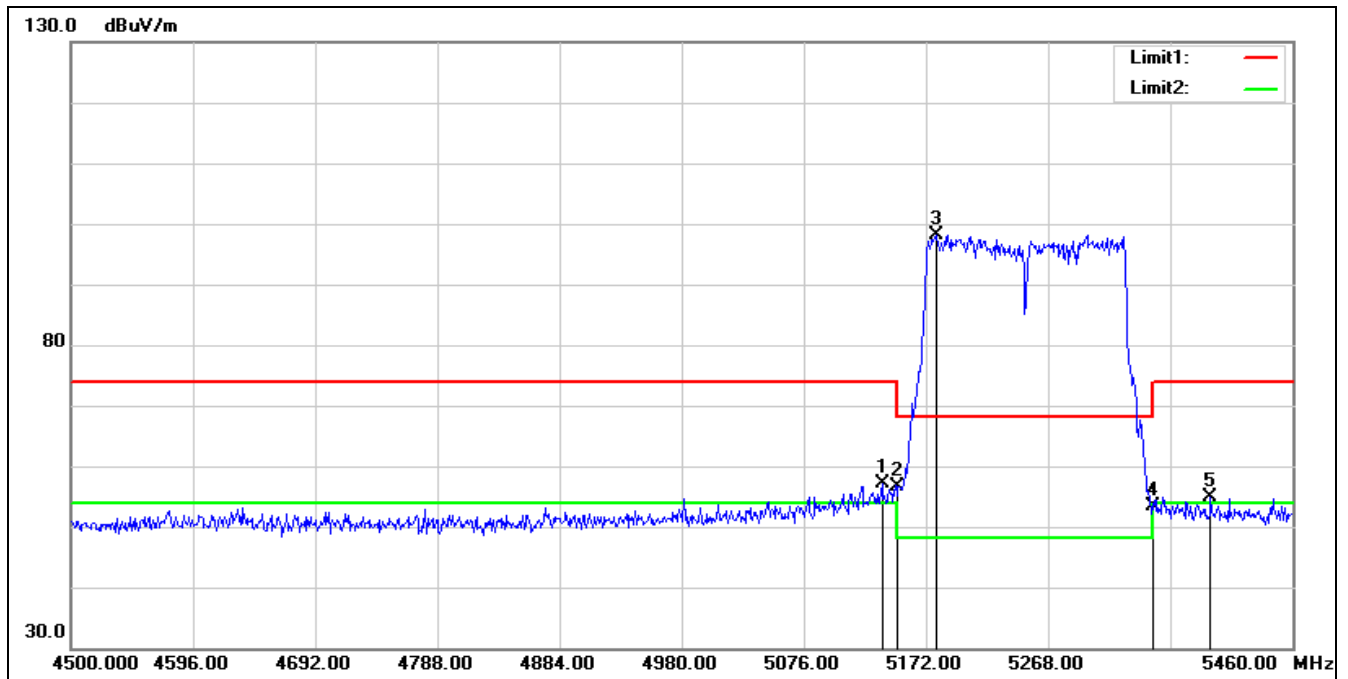


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5137.440	55.68	1.40	57.08	74.00	-16.92	peak
2	5150.000	55.14	1.38	56.52	74.00	-17.48	peak
3*	5179.680	96.88	1.24	98.12	68.20	29.92	peak
4	5350.000	52.45	1.02	53.47	74.00	-20.53	peak
5	5395.680	53.57	1.34	54.91	74.00	-19.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT160 5250 MHz		
Remark:			

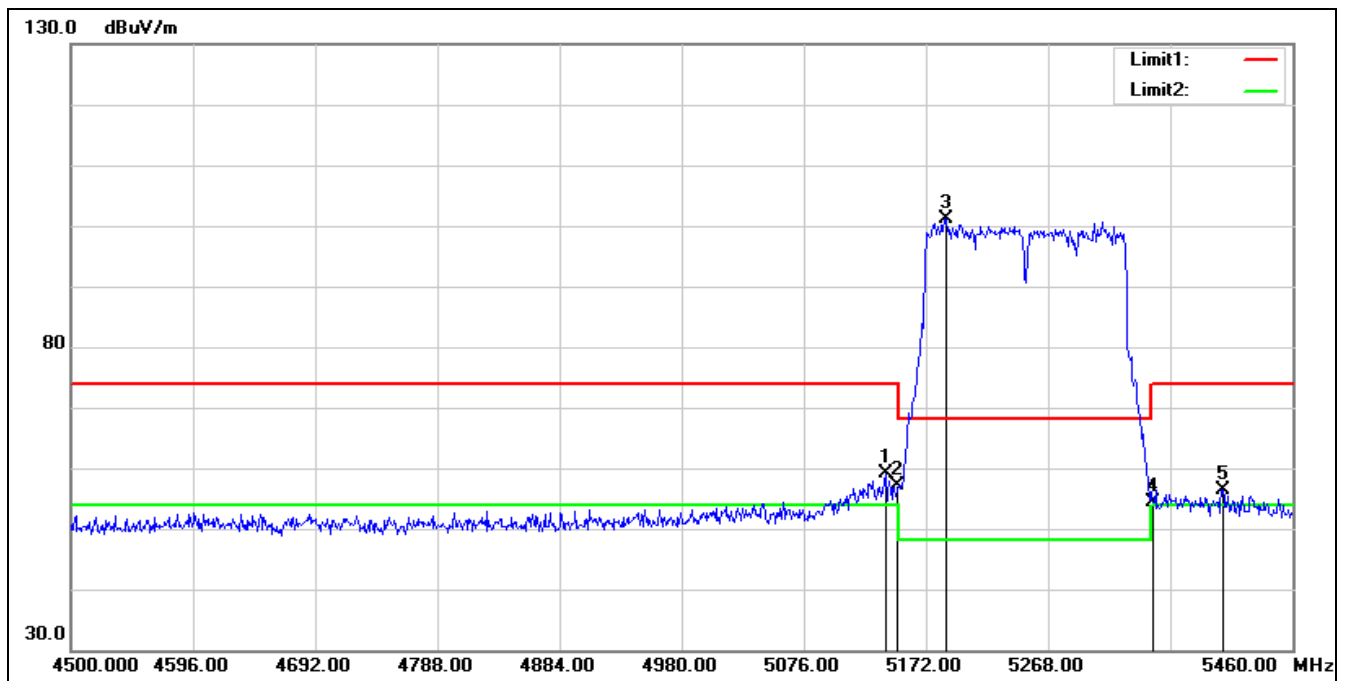

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.320	57.81	1.39	59.20	74.00	-14.80	peak
2	5150.000	55.66	1.38	57.04	74.00	-16.96	peak
3*	5188.320	99.95	1.20	101.15	68.20	32.95	peak
4	5350.000	53.24	1.02	54.26	74.00	-19.74	peak
5	5405.280	55.08	1.41	56.49	74.00	-17.51	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			

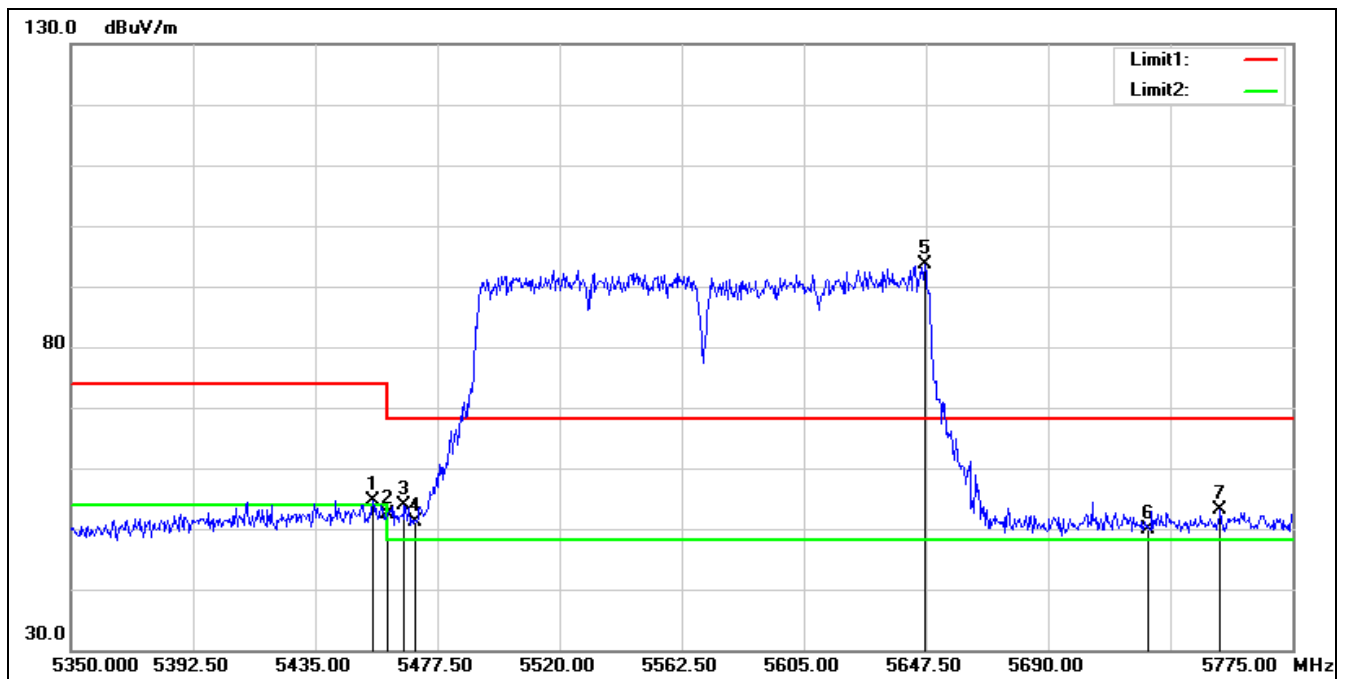

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.975	52.96	1.75	54.71	74.00	-19.29	peak
2	5460.000	50.55	1.75	52.30	74.00	-21.70	peak
3	5466.025	52.08	1.76	53.84	68.20	-14.36	peak
4	5470.000	49.41	1.77	51.18	68.20	-17.02	peak
5*	5647.075	92.05	1.57	93.62	68.20	25.42	peak
6	5725.000	48.19	1.78	49.97	68.20	-18.23	peak
7	5749.925	51.02	2.03	53.05	68.20	-15.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			

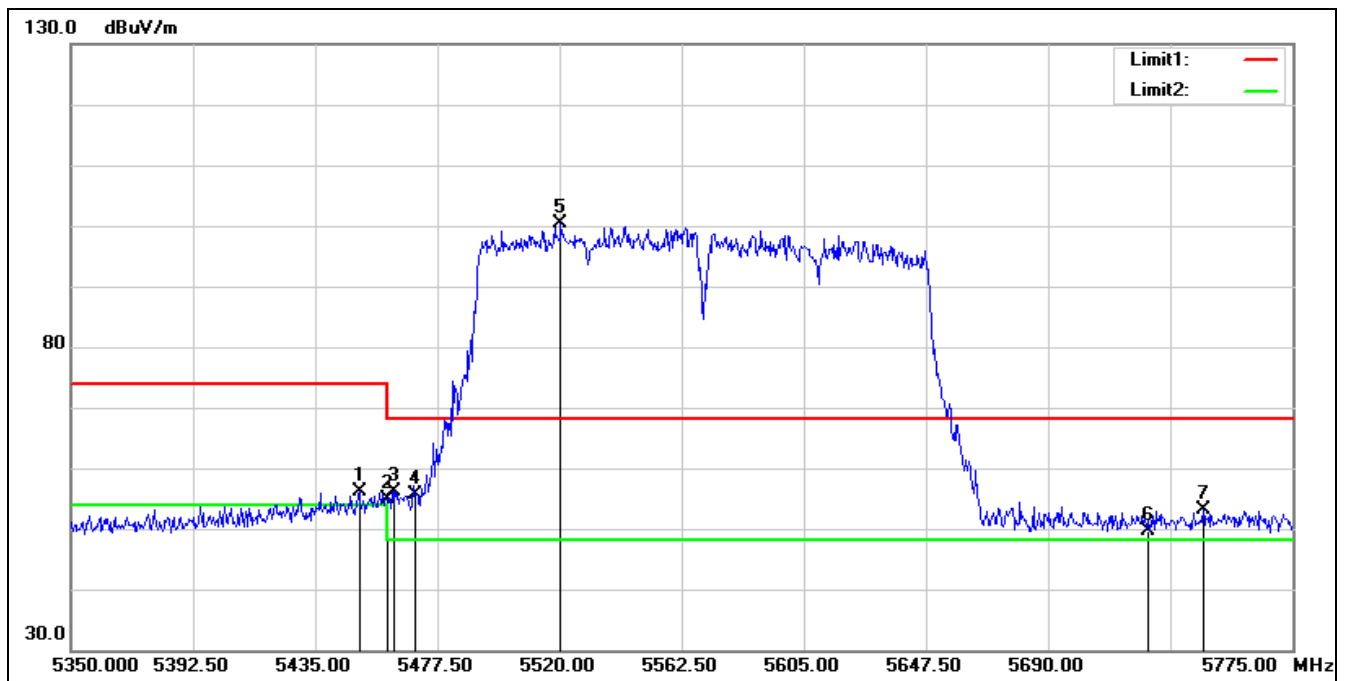

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.300	54.34	1.74	56.08	74.00	-17.92	peak
2	5460.000	53.04	1.75	54.79	74.00	-19.21	peak
3	5462.200	54.45	1.75	56.20	68.20	-12.00	peak
4	5470.000	53.76	1.77	55.53	68.20	-12.67	peak
5*	5520.425	98.65	1.79	100.44	68.20	32.24	peak
6	5725.000	47.80	1.78	49.58	68.20	-18.62	peak
7	5743.975	51.12	1.97	53.09	68.20	-15.11	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5180 MHz

Remark:

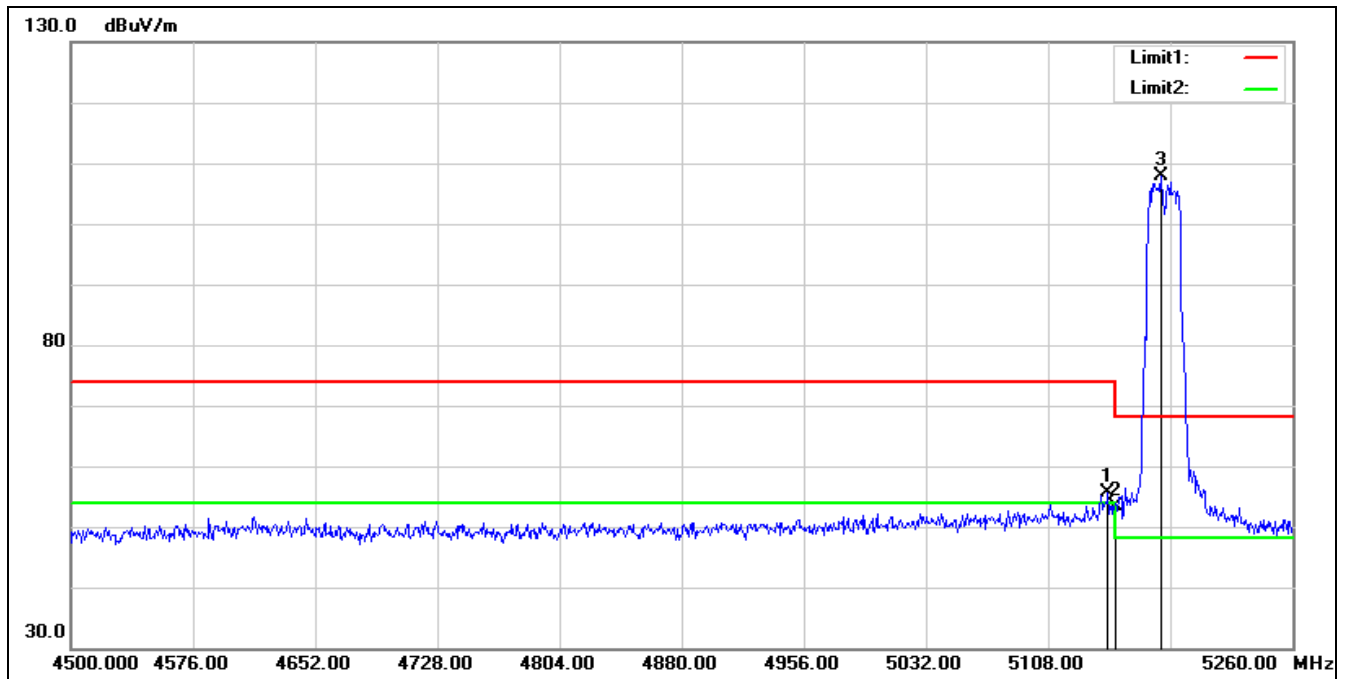


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	54.23	1.38	55.61	74.00	-18.39	peak
2	5150.000	52.07	1.38	53.45	74.00	-20.55	peak
3*	5177.920	106.63	1.25	107.88	68.20	39.68	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5180 MHz

Remark:

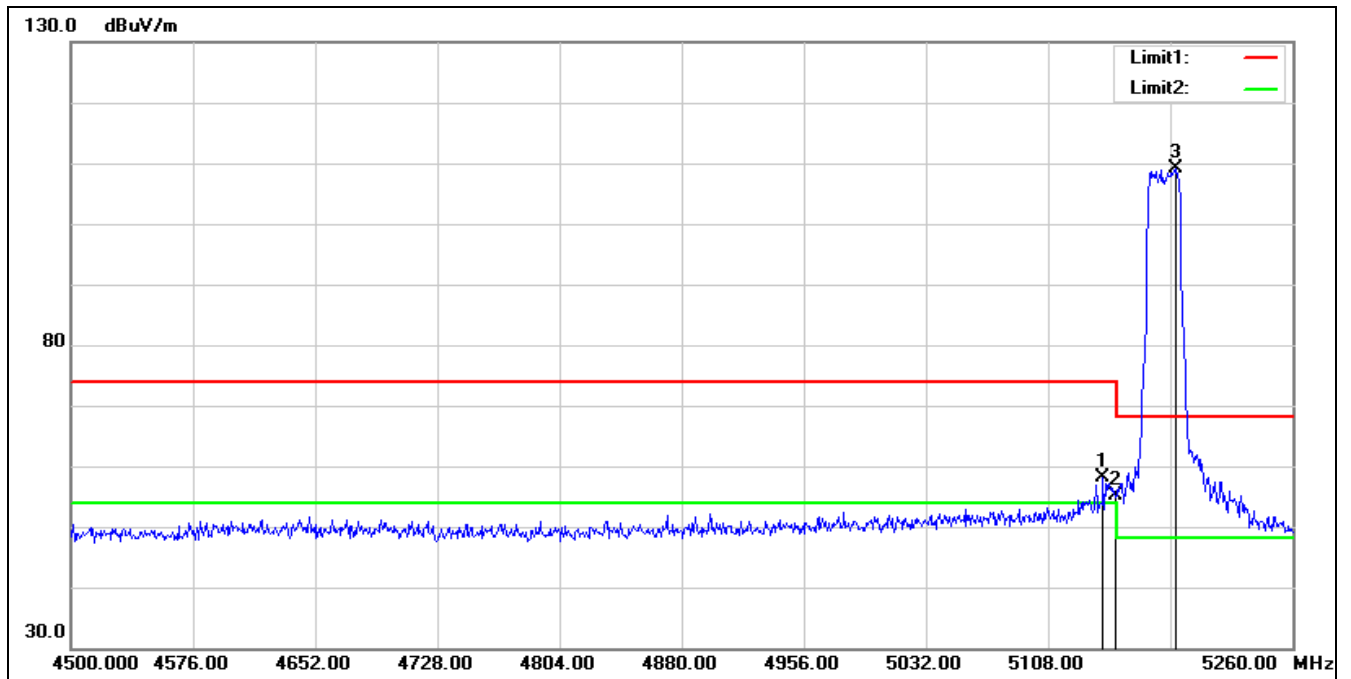

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.200	56.64	1.39	58.03	74.00	-15.97	peak
2	5150.000	53.64	1.38	55.02	74.00	-18.98	peak
3*	5187.040	107.98	1.20	109.18	68.20	40.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5200 MHz		
Remark:			

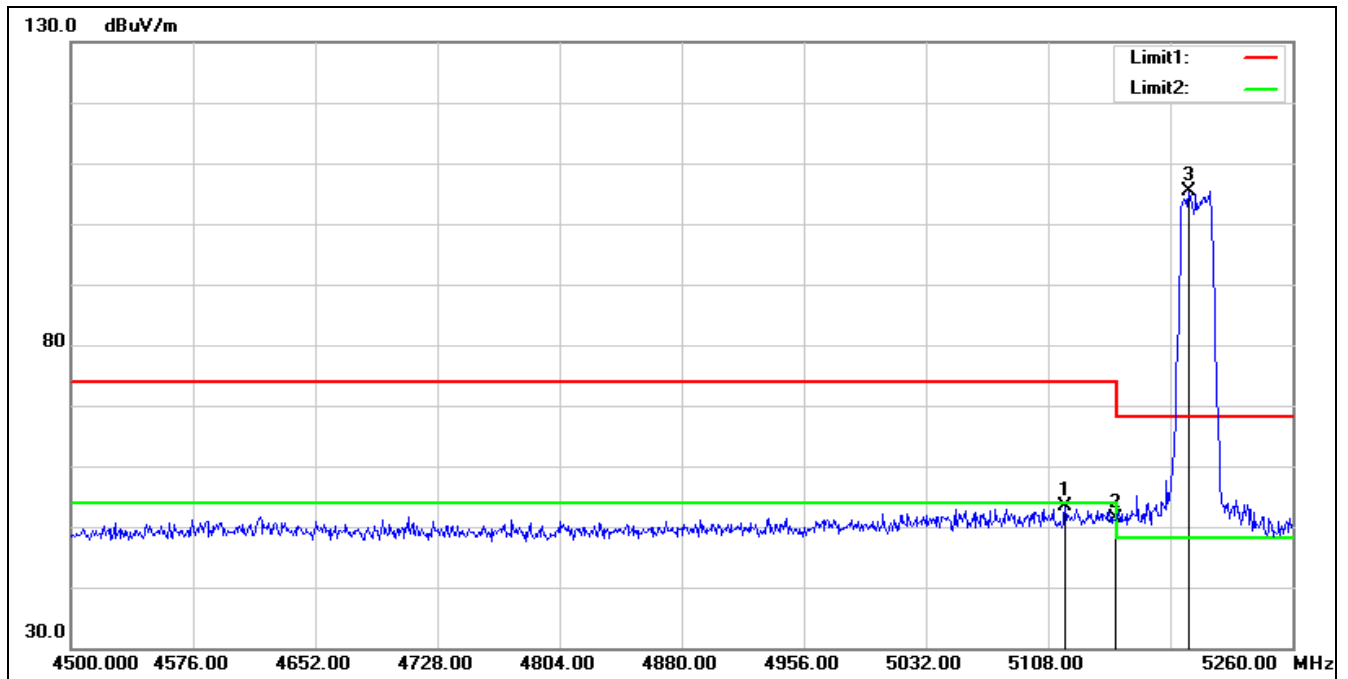


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.640	52.00	1.41	53.41	74.00	-20.59	peak
2	5150.000	50.08	1.38	51.46	74.00	-22.54	peak
3*	5195.400	104.17	1.16	105.33	68.20	37.13	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5200 MHz

Remark:

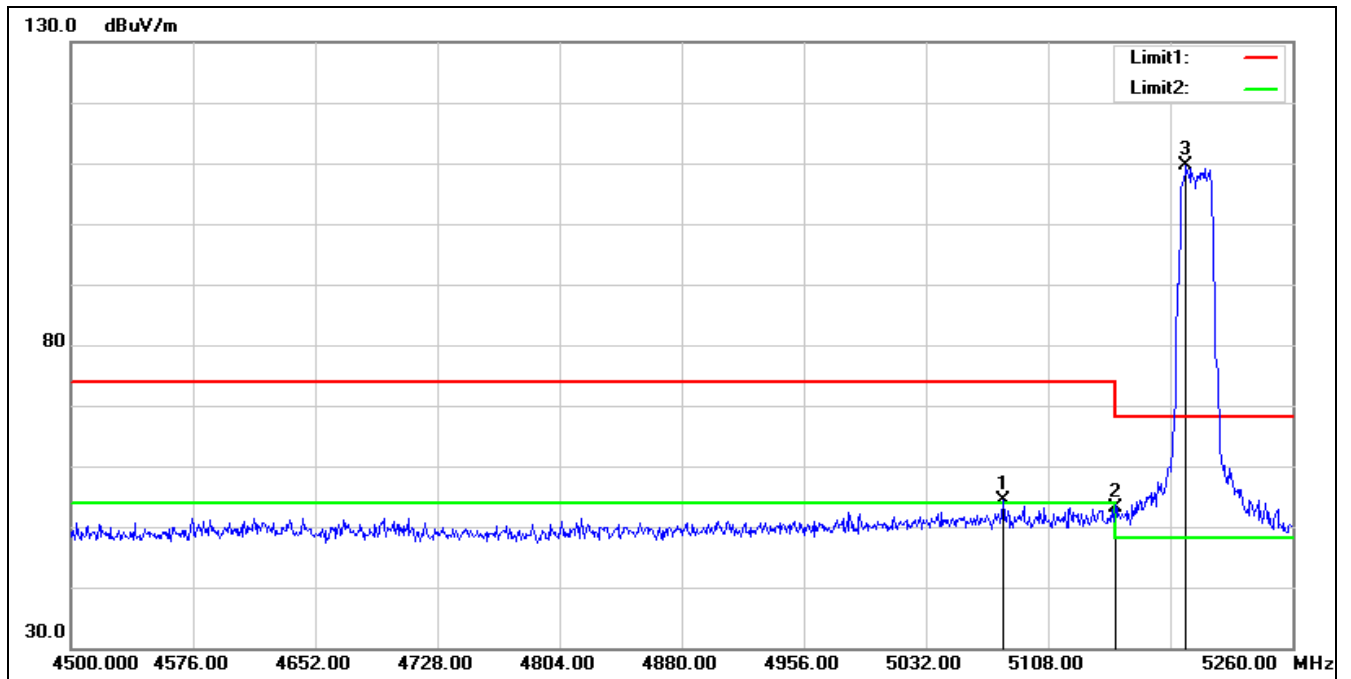


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5079.880	52.95	1.32	54.27	74.00	-19.73	peak
2	5150.000	51.76	1.38	53.14	74.00	-20.86	peak
3*	5193.880	108.35	1.17	109.52	68.20	41.32	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5240 MHz

Remark:

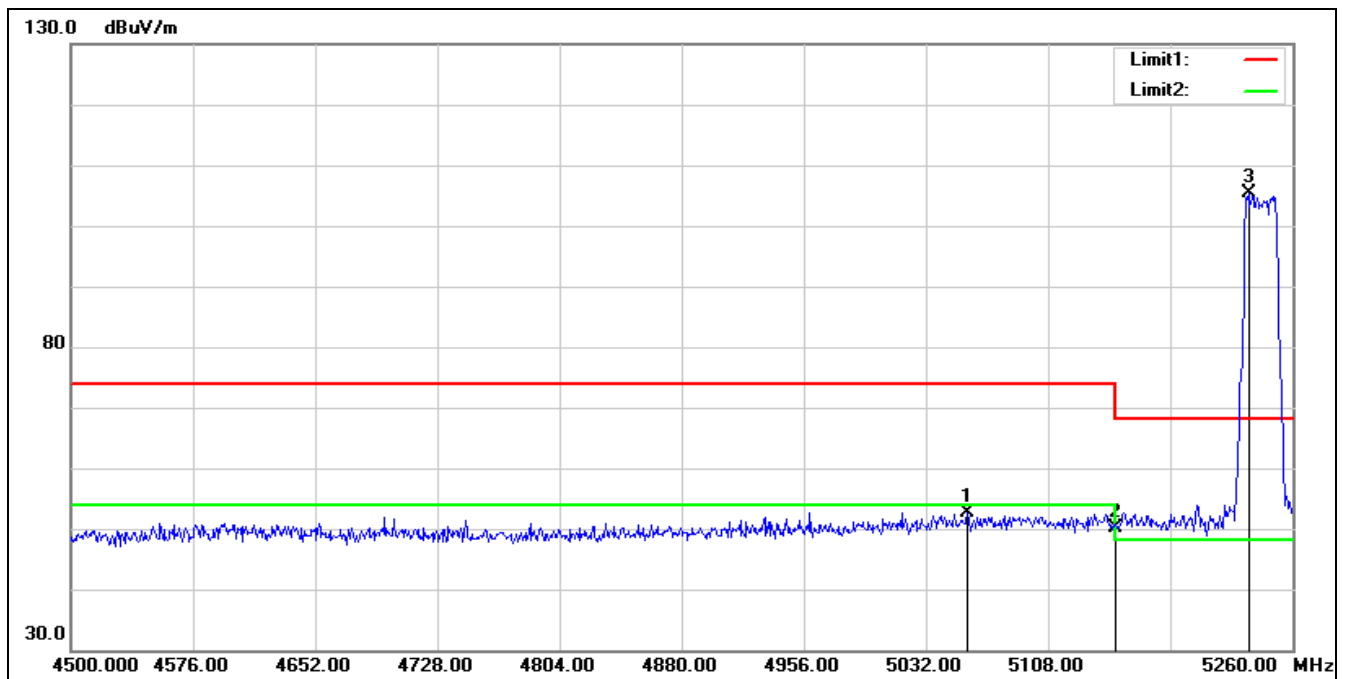


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5057.840	51.38	1.20	52.58	74.00	-21.42	peak
2	5150.000	48.69	1.38	50.07	74.00	-23.93	peak
3*	5232.640	104.57	0.92	105.49	68.20	37.29	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5240 MHz

Remark:

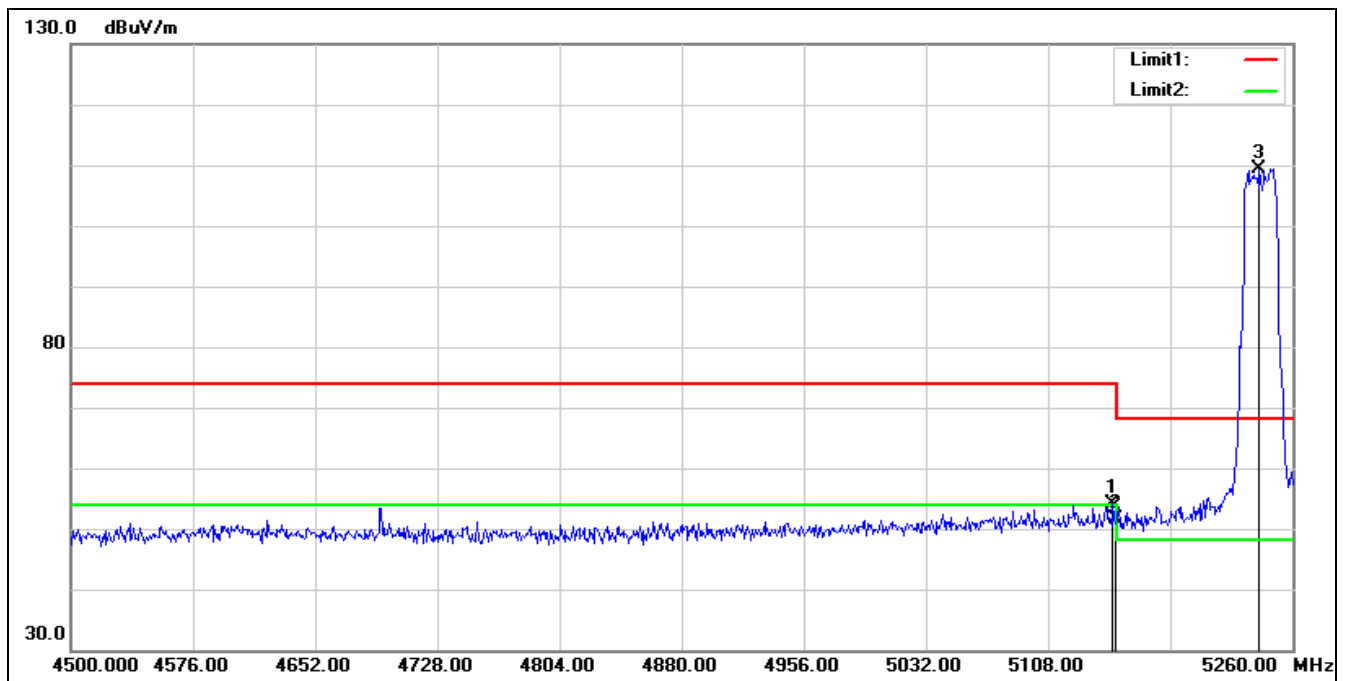


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	52.64	1.38	54.02	74.00	-19.98	peak
2	5150.000	50.21	1.38	51.59	74.00	-22.41	peak
3*	5239.480	108.56	0.86	109.42	68.20	41.22	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5260 MHz

Remark:

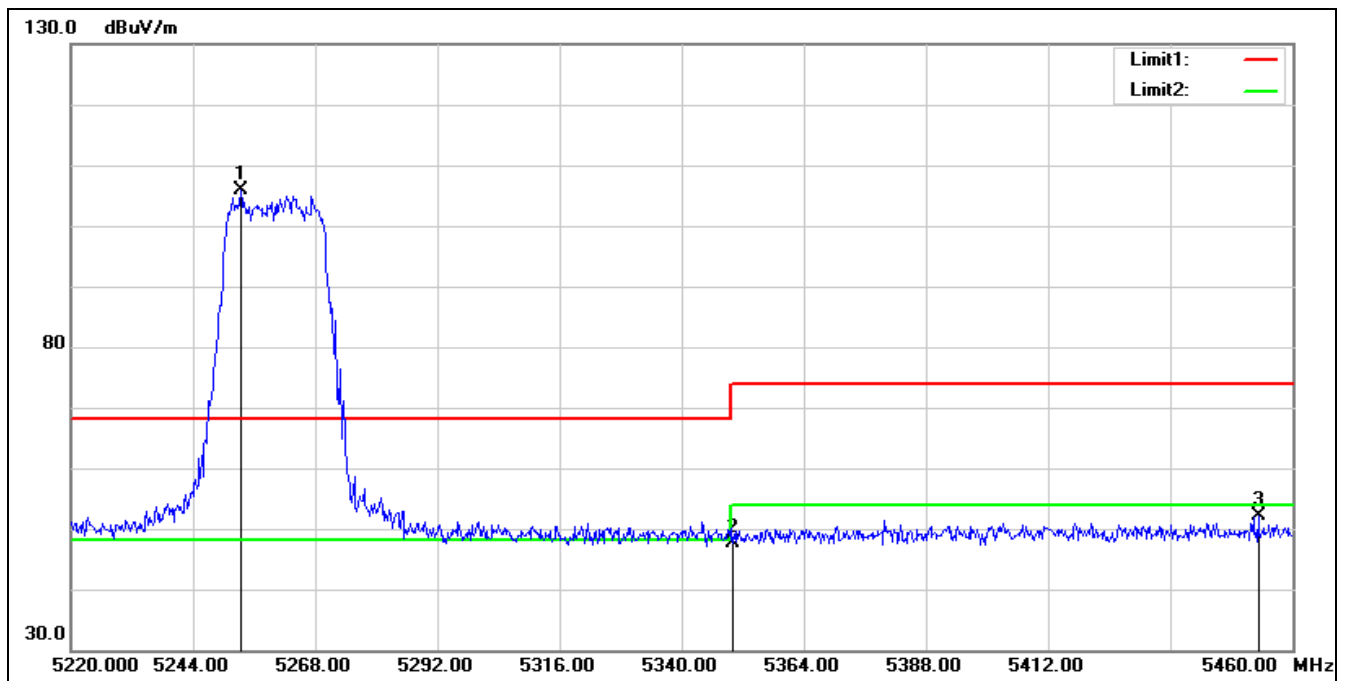


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5253.360	104.99	0.79	105.78	68.20	37.58	peak
2	5350.000	46.72	1.02	47.74	74.00	-26.26	peak
3	5453.280	50.35	1.75	52.10	74.00	-21.90	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5260 MHz

Remark:

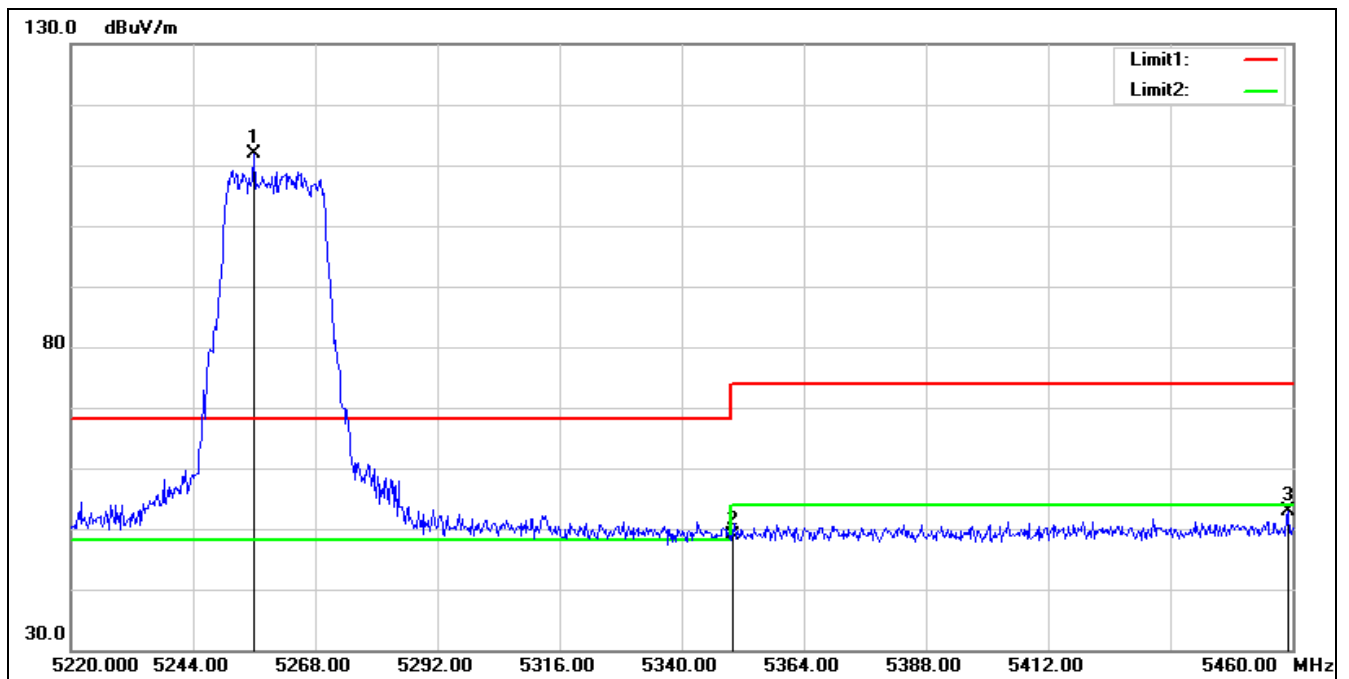


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5256.000	111.01	0.78	111.79	68.20	43.59	peak
2	5350.000	47.86	1.02	48.88	74.00	-25.12	peak
3	5459.040	51.21	1.75	52.96	74.00	-21.04	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5280 MHz

Remark:

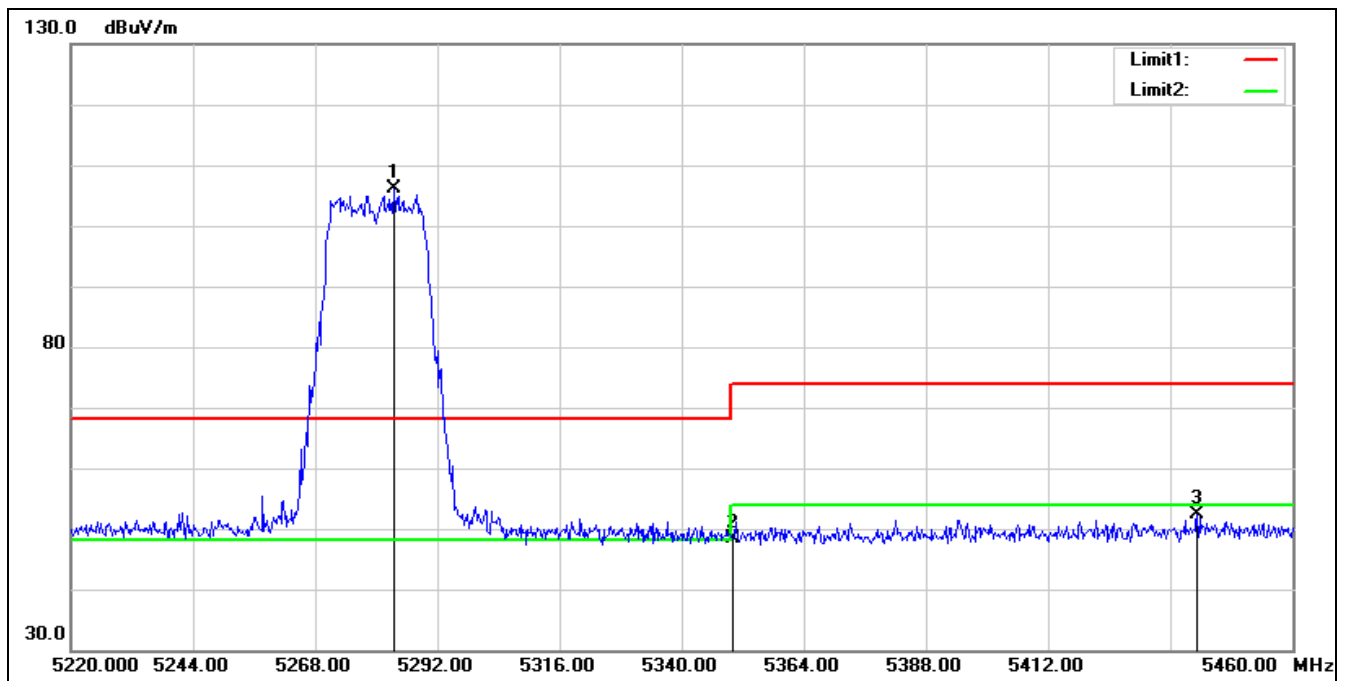


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5283.600	105.53	0.71	106.24	68.20	38.04	peak
2	5350.000	47.47	1.02	48.49	74.00	-25.51	peak
3	5441.280	50.58	1.68	52.26	74.00	-21.74	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5280 MHz

Remark:

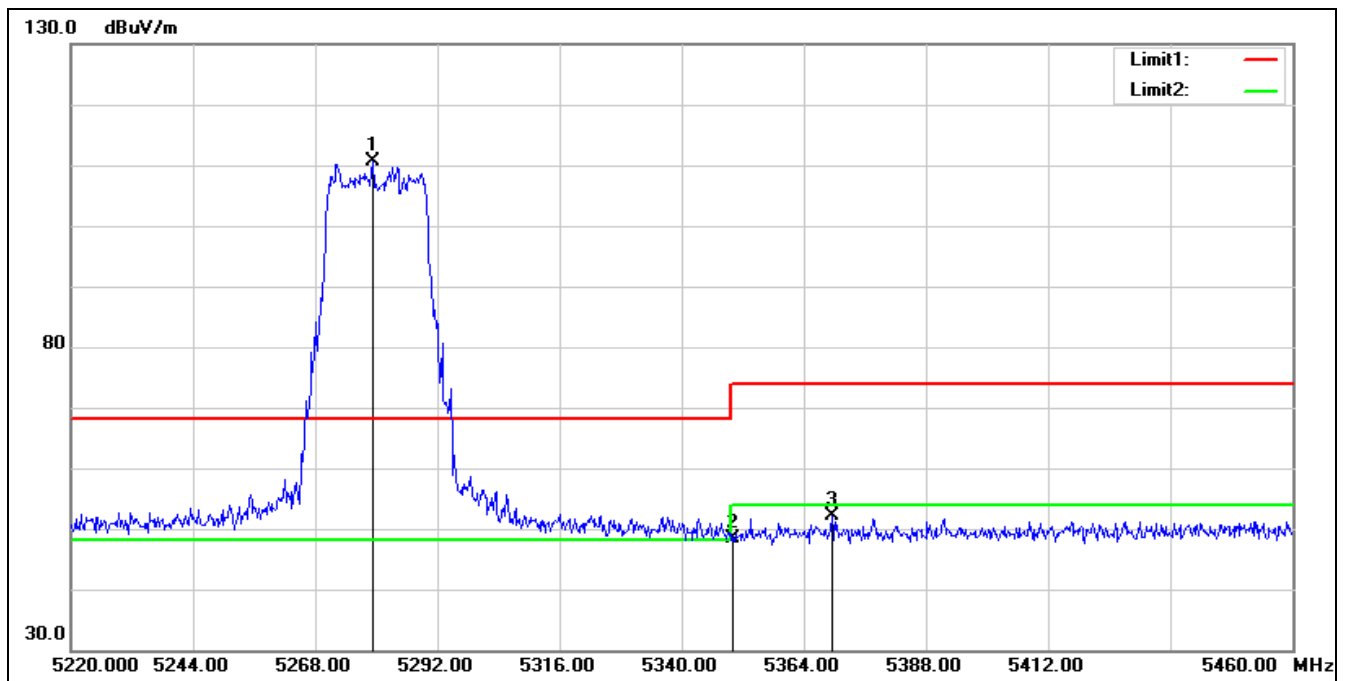

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5279.280	109.89	0.71	110.60	68.20	42.40	peak
2	5350.000	47.43	1.02	48.45	74.00	-25.55	peak
3	5369.520	50.99	1.17	52.16	74.00	-21.84	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5320 MHz
Remark:

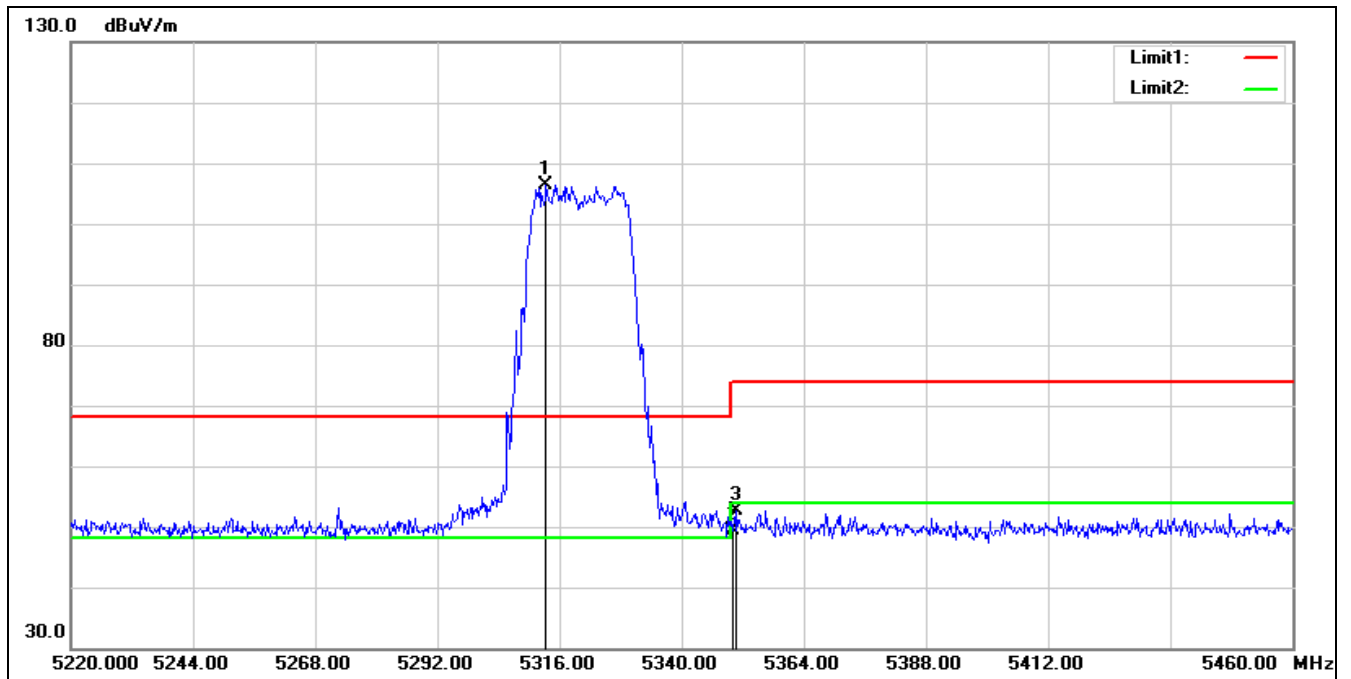


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5313.360	105.62	0.76	106.38	68.20	38.18	peak
2	5350.000	48.40	1.02	49.42	74.00	-24.58	peak
3	5350.800	51.66	1.02	52.68	74.00	-21.32	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5320 MHz

Remark:

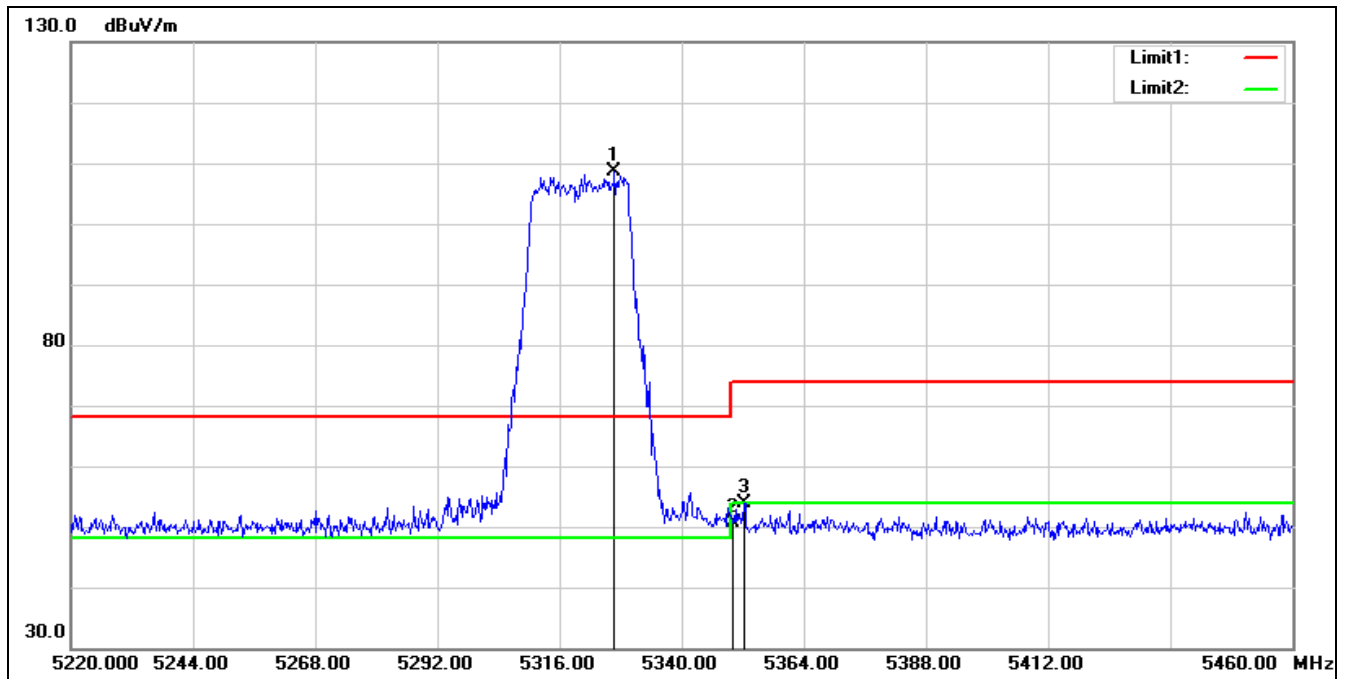


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5326.800	107.72	0.86	108.58	68.20	40.38	peak
2	5350.000	49.62	1.02	50.64	74.00	-23.36	peak
3	5352.240	52.97	1.03	54.00	74.00	-20.00	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5500 MHz

Remark:

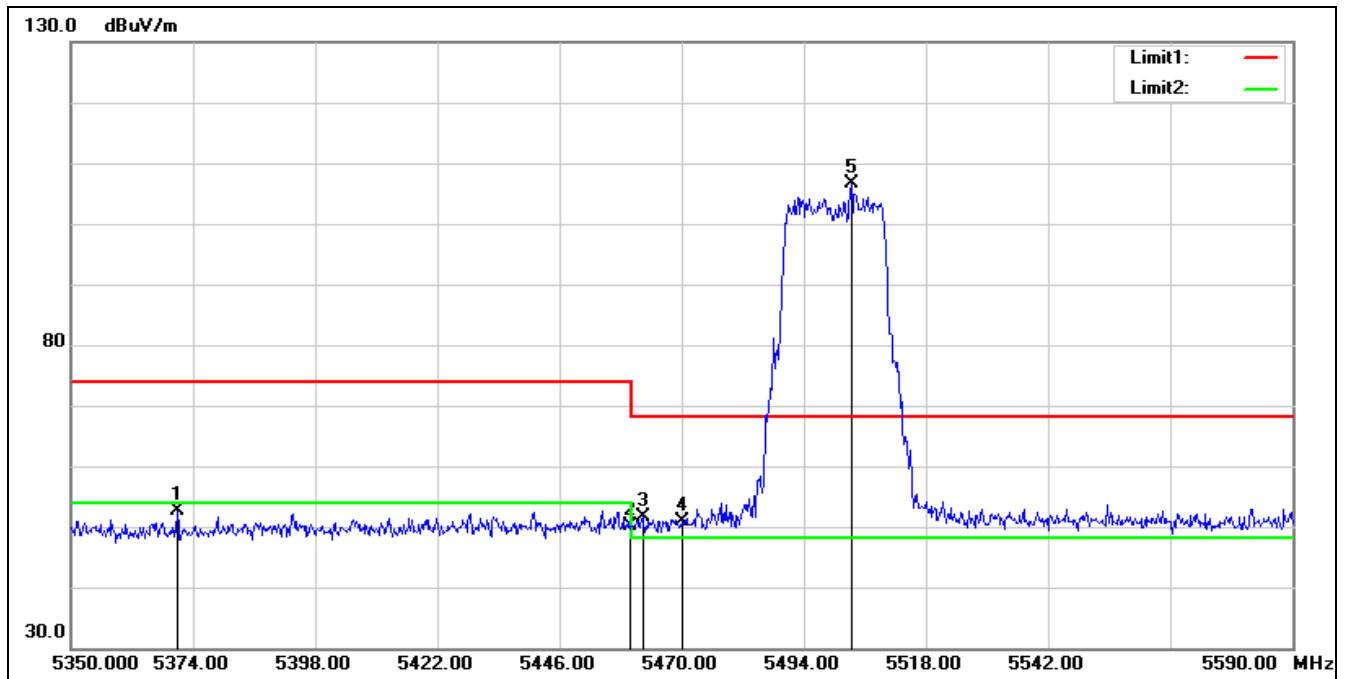


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.880	51.47	1.18	52.65	74.00	-21.35	peak
2	5460.000	48.33	1.75	50.08	74.00	-23.92	peak
3	5462.320	49.76	1.75	51.51	68.20	-16.69	peak
4	5470.000	49.19	1.77	50.96	68.20	-17.24	peak
5*	5503.360	104.79	1.80	106.59	68.20	38.39	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5500 MHz

Remark:

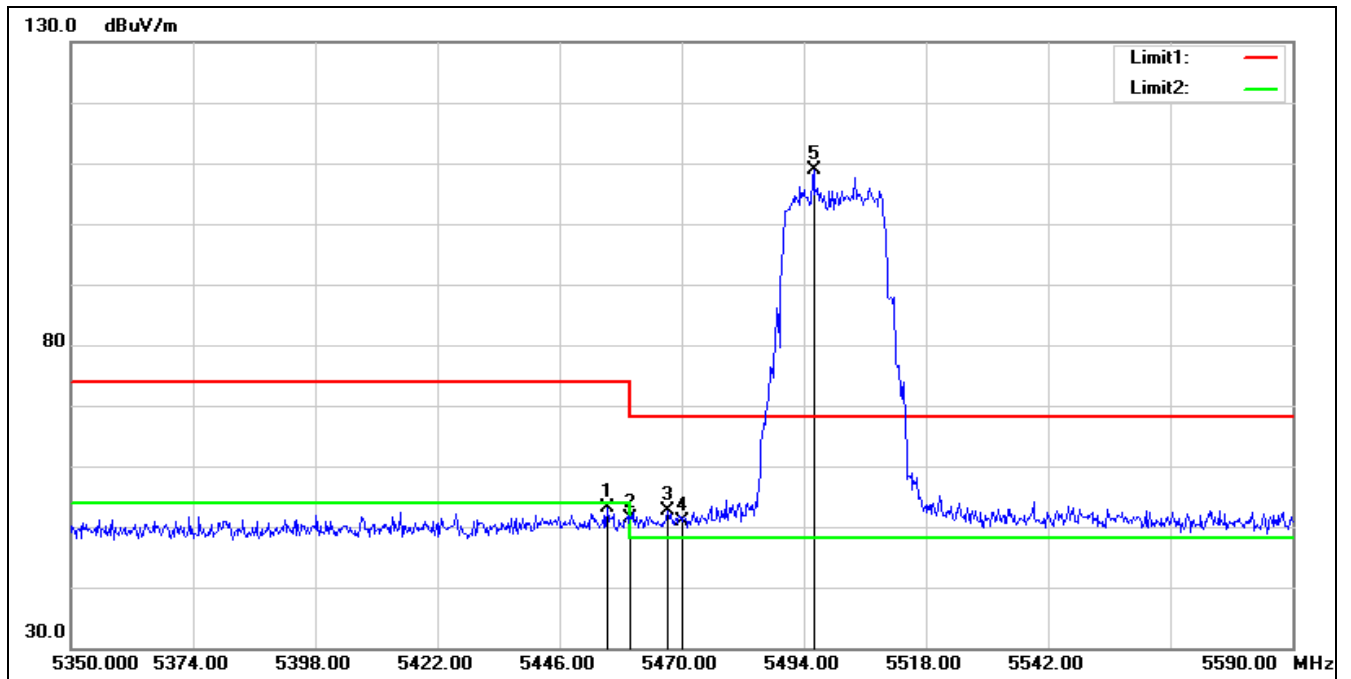


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.360	51.28	1.75	53.03	74.00	-20.97	peak
2	5460.000	49.73	1.75	51.48	74.00	-22.52	peak
3	5467.360	50.93	1.76	52.69	68.20	-15.51	peak
4	5470.000	49.05	1.77	50.82	68.20	-17.38	peak
5*	5495.920	107.14	1.80	108.94	68.20	40.74	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5560 MHz

Remark:

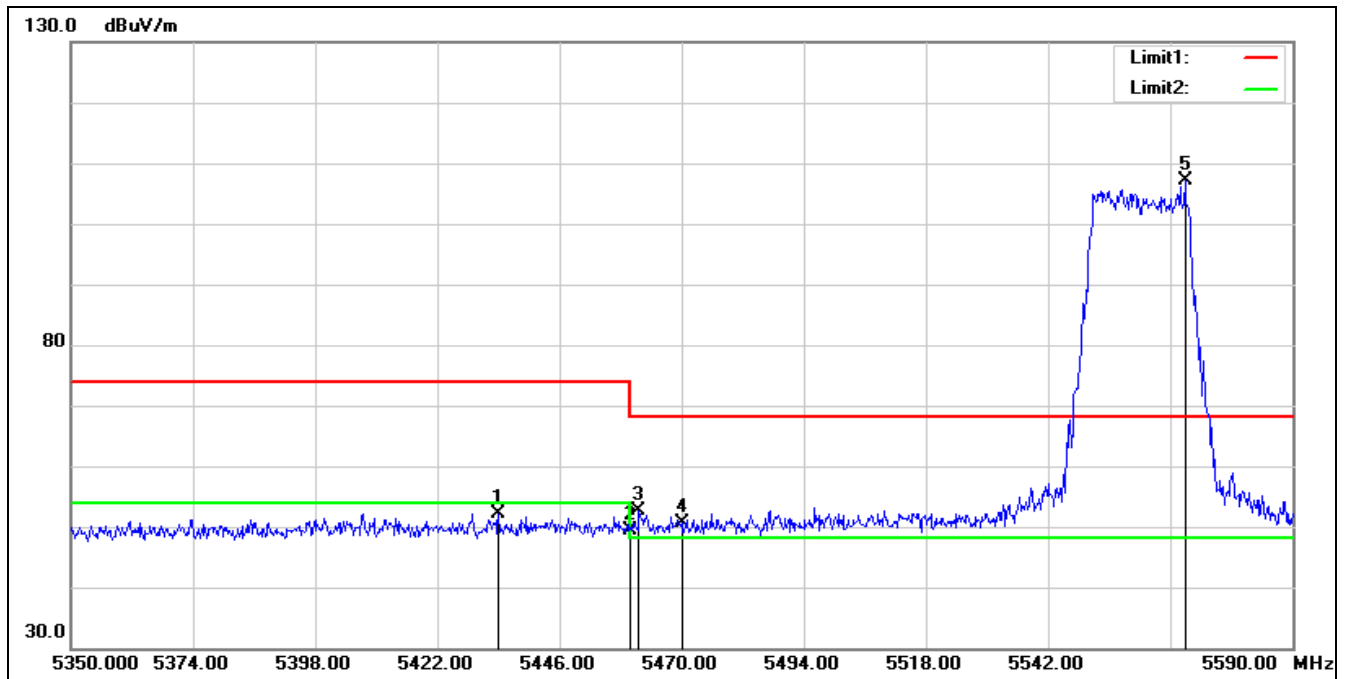


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5434.000	50.55	1.62	52.17	74.00	-21.83	peak
2	5460.000	47.61	1.75	49.36	74.00	-24.64	peak
3	5461.600	50.76	1.75	52.51	68.20	-15.69	peak
4	5470.000	48.81	1.77	50.58	68.20	-17.62	peak
5*	5568.880	105.50	1.74	107.24	68.20	39.04	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5560 MHz
Remark:

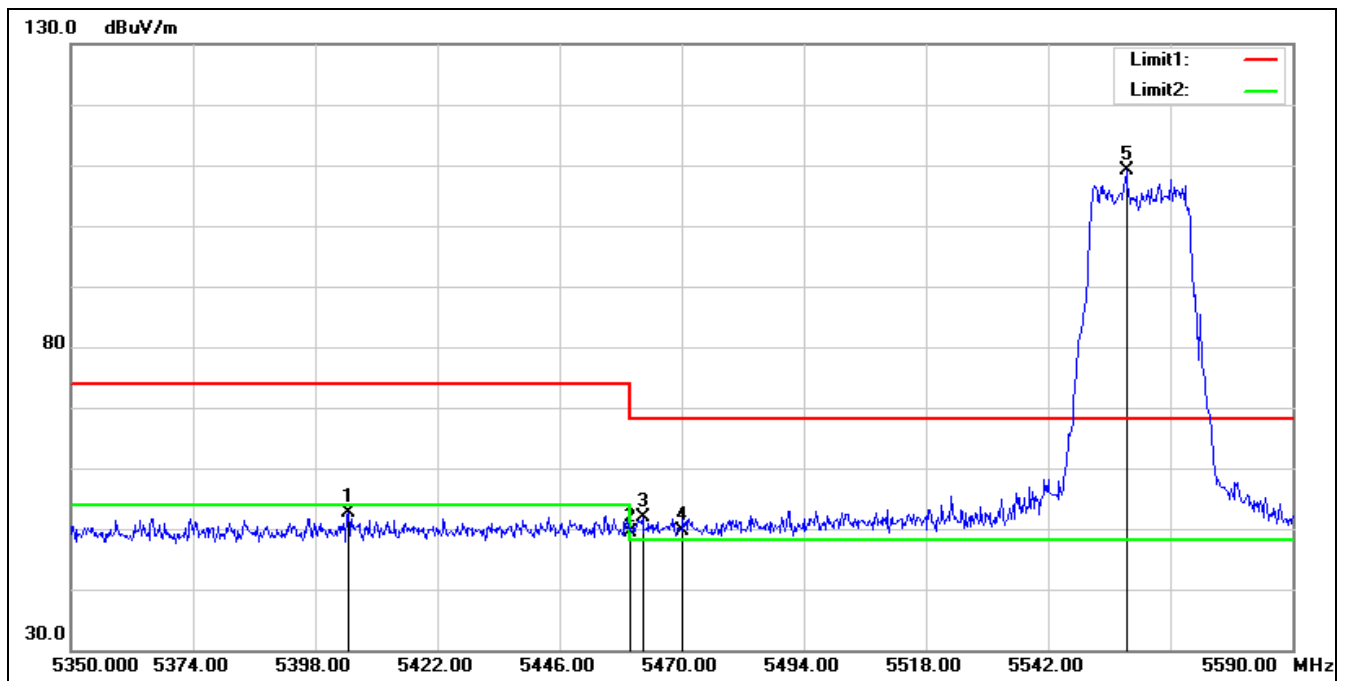

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5404.480	51.28	1.41	52.69	74.00	-21.31	peak
2	5460.000	47.68	1.75	49.43	74.00	-24.57	peak
3	5462.320	50.20	1.75	51.95	68.20	-16.25	peak
4	5470.000	47.97	1.77	49.74	68.20	-18.46	peak
5*	5557.360	107.26	1.77	109.03	68.20	40.83	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5700 MHz
Remark:

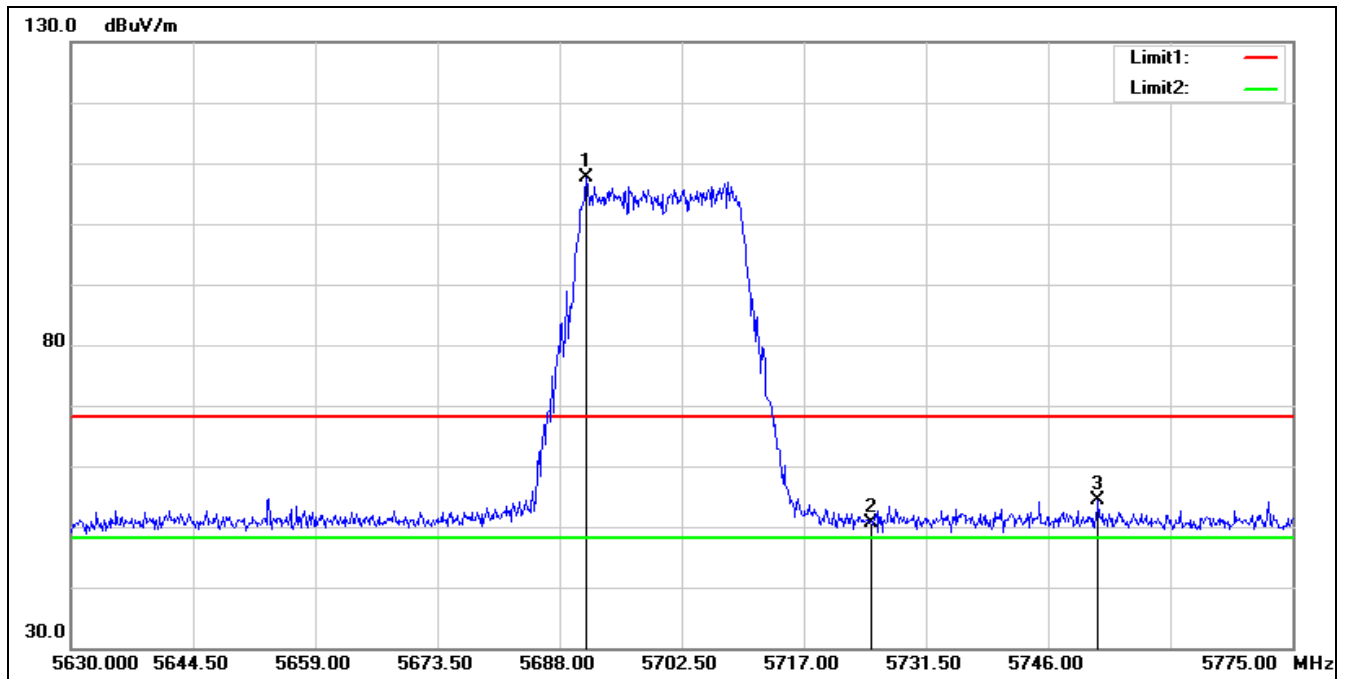


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5691.190	106.07	1.54	107.61	68.20	39.41	peak
2	5725.000	48.95	1.78	50.73	68.20	-17.47	peak
3	5751.945	52.33	2.03	54.36	68.20	-13.84	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5700 MHz

Remark:

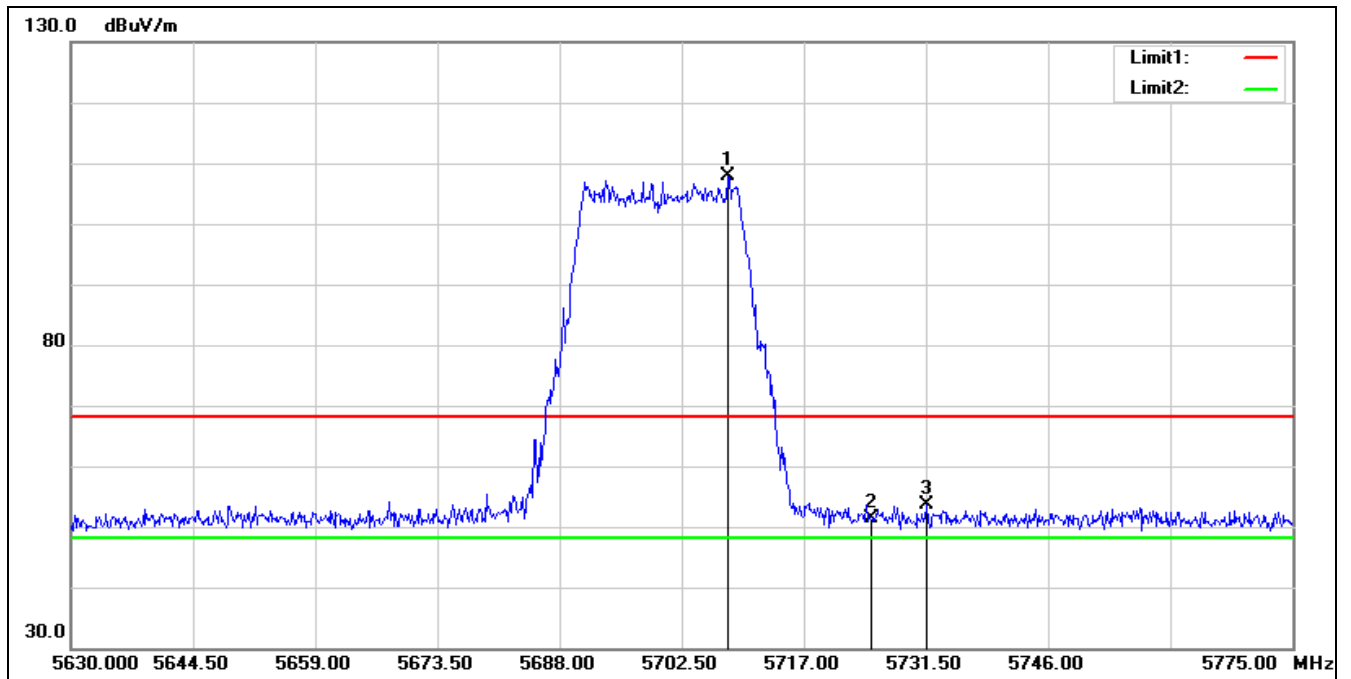

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5708.010	106.15	1.62	107.77	68.20	39.57	peak
2	5725.000	49.52	1.78	51.30	68.20	-16.90	peak
3	5731.645	51.67	1.85	53.52	68.20	-14.68	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

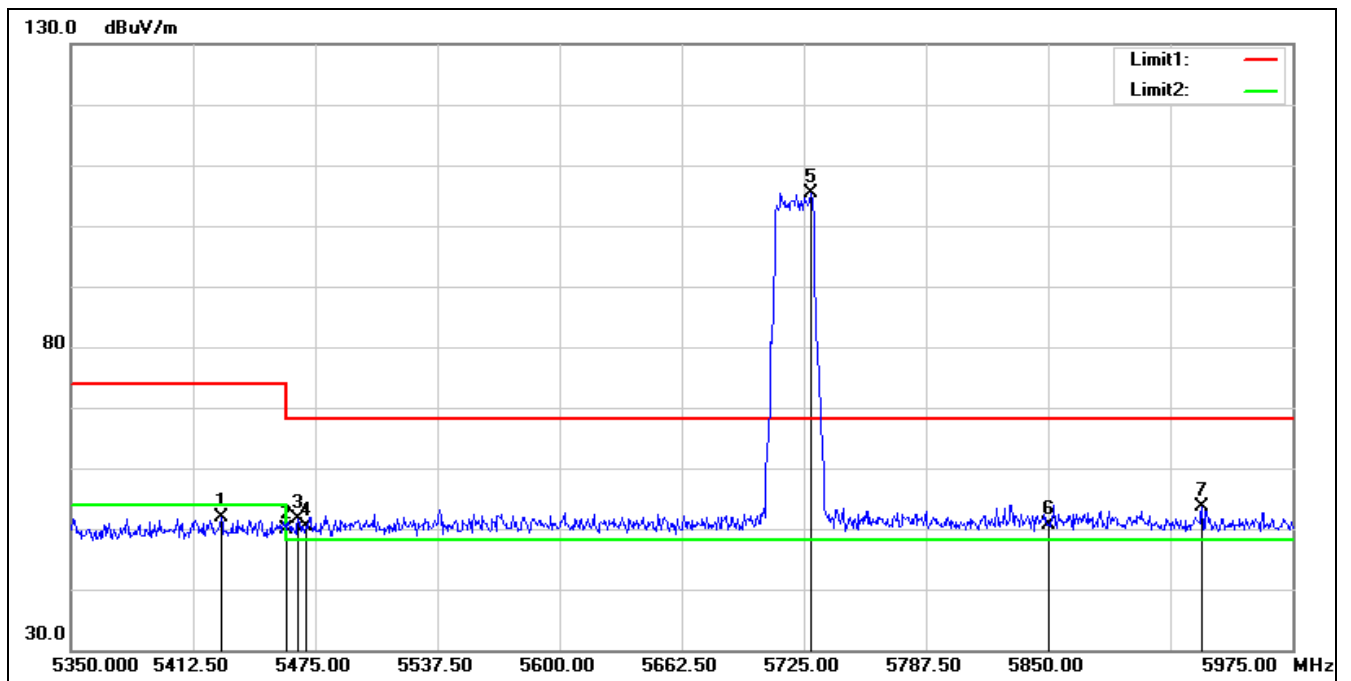

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.875	50.30	1.57	51.87	74.00	-22.13	peak
2	5460.000	48.11	1.75	49.86	74.00	-24.14	peak
3	5466.250	49.88	1.76	51.64	68.20	-16.56	peak
4	5470.000	48.55	1.77	50.32	68.20	-17.88	peak
5*	5728.750	103.45	1.82	105.27	68.20	37.07	peak
6	5850.000	48.37	2.29	50.66	68.20	-17.54	peak
7	5928.750	51.34	2.20	53.54	68.20	-14.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

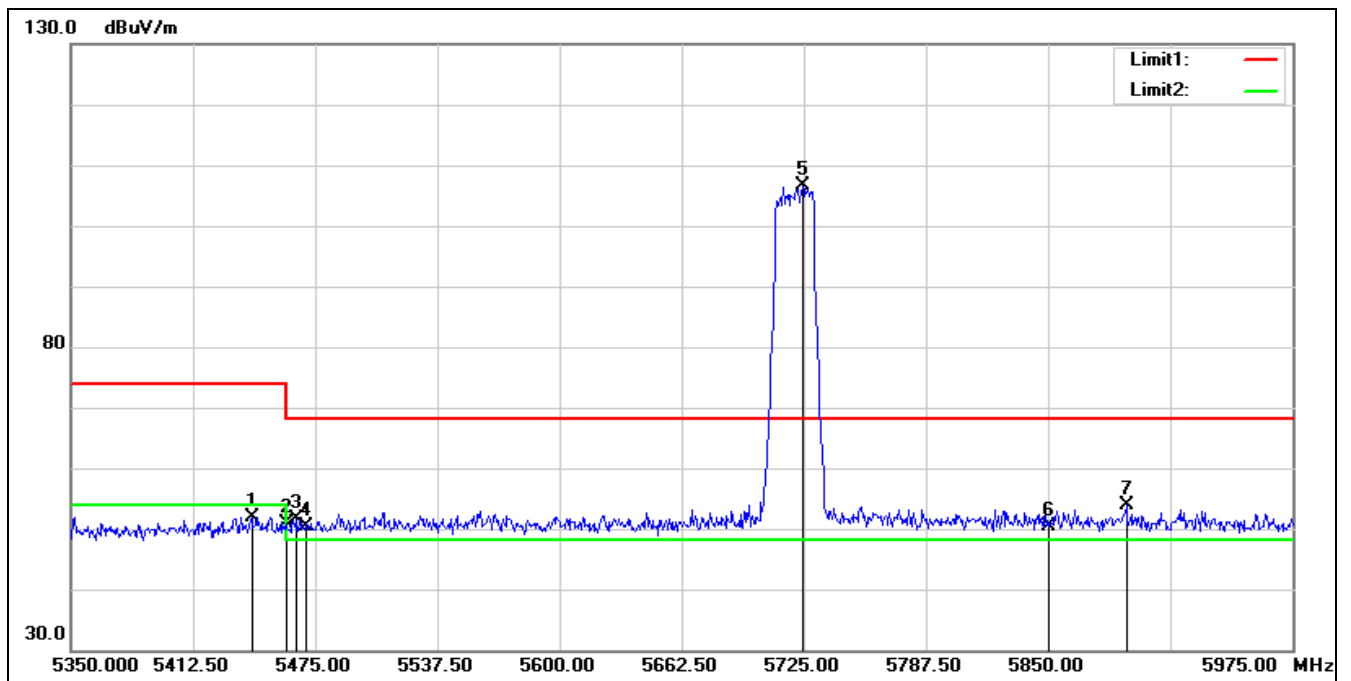

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5442.500	50.29	1.68	51.97	74.00	-22.03	peak
2	5460.000	49.09	1.75	50.84	74.00	-23.16	peak
3	5465.000	49.78	1.75	51.53	68.20	-16.67	peak
4	5470.000	48.51	1.77	50.28	68.20	-17.92	peak
5*	5724.375	104.91	1.77	106.68	68.20	38.48	peak
6	5850.000	48.20	2.29	50.49	68.20	-17.71	peak
7	5890.000	51.42	2.36	53.78	68.20	-14.42	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5745 MHz

Remark:

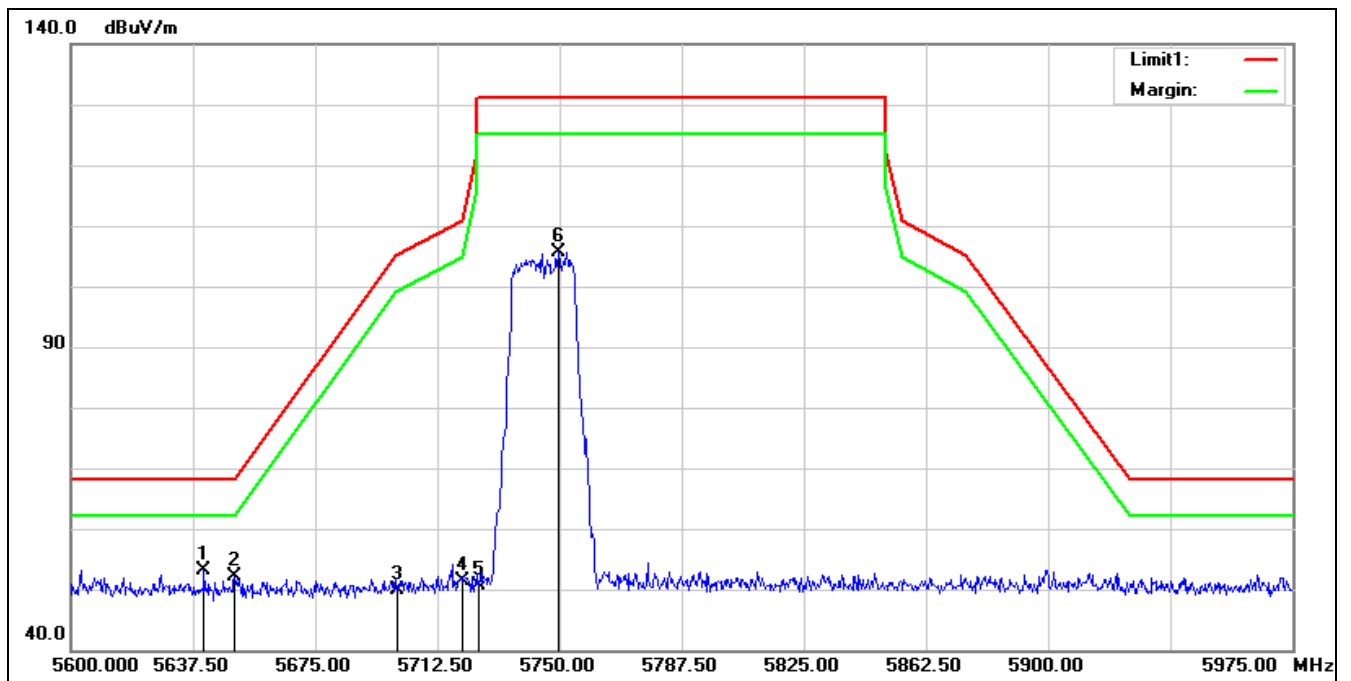


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5640.875	51.66	1.58	53.24	68.20	-14.96	peak
2	5650.000	50.52	1.56	52.08	68.20	-16.12	peak
3	5700.000	48.33	1.54	49.87	105.20	-55.33	peak
4	5720.000	49.73	1.74	51.47	110.80	-59.33	peak
5	5725.000	48.97	1.78	50.75	122.20	-71.45	peak
6	5749.625	103.67	2.03	105.70	131.20	-25.50	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5745 MHz

Remark:

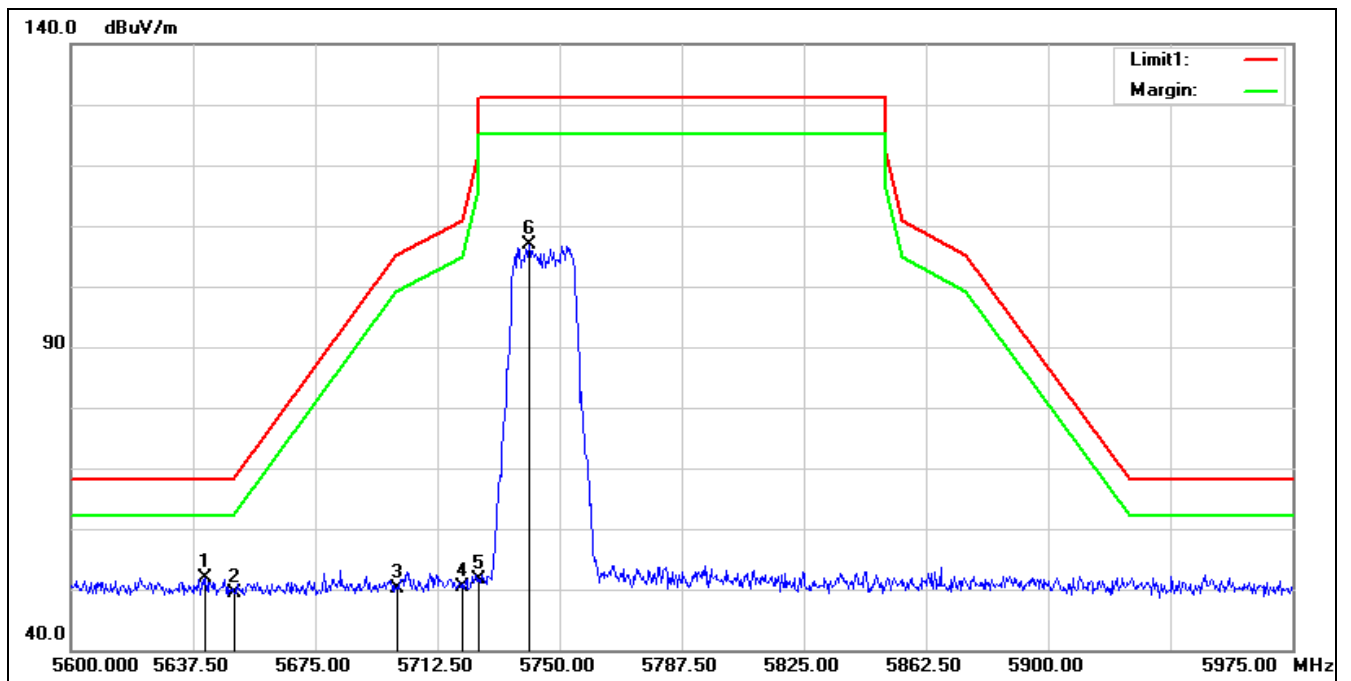

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5641.250	50.31	1.58	51.89	68.20	-16.31	peak
2	5650.000	47.76	1.56	49.32	68.20	-18.88	peak
3	5700.000	48.49	1.54	50.03	105.20	-55.17	peak
4	5720.000	48.75	1.74	50.49	110.80	-60.31	peak
5	5725.000	49.90	1.78	51.68	122.20	-70.52	peak
6	5740.625	104.90	1.93	106.83	131.20	-24.37	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

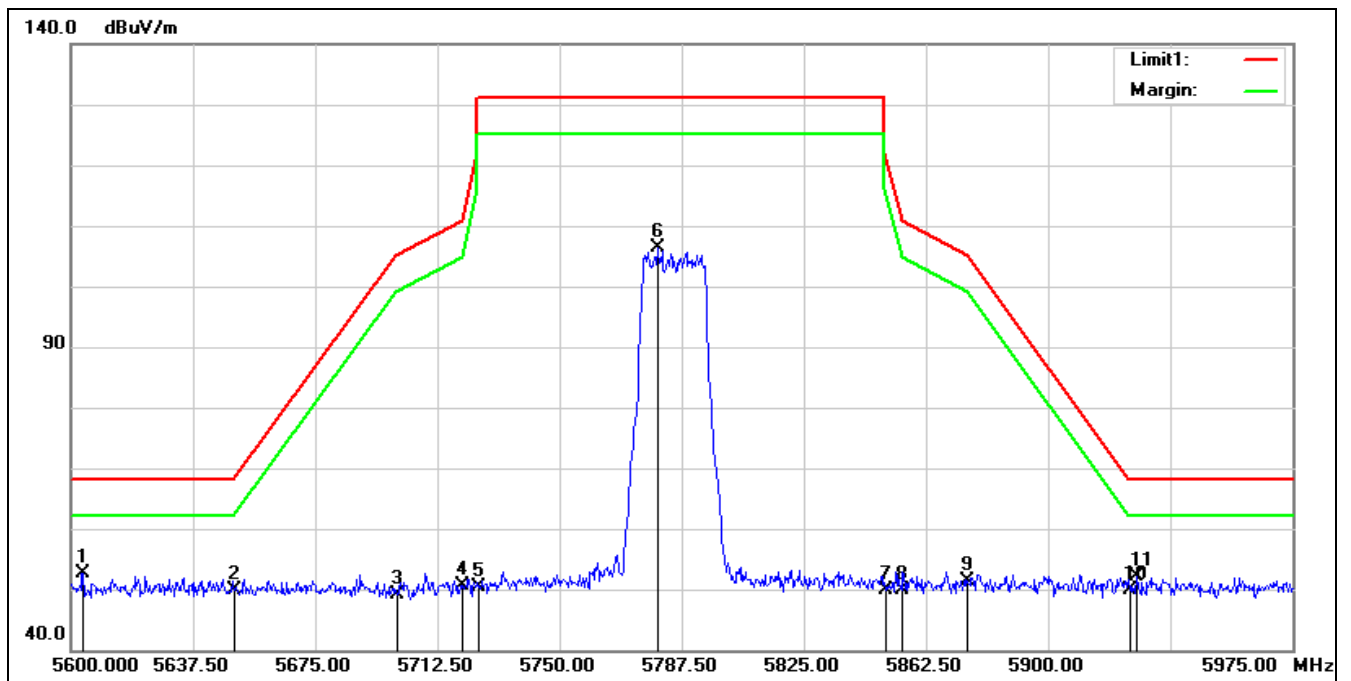

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5603.750	51.01	1.65	52.66	68.20	-15.54	peak
2	5650.000	48.38	1.56	49.94	68.20	-18.26	peak
3	5700.000	47.63	1.54	49.17	105.20	-56.03	peak
4	5720.000	48.92	1.74	50.66	110.80	-60.14	peak
5	5725.000	48.64	1.78	50.42	122.20	-71.78	peak
6	5780.000	104.21	2.13	106.34	131.20	-24.86	peak
7	5850.000	47.65	2.29	49.94	122.20	-72.26	peak
8	5855.000	47.50	2.31	49.81	110.80	-60.99	peak
9	5875.000	48.96	2.34	51.30	105.20	-53.90	peak
10	5925.000	47.57	2.23	49.80	68.20	-18.40	peak
11	5927.375	50.01	2.21	52.22	68.20	-15.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

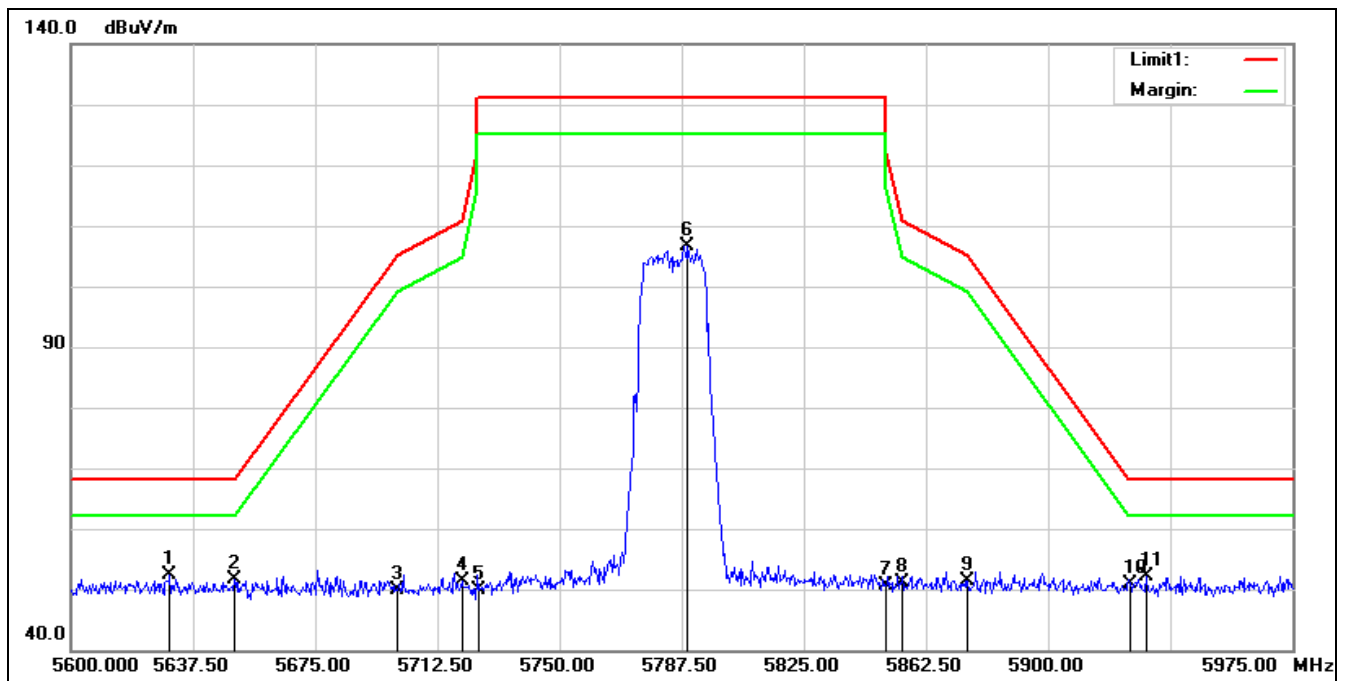

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5630.375	50.69	1.60	52.29	68.20	-15.91	peak
2	5650.000	50.19	1.56	51.75	68.20	-16.45	peak
3	5700.000	48.45	1.54	49.99	105.20	-55.21	peak
4	5720.000	49.65	1.74	51.39	110.80	-59.41	peak
5	5725.000	48.12	1.78	49.90	122.20	-72.30	peak
6	5789.375	104.40	2.17	106.57	131.20	-24.63	peak
7	5850.000	48.26	2.29	50.55	122.20	-71.65	peak
8	5855.000	48.76	2.31	51.07	110.80	-59.73	peak
9	5875.000	48.96	2.34	51.30	105.20	-53.90	peak
10	5925.000	48.61	2.23	50.84	68.20	-17.36	peak
11	5930.000	50.01	2.19	52.20	68.20	-16.00	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5825 MHz

Remark:

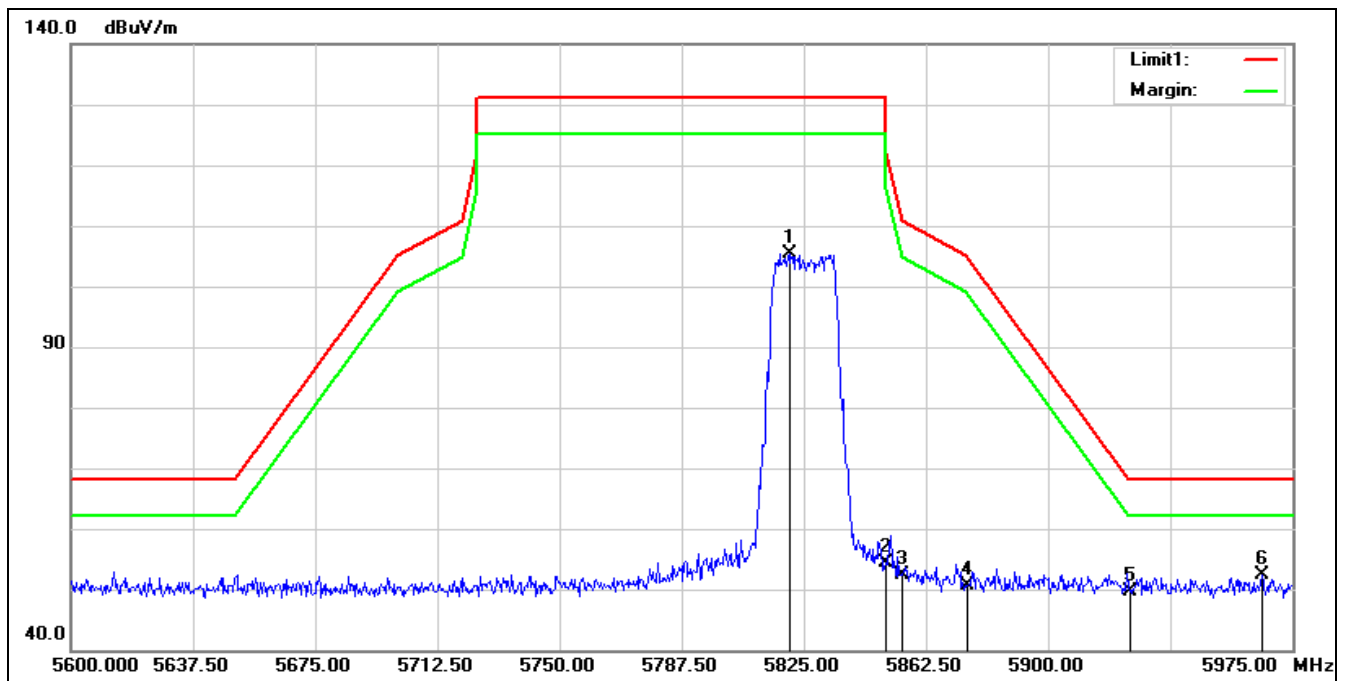


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5820.500	103.18	2.24	105.42	131.20	-25.78	peak
2	5850.000	52.01	2.29	54.30	122.20	-67.90	peak
3	5855.000	50.04	2.31	52.35	110.80	-58.45	peak
4	5875.000	48.32	2.34	50.66	105.20	-54.54	peak
5	5925.000	47.44	2.23	49.67	68.20	-18.53	peak
6*	5965.625	50.34	2.10	52.44	68.20	-15.76	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5825 MHz

Remark:

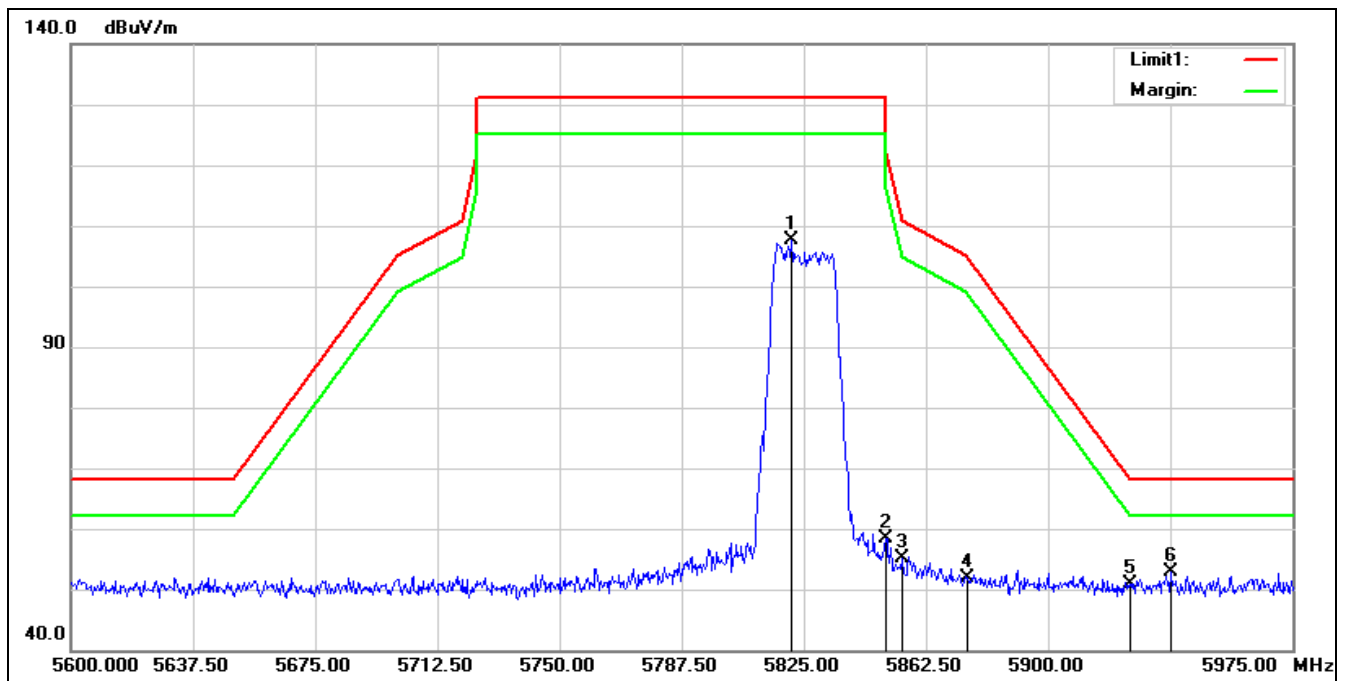


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5821.250	105.46	2.24	107.70	131.20	-23.50	peak
2	5850.000	56.03	2.29	58.32	122.20	-63.88	peak
3	5855.000	52.79	2.31	55.10	110.80	-55.70	peak
4	5875.000	49.48	2.34	51.82	105.20	-53.38	peak
5	5925.000	48.55	2.23	50.78	68.20	-17.42	peak
6*	5937.500	50.76	2.14	52.90	68.20	-15.30	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT40 5190 MHz

Remark:

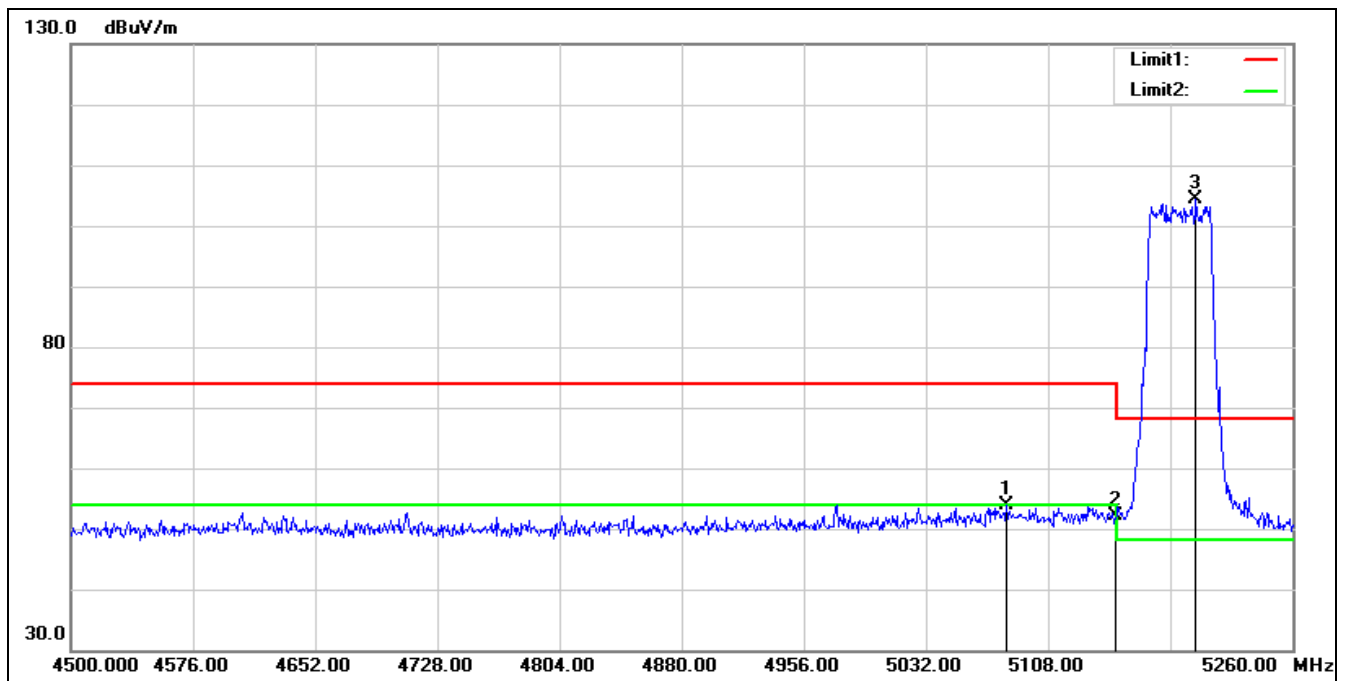

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.160	52.59	1.33	53.92	74.00	-20.08	peak
2	5150.000	50.69	1.38	52.07	74.00	-21.93	peak
3*	5199.960	103.18	1.14	104.32	68.20	36.12	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5190 MHz
Remark:

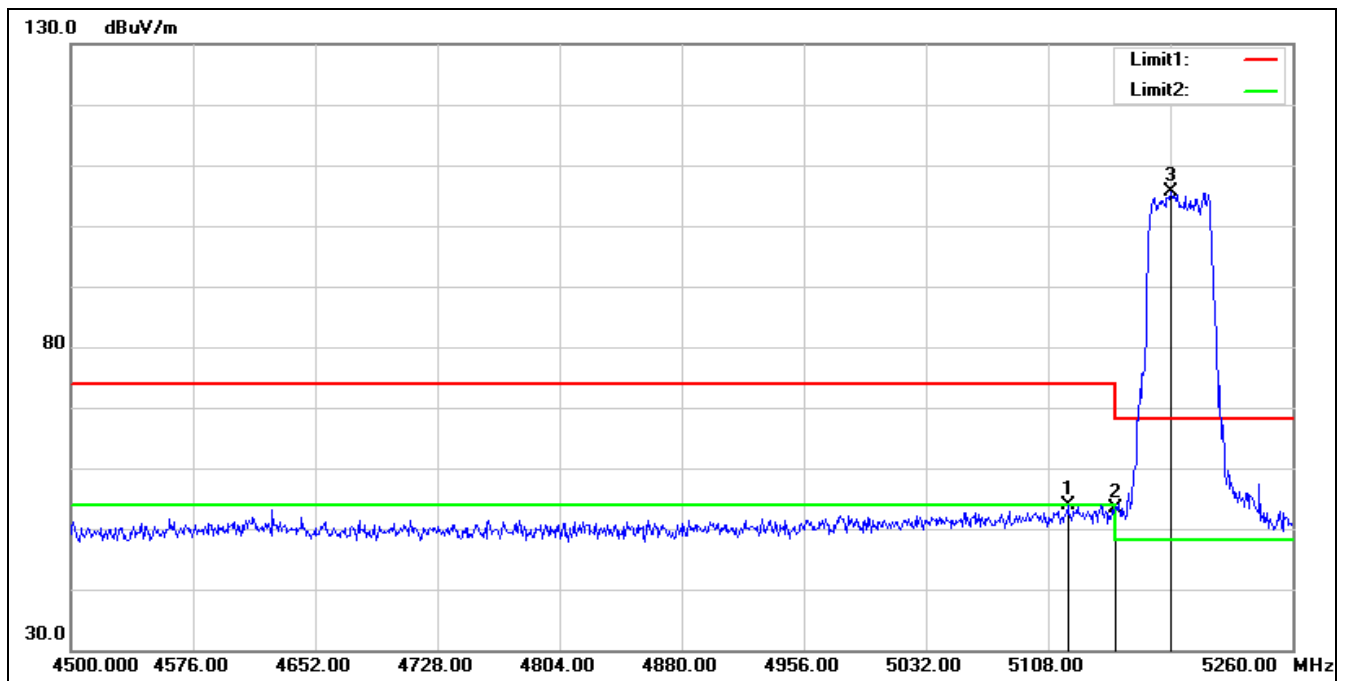


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.160	52.55	1.41	53.96	74.00	-20.04	peak
2	5150.000	51.91	1.38	53.29	74.00	-20.71	peak
3*	5184.760	104.33	1.21	105.54	68.20	37.34	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT40 5230 MHz

Remark:

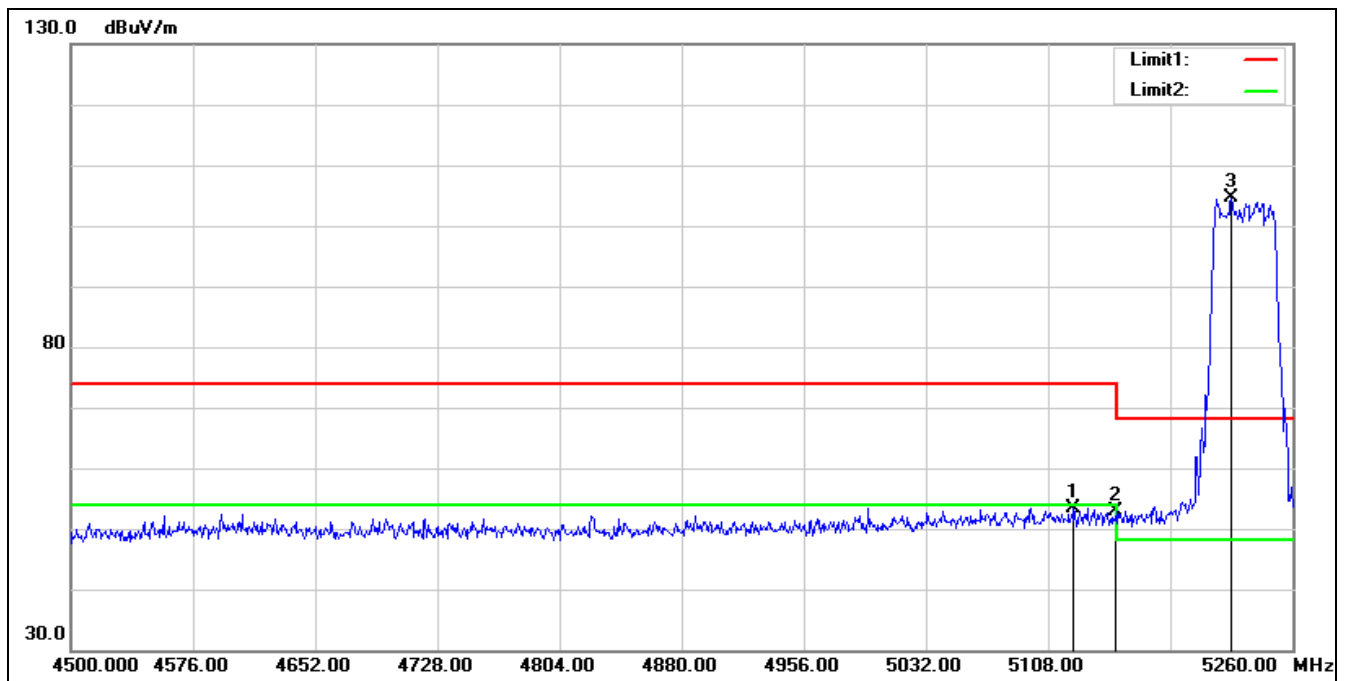

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5123.960	52.10	1.40	53.50	74.00	-20.50	peak
2	5150.000	51.50	1.38	52.88	74.00	-21.12	peak
3*	5222.000	103.74	0.99	104.73	68.20	36.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5230 MHz		
Remark:			

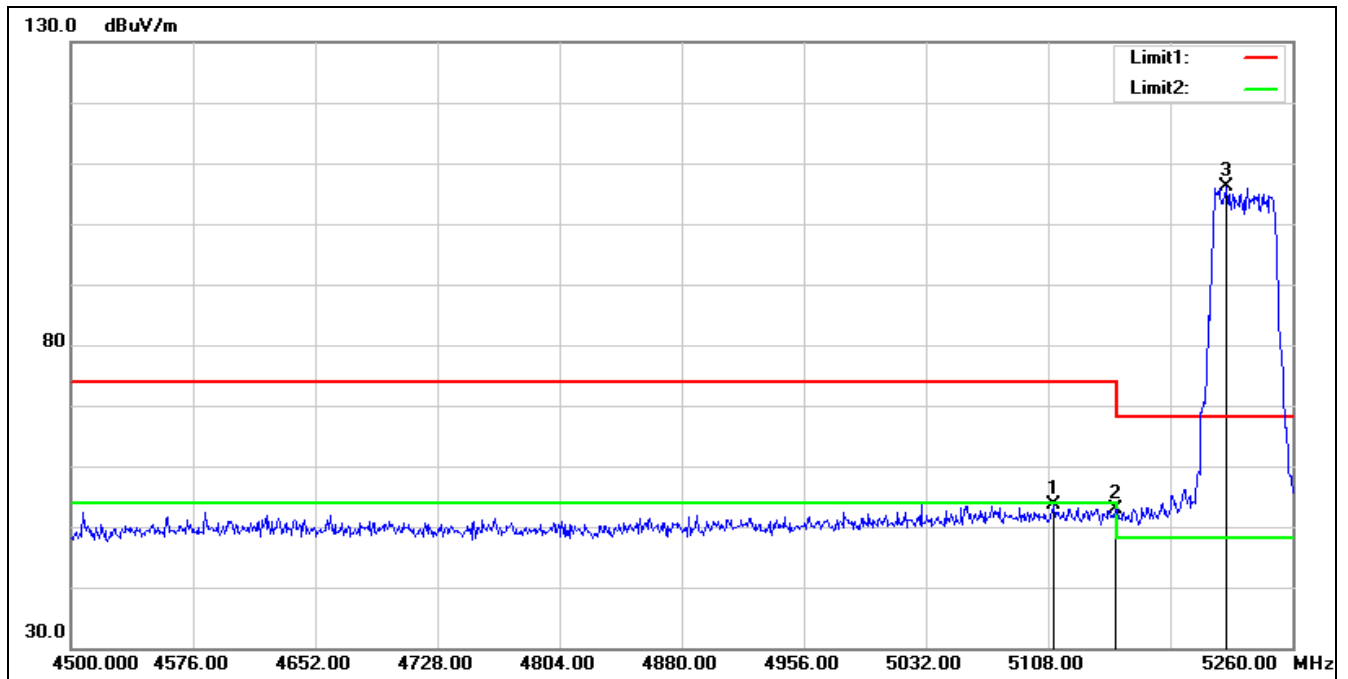


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5111.800	52.26	1.41	53.67	74.00	-20.33	peak
2	5150.000	51.57	1.38	52.95	74.00	-21.05	peak
3*	5218.960	105.22	1.02	106.24	68.20	38.04	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5270 MHz

Remark:

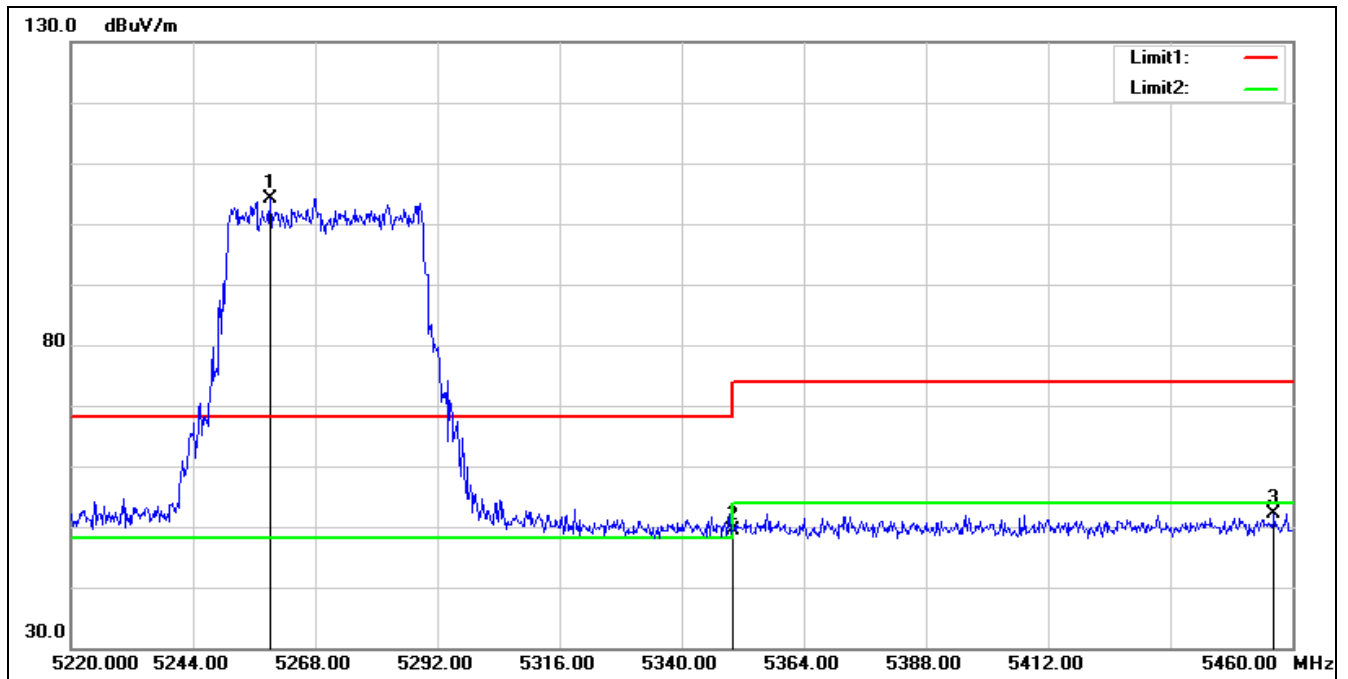


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5259.120	103.44	0.77	104.21	68.20	36.01	peak
2	5350.000	48.35	1.02	49.37	74.00	-24.63	peak
3	5456.400	50.30	1.75	52.05	74.00	-21.95	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5270 MHz

Remark:

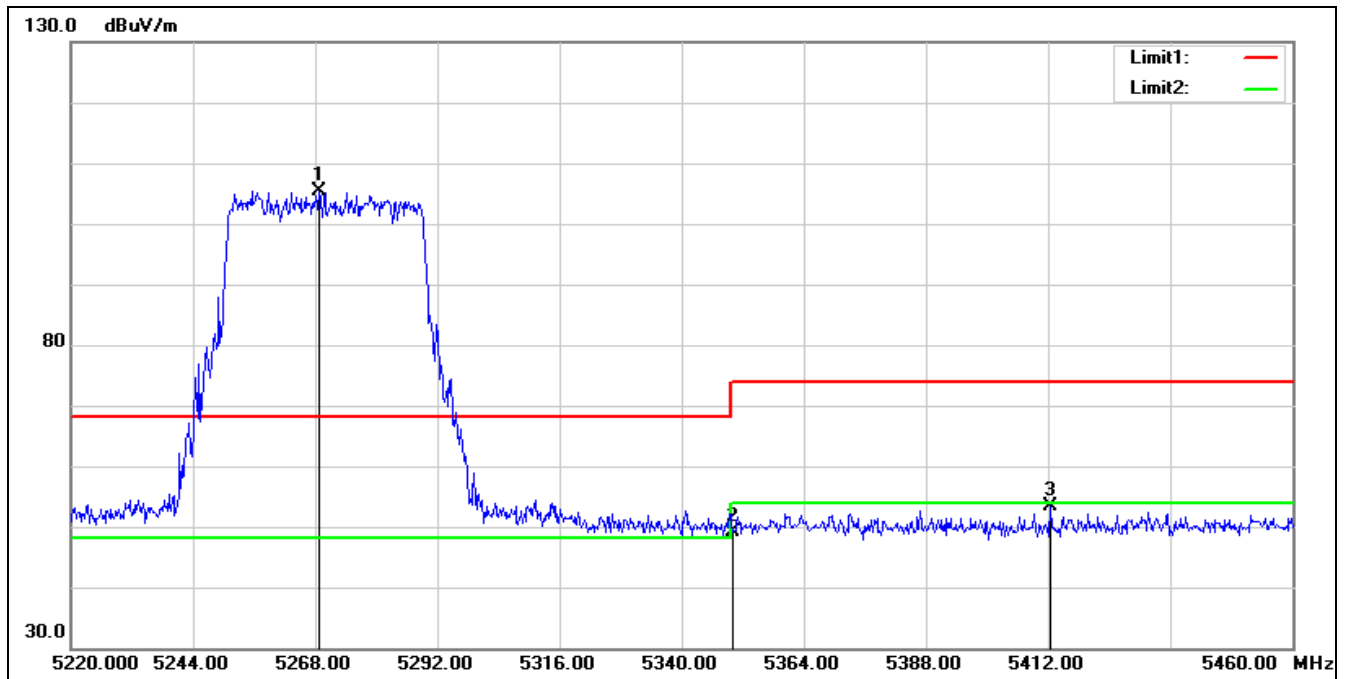

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5268.720	104.58	0.75	105.33	68.20	37.13	peak
2	5350.000	48.04	1.02	49.06	74.00	-24.94	peak
3	5412.480	51.88	1.47	53.35	74.00	-20.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5310 MHz		
Remark:			

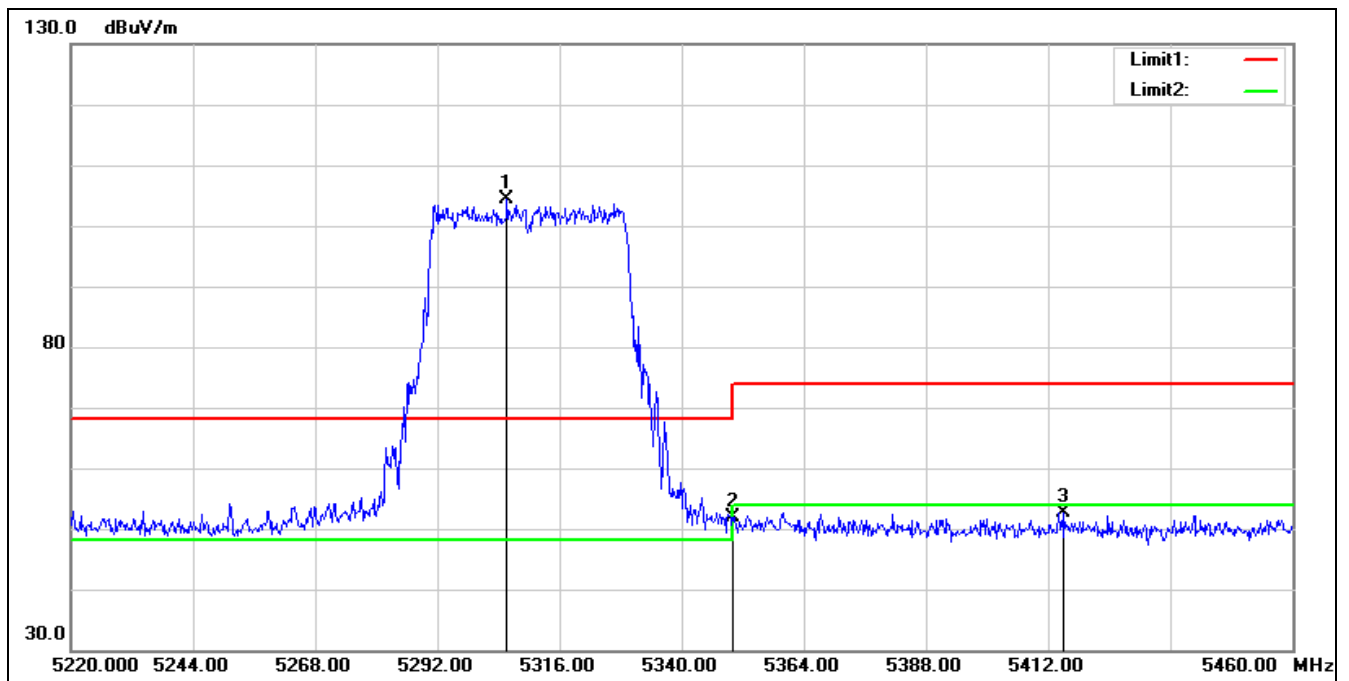


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5305.680	103.76	0.70	104.46	68.20	36.26	peak
2	5350.000	50.78	1.02	51.80	74.00	-22.20	peak
3	5414.880	51.24	1.49	52.73	74.00	-21.27	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT40 5310 MHz

Remark:

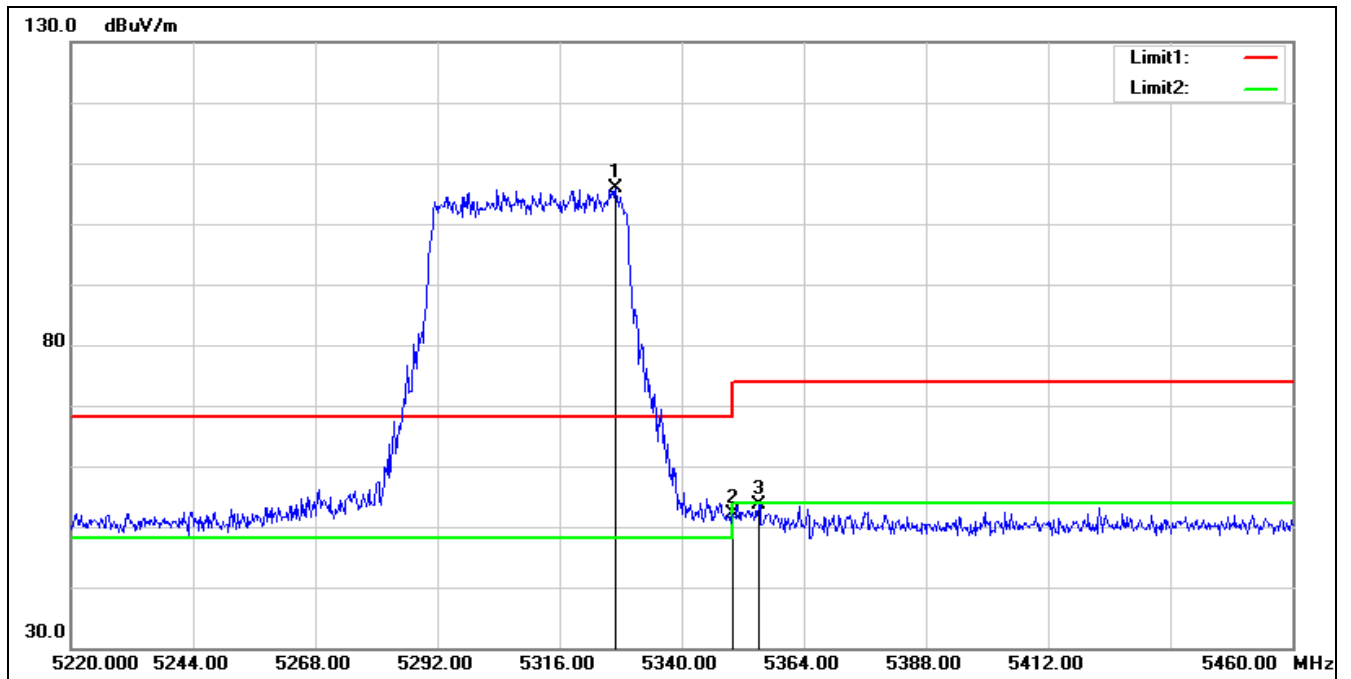


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5327.040	104.91	0.86	105.77	68.20	37.57	peak
2	5350.000	51.02	1.02	52.04	74.00	-21.96	peak
3	5355.120	52.62	1.06	53.68	74.00	-20.32	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5510 MHz

Remark:

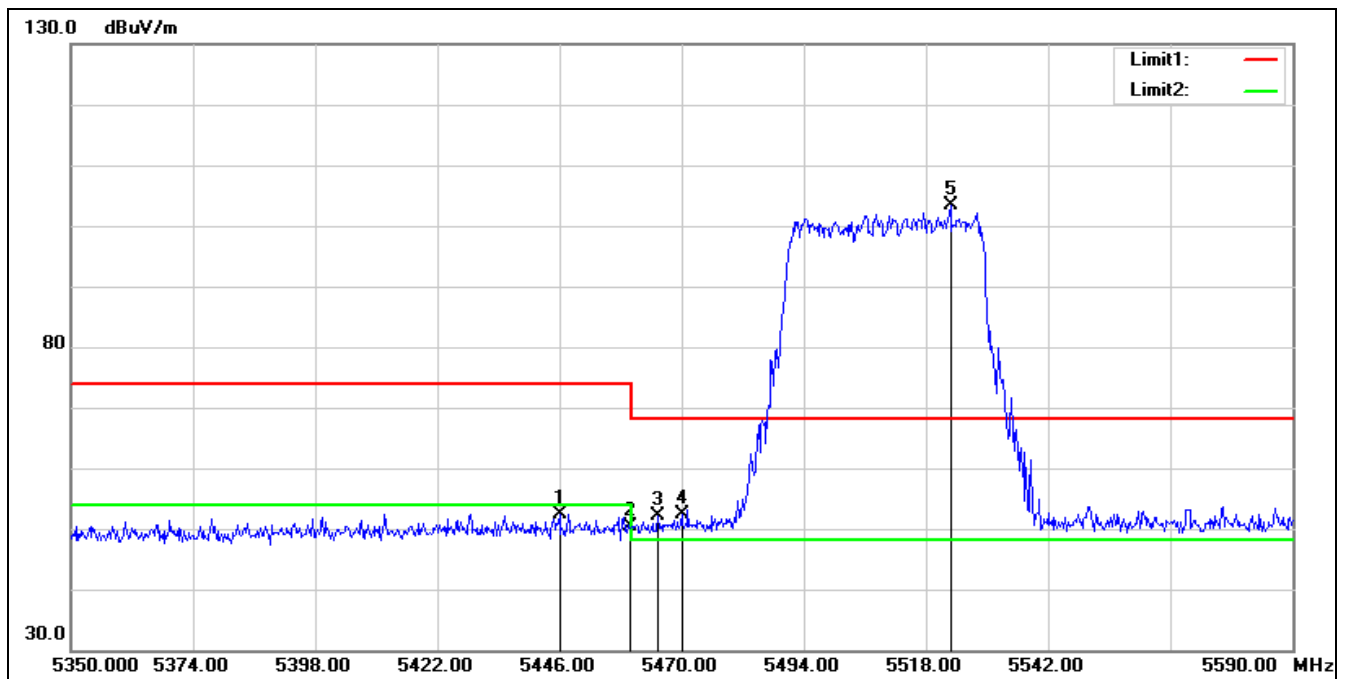


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.000	50.76	1.71	52.47	74.00	-21.53	peak
2	5460.000	48.59	1.75	50.34	74.00	-23.66	peak
3	5465.440	50.42	1.76	52.18	68.20	-16.02	peak
4	5470.000	50.70	1.77	52.47	68.20	-15.73	peak
5*	5522.800	101.67	1.80	103.47	68.20	35.27	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5510 MHz

Remark:

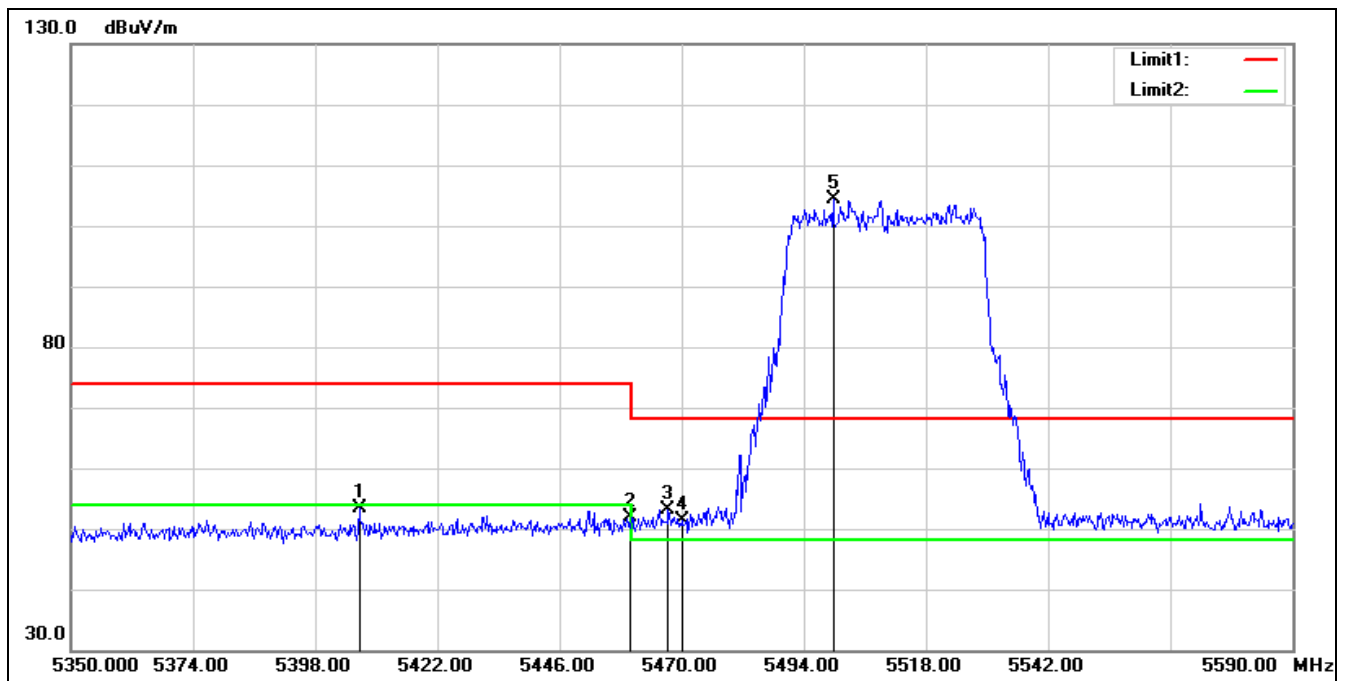

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5406.640	52.05	1.43	53.48	74.00	-20.52	peak
2	5460.000	50.02	1.75	51.77	74.00	-22.23	peak
3	5467.360	51.43	1.76	53.19	68.20	-15.01	peak
4	5470.000	49.53	1.77	51.30	68.20	-16.90	peak
5*	5499.760	102.52	1.80	104.32	68.20	36.12	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5550 MHz
Remark:

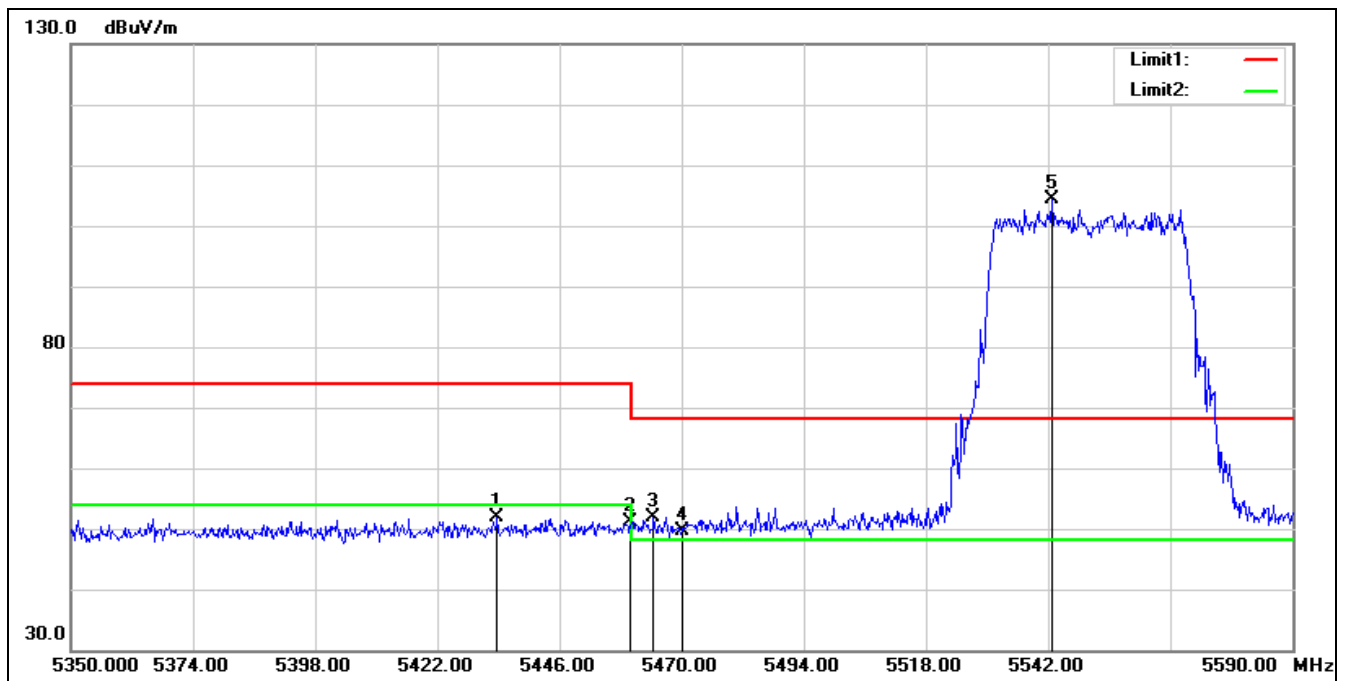


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.760	50.29	1.62	51.91	74.00	-22.09	peak
2	5460.000	49.29	1.75	51.04	74.00	-22.96	peak
3	5464.480	50.06	1.75	51.81	68.20	-16.39	peak
4	5470.000	47.93	1.77	49.70	68.20	-18.50	peak
5*	5542.720	102.67	1.79	104.46	68.20	36.26	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT40 5550 MHz

Remark:

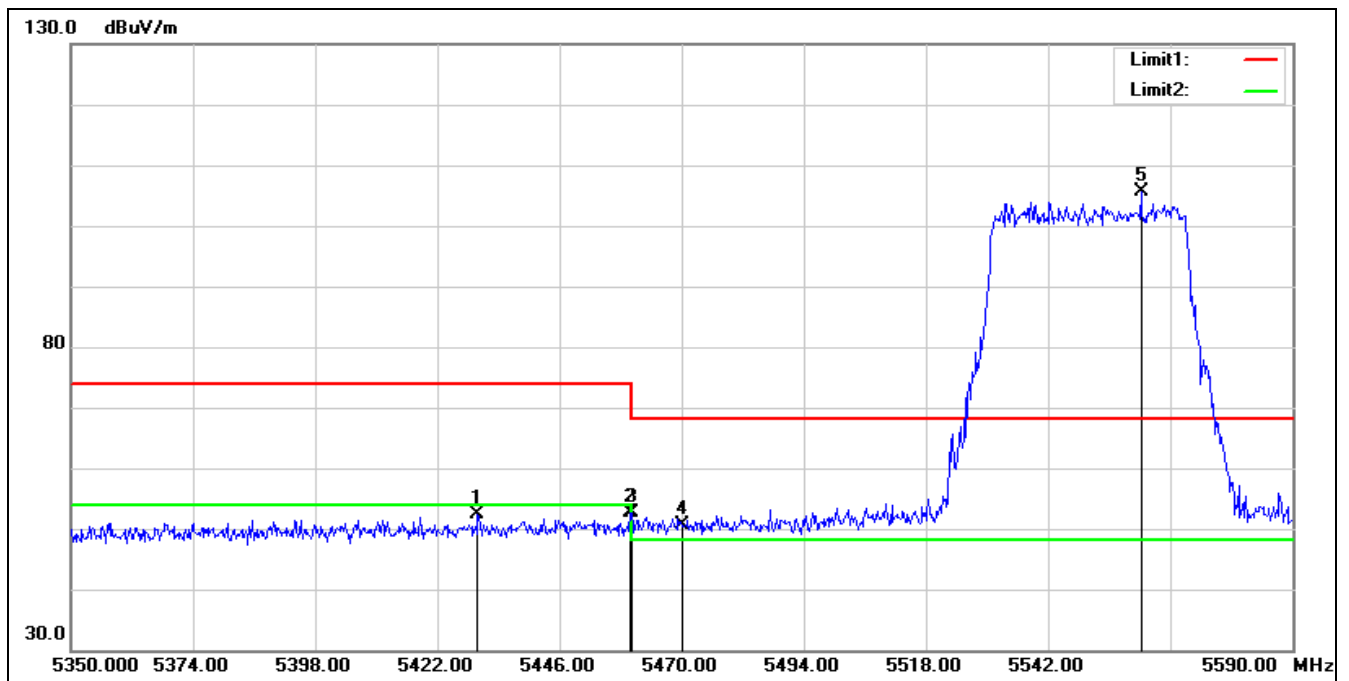


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.920	50.71	1.60	52.31	74.00	-21.69	peak
2	5460.000	50.87	1.75	52.62	74.00	-21.38	peak
3	5460.160	50.87	1.75	52.62	68.20	-15.58	peak
4	5470.000	48.94	1.77	50.71	68.20	-17.49	peak
5*	5560.240	103.88	1.76	105.64	68.20	37.44	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5670 MHz

Remark:

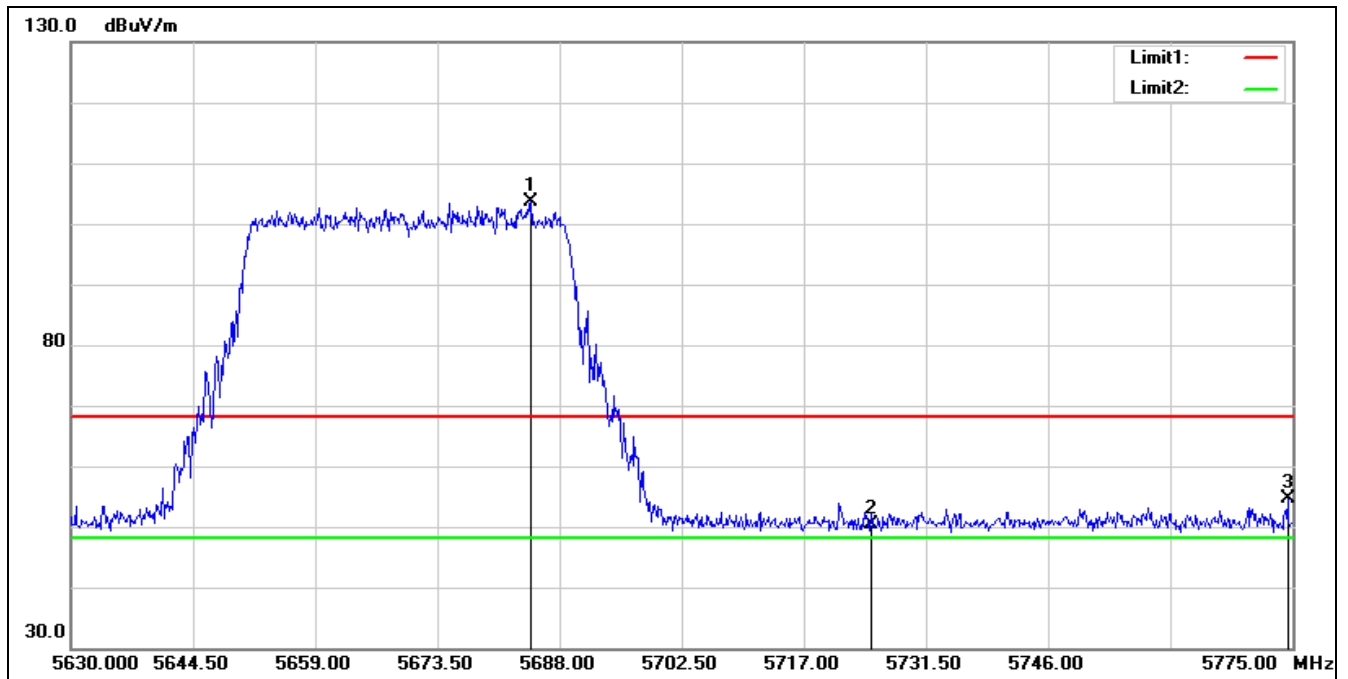


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5684.665	102.21	1.54	103.75	68.20	35.55	peak
2	5725.000	48.60	1.78	50.38	68.20	-17.82	peak
3	5774.420	52.48	2.12	54.60	68.20	-13.60	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5670 MHz

Remark:

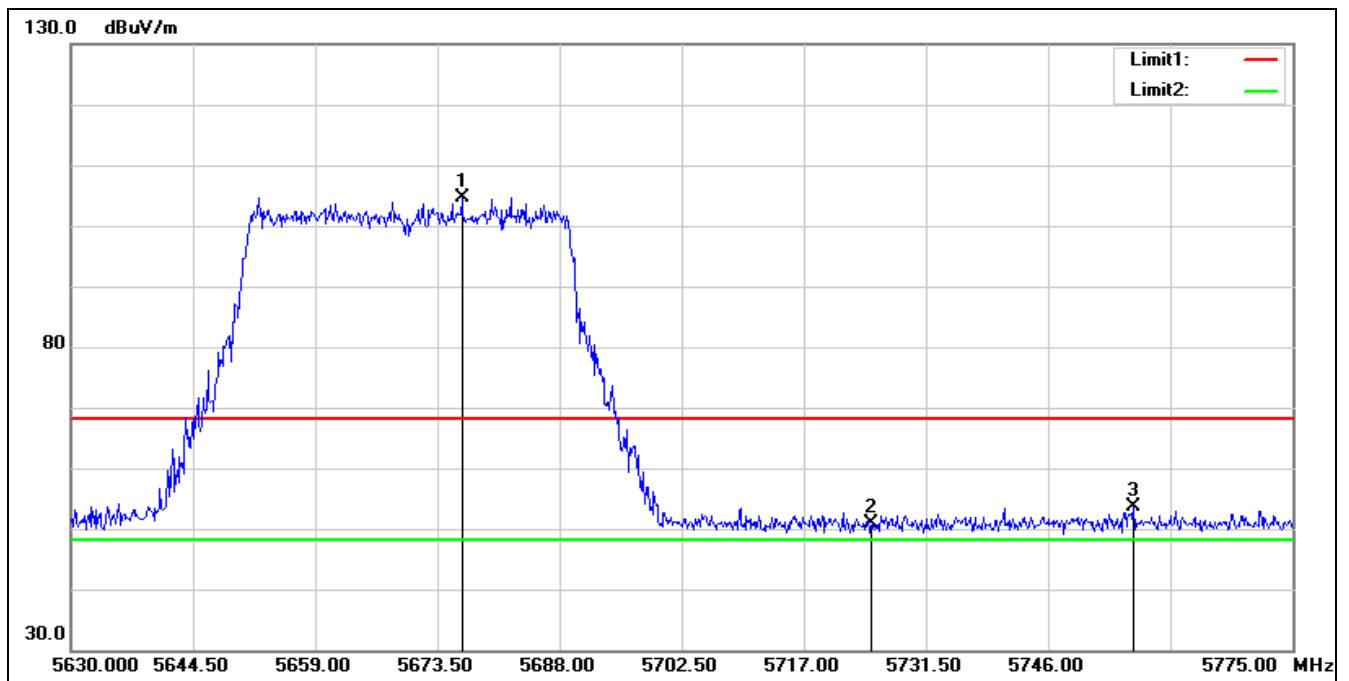

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5676.400	103.19	1.55	104.74	68.20	36.54	peak
2	5725.000	49.03	1.78	50.81	68.20	-17.39	peak
3	5756.150	51.65	2.04	53.69	68.20	-14.51	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5710 MHz		
Remark:			

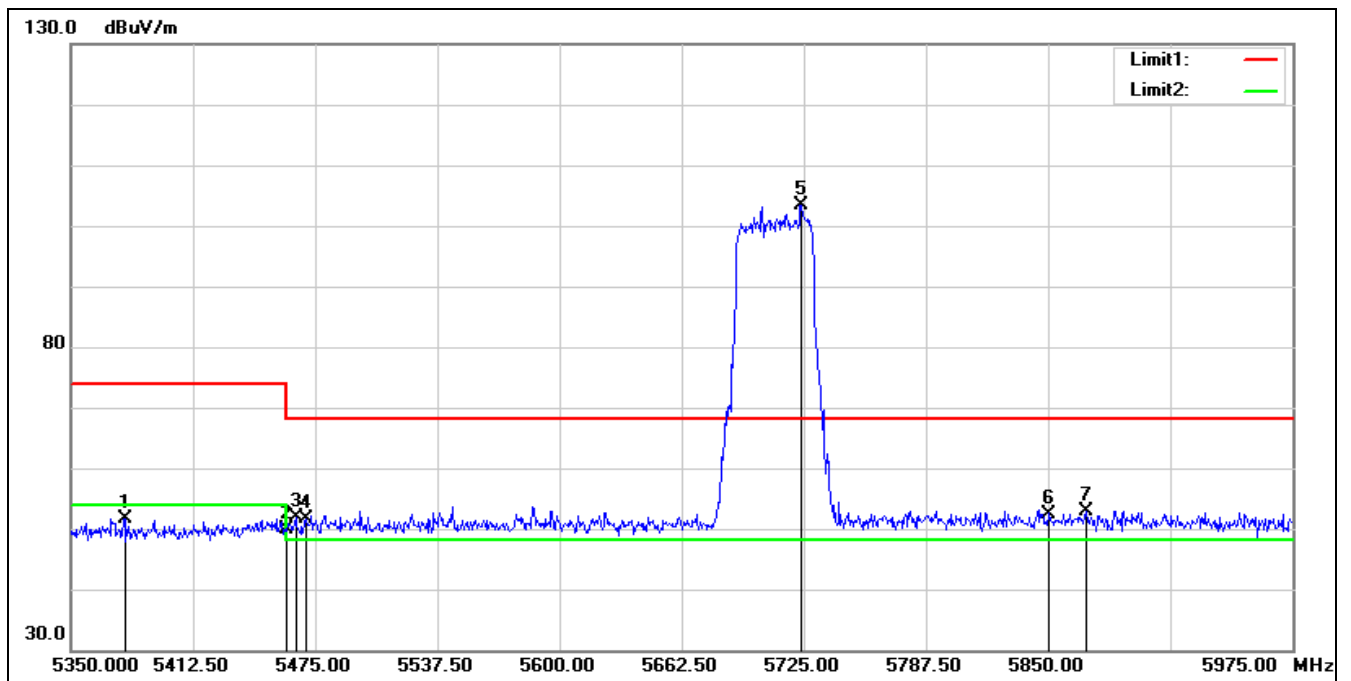

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5710 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5377.500	50.49	1.21	51.70	74.00	-22.30	peak
2	5460.000	48.20	1.75	49.95	74.00	-24.05	peak
3	5465.000	50.08	1.75	51.83	68.20	-16.37	peak
4	5470.000	49.92	1.77	51.69	68.20	-16.51	peak
5*	5723.750	101.60	1.77	103.37	68.20	35.17	peak
6	5850.000	50.07	2.29	52.36	68.20	-15.84	peak
7	5869.375	50.63	2.33	52.96	68.20	-15.24	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5710 MHz		
Remark:			

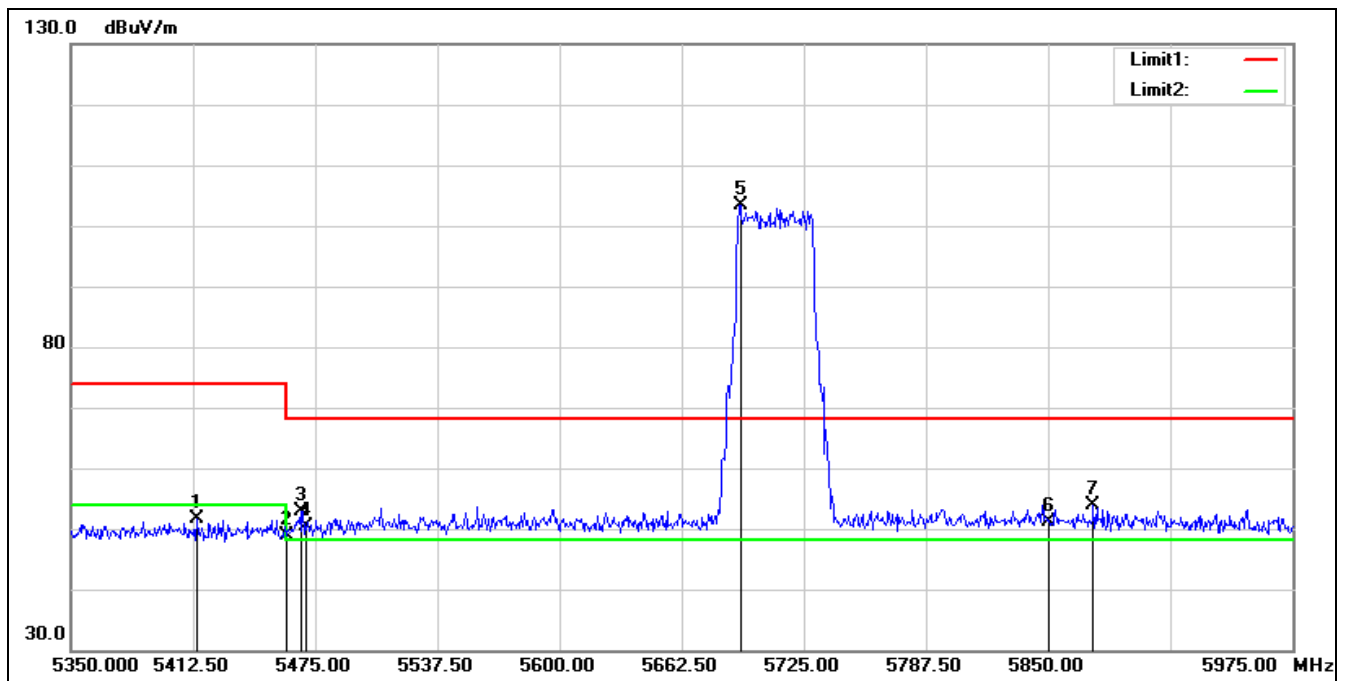

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5710 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5414.375	50.10	1.49	51.59	74.00	-22.41	peak
2	5460.000	47.13	1.75	48.88	74.00	-25.12	peak
3	5468.125	51.08	1.76	52.84	68.20	-15.36	peak
4	5470.000	48.72	1.77	50.49	68.20	-17.71	peak
5*	5692.500	101.93	1.54	103.47	68.20	35.27	peak
6	5850.000	48.83	2.29	51.12	68.20	-17.08	peak
7	5873.125	51.57	2.34	53.91	68.20	-14.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5755 MHz		
Remark:			

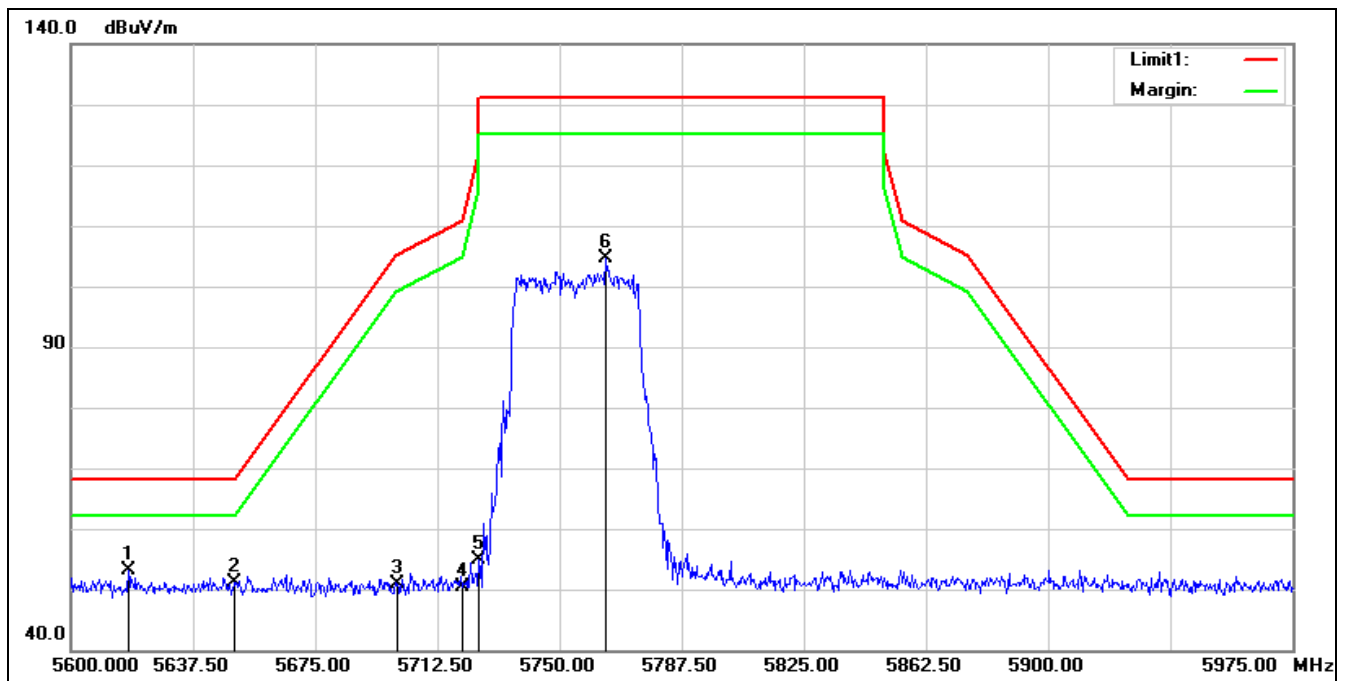


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5617.625	51.50	1.62	53.12	68.20	-15.08	peak
2	5650.000	49.51	1.56	51.07	68.20	-17.13	peak
3	5700.000	49.26	1.54	50.80	105.20	-54.40	peak
4	5720.000	48.65	1.74	50.39	110.80	-60.41	peak
5	5725.000	53.09	1.78	54.87	122.20	-67.33	peak
6	5764.250	102.43	2.08	104.51	131.20	-26.69	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT40 5755 MHz

Remark:

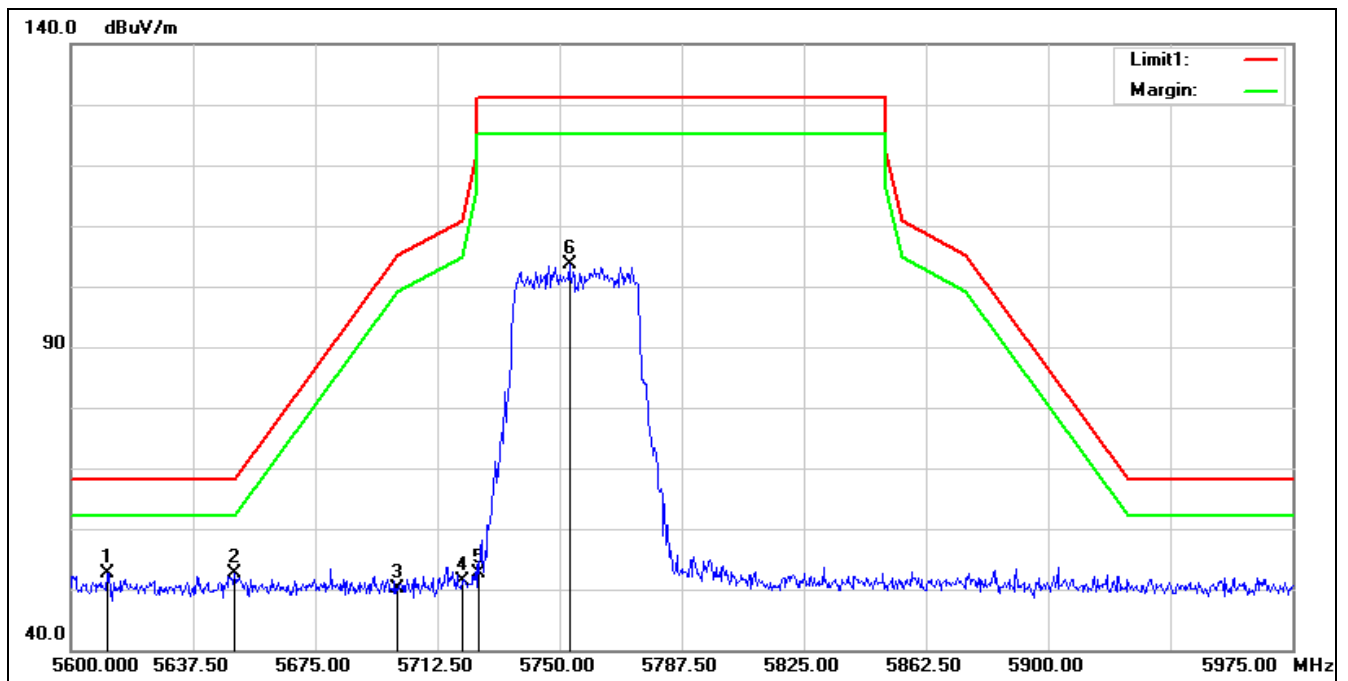


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5611.250	51.08	1.65	52.73	68.20	-15.47	peak
2	5650.000	51.00	1.56	52.56	68.20	-15.64	peak
3	5700.000	48.56	1.54	50.10	105.20	-55.10	peak
4	5720.000	49.63	1.74	51.37	110.80	-59.43	peak
5	5725.000	50.79	1.78	52.57	122.20	-69.63	peak
6	5753.000	101.61	2.03	103.64	131.20	-27.56	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5795 MHz

Remark:

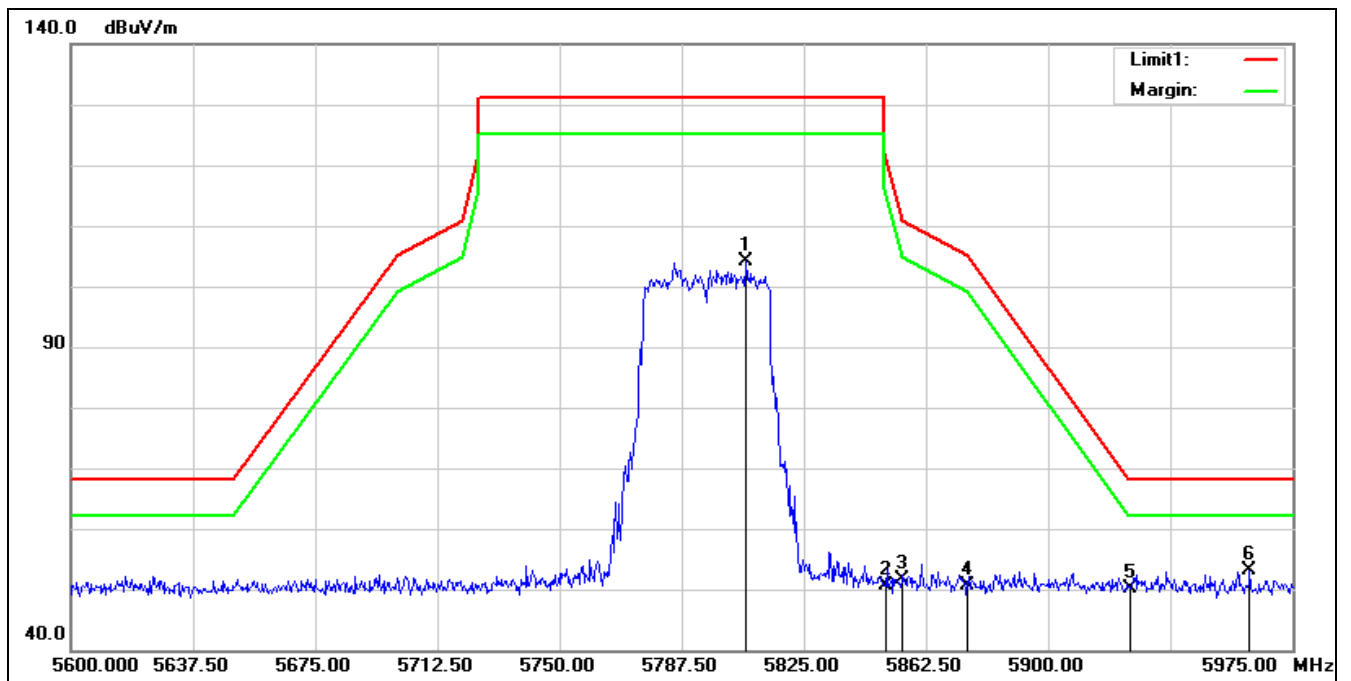


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5807.375	101.92	2.22	104.14	131.20	-27.06	peak
2	5850.000	48.34	2.29	50.63	122.20	-71.57	peak
3	5855.000	49.36	2.31	51.67	110.80	-59.13	peak
4	5875.000	48.38	2.34	50.72	105.20	-54.48	peak
5	5925.000	47.97	2.23	50.20	68.20	-18.00	peak
6*	5961.875	51.07	2.08	53.15	68.20	-15.05	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT40 5795 MHz

Remark:

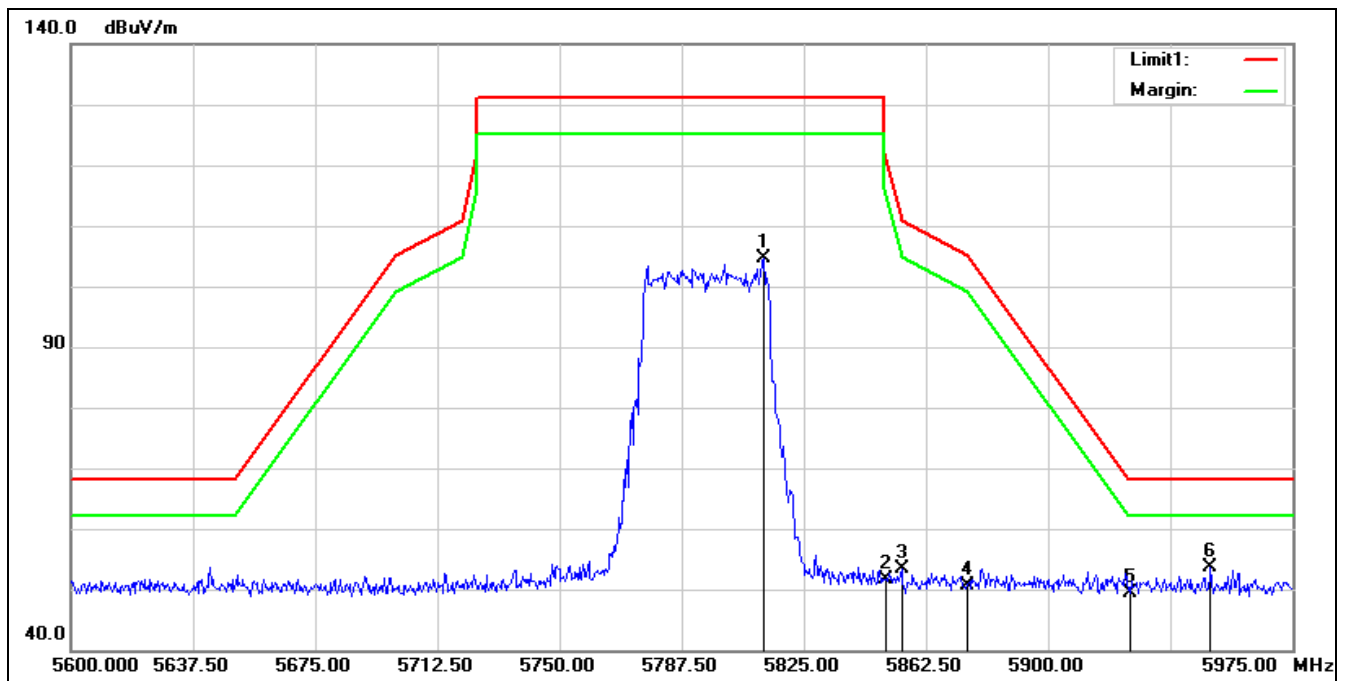


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5812.625	102.46	2.24	104.70	131.20	-26.50	peak
2	5850.000	49.35	2.29	51.64	122.20	-70.56	peak
3	5855.000	51.11	2.31	53.42	110.80	-57.38	peak
4	5875.000	48.30	2.34	50.64	105.20	-54.56	peak
5	5925.000	47.18	2.23	49.41	68.20	-18.79	peak
6*	5949.875	51.69	2.06	53.75	68.20	-14.45	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5210 MHz

Remark:

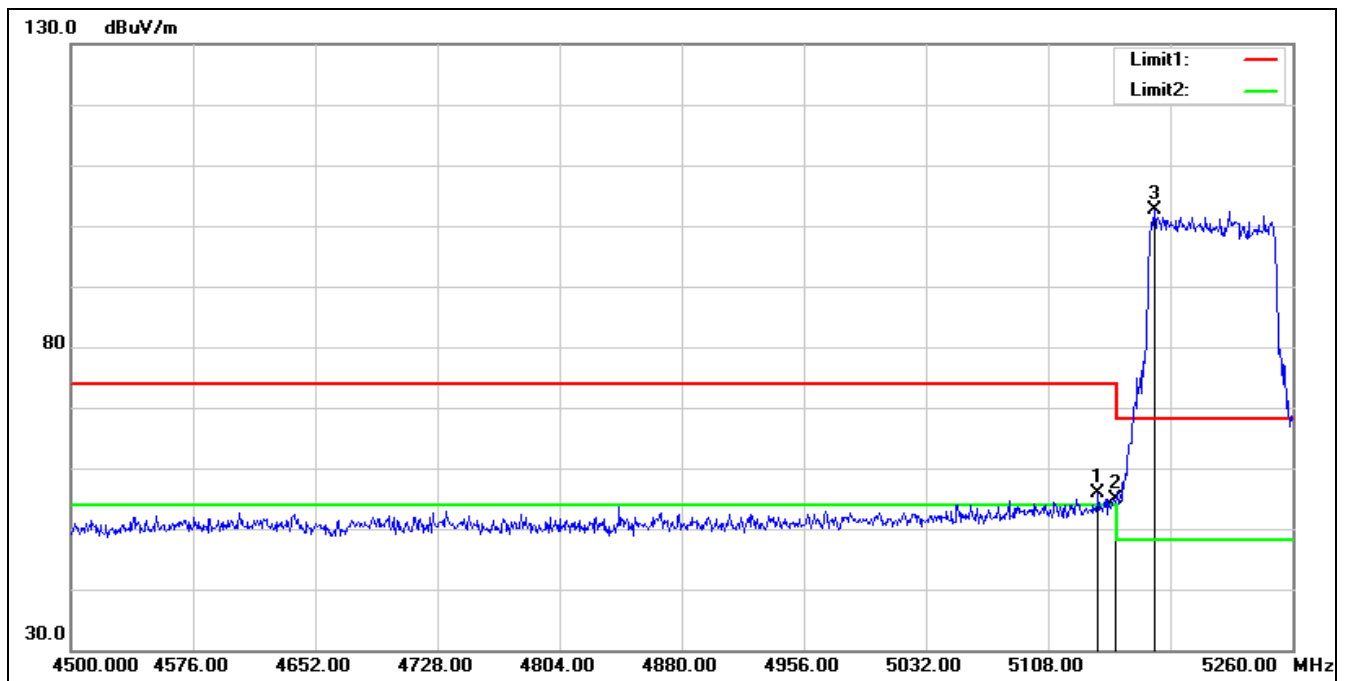


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.160	54.53	1.39	55.92	74.00	-18.08	peak
2	5150.000	53.43	1.38	54.81	74.00	-19.19	peak
3*	5174.120	101.27	1.27	102.54	68.20	34.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5210 MHz		
Remark:			

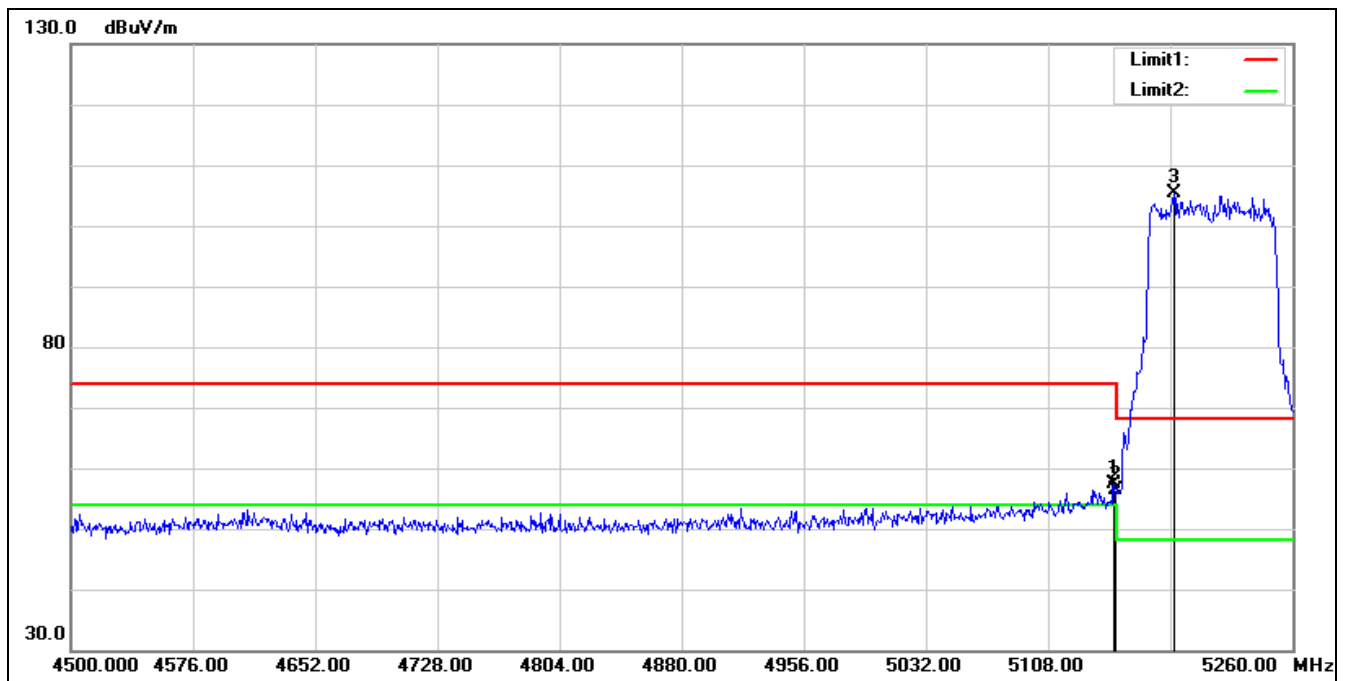


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	56.10	1.38	57.48	74.00	-16.52	peak
2	5150.000	55.02	1.38	56.40	74.00	-17.60	peak
3*	5186.280	104.16	1.20	105.36	68.20	37.16	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT80 5290 MHz
Remark:

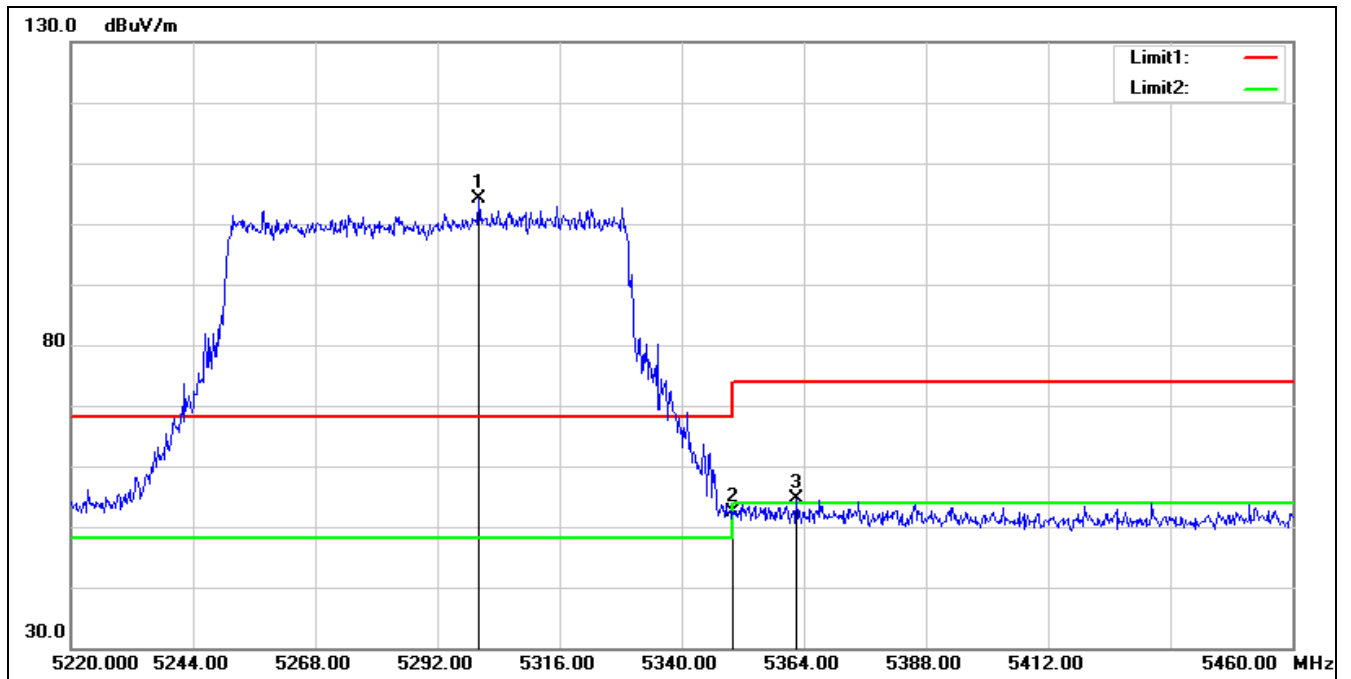

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5300.160	103.37	0.66	104.03	68.20	35.83	peak
2	5350.000	51.44	1.02	52.46	74.00	-21.54	peak
3	5362.560	53.44	1.11	54.55	74.00	-19.45	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 5290 MHz
Remark:

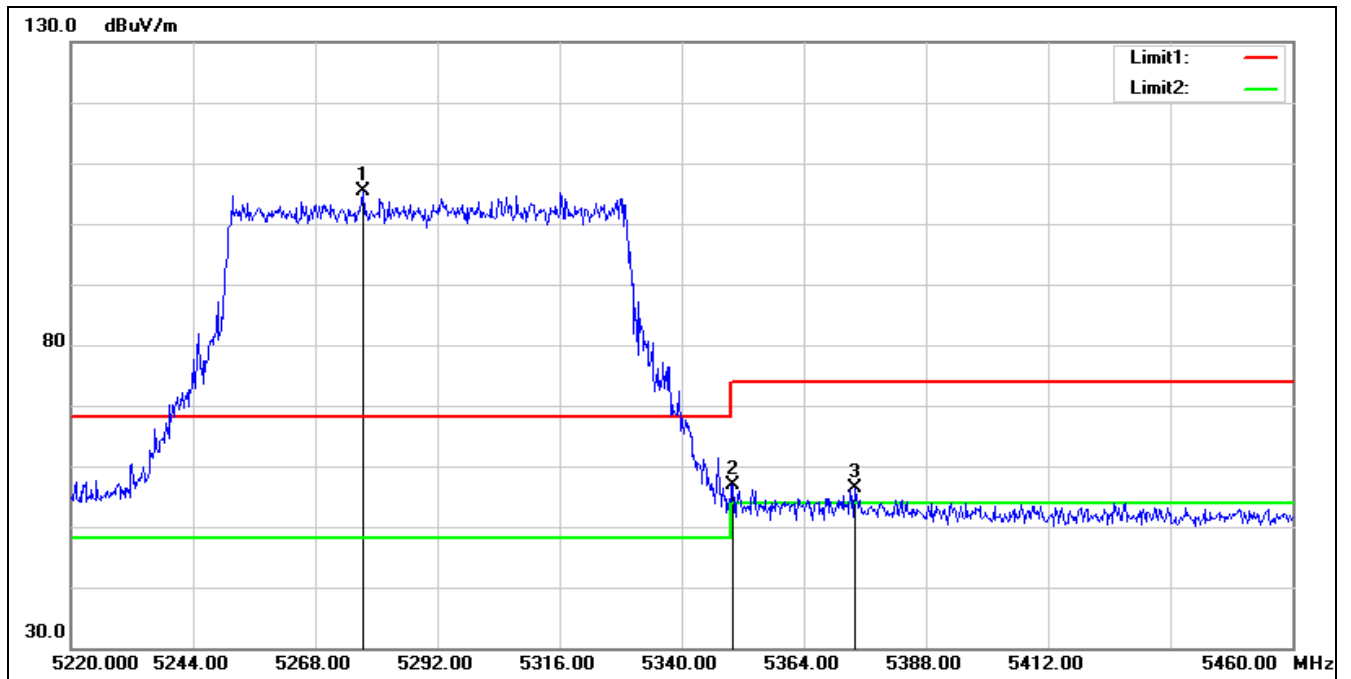


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5277.360	104.67	0.72	105.39	68.20	37.19	peak
2	5350.000	55.75	1.02	56.77	74.00	-17.23	peak
3	5374.080	55.28	1.19	56.47	74.00	-17.53	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5530 MHz

Remark:

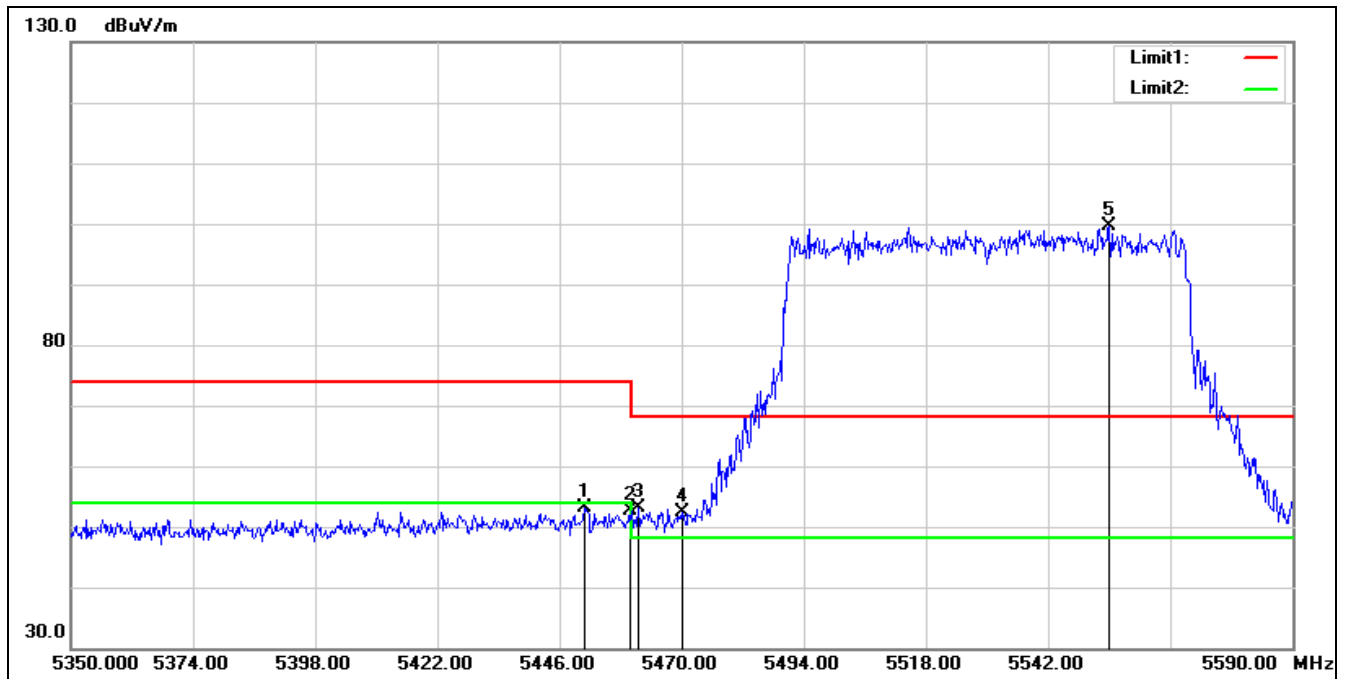


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.800	51.43	1.74	53.17	74.00	-20.83	peak
2	5460.000	50.82	1.75	52.57	74.00	-21.43	peak
3	5461.600	51.44	1.75	53.19	68.20	-15.01	peak
4	5470.000	50.50	1.77	52.27	68.20	-15.93	peak
5*	5554.000	97.95	1.77	99.72	68.20	31.52	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 5530 MHz
Remark:

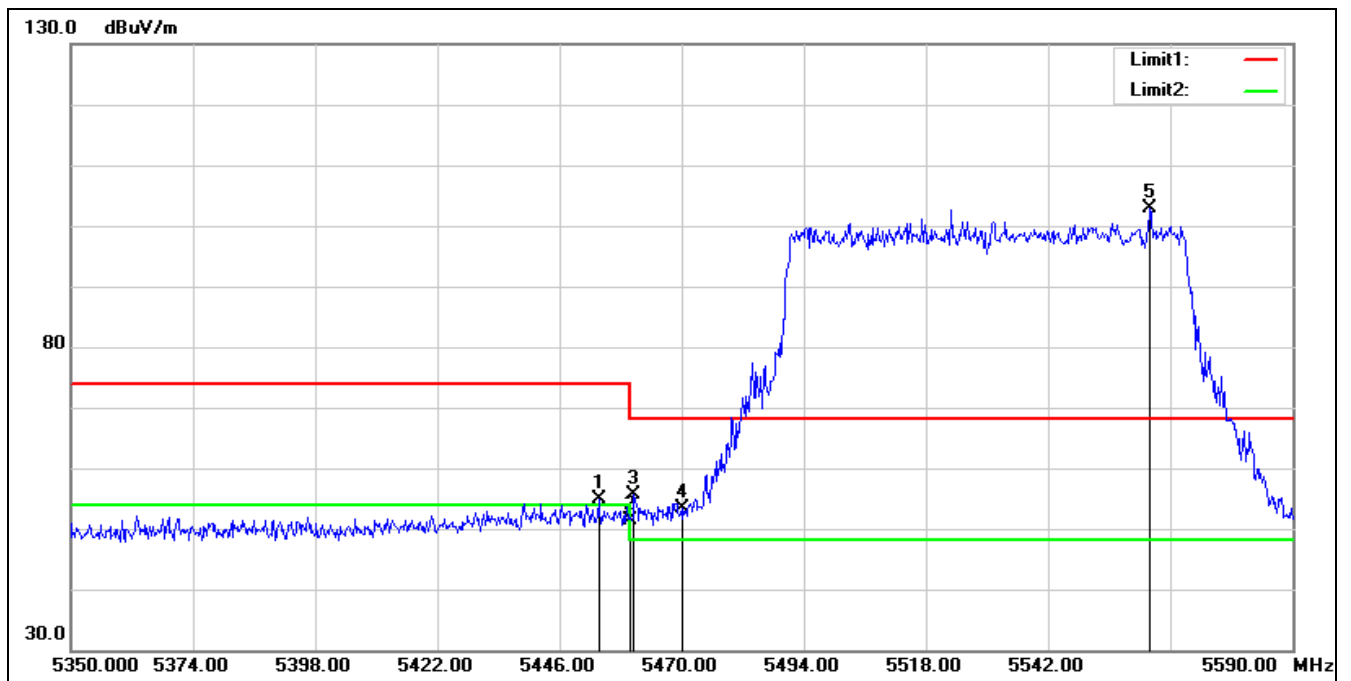

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.680	53.21	1.75	54.96	74.00	-19.04	peak
2	5460.000	49.73	1.75	51.48	74.00	-22.52	peak
3	5460.640	53.97	1.75	55.72	68.20	-12.48	peak
4	5470.000	51.54	1.77	53.31	68.20	-14.89	peak
5*	5561.920	101.07	1.76	102.83	68.20	34.63	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

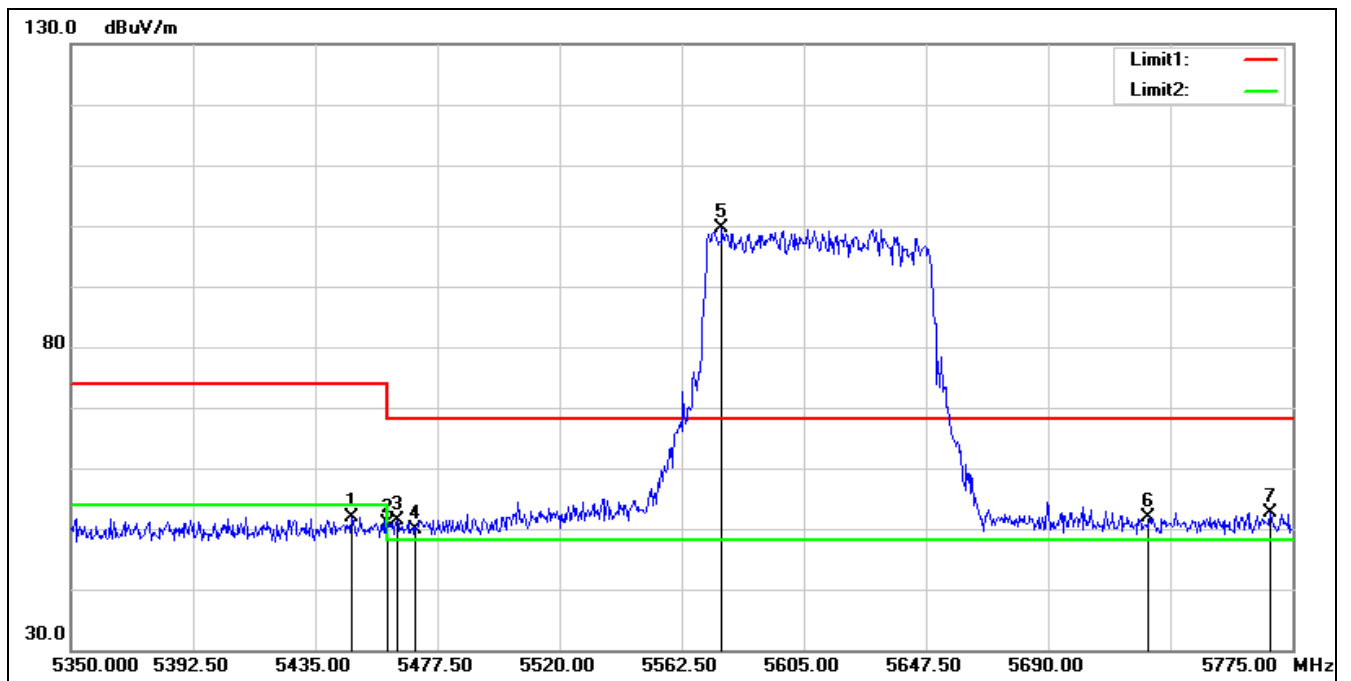

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.750	50.23	1.72	51.95	74.00	-22.05	peak
2	5460.000	49.17	1.75	50.92	74.00	-23.08	peak
3	5463.475	49.75	1.75	51.50	68.20	-16.70	peak
4	5470.000	48.06	1.77	49.83	68.20	-18.37	peak
5	5576.525	97.95	1.73	99.68	68.20	31.48	peak
6	5725.000	50.18	1.78	51.96	68.20	-16.24	peak
7	5767.350	50.50	2.09	52.59	68.20	-15.61	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

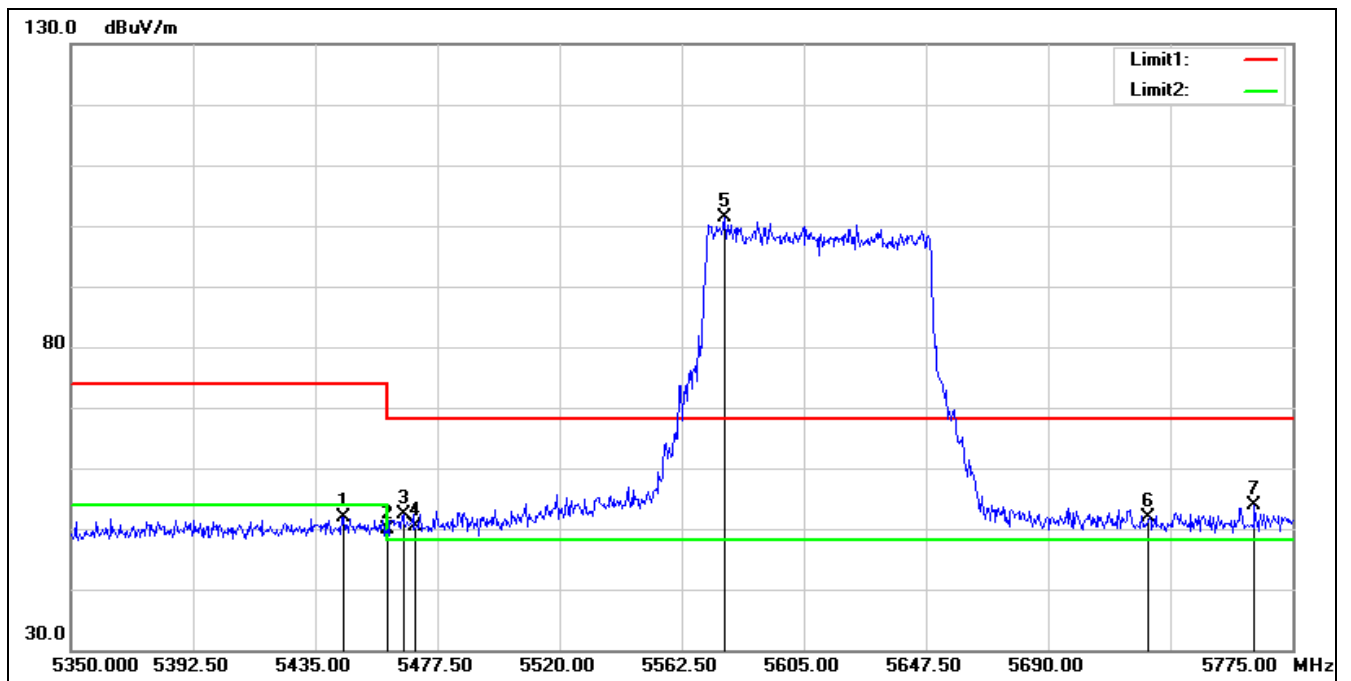

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.775	50.22	1.70	51.92	74.00	-22.08	peak
2	5460.000	48.03	1.75	49.78	74.00	-24.22	peak
3	5465.600	50.70	1.76	52.46	68.20	-15.74	peak
4	5470.000	48.61	1.77	50.38	68.20	-17.82	peak
5*	5577.375	99.55	1.73	101.28	68.20	33.08	peak
6	5725.000	50.01	1.78	51.79	68.20	-16.41	peak
7	5761.825	51.74	2.07	53.81	68.20	-14.39	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

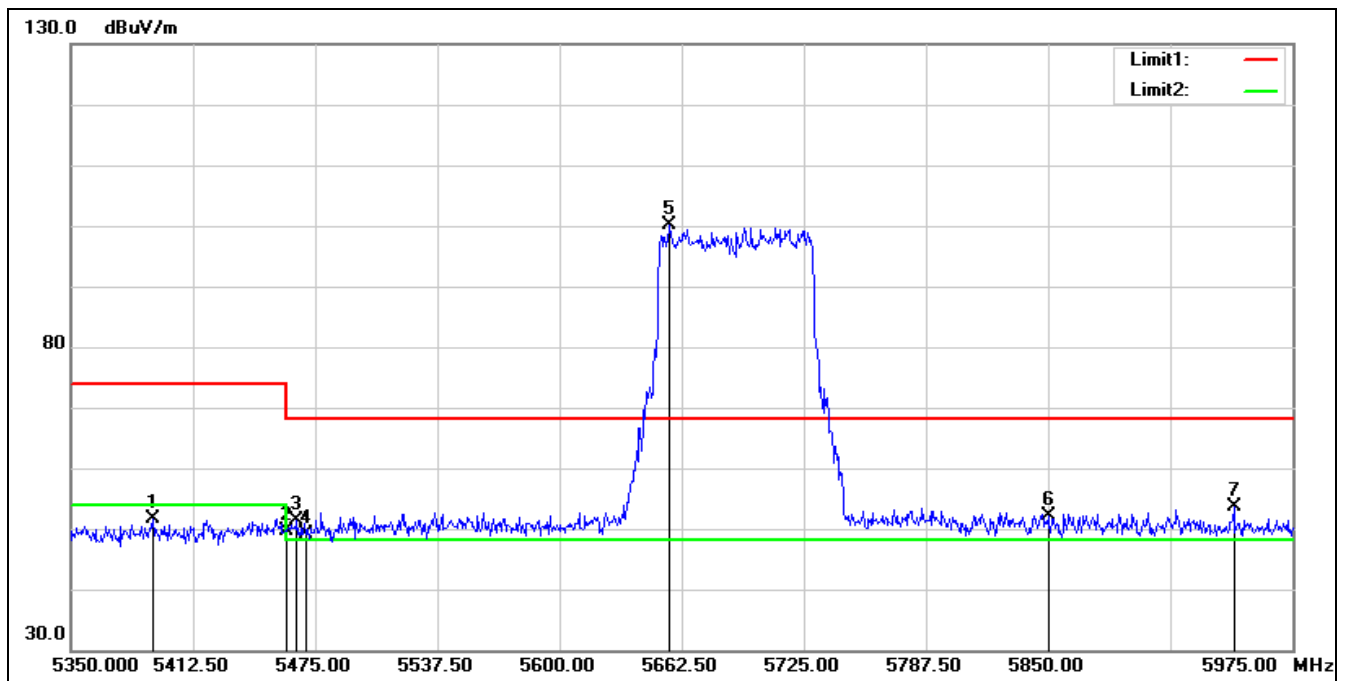

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5391.875	50.26	1.32	51.58	74.00	-22.42	peak
2	5460.000	47.92	1.75	49.67	74.00	-24.33	peak
3	5465.625	49.51	1.76	51.27	68.20	-16.93	peak
4	5470.000	47.36	1.77	49.13	68.20	-19.07	peak
5*	5656.250	98.63	1.55	100.18	68.20	31.98	peak
6	5850.000	49.76	2.29	52.05	68.20	-16.15	peak
7	5945.000	51.51	2.10	53.61	68.20	-14.59	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

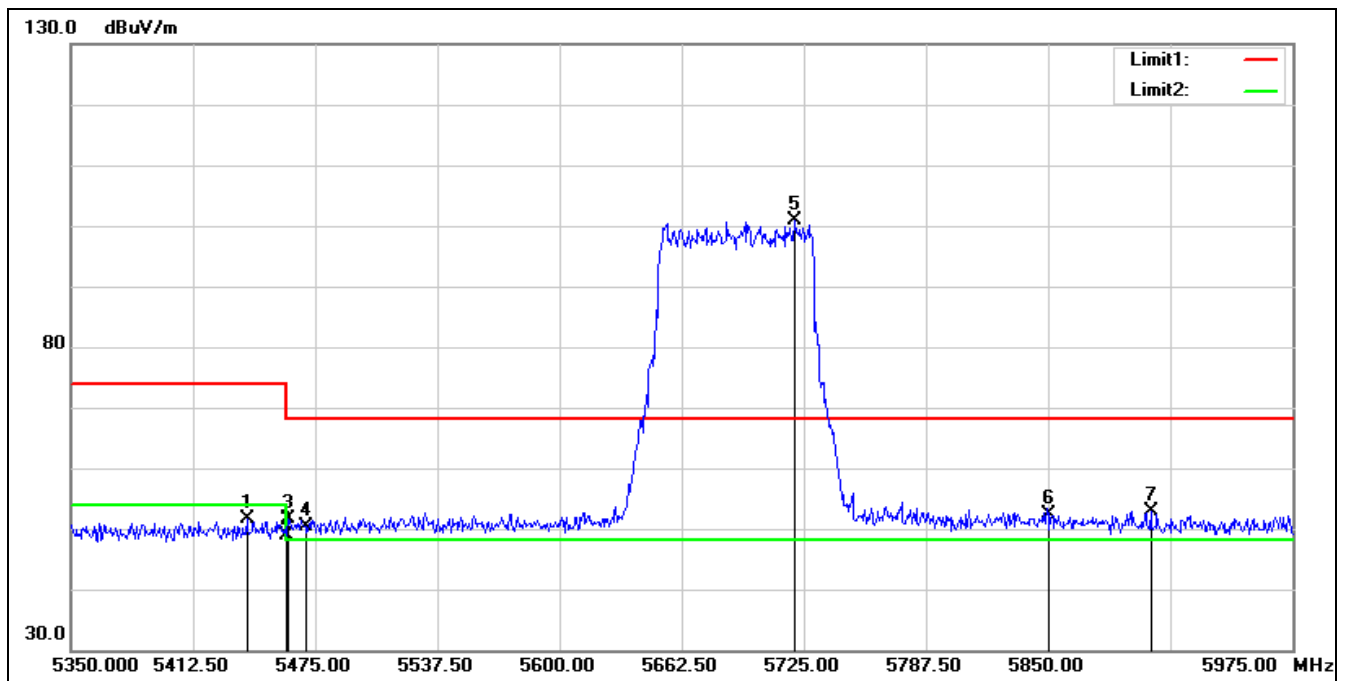

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.000	50.01	1.67	51.68	74.00	-22.32	peak
2	5460.000	47.13	1.75	48.88	74.00	-25.12	peak
3	5461.250	49.98	1.75	51.73	68.20	-16.47	peak
4	5470.000	48.56	1.77	50.33	68.20	-17.87	peak
5*	5720.000	99.20	1.74	100.94	68.20	32.74	peak
6	5850.000	50.01	2.29	52.30	68.20	-15.90	peak
7	5902.500	50.60	2.36	52.96	68.20	-15.24	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			

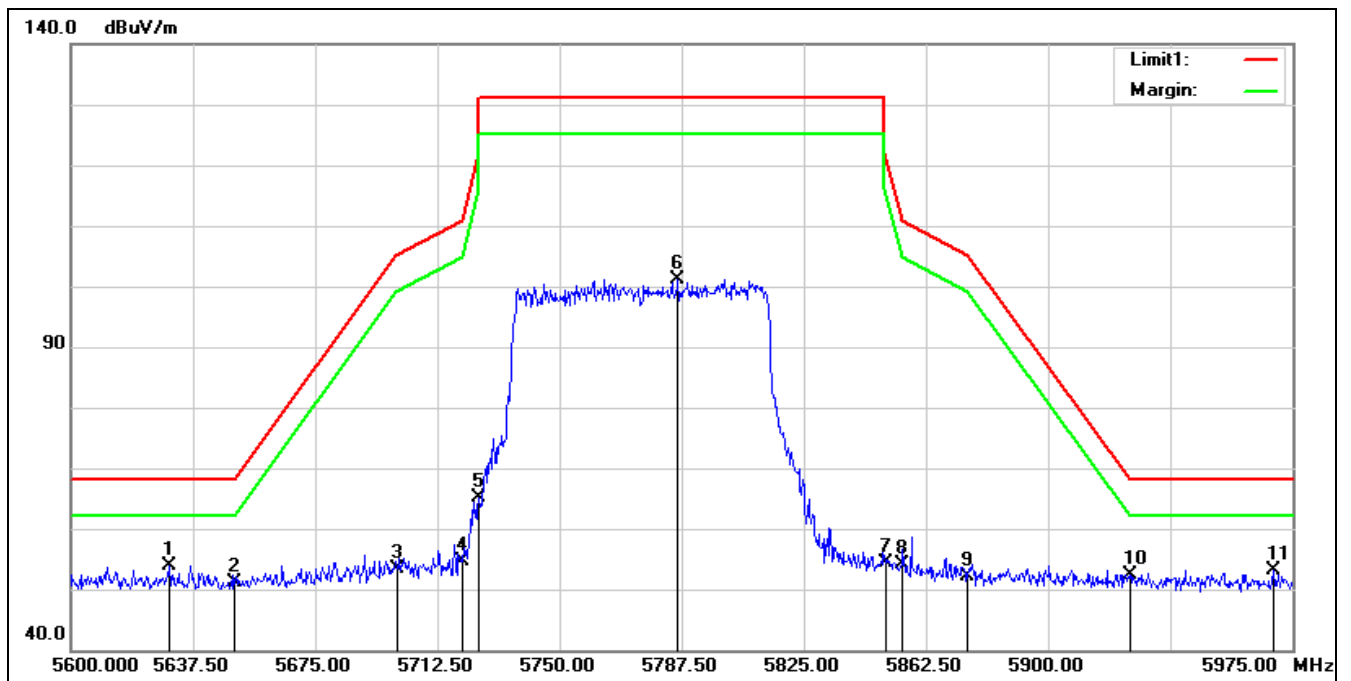

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5630.375	52.21	1.60	53.81	68.20	-14.39	peak
2	5650.000	49.49	1.56	51.05	68.20	-17.15	peak
3	5700.000	51.96	1.54	53.50	105.20	-51.70	peak
4	5720.000	52.82	1.74	54.56	110.80	-56.24	peak
5	5725.000	63.40	1.78	65.18	122.20	-57.02	peak
6	5786.375	98.96	2.17	101.13	131.20	-30.07	peak
7	5850.000	52.21	2.29	54.50	122.20	-67.70	peak
8	5855.000	51.89	2.31	54.20	110.80	-56.60	peak
9	5875.000	49.83	2.34	52.17	105.20	-53.03	peak
10	5925.000	50.04	2.23	52.27	68.20	-15.93	peak
11	5969.000	51.11	2.10	53.21	68.20	-14.99	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			

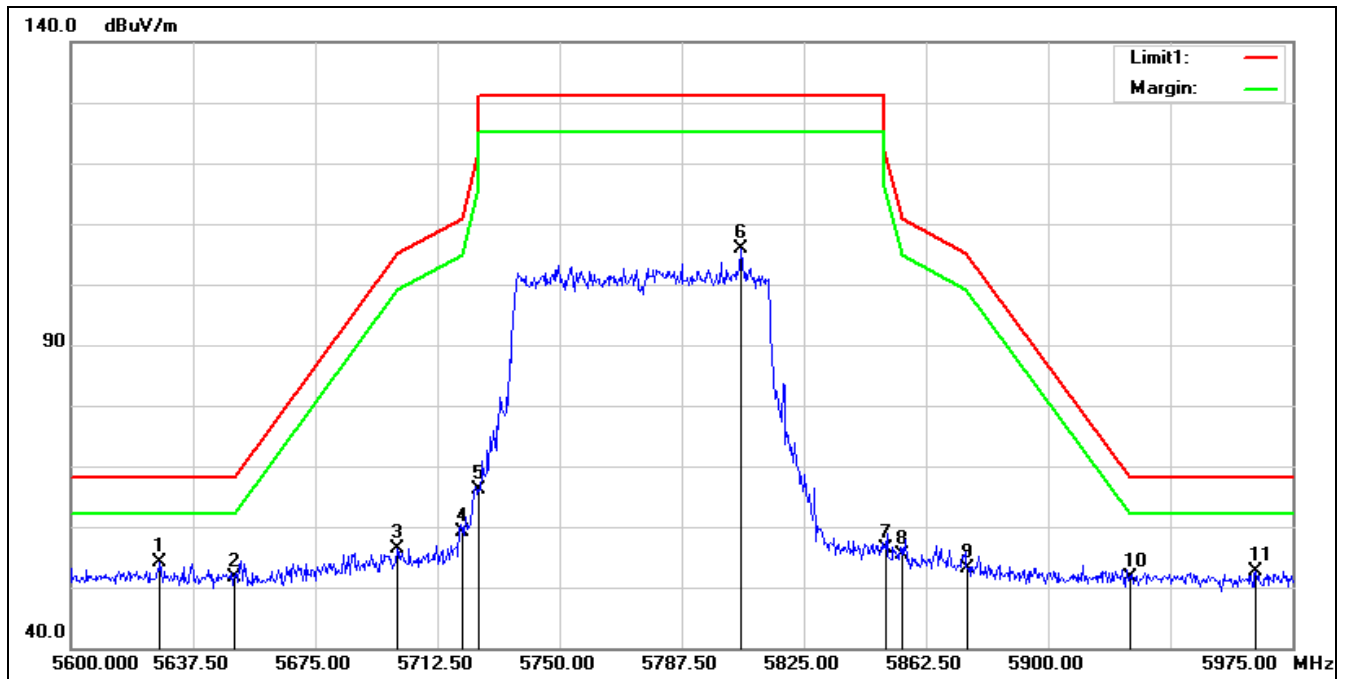

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5627.375	52.40	1.61	54.01	68.20	-14.19	peak
2	5650.000	49.99	1.56	51.55	68.20	-16.65	peak
3	5700.000	54.74	1.54	56.28	105.20	-48.92	peak
4	5720.000	57.30	1.74	59.04	110.80	-51.76	peak
5	5725.000	64.41	1.78	66.19	122.20	-56.01	peak
6	5805.500	103.67	2.22	105.89	131.20	-25.31	peak
7	5850.000	54.08	2.29	56.37	122.20	-65.83	peak
8	5855.000	53.01	2.31	55.32	110.80	-55.48	peak
9	5875.000	50.75	2.34	53.09	105.20	-52.11	peak
10	5925.000	49.48	2.23	51.71	68.20	-16.49	peak
11	5963.750	50.65	2.09	52.74	68.20	-15.46	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT160 5250 MHz
Remark:

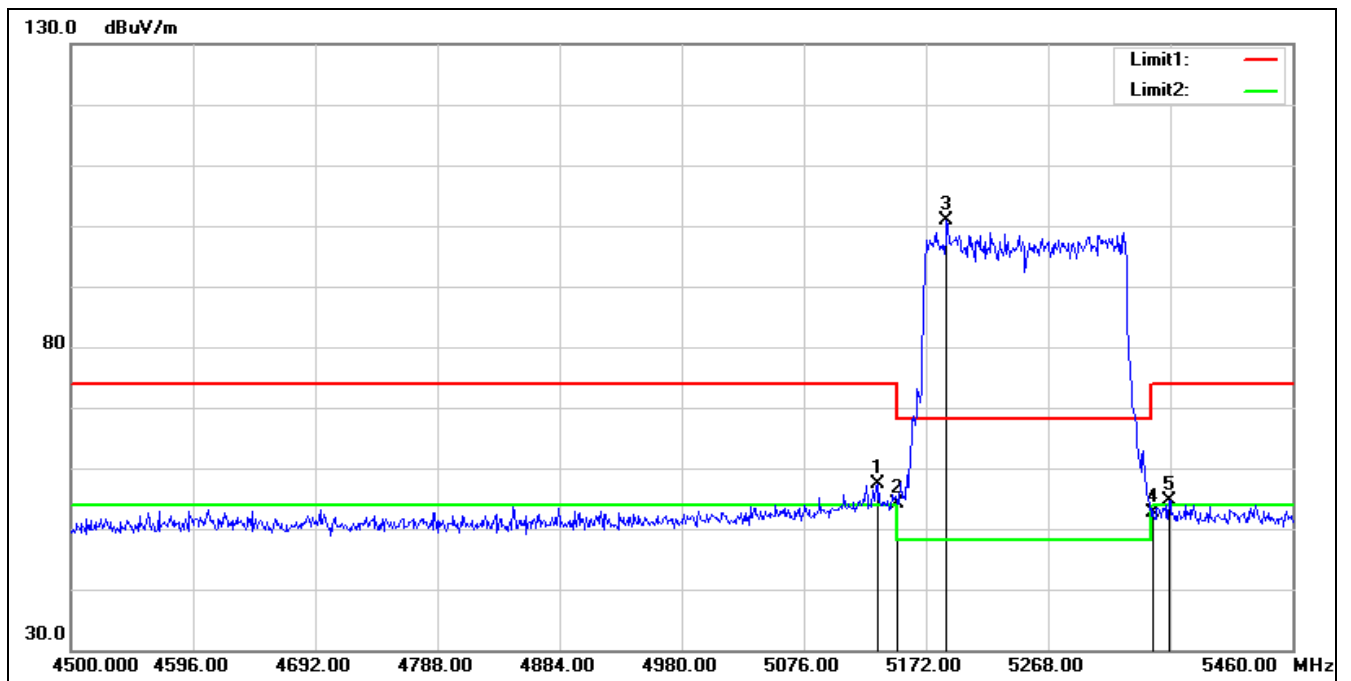


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5134.560	56.08	1.39	57.47	74.00	-16.53	peak
2	5150.000	52.79	1.38	54.17	74.00	-19.83	peak
3*	5188.320	99.69	1.20	100.89	68.20	32.69	peak
4	5350.000	51.62	1.02	52.64	74.00	-21.36	peak
5	5363.040	53.64	1.11	54.75	74.00	-19.25	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT160 5250 MHz

Remark:

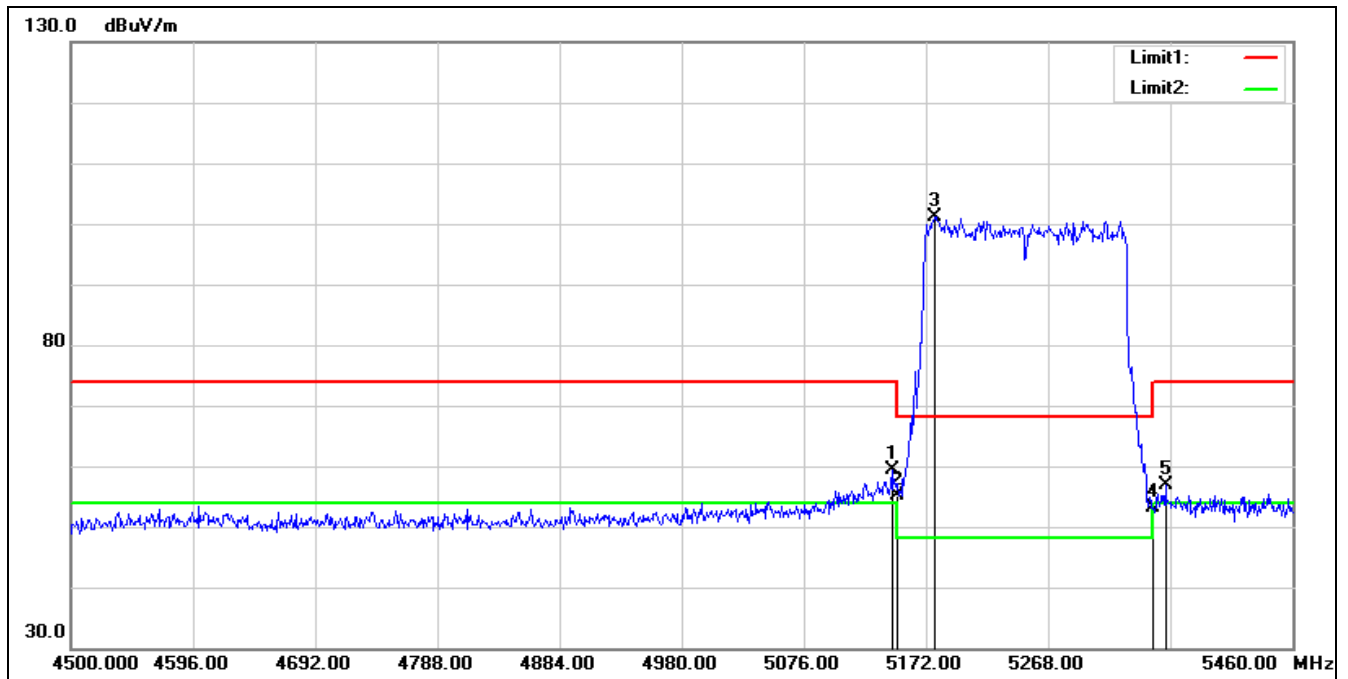

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.120	57.89	1.38	59.27	74.00	-14.73	peak
2	5150.000	53.65	1.38	55.03	74.00	-18.97	peak
3*	5178.720	99.80	1.25	101.05	68.20	32.85	peak
4	5350.000	52.05	1.02	53.07	74.00	-20.93	peak
5	5360.160	55.87	1.09	56.96	74.00	-17.04	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

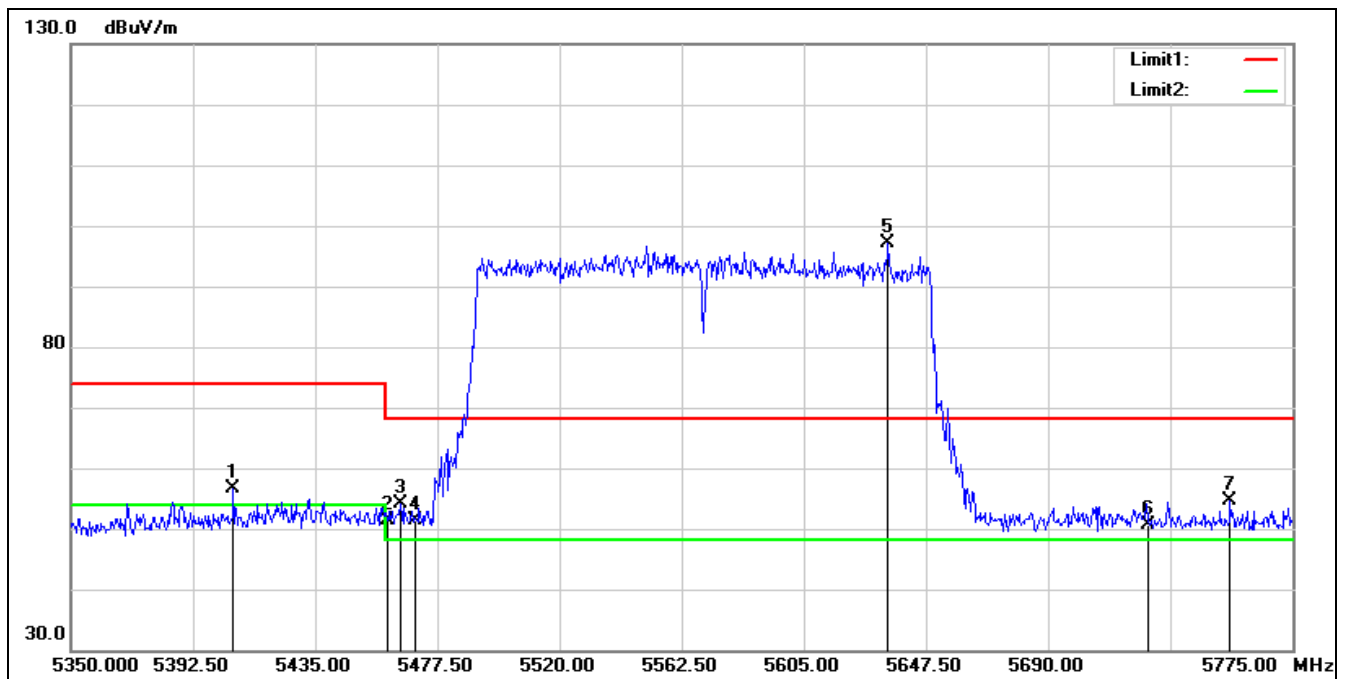

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5406.525	55.17	1.43	56.60	74.00	-17.40	peak
2	5460.000	49.53	1.75	51.28	74.00	-22.72	peak
3	5464.750	52.42	1.75	54.17	68.20	-14.03	peak
4	5470.000	49.59	1.77	51.36	68.20	-16.84	peak
5*	5634.325	95.55	1.59	97.14	68.20	28.94	peak
6	5725.000	48.84	1.78	50.62	68.20	-17.58	peak
7	5753.325	52.63	2.03	54.66	68.20	-13.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

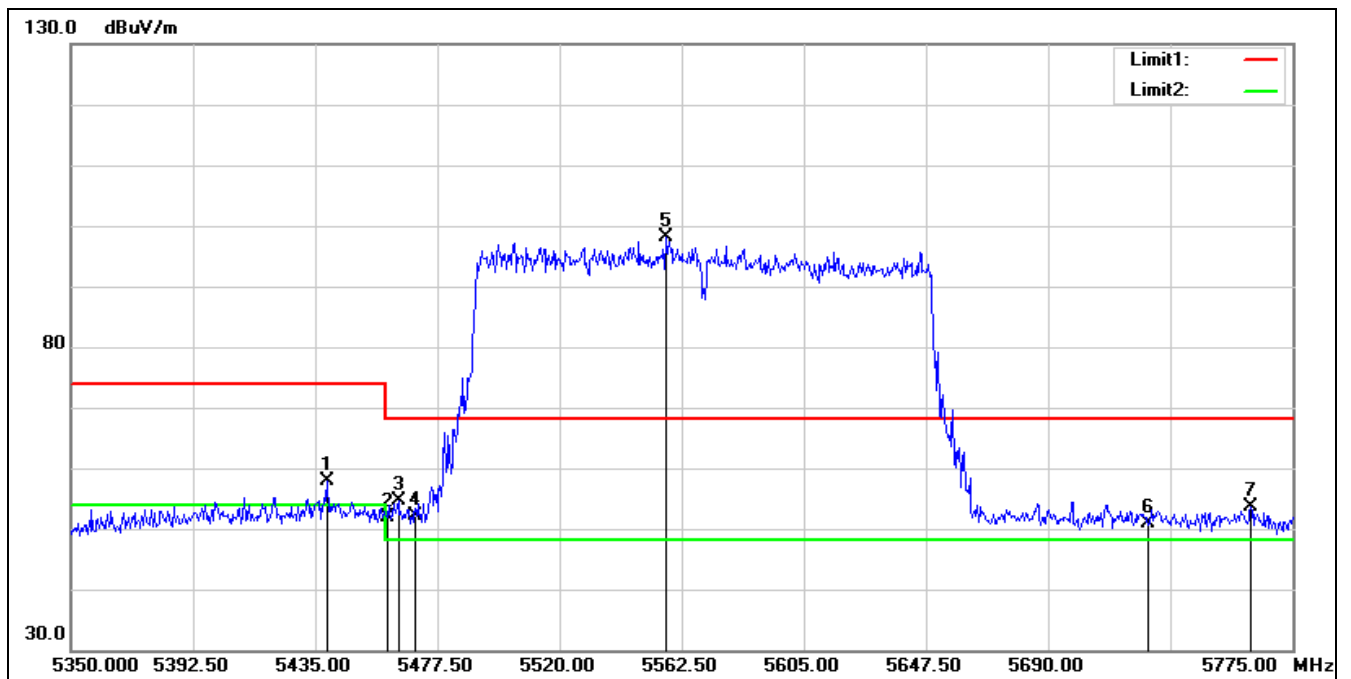


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.250	56.13	1.67	57.80	74.00	-16.20	peak
2	5460.000	50.12	1.75	51.87	74.00	-22.13	peak
3	5463.900	52.98	1.75	54.73	68.20	-13.47	peak
4	5470.000	50.30	1.77	52.07	68.20	-16.13	peak
5*	5556.975	96.25	1.77	98.02	68.20	29.82	peak
6	5725.000	49.14	1.78	50.92	68.20	-17.28	peak
7	5760.550	51.49	2.06	53.55	68.20	-14.65	peak


Average

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5180 MHz
Remark:

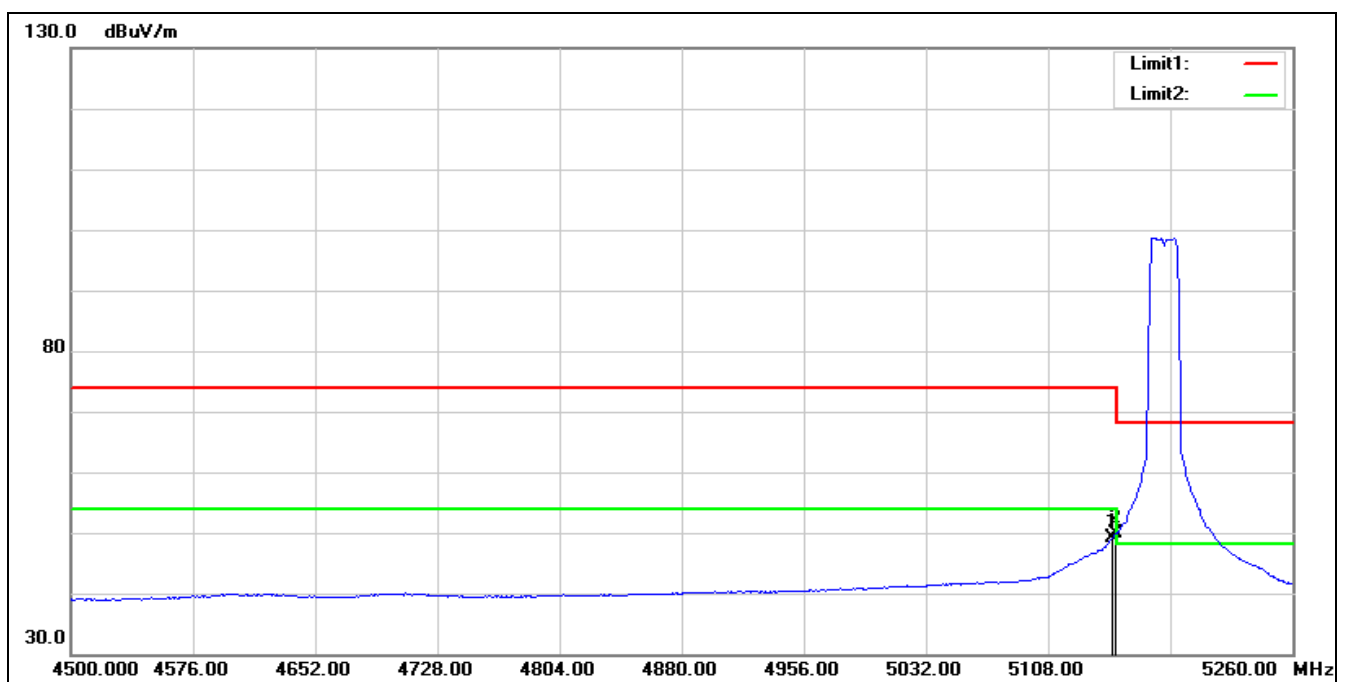


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	47.85	1.38	49.23	54.00	-4.77	AVG
2*	5150.000	48.60	1.38	49.98	54.00	-4.02	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5180 MHz
Remark:

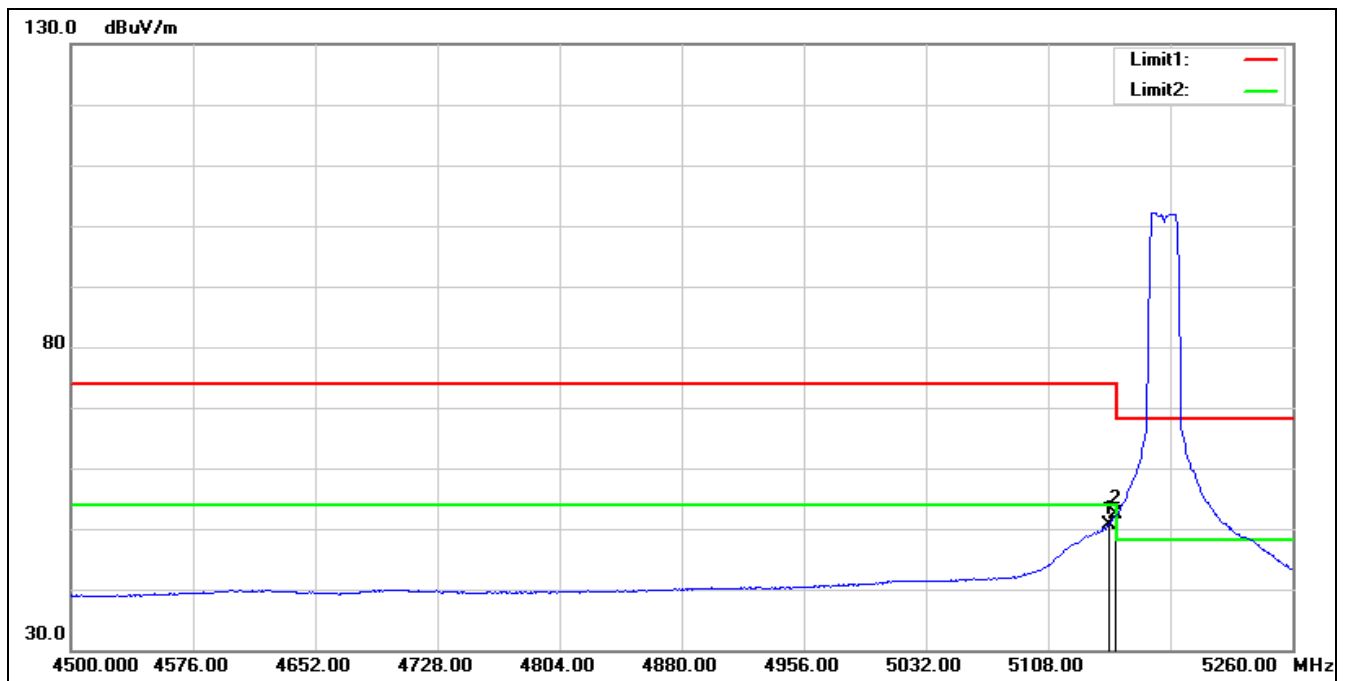


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.000	49.32	1.39	50.71	54.00	-3.29	AVG
2*	5150.000	51.07	1.38	52.45	54.00	-1.55	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5200 MHz
Remark:

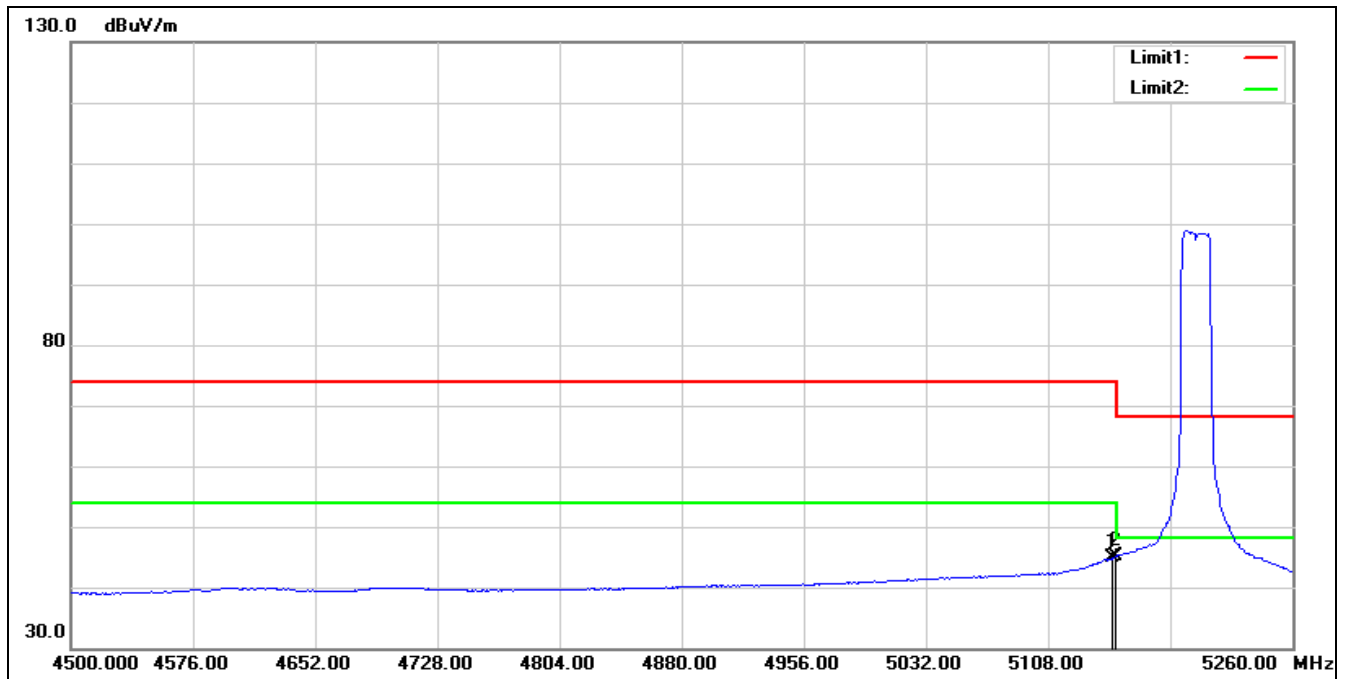


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	43.54	1.38	44.92	54.00	-9.08	AVG
2*	5150.000	43.76	1.38	45.14	54.00	-8.86	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

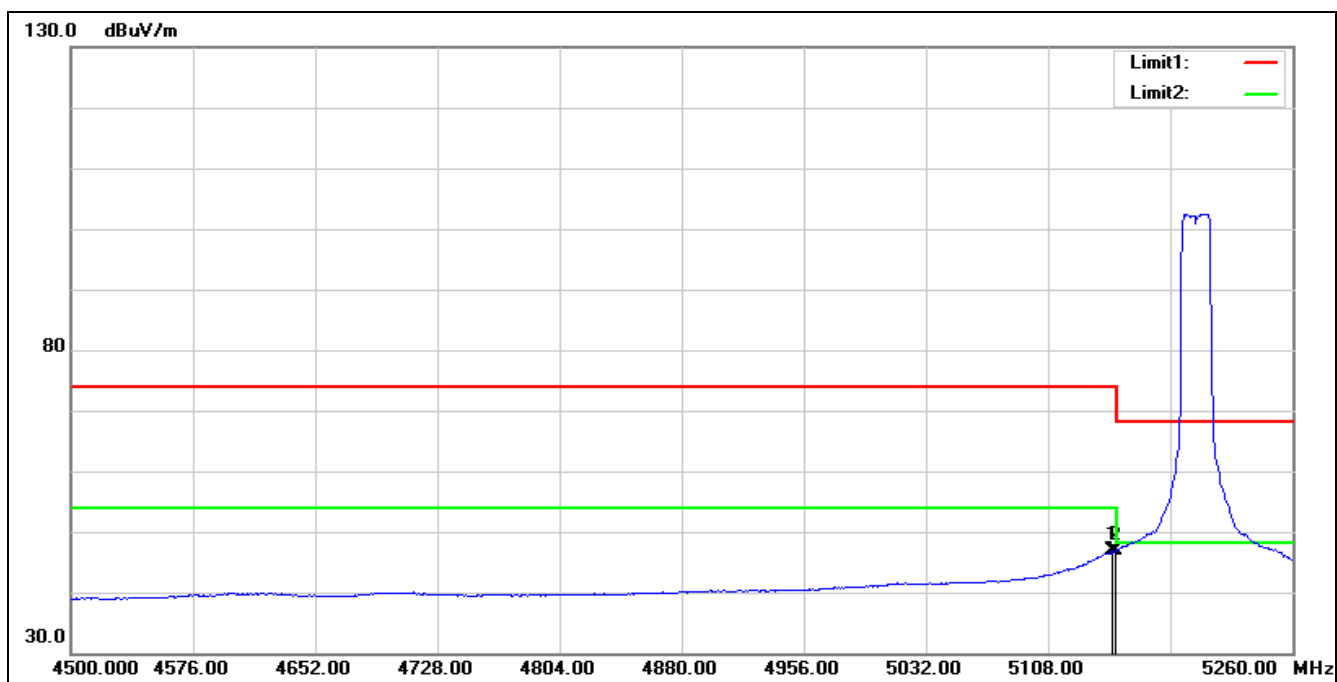


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	45.42	1.38	46.80	54.00	-7.20	AVG
2*	5150.000	45.60	1.38	46.98	54.00	-7.02	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

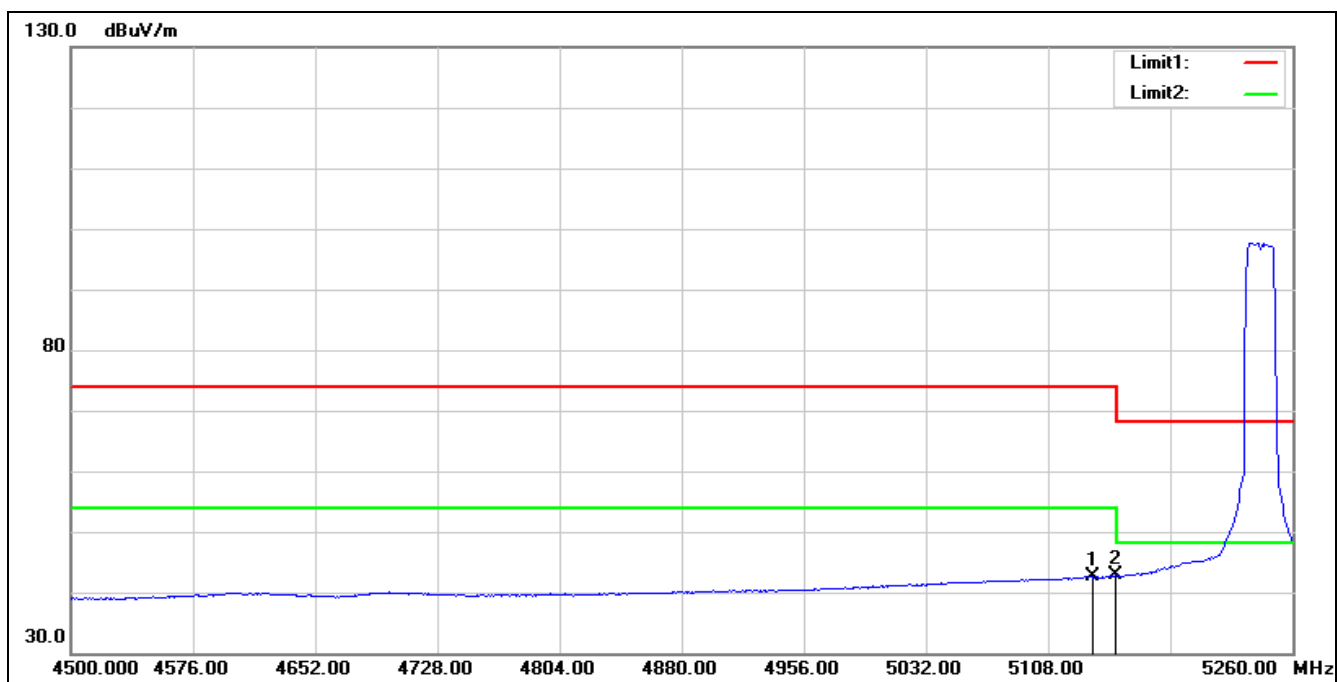


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5136.120	41.21	1.40	42.61	54.00	-11.39	AVG
2*	5150.000	41.42	1.38	42.80	54.00	-11.20	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5240 MHz
Remark:

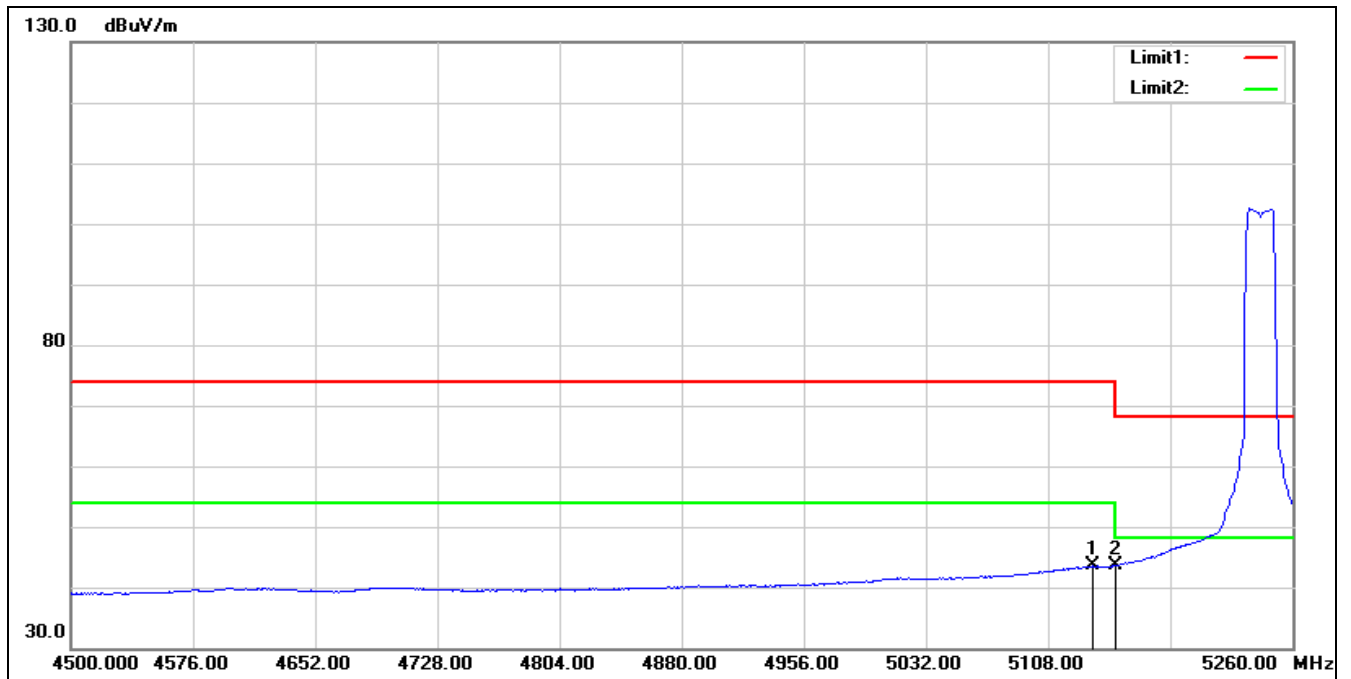

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5136.120	42.14	1.40	43.54	54.00	-10.46	AVG
2*	5150.000	42.26	1.38	43.64	54.00	-10.36	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

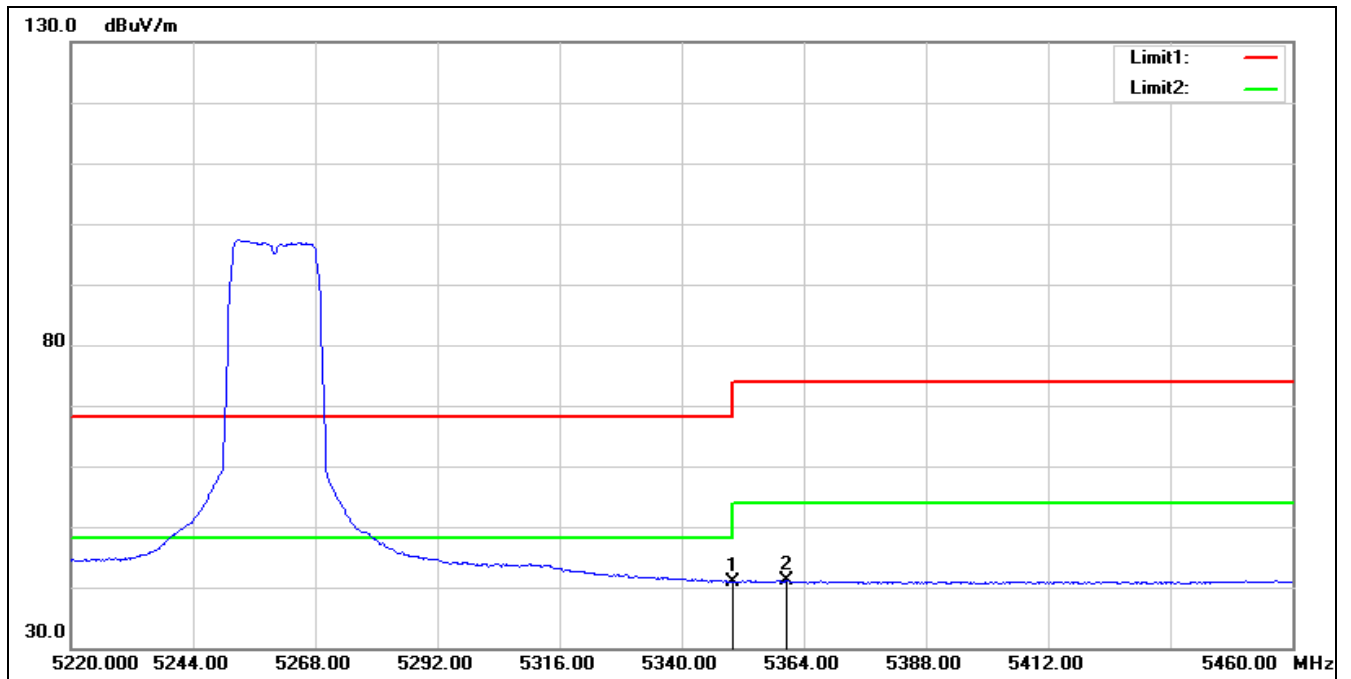


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.91	1.02	40.93	54.00	-13.07	AVG
2*	5360.640	39.99	1.09	41.08	54.00	-12.92	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11a 5260 MHz

Remark:

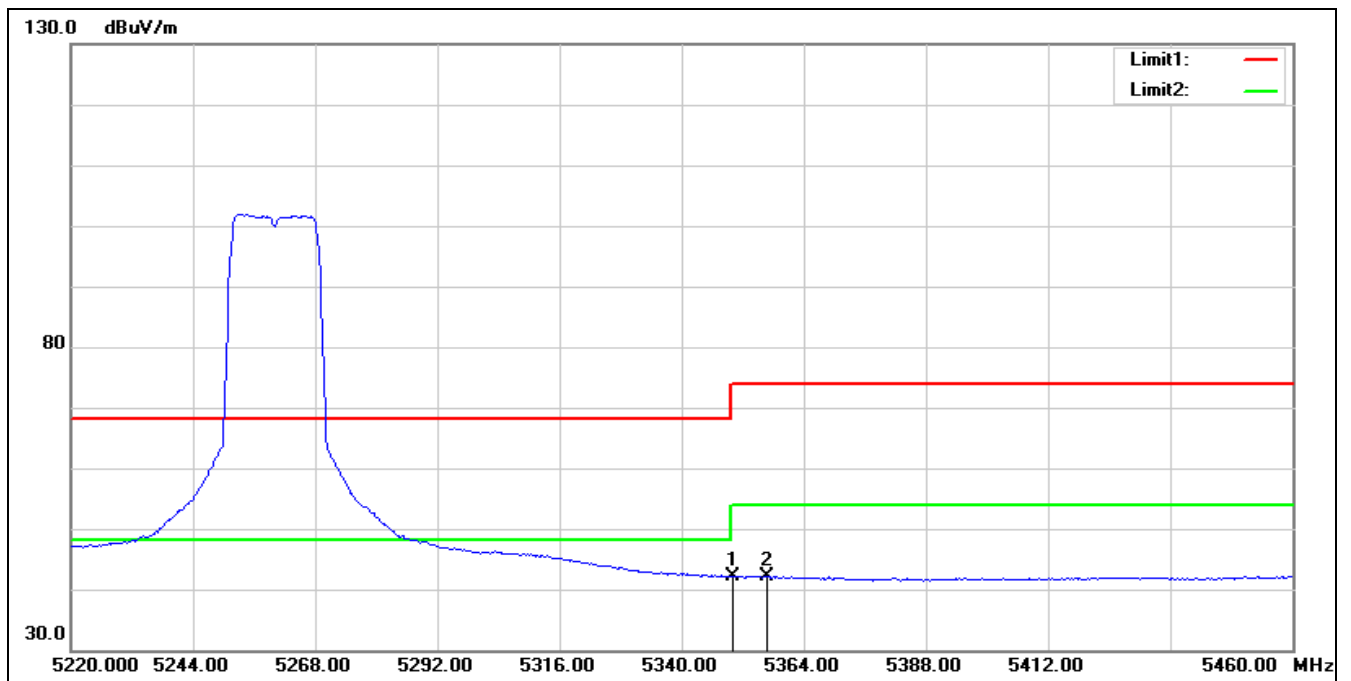


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.05	1.02	42.07	54.00	-11.93	AVG
2*	5356.800	41.13	1.07	42.20	54.00	-11.80	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

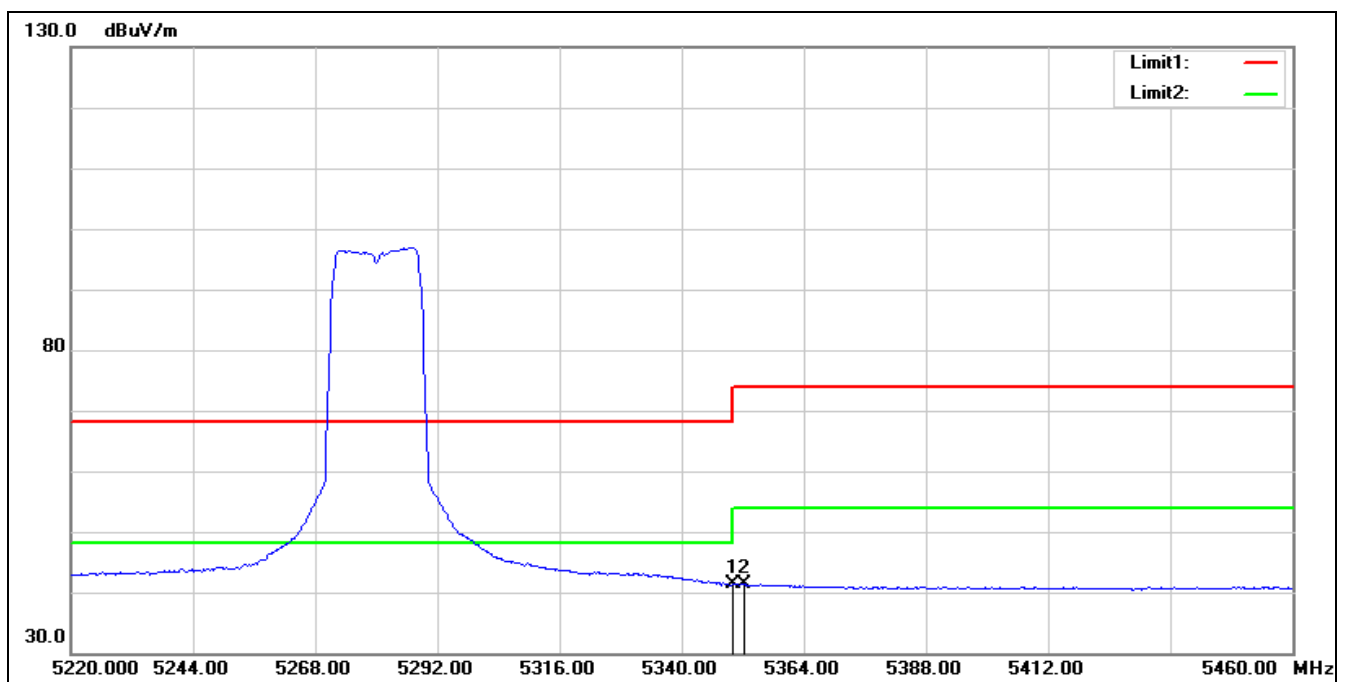


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.26	1.02	41.28	54.00	-12.72	AVG
2*	5352.240	40.42	1.03	41.45	54.00	-12.55	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5280 MHz		
Remark:			

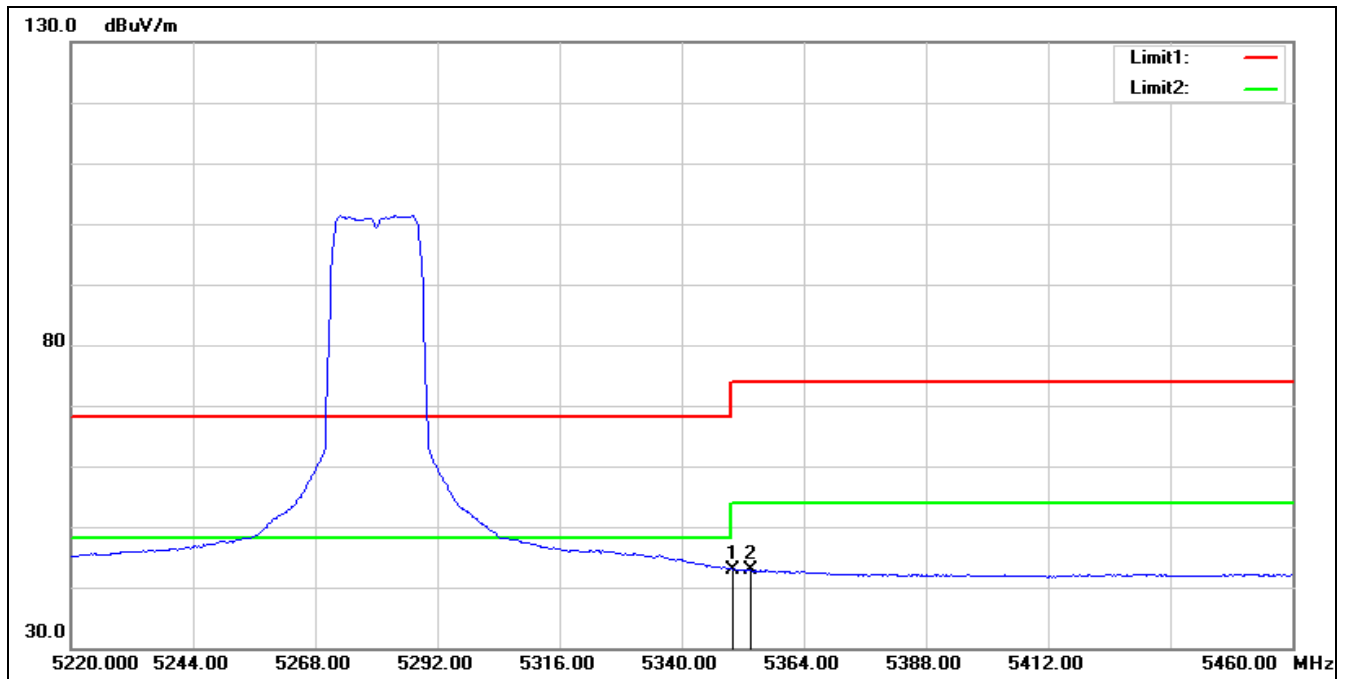


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	41.94	1.02	42.96	54.00	-11.04	AVG
2	5353.680	41.81	1.04	42.85	54.00	-11.15	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

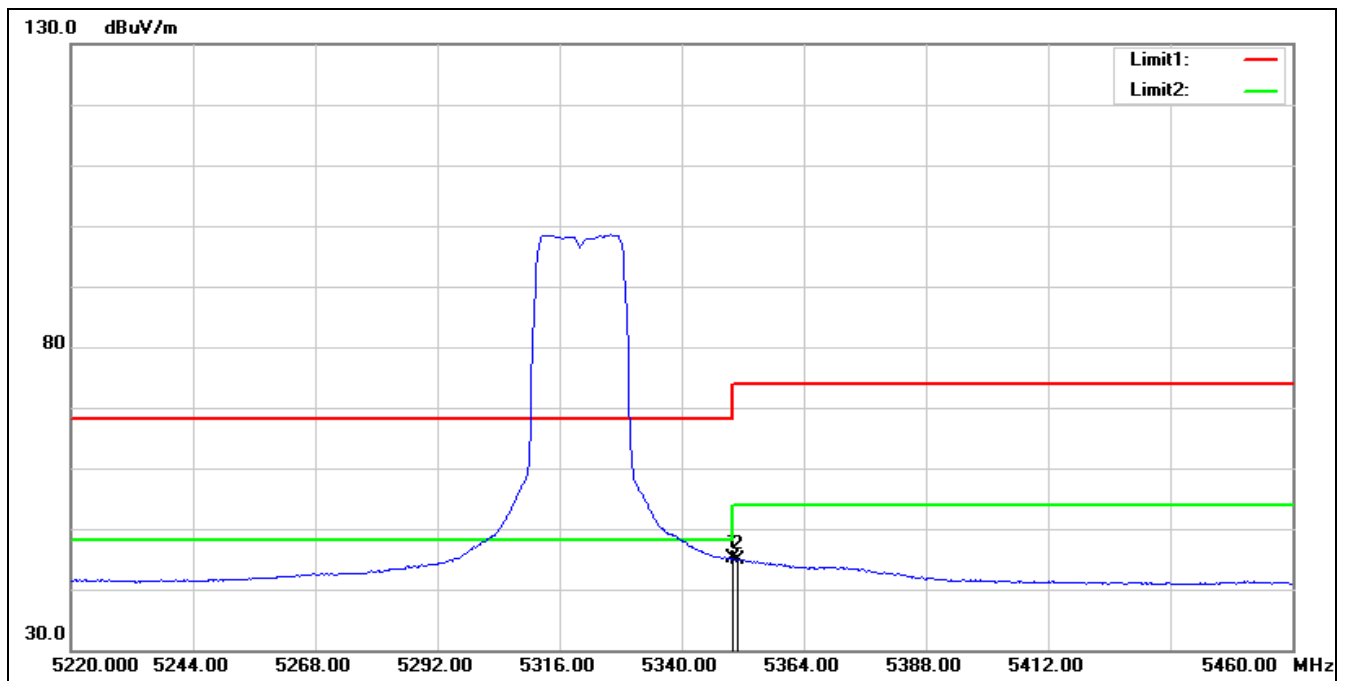


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	44.13	1.02	45.15	54.00	-8.85	AVG
2	5351.040	43.86	1.03	44.89	54.00	-9.11	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

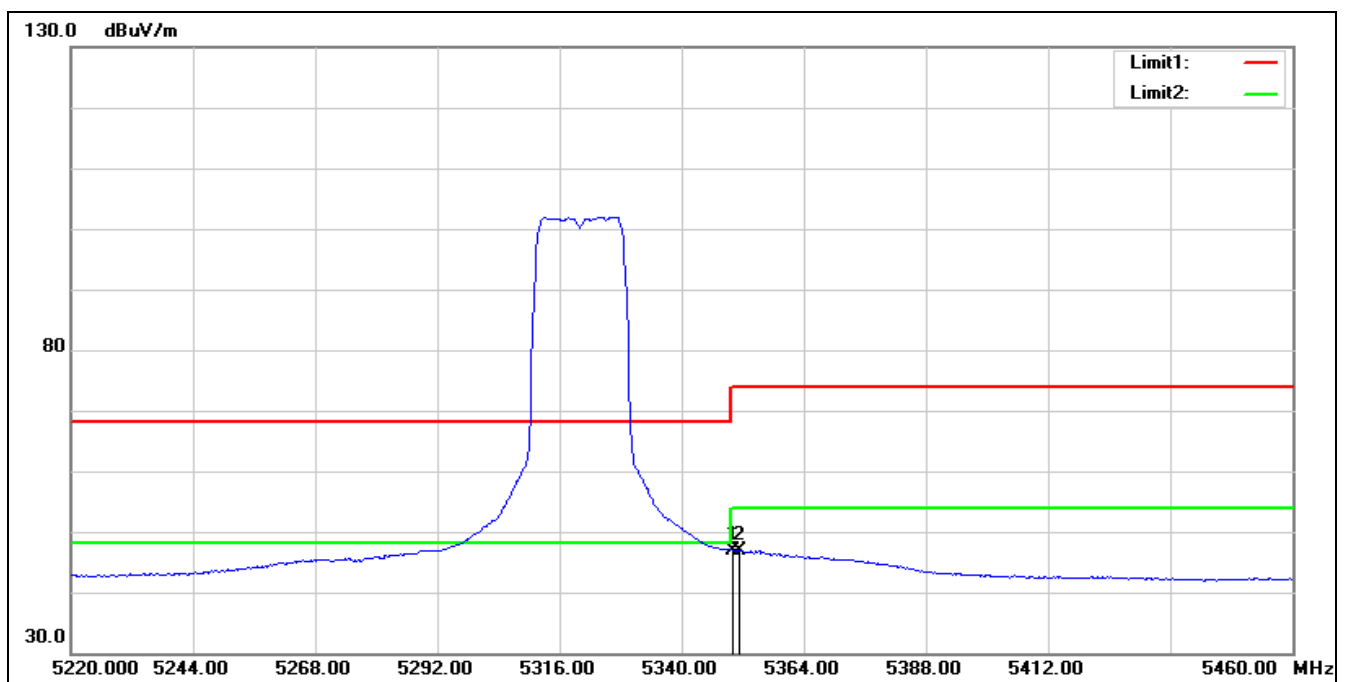


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	45.98	1.02	47.00	54.00	-7.00	AVG
2	5351.280	45.89	1.03	46.92	54.00	-7.08	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

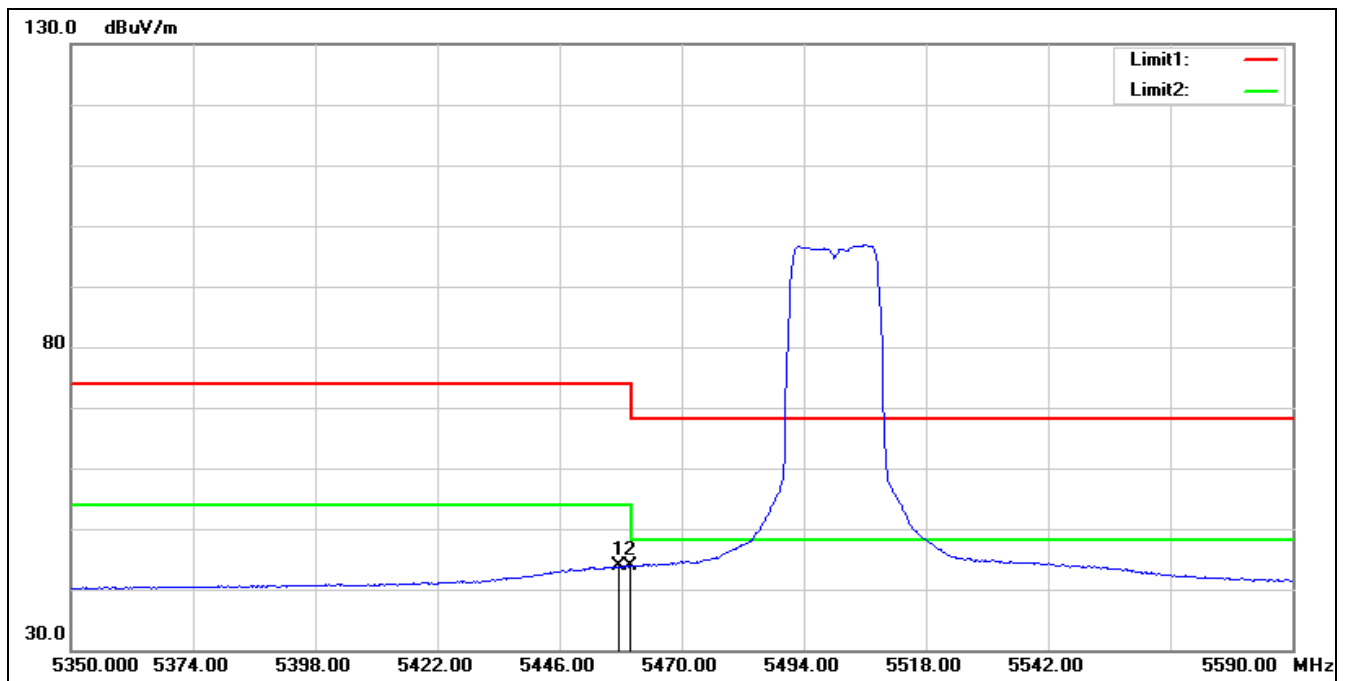


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.760	42.04	1.75	43.79	54.00	-10.21	AVG
2*	5460.000	42.17	1.75	43.92	54.00	-10.08	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5500 MHz
Remark:

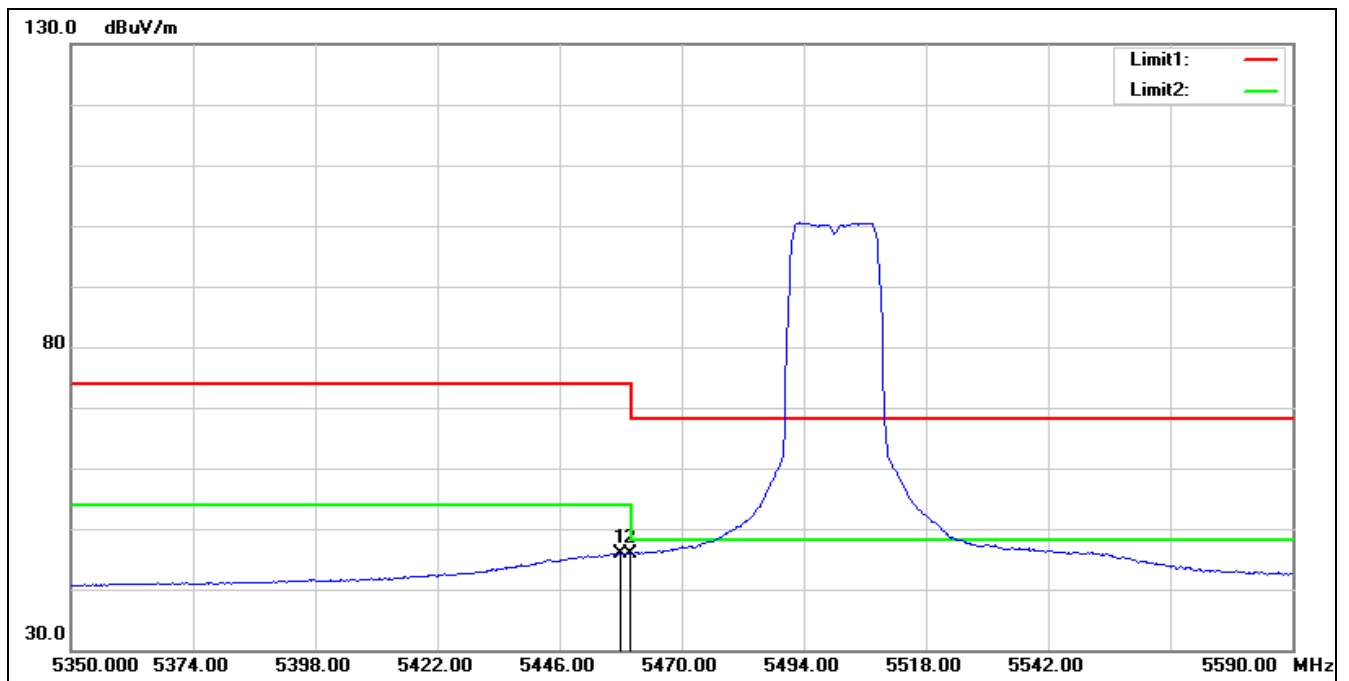


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.000	44.20	1.75	45.95	54.00	-8.05	AVG
2*	5460.000	44.24	1.75	45.99	54.00	-8.01	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5560 MHz		
Remark:			

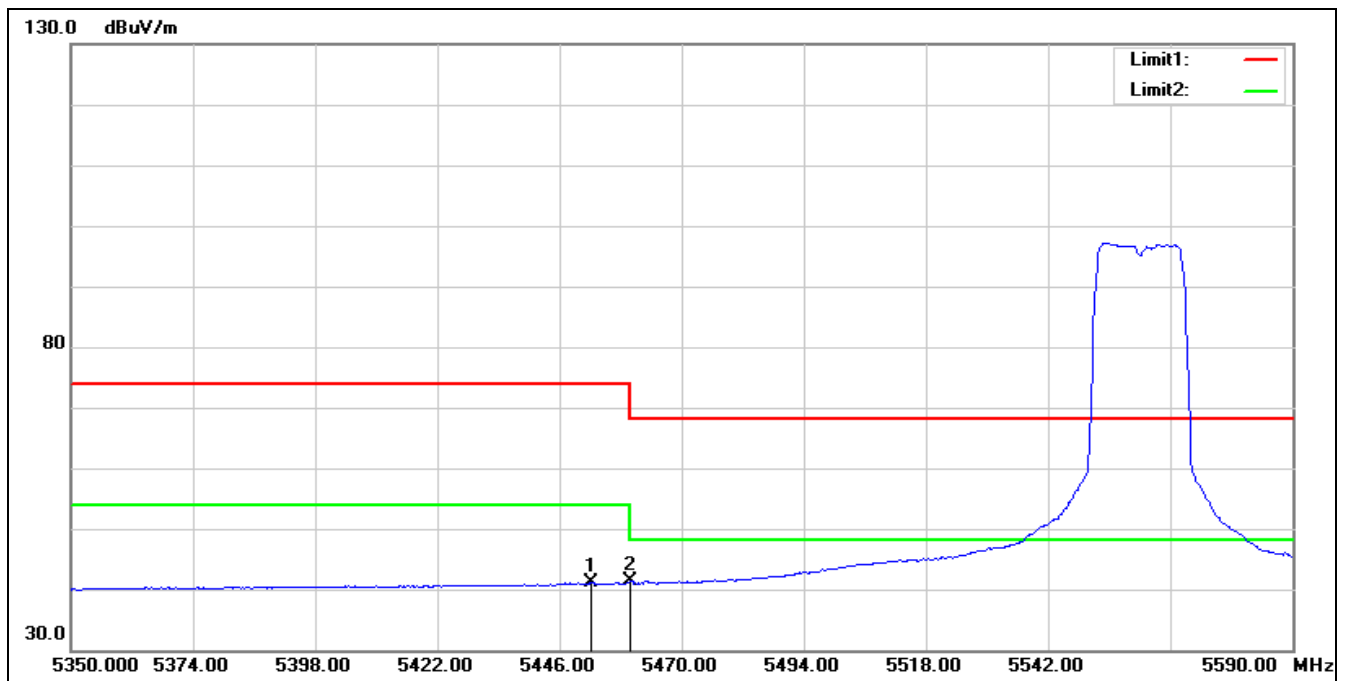


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.240	39.37	1.75	41.12	54.00	-12.88	AVG
2*	5460.000	39.51	1.75	41.26	54.00	-12.74	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5560 MHz
Remark:

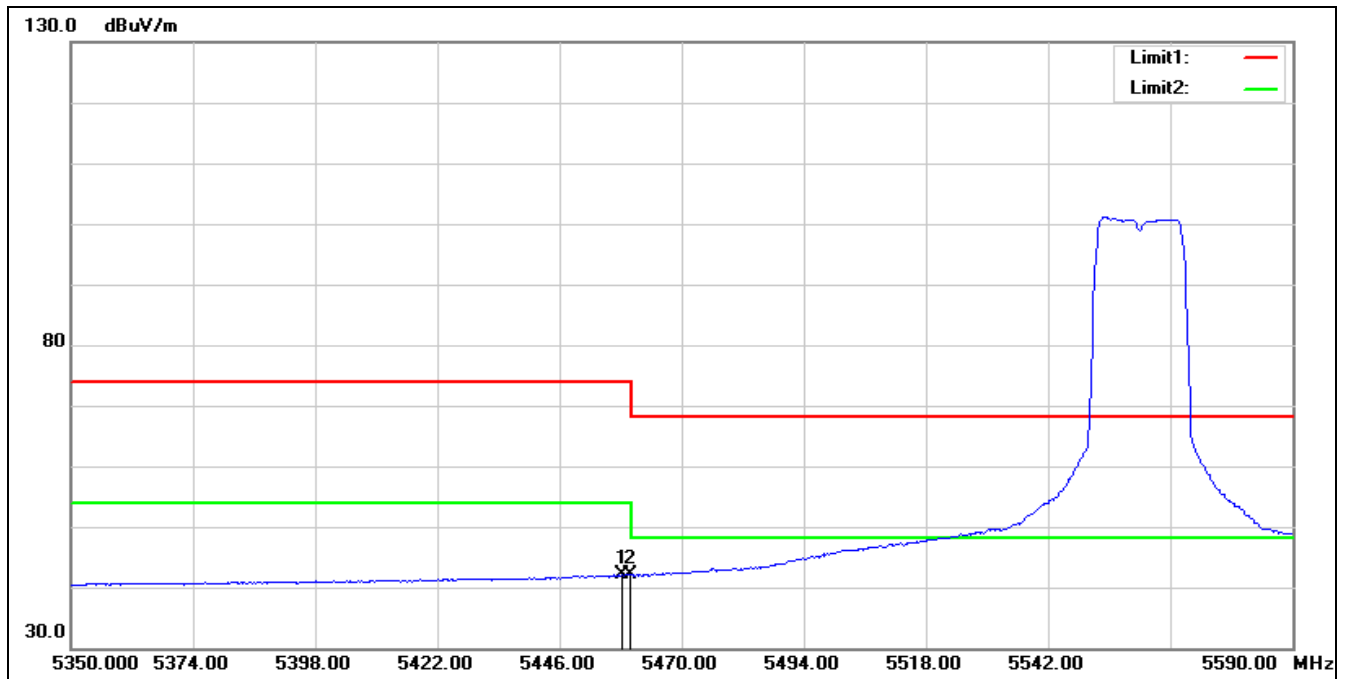


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.240	40.31	1.75	42.06	54.00	-11.94	AVG
2*	5460.000	40.33	1.75	42.08	54.00	-11.92	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			

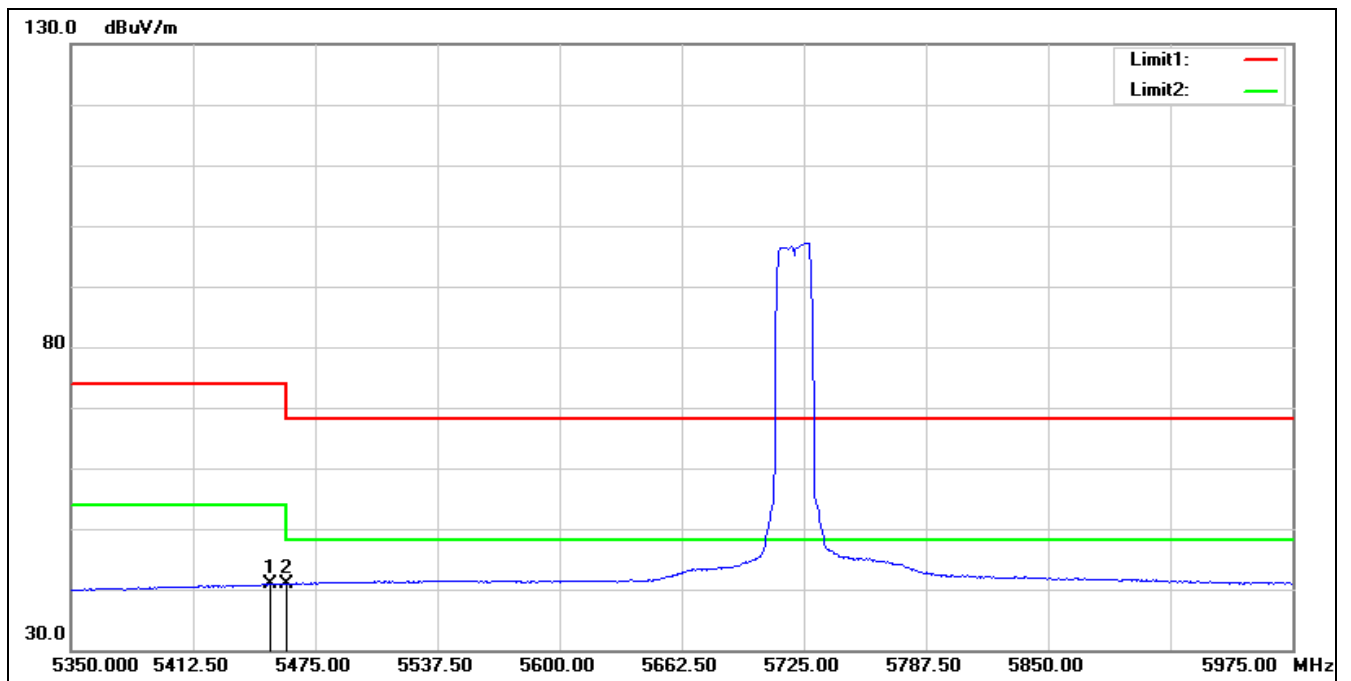

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5451.875	39.21	1.75	40.96	54.00	-13.04	AVG
2	5460.000	39.09	1.75	40.84	54.00	-13.16	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5720 MHz
Remark:

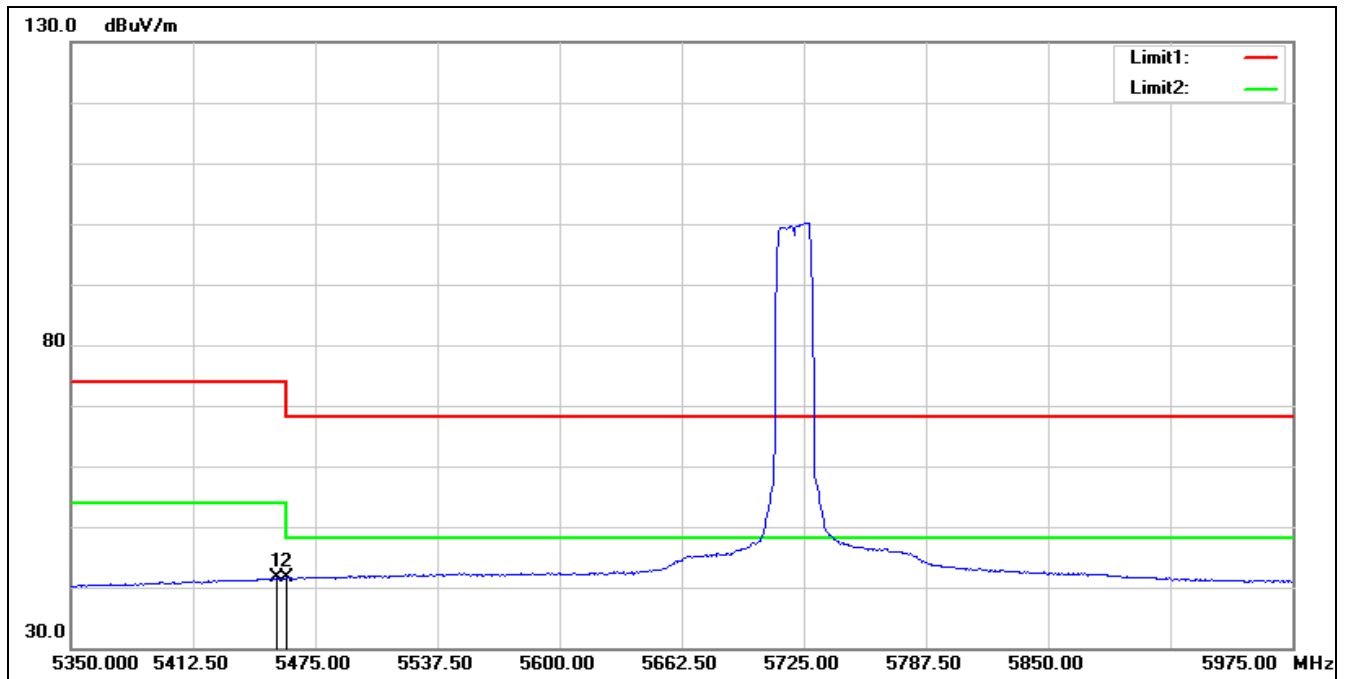


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.000	39.76	1.75	41.51	54.00	-12.49	AVG
2*	5460.000	39.83	1.75	41.58	54.00	-12.42	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5180 MHz

Remark:

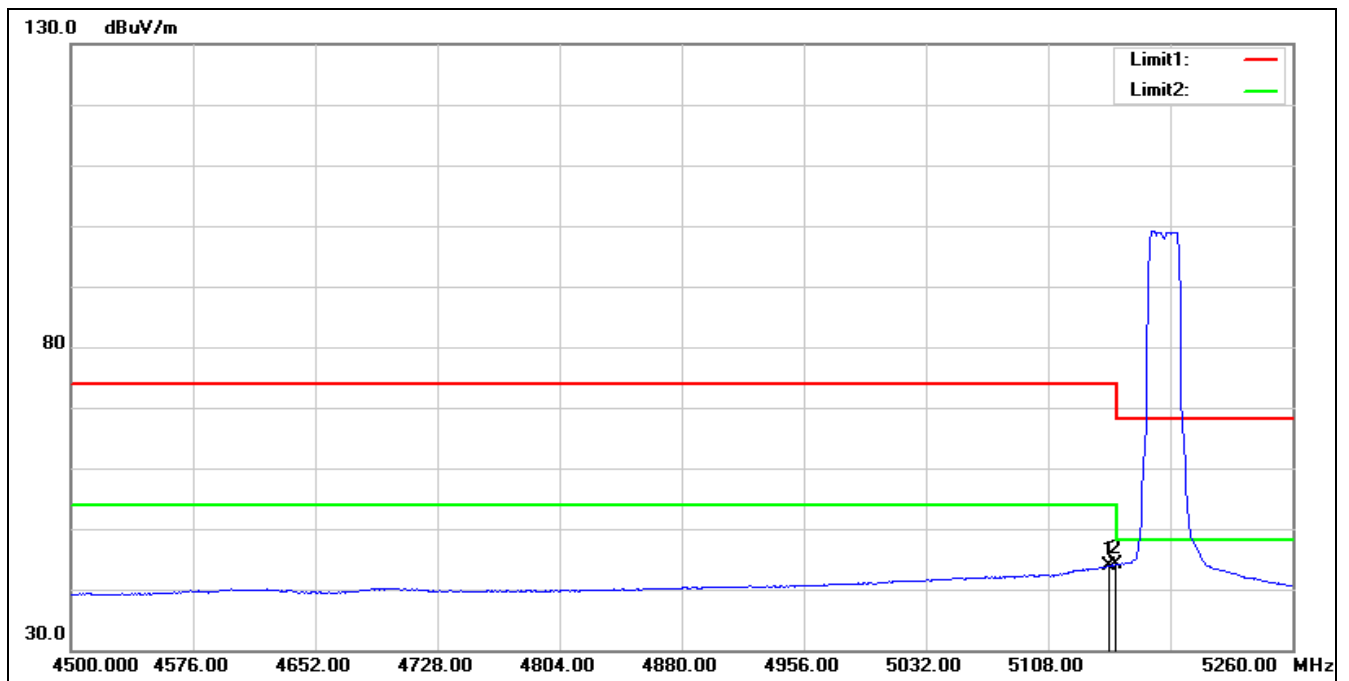


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.000	42.55	1.39	43.94	54.00	-10.06	AVG
2*	5150.000	42.68	1.38	44.06	54.00	-9.94	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5180 MHz
Remark:

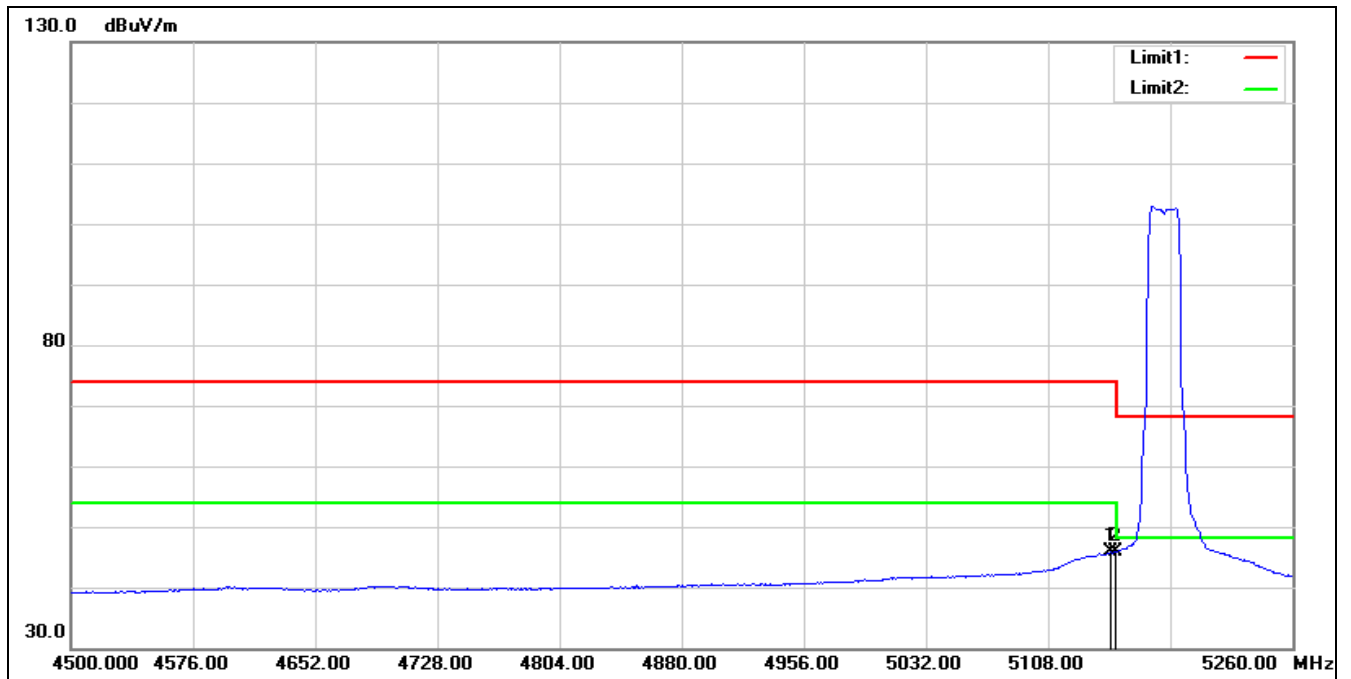


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	44.39	1.39	45.78	54.00	-8.22	AVG
2*	5150.000	44.53	1.38	45.91	54.00	-8.09	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5200 MHz		
Remark:			

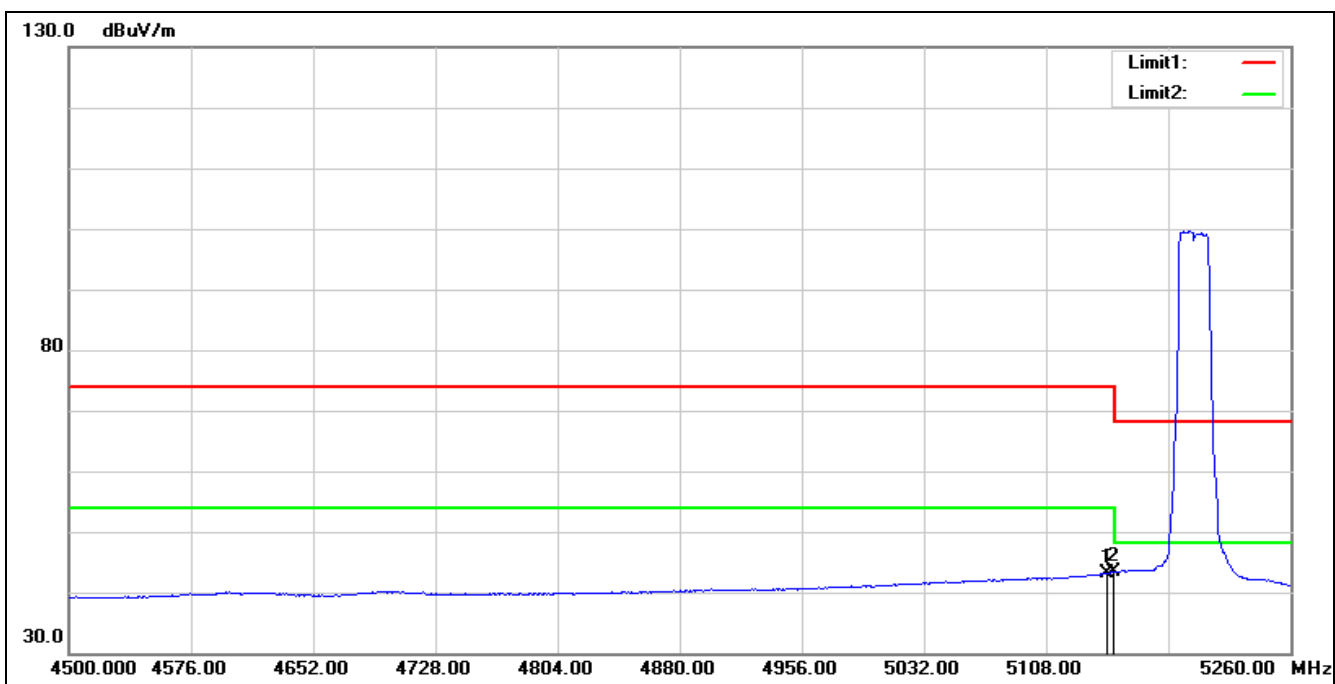


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.000	41.85	1.39	43.24	54.00	-10.76	AVG
2*	5150.000	42.00	1.38	43.38	54.00	-10.62	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5200 MHz		
Remark:			

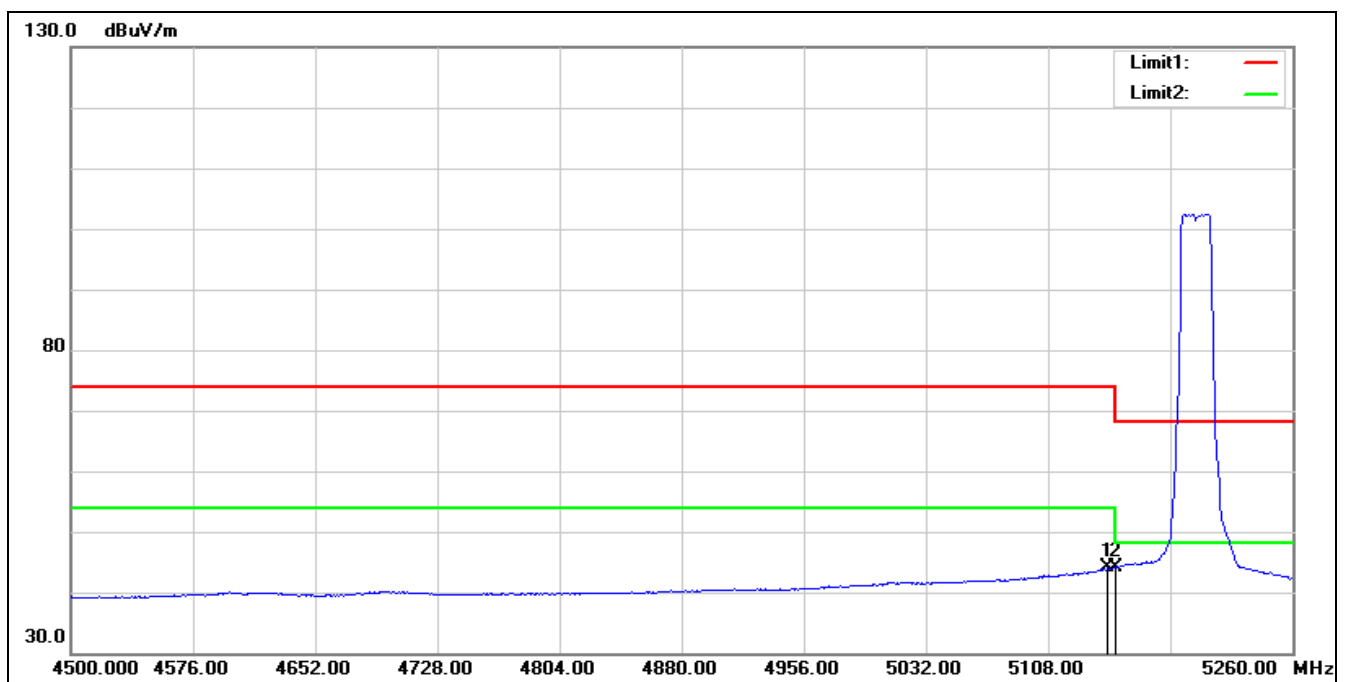


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	42.63	1.38	44.01	54.00	-9.99	AVG
2*	5150.000	42.78	1.38	44.16	54.00	-9.84	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5240 MHz
Remark:

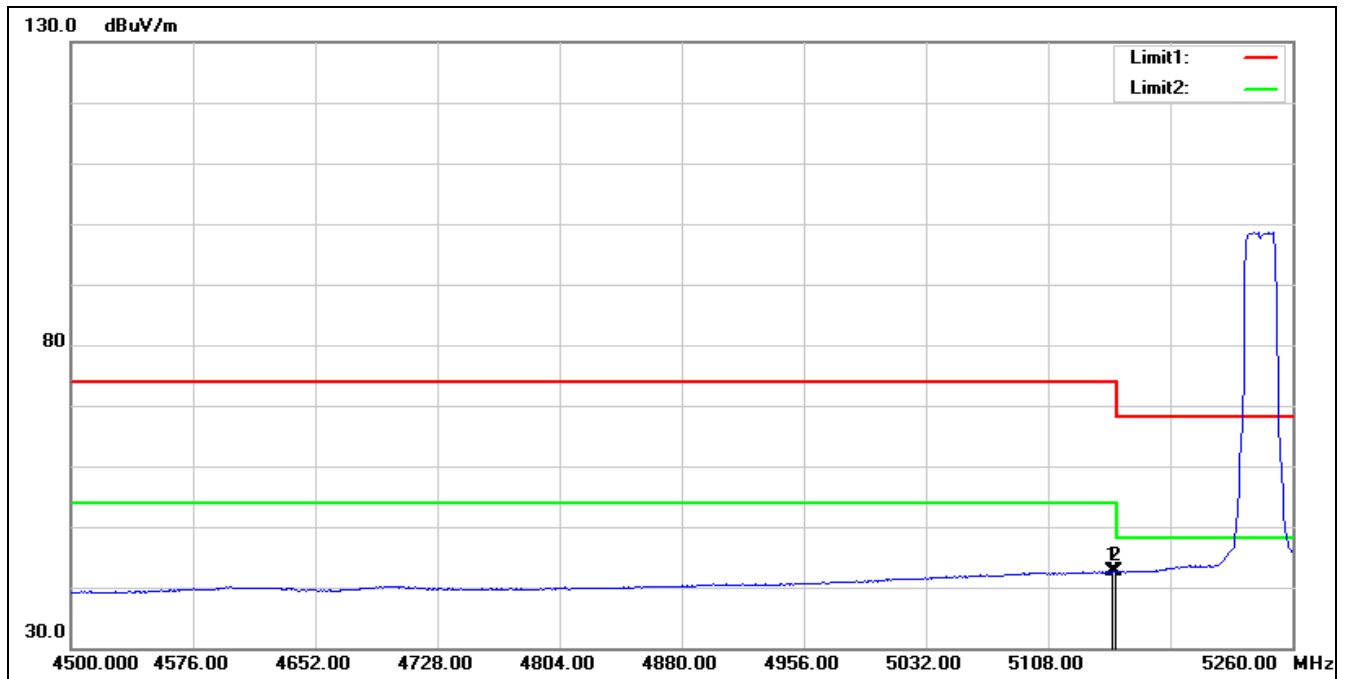

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5147.520	41.24	1.38	42.62	54.00	-11.38	AVG
2	5150.000	41.17	1.38	42.55	54.00	-11.45	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5240 MHz
Remark:

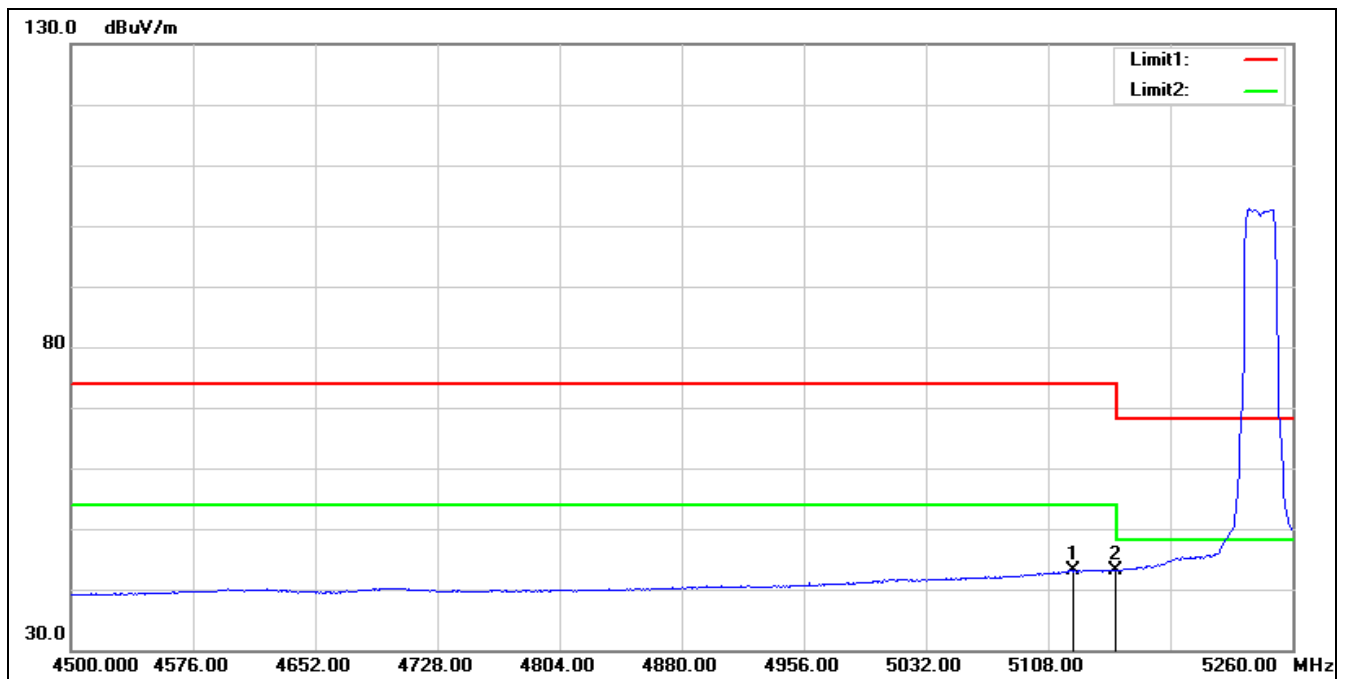


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5123.960	41.80	1.40	43.20	54.00	-10.80	AVG
2	5150.000	41.77	1.38	43.15	54.00	-10.85	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5260 MHz

Remark:

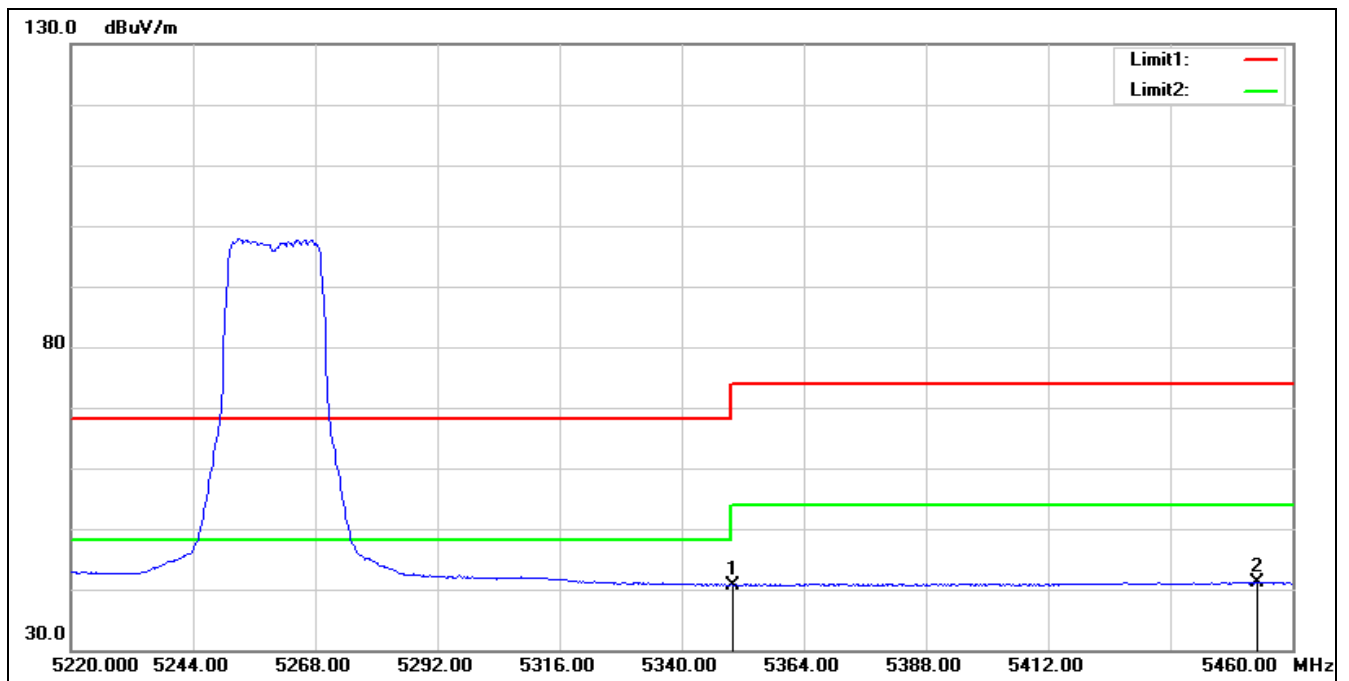


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.66	1.02	40.68	54.00	-13.32	AVG
2*	5453.040	39.50	1.75	41.25	54.00	-12.75	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5260 MHz

Remark:

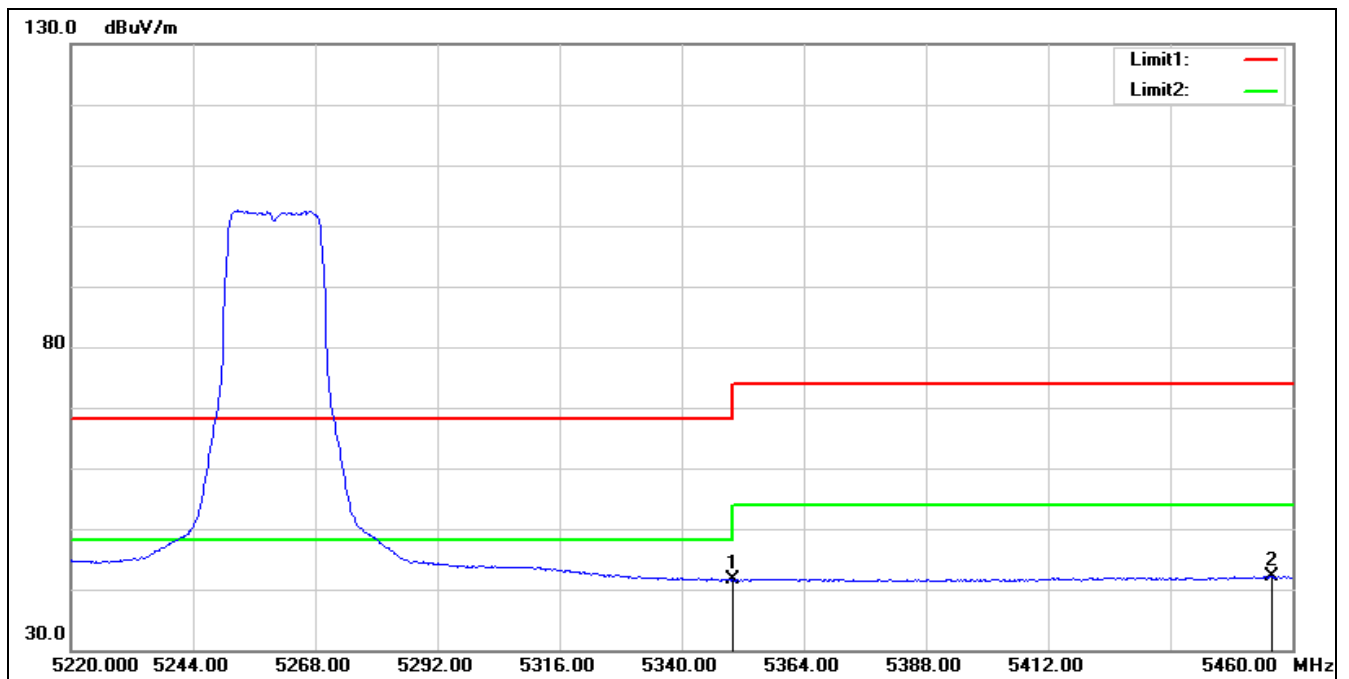

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.53	1.02	41.55	54.00	-12.45	AVG
2*	5455.920	40.44	1.75	42.19	54.00	-11.81	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5280 MHz		
Remark:			

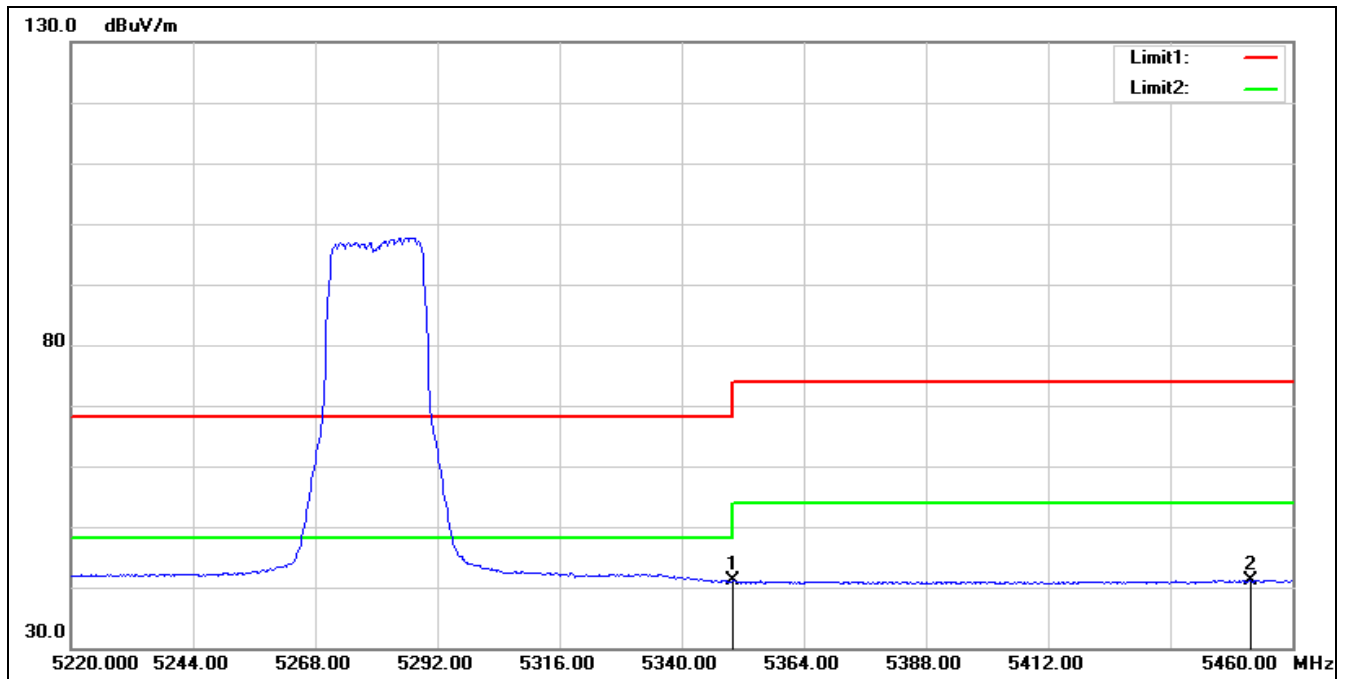


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.08	1.02	41.10	54.00	-12.90	AVG
2*	5451.840	39.46	1.75	41.21	54.00	-12.79	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5280 MHz

Remark:

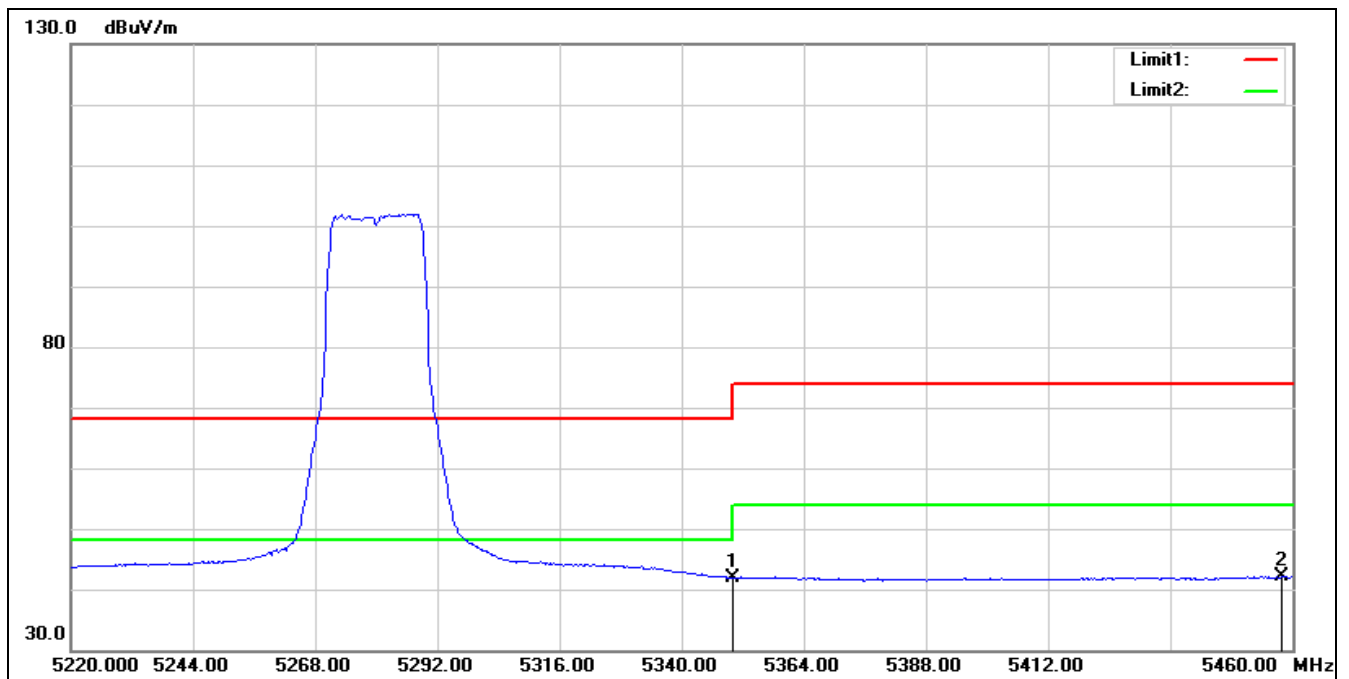


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.97	1.02	41.99	54.00	-12.01	AVG
2*	5457.840	40.40	1.75	42.15	54.00	-11.85	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5320 MHz
Remark:

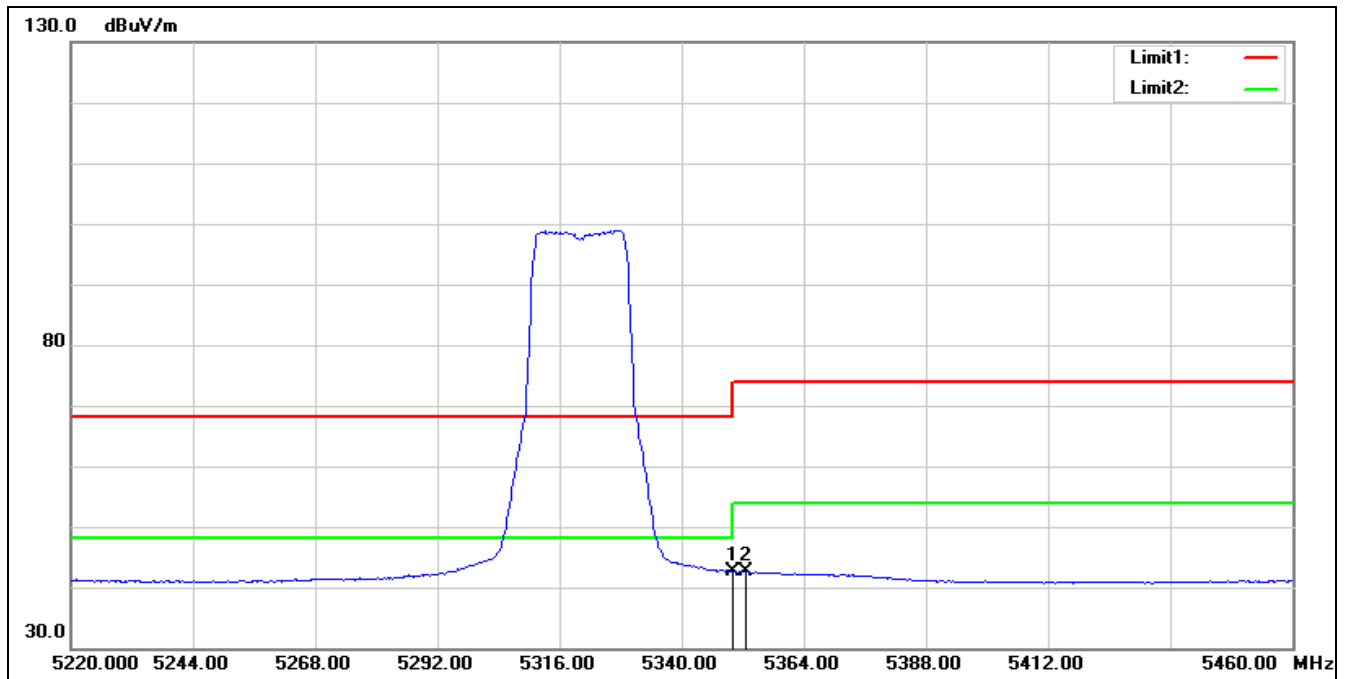


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.58	1.02	42.60	54.00	-11.40	AVG
2*	5352.720	41.58	1.04	42.62	54.00	-11.38	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5320 MHz		
Remark:			

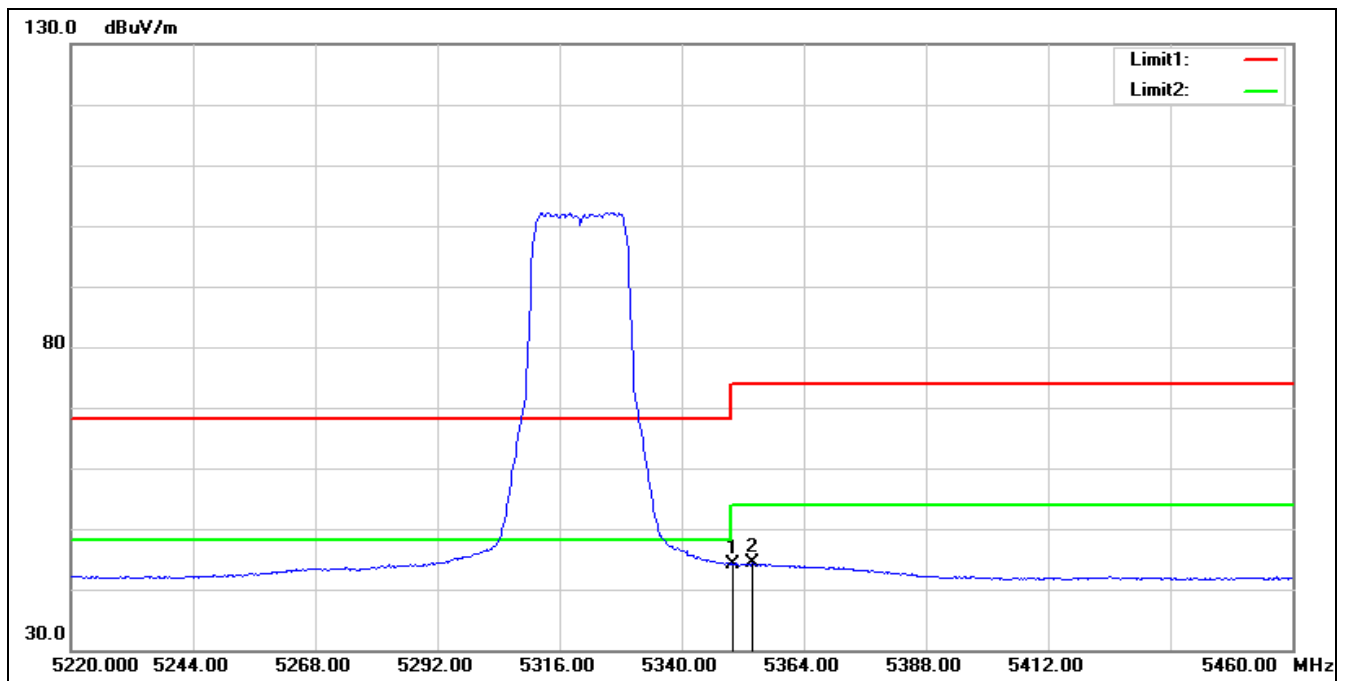


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	43.15	1.02	44.17	54.00	-9.83	AVG
2*	5353.920	43.23	1.04	44.27	54.00	-9.73	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5500 MHz
Remark:

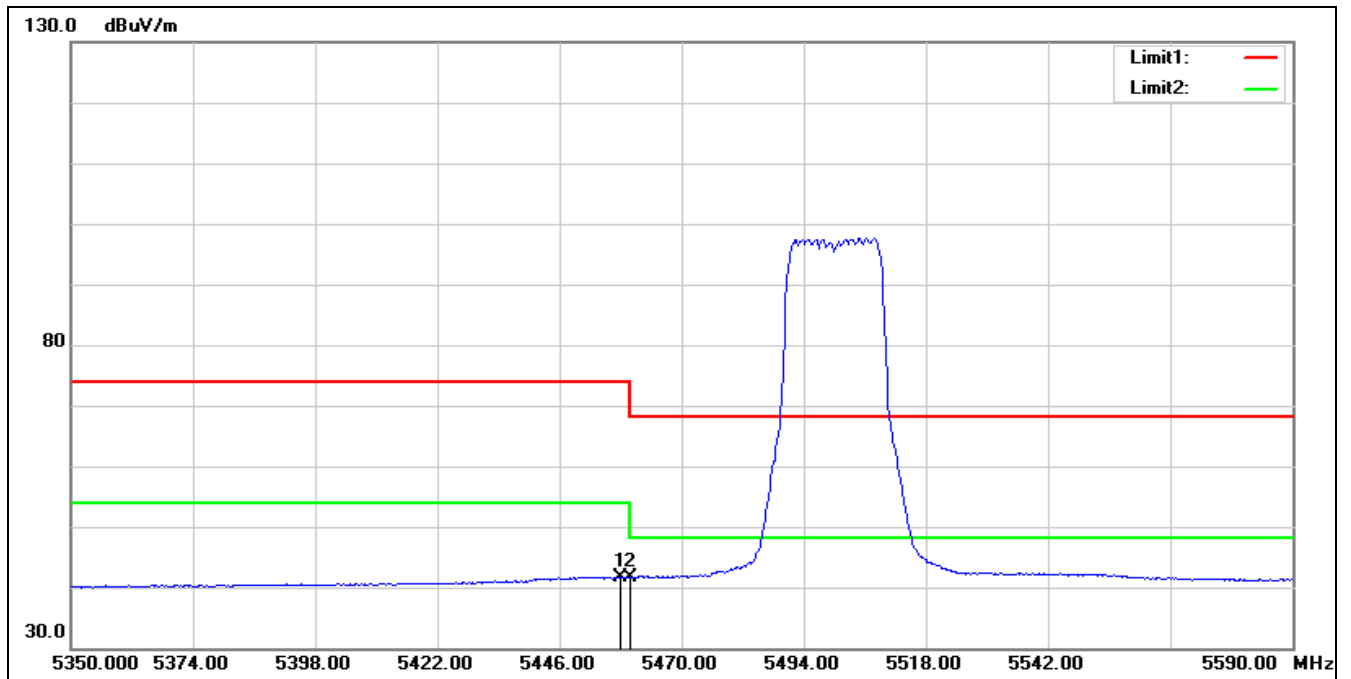


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.000	40.00	1.75	41.75	54.00	-12.25	AVG
2	5460.000	39.92	1.75	41.67	54.00	-12.33	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5500 MHz
Remark:

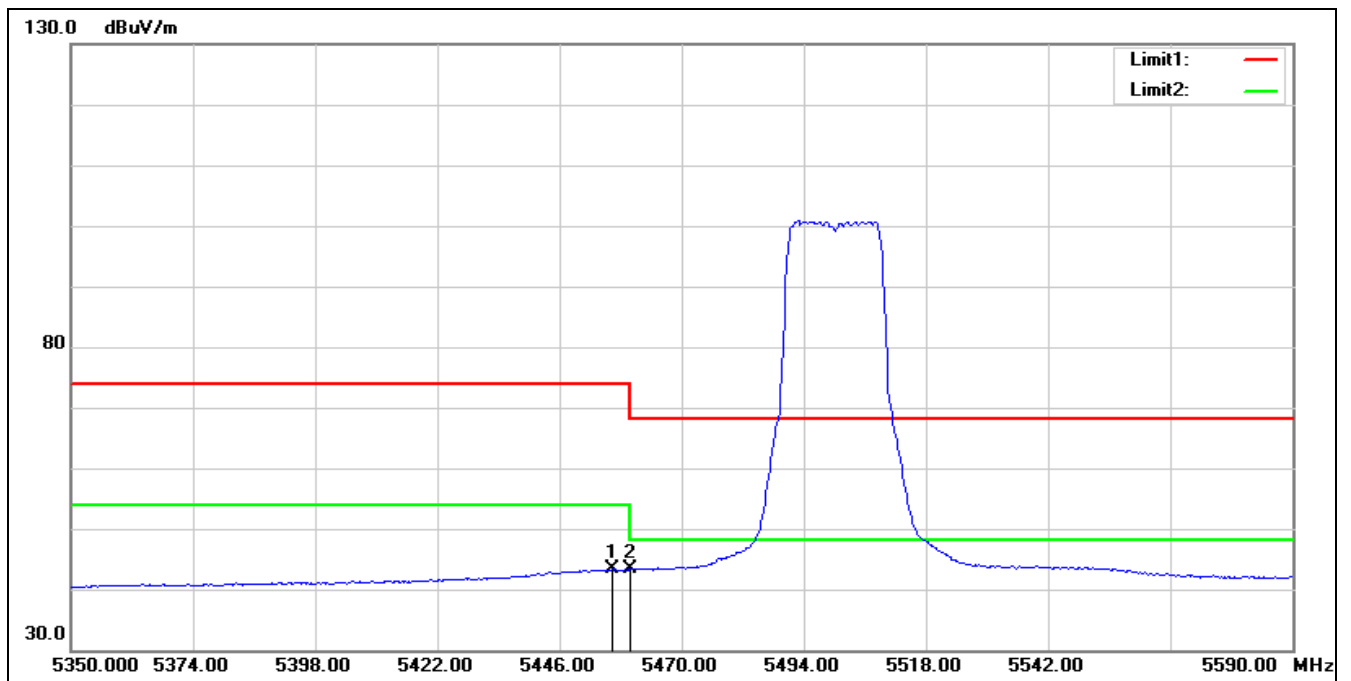


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.320	41.57	1.75	43.32	54.00	-10.68	AVG
2*	5460.000	41.62	1.75	43.37	54.00	-10.63	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5560 MHz
Remark:

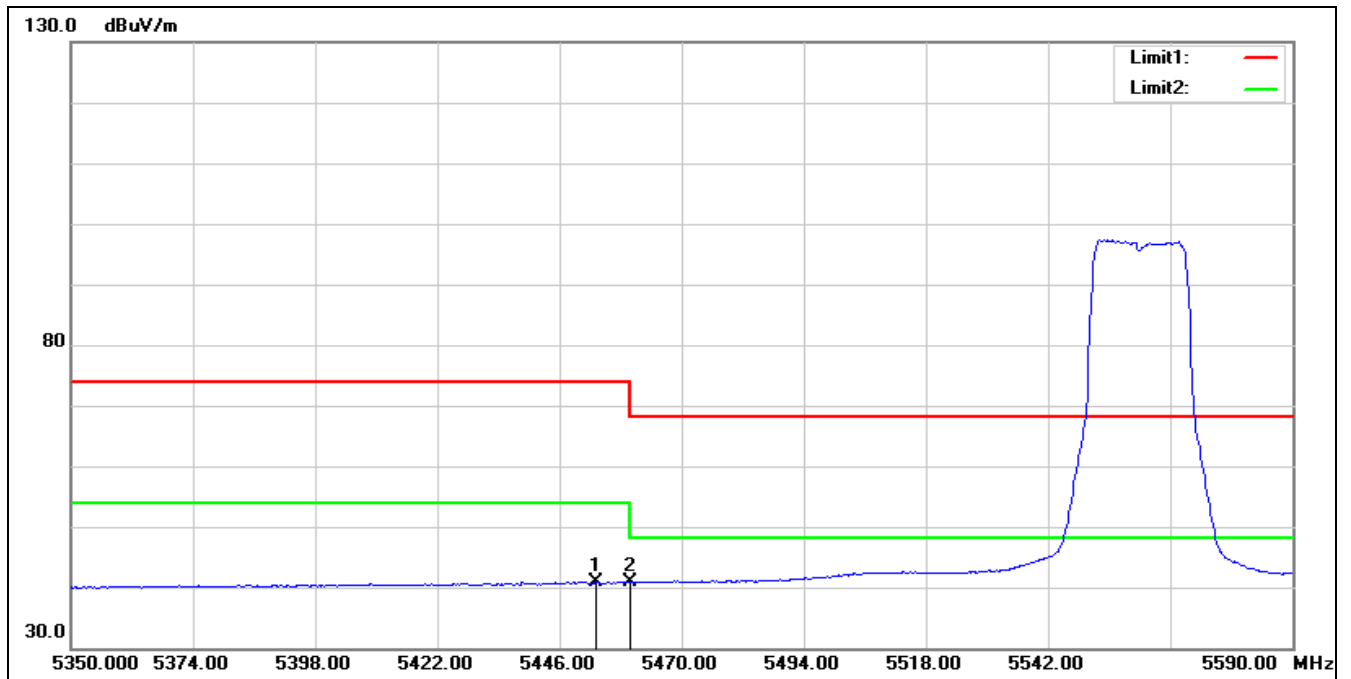


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5453.200	39.19	1.75	40.94	54.00	-13.06	AVG
2	5460.000	39.04	1.75	40.79	54.00	-13.21	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5560 MHz		
Remark:			

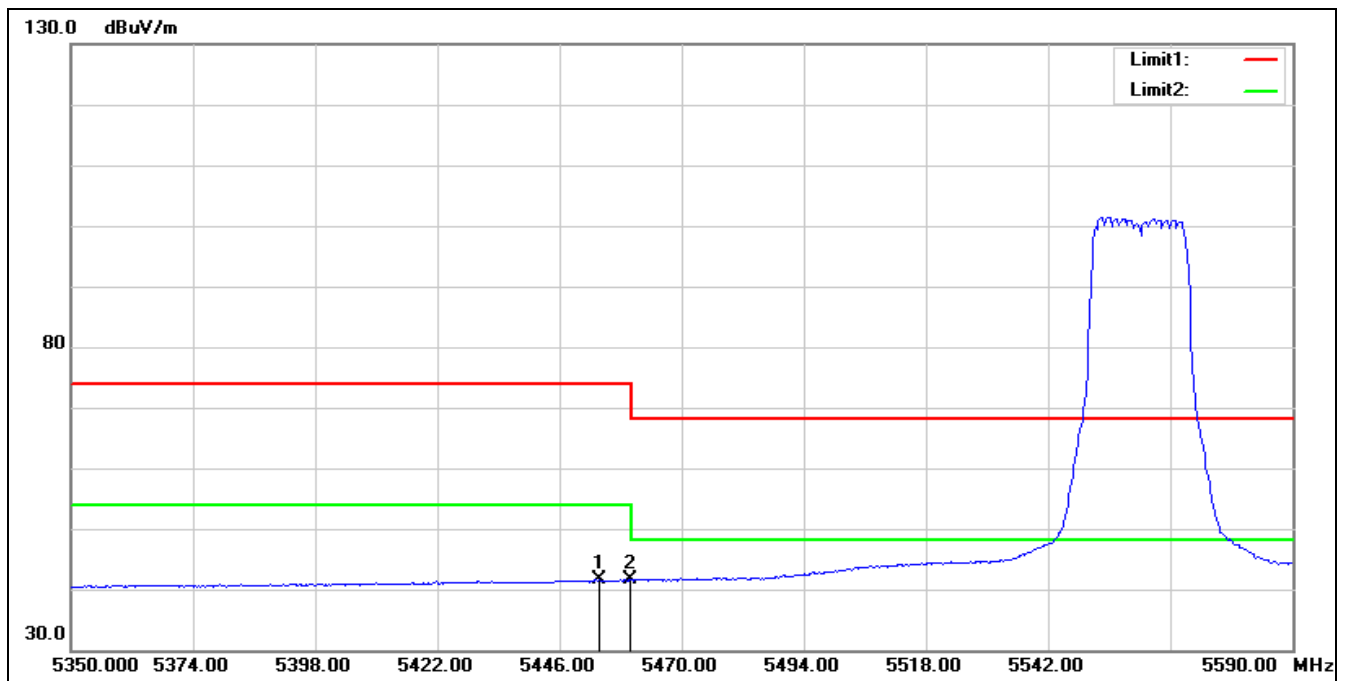

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.920	39.82	1.75	41.57	54.00	-12.43	AVG
2*	5460.000	39.84	1.75	41.59	54.00	-12.41	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5720 MHz		
Remark:			

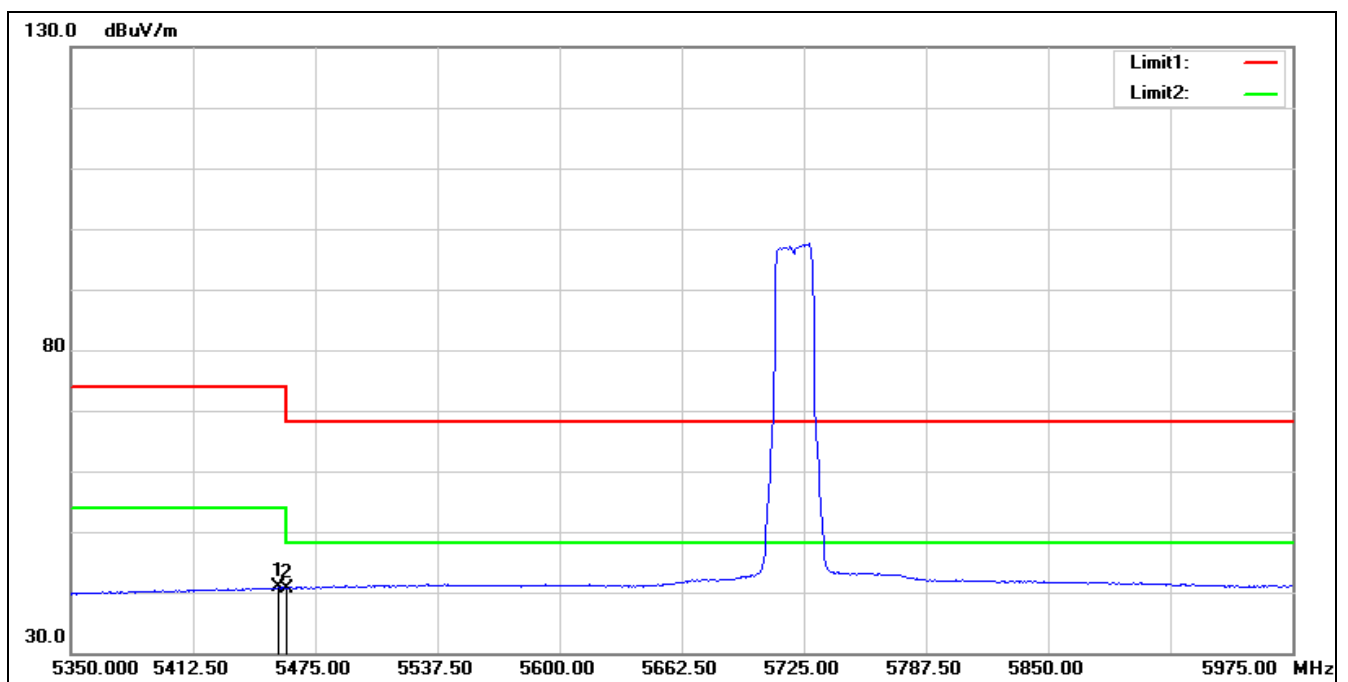


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.250	39.02	1.75	40.77	54.00	-13.23	AVG
2	5460.000	38.96	1.75	40.71	54.00	-13.29	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5720 MHz

Remark:

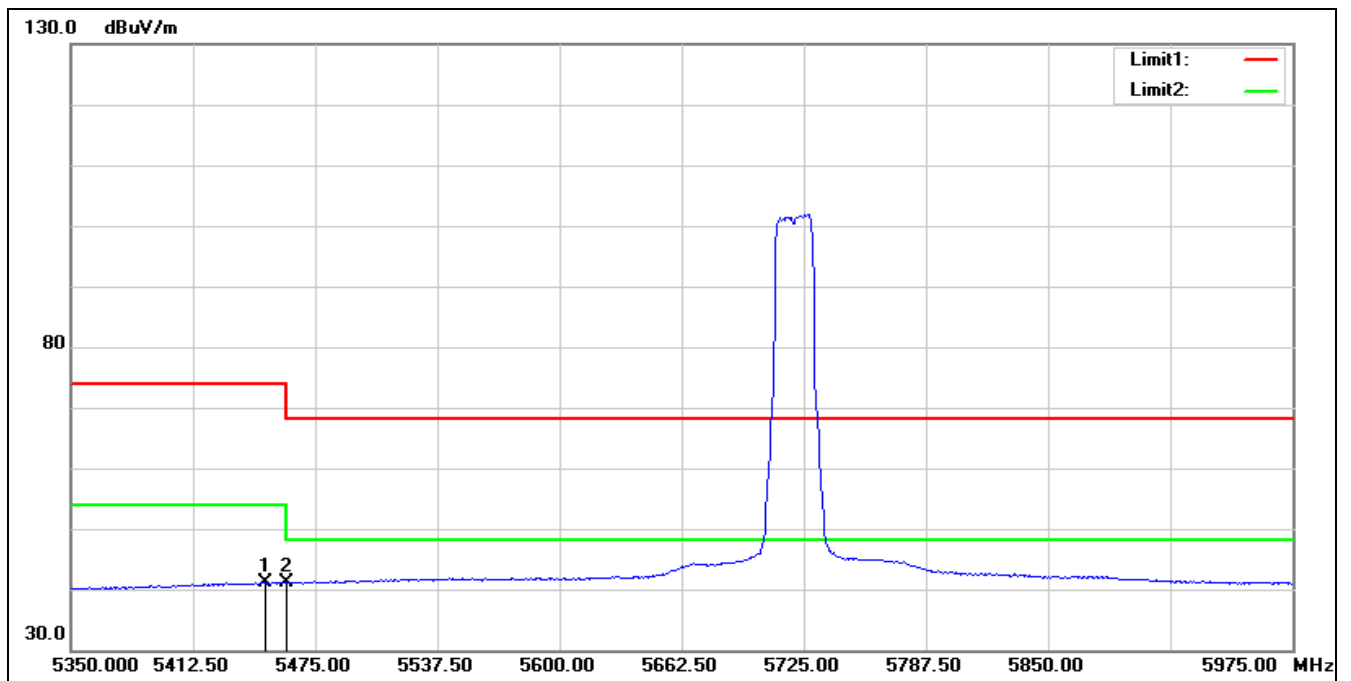


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5449.375	39.45	1.74	41.19	54.00	-12.81	AVG
2	5460.000	39.28	1.75	41.03	54.00	-12.97	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5190 MHz

Remark:

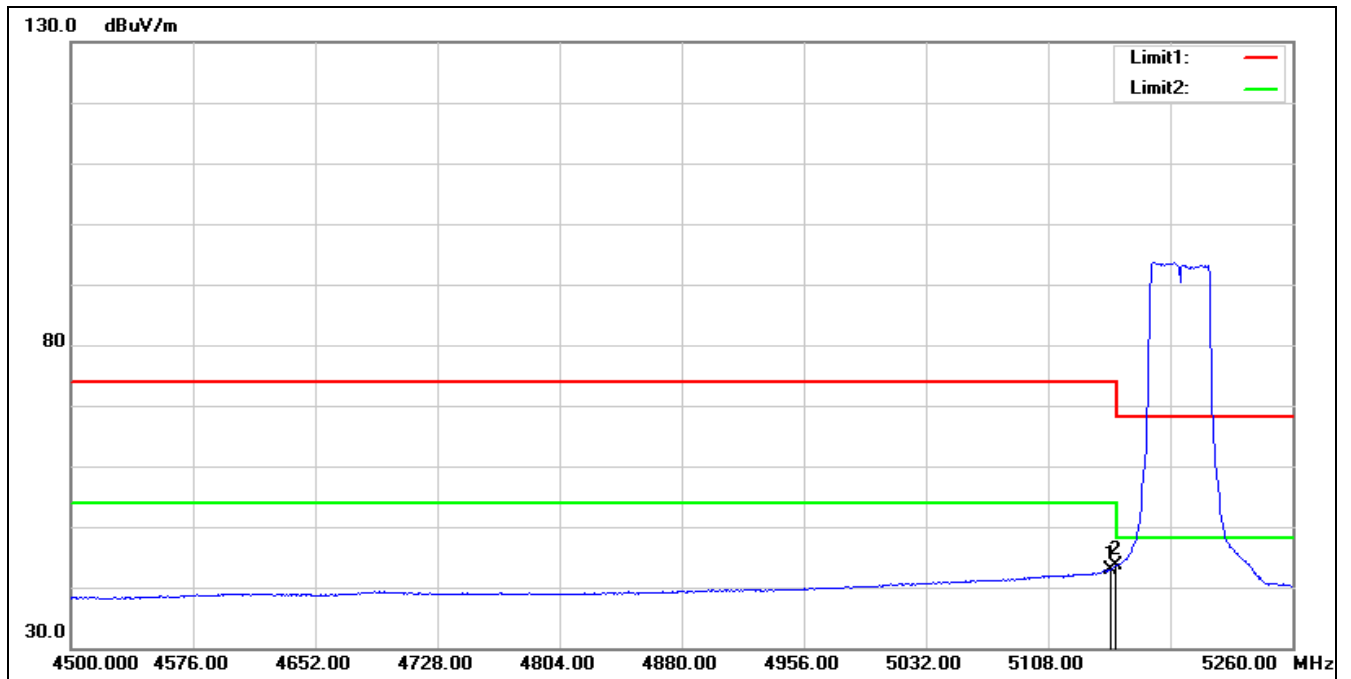


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	41.59	1.39	42.98	54.00	-11.02	AVG
2*	5150.000	42.30	1.38	43.68	54.00	-10.32	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5190 MHz		
Remark:			

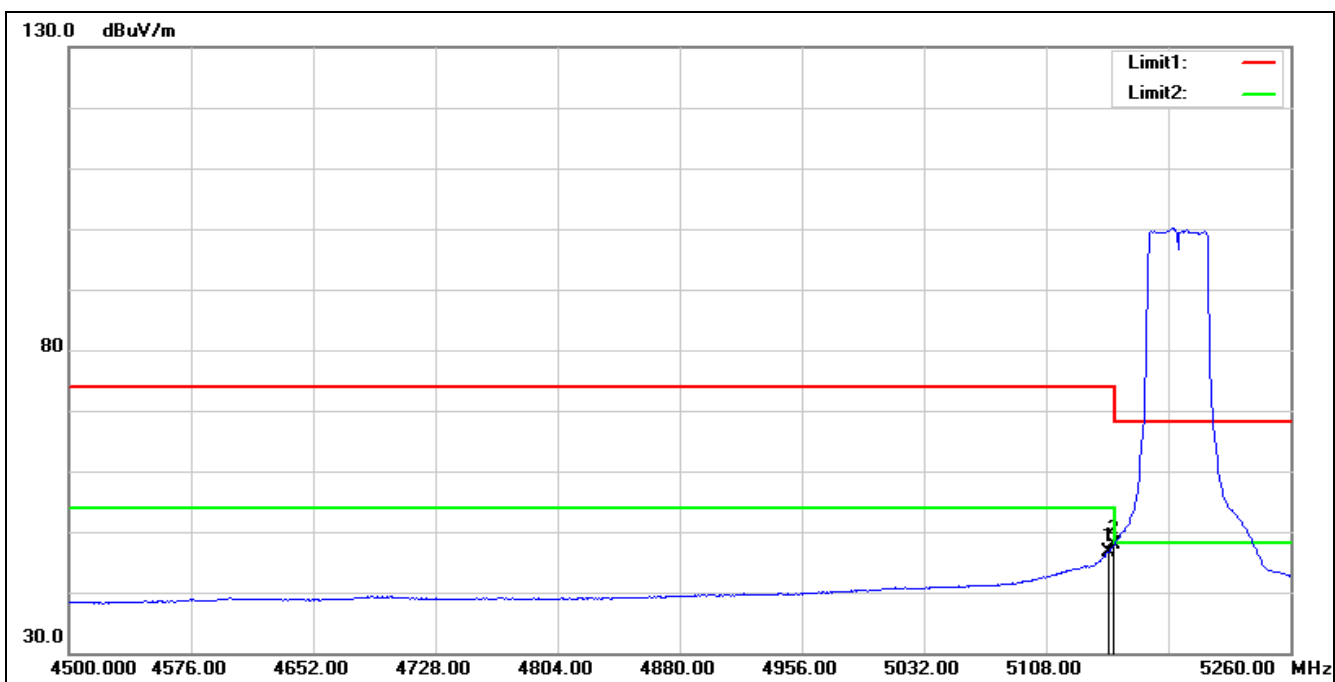


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	45.21	1.39	46.60	54.00	-7.40	AVG
2*	5150.000	46.61	1.38	47.99	54.00	-6.01	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5230 MHz		
Remark:			

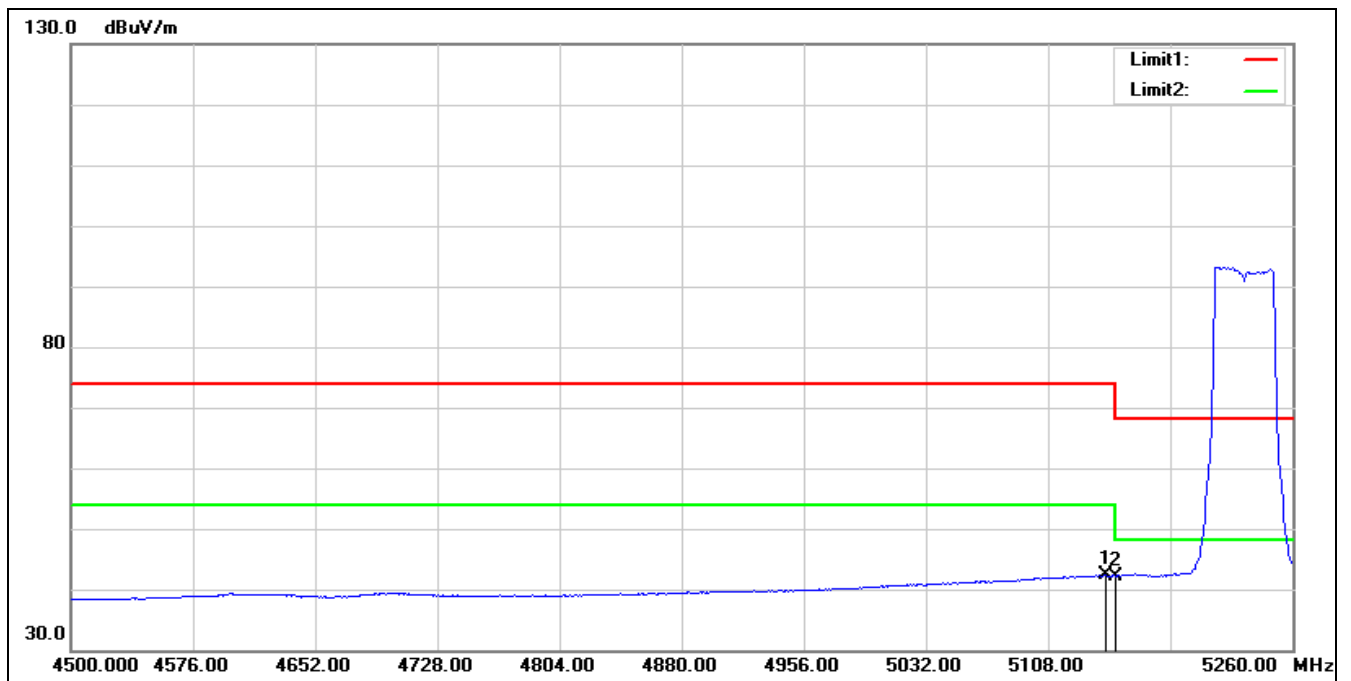

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5143.720	41.10	1.38	42.48	54.00	-11.52	AVG
2	5150.000	40.83	1.38	42.21	54.00	-11.79	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5230 MHz
Remark:

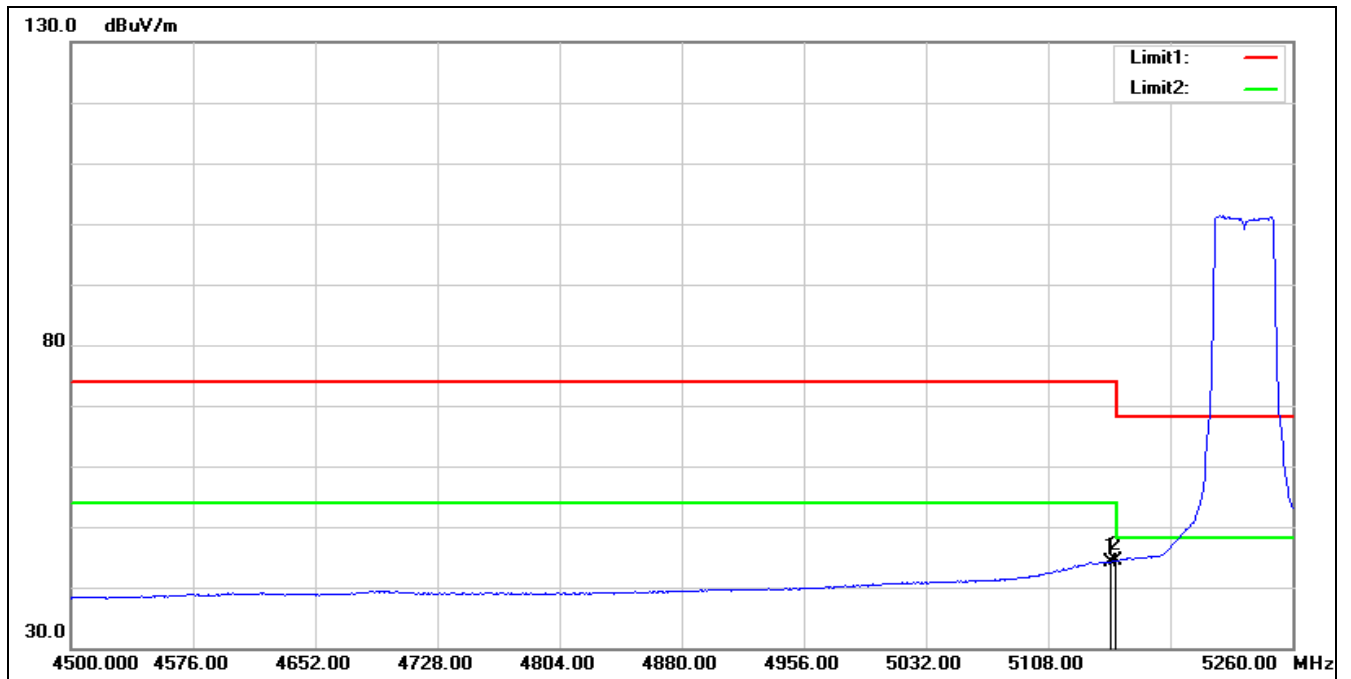


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	42.80	1.39	44.19	54.00	-9.81	AVG
2*	5150.000	43.02	1.38	44.40	54.00	-9.60	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5270 MHz

Remark:

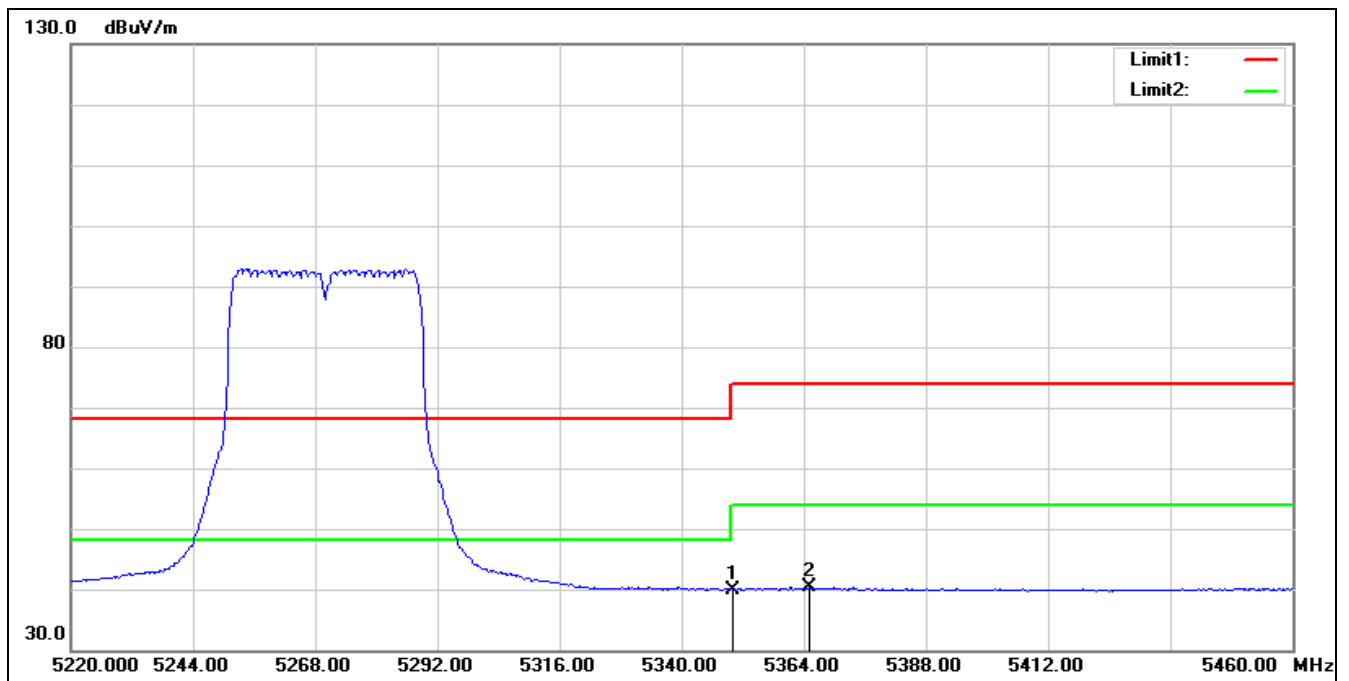


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	38.91	1.02	39.93	54.00	-14.07	AVG
2*	5364.960	39.20	1.13	40.33	54.00	-13.67	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5270 MHz

Remark:

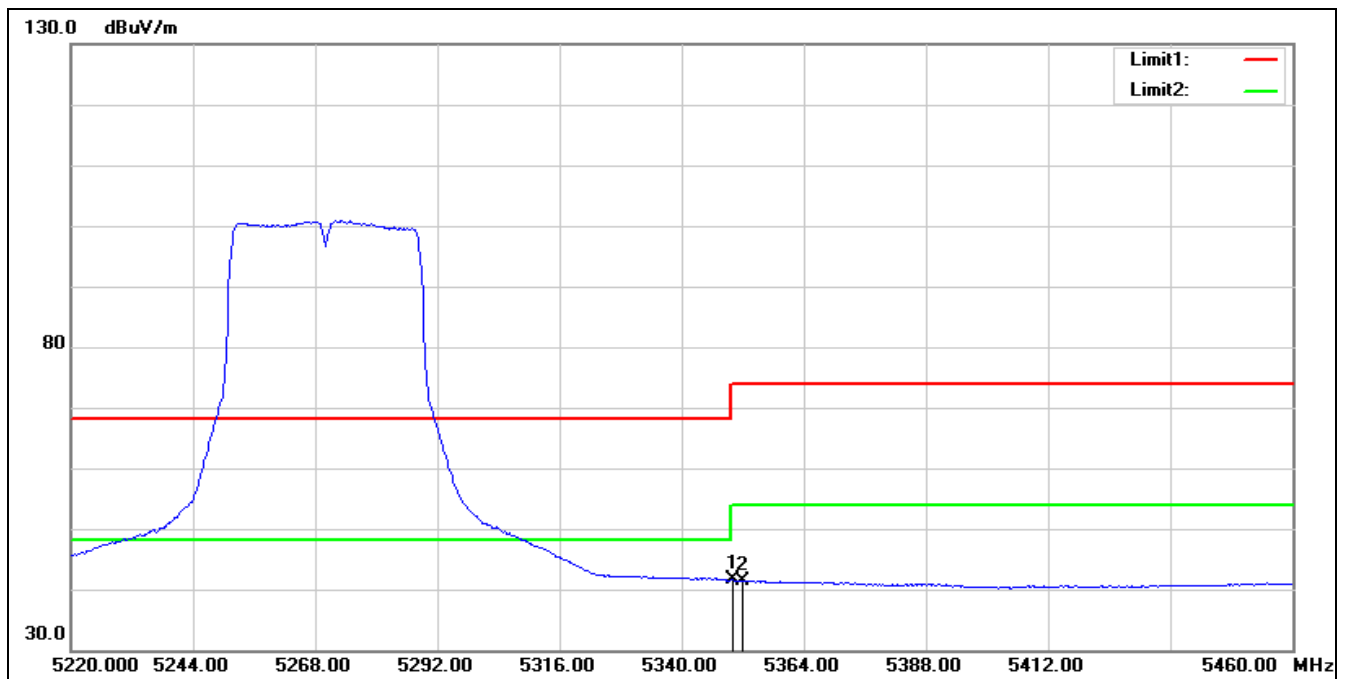

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	40.50	1.02	41.52	54.00	-12.48	AVG
2	5352.000	40.40	1.03	41.43	54.00	-12.57	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5310 MHz
Remark:

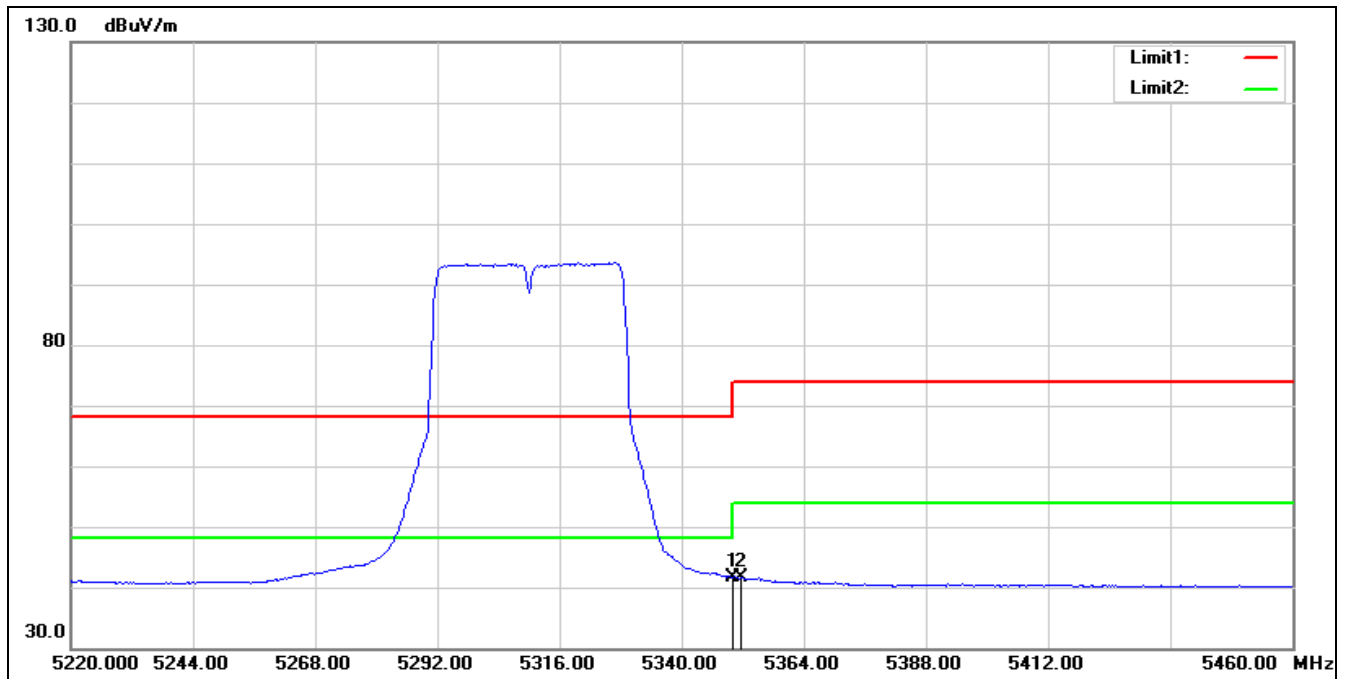

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.58	1.02	41.60	54.00	-12.40	AVG
2*	5351.760	40.62	1.03	41.65	54.00	-12.35	AVG