



427 West 12800 South
Draper, UT 84020

Test Report Attachment

FCC ID	SWX-E7AD
ISED ID	6545A-E7AD
Equipment Under Test	E7-Audience
Test Report Serial Number	TR9803_01
Date of Tests	24 September 2024
Report Issue Date	24 February 2025

Test Personnel

Testing performed by	Evan Hartzell
-----------------------------	---------------

Test Location

Testing was performed at the Unified Compliance Laboratory located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2025. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2025. Unified Compliance Laboratory has been assigned Conformity Assessment Number US0223 by ISED and MRA US5037.



NVLAP LAB CODE 600241-0

1 RF Conducted UNII-3

NOTE: The first channel contains the equipment setting table(s), if subsequent channels do not have an equipment setting table(s) then the equipment setting table(s) is the same as the first channel.

1.1 HE Mode

1.1.1 Low Gain Mode

Summary

Test	Frequency (MHz)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5745.000	20.000000	PASS
RF output power	5745.000	20.000000	PASS
Power Spectral Density	5745.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5745.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5745.000	20.000000	PASS
Tx Spurious Emission	5745.000	20.000000	PASS
Emission Bandwidth 26 dB	5775.000	20.000000	PASS
Power Spectral Density	5775.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	20.000000	PASS
Tx Spurious Emission	5775.000	20.000000	PASS
Emission Bandwidth 26 dB	5825.000	20.000000	PASS
Power Spectral Density	5825.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5825.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5825.000	20.000000	PASS
Tx Spurious Emission	5825.000	20.000000	PASS
Emission Bandwidth 26 dB	5755.000	40.000000	PASS
Power Spectral Density	5755.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5755.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5755.000	40.000000	PASS
Tx Spurious Emission	5755.000	40.000000	PASS
Emission Bandwidth 26 dB	5775.000	40.000000	PASS
Power Spectral Density	5775.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	40.000000	PASS
Tx Spurious Emission	5775.000	40.000000	PASS
Emission Bandwidth 26 dB	5795.000	40.000000	PASS
Power Spectral Density	5795.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5795.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5795.000	40.000000	PASS
Tx Spurious Emission	5795.000	40.000000	PASS
Emission Bandwidth 26 dB	5775.000	80.000000	PASS
Power Spectral Density	5775.000	80.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	80.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	80.000000	PASS
Tx Spurious Emission	5775.000	80.000000	PASS


Emission Bandwidth 26 dB (5745 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	22.600000	---	---	5733.450000	5756.050000

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	6.4	PASS

26 dB Bandwidth

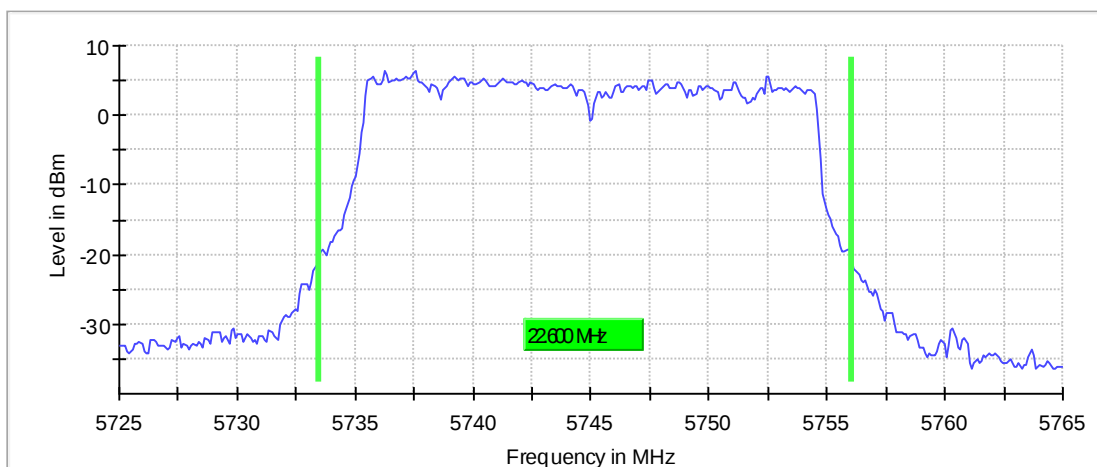

Bandwidth

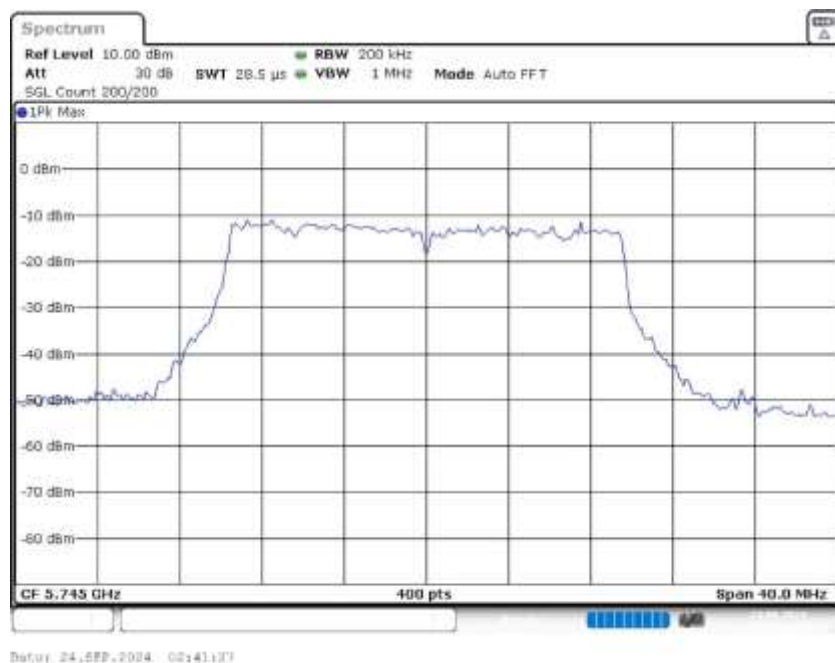

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	28.477 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	24.1	30.0	24.1	99.708	PASS

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


Power Spectral Density (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5736.089109	8.614	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

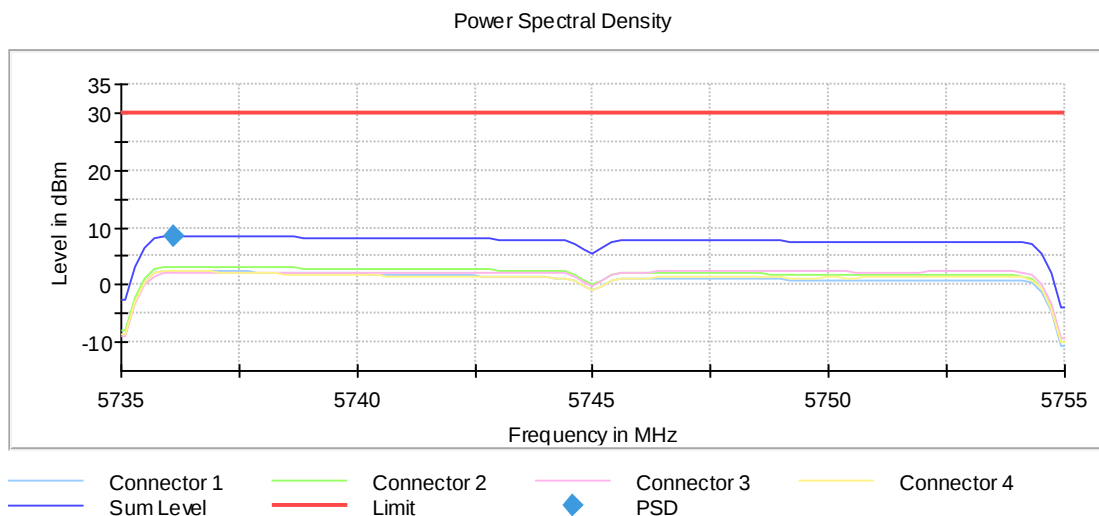

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.75500 GHz	5.75500 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
SweepType	FFT	AUTO
Preamp	off	off


Minimum Emission Bandwidth 6 dB (5745 MHz; 24.000 dBm; 20 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	19.050000	0.500000	---	5735.425000	5754.475000

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	4.8	PASS

6 dB Bandwidth

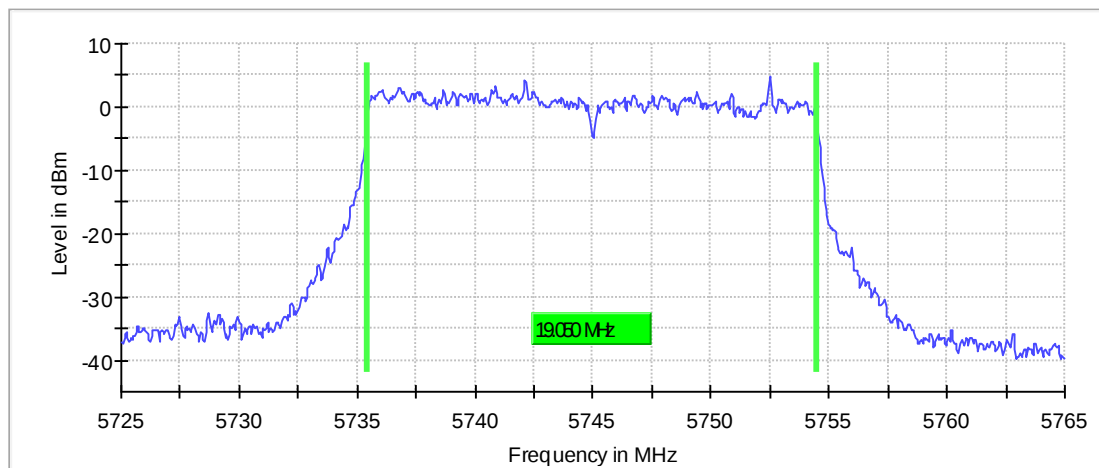

Bandwidth

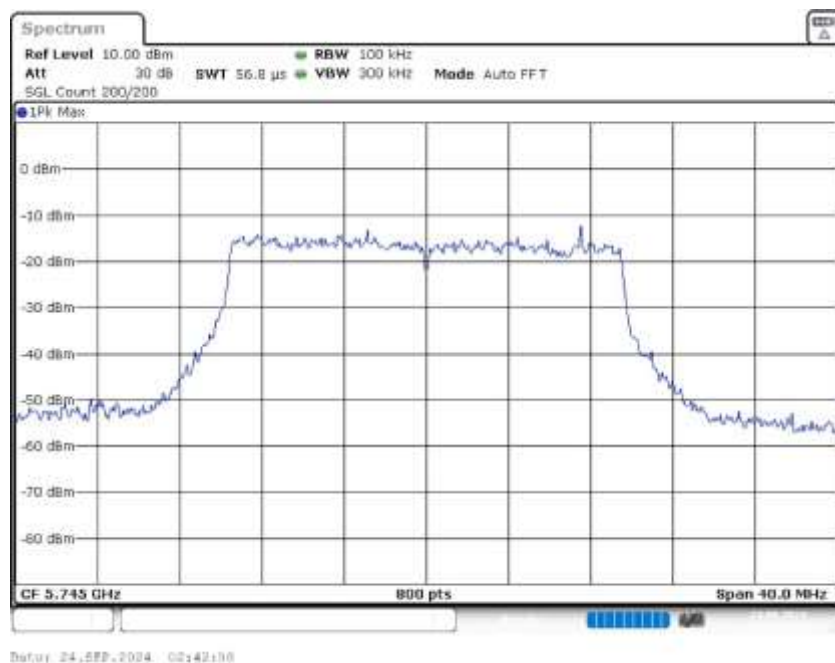

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	56.836 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off


Occupied Channel Bandwidth 99% (5745 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	19.100000	---	---	5735.450000	5754.550000

DUT Frequency (MHz)	Result
5745.000000	PASS

99 % Bandwidth

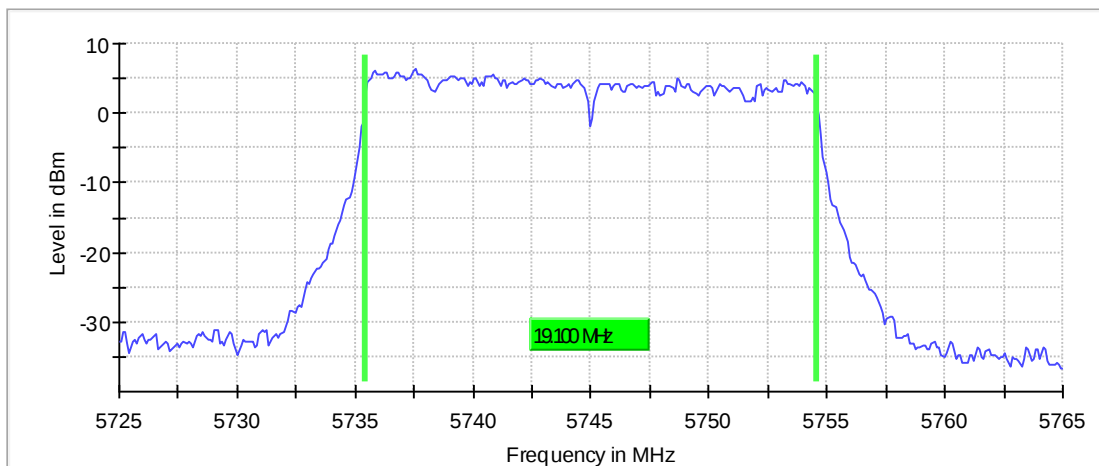

Bandwidth

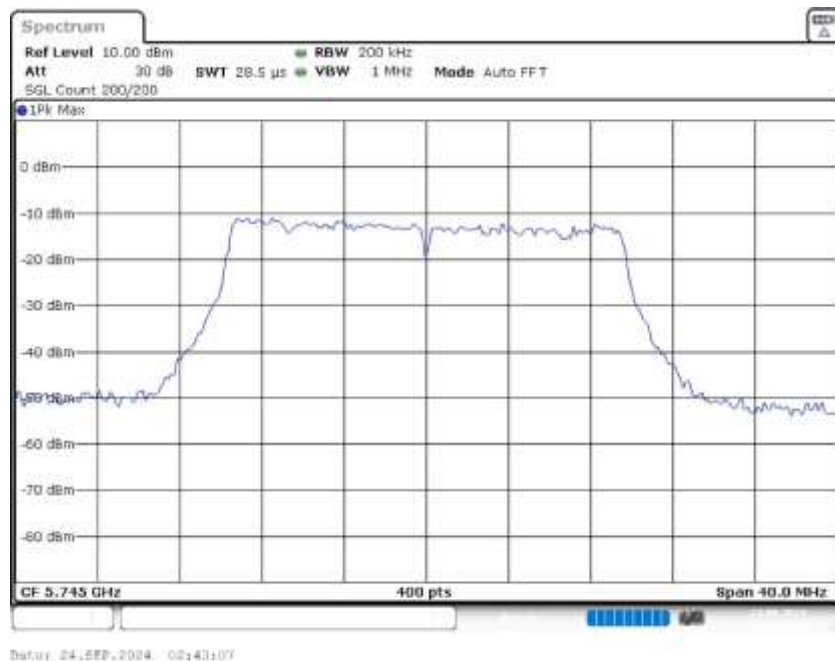

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweptime	28.477 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5562.250000	-32.9	5.9	-27.0
5551.750000	-33.3	6.3	-27.0
5557.750000	-33.4	6.4	-27.0
5558.250000	-33.4	6.4	-27.0
5561.750000	-33.4	6.4	-27.0
5552.250000	-33.4	6.4	-27.0
5550.250000	-33.6	6.6	-27.0
5550.750000	-33.6	6.6	-27.0
5544.250000	-33.8	6.8	-27.0
5562.750000	-33.8	6.8	-27.0
5633.750000	-33.8	6.8	-27.0
5633.250000	-33.9	6.9	-27.0
5640.250000	-33.9	6.9	-27.0
5555.250000	-33.9	6.9	-27.0
5546.250000	-33.9	6.9	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

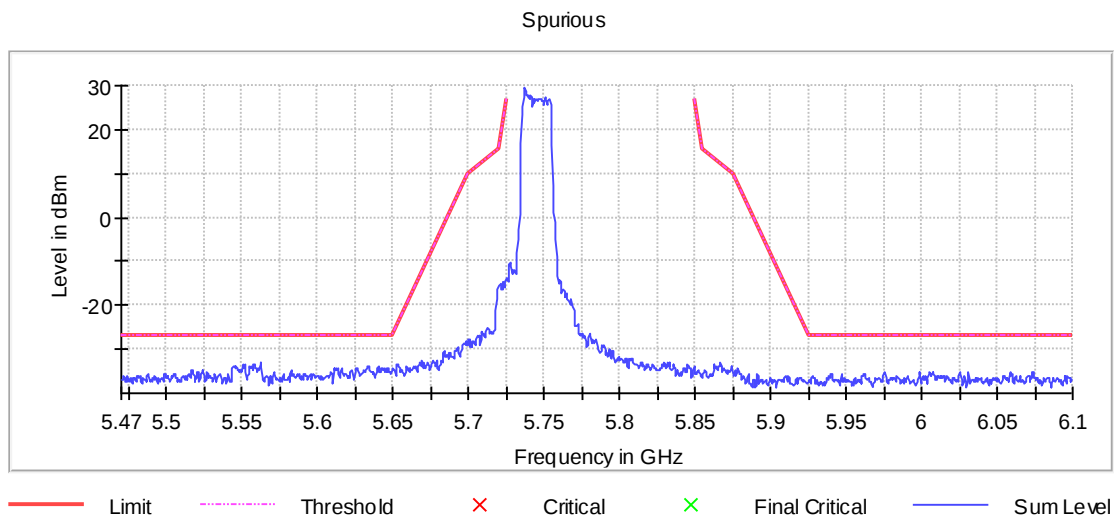

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	1260	~ 1260
SweepTime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	22.400000	---	---	5764.050000	5786.450000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	6.3	PASS

26 dB Bandwidth

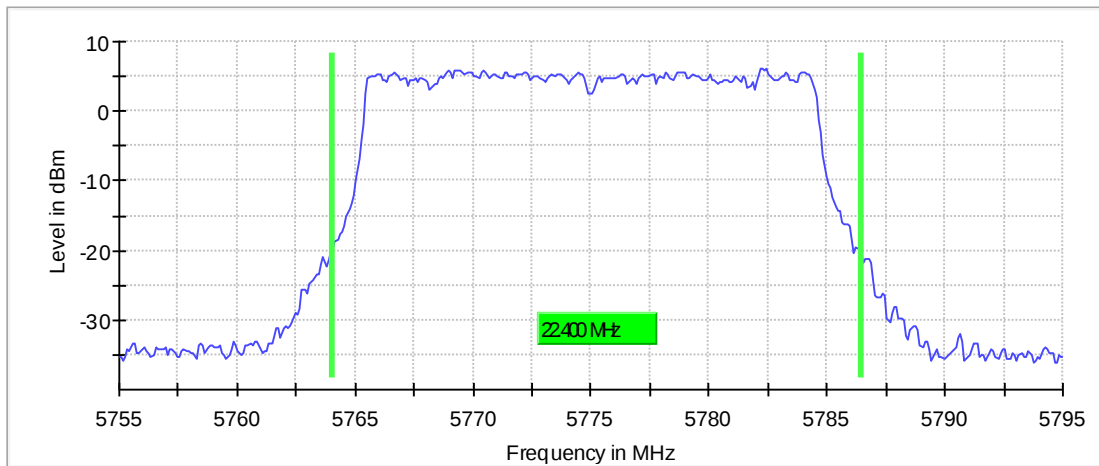

Bandwidth




Power Spectral Density (5775 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5783.514851	8.505	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

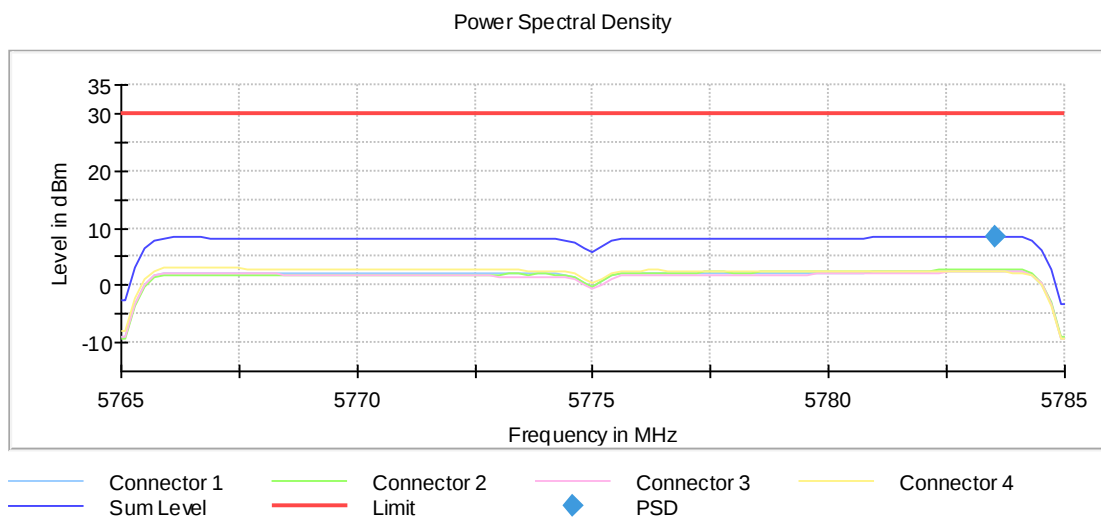


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 20 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	19.200000	0.500000	---	5765.375000	5784.575000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	4.0	PASS

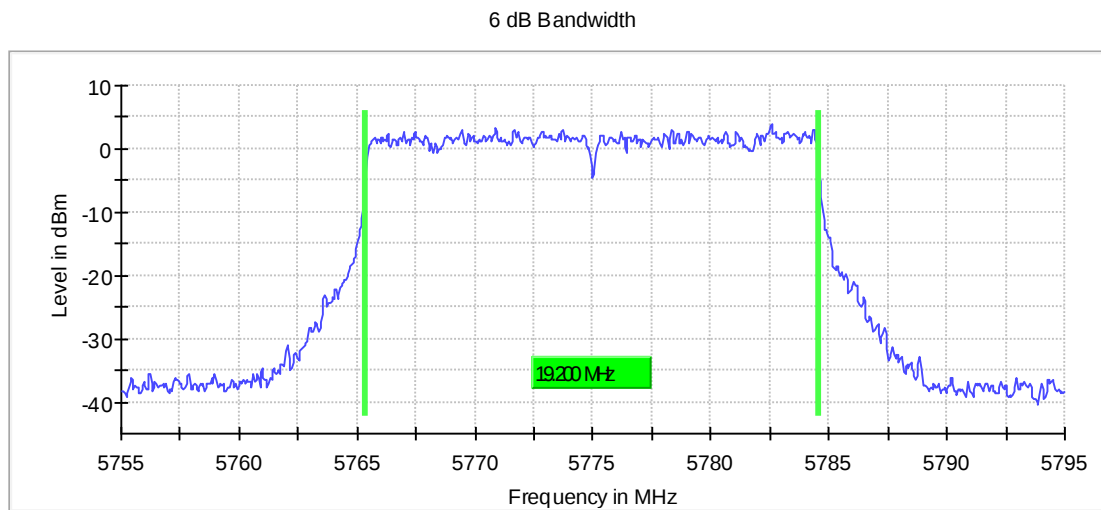

Bandwidth

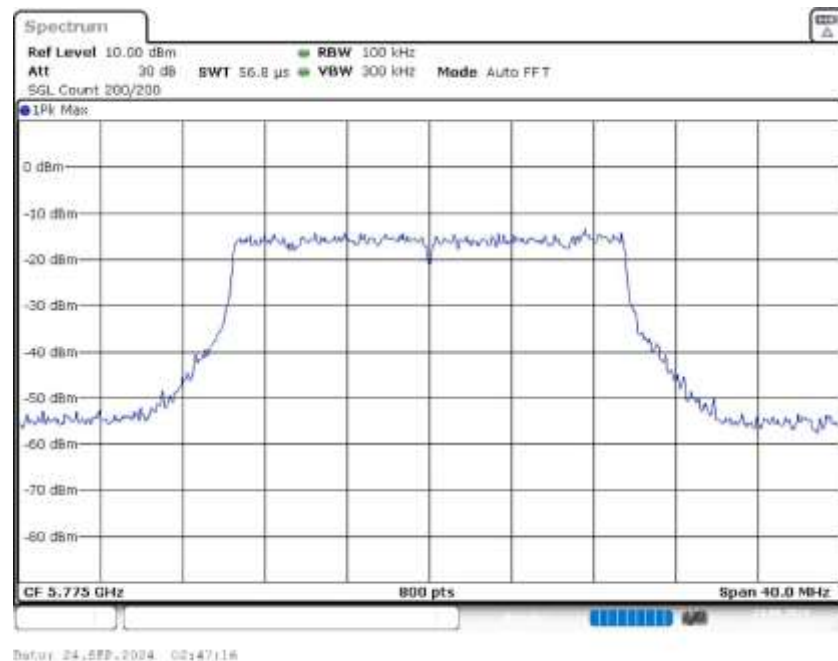


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 20 MHz)


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	19.100000	---	---	5765.450000	5784.550000

DUT Frequency (MHz)	Result
5775.000000	PASS

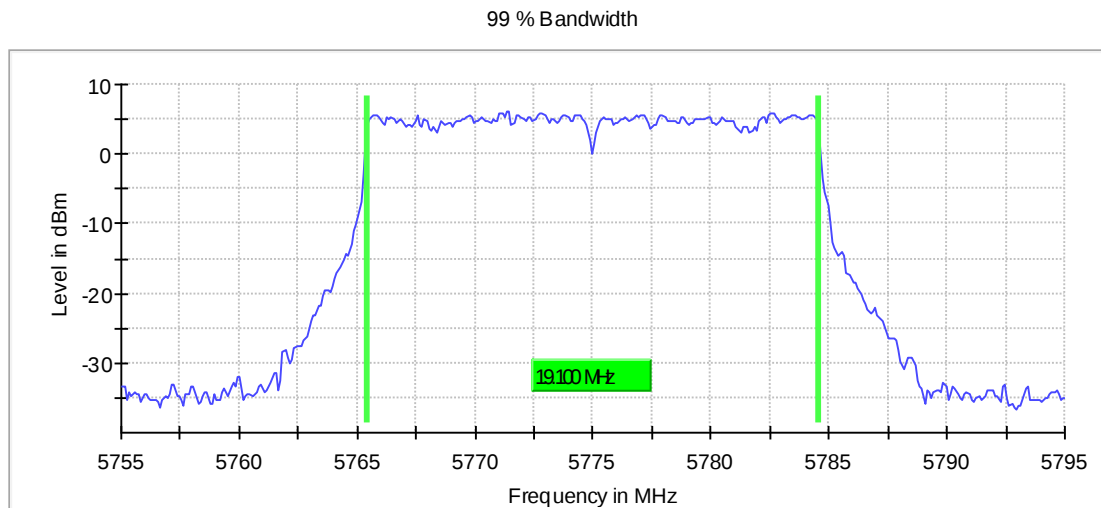

Bandwidth

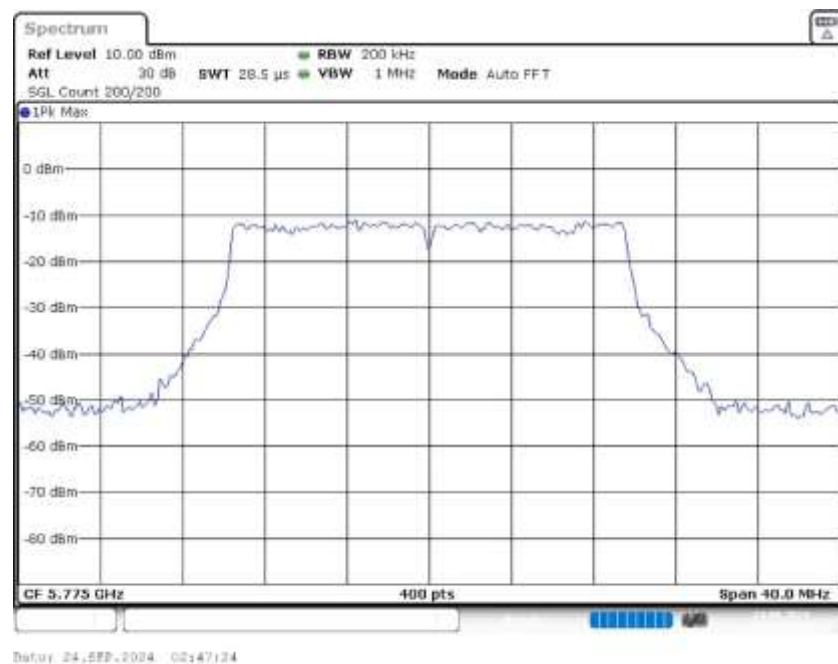

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	40.000 MHz	40.000 MHz

RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	28.477 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5587.750000	-32.3	5.3	-27.0
5579.250000	-32.6	5.6	-27.0
5588.250000	-32.7	5.7	-27.0
5579.750000	-32.8	5.8	-27.0
5582.750000	-32.8	5.8	-27.0
5587.250000	-32.8	5.8	-27.0
5583.750000	-33.0	6.0	-27.0
5586.250000	-33.1	6.1	-27.0
5584.250000	-33.1	6.1	-27.0
5583.250000	-33.1	6.1	-27.0
5646.750000	-33.1	6.1	-27.0
5573.750000	-33.1	6.1	-27.0
5576.250000	-33.2	6.2	-27.0
5576.750000	-33.4	6.4	-27.0
5584.750000	-33.4	6.4	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

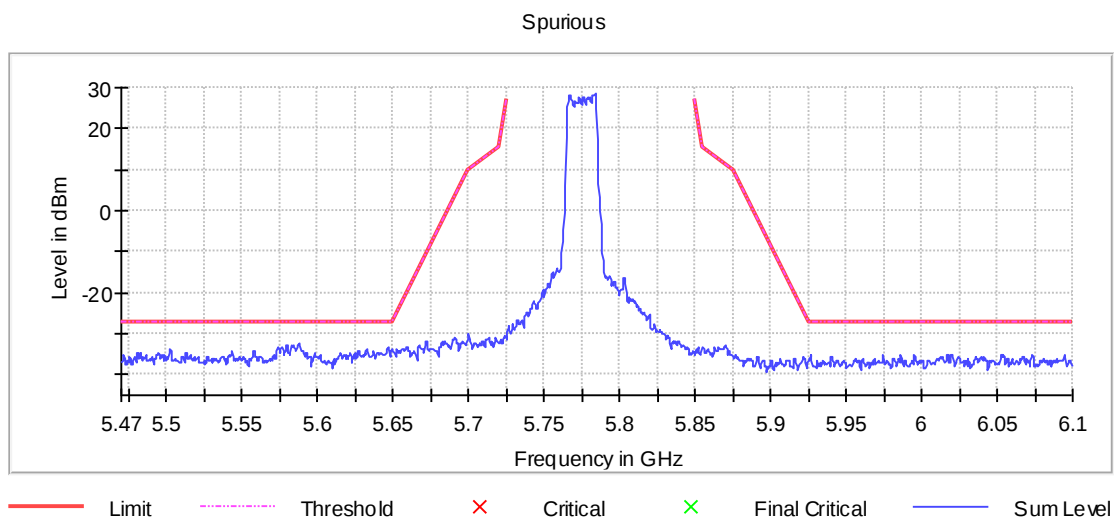


Emission Bandwidth 26 dB (5825 MHz; 24.000 dBm; 20 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	22.100000	---	---	5813.650000	5835.750000

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	6.2	PASS

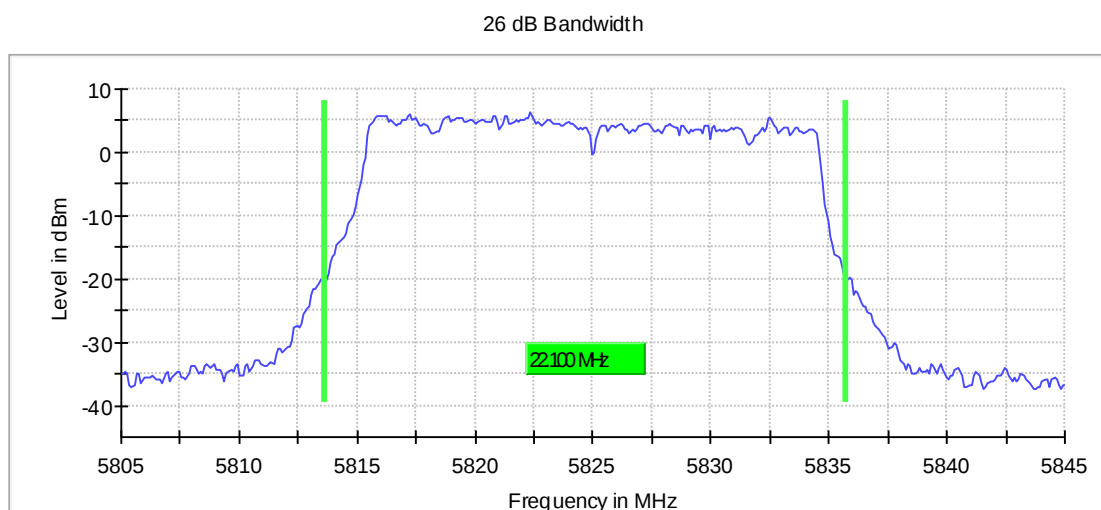

Bandwidth

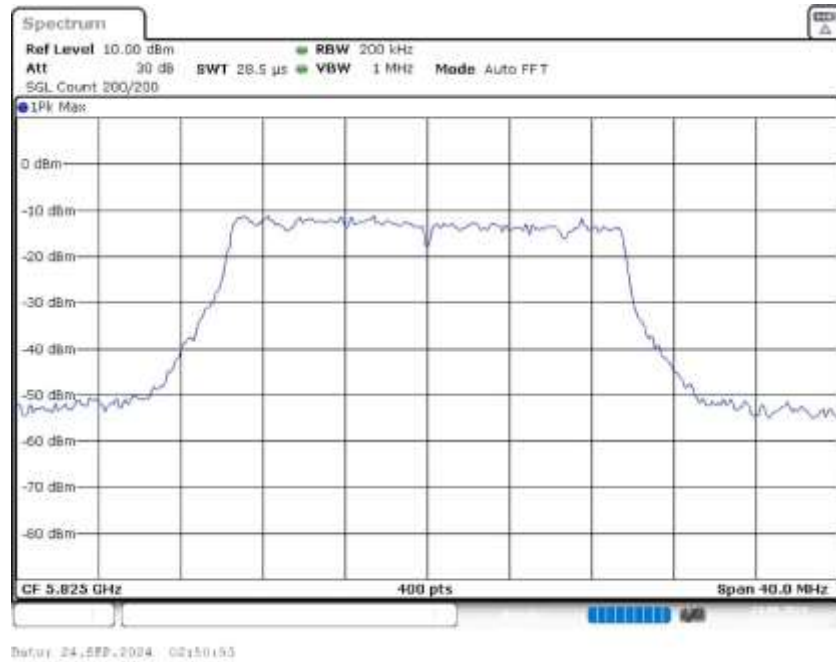


Power Spectral Density (5825 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5816.287129	8.510	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

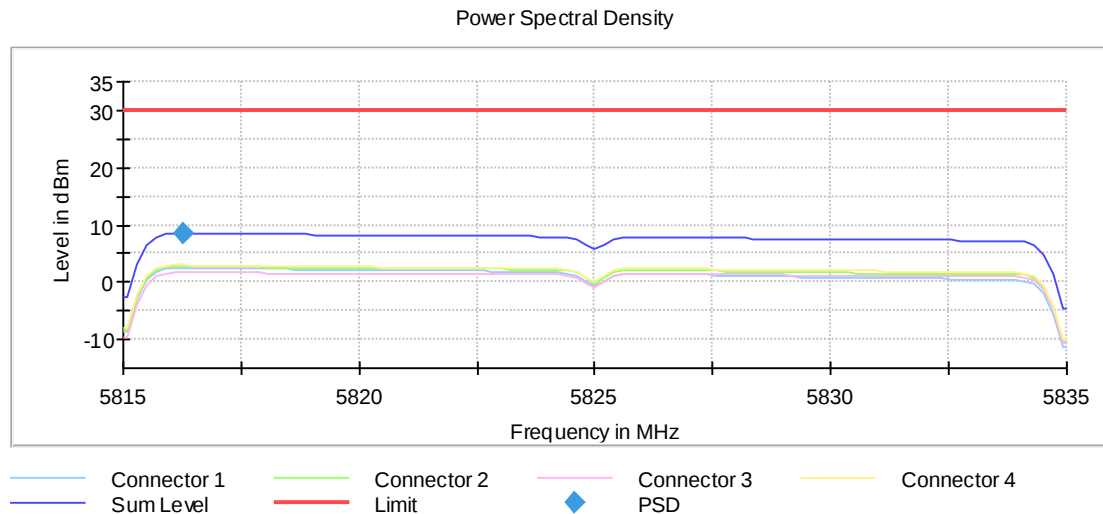


Minimum Emission Bandwidth 6 dB (5825 MHz; 24.000 dBm; 20 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	19.000000	0.500000	---	5815.425000	5834.425000

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	5.7	PASS

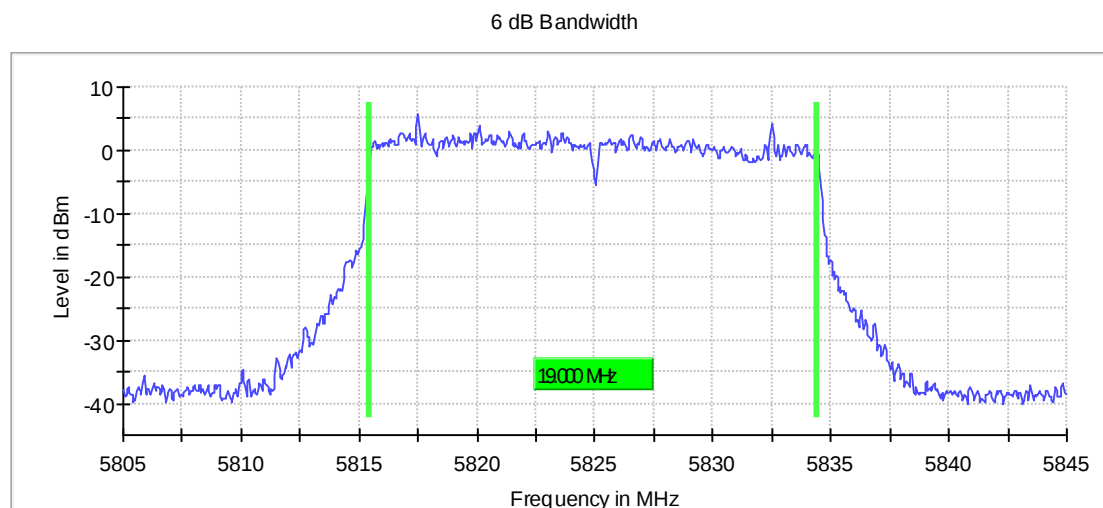

Bandwidth

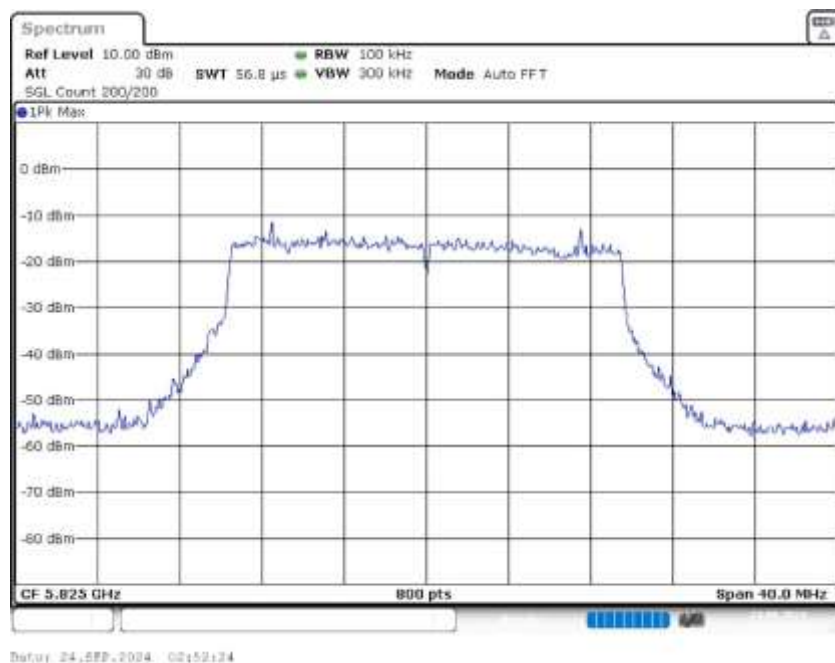


Occupied Channel Bandwidth 99% (5825 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	19.100000	---	---	5815.350000	5834.450000

DUT Frequency (MHz)	Result
5825.000000	PASS

99 % Bandwidth

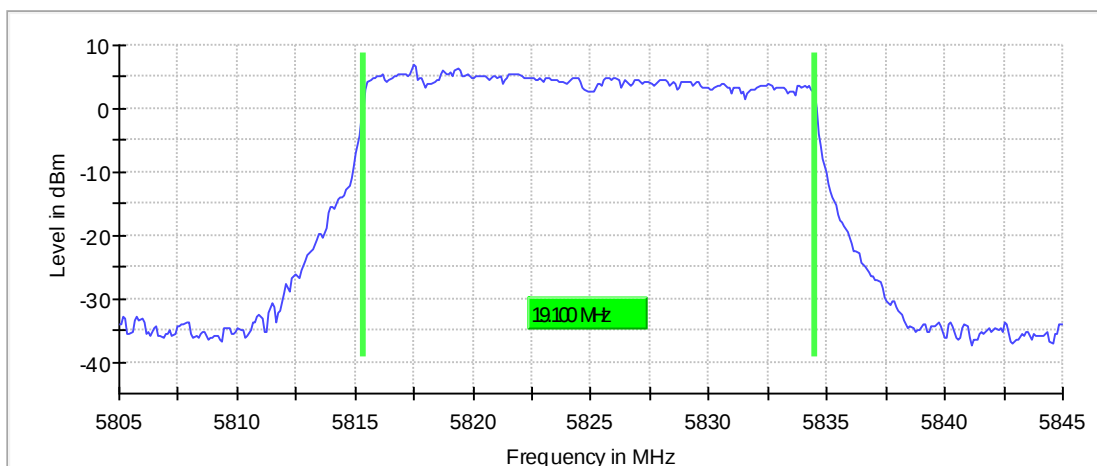

Bandwidth

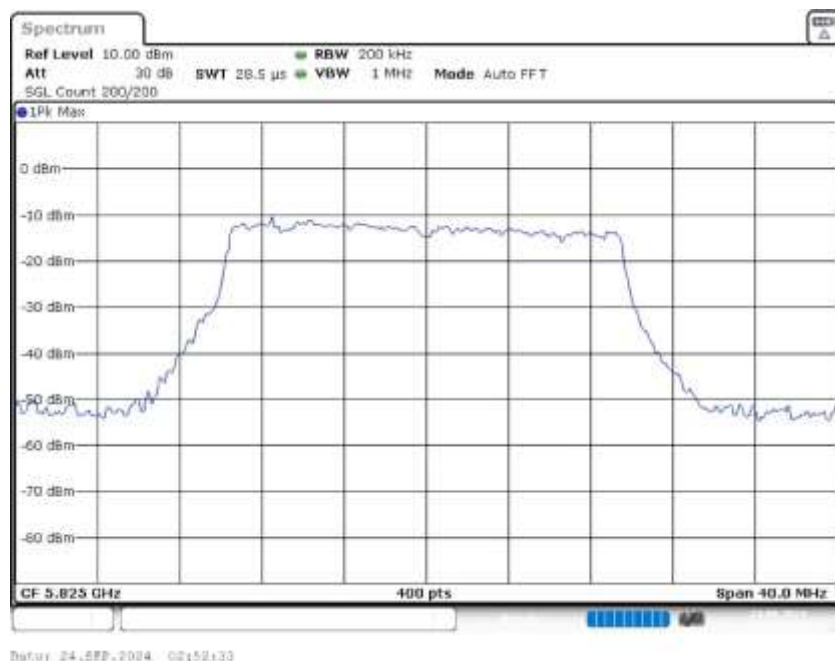

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweptime	28.477 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5825 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5624.750000	-33.5	6.5	-27.0
5625.250000	-33.6	6.6	-27.0
5637.250000	-34.1	7.1	-27.0
5630.250000	-34.1	7.1	-27.0
5641.750000	-34.2	7.2	-27.0
5634.250000	-34.2	7.2	-27.0
5642.250000	-34.2	7.2	-27.0
5637.750000	-34.3	7.3	-27.0
5629.750000	-34.4	7.4	-27.0
5639.250000	-34.4	7.4	-27.0
5647.750000	-34.4	7.4	-27.0
5648.250000	-34.5	7.5	-27.0
5630.750000	-34.6	7.6	-27.0
5638.750000	-34.6	7.6	-27.0
5634.750000	-34.6	7.6	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

Spurious

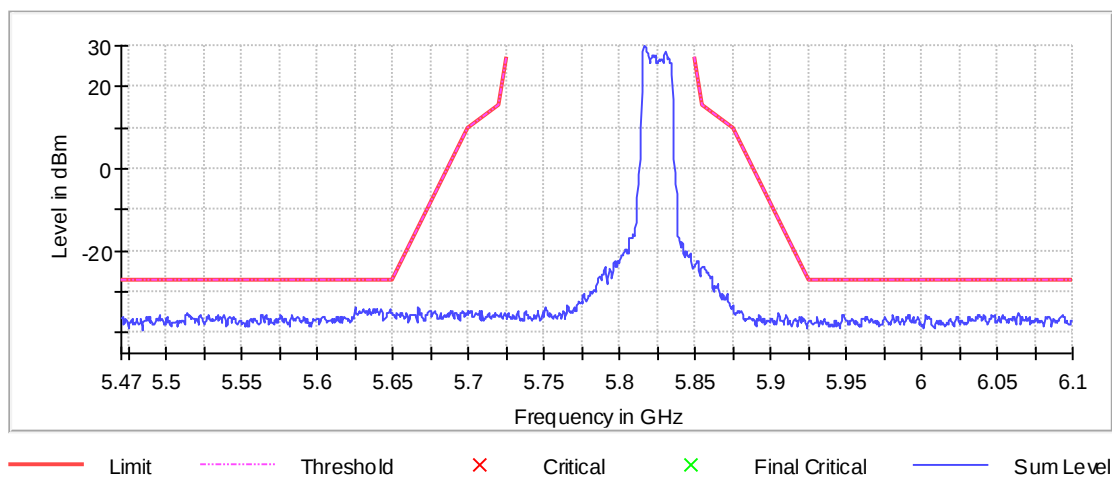


Emission Bandwidth 26 dB (5755 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	44.878049	---	---	5732.936210	5777.814259

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	6.1	PASS

26 dB Bandwidth

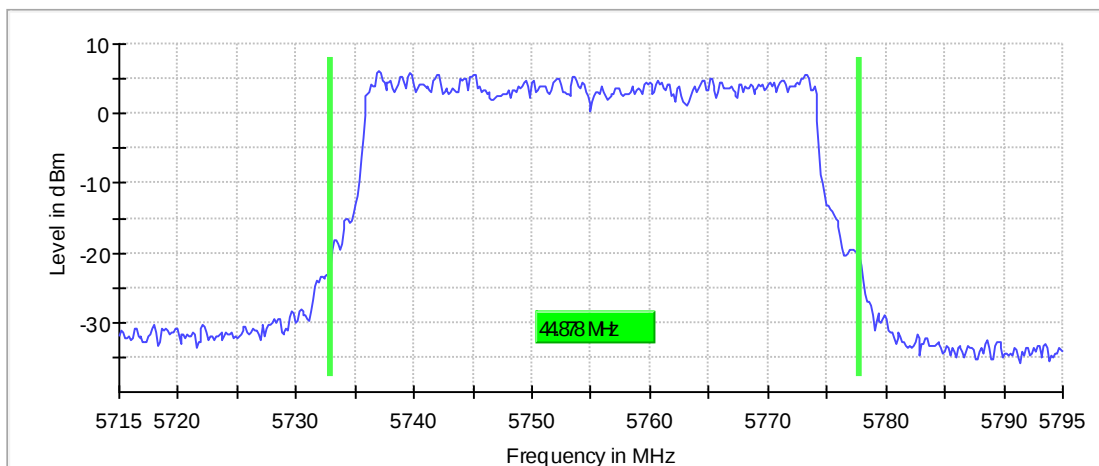

Bandwidth

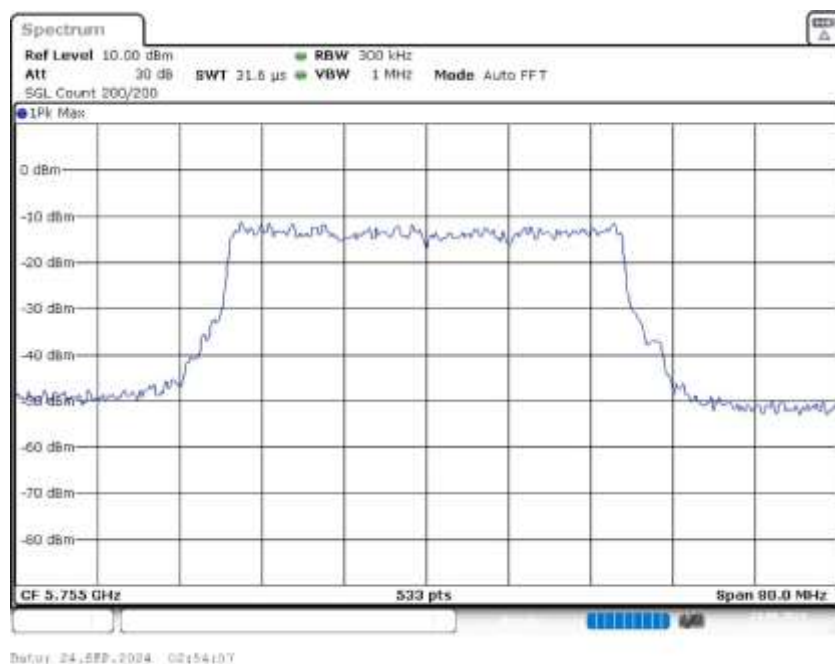


Power Spectral Density (5755 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5736.625000	6.257	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

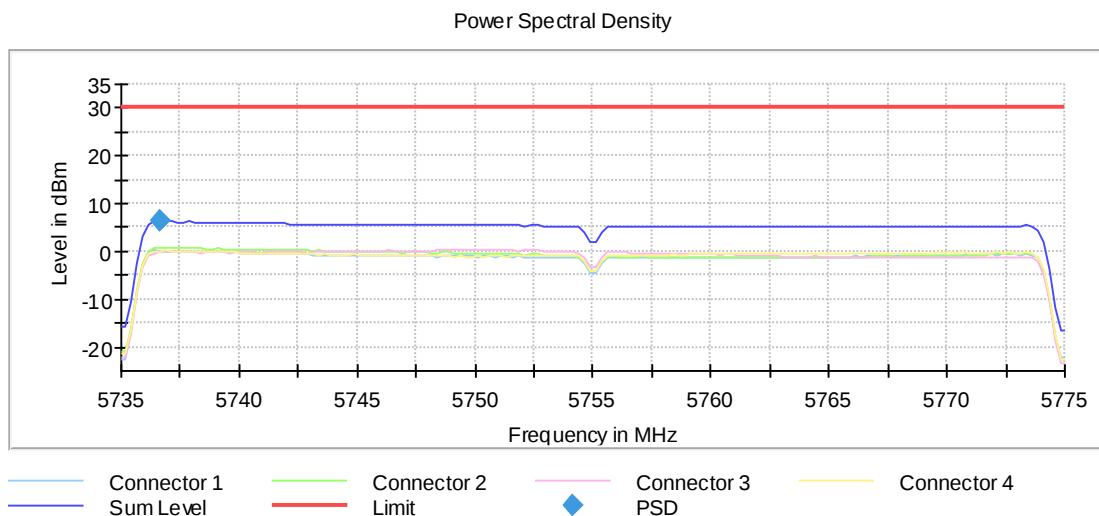


Minimum Emission Bandwidth 6 dB (5755 MHz; 24.000 dBm; 40 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	38.350000	0.500000	---	5735.825000	5774.175000

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	1.1	PASS

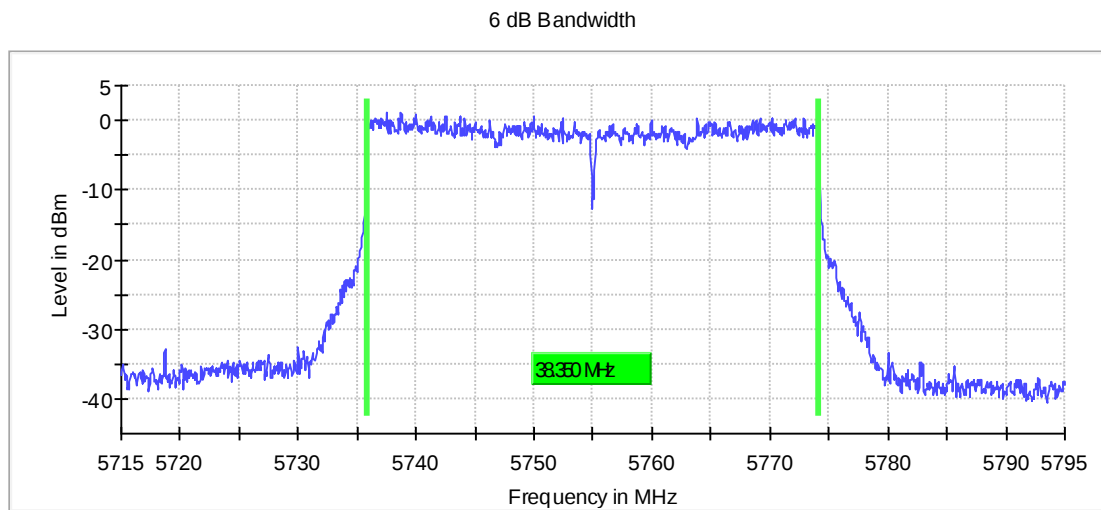

Bandwidth

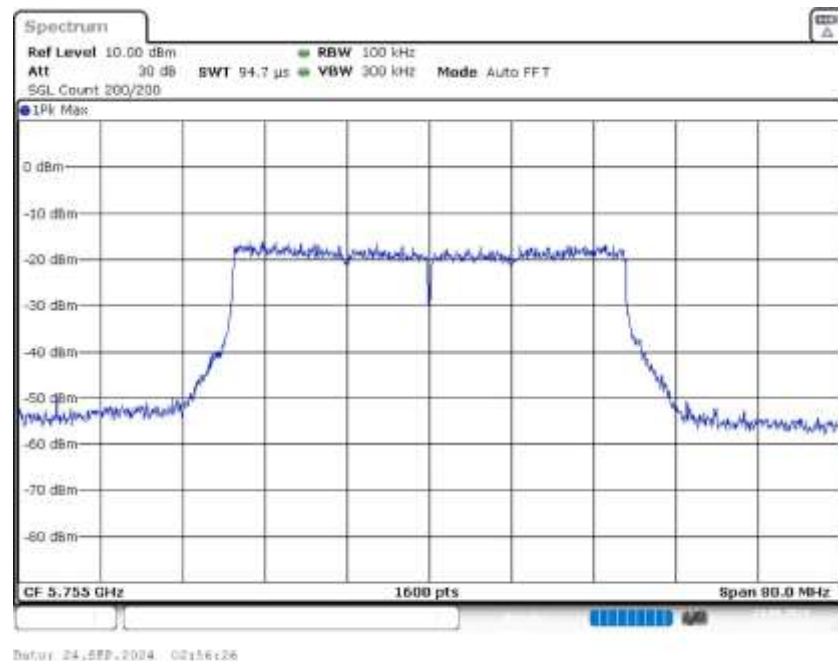


Occupied Channel Bandwidth 99% (5755 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	38.250000	---	---	5735.875000	5774.125000

DUT Frequency (MHz)	Result
5755.000000	PASS

99 % Bandwidth

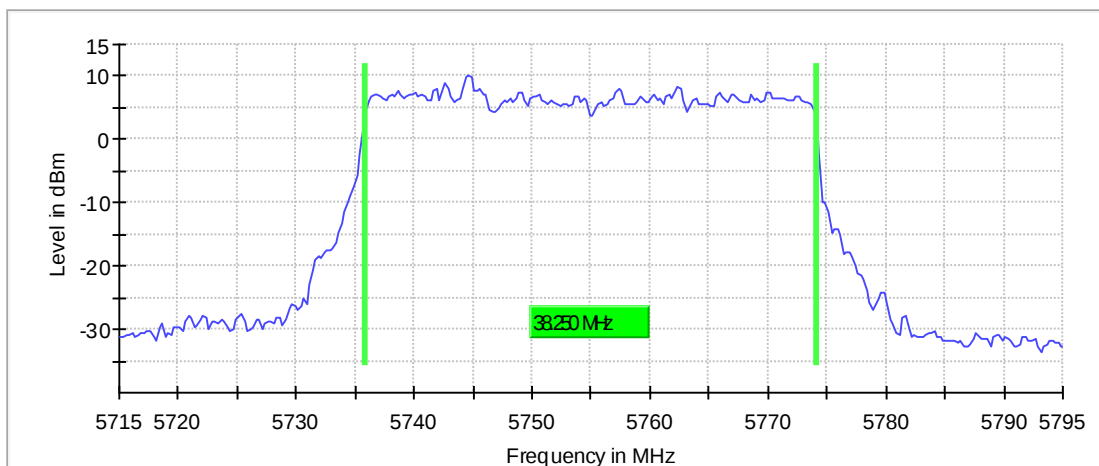

Bandwidth



Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz

RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	18.906 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5755 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5643.250000	-30.6	3.6	-27.0
5643.750000	-30.7	3.7	-27.0
5648.250000	-30.7	3.7	-27.0
5648.750000	-30.8	3.8	-27.0
5645.750000	-31.0	4.0	-27.0
5647.750000	-31.0	4.0	-27.0
5646.250000	-31.2	4.2	-27.0
5634.250000	-31.2	4.2	-27.0
5647.250000	-31.4	4.4	-27.0
5630.750000	-31.4	4.4	-27.0
5646.750000	-31.5	4.5	-27.0
5641.250000	-31.5	4.5	-27.0
5630.250000	-31.5	4.5	-27.0
5644.750000	-31.5	4.5	-27.0
5649.250000	-31.6	4.6	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

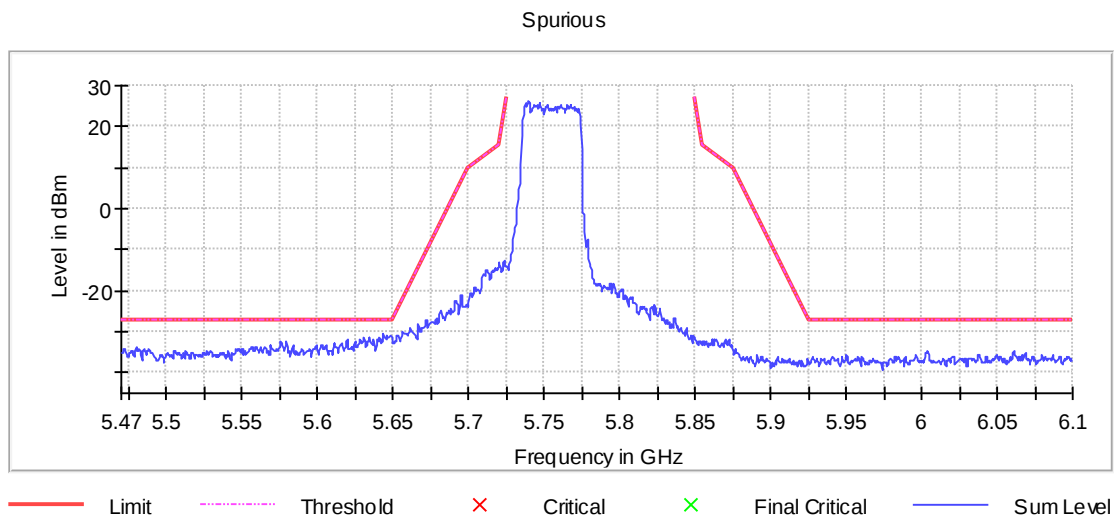


Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 40 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	43.377110	---	---	5753.236398	5796.613508

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	6.1	PASS

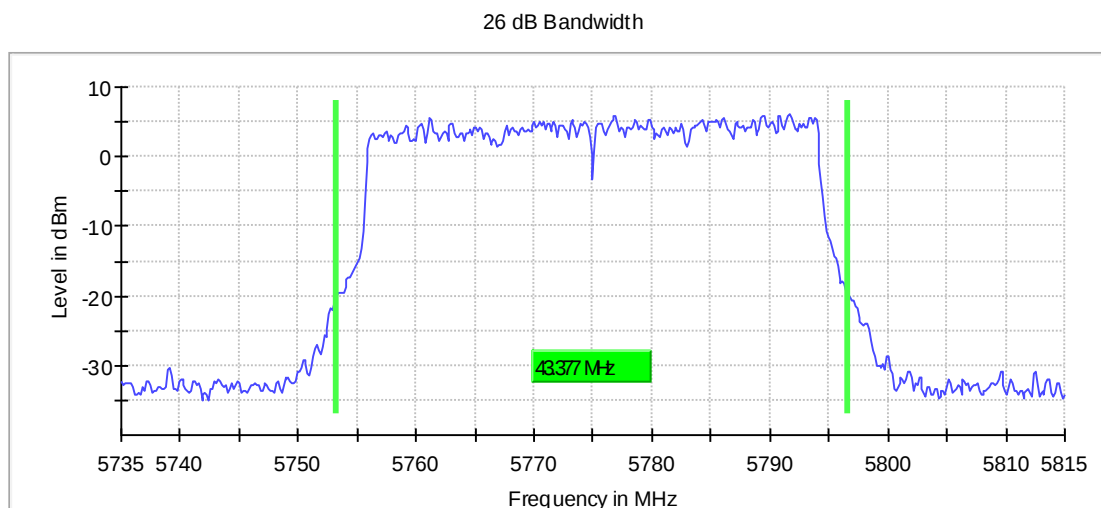

Bandwidth

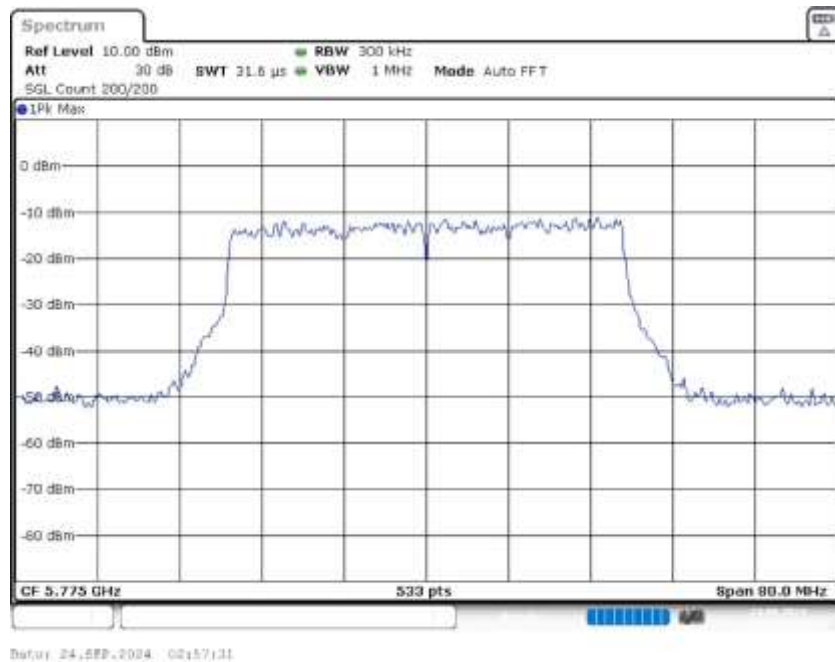

Power Spectral Density (5775 MHz; 24.000 dBm; 40 MHz)


Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5793.125000	5.959	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

Power Spectral Density

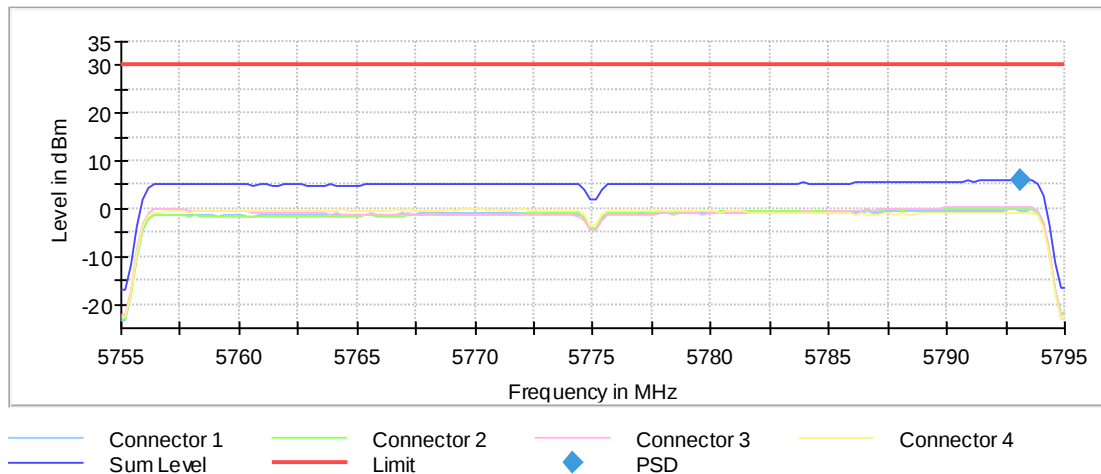


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 40 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	38.250000	0.500000	---	5755.875000	5794.125000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	0.7	PASS

6 dB Bandwidth

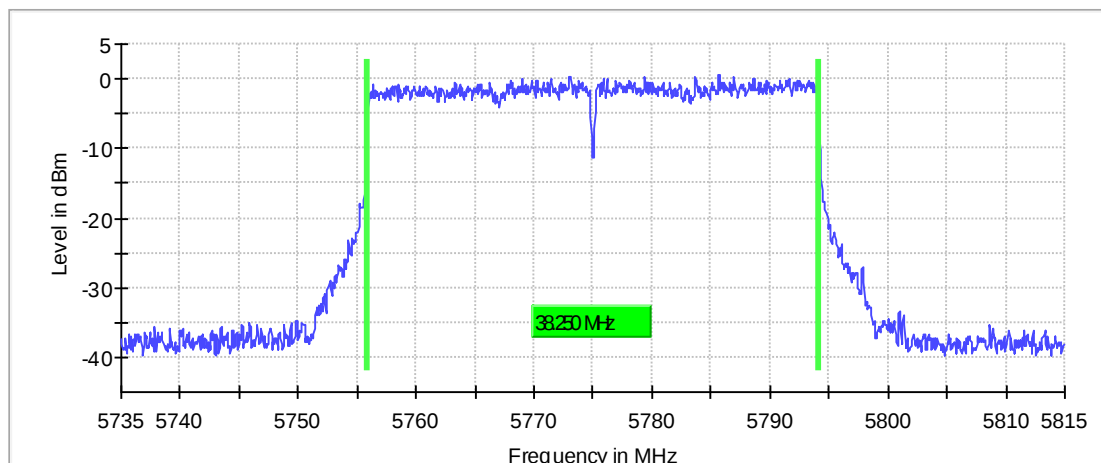

Bandwidth

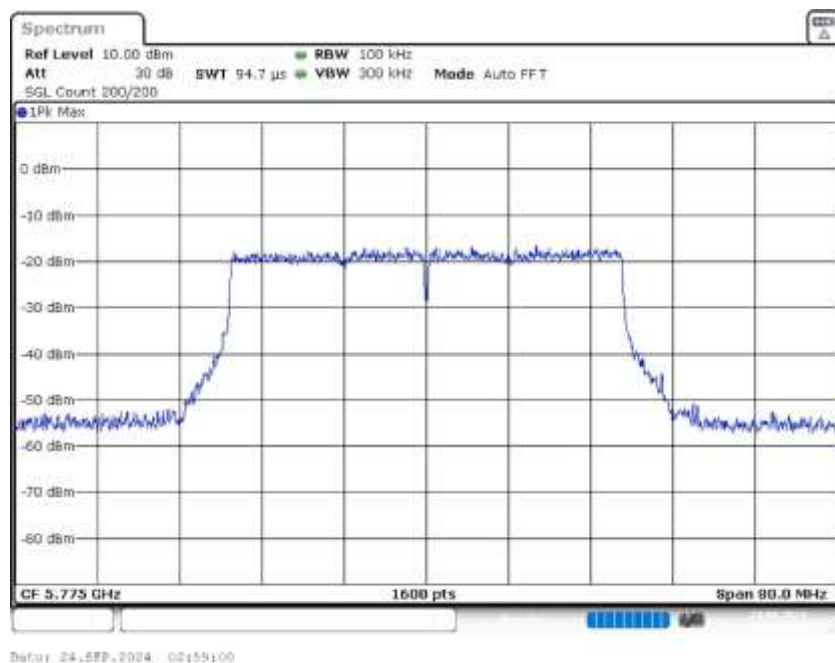


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	38.000000	---	---	5756.125000	5794.125000

DUT Frequency (MHz)	Result
5775.000000	PASS

99 % Bandwidth

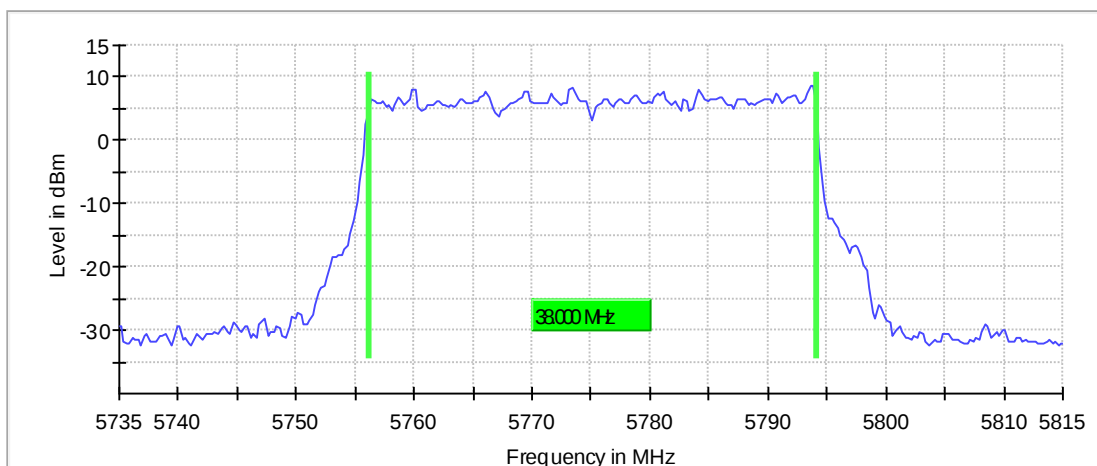

Bandwidth

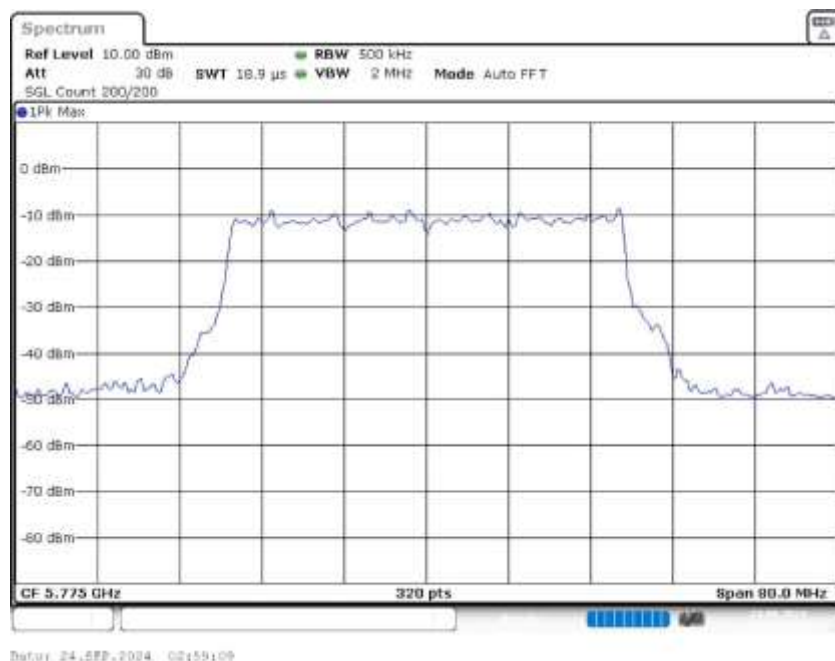

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	≥ 400.000 kHz
VBW	2.000 MHz	≥ 1.500 MHz
SweepPoints	320	~ 320
SweepTime	18.906 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5579.250000	-32.5	5.5	-27.0
5585.250000	-32.6	5.6	-27.0
5578.750000	-33.0	6.0	-27.0
5646.750000	-33.1	6.1	-27.0
5573.250000	-33.1	6.1	-27.0
5585.750000	-33.3	6.3	-27.0
5570.250000	-33.3	6.3	-27.0
5649.750000	-33.4	6.4	-27.0
5572.750000	-33.4	6.4	-27.0
5649.250000	-33.5	6.5	-27.0
5632.750000	-33.5	6.5	-27.0
5641.750000	-33.5	6.5	-27.0
5584.750000	-33.5	6.5	-27.0
5633.250000	-33.6	6.6	-27.0
5648.750000	-33.6	6.6	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

Spurious

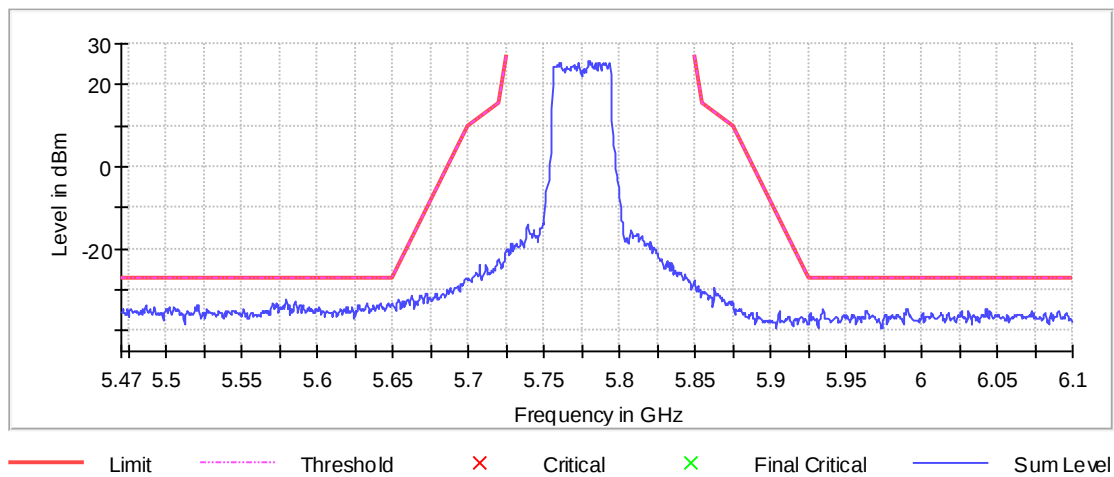


Emission Bandwidth 26 dB (5795 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	42.476548	---	---	5773.986867	5816.463415

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	6.6	PASS

26 dB Bandwidth

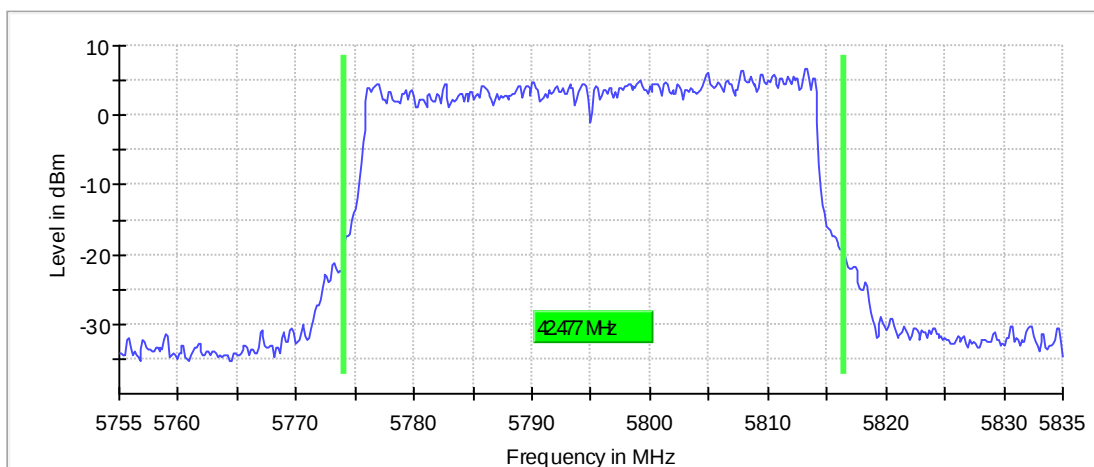

Bandwidth

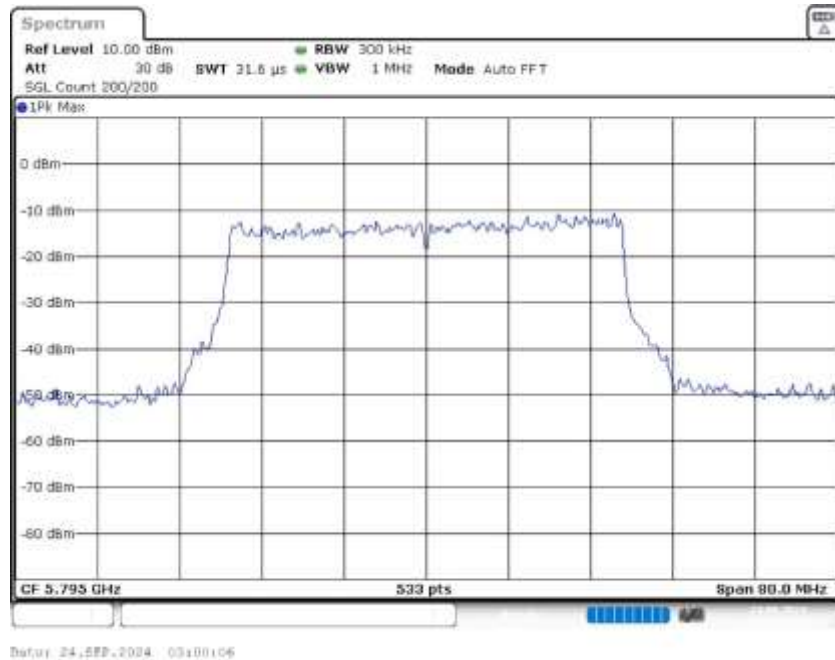

Power Spectral Density (5795 MHz; 24.000 dBm; 40 MHz)


Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5813.125000	6.491	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

Power Spectral Density

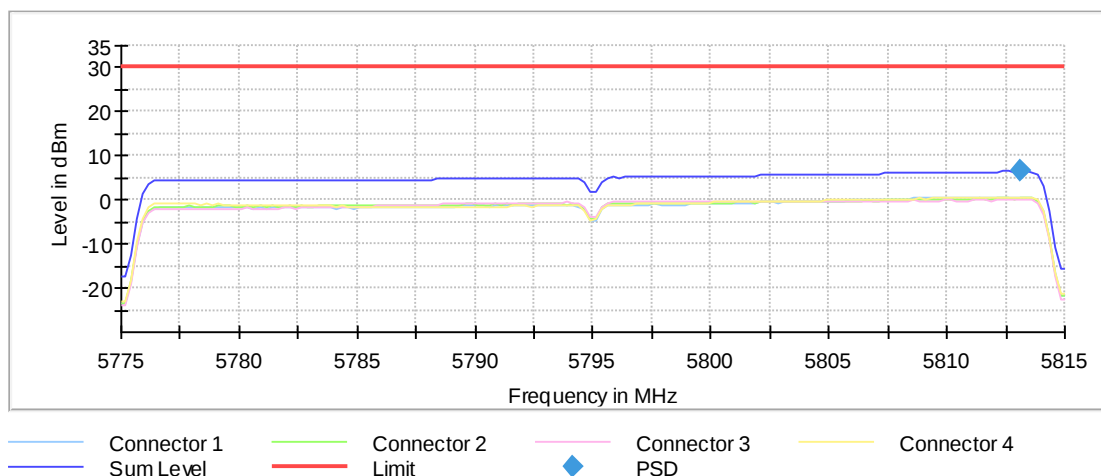


Minimum Emission Bandwidth 6 dB (5795 MHz; 24.000 dBm; 40 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	38.250000	0.500000	---	5775.875000	5814.125000

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	2.2	PASS

6 dB Bandwidth

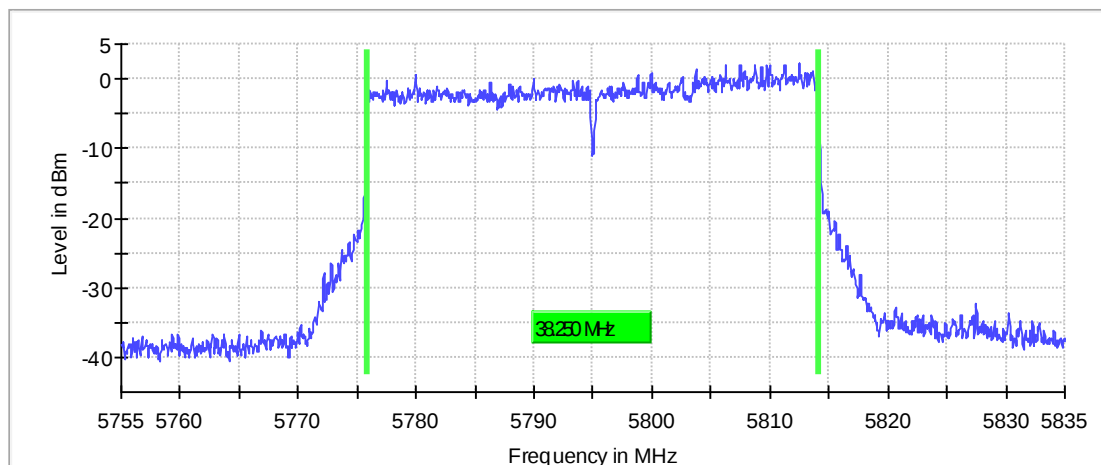

Bandwidth

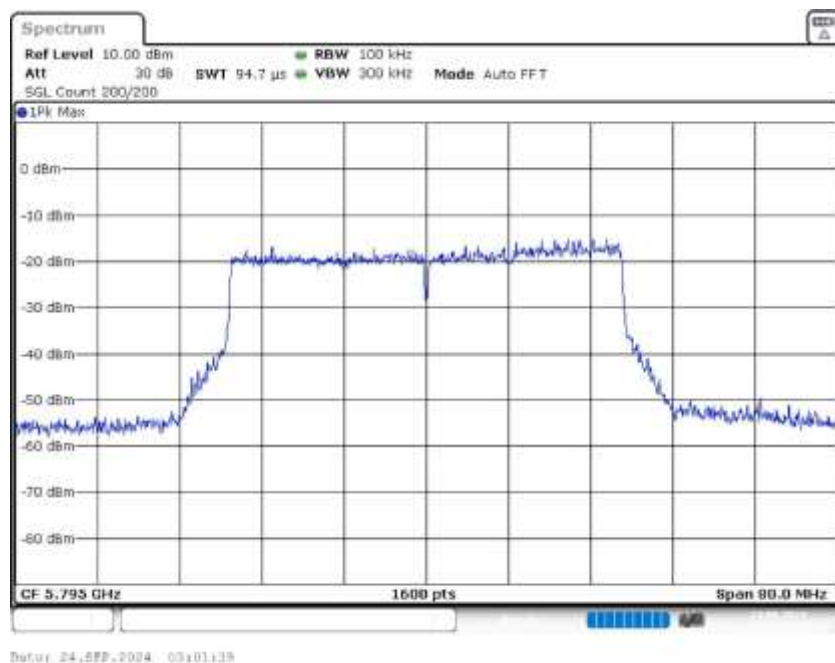


Occupied Channel Bandwidth 99% (5795 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	38.250000	---	---	5775.875000	5814.125000

DUT Frequency (MHz)	Result
5795.000000	PASS

99 % Bandwidth

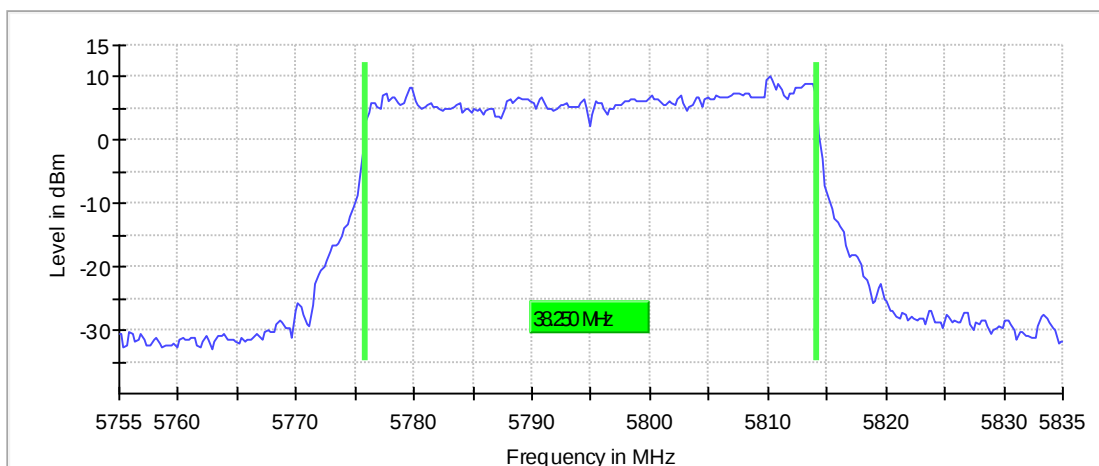

Bandwidth

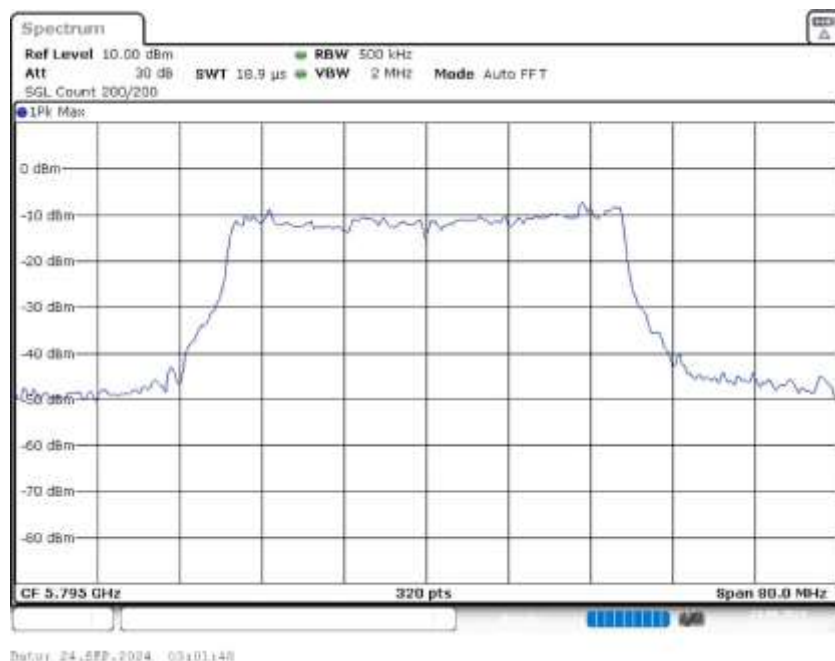

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	18.906 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5795 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5585.250000	-33.2	6.2	-27.0
5589.250000	-33.6	6.6	-27.0
5613.250000	-33.7	6.7	-27.0
5585.750000	-33.7	6.7	-27.0
5612.750000	-33.7	6.7	-27.0
5589.750000	-33.8	6.8	-27.0
5633.250000	-33.8	6.8	-27.0
5612.250000	-34.0	7.0	-27.0
5616.750000	-34.0	7.0	-27.0
5644.750000	-34.1	7.1	-27.0
5613.750000	-34.1	7.1	-27.0
5617.250000	-34.1	7.1	-27.0
5639.250000	-34.1	7.1	-27.0
5584.750000	-34.1	7.1	-27.0
5638.750000	-34.2	7.2	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

Spurious

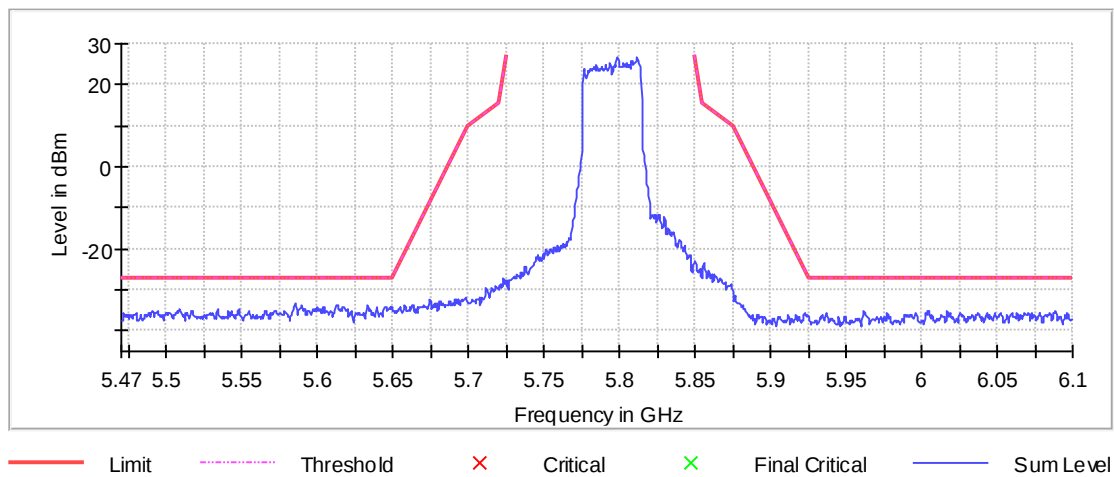


Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 80 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	88.000000	---	---	5733.250000	5821.250000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	8.7	PASS

26 dB Bandwidth

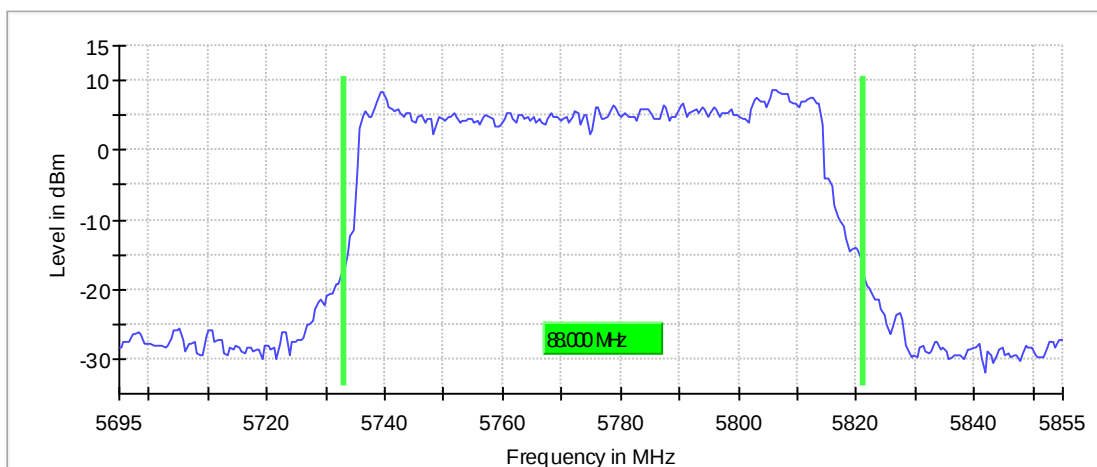

Bandwidth

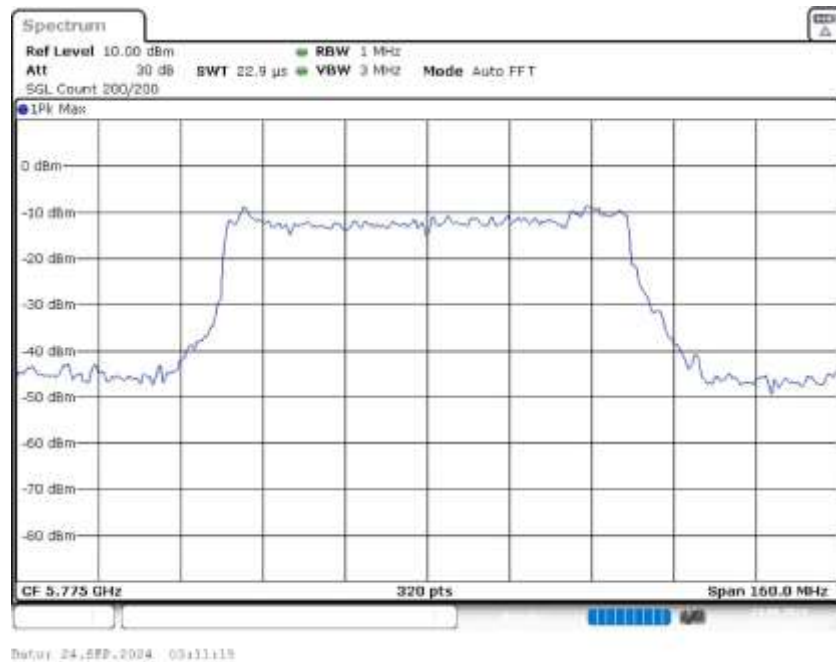

Power Spectral Density (5775 MHz; 24.000 dBm; 80 MHz)


Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5812.375000	2.993	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

Power Spectral Density

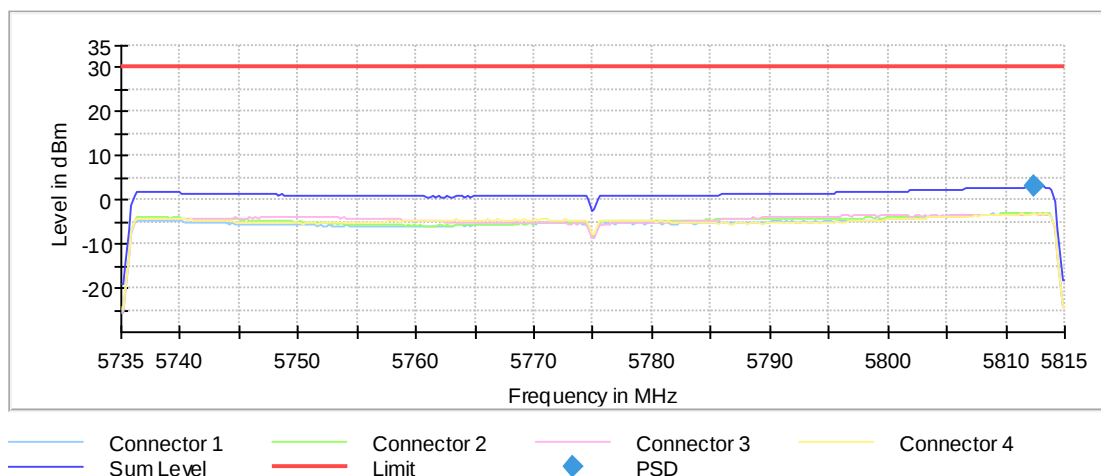


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 80 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	78.150000	0.500000	---	5735.925000	5814.075000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	-0.3	PASS

6 dB Bandwidth

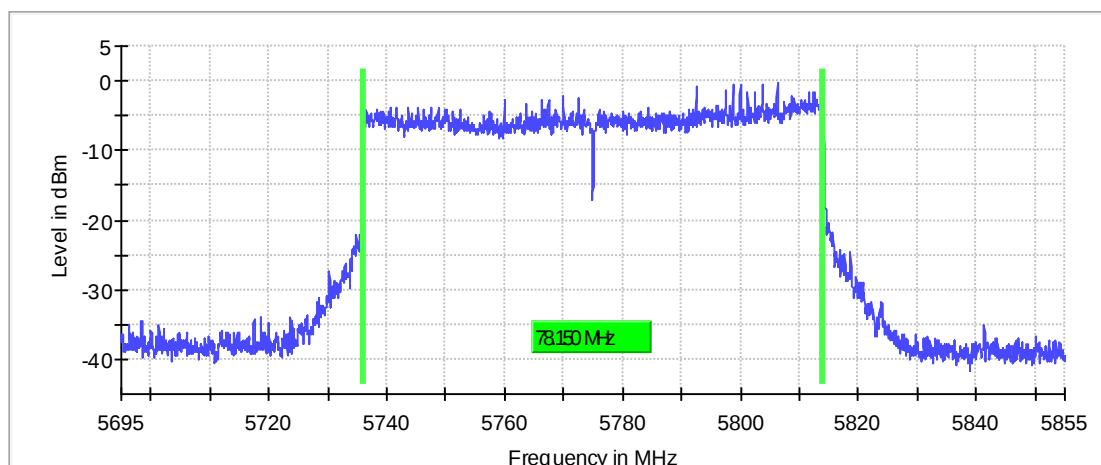

Bandwidth

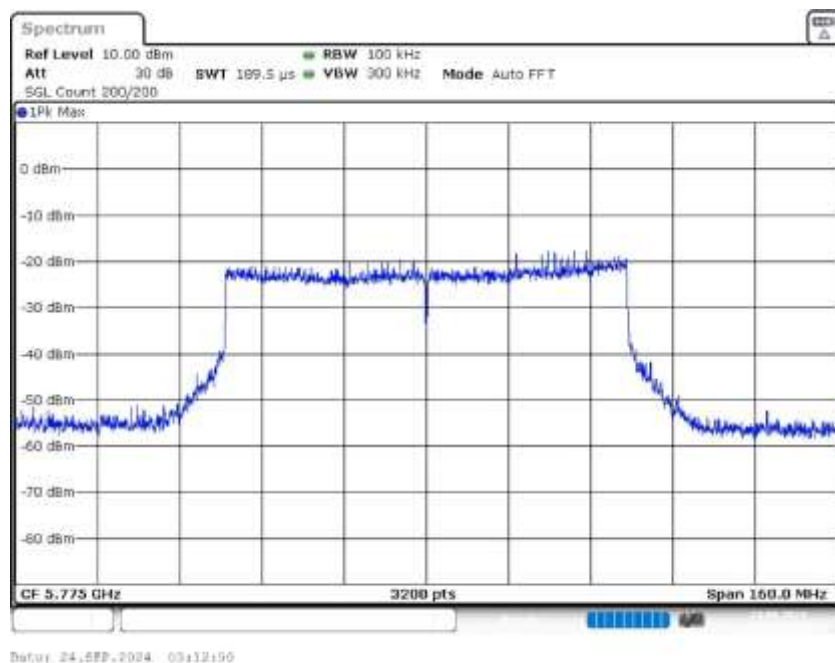


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 80 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	78.500000	---	---	5735.750000	5814.250000

DUT Frequency (MHz)	Result
5775.000000	PASS

99 % Bandwidth

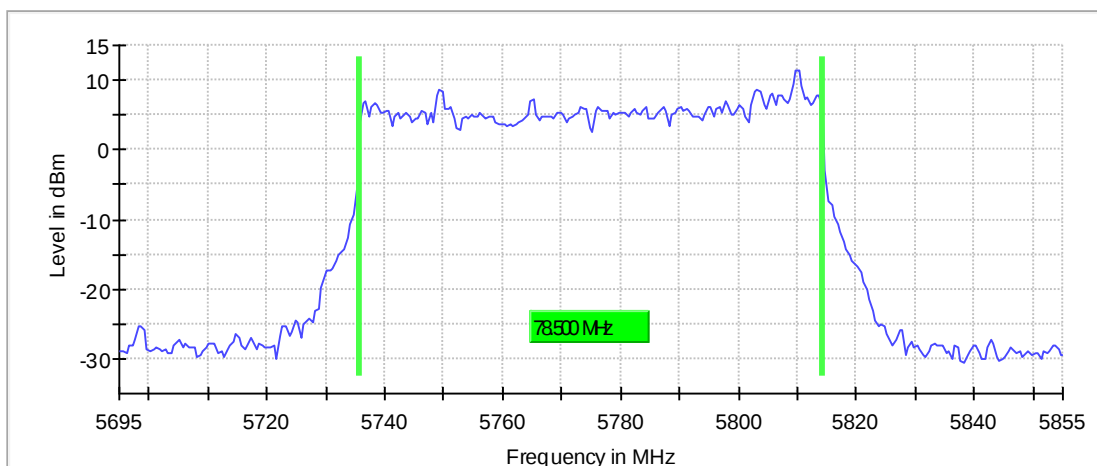

Bandwidth

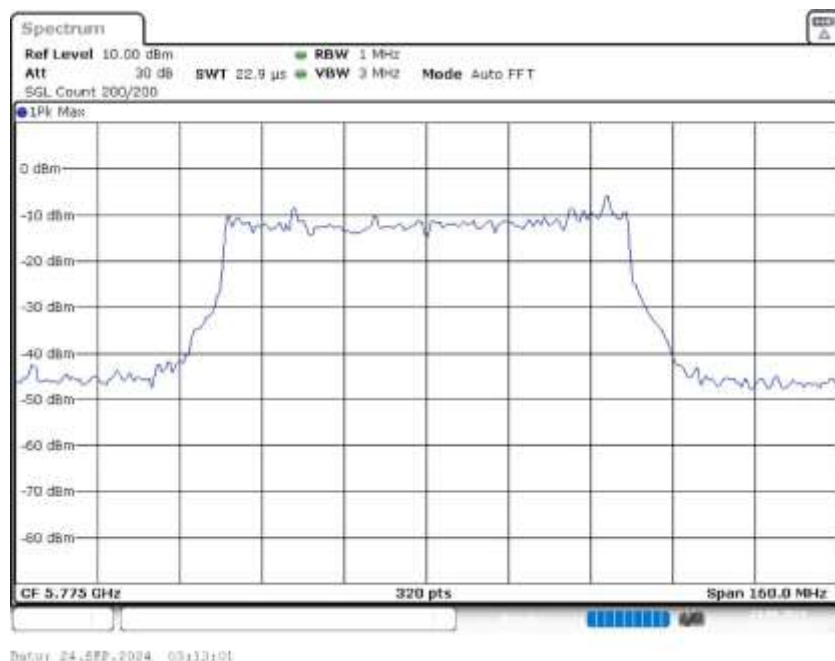

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	1.000 MHz	>= 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	320	~ 320
SweepTime	22.875 μs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 80 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5646.250000	-27.7	0.7	-27.0
5645.750000	-27.7	0.7	-27.0
5648.750000	-28.1	1.1	-27.0
5648.250000	-28.2	1.2	-27.0
5645.250000	-28.2	1.2	-27.0
5638.750000	-28.3	1.3	-27.0
5644.750000	-28.4	1.4	-27.0
5639.250000	-28.5	1.5	-27.0
5642.750000	-28.5	1.5	-27.0
5646.750000	-28.5	1.5	-27.0
5641.750000	-28.6	1.6	-27.0
5635.250000	-28.7	1.7	-27.0
5635.750000	-28.7	1.7	-27.0
5649.250000	-28.8	1.8	-27.0
5642.250000	-28.9	1.9	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

Spurious

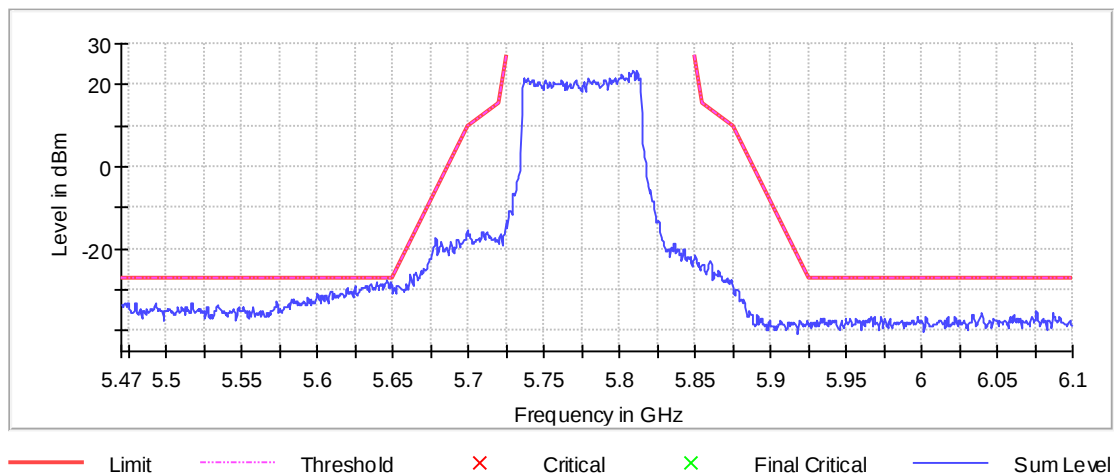

1.1.2 High Gain Mode

Summary


Test	Frequency (MHz)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5745.000	20.000000	PASS
RF output power	5745.000	20.000000	PASS
Power Spectral Density	5745.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5745.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5745.000	20.000000	PASS
Tx Spurious Emission	5745.000	20.000000	PASS
Emission Bandwidth 26 dB	5775.000	20.000000	PASS
Power Spectral Density	5775.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	20.000000	PASS
Tx Spurious Emission	5775.000	20.000000	PASS
Emission Bandwidth 26 dB	5825.000	20.000000	PASS
Power Spectral Density	5825.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5825.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5825.000	20.000000	PASS
Tx Spurious Emission	5825.000	20.000000	PASS
Emission Bandwidth 26 dB	5755.000	40.000000	PASS
Power Spectral Density	5755.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5755.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5755.000	40.000000	PASS
Tx Spurious Emission	5755.000	40.000000	PASS
Emission Bandwidth 26 dB	5775.000	40.000000	PASS
Power Spectral Density	5775.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	40.000000	PASS
Tx Spurious Emission	5775.000	40.000000	PASS
Emission Bandwidth 26 dB	5795.000	40.000000	PASS
Power Spectral Density	5795.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5795.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5795.000	40.000000	PASS
Tx Spurious Emission	5795.000	40.000000	PASS
Emission Bandwidth 26 dB	5775.000	80.000000	PASS
Power Spectral Density	5775.000	80.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	80.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	80.000000	PASS
Tx Spurious Emission	5775.000	80.000000	PASS

Emission Bandwidth 26 dB (5745 MHz; 24.000 dBm; 20 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	22.600000	---	---	5733.250000	5755.850000

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	3.4	PASS

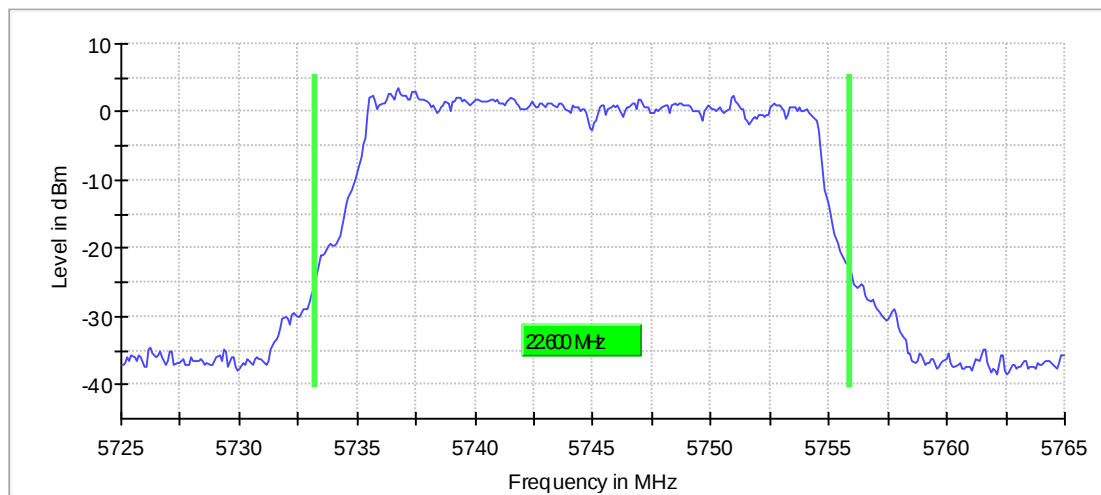

Bandwidth

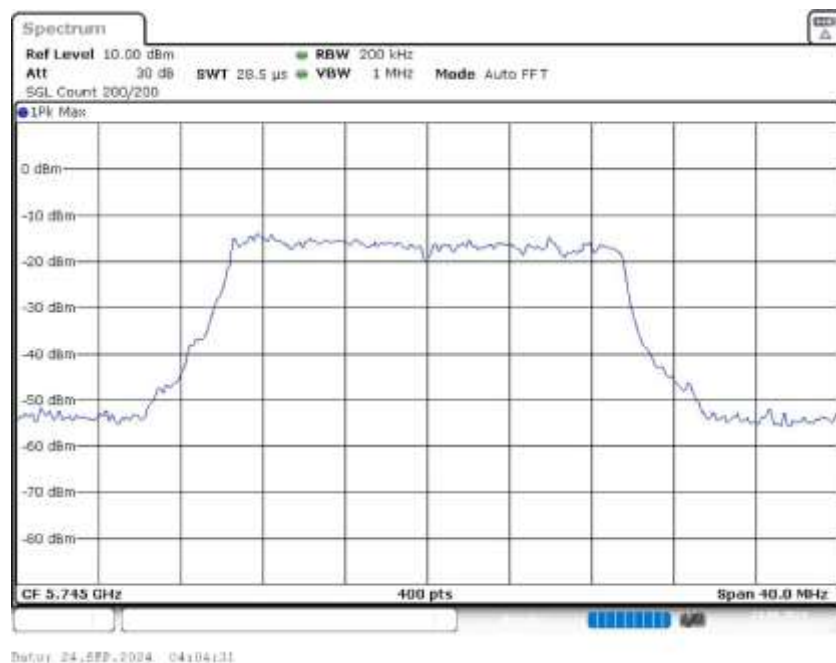

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweptime	28.477 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	20.0	30.0	20.0	99.726	PASS

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


Power Spectral Density (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5736.287129	4.570	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

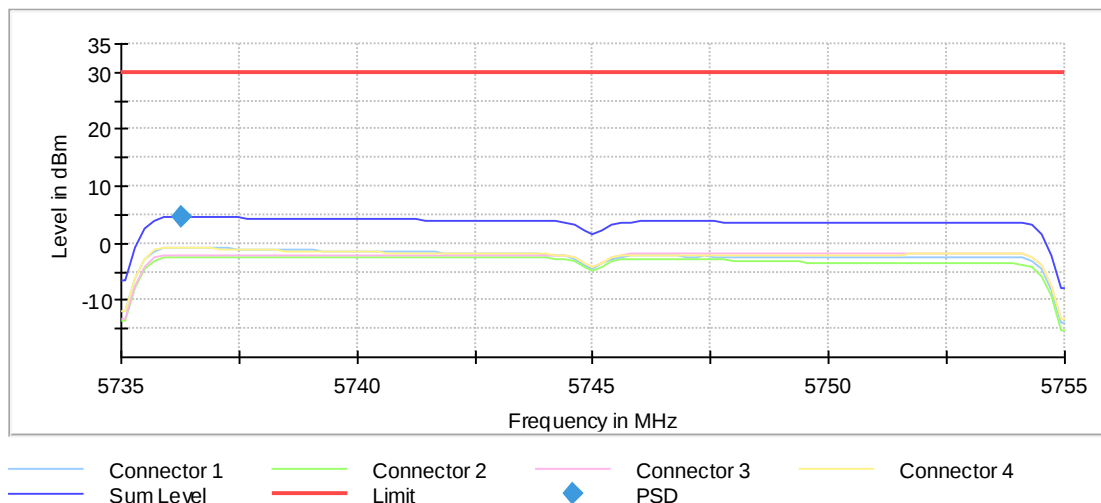

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.75500 GHz	5.75500 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
SweepType	FFT	AUTO
Preamp	off	off

Minimum Emission Bandwidth 6 dB (5745 MHz; 24.000 dBm; 20 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	19.200000	0.500000	---	5735.375000	5754.575000

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	0.0	PASS

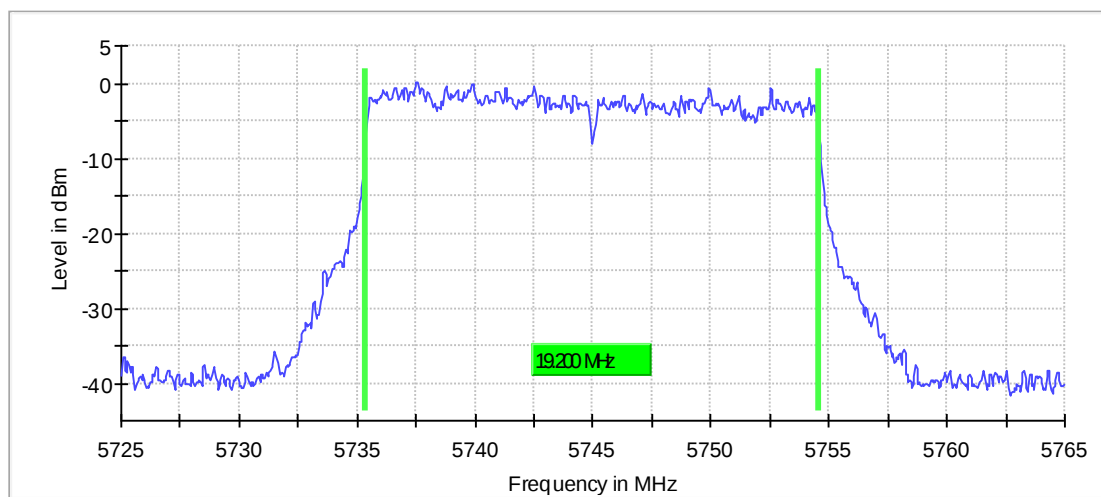

Bandwidth

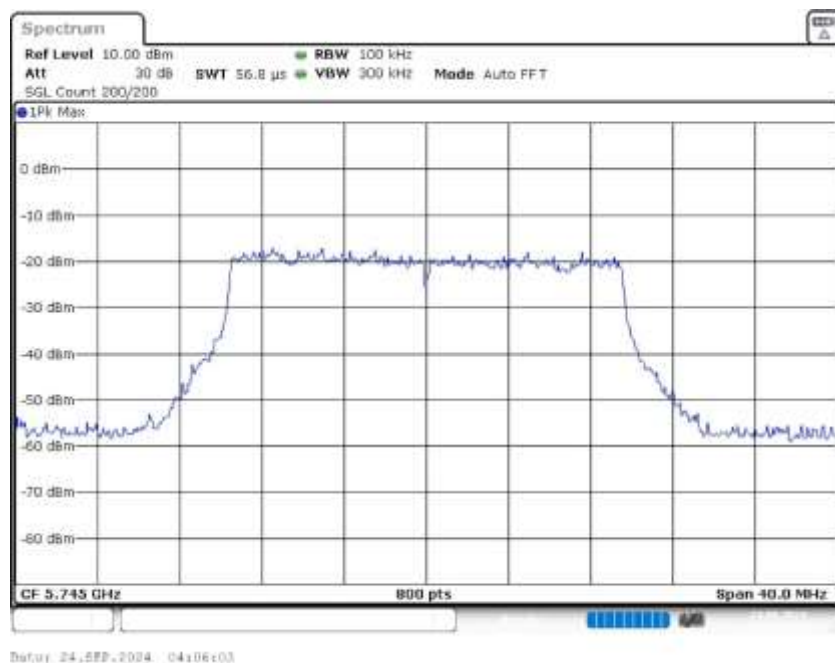

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweptime	56.836 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm


Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5745 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	19.100000	---	---	5735.450000	5754.550000

DUT Frequency (MHz)	Result
5745.000000	PASS

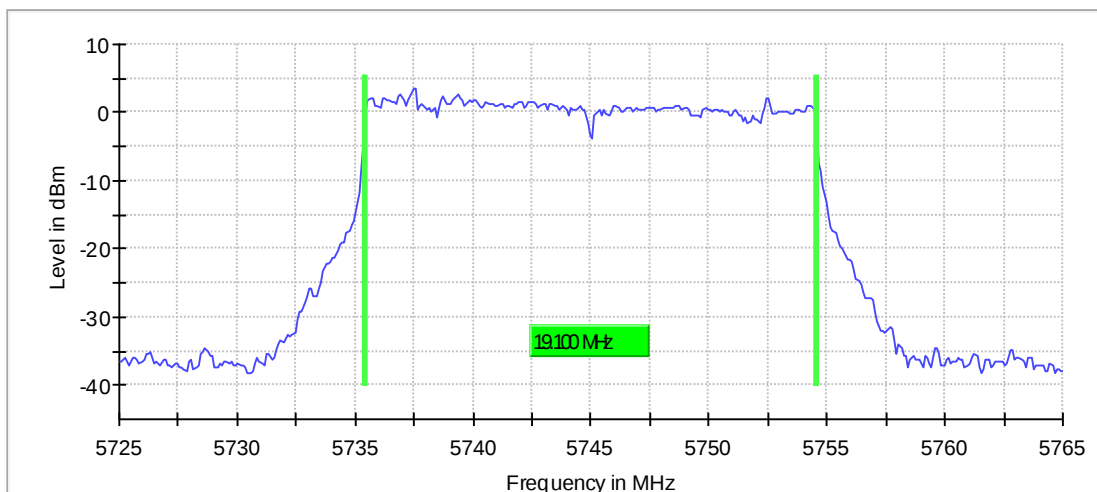

Bandwidth



Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	≥ 200.000 kHz
VBW	1.000 MHz	≥ 600.000 kHz
SweepPoints	400	~ 400
Sweptime	28.477 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5551.750000	-30.9	3.9	-27.0
5940.750000	-30.9	3.9	-27.0
5640.750000	-30.9	3.9	-27.0
6040.250000	-31.0	4.0	-27.0
6040.750000	-31.1	4.1	-27.0
6009.250000	-31.1	4.1	-27.0
6066.250000	-31.1	4.1	-27.0
5641.250000	-31.2	4.2	-27.0
5634.750000	-31.2	4.2	-27.0
6008.750000	-31.2	4.2	-27.0
5542.750000	-31.2	4.2	-27.0
6046.750000	-31.2	4.2	-27.0
5543.250000	-31.3	4.3	-27.0
5623.250000	-31.3	4.3	-27.0
5604.250000	-31.3	4.3	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

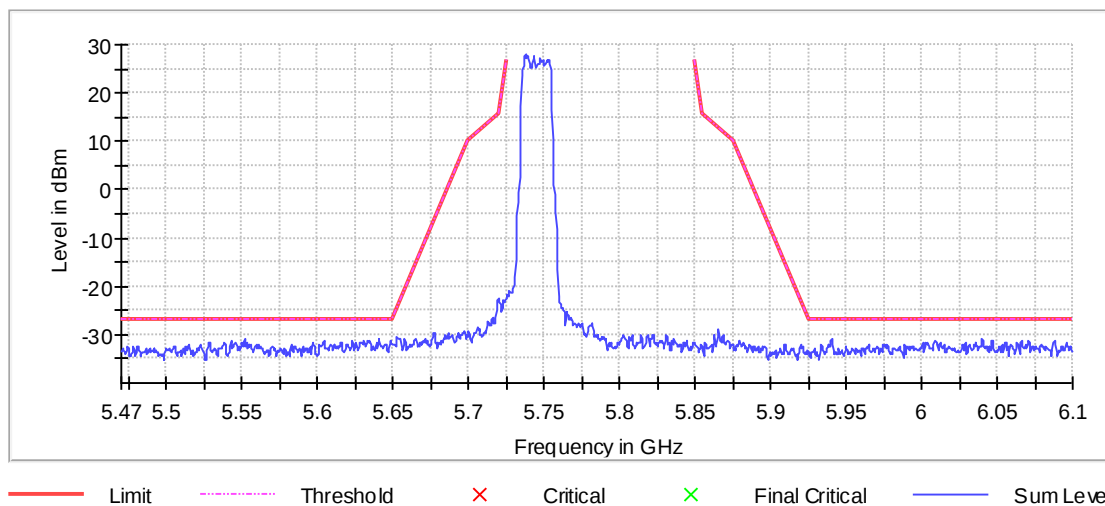

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1260	~ 1260
Sweeptime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO


Preamp	off	off
--------	-----	-----

Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 20 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	23.200000	---	---	5763.350000	5786.550000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	2.5	PASS

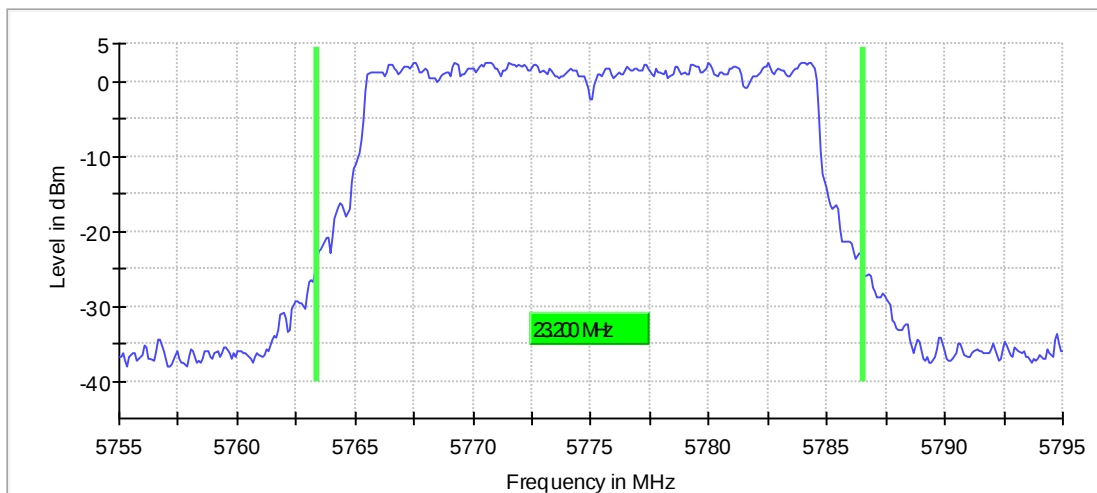

Bandwidth

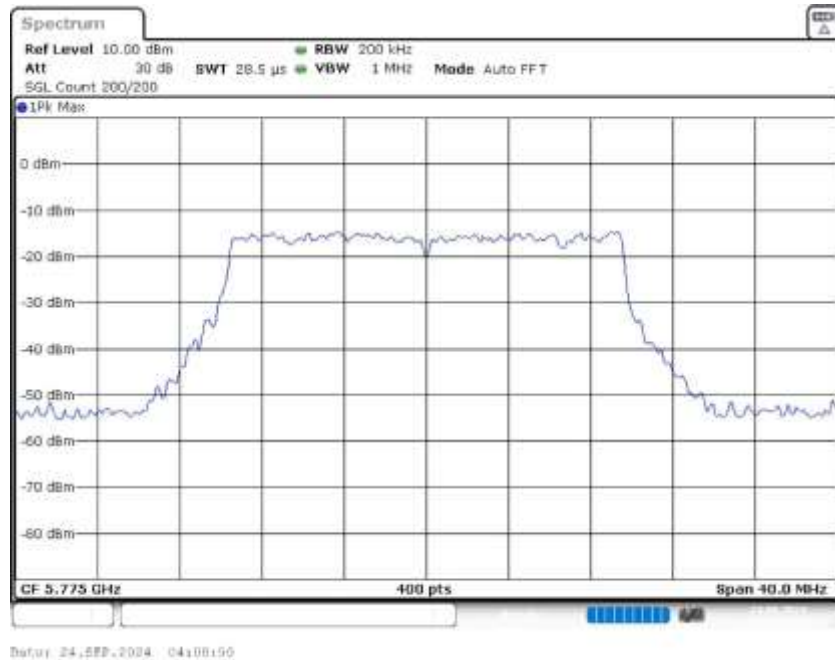


Power Spectral Density (5775 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5783.712871	4.308	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

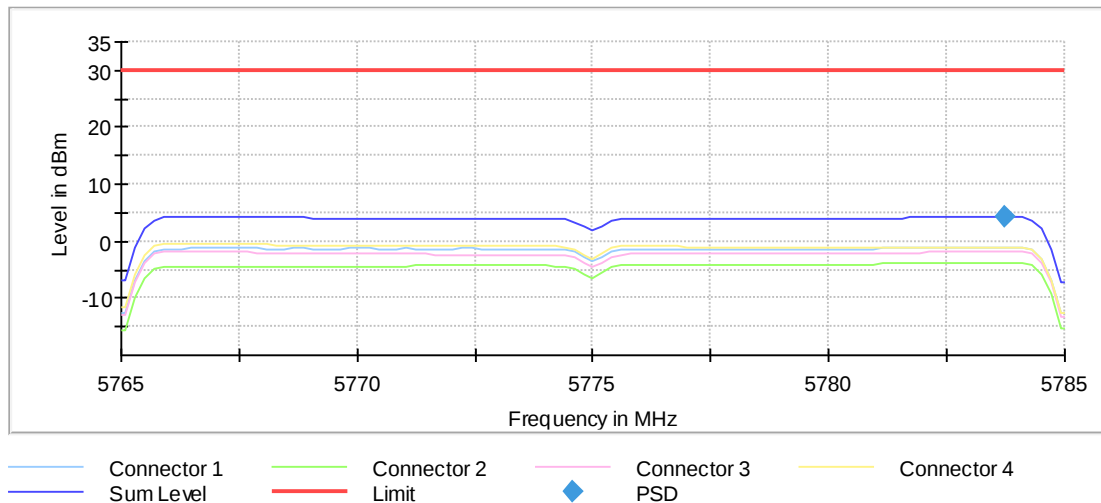


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 20 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	19.100000	0.500000	---	5765.475000	5784.575000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	2.9	PASS

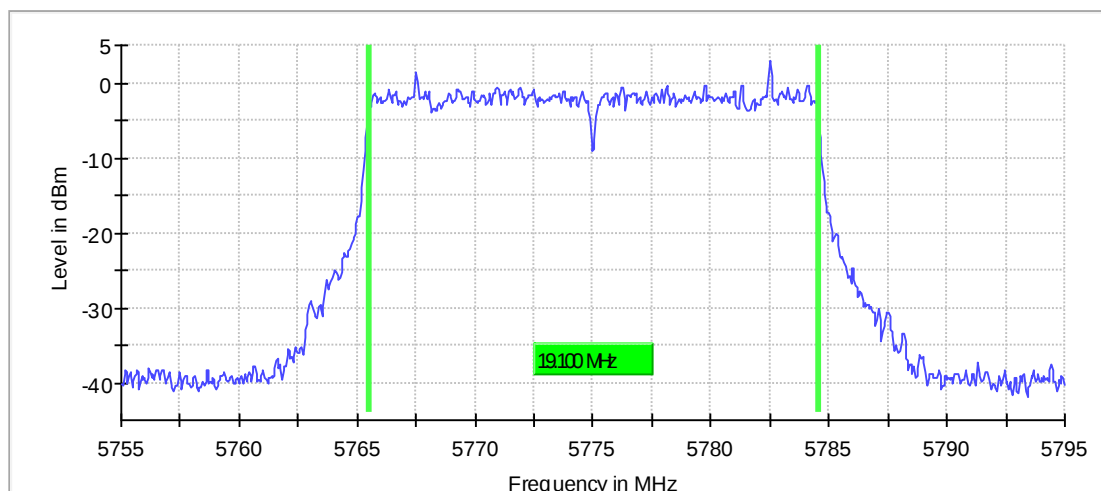

Bandwidth

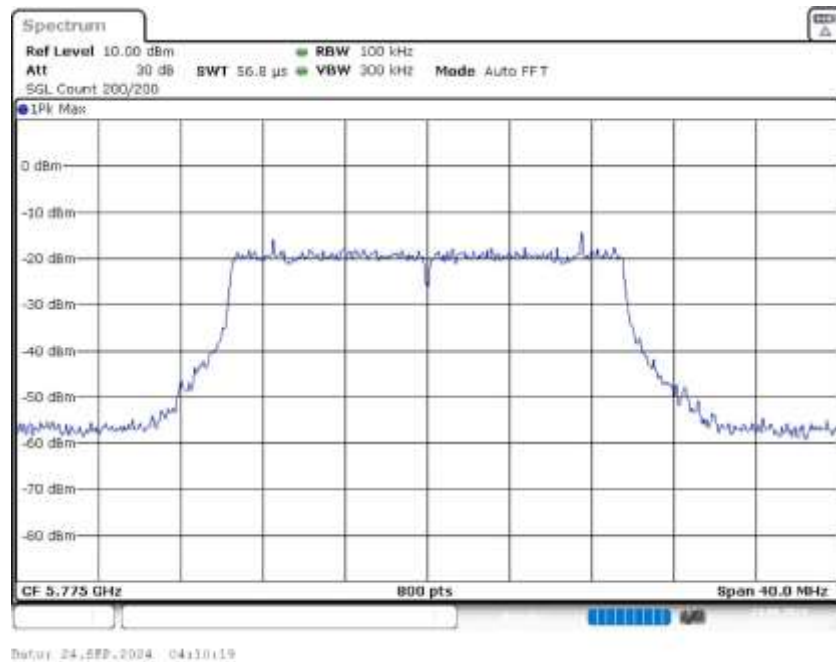


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	19.100000	---	---	5765.450000	5784.550000

DUT Frequency (MHz)	Result
5775.000000	PASS

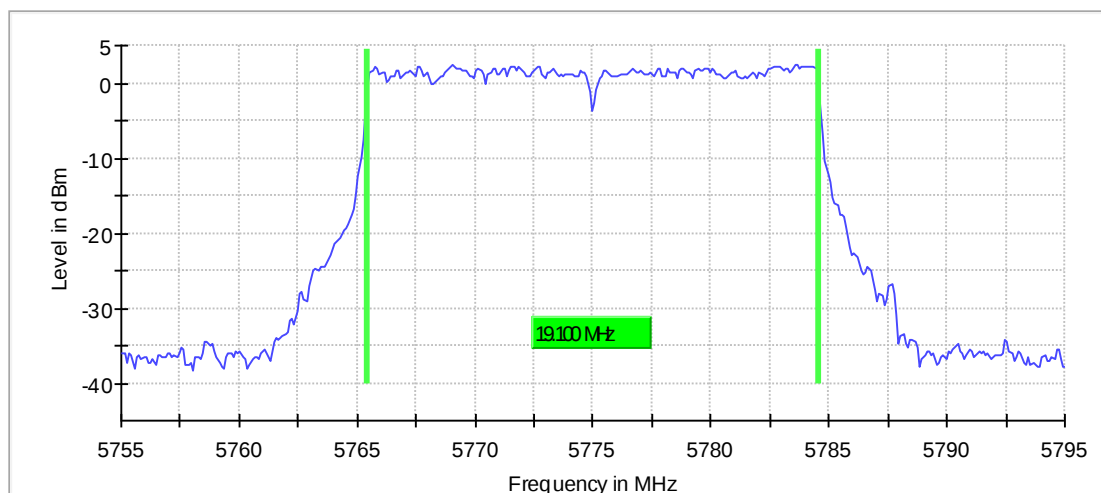

Bandwidth



Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	28.477 μs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5649.750000	-30.7	3.7	-27.0
6034.250000	-30.8	3.8	-27.0
5638.750000	-30.9	3.9	-27.0
5580.250000	-30.9	3.9	-27.0
5649.250000	-30.9	3.9	-27.0
5589.750000	-31.0	4.0	-27.0
6034.750000	-31.0	4.0	-27.0
5576.750000	-31.0	4.0	-27.0
5577.250000	-31.0	4.0	-27.0
5590.250000	-31.0	4.0	-27.0
6035.750000	-31.0	4.0	-27.0
5579.750000	-31.1	4.1	-27.0
6035.250000	-31.1	4.1	-27.0
5574.750000	-31.2	4.2	-27.0
5584.250000	-31.2	4.2	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

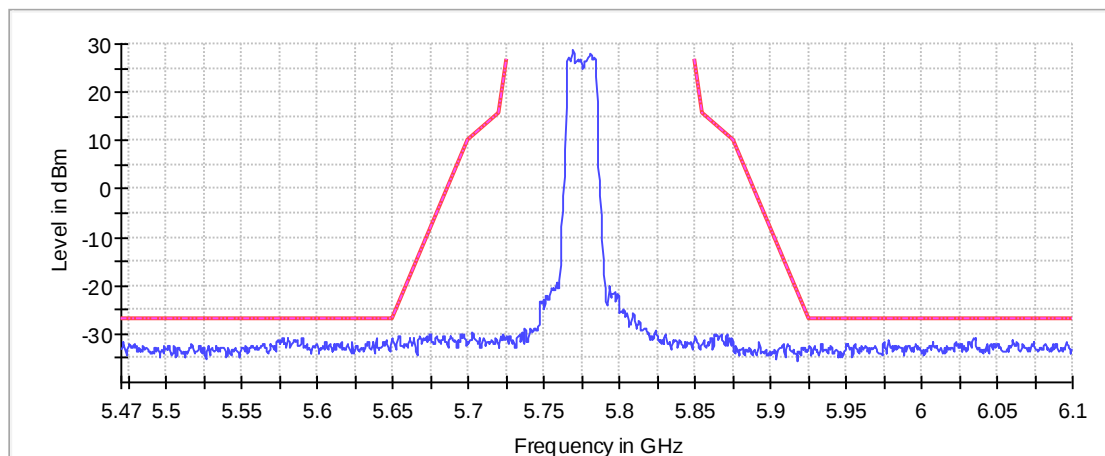


— Limit — Threshold × Critical × Final Critical — Sum Level

Emission Bandwidth 26 dB (5825 MHz; 24.000 dBm; 20 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	22.100000	---	---	5814.250000	5836.350000

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	3.5	PASS

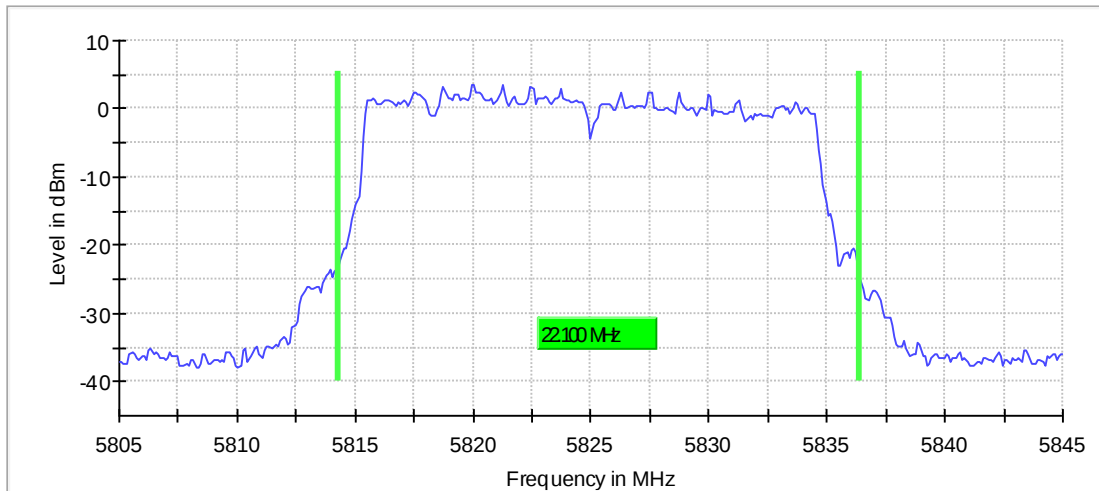

Bandwidth

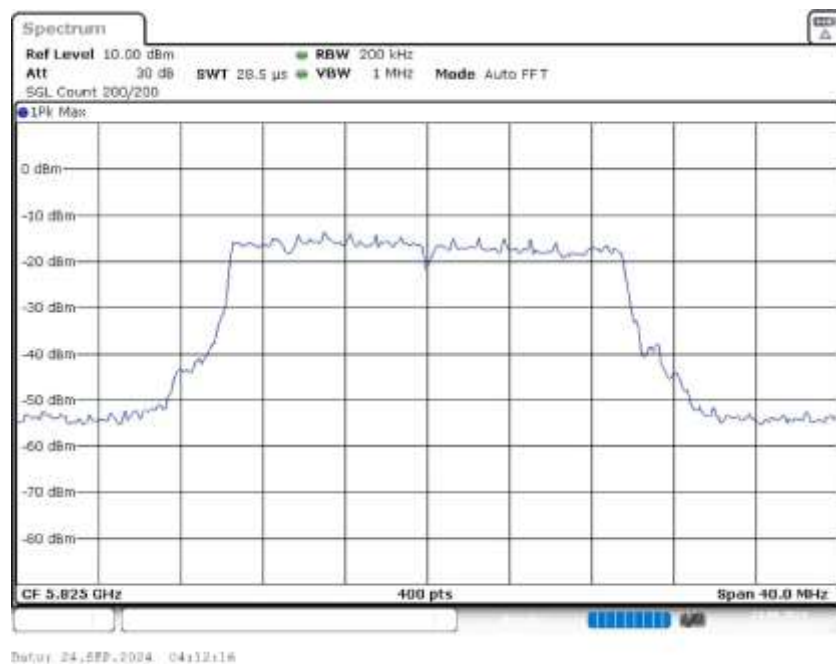


Power Spectral Density (5825 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5817.475248	4.386	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

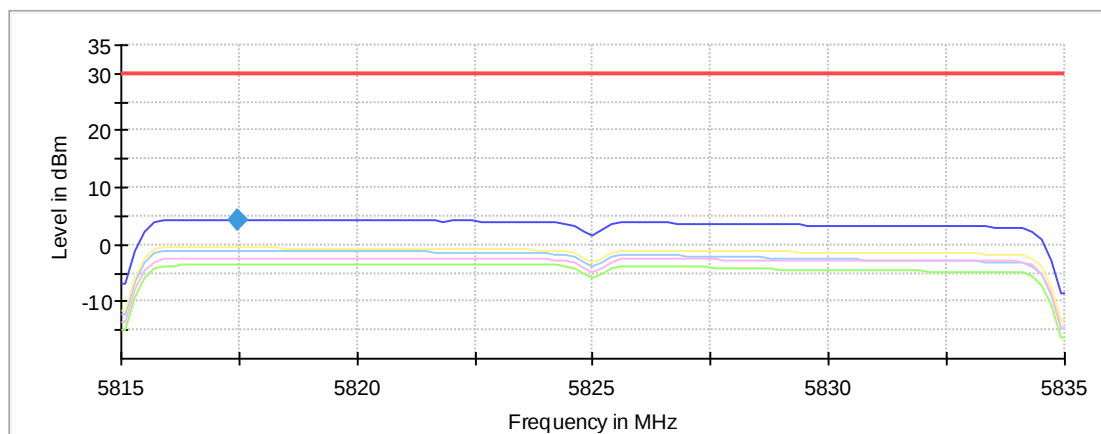


Connector 1 Connector 2 Connector 3 Connector 4
 Sum Level Limit PSD

Minimum Emission Bandwidth 6 dB (5825 MHz; 24.000 dBm; 20 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	19.200000	0.500000	---	5815.375000	5834.575000

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	0.0	PASS

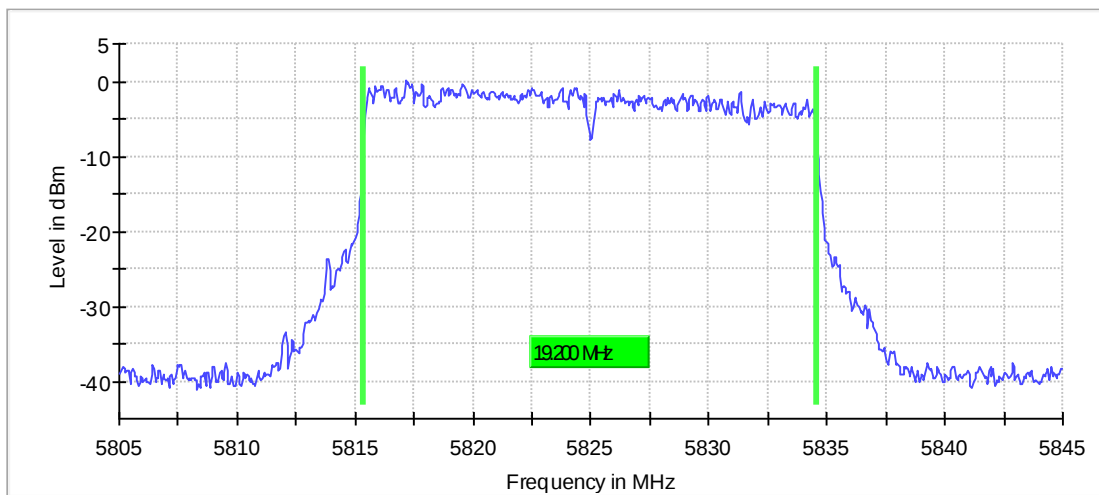

Bandwidth

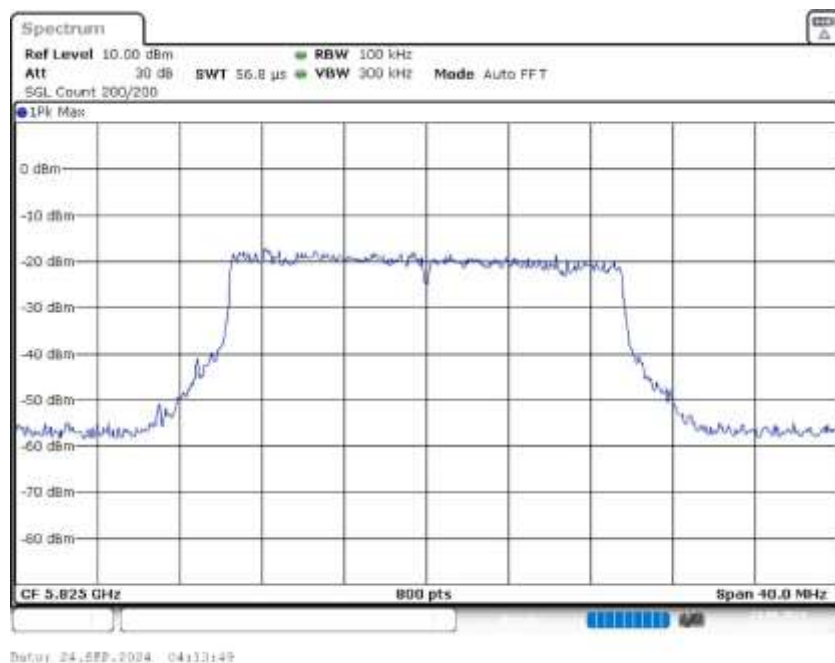


Occupied Channel Bandwidth 99% (5825 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	19.100000	---	---	5815.350000	5834.450000

DUT Frequency (MHz)	Result
5825.000000	PASS

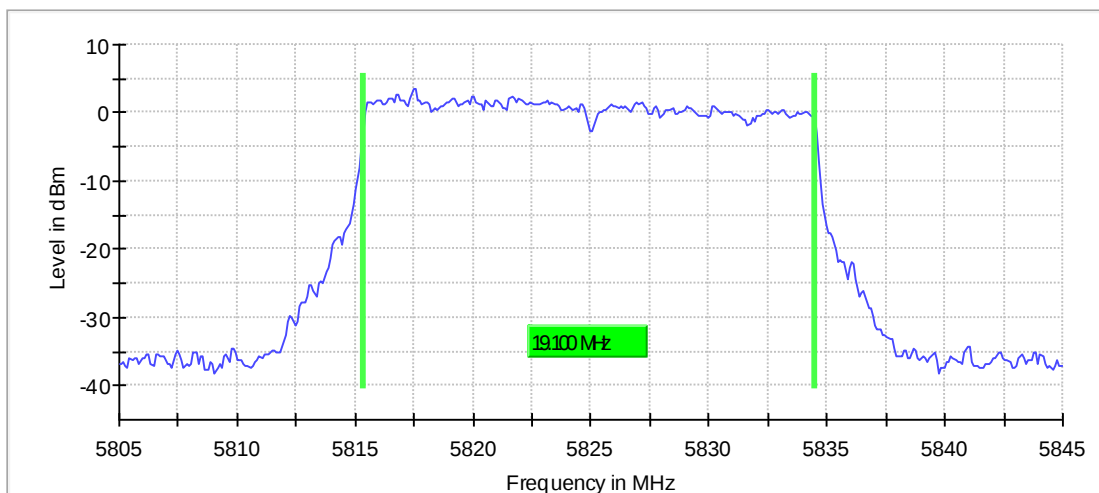

Bandwidth



Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz

RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	28.477 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5825 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5631.750000	-29.0	2.0	-27.0
5632.250000	-29.3	2.3	-27.0
5631.250000	-29.6	2.6	-27.0
5630.750000	-30.5	3.5	-27.0
5641.250000	-30.8	3.8	-27.0
5633.750000	-30.8	3.8	-27.0
5640.750000	-30.9	3.9	-27.0
5626.750000	-30.9	3.9	-27.0
6035.250000	-31.0	4.0	-27.0
5630.250000	-31.0	4.0	-27.0
5634.250000	-31.0	4.0	-27.0
5643.250000	-31.1	4.1	-27.0
5643.750000	-31.1	4.1	-27.0
5640.250000	-31.1	4.1	-27.0
5638.750000	-31.1	4.1	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

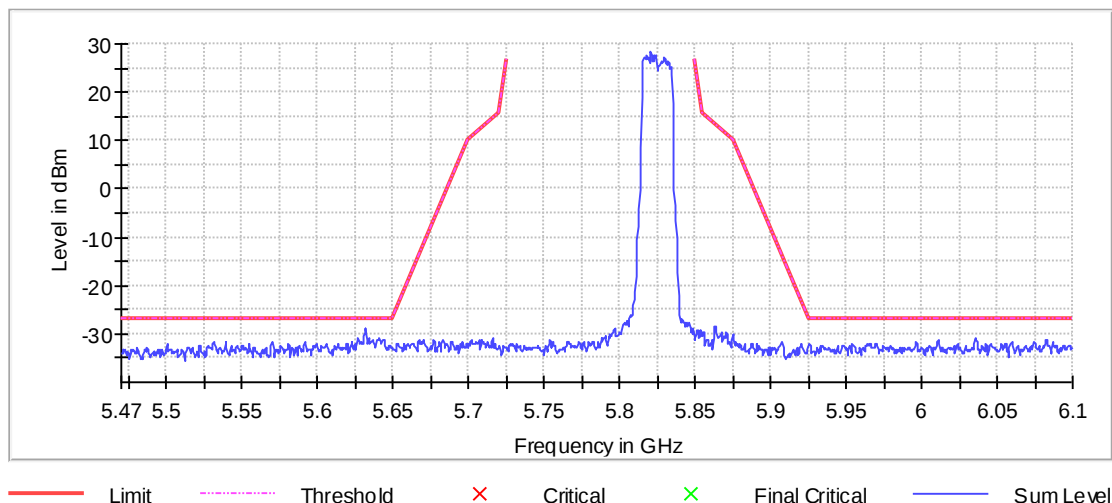


Emission Bandwidth 26 dB (5755 MHz; 24.000 dBm; 40 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	43.527205	---	---	5732.936210	5776.463415

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	3.3	PASS

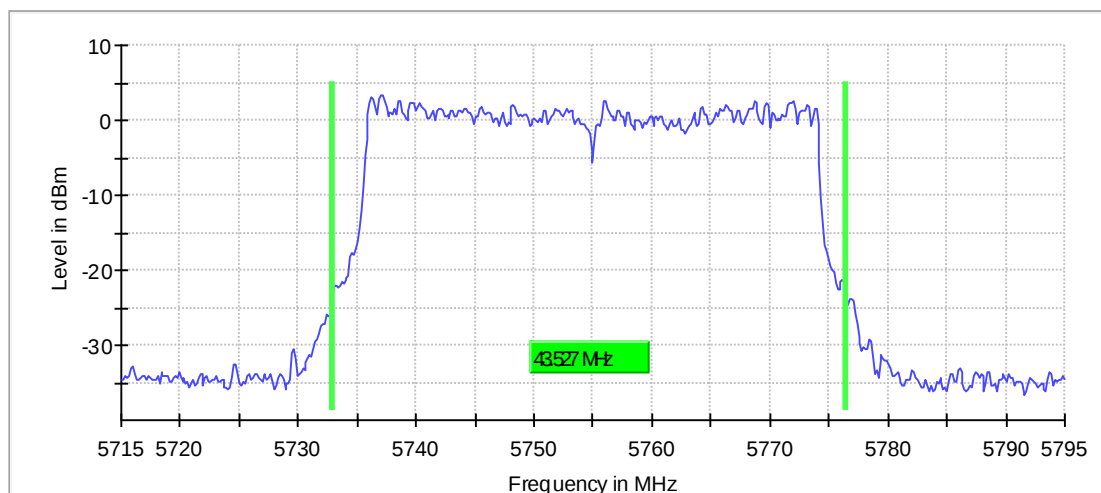

Bandwidth

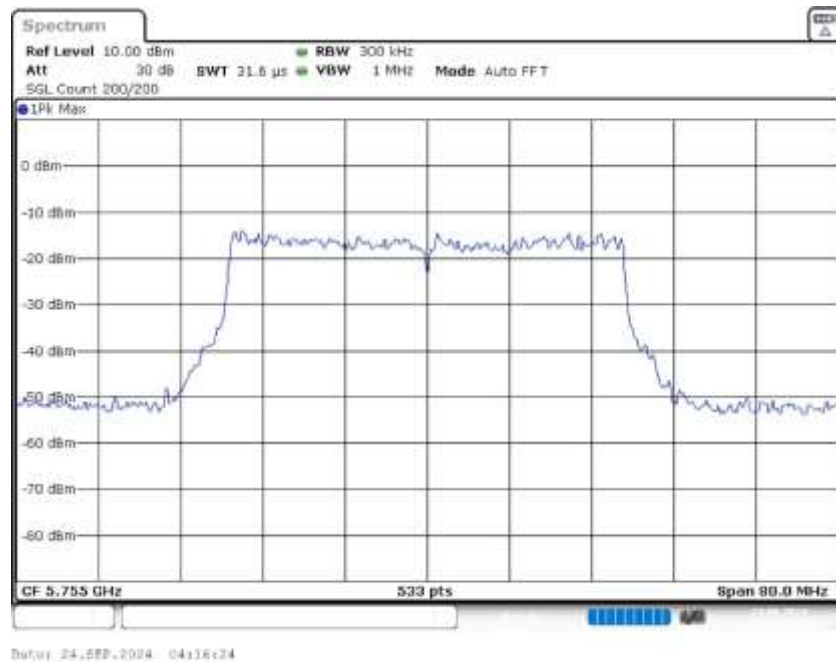


Power Spectral Density (5755 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5736.625000	2.310	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

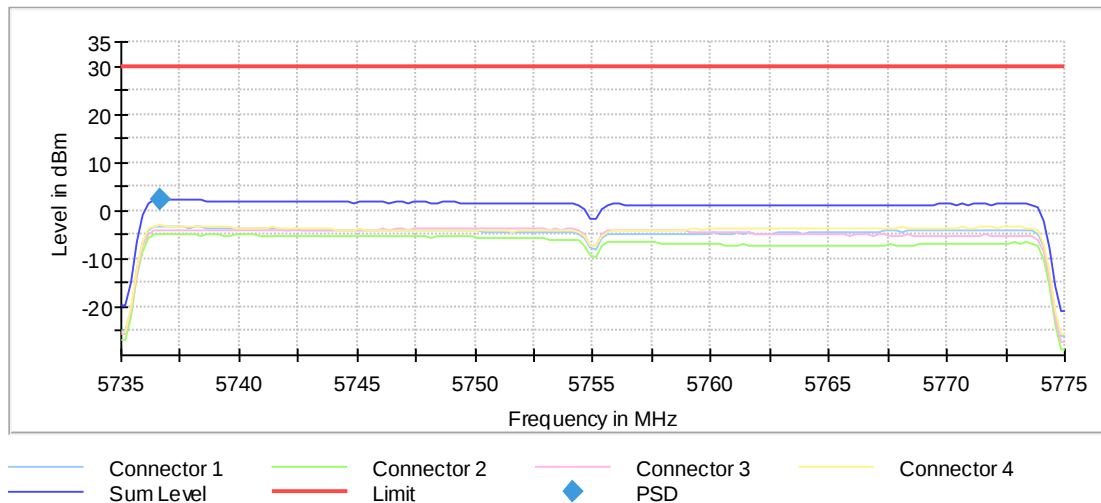


Minimum Emission Bandwidth 6 dB (5755 MHz; 24.000 dBm; 40 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	38.400000	0.500000	---	5735.775000	5774.175000

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	-0.6	PASS

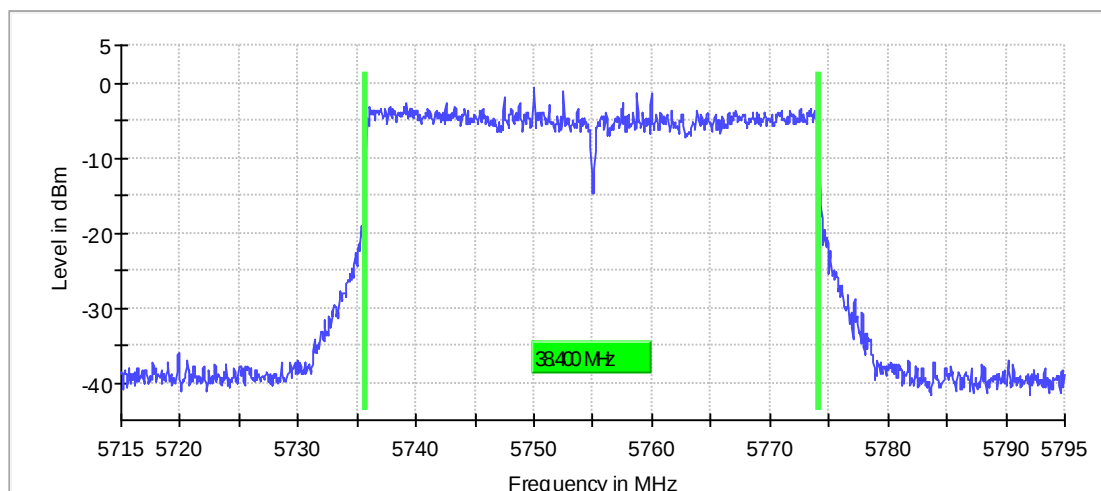

Bandwidth

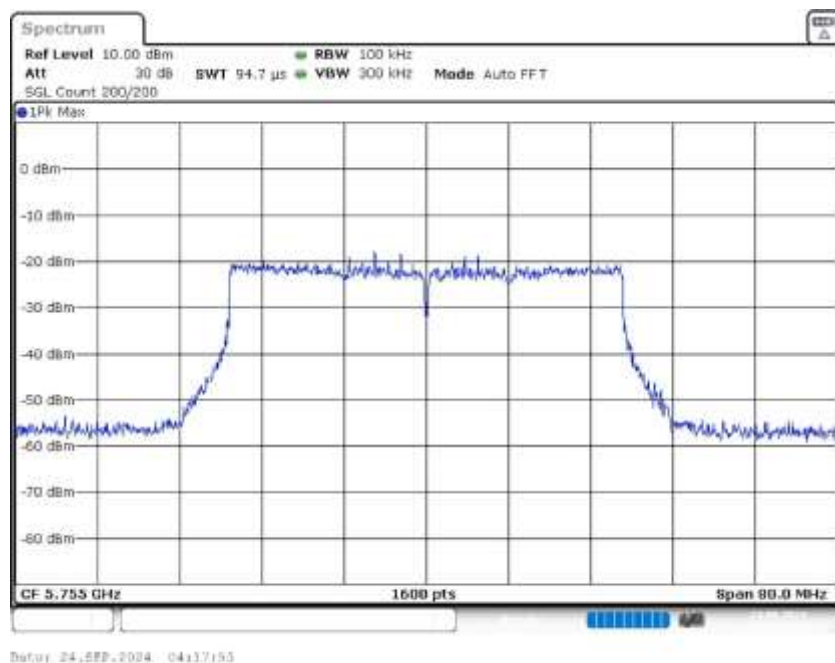


Occupied Channel Bandwidth 99% (5755 MHz; 24.000 dBm; 40 MHz)


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	38.250000	---	---	5735.875000	5774.125000

DUT Frequency (MHz)	Result
5755.000000	PASS

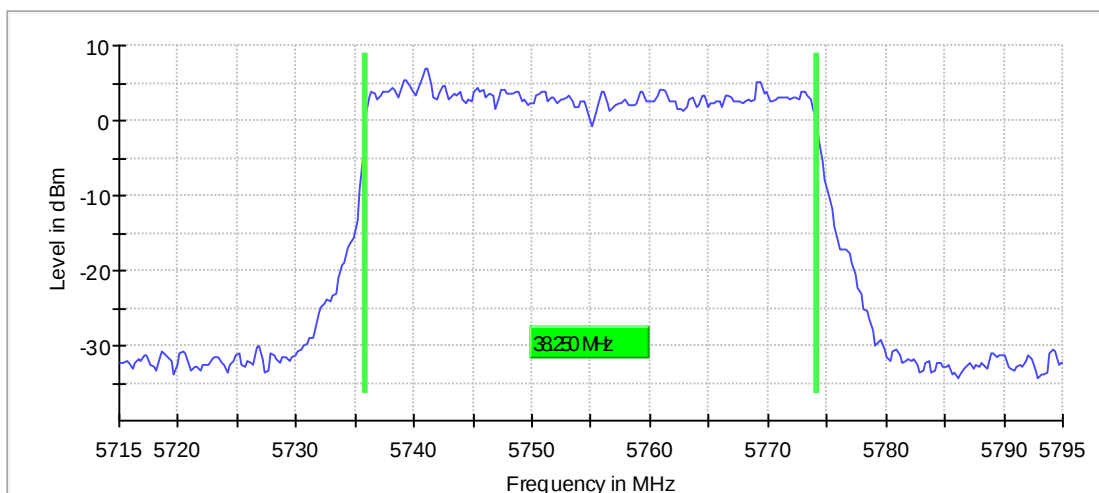

Bandwidth

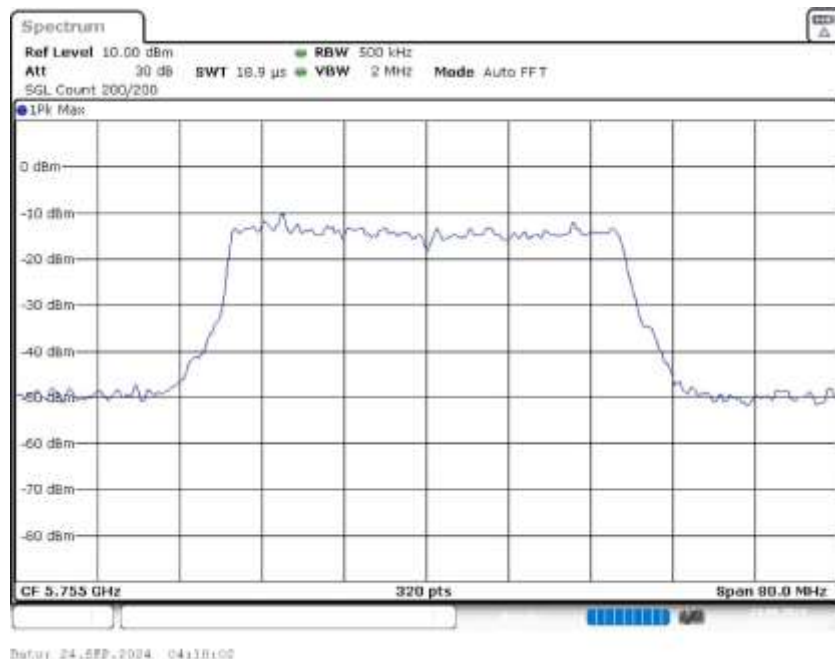

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	≥ 400.000 kHz
VBW	2.000 MHz	≥ 1.500 MHz
SweepPoints	320	~ 320
SweepTime	18.906 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5755 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5644.750000	-28.6	1.6	-27.0
5644.250000	-28.8	1.8	-27.0
5645.250000	-29.4	2.4	-27.0
5640.250000	-29.7	2.7	-27.0
5641.750000	-29.8	2.8	-27.0
5640.750000	-30.0	3.0	-27.0
5641.250000	-30.0	3.0	-27.0
5642.250000	-30.0	3.0	-27.0
5643.750000	-30.1	3.1	-27.0
5634.750000	-30.2	3.2	-27.0
5649.250000	-30.2	3.2	-27.0
5627.250000	-30.2	3.2	-27.0
5639.750000	-30.3	3.3	-27.0
5635.250000	-30.3	3.3	-27.0
5621.750000	-30.3	3.3	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

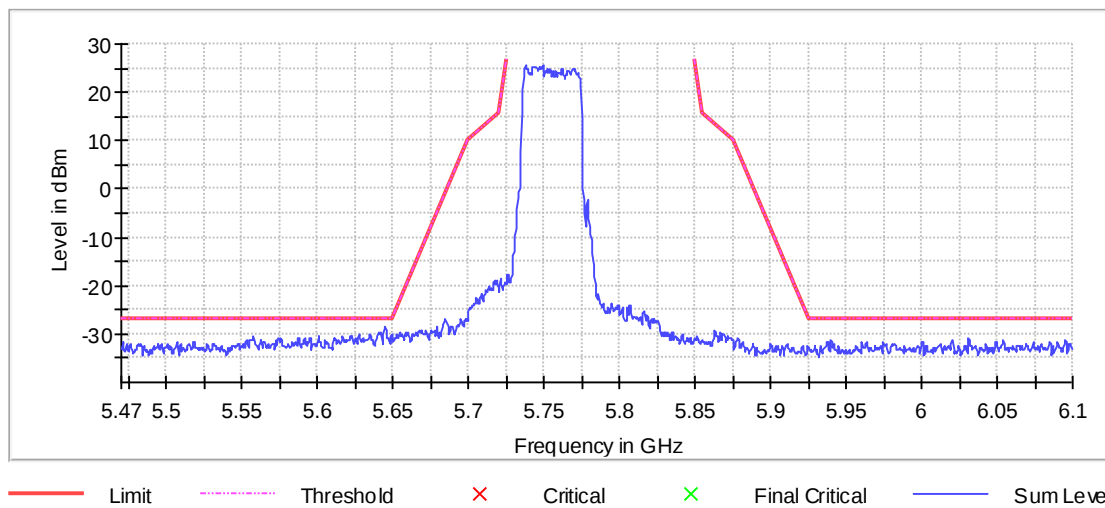


Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 40 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	42.176360	---	---	5754.587242	5796.763602

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	2.5	PASS

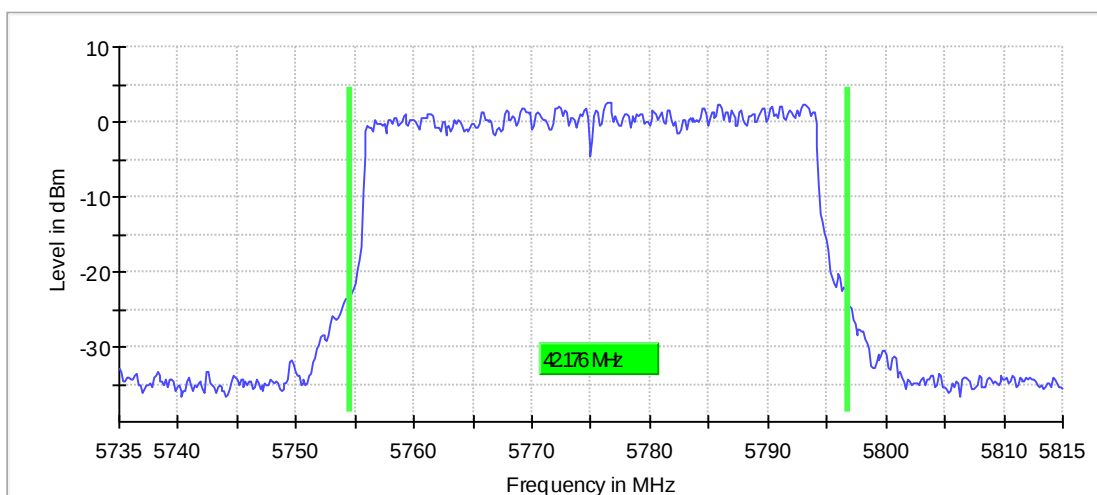

Bandwidth

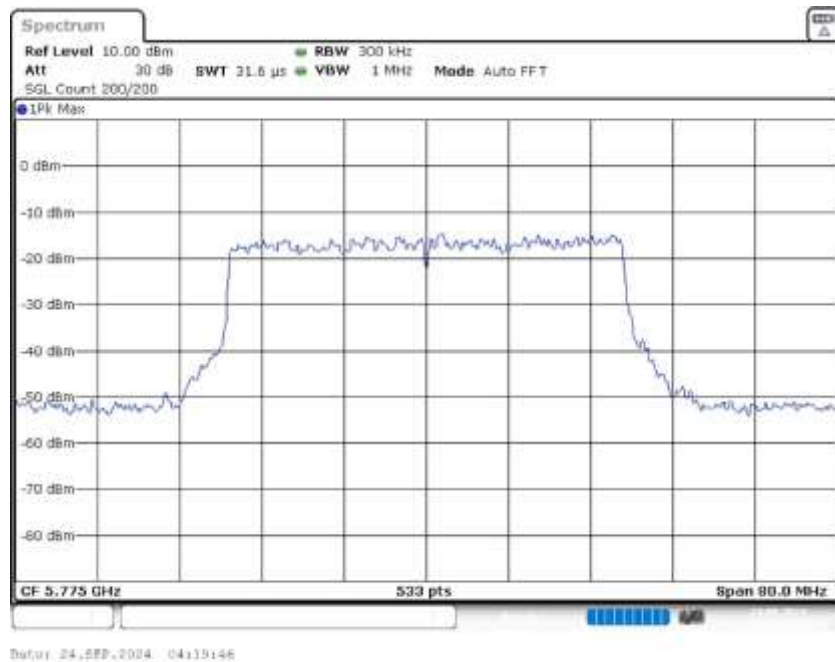


Power Spectral Density (5775 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5793.375000	1.789	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

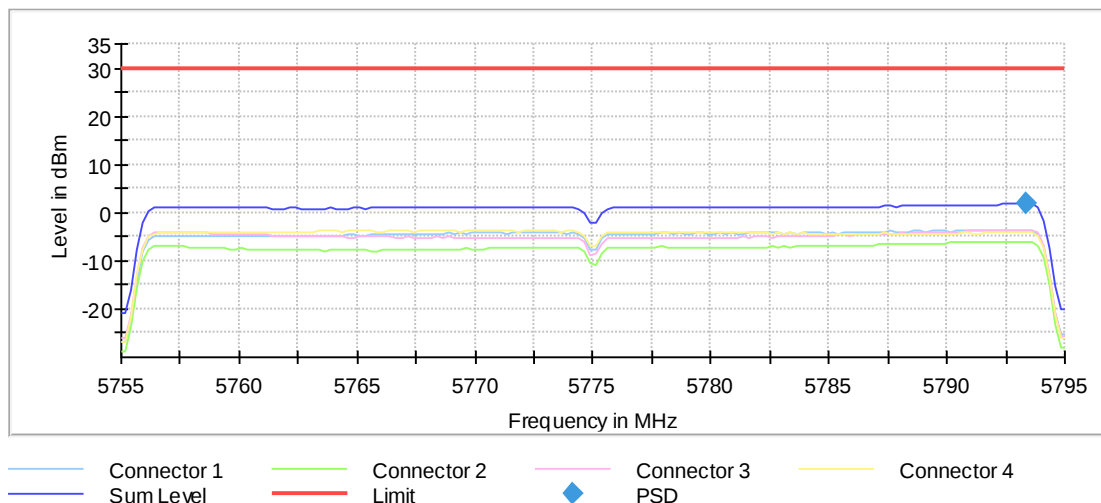


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 40 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	38.250000	0.500000	---	5755.875000	5794.125000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	-2.7	PASS

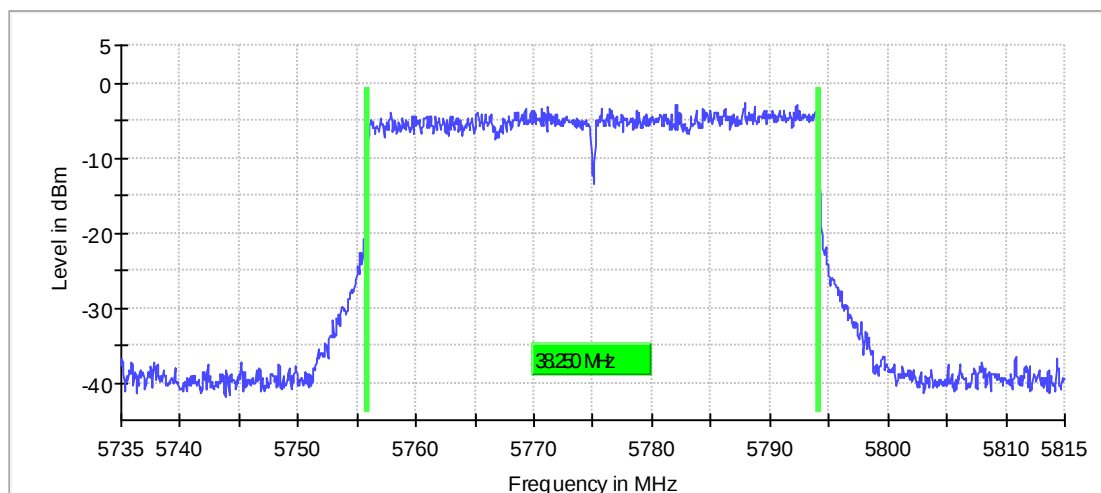

Bandwidth

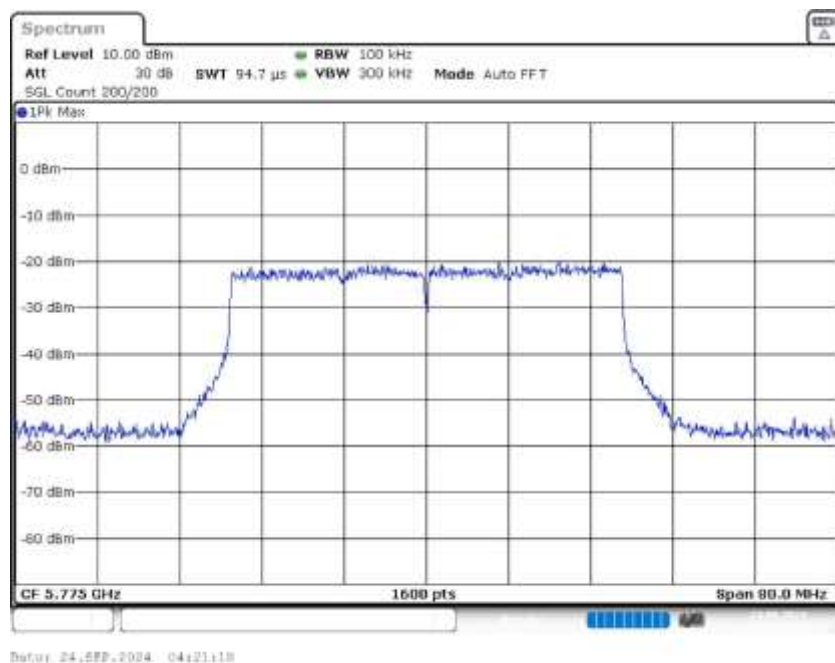


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 40 MHz)


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	38.250000	---	---	5755.875000	5794.125000

DUT Frequency (MHz)	Result
5775.000000	PASS

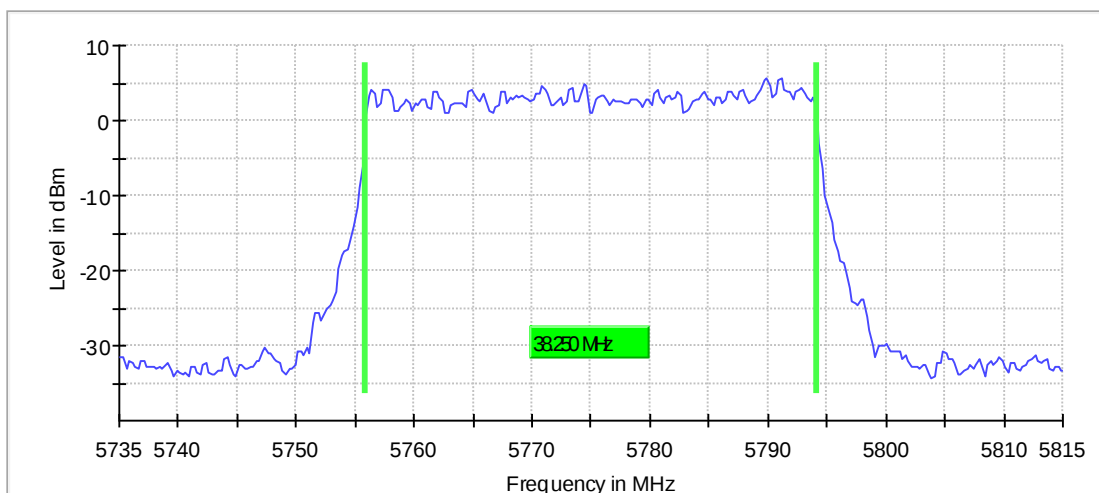

Bandwidth

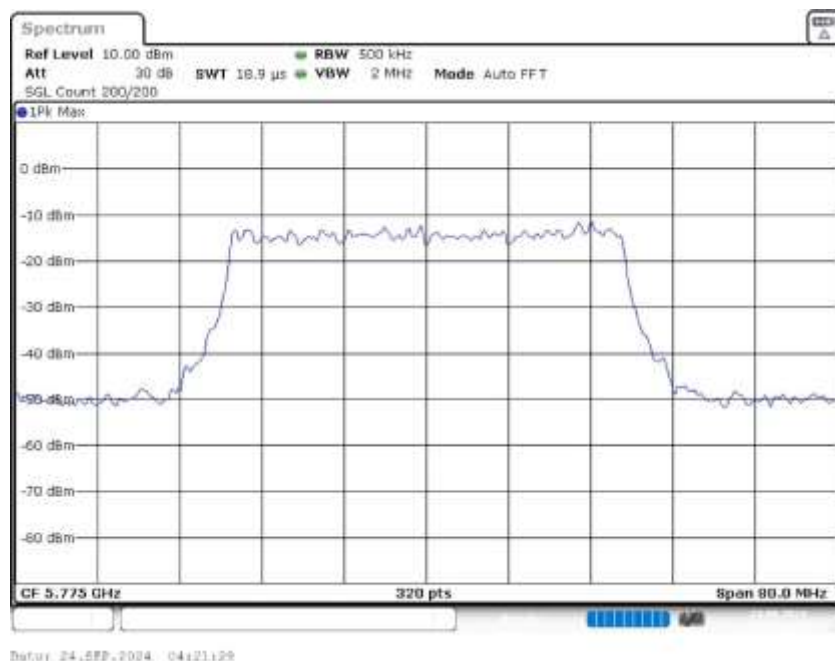

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweptime	18.906 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5625.250000	-30.0	3.0	-27.0
5589.750000	-30.1	3.1	-27.0
5648.250000	-30.3	3.3	-27.0
5589.250000	-30.3	3.3	-27.0
5648.750000	-30.5	3.5	-27.0
5624.750000	-30.8	3.8	-27.0
5606.750000	-30.9	3.9	-27.0
5647.750000	-31.0	4.0	-27.0
5625.750000	-31.0	4.0	-27.0
5606.250000	-31.0	4.0	-27.0
5590.250000	-31.0	4.0	-27.0
5645.750000	-31.0	4.0	-27.0
6022.250000	-31.1	4.1	-27.0
5649.250000	-31.1	4.1	-27.0
5636.750000	-31.1	4.1	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

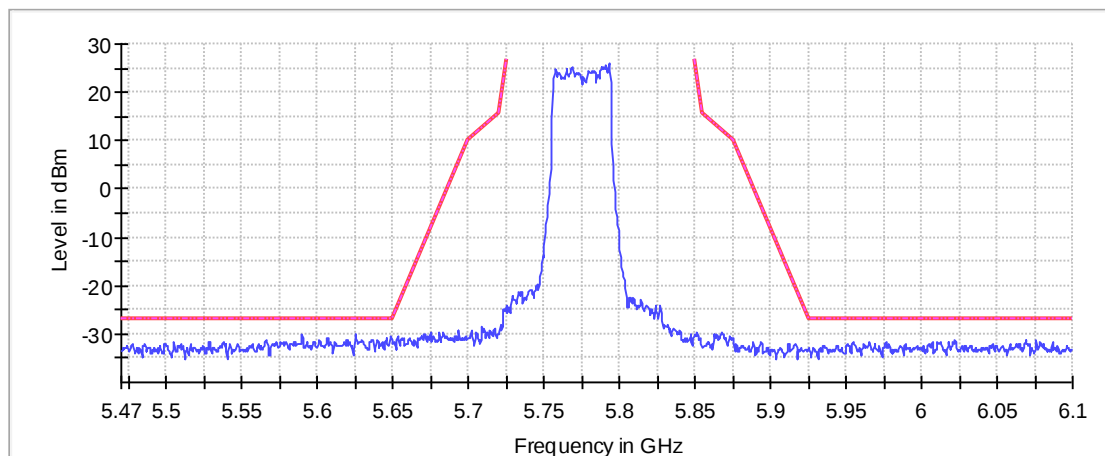

— Limit
 — Threshold
 × Critical
 × Final Critical
 — Sum Level


Emission Bandwidth 26 dB (5795 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	42.476548	---	---	5773.986867	5816.463415

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	3.9	PASS

26 dB Bandwidth

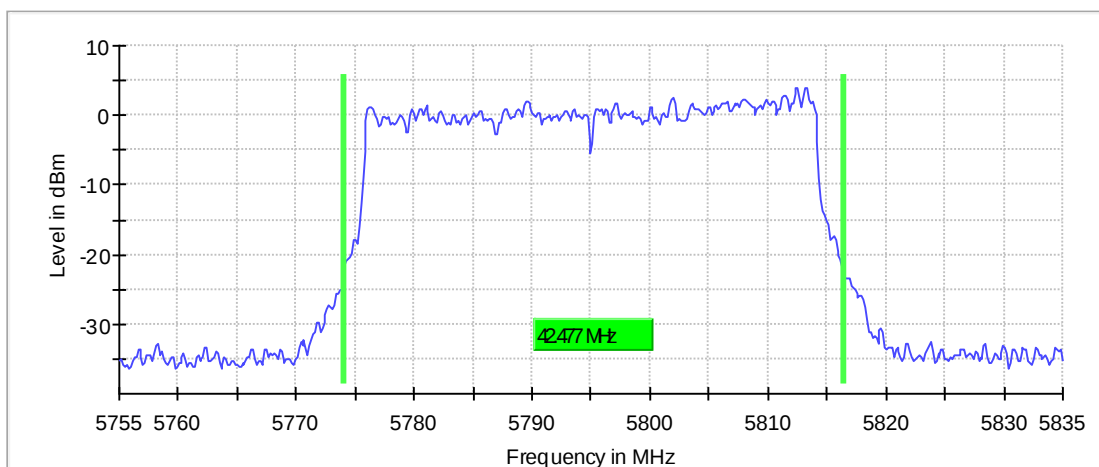

Bandwidth

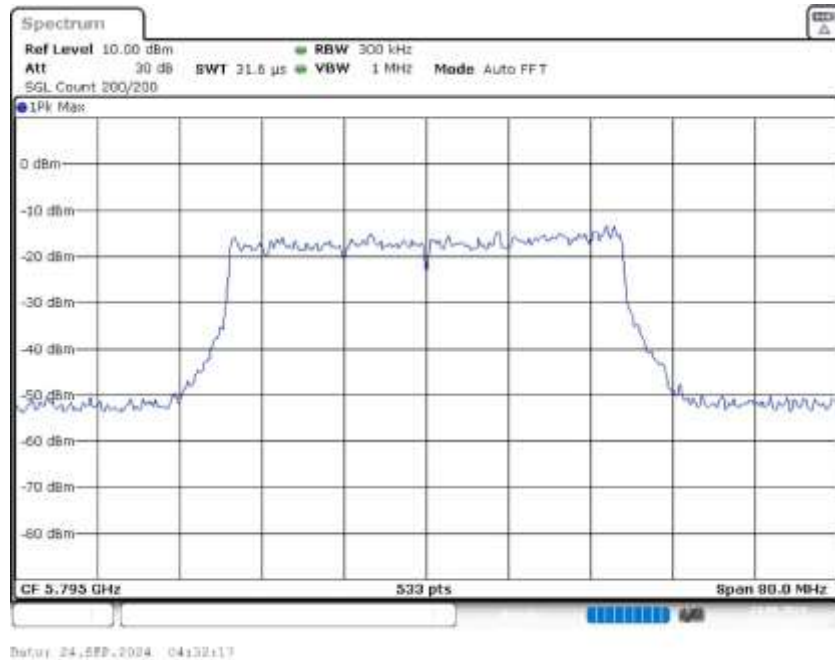


Power Spectral Density (5795 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5813.375000	2.392	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

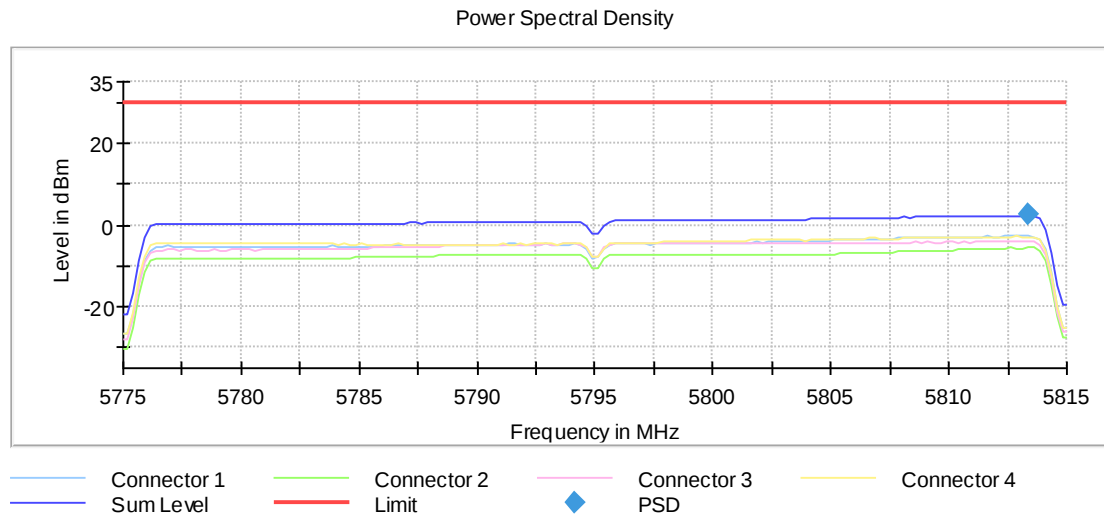


Minimum Emission Bandwidth 6 dB (5795 MHz; 24.000 dBm; 40 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	38.200000	0.500000	---	5775.925000	5814.125000

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	-1.9	PASS

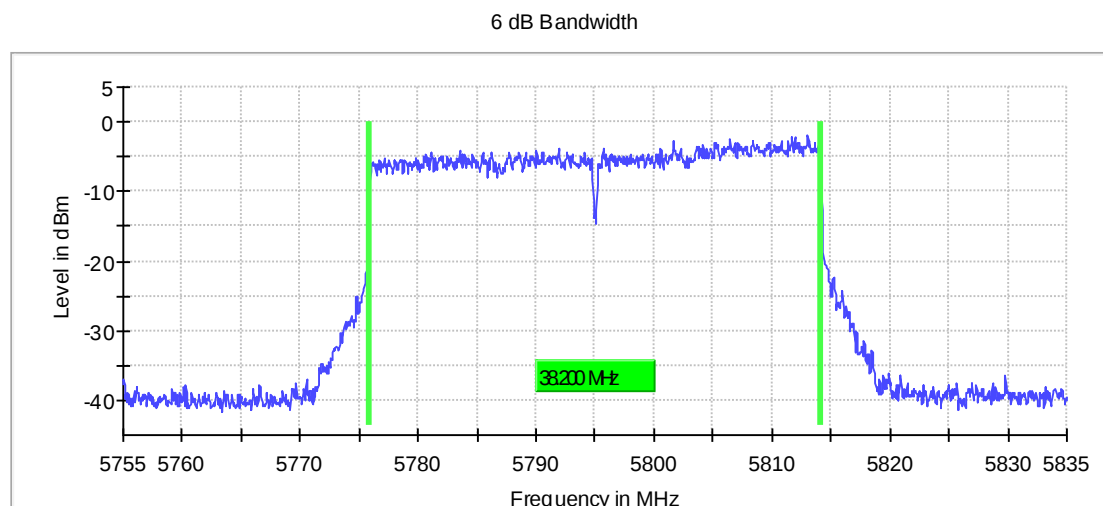

Bandwidth

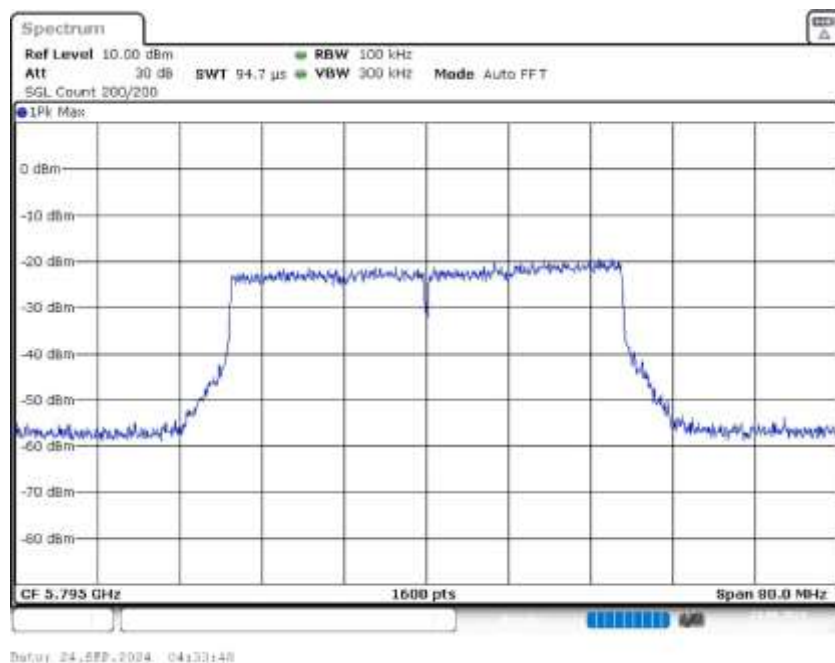


Occupied Channel Bandwidth 99% (5795 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	38.250000	---	---	5776.125000	5814.375000

DUT Frequency (MHz)	Result
5795.000000	PASS

99 % Bandwidth

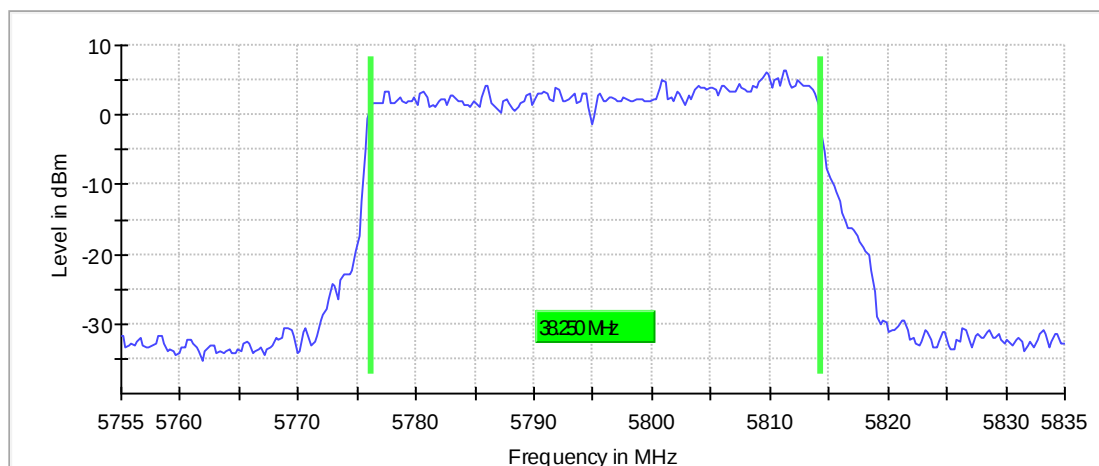

Bandwidth

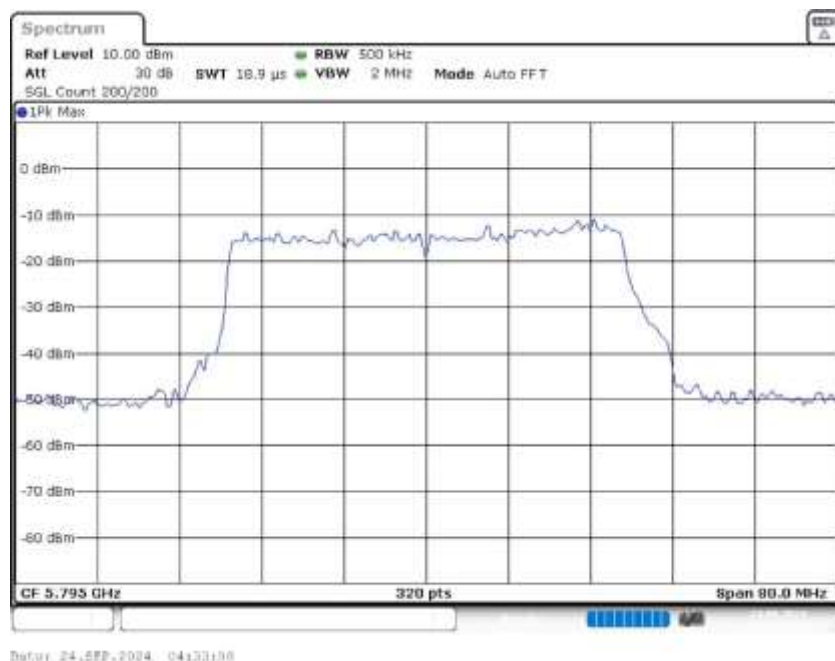

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	18.906 μs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5795 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5588.750000	-30.6	3.6	-27.0
6016.750000	-30.7	3.7	-27.0
6045.750000	-30.8	3.8	-27.0
6022.750000	-30.8	3.8	-27.0
5597.750000	-30.9	3.9	-27.0
5598.250000	-30.9	3.9	-27.0
5606.750000	-30.9	3.9	-27.0
6045.250000	-30.9	3.9	-27.0
5640.250000	-31.0	4.0	-27.0
6017.250000	-31.0	4.0	-27.0
5639.750000	-31.0	4.0	-27.0
5606.250000	-31.0	4.0	-27.0
5590.250000	-31.1	4.1	-27.0
5636.250000	-31.1	4.1	-27.0
5589.750000	-31.1	4.1	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

Spurious

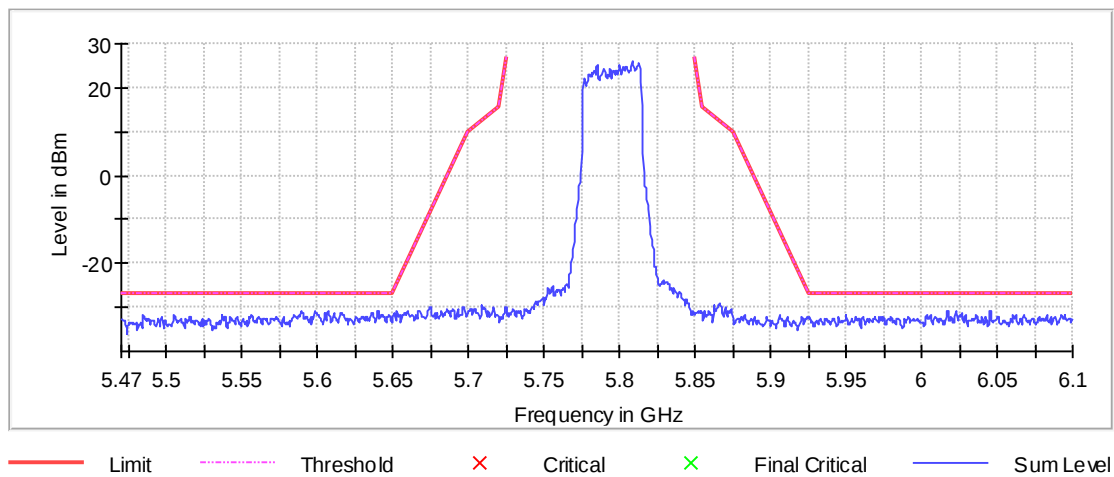


Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 80 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	90.000000	---	---	5728.250000	5818.250000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	6.6	PASS

26 dB Bandwidth

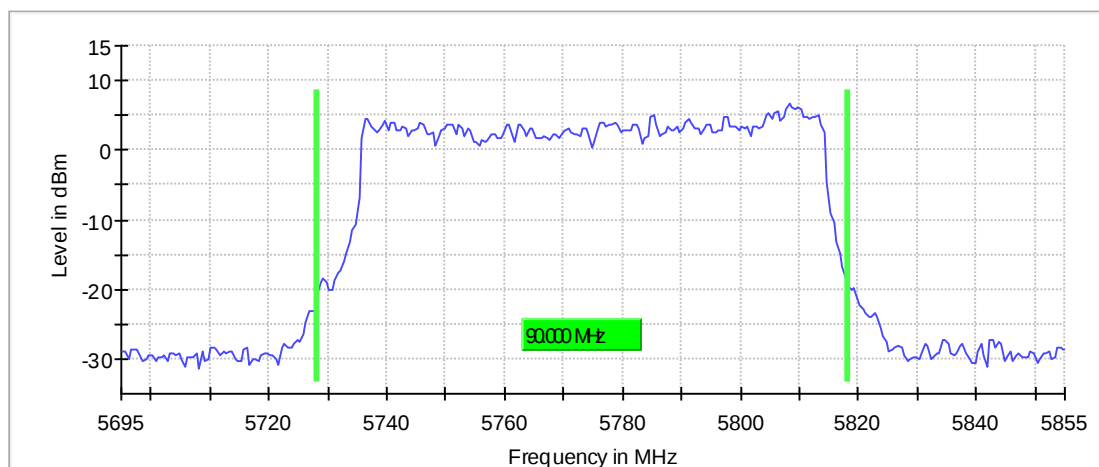

Bandwidth

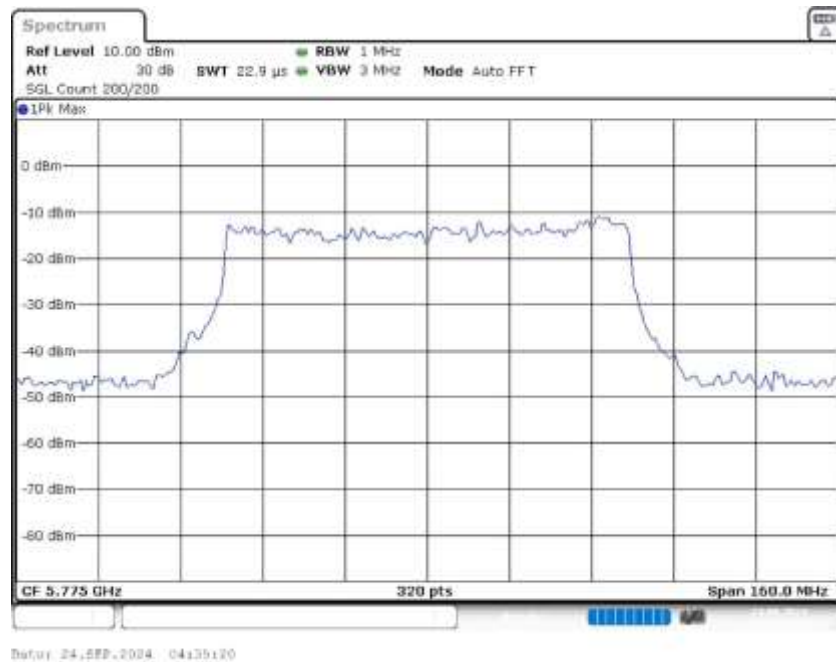


Power Spectral Density (5775 MHz; 24.000 dBm; 80 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5812.625000	-0.146	30.0	PASS

Ports

Port	State
1	used
2	used
3	used
4	used

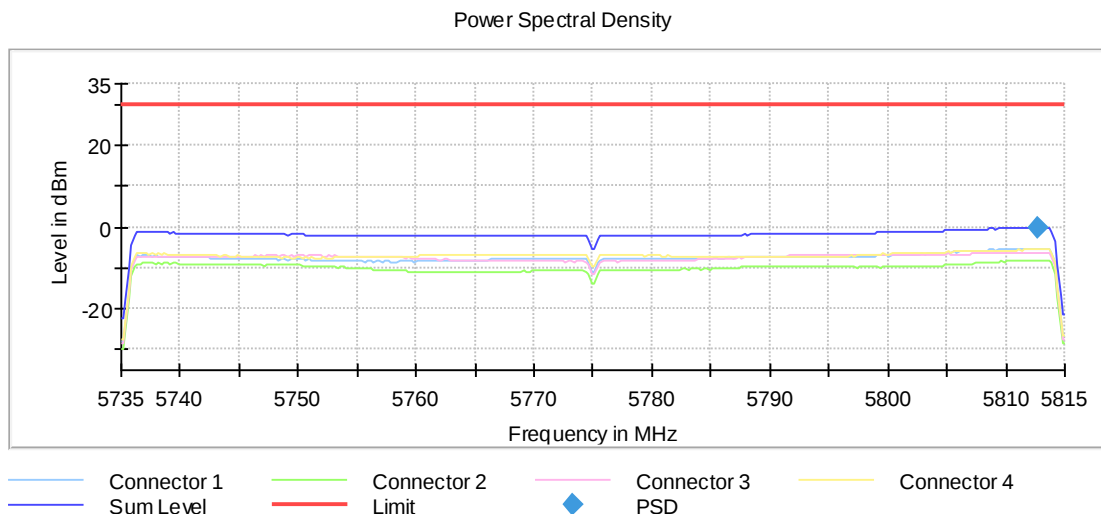


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 80 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	78.350000	0.500000	---	5735.775000	5814.125000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	-4.1	PASS

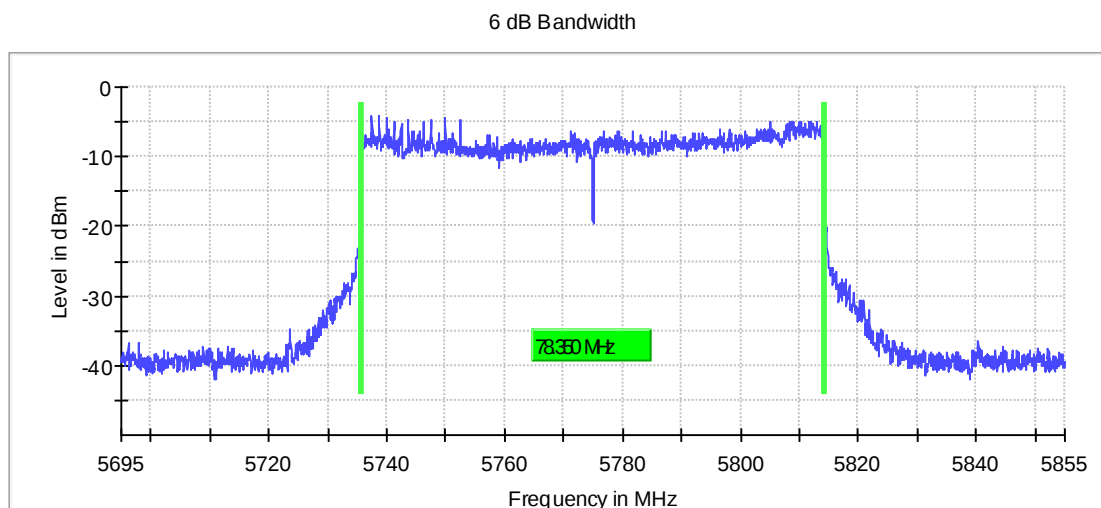

Bandwidth

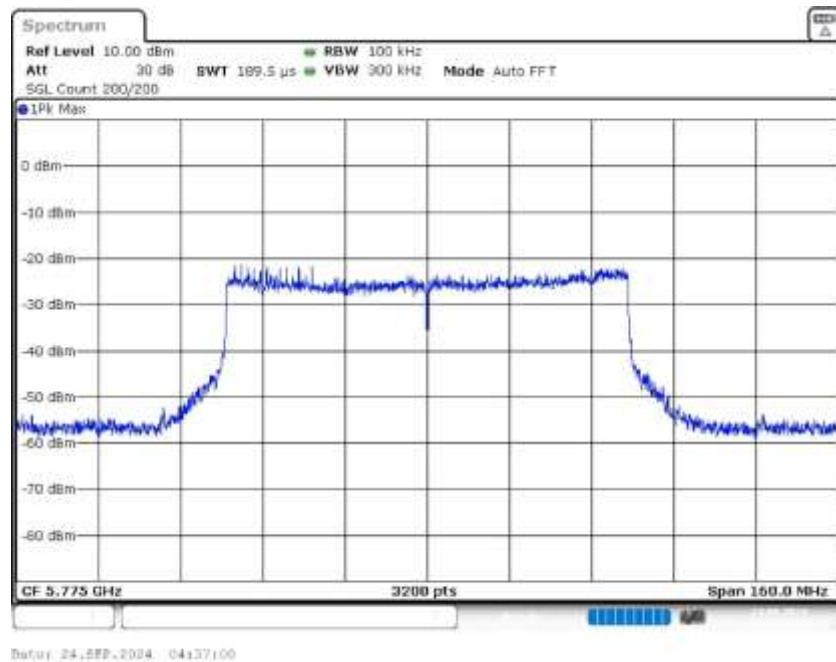


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 80 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	78.500000	---	---	5735.750000	5814.250000

DUT Frequency (MHz)	Result
5775.000000	PASS

99 % Bandwidth

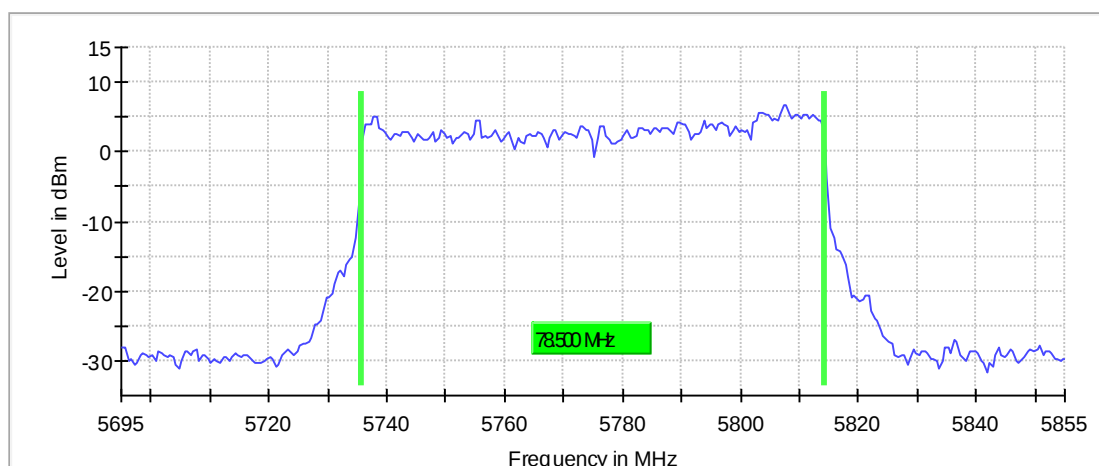

Bandwidth

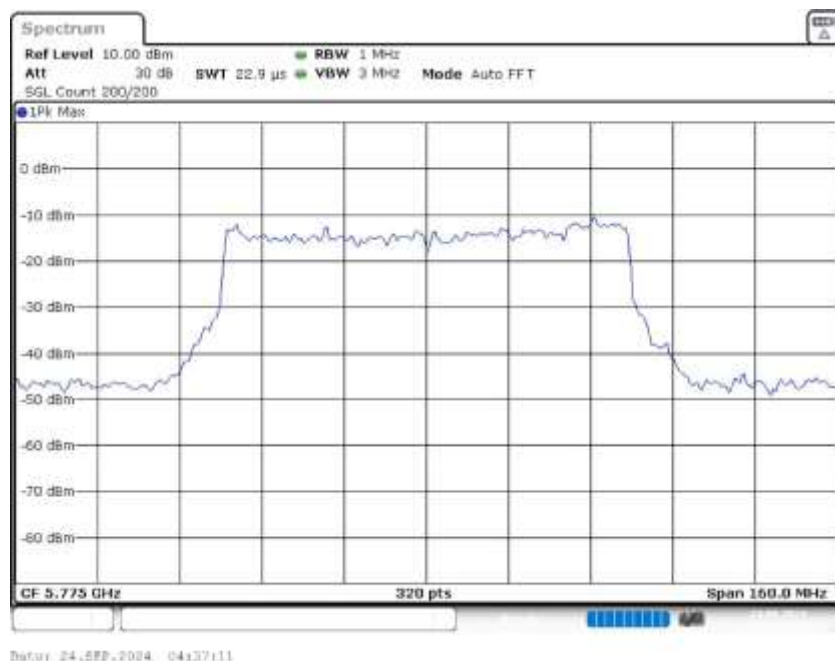

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	1.000 MHz	>= 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	320	~ 320
SweepTime	22.875 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 80 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5645.250000	-28.8	1.8	-27.0
5645.750000	-28.8	1.8	-27.0
5646.250000	-29.1	2.1	-27.0
5644.750000	-29.4	2.4	-27.0
5634.750000	-29.4	2.4	-27.0
5607.250000	-29.4	2.4	-27.0
5636.250000	-29.4	2.4	-27.0
5638.750000	-29.5	2.5	-27.0
5646.750000	-29.5	2.5	-27.0
5634.250000	-29.6	2.6	-27.0
5641.750000	-29.6	2.6	-27.0
5607.750000	-29.6	2.6	-27.0
5636.750000	-29.7	2.7	-27.0
5649.750000	-29.7	2.7	-27.0
5641.250000	-29.7	2.7	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

Spurious

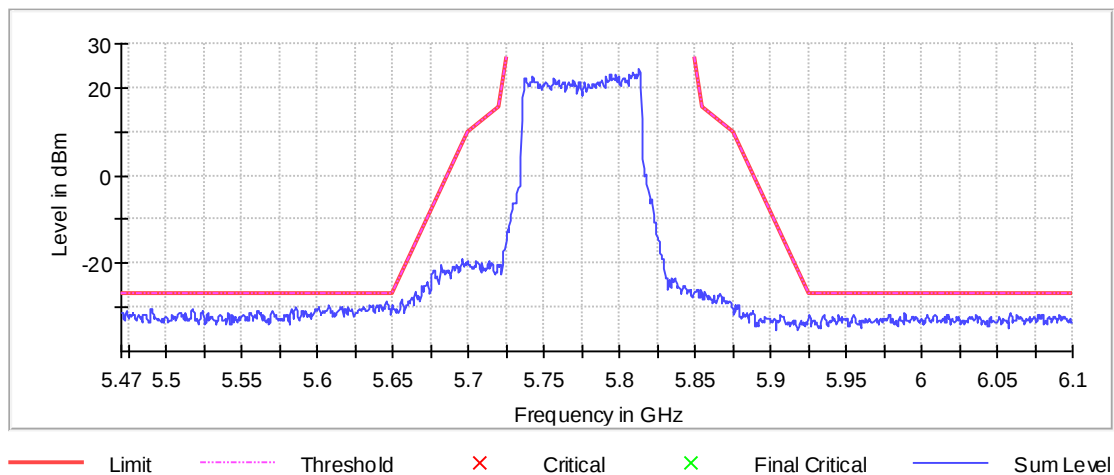

-- End of Report--