


14.2 BLOCK DIAGRAM OF TEST SETUP

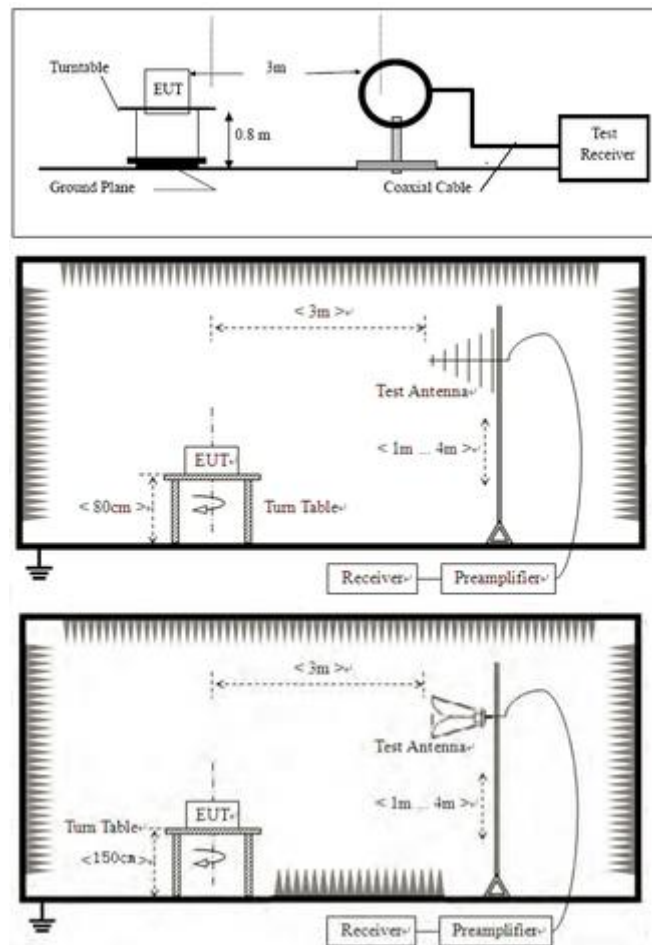

14.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

14.4 TEST DATA

802.11b

[TestMode: TX b low channel]; [Polarity: Horizontal]

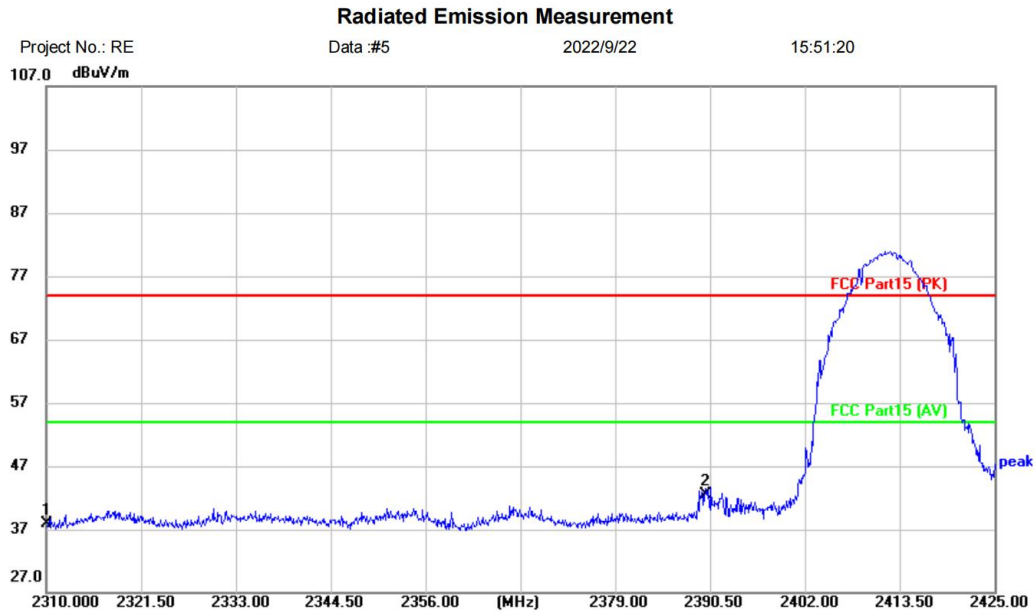

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: WIFI module

M/N: RF-WM-20CMB1

Mode: 2.4G B TX-L

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	52.18	-14.27	37.91	74.00	-36.09	peak	
2	*	2390.000	56.42	-13.82	42.60	74.00	-31.40	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX b low channel]; [Polarity: Vertical]

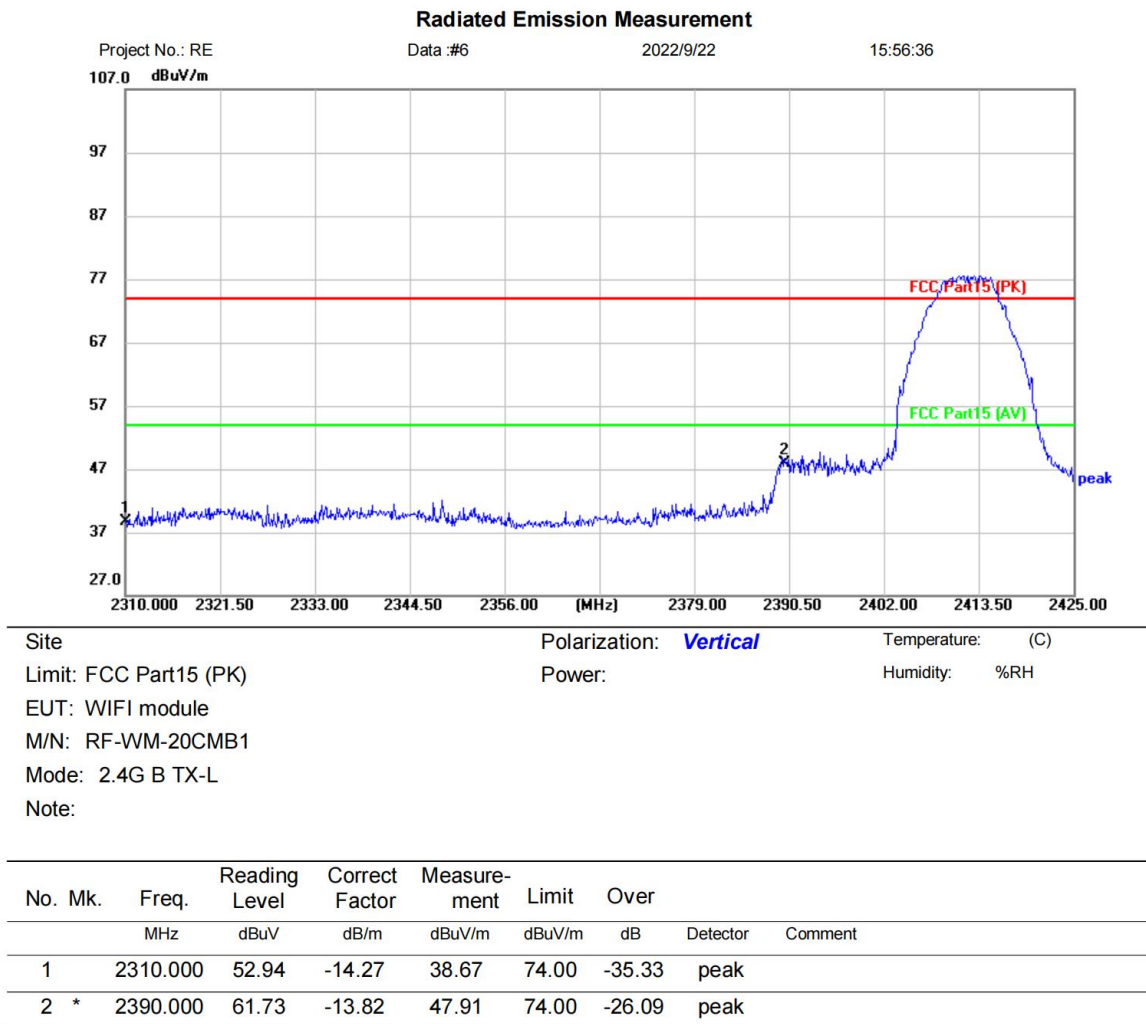


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX b high channel]; [Polarity: Horizontal]

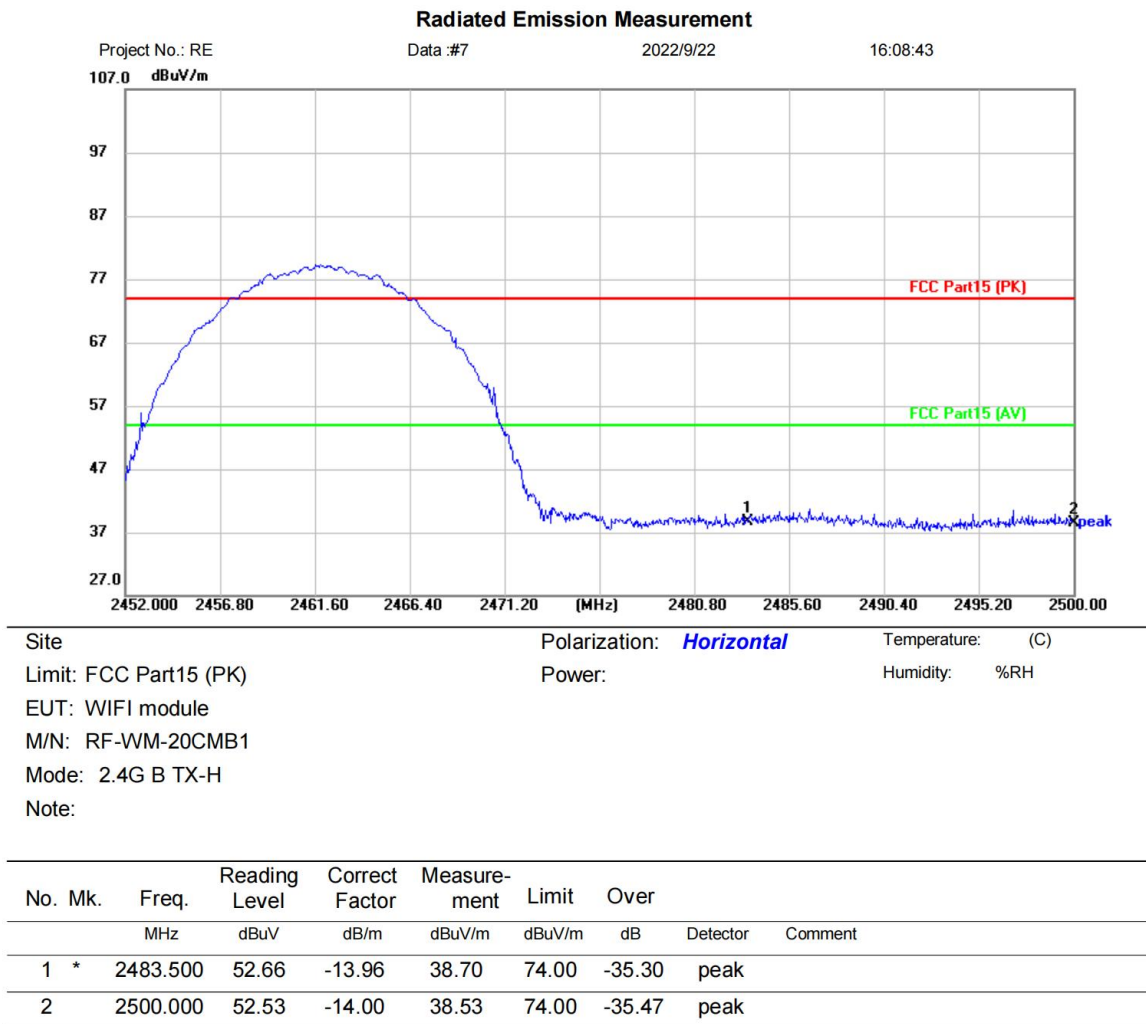


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX b high channel]; [Polarity: Vertical]

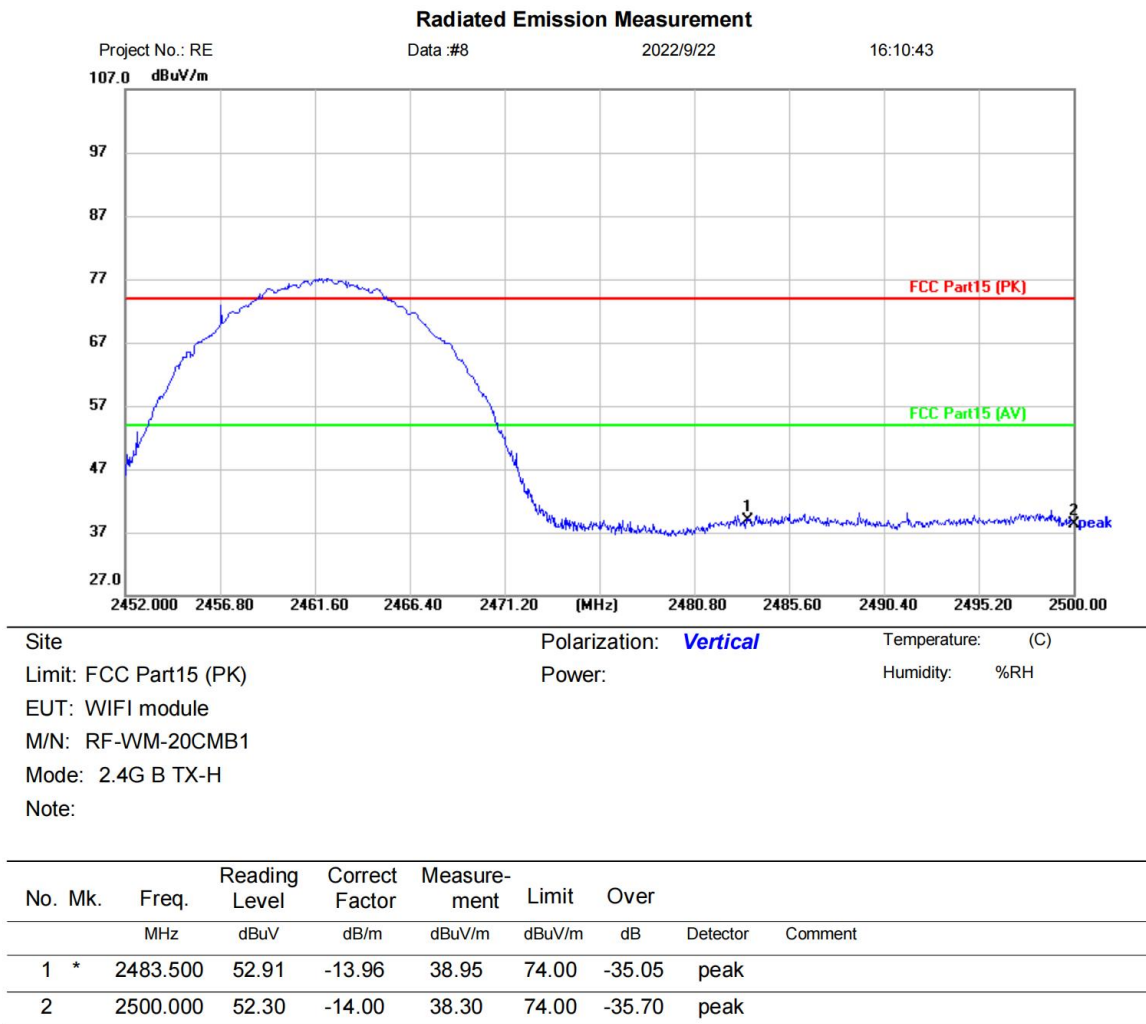


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

802.11g

[TestMode: TX g low channel]; [Polarity: Horizontal]

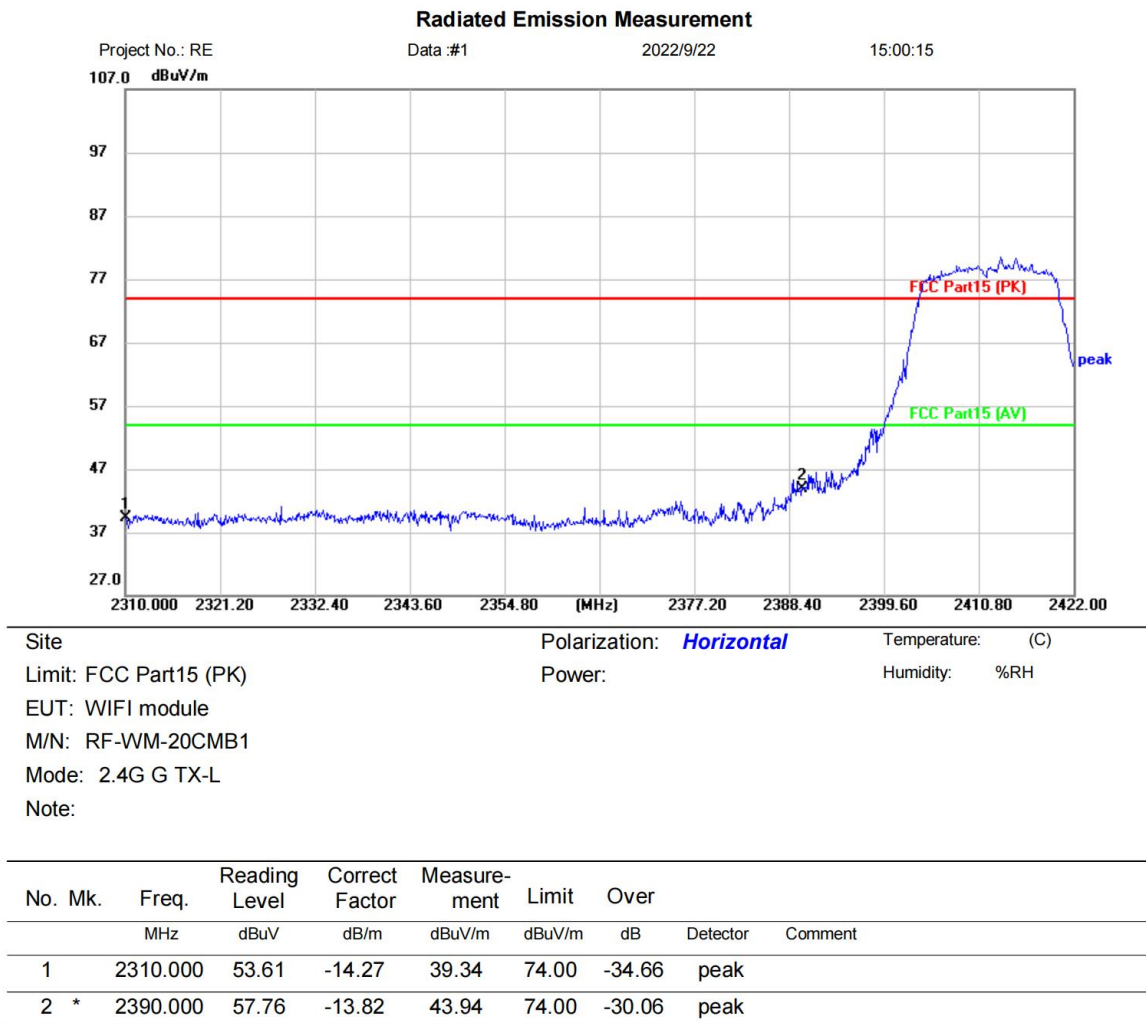


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX g low channel]; [Polarity: Vertical]

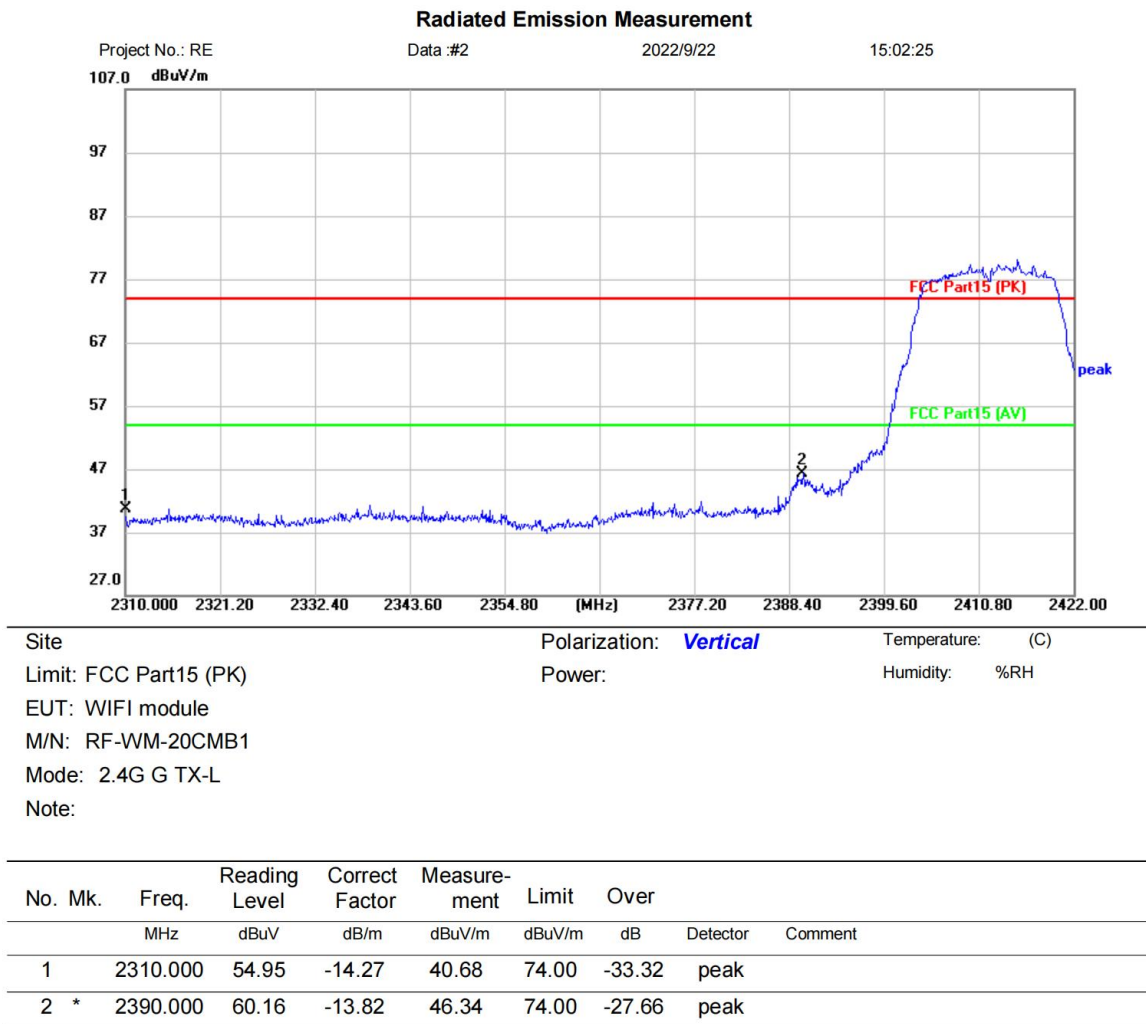


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX g high channel]; [Polarity: Horizontal]

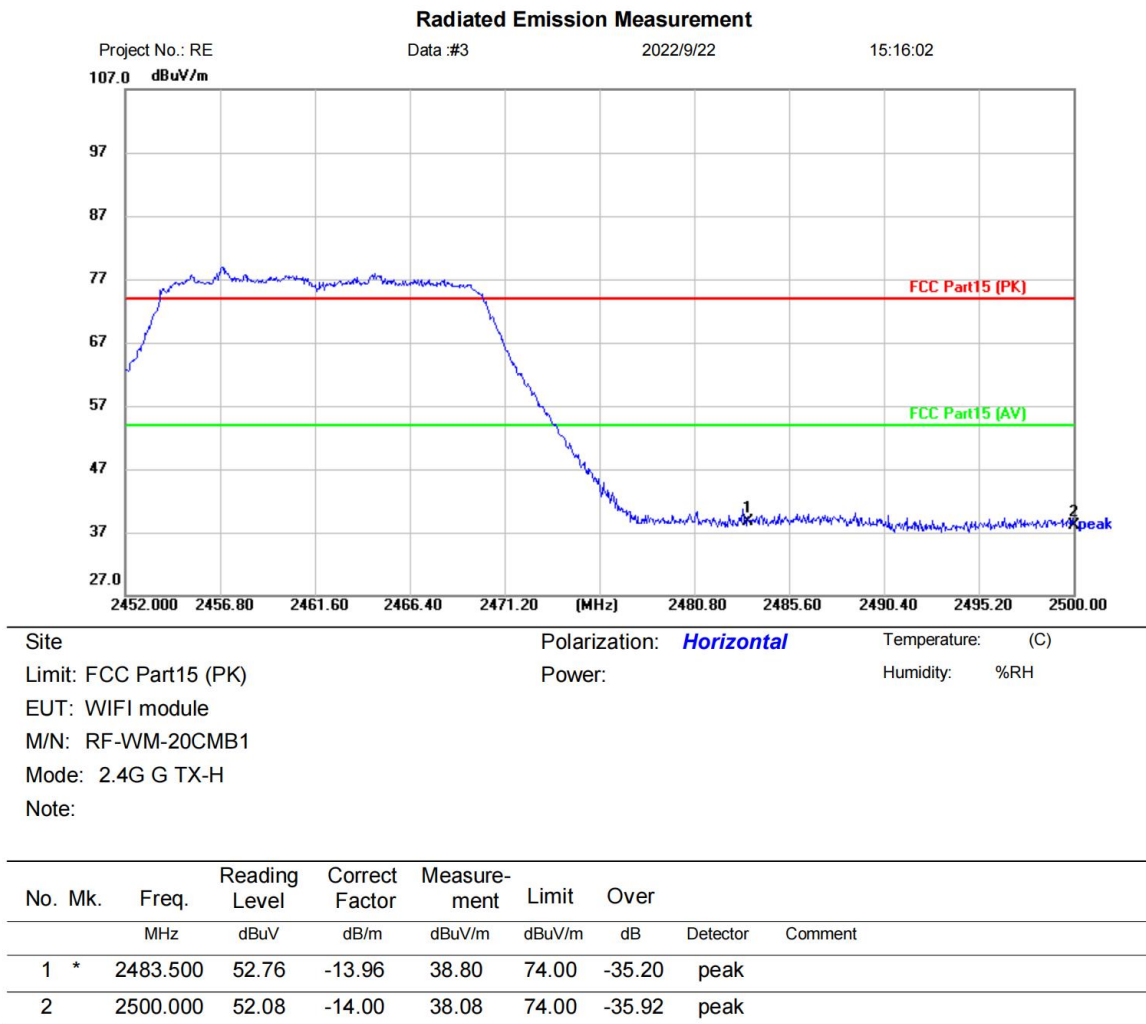


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX g high channel]; [Polarity: Vertical]

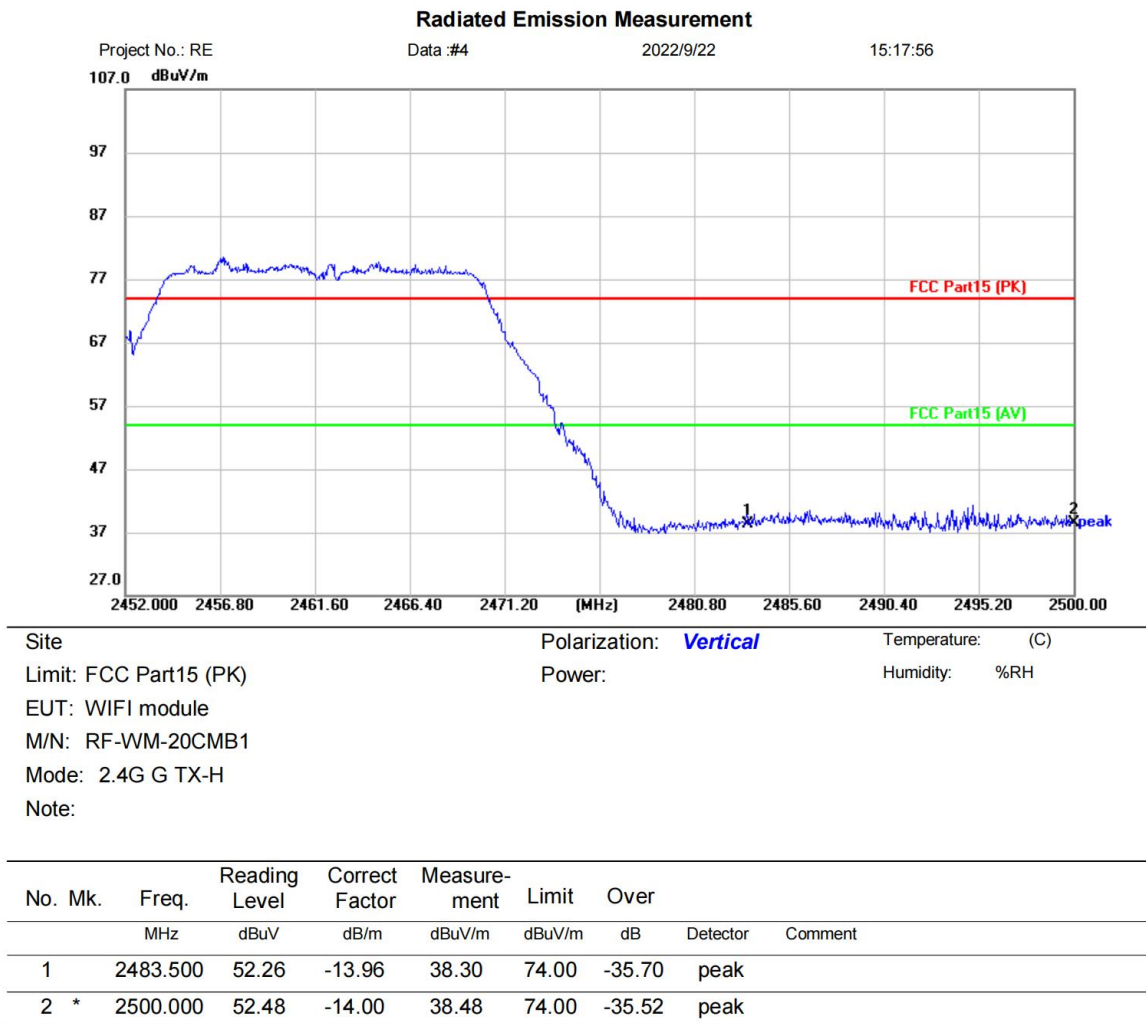


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

802.11n20

[TestMode: TX n20 low channel]; [Polarity: Horizontal]

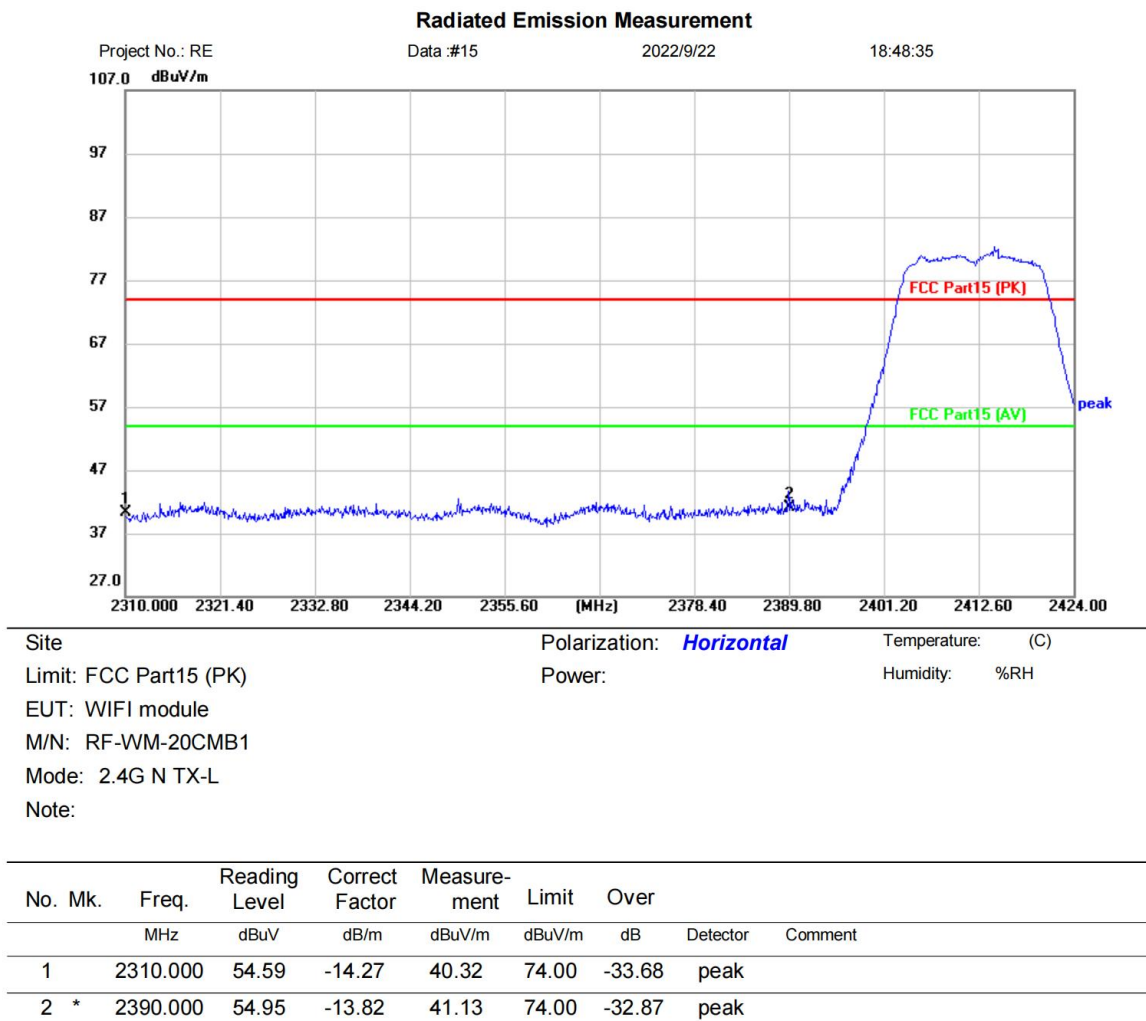


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX n20 low channel]; [Polarity: Vertical]

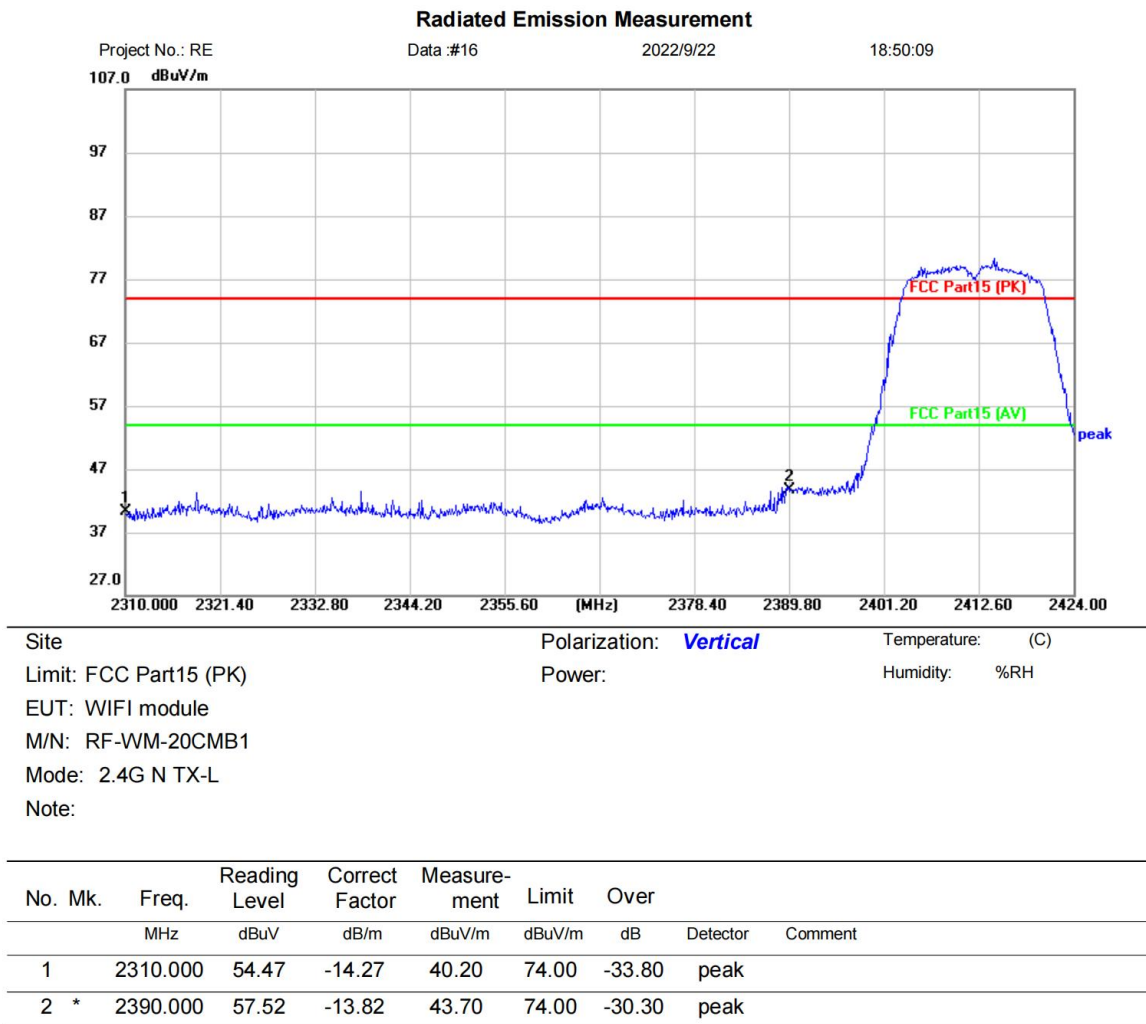


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX n20 high channel]; [Polarity: Vertical]

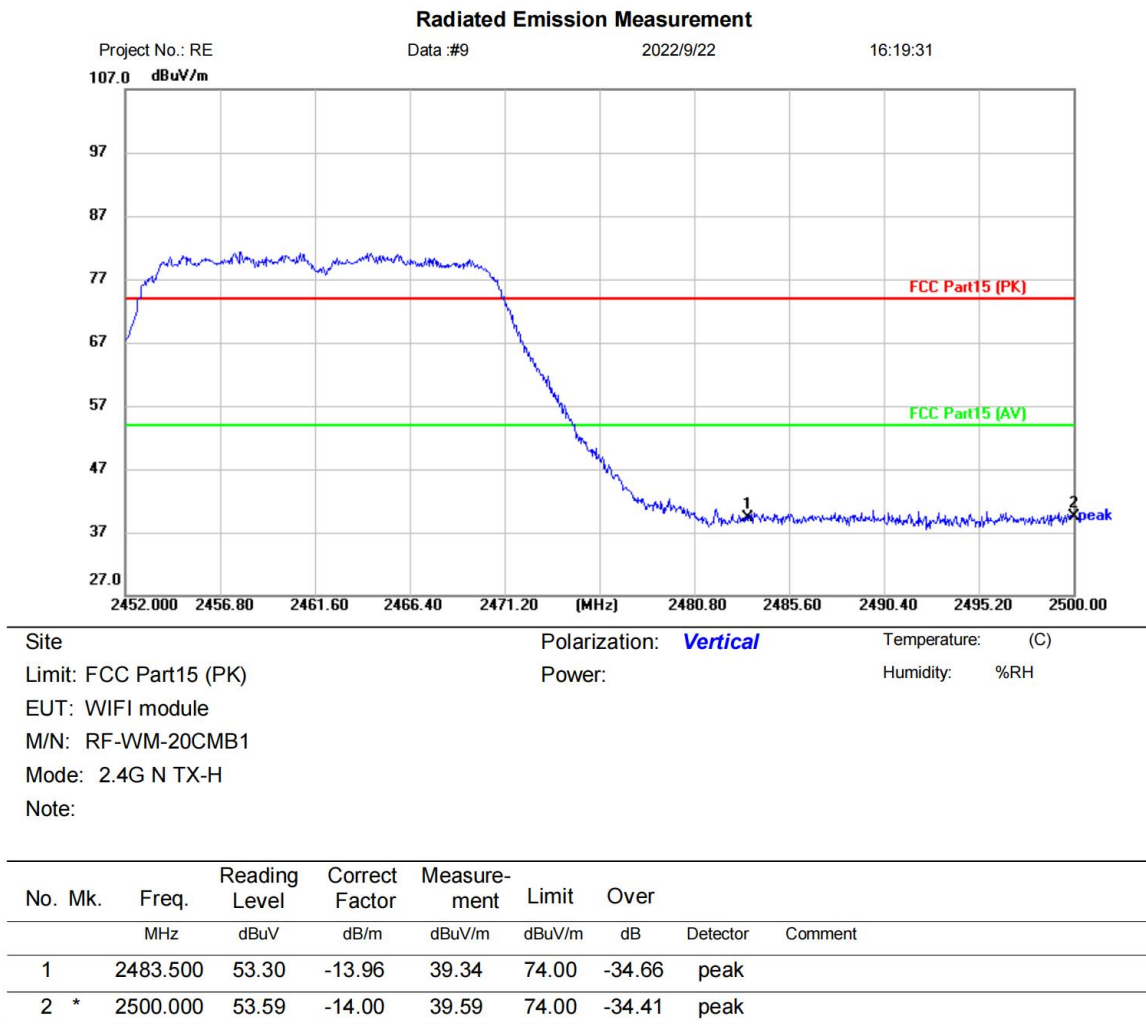


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX n20 high channel]; [Polarity: Horizontal]

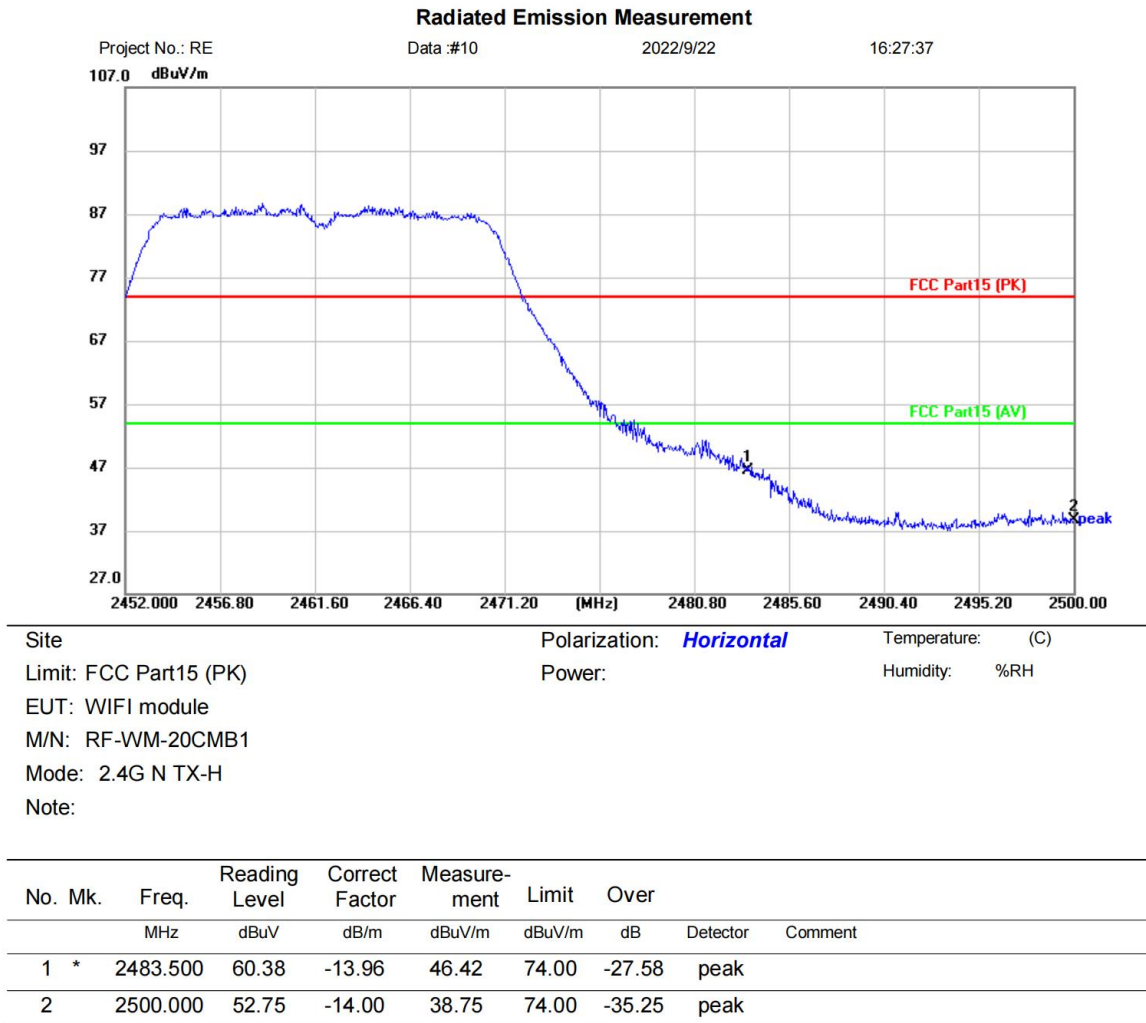

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


15 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

15.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

15.2 BLOCK DIAGRAM OF TEST SETUP

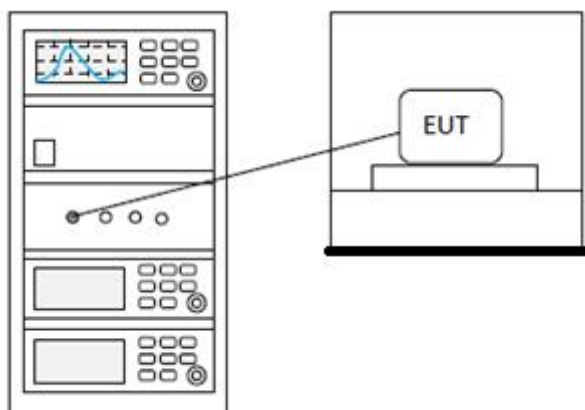

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


16 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

16.2 BLOCK DIAGRAM OF TEST SETUP

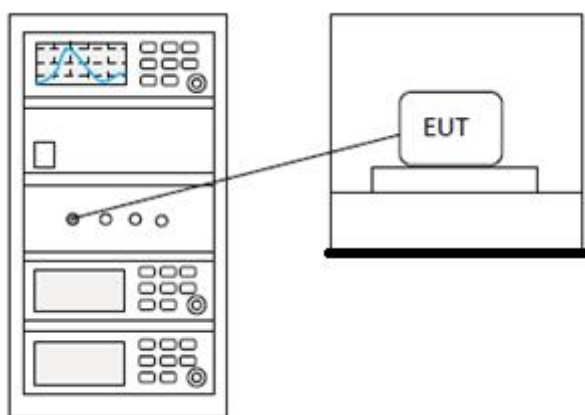

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


17 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

17.1 LIMITS

Limit:	≥ 500 kHz
--------	----------------

17.2 BLOCK DIAGRAM OF TEST SETUP

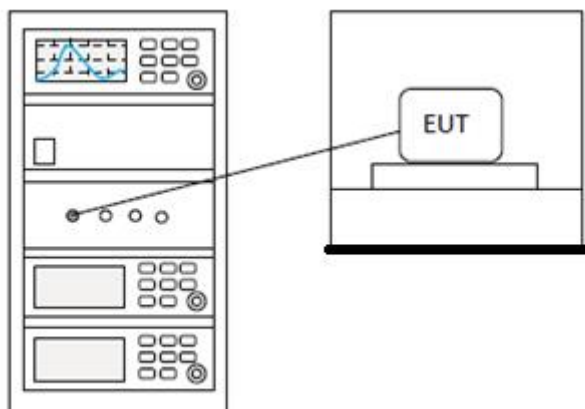

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


18 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

18.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

18.2 BLOCK DIAGRAM OF TEST SETUP

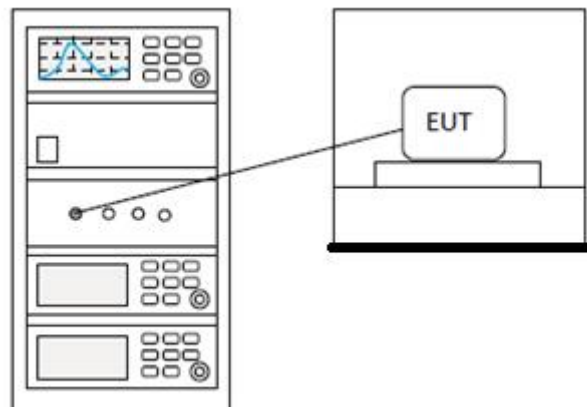

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details