

#01_WLAN6GHz_802.11ac-VHT160 MCS0_Left Cheek_0mm_Ch175;Ant 1+2

Communication System: U-NII-7; Frequency: 6825.0

Medium: HSL_6G_220205 . Medium parameters used: $f = 6825.0$ MHz; $\sigma = 6.27$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.7, 5.7, 5.7); Calibrated: 2021-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2021-05-21
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10755-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (119.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.067 W/kg; SAR (10g) = 0.019 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.075 W/kg; SAR (10g) = 0.019 W/kg;

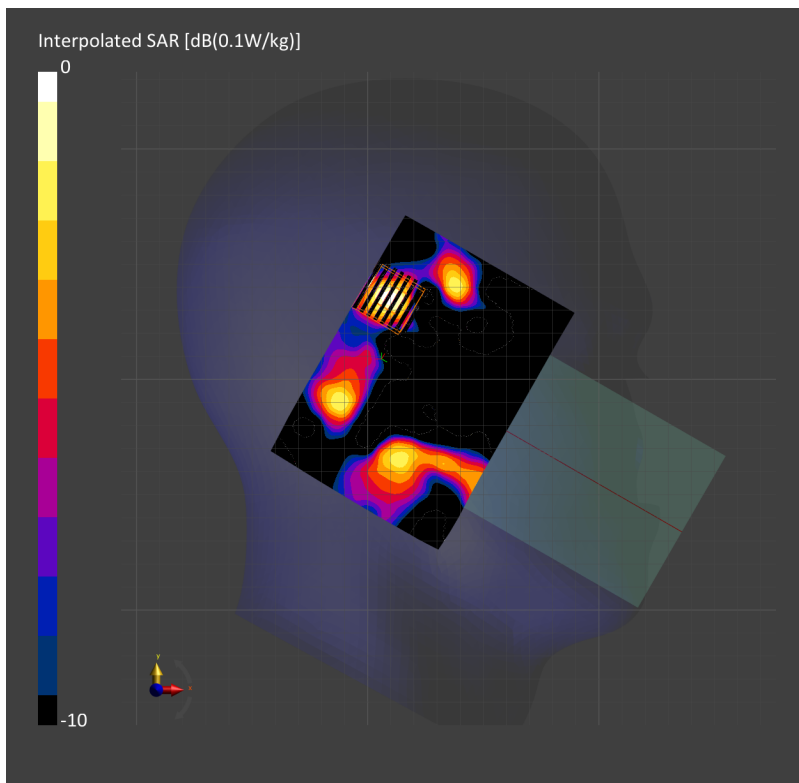

#02_WLAN6GHz_802.11ac-VHT160 MCS0_Back_15mm_Ch175;Ant 1+2

Communication System: U-NII-7; Frequency: 6825.0

Medium: HSL_6G_220205 Medium parameters used: $f = 6825.0$ MHz; $\sigma = 6.27$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.7, 5.7, 5.7); Calibrated: 2021-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2021-05-21
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10755-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (102.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.098 W/kg; SAR (10g) = 0.037 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.12 dB

SAR (1g) = 0.097 W/kg; SAR (10g) = 0.037 W/kg;

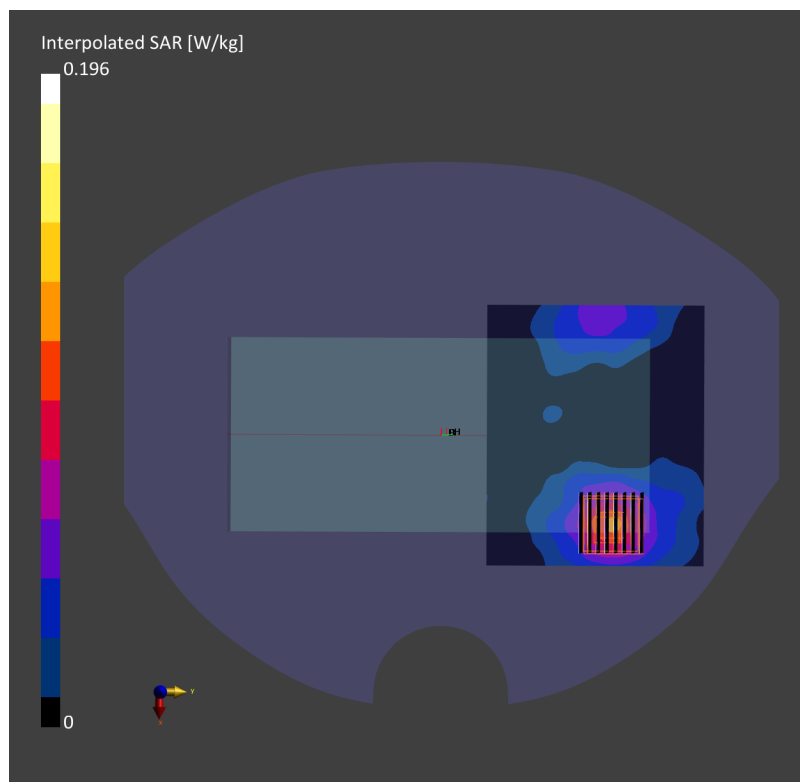

#03_WLAN6GHz_802.11ac-VHT160 MCS0_Right Side_0mm_Ch175;Ant 1+2

Communication System: U-NII-7; Frequency: 6825.0

Medium: HSL_6G_220205 Medium parameters used: $f = 6825.0$ MHz; $\sigma = 6.27$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.7, 5.7, 5.7); Calibrated: 2021-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2021-05-21
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10755-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (68.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 1.46 W/kg; SAR (10g) = 0.311 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 1.88 W/kg; SAR (10g) = 0.309 W/kg;

