

Qbic technology Co., Ltd

TEST REPORT

SCOPE OF WORK

FCC TESTING—TD-1050, TD-10XXX (THE LETTERS “X”
IN THE MODEL NO. CAN BE 0 TO 9, A TO Z OR BLANK,
FOR MARKETING USE ONLY)

REPORT NUMBER

171020021SZN-001

ISSUE DATE

24 November 2017

[REVISED DATE]

[-----]

PAGES

91

DOCUMENT CONTROL NUMBER

FCC ID 247_b

© 2017 INTERTEK



Qbic technology Co., Ltd

Application
For
Certification

FCC ID: 2AF82-TD1050H**PANEL PC****Model: TD-1050**

Additional Model:TD-10XXX (The letters "X" in the model No. can be 0 to 9, A to Z or
blank, for marketing use only)

2.4GHz Wi-Fi Transceiver

Report No.: 171020021SZN-001

We hereby certify that the sample of the above item is considered to comply with the
requirements of FCC Part 15, Subpart C for Intentional Radiator,
mention 47 CFR [10-1-16]

Prepared and Checked by:**Approved by:****Sign on File****Surel Guo
Engineer**

**Kidd Yang
Senior Project Engineer
Date: 24 November 2017**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

1F/2F, Building B, QiaoAn Scientific Technology Park, Shangheng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Miscellaneous Information
<i>EXHIBIT 11:</i>	Test Equipment List

MEASUREMENT/TECHNICAL REPORT

PANEL PC

Model: TD-1050

FCC ID: 2AF82-TD1050H

This report concerns (check one) Original Grant ☒ Class II Change ☐

Equipment Type: DTS - Part 15 Digital Transmission Systems (Wi-Fi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until :
date

Company Name agrees to notify the Commission by:
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-16] Edition] provision.

Report prepared by:

Surel Guo
Intertek Testing Services Shenzhen Ltd.
Longhua Branch
1F/2F, Building B, QiaoAn Scientific Technology
Park, Shangkeng Community, Guanhu Subdistrict,
Longhua District, Shenzhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

Table of Contents

1.0	<u>Summary of Test results</u>	7
2.0	<u>General Description</u>	9
2.1	Product Description	9
2.2	Related Submittal(s) Grants	9
2.3	Test Methodology	9
2.4	Test Facility	10
3.0	<u>System Test Configuration</u>	12
3.1	Justification	12
3.2	EUT Exercising Software	12
3.3	Special Accessories	13
3.4	Measurement Uncertainty	13
3.5	Equipment Modification	13
3.6	Support Equipment List and Description	13
4.0	<u>Measurement Results</u>	15
4.1	Maximum Conducted Output Power at Antenna Terminals	15
4.2	Minimum 6 dB RF Bandwidth	17
4.3	Maximum Power Density Reading	26
4.4	Out of Band Conducted Emissions	35
4.5	Out of Band Radiated Emissions	56
4.6	Transmitter Radiated Emissions in Restricted Bands	57
4.7	Field Strength Calculation	58
4.8	Radiated Spurious Emission	59
4.9	Conducted Emission	73
4.10	Radiated Emissions from Digital Section of Transceiver	76
4.11	Transmitter Duty Cycle Calculation and Measurements	77
5.0	<u>Equipment Photographs</u>	79
6.0	<u>Product Labelling</u>	81
7.0	<u>Technical Specifications</u>	83
8.0	<u>Instruction Manual</u>	85
9.0	<u>Confidentiality Request</u>	87
10.0	<u>Discussion of Pulse Desensitization</u>	89
11.0	<u>Test Equipment List</u>	91

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1

SUMMARY OF TEST RESULTS

1.0 Summary of Test results

PANEL PC

Model: TD-1050

FCC ID: 2AF82-TD1050H

TEST ITEM	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

EXHIBIT 2

GENERAL DESCRIPTION

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a PANEL PC with Wi-Fi function operating at 2412-2462MHz for 802.11b/g/n-HT20, 11 channels with 5MHz channel spacing and 2422-2452MHz for 802.11n-HT40, 9 channels with 5MHz channel spacing. The EUT is powered by AC/DC adaptor through AC120V/60Hz or POE. For more detailed features description, please refer to the user's manual.

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM for OFDM. CCK, DQPSK, DBPSK for DSSS.

Antenna Type: Integral Antenna

The Models: TD-10XXX (The letters "X" in the model No. can be 0 to 9, A to Z or blank, for marketing use only) are the same as the Model: TD-1050 in hardware and electronic aspect. The difference in model number and appearance serve as marketing strategy.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of:
DTS- Part 15 Digital Transmission Systems (2.4GHz Wi-Fi transmitter portion).

Remaining portions are subject to the following procedures:

1. Receiver portion of WiFi: exempt from technical requirement of this Part.
2. NFC function subject to report: 171020021SZN-002.
3. RFID function subject to report: 171020021SZN-003.
4. Other Digital Function: Subject to FCC Part 15B DoC.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and KDB 558074 D01 v04. Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are Intertek **Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangheng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

EXHIBIT 3

SYSTEM TEST CONFIGURATION

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by AC/DC adaptor through AC120V/60Hz or POE during the test. Only the worst case mode is shown in the report.

On 802.11b/g/n mode, only one antenna is used, and all data rate were tested and only the worst case data is shown in the report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.8m up to 1GHz and 1.5 m above 1GHz. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The rear of unit shall be flushed with the rear of the table.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

3.3 Special Accessories

N/A.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by Qbic technology Co., Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Detail
Adapter	KUANTECH	Model: KSASB0241200150D5 Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 12V, 1.5A for main unit
Network cable (RJ45)	N/A	unshielded, Length 500cm
RJ45 Terminal	N/A	N/A
USB Cable	N/A	unshielded, Length 150cm
Earphone	N/A	unshielded, Length 150cm
USB Disk	SanDisk	4GB
USB Disk	SanDisk	4GB
Mini SD Card	SanDisk	1GB
Laptop	HP	Model: 430
Hard Disk	Smart.drive	HD-001
USB Cable	Smart.drive	unshielded, Length 155cm

EXHIBIT 4

MEASUREMENT RESULTS

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a broadband peak RF power meter. The power meter have a video bandwidth that is greater than DTS bandwidth and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals with cable loss added.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

IEEE 802.11b (Antenna Gain = 2.2dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	18.65	73.28
Middle Channel: 2437	18.93	78.16
High Channel: 2462	19.35	86.10

IEEE 802.11g (Antenna Gain = 2.2dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	20.61	115.08
Middle Channel: 2437	20.43	110.41
High Channel: 2462	21.81	151.71

IEEE 802.11n-HT20 (Antenna Gain = 2.2dBi) (64QAM, 6Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	20.87	122.18
Middle Channel: 2437	20.85	121.62
High Channel: 2462	21.98	157.76

IEEE 802.11n-HT40 (Antenna Gain = 2.2dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	20.44	110.66
Middle Channel: 2437	20.71	117.76
High Channel: 2452	20.85	121.62

Cable loss: 1.0 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 21.98 dBm

EUT max. E.I.R.P = 21.98dBm + 2.2dBi = 24.18dBm = 261.82mW

For RF Exposure, the information is saved with filename: RF exposure.pdf.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074 D01 v04. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	10.07
2437	10.03
2462	9.77



IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.41
2437	16.45
2462	16.41


IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	17.63
2437	17.45
2462	17.63

IEEE 802.11n-HT20 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	35.66
2437	35.89
2462	35.92



The test plots are attached as below.


802.11b

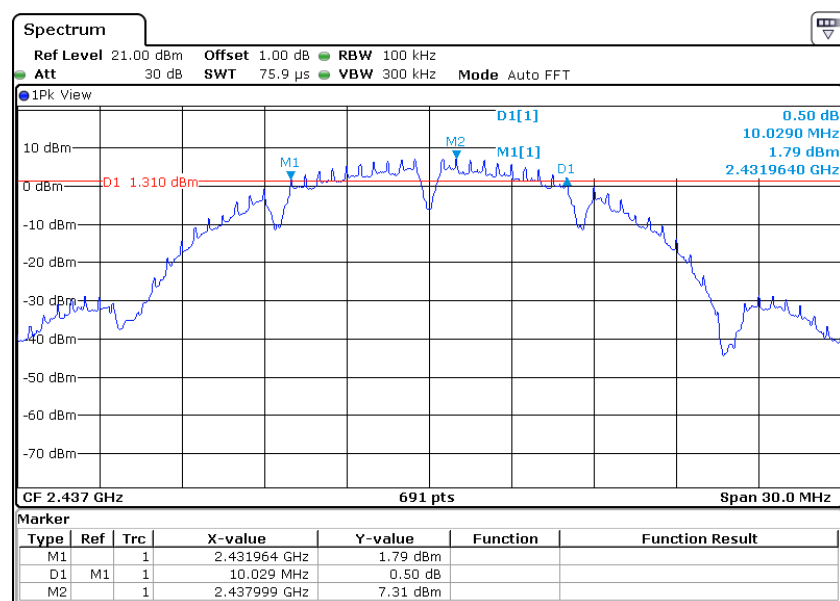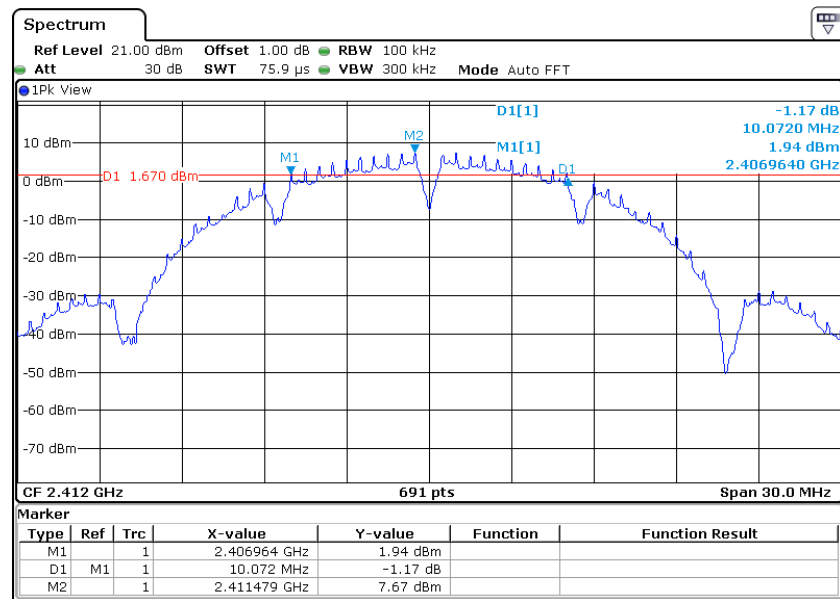


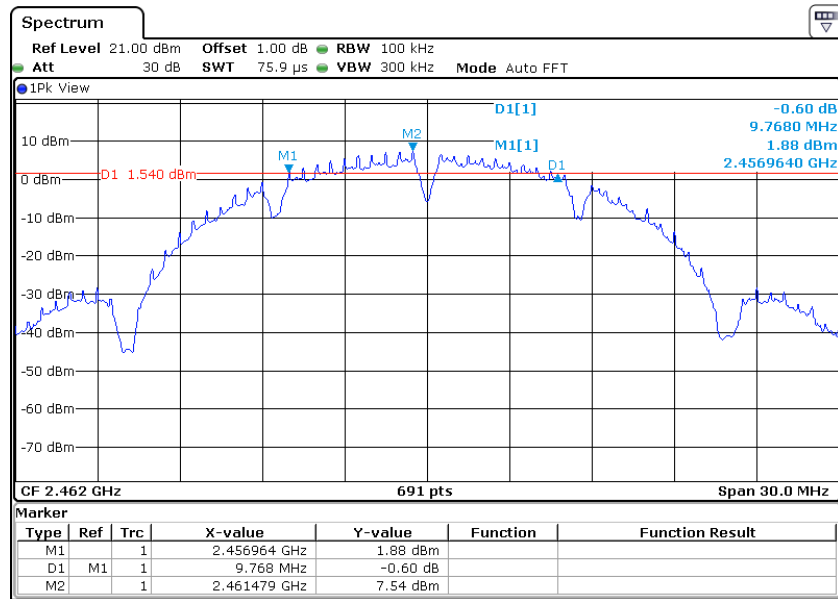



802.11g

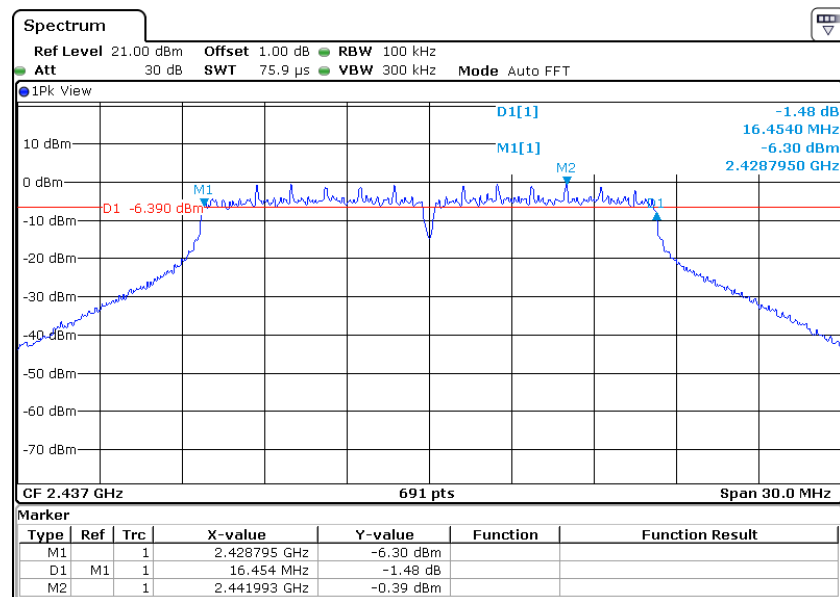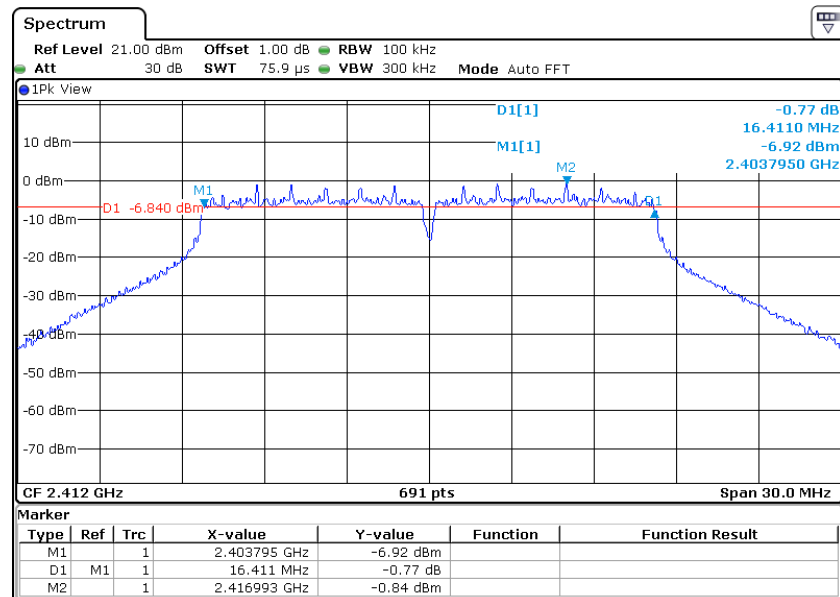


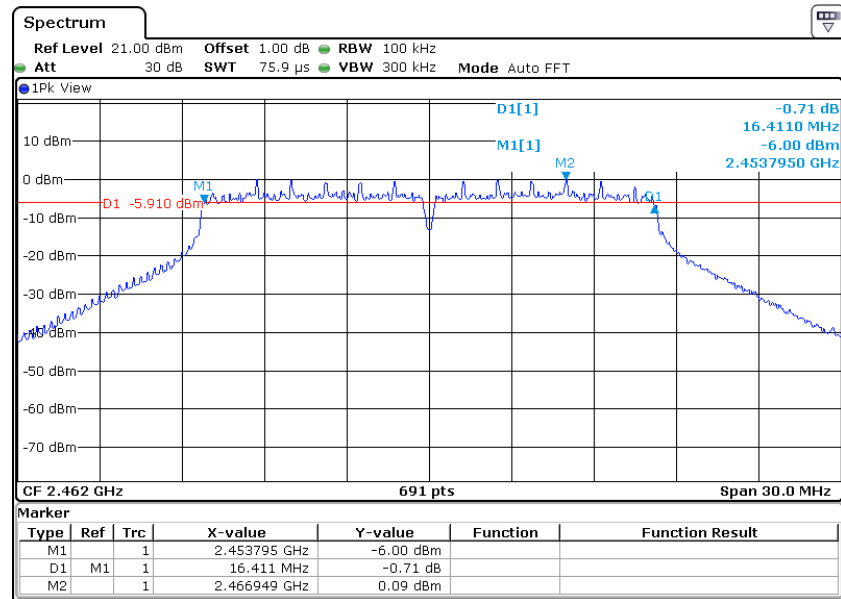



802.11n-HT20

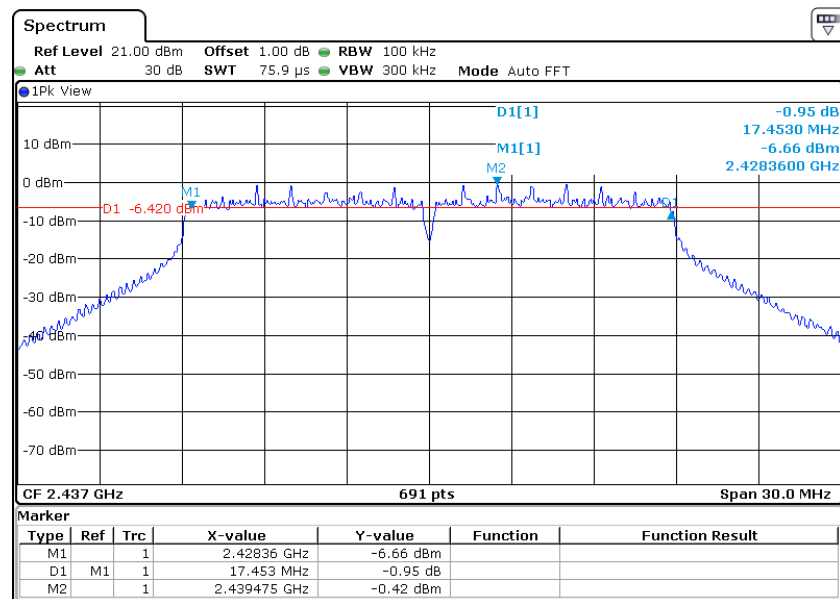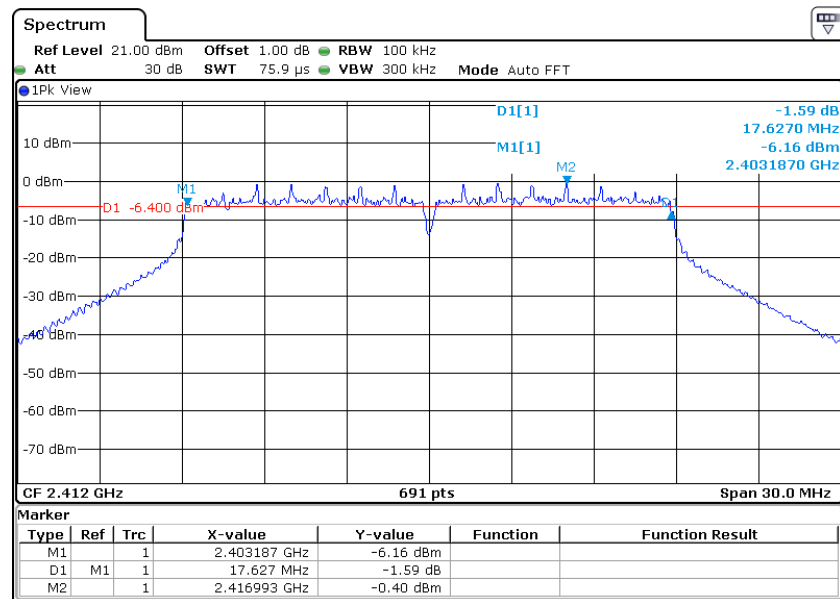

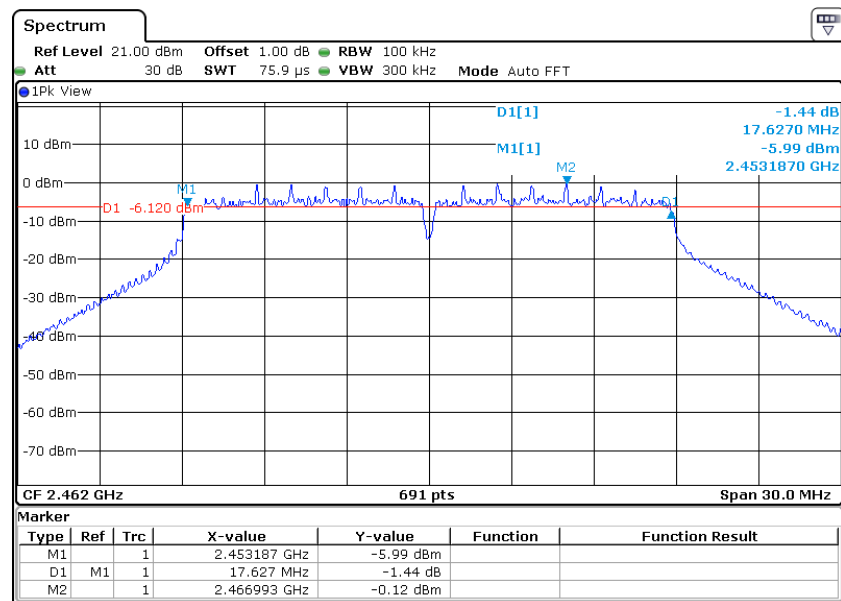

802.11n-HT40

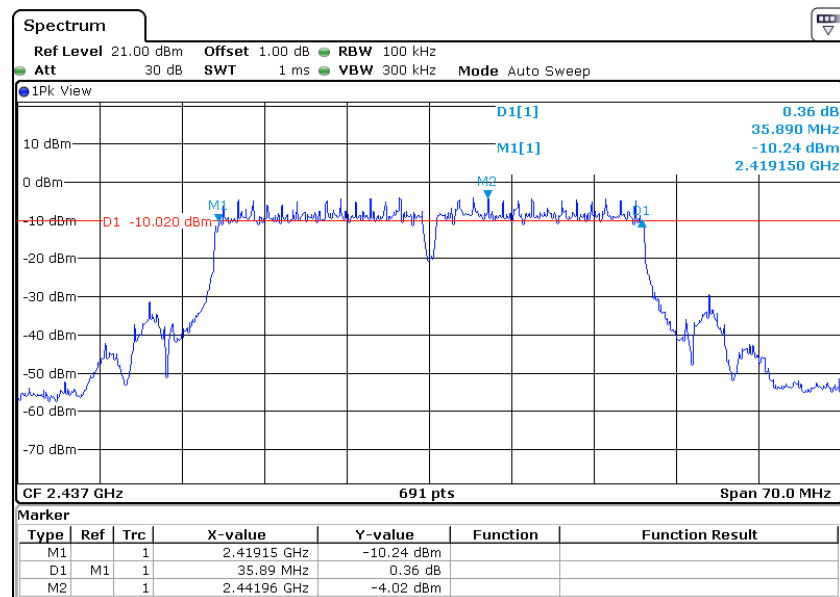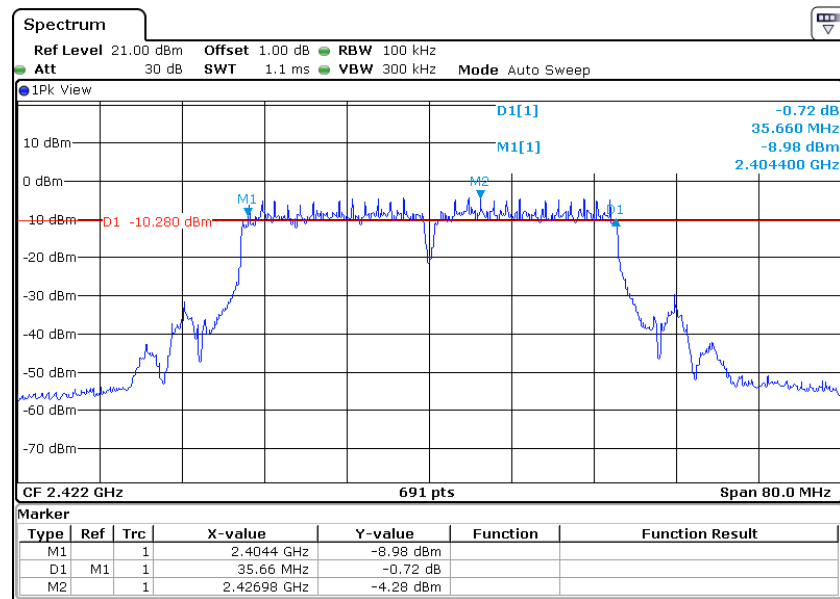

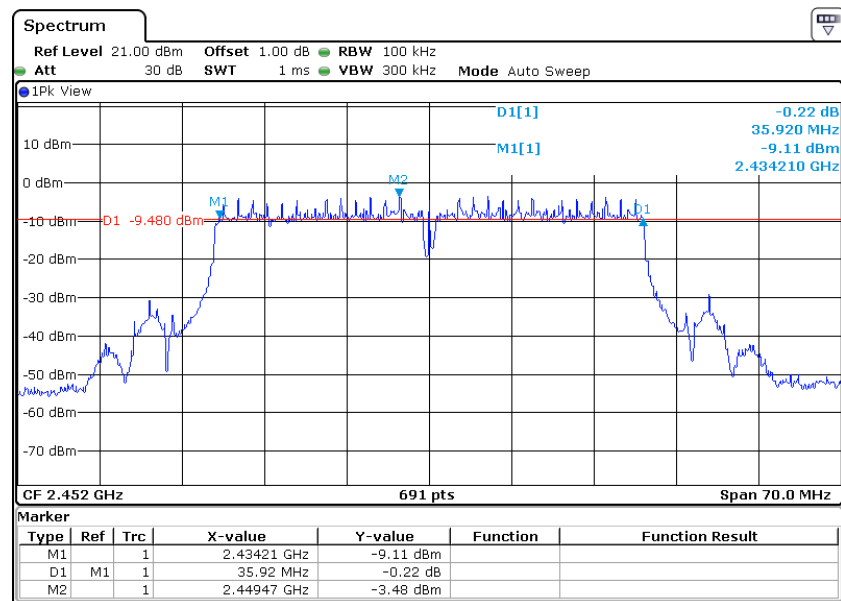

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v04.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/3 kHz.

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	7.23
2437	7.56
2462	7.51



IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-0.84
2437	-0.43
2462	0.10


IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	-0.66
2437	-0.53
2462	-0.22

IEEE 802.11n-HT20 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2422	-4.46
2437	-4.21
2452	-3.81



The test plots are attached as below.


802.11b

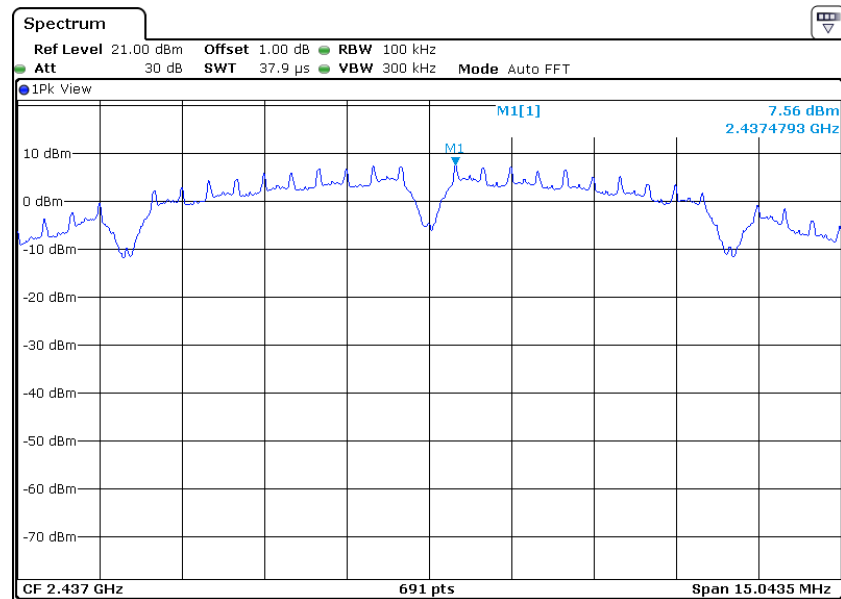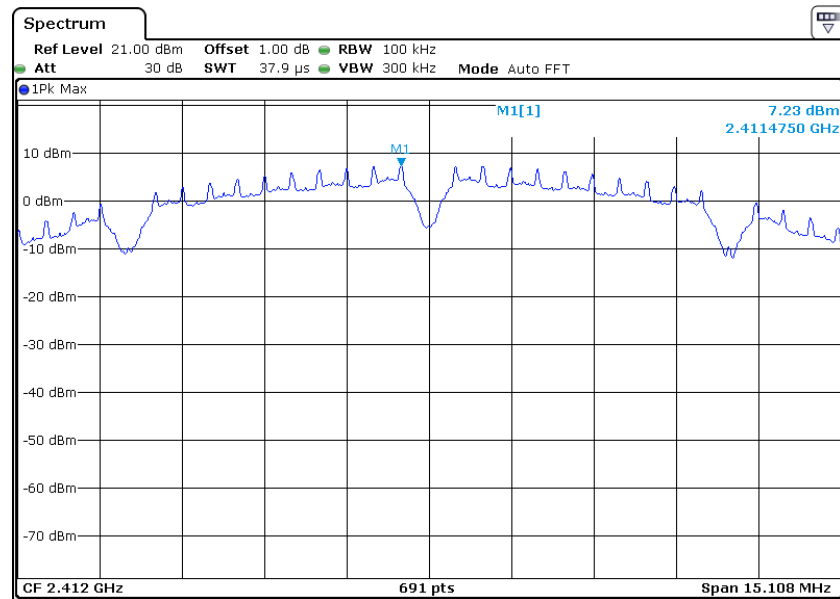


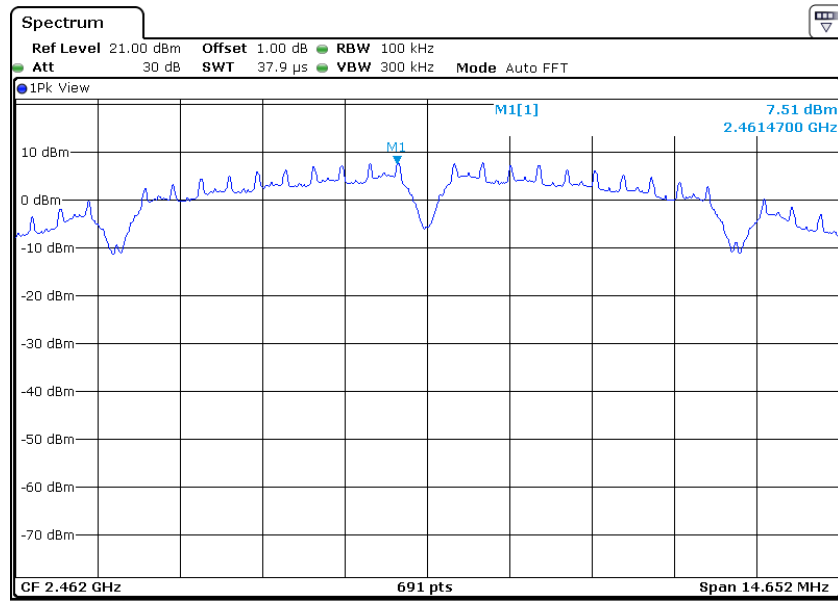



802.11g

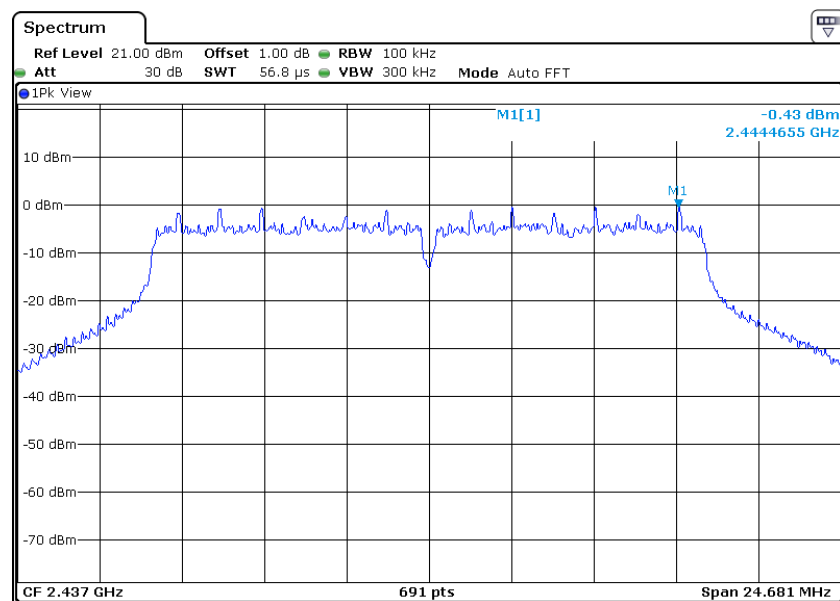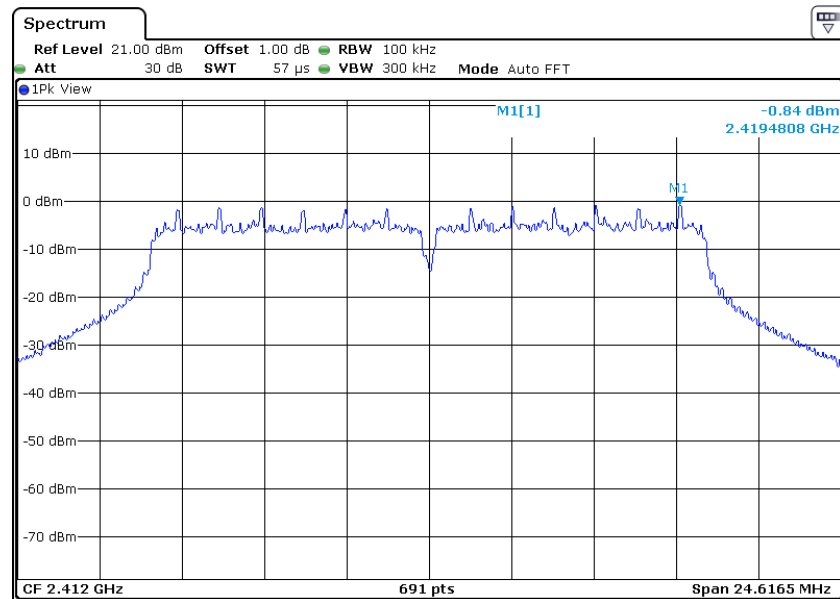


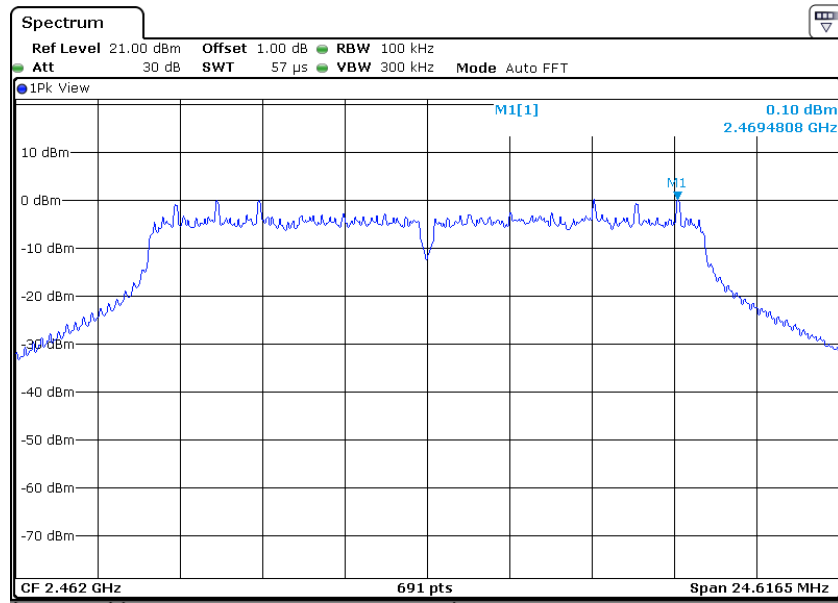



802.11n-HT20

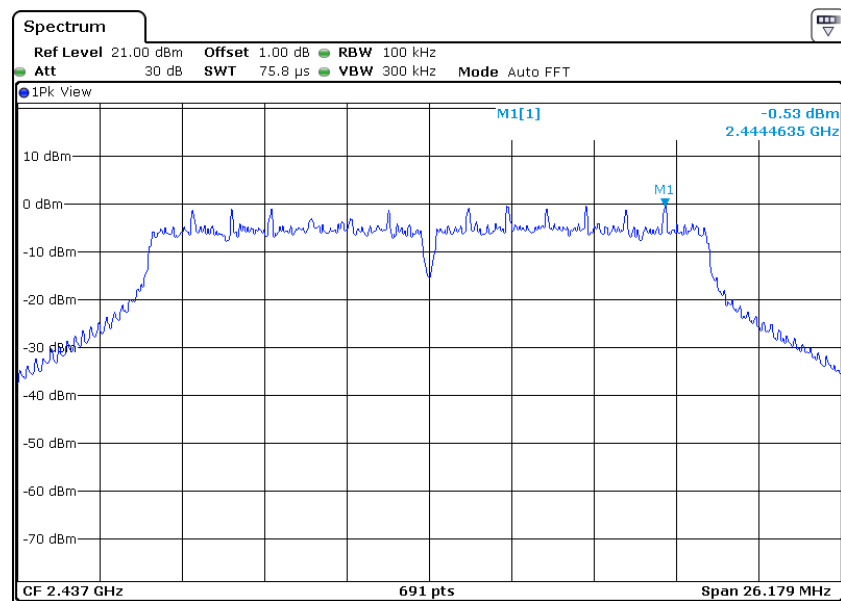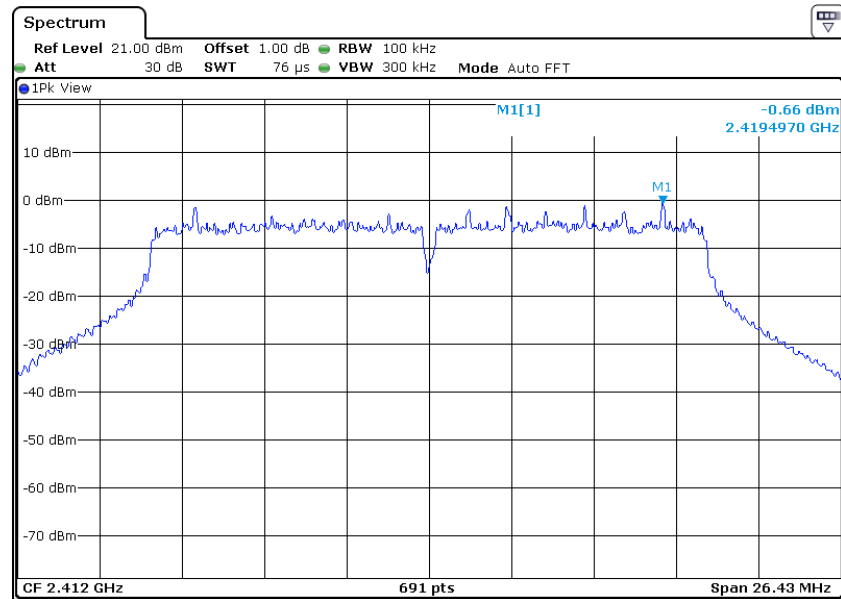

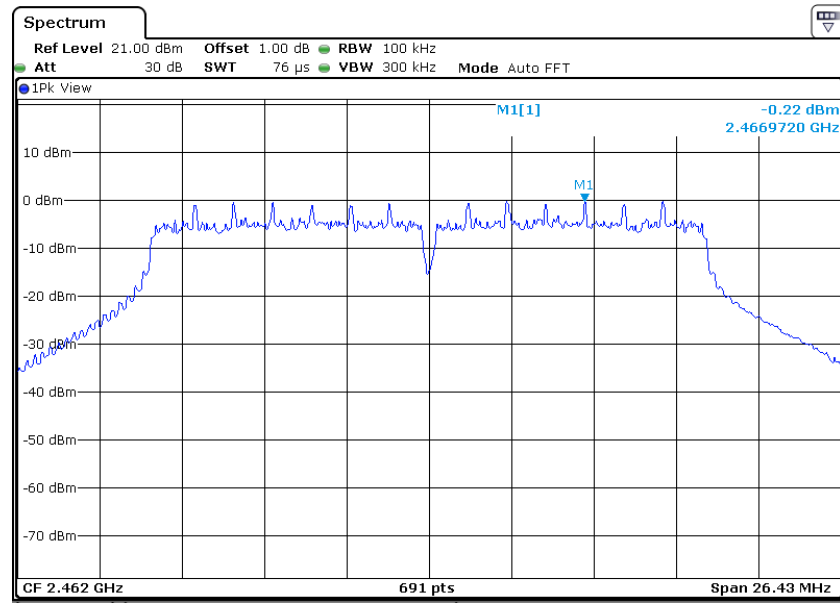

802.11n-HT40

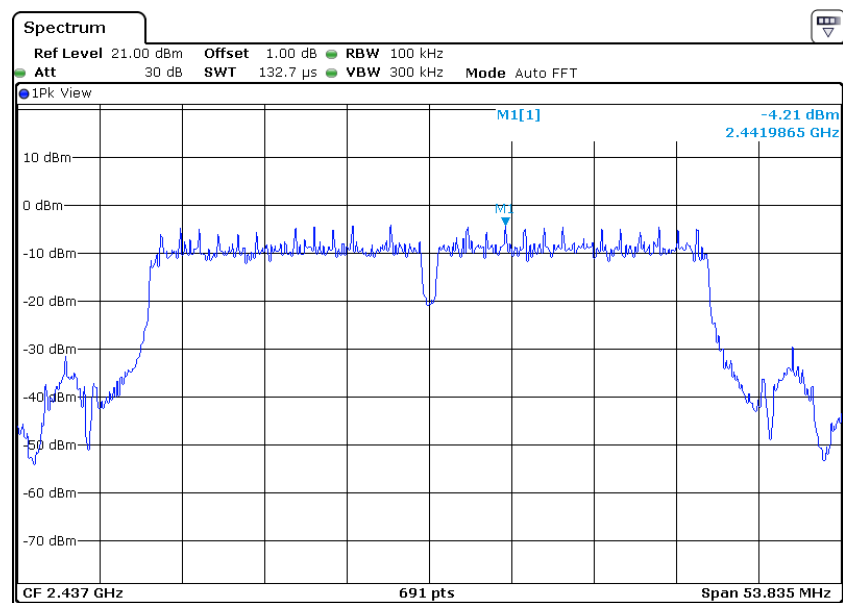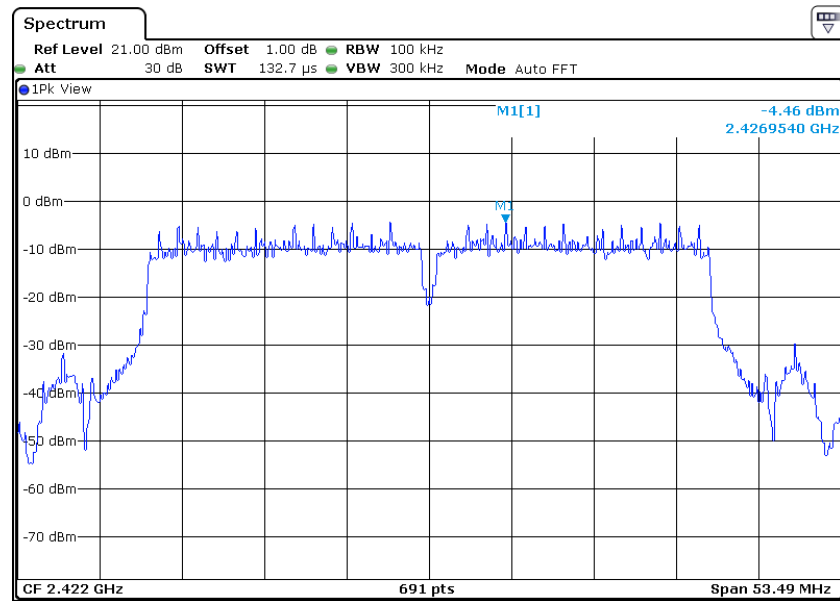

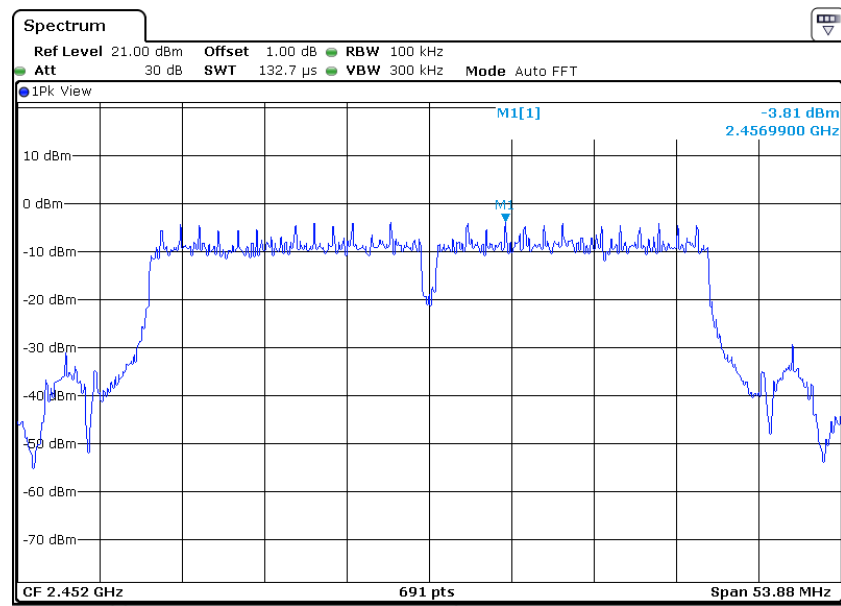

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074 D01 v04.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.



Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b and 6Mbps for 802.11g and 6Mbps for 802.11n-HT20 and 13.5 Mbps for 802.11n-HT40.


The test plots showed all spurious emission up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The test plots are attached as below.



802.11b

Channel 01 (2412MHz) Reference Level: 7.23dBm

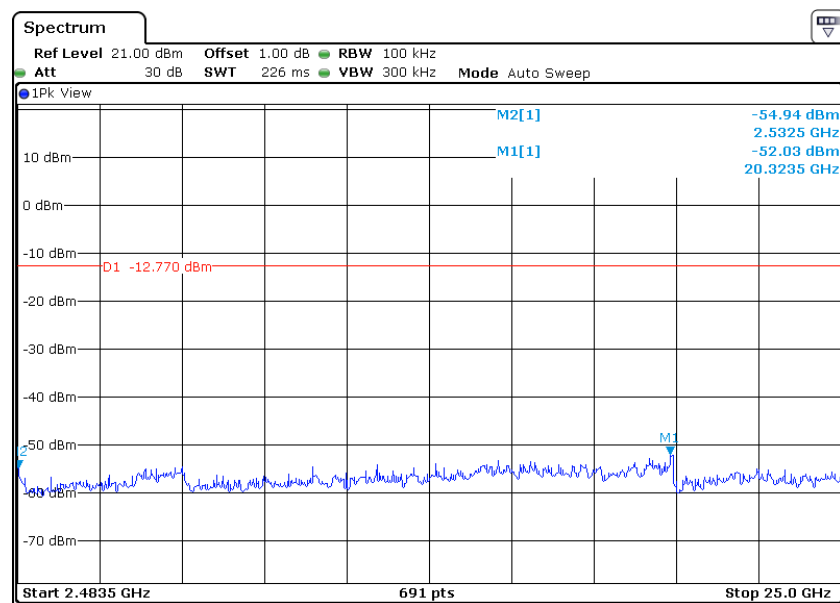
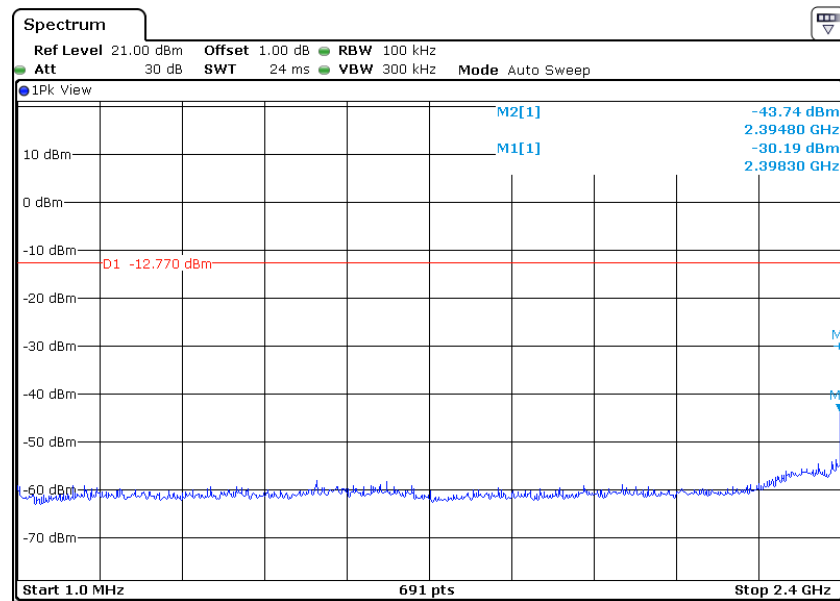


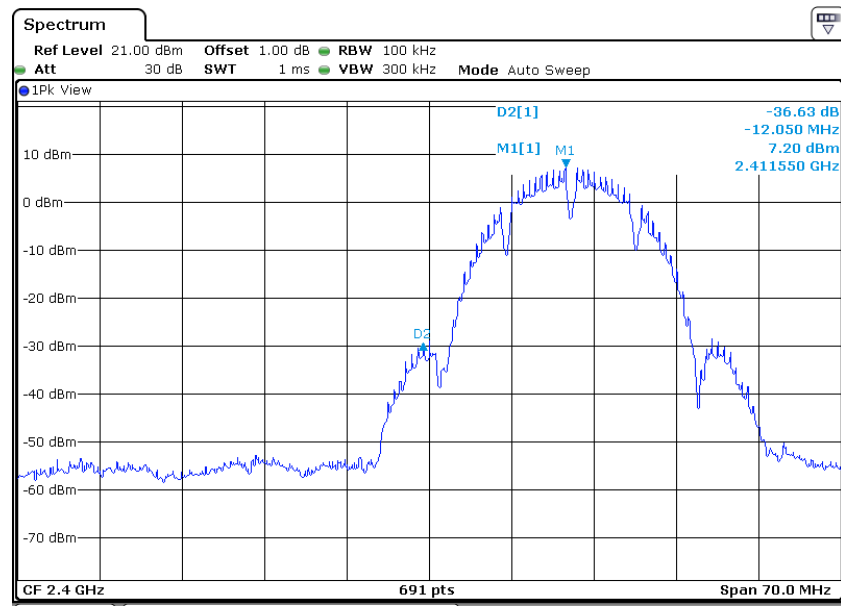


Channel 06 (2437MHz) Reference Level: 7.56dBm

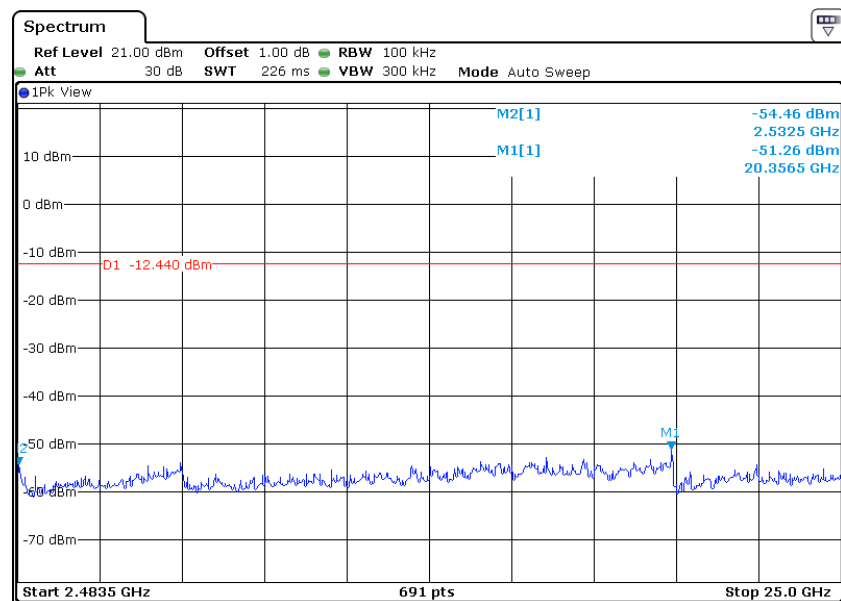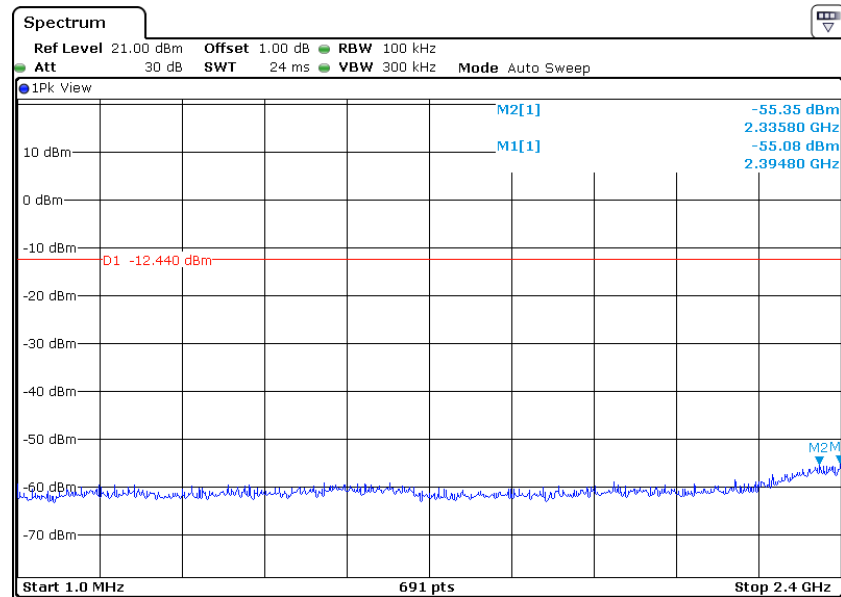



Channel 11 (2462MHz) Reference Level: 7.51dBm

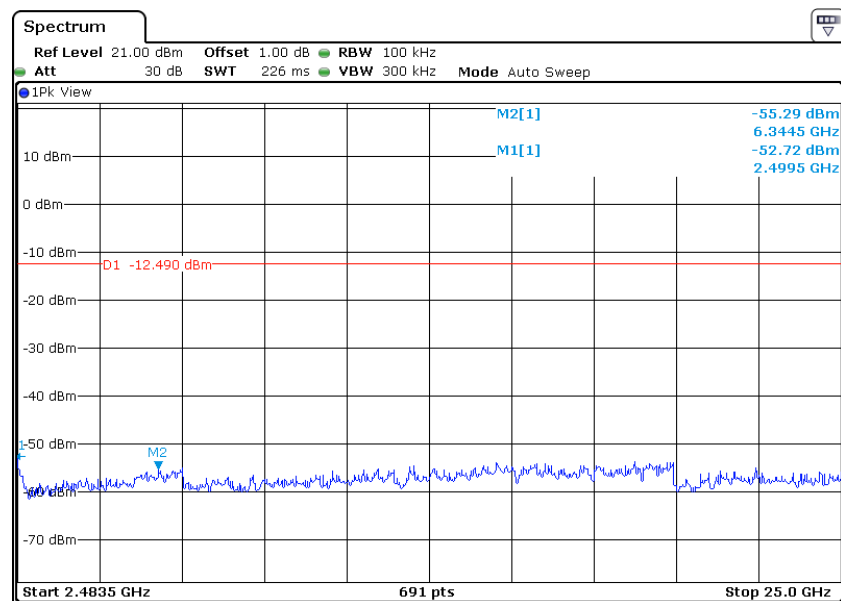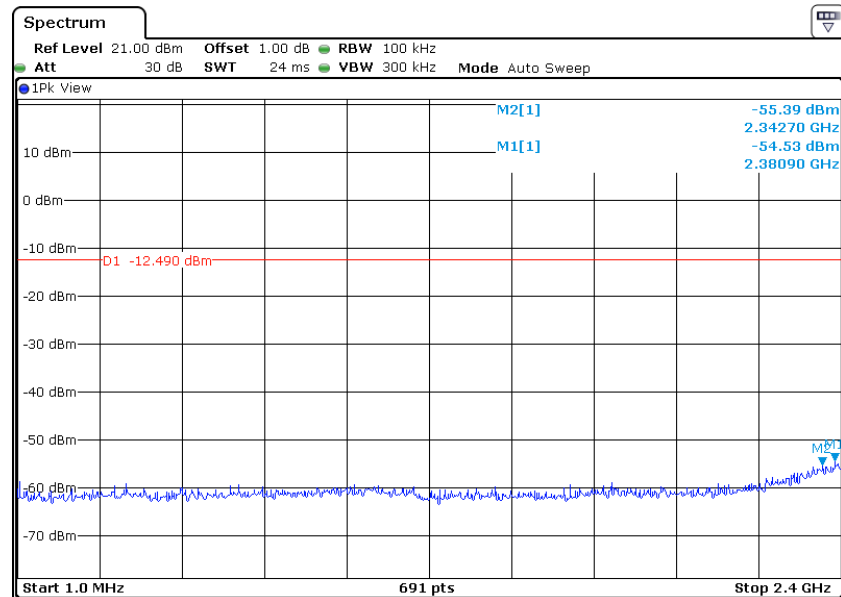


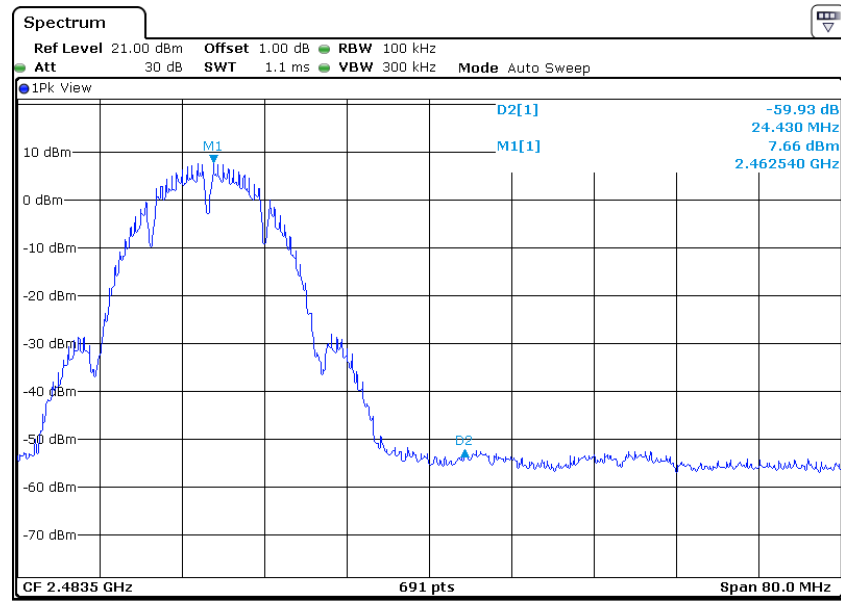



802.11g

Channel 01 (2412MHz) Reference Level: -0.84dBm

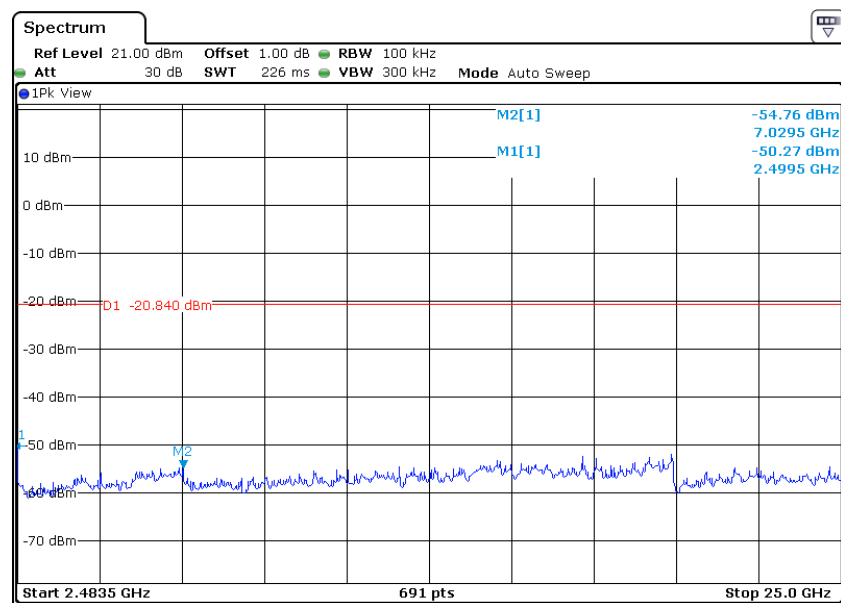
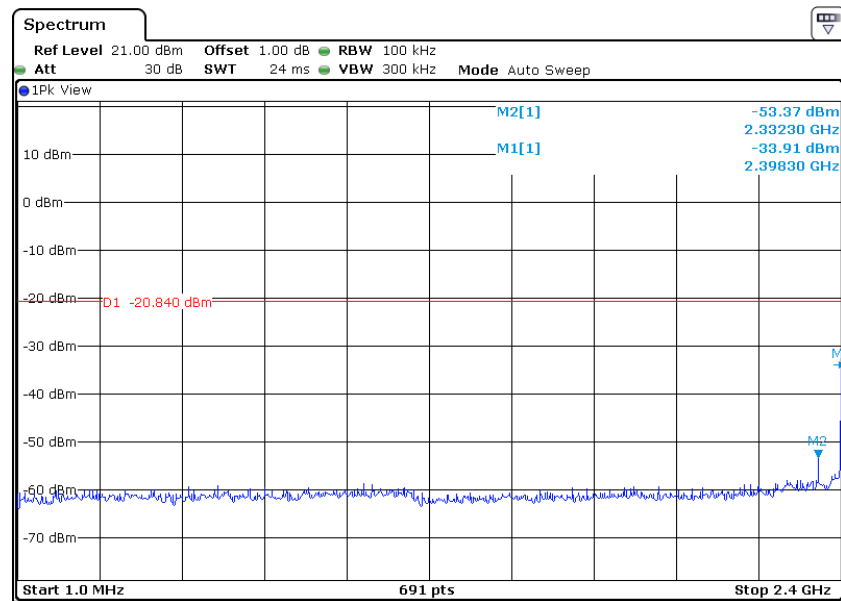


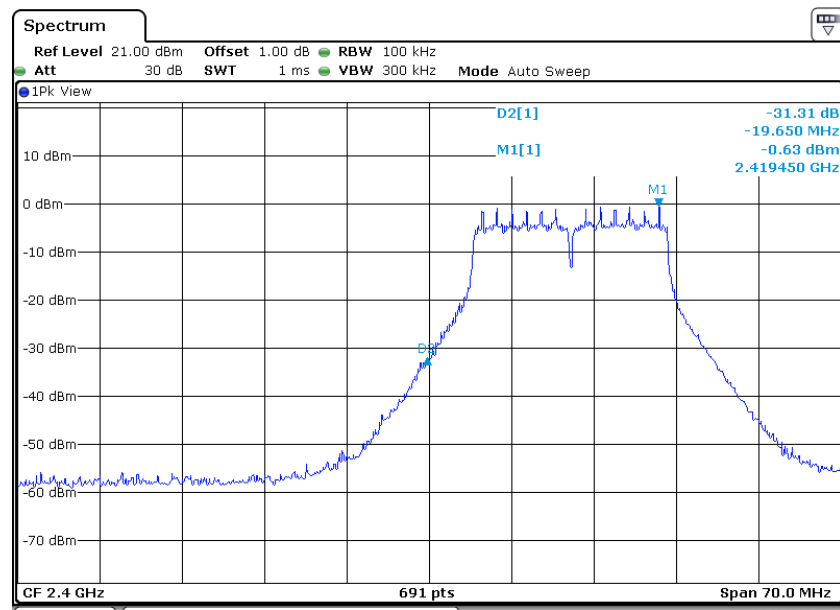


Channel 06 (2437MHz) Reference Level: -0.43dBm

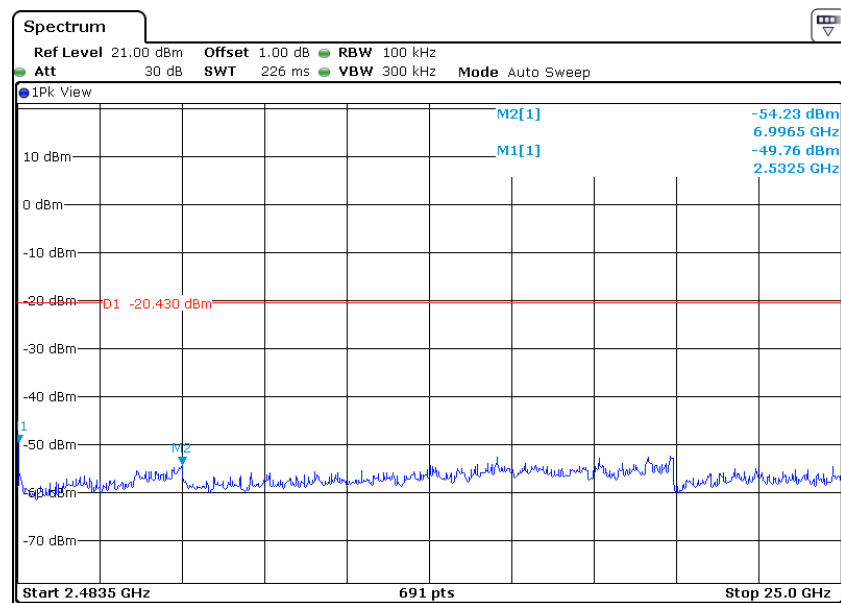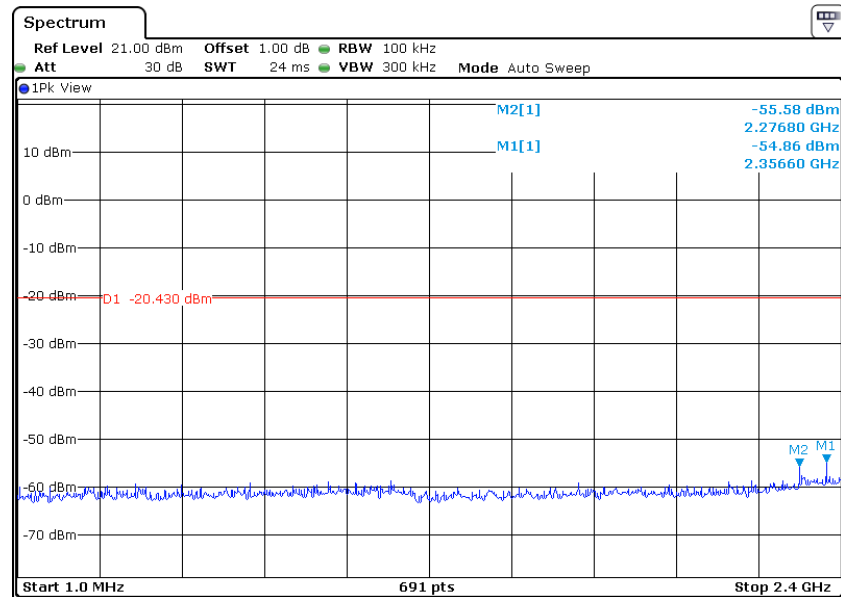



Channel 11 (2462MHz) Reference Level: 0.10dBm

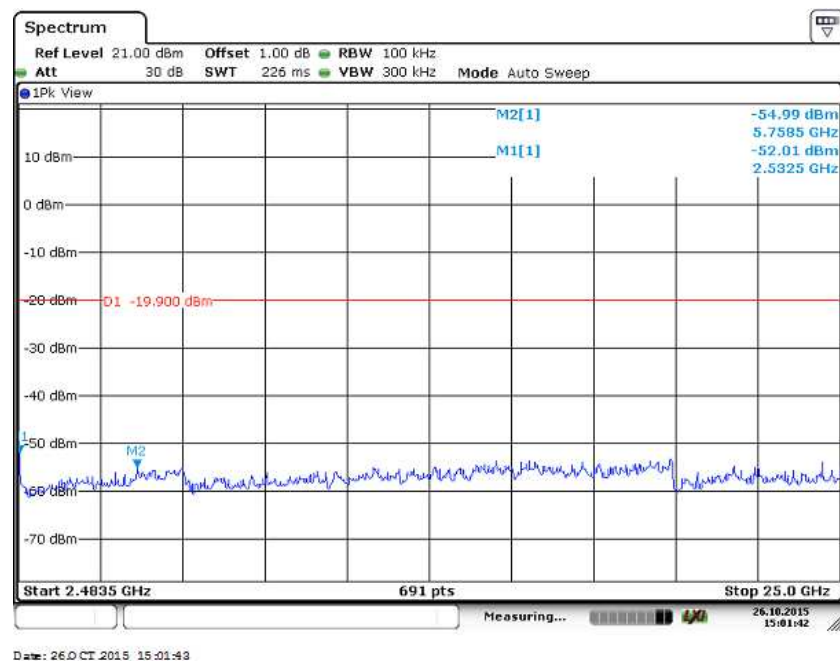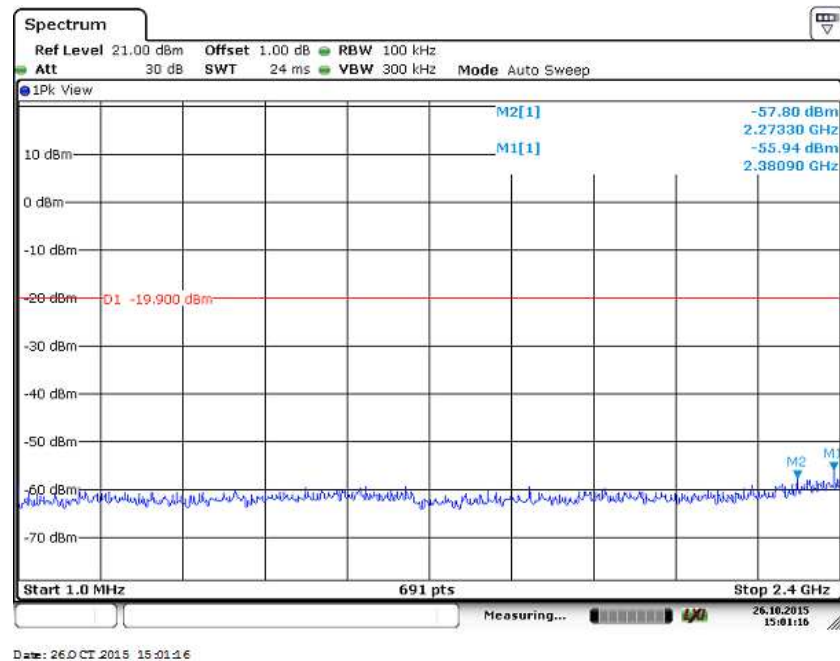


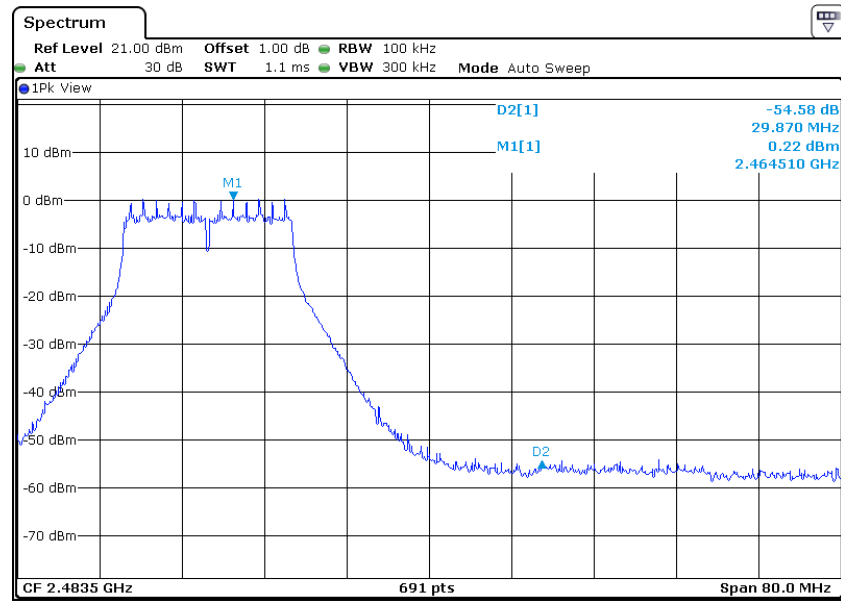



802.11n-HT20

Channel 01 (2412MHz) Reference Level: -0.66dBm

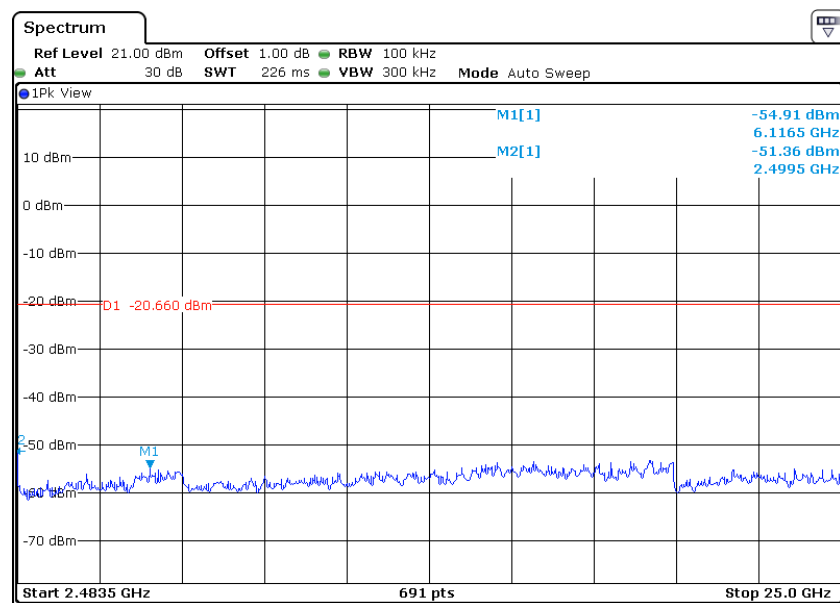
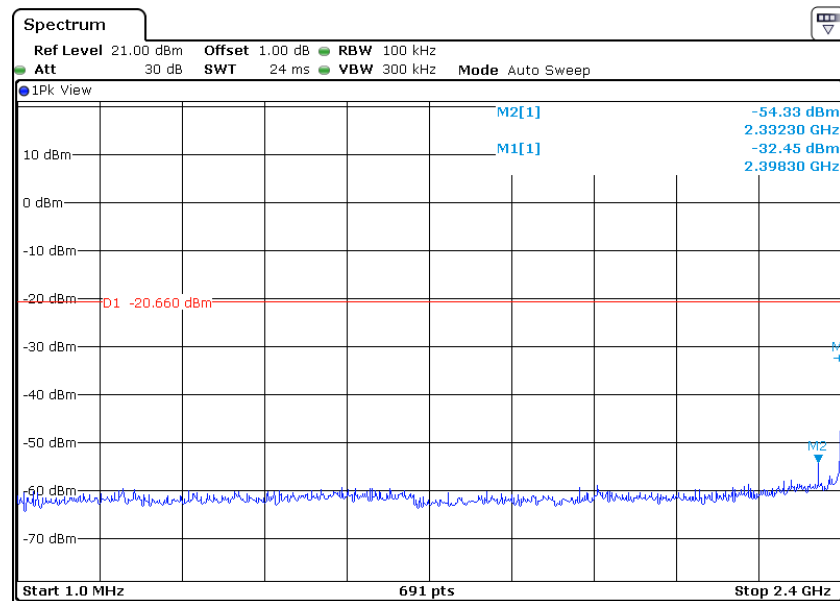


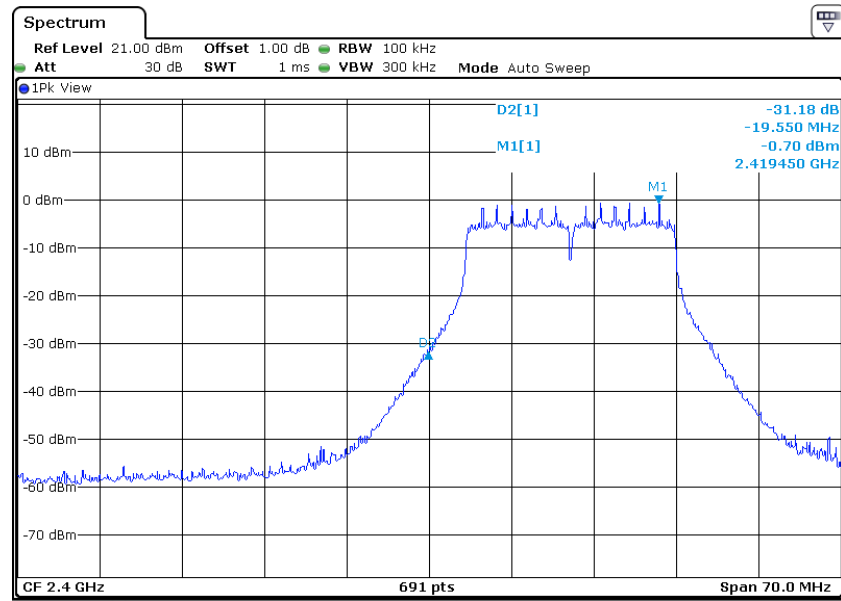


Channel 06 (2437MHz) Reference Level: -0.53dBm

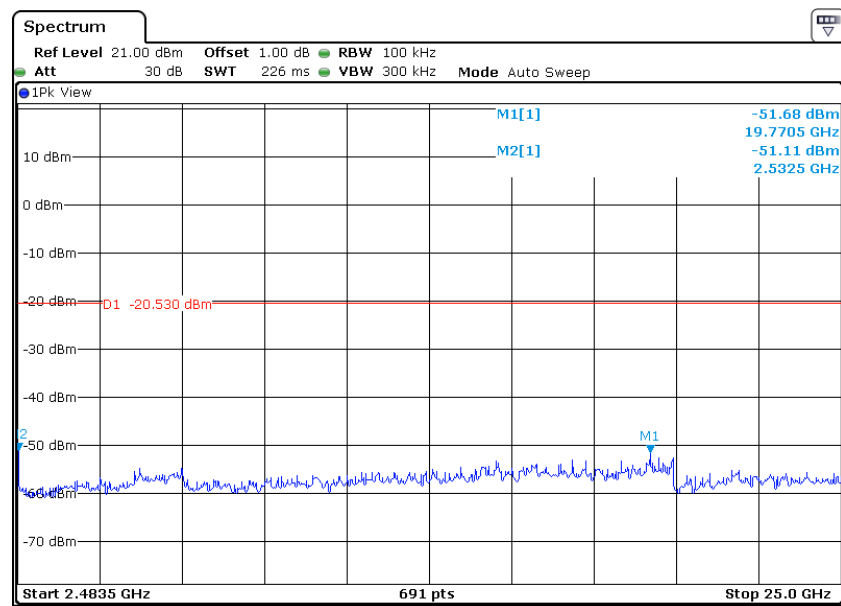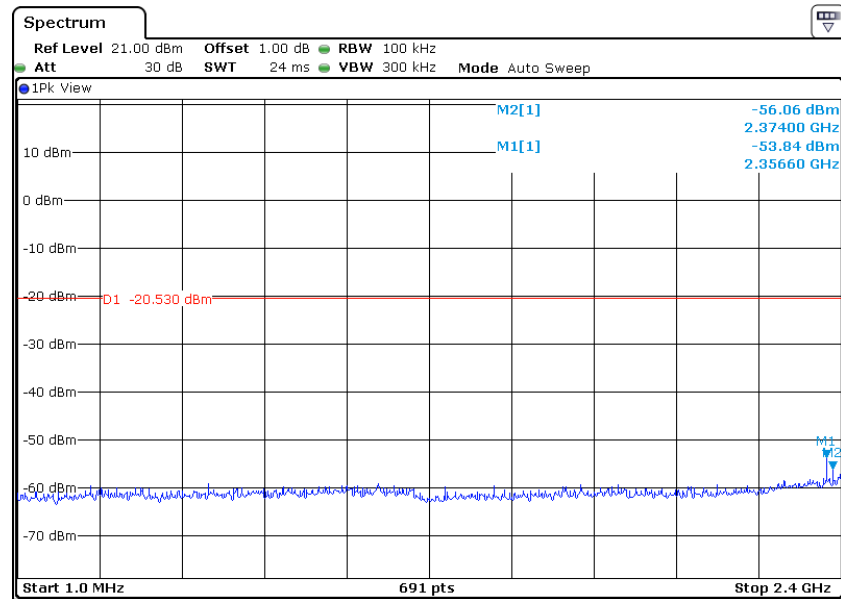



Channel 11 (2462MHz) Reference Level: -0.22dBm

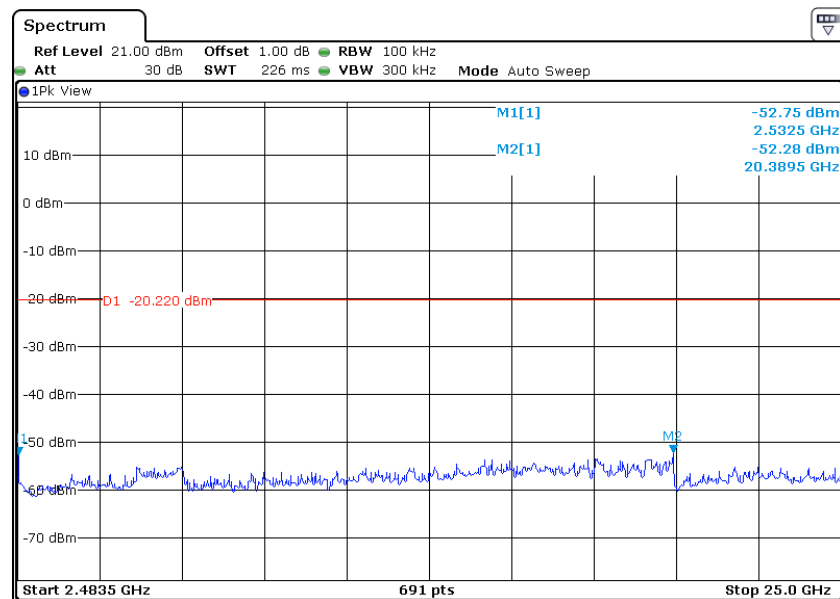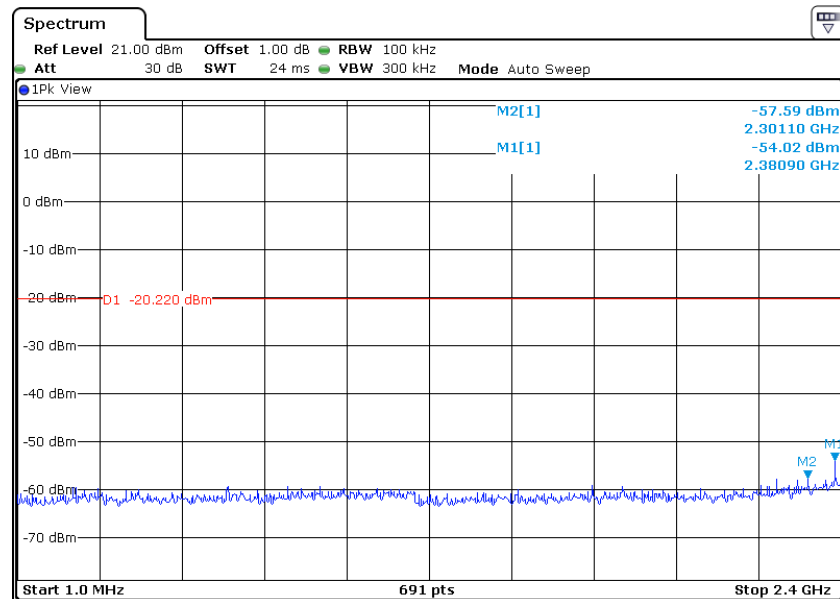


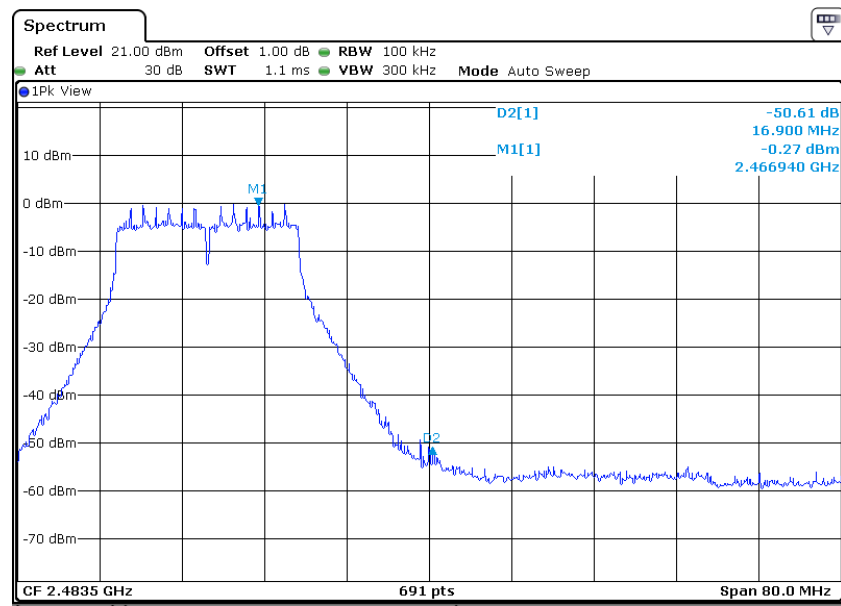



802.11n-HT40

Channel 03 (2422MHz) Reference Level: -4.46dBm

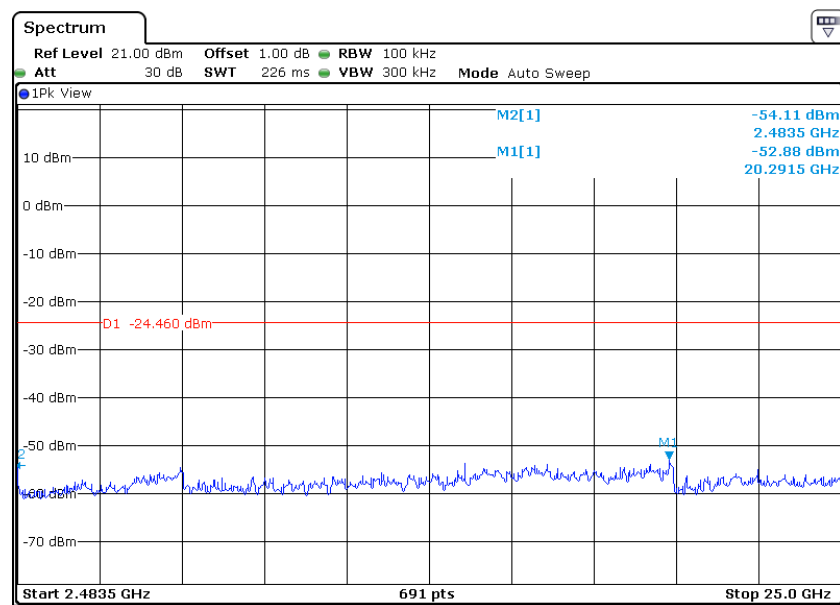
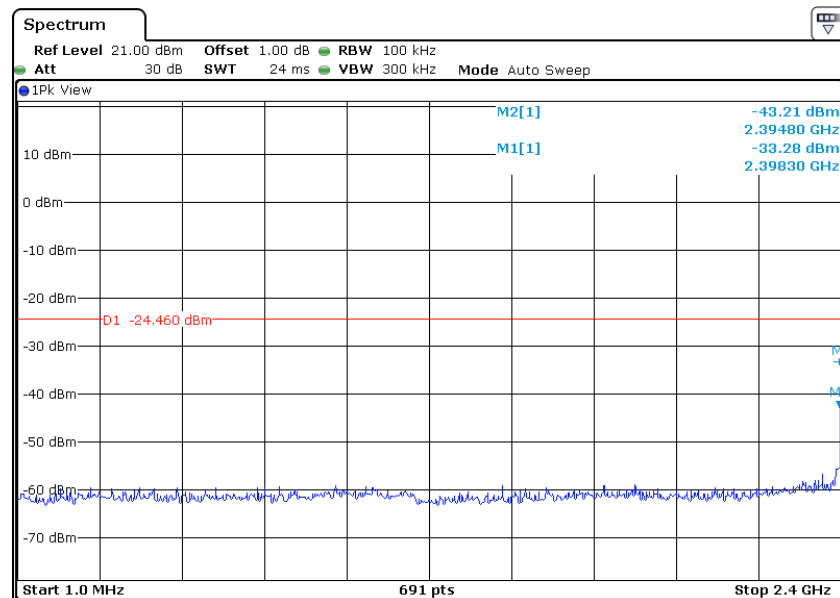


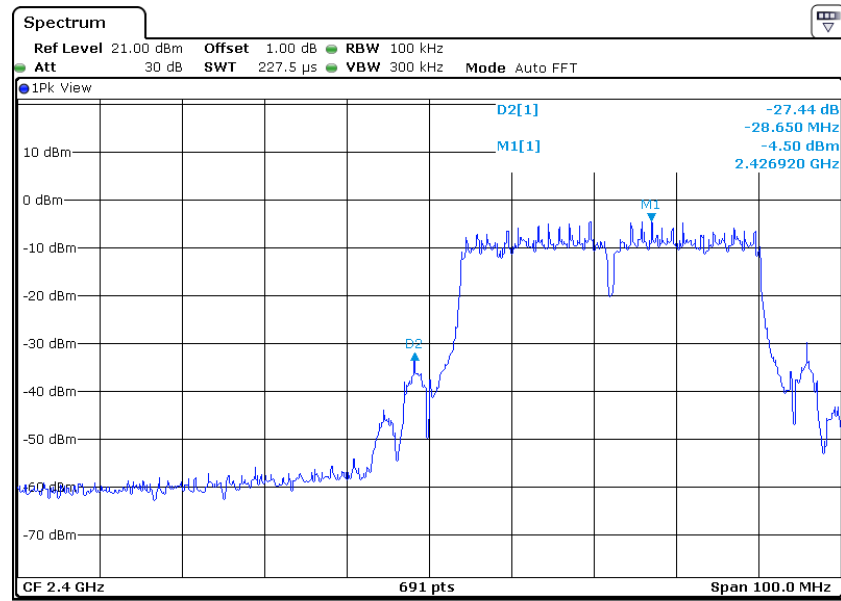


Channel 06 (2437MHz) Reference Level: -4.21dBm

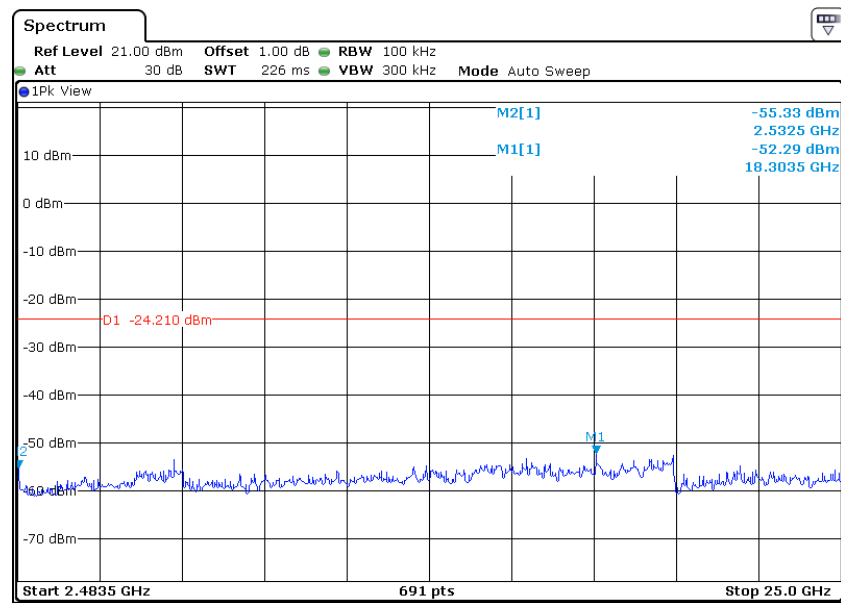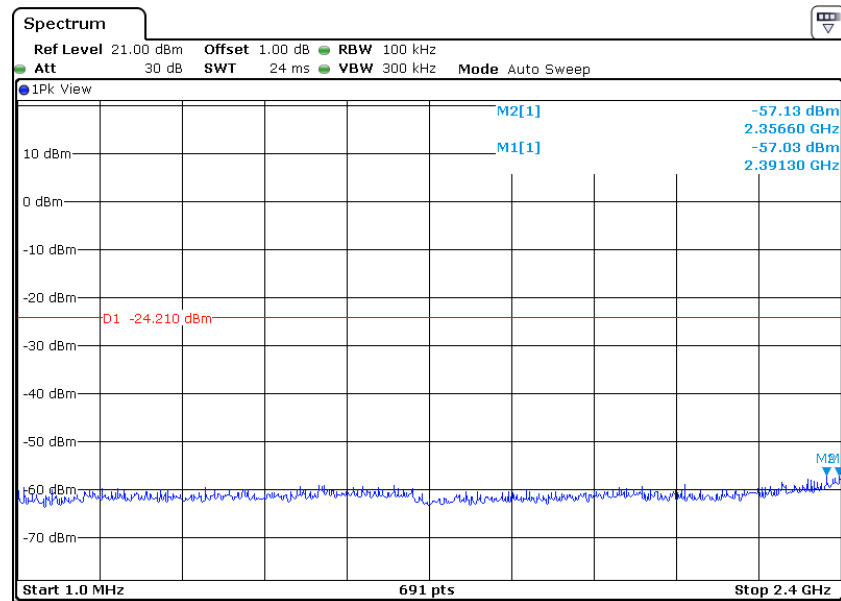

Channel 09 (2452MHz) Reference Level: -3.81dBm

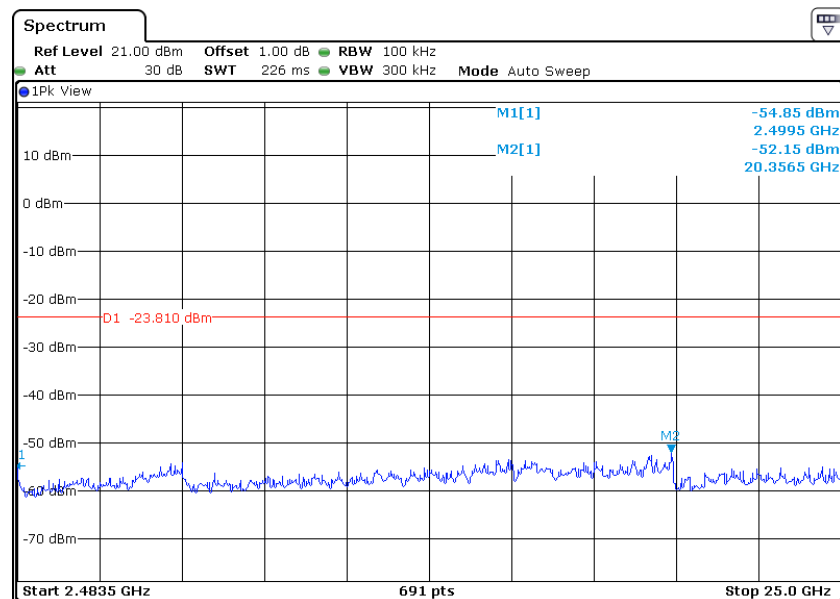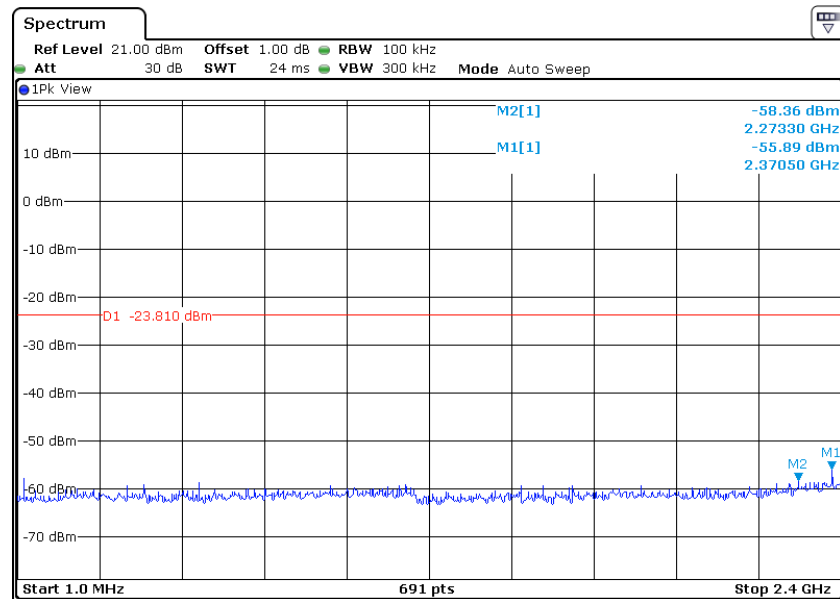

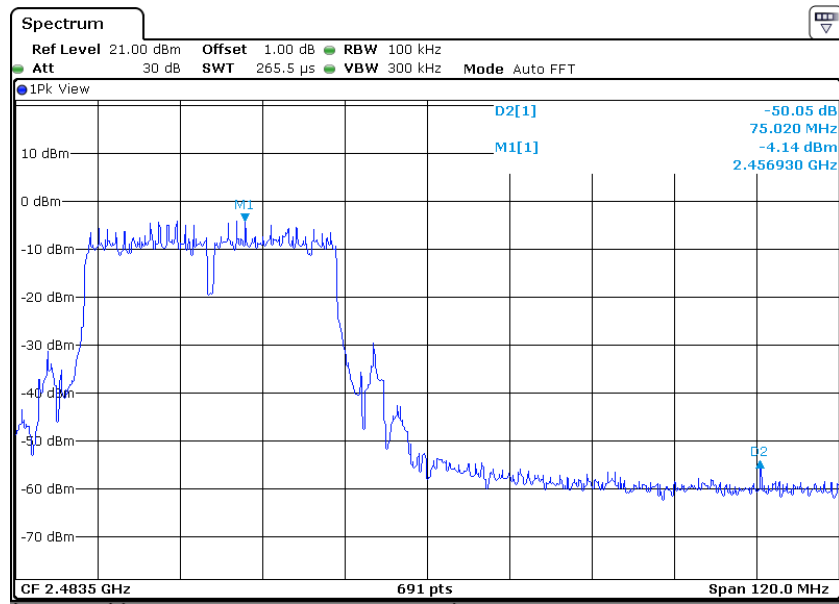

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- ☒ Not required, since all emissions are more than 20dB below fundamental
☐ See attached data sheet

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b) (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified. (The simultaneous transmission was considered).

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.8 Radiated Spurious Emission

Worst Case Radiated Spurious Emission (802.11b-Channel 11)
at
336.044 MHz

Judgement: Passed by 0.5dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Worst Case Operating Mode: Transmitting (802.11b-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	191.999	45.7	20.0	11.3	37.0	43.5	-6.5
Horizontal	336.044	48.7	20.0	16.8	45.5	46.0	-0.5
Horizontal	720.155	33.1	20.0	24.9	38.0	46.0	-8.0
Vertical	46.975	36.6	20.0	10.0	26.6	40.0	-13.4
Vertical	191.990	40.3	20.0	11.3	31.6	43.5	-11.9
Vertical	624.125	35.1	20.0	24.1	39.2	46.0	-6.8

NOTES: 1. Quasi-Peak detector is used for frequency below 1GHz.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11b-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	58.1	36.1	34.2	56.2	74.0	-17.8
Horizontal	*7236.000	58.1	36.2	36.2	58.1	74.0	-15.9
Horizontal	*2389.071	56.7	34.7	32.4	54.4	74.0	-19.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	40.1	36.1	34.2	38.2	54.0	-15.8
Horizontal	*7236.000	43.3	36.2	36.2	43.3	54.0	-10.7
Horizontal	*2389.071	39.2	34.7	32.4	36.9	54.0	-17.1

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11b-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	57.3	36.1	34.6	55.8	74.0	-18.2
Horizontal	*7311.000	56.6	35.6	37.1	58.1	74.0	-15.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.4	36.1	34.6	37.9	54.0	-16.1
Horizontal	*7311.000	41.6	35.6	37.1	43.1	54.0	-10.9

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11b-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	57.8	36.1	34.6	56.3	74.0	-17.7
Horizontal	*7386.000	56.6	35.6	37.2	58.2	74.0	-15.8
Horizontal	*2484.500	56.0	35.5	33.3	53.8	74.0	-20.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	39.8	36.1	34.6	38.3	54.0	-15.7
Horizontal	*7386.000	41.6	35.6	37.2	43.2	54.0	-10.8
Horizontal	*2484.500	37.1	35.5	33.3	34.9	54.0	-19.1

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11g-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	57.5	36.1	34.2	55.6	74.0	-18.4
Horizontal	*7236.000	57.4	36.2	36.2	57.4	74.0	-16.6
Horizontal	*2389.071	56.1	34.7	32.4	53.8	74.0	-20.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	39.7	36.1	34.2	37.8	54.0	-16.2
Horizontal	*7236.000	42.1	36.2	36.2	42.1	54.0	-11.9
Horizontal	*2389.071	37.3	34.7	32.4	35.0	54.0	-19.0

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11g-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	57.3	36.1	34.6	55.8	74.0	-18.2
Horizontal	*7311.000	56.1	35.6	37.1	57.6	74.0	-16.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.1	36.1	34.6	37.6	54.0	-16.4
Horizontal	*7311.000	43.9	35.6	37.1	45.4	54.0	-8.6

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11g-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	57.4	36.1	34.6	55.9	74.0	-18.1
Horizontal	*7386.000	56.5	35.6	37.2	58.1	74.0	-15.9
Horizontal	*2484.500	55.7	35.5	33.3	53.5	74.0	-20.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	39.4	36.1	34.6	37.9	54.0	-16.1
Horizontal	*7386.000	40.8	35.6	37.2	42.4	54.0	-11.6
Horizontal	*2484.500	36.9	35.5	33.3	34.7	54.0	-19.3

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11n20-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	58.0	36.1	34.2	56.1	74.0	-17.9
Horizontal	*7236.000	57.8	36.2	36.2	57.8	74.0	-16.2
Horizontal	*2389.071	55.4	34.7	32.4	53.1	74.0	-20.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	39.5	36.1	34.2	37.6	54.0	-16.4
Horizontal	*7236.000	41.8	36.2	36.2	41.8	54.0	-12.2
Horizontal	*2389.071	39.2	34.7	32.4	36.9	54.0	-17.1

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11n20-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	57.7	36.1	34.6	56.2	74.0	-17.8
Horizontal	*7311.000	55.4	35.6	37.1	56.9	74.0	-17.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	38.9	36.1	34.6	37.4	54.0	-16.6
Horizontal	*7311.000	40.2	35.6	37.1	41.7	54.0	-12.3

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11n20-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	57.9	36.1	34.6	56.4	74.0	-17.6
Horizontal	*7386.000	55.5	35.6	37.2	57.1	74.0	-16.9
Horizontal	*2484.500	56.2	35.5	33.3	54.0	74.0	-20.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	39.3	36.1	34.6	37.8	54.0	-16.2
Horizontal	*7386.000	40.0	35.6	37.2	41.6	54.0	-12.4
Horizontal	*2484.500	36.7	35.5	33.3	34.5	54.0	-19.5

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11n40-Channel 03)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	57.3	36.1	34.2	55.4	74.0	-18.6
Horizontal	*7266.000	57.8	36.2	36.2	57.8	74.0	-16.2
Horizontal	*2389.460	56.2	34.7	32.4	53.9	74.0	-20.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	39.0	36.1	34.2	37.1	54.0	-16.9
Horizontal	*7266.000	40.7	36.2	36.2	40.7	54.0	-13.3
Horizontal	*2389.460	39.5	34.7	32.4	37.2	54.0	-16.8

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11n40-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	57.1	36.1	34.6	55.6	74.0	-18.4
Horizontal	*7311.000	55.9	35.6	37.1	57.4	74.0	-16.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	38.9	36.1	34.6	37.4	54.0	-16.6
Horizontal	*7311.000	39.1	35.6	37.1	40.6	54.0	-13.4

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

Operating Mode: Transmitting (802.11n40-Channel 09)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	57.0	36.1	34.6	55.5	74.0	-18.5
Horizontal	*7356.000	55.8	35.6	37.2	57.4	74.0	-16.6
Horizontal	*2483.850	55.8	35.5	33.3	53.6	74.0	-20.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	38.9	36.1	34.6	37.4	54.0	-16.6
Horizontal	*7356.000	39.1	35.6	37.2	40.7	54.0	-13.3
Horizontal	*2483.850	36.4	35.5	33.3	34.2	54.0	-19.8

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.9 Conducted Emission

Worst Case Radiated Spurious Emission (802.11b-Channel 11)
at 0.382MHz
is passed by 12.6dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017


Model: TD-1050

Worst Case Operating Mode: Transmitting (802.11b-Channel 11)

Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

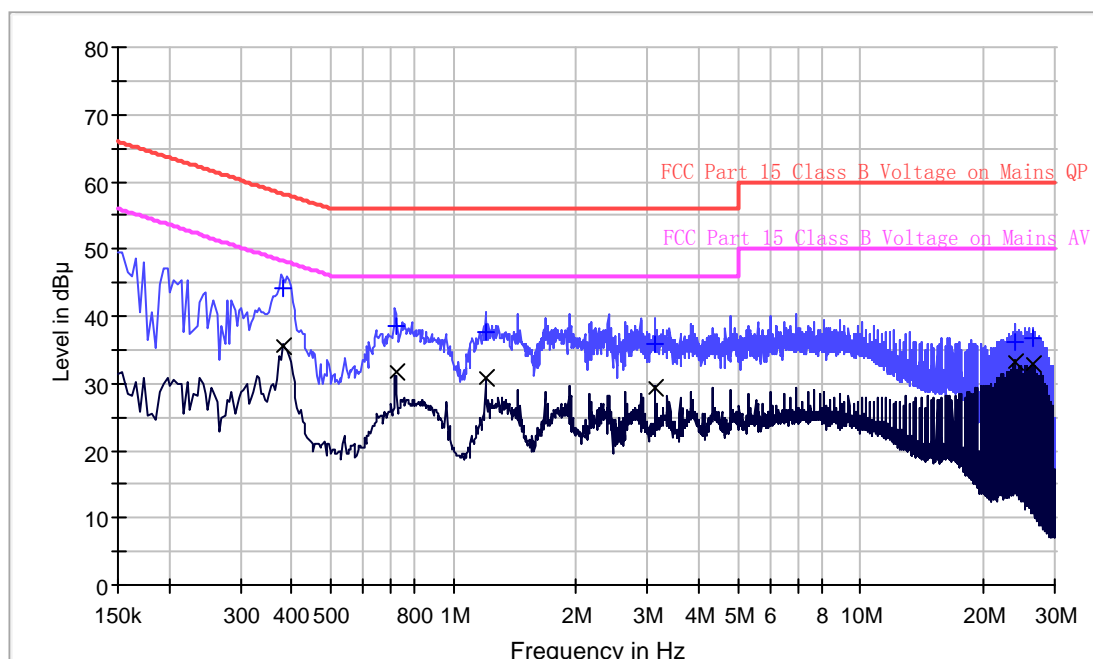

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.382000	44.0	9.000	L1	9.7	14.2	58.2
0.722000	38.4	9.000	L1	9.7	17.6	56.0
1.202000	37.5	9.000	L1	9.7	18.5	56.0
3.122000	36.0	9.000	L1	9.8	20.0	56.0
24.006000	36.2	9.000	L1	10.6	23.8	60.0
26.650000	36.8	9.000	L1	10.7	23.2	60.0

Limit and Margin AV

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.382000	35.6	9.000	L1	9.7	12.6	48.2
0.722000	31.7	9.000	L1	9.7	14.3	46.0
1.202000	30.7	9.000	L1	9.7	15.3	46.0
3.122000	29.3	9.000	L1	9.8	16.7	46.0
24.006000	33.1	9.000	L1	10.6	16.9	50.0
26.650000	33.0	9.000	L1	10.7	17.0	50.0

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017


Model: TD-1050

Worst Case Operating Mode: Transmitting (802.11b-Channel 11)

Phase: N

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

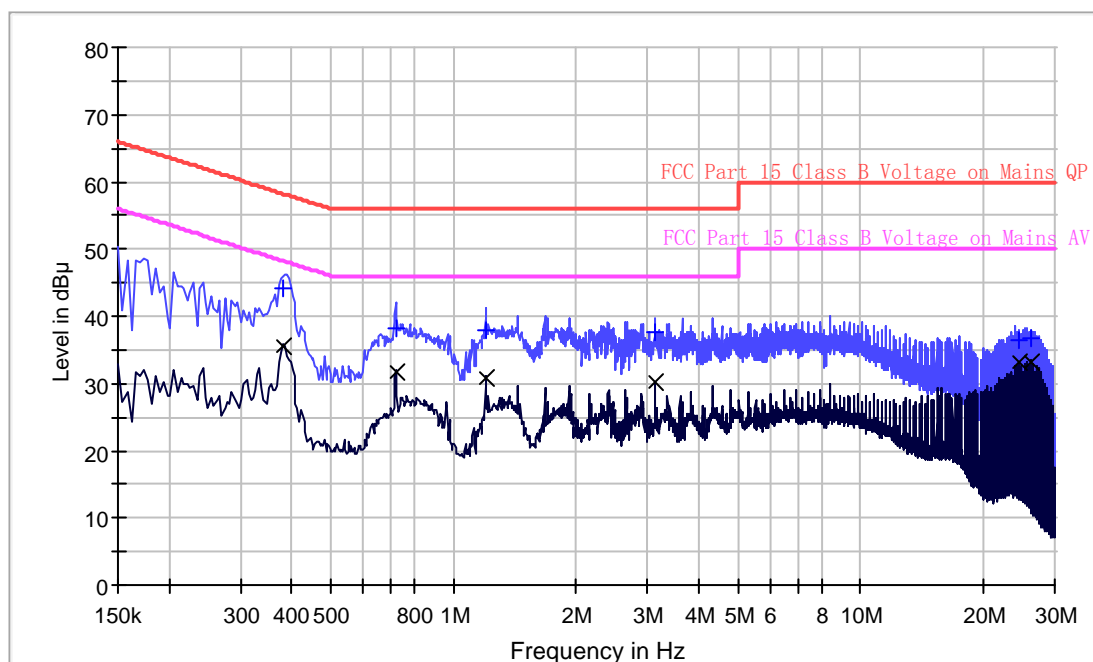

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.382000	44.2	9.000	N	9.7	14.0	58.2
0.722000	38.3	9.000	N	9.7	17.7	56.0
1.202000	38.0	9.000	N	9.7	18.0	56.0
3.122000	37.6	9.000	N	9.8	18.4	56.0
24.490000	36.5	9.000	N	10.6	23.5	60.0
26.170000	36.7	9.000	N	10.7	23.3	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.382000	35.7	9.000	N	9.7	12.5	48.2
0.722000	31.6	9.000	N	9.7	14.4	46.0
1.202000	30.9	9.000	N	9.7	15.1	46.0
3.122000	30.3	9.000	N	9.8	15.7	46.0
24.490000	33.1	9.000	N	10.6	16.9	50.0
26.170000	33.3	9.000	N	10.7	16.7	50.0

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.10 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

☐ Not required - No digital part

☐ Test results are attached

☒ Included in the separated report.

Applicant: Qbic technology Co., Ltd

Date of Test: October 30, 2017

Model: TD-1050

4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

EXHIBIT 5

EQUIPMENT PHOTOGRAPHS

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 6

PRODUCT LABELLING

6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

EXHIBIT 7

TECHNICAL SPECIFICATIONS

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 8

INSTRUCTION MANUAL

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 9

CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

EXHIBIT 10

MISCELLANEOUS INFORMATION

10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

EXHIBIT 11

TEST EQUIPMENT LIST

11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	1-Jun-2017	1-Jun-2018
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	1-Jun-2017	1-Jun-2018
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	20-Sep-2017	20-Sep-2018
SZ185-01	EMI Receiver	R&S	ESCI	100547	9-Feb-2017	9-Feb-2018
SZ061-08	Horn Antenna	ETS	3115	00092346	20-Sep-2017	20-Sep-2018
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	26-May-2017	26-May-2018
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	1-Jun-2017	1-Jun-2018
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	7-Jul-2017	7-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	9-Feb-2017	9-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIAL	RG 213U	--	8-Jul-2017	8-Jan-2018
SZ062-05	RF Cable	RADIAL	0.04-26.5GHz	--	16-Sep-2017	16-Mar-2018
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	16-Sep-2017	16-Mar-2018
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	14-Jun-2017	14-Jun-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	1-Nov-2016	1-Nov-2017
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	1-Nov-2016	1-Nov-2017
SZ187-02	Two-Line V-Network	R&S	ENV216	100072	12-Jul-2017	12-Jul-2018
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019