

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT**FCC PART 15.247****Report Reference No.....: GTS20241101002-1-01****FCC ID..... : 2AYD5-I24D03**

Compiled by


(position+printed name+signature)..: File administrators Peter Xiao

Supervised by

(position+printed name+signature)..: Test Engineer Evan Ouyang

Approved by

(position+printed name+signature)..: Manager Jason Hu

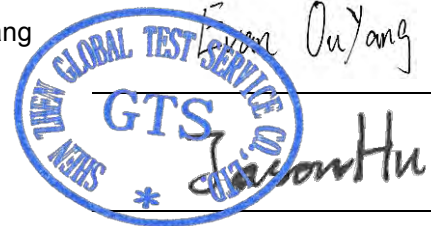

Date of issue.....: Dec.25, 2024

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Applicant's name.....: Imin Technology Pte Ltd

Address: 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Test specificationStandard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description

Trade Mark:

Manufacturer: Imin Technology Pte Ltd

Model/Type reference: I24D03

List Models: N/A

Modulation Type: GFSK, $\pi/4$ -DQPSK, 8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version: N/A

Software Version: N/A

Rating: DC 24V/2.5A by adapter

Result: **PASS**

TEST REPORT

Test Report No. :	GTS20241101002-1-01	Dec.25, 2024
		Date of issue

Equipment under Test : POS Device

Model /Type : I24D03

Listed model : N/A

Applicant : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Manufacturer : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	7
2.4. Short description of the Equipment under Test (EUT)	7
2.5. EUT operation mode	7
2.6. Block Diagram of Test Setup	8
2.7. Related Submittal(s) / Grant (s)	8
2.8. EUT Exercise Software	8
2.9. Special Accessories	8
2.10. External I/O Cable	8
2.11. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	9
3.5. Summary of measurement results	10
3.6. Equipments Used during the Test.....	11
4. TEST CONDITIONS AND RESULTS	12
4.1. AC Power Conducted Emission	12
4.2. Radiated Emission	25
4.3. Maximum Peak Output Power	46
4.4. 99% and 20dB Bandwidth	47
4.5. Frequency Separation	48
4.6. Conducted Spurious Emissions and Band Edge Compliance of RF Emission.....	49
4.7. Number of hopping frequency	51
4.8. Time Of Occupancy(Dwell Time)	52
4.9. Pseudorandom Frequency Hopping Sequence	53
4.10. Antenna Requirement	54
5. TEST SETUP PHOTOS OF THE EUT	55
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	57
6.1. External photos of the EUT	57
6.2. Internal photos of the EUT	57

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices


[KDB 558074 D01 15.247 Meas Guidance v05r02](#): Digital Transmission Systems (DTS) and Frequency Hopping measurement procedures

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Nov.28, 2024
	:	
Testing commenced on	:	Nov.28, 2024
	:	
Testing concluded on	:	Dec.24, 2024

2.2. Product Description

Product Name:	POS Device
Trade Mark:	
Model/Type reference:	I24D03
List Model:	N/A
Model Declaration	N/A
Power supply:	DC 24V/2.5A by adapter
Hardware Version	N/A
Software Version	N/A
Sample ID	GTS20241101002-1-S0001-3# GTS20241101002-1-S0001-4#(Version A) GTS20241101002-1-S0001-5#(Version B) GTS20241101002-1-S0001-6#(Version C) GTS20241101002-1-S0001-7#(Version D) GTS20241101002-1-S0001-8#(Version E) GTS20241101002-1-S0001-9#(Version F)
Bluetooth	
Frequency Range	2402MHz ~ 2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
2.4GWLAN	
WLAN Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz IEEE 802.11ax HE20:2412-2462MHz IEEE 802.11ax HE40:2422-2452MHz
WLAN Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel number:	11 Channel for IEEE 802.11b/g/n/ax (HT20) 7 Channel for IEEE 802.11n/ax (HT40)

Channel separation:	5MHz
WIFI(5.2G/5.3G/5.7G/5.8G Band)	
WLAN Operation frequency	5180-5240MHz/ 5260MHz to 5320MHz/ 5500MHz to 5700MHz/ 5745MHz to 5825MHz
WLAN Modulation Type	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT20: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT40: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT80: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE80: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK)
Channel number:	4 Channels for 20MHz bandwidth(5180-5240MHz) 4 Channels for 20MHz bandwidth(5260-5320MHz) 11 Channels for 20MHz bandwidth(5500-5700MHz) 5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5270~5310MHz) 5 Channels for 40MHz bandwidth(5510-5670MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5210MHz) 1 channels for 80MHz bandwidth(5290MHz) 2 Channels for 80MHz bandwidth(5530-5610MHz) 1 channels for 80MHz bandwidth(5775MHz)
Antenna Description	Internal Antenna, 2.05dBi(Max.) for 2.4G Band and 3.87dBi(Max.) for 5G Band
RFID(13.56MHz) (Optional)	
Frequency Range	13.56MHz
Channel Number	1
Modulation Type	ASK
Antenna Description	Internal Antenna, 0dBi (Max.), NFC has two optional antennas, antenna 1(Model:DS2-52) and antenna 2 (Model:DS2-51).
Remark:The I24D03 model has 6 versions; Version A: Double large display (80 inch printer). Version B: One large display and one small display (80 inch printer), Version C: Only one large display (80 inch printer), Version D: Double large display (58 inch printer), Version E: One large display and one small display (58 inch printer), Version F: Only one large display (58 inch printer),	

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input checked="" type="radio"/>	24 V DC
		<input type="radio"/>	Other (specified in blank below)		

DC 24.0V

2.4. Short description of the Equipment under Test (EUT)

This is a POS Device.

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. There are 79 channels provided to the EUT.

Channel 00/39/78 was selected to test.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
(BDR/EDR)	2402	1/2/3
	2441	1/2/3
	2480	1/2/3
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
--	--	--	--
--	--	--	--
38	2440	78	2480
39	2441		

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case(AC 120V/60Hz).

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX (1Mbps).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(1Mbps-MCH).

2.6. Block Diagram of Test Setup



2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AYD5-I24D03** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. EUT Exercise Software

The system enters the engineering mode through the instructions provided by the application (adb model), tests under continuous transmission conditions, and changes the test channel.

2.9. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN HONOR ELECTRONIC CO.,LTD.	Adapter	ADS-65HI-19A-124060F	--	SDOC
Jiangsu Chenyang Electron Co.,Ltd.	Adapter	CYSE65-240250	--	SDOC
LENOVO	PC	DESKYOP-EUIVCNR	--	SDOC
LENOVO	Keyboard	T460S	--	SDOC
LENOVO	Mouse	Howard	--	SDOC
aigo	USB flash disk	U330	--	SDOC
THTF	Display	LE23CW-D	--	SDOC
SONY	Earphone	MDR-XB550AP	--	SDOC
--	Electronic Scale	--	--	SDOC
--	Cashbox	--	--	SDOC

Note: The PC, Display, Electronic Scale, Cashbox, Keyboard, Mouse and USB flash disk is only used for auxiliary testing.

2.10. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	Non-Shielded, 1.0m
USB Port	5	N/A
RJ11 Port	1	N/A
RJ12 Port	1	N/A
RJ45 Port	1	Non-Shielded, 10m
HDMI Port	1	N/A
Type-C Port	1	N/A
Earphone Port	1	N/A

2.11. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is165725.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Summary of measurement results

Applied Standard: FCC Part 15 Subpart C				
FCC Rules	Description of Test	Test Sample	Result	Remark
§15.247(b)(1)	Maximum Conducted Output Power	GTS20241101002-1-S0001-3#	Compliant	Appendix A
§15.247(c)	Frequency Separation	GTS20241101002-1-S0001-3#	Compliant	Appendix A
§15.247(c)	99% and 20 dB Bandwidth	GTS20241101002-1-S0001-3#	Compliant	Appendix A
§15.247(a)(1)(ii)	Number of Hopping Frequency	GTS20241101002-1-S0001-3#	Compliant	Appendix A
§15.247(a)(1)(iii)	Time Of Occupancy (Dwell Time)	GTS20241101002-1-S0001-3#	Compliant	Appendix A
§15.209, §15.205	Conducted Spurious Emissions and Band Edges Test	GTS20241101002-1-S0001-3#	Compliant	Appendix A
§15.209, §15.247(d)	Radiated Spurious Emissions	GTS20241101002-1-S0001-3# GTS20241101002-1-S0001-4# GTS20241101002-1-S0001-5# GTS20241101002-1-S0001-6# GTS20241101002-1-S0001-7# GTS20241101002-1-S0001-8# GTS20241101002-1-S0001-9#	Compliant	Note 1
§15.205	Emissions at Restricted Band	GTS20241101002-1-S0001-3#	Compliant	Appendix A
§15.207(a)	AC Conducted Emissions	GTS20241101002-1-S0001-4# GTS20241101002-1-S0001-5# GTS20241101002-1-S0001-6# GTS20241101002-1-S0001-7# GTS20241101002-1-S0001-8# GTS20241101002-1-S0001-9#	Compliant	Note 1
§15.203 §15.247(c)	Antenna Requirements	GTS20241101002-1-S0001-3#	Compliant	Note 1
§15.247(i)§2.109 1	RF Exposure	/	Compliant	Note 2

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (MPE Report).
5. We tested all test mode and recorded worst case in report

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	CYBERTEK	EM5040A	E1850400105	2024/07/15	2025/07/14
LISN	R&S	ESH2-Z5	893606/008	2024/07/15	2025/07/14
EMI Test Receiver	R&S	ESPI3	101841-cd	2024/07/15	2025/07/14
EMI Test Receiver	R&S	ESCI7	101102	2024/07/15	2025/07/14
Spectrum Analyzer	Agilent	N9020A	MY48010425	2024/07/15	2025/07/14
Spectrum Analyzer	R&S	FSV40-N	101800	2024/07/15	2025/07/14
Vector Signal generator	Agilent	N5181A	MY49060502	2024/07/15	2025/07/14
Signal generator	Agilent	N5182A	3610AO1069	2024/07/15	2025/07/14
Climate Chamber	ESPEC	EL-10KA	A20120523	2024/07/15	2025/07/14
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2024/07/15	2025/07/14
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2024/07/15	2025/07/14
Bilog Antenna	Schwarzbeck	VULB9163	000976	2024/07/15	2025/07/14
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2024/07/15	2025/07/14
Amplifier	Schwarzbeck	BBV 9743	#202	2024/01/27	2025/01/26
Amplifier	Taiwan Chengyi	EMC051845B	980355	2024/01/27	2025/01/26
Amplifier	Schwarzbeck	BBV9179	9719-025	2024/01/27	2025/01/26
Temperature/Humidity Meter	Gangxing	CTH-608	02	2024/07/15	2025/07/14
High-Pass Filter	HUBER+SUHNER	RG214	RE01	2024/07/15	2025/07/14
High-Pass Filter	HUBER+SUHNER	RG214	RE02	2024/07/15	2025/07/14
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2024/07/15	2025/07/14
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2024/07/15	2025/07/14
Data acquisition card	Agilent	U2531A	TW53323507	2024/07/15	2025/07/14
Power Sensor	Agilent	U2021XA	MY5365004	2024/07/15	2025/07/14
Test Control Unit	Tonscend	JS0806-1	178060067	2024/07/15	2025/07/14
Automated filter bank	Tonscend	JS0806-F	19F8060177	2024/07/15	2025/07/14
Wireless Communication Tester	Rohde&Schwarz	CMW500	125408	2024/07/15	2025/07/14
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

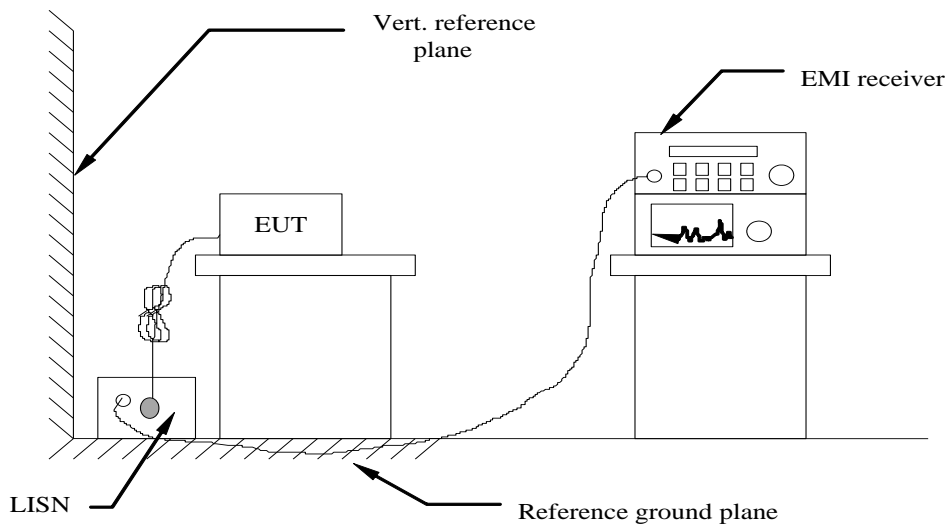

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020.
- 4 The EUT received DC 24.0V power, the Adapter received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where	CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

TEST RESULTS

Remark: We measured Conducted Emission at GFSK, $\pi/4$ -DQPSK and 8DPSK mode in AC 120V/60Hz and AC 240V/60Hz, the worst case was recorded(GFSK 1Mbps-MCH) .

Temperature	26°C	Humidity	47%
Test Engineer	Evan Ouyang	Configurations	BT

Version A:

Adapter: ADS-65HI-19A-124060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	42.40	23.41	10.33	52.73	33.74	65.75	55.75	13.02	22.01	L1	PASS
2	0.177	39.64	20.72	10.22	49.86	30.94	64.63	54.63	14.77	23.69	L1	PASS
3	0.213	34.52	15.74	10.14	44.66	25.88	63.09	53.09	18.43	27.21	L1	PASS
4	0.375	25.79	13.58	10.15	35.94	23.73	58.39	48.39	22.45	24.66	L1	PASS
5	0.375	25.79	13.58	10.15	35.94	23.73	58.39	48.39	22.45	24.66	L1	PASS
6	0.5235	19.35	8.67	10.24	29.59	18.91	56.00	46.00	26.41	27.09	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.15	41.06	20.01	10.35	51.41	30.36	66.00	56.00	14.59	25.64	N	PASS
2	0.195	34.05	14.97	10.16	44.21	25.13	63.82	53.82	19.61	28.69	N	PASS
3	0.393	29.02	20.52	10.16	39.18	30.68	58.00	48.00	18.82	17.32	N	PASS
4	0.708	21.57	9.31	10.23	31.80	19.54	56.00	46.00	24.20	26.46	N	PASS
5	1.095	20.99	10.38	10.21	31.20	20.59	56.00	46.00	24.80	25.41	N	PASS
6	2.0985	23.54	11.14	10.28	33.82	21.42	56.00	46.00	22.18	24.58	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

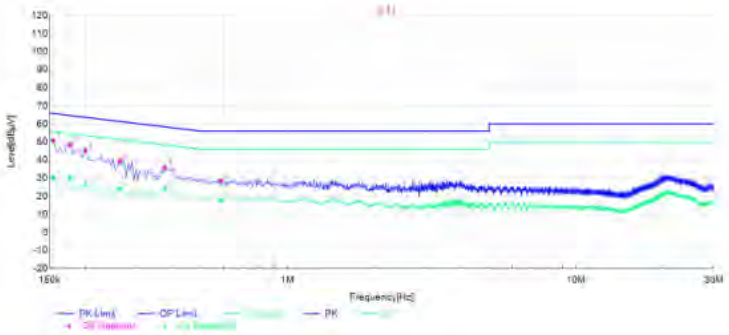


Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	40.44	19.82	10.33	50.77	30.15	65.75	55.75	14.98	25.60	L1	PASS
2	0.177	38.35	19.71	10.22	48.57	29.93	64.63	54.63	16.06	24.70	L1	PASS
3	0.1995	35.00	15.77	10.15	45.15	25.92	63.63	53.63	18.48	27.71	L1	PASS
4	0.2625	29.38	13.95	10.12	39.50	24.07	61.35	51.35	21.85	27.28	L1	PASS
5	0.375	25.60	13.64	10.15	35.75	23.79	58.39	48.39	22.64	24.60	L1	PASS
6	0.5865	18.39	7.39	10.19	28.58	17.58	56.00	46.00	27.42	28.42	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

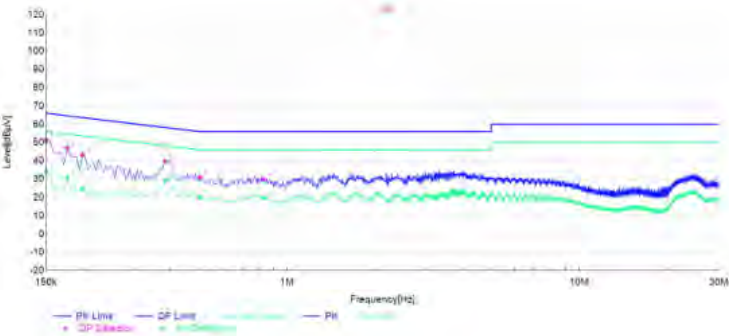

Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	40.92	23.08	10.35	51.27	33.43	66.00	56.00	14.73	22.57	N	PASS
2	0.177	36.95	20.31	10.22	47.17	30.53	64.63	54.63	17.46	24.10	N	PASS
3	0.1995	32.99	14.32	10.15	43.14	24.47	63.63	53.63	20.49	29.16	N	PASS
4	0.384	29.39	19.03	10.15	39.54	29.18	58.19	48.19	18.65	19.01	N	PASS
5	0.5055	20.79	9.86	10.25	31.04	20.11	56.00	46.00	24.96	25.89	N	PASS
6	0.8295	19.69	9.37	10.24	29.93	19.61	56.00	46.00	26.07	26.39	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version B:
Adapter: ADS-65HI-19A-124060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

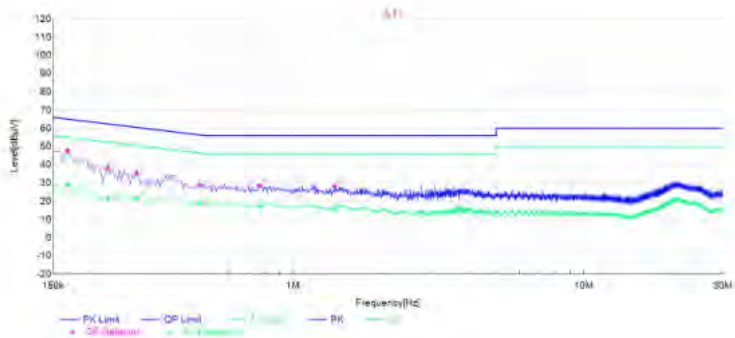

Final Data List


NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.168	37.44	19.12	10.27	47.71	29.39	65.06	55.06	17.35	25.67	L1	PASS
2	0.231	27.94	11.48	10.13	38.07	21.61	62.41	52.41	24.34	30.80	L1	PASS
3	0.2895	25.32	11.66	10.10	35.42	21.76	60.54	50.54	25.12	28.78	L1	PASS
4	0.4785	18.71	9.05	10.24	28.95	19.29	56.37	46.37	27.42	27.08	L1	PASS
5	0.7665	18.43	6.73	10.24	28.67	16.97	56.00	46.00	27.33	29.03	L1	PASS
6	1.3875	17.84	4.97	10.23	28.07	15.20	56.00	46.00	27.93	30.80	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

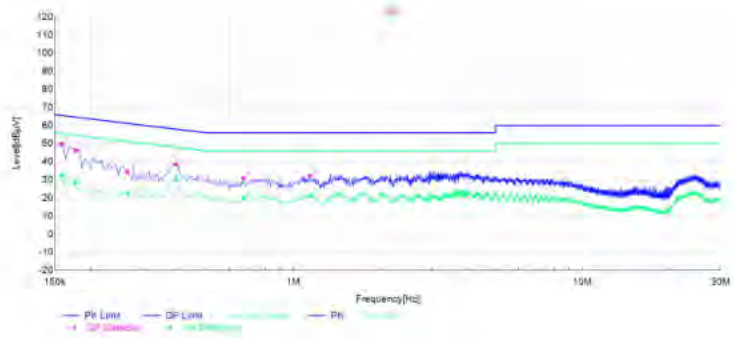

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.159	39.43	22.28	10.31	49.74	32.59	65.52	55.52	15.78	22.93	N	PASS
2	0.177	35.93	18.17	10.22	46.15	28.39	64.63	54.63	18.48	26.24	N	PASS
3	0.267	24.28	12.77	10.11	34.39	22.88	61.21	51.21	26.82	28.33	N	PASS
4	0.393	28.41	20.13	10.16	38.57	30.29	58.00	48.00	19.43	17.71	N	PASS
5	0.672	20.69	9.81	10.21	30.90	20.02	56.00	46.00	25.10	25.98	N	PASS
6	1.1445	21.85	11.28	10.21	32.06	21.49	56.00	46.00	23.94	24.51	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

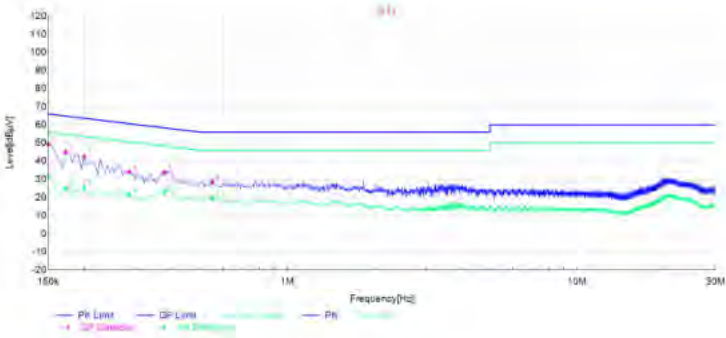


Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	38.94	21.76	10.35	49.29	32.11	66.00	56.00	16.71	23.89	L1	PASS
2	0.1725	34.68	14.66	10.24	44.92	24.90	64.84	54.84	19.92	29.94	L1	PASS
3	0.1995	31.97	15.80	10.15	42.12	25.95	63.63	53.63	21.51	27.68	L1	PASS
4	0.285	24.05	11.52	10.10	34.15	21.62	60.67	50.67	26.52	29.05	L1	PASS
5	0.3795	23.64	13.15	10.15	33.79	23.30	58.29	48.29	24.50	24.99	L1	PASS
6	0.5505	18.40	9.22	10.22	28.62	19.44	56.00	46.00	27.38	26.56	L1	PASS

Note:1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

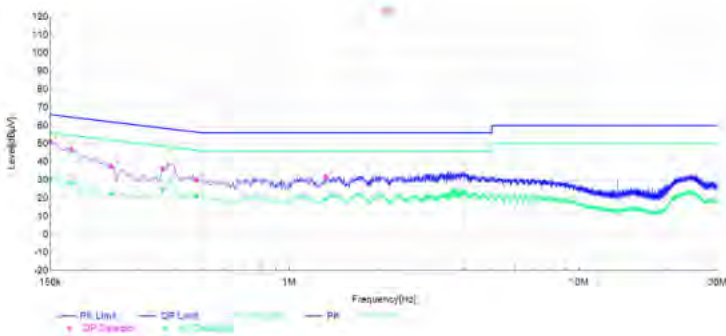

Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	40.70	20.39	10.35	51.05	30.74	66.00	56.00	14.95	25.26	N	PASS
2	0.177	36.25	17.98	10.22	46.47	28.20	64.63	54.63	18.16	26.43	N	PASS
3	0.2445	27.31	12.18	10.13	37.44	22.31	61.94	51.94	24.50	29.63	N	PASS
4	0.366	26.06	14.70	10.14	36.20	24.84	58.59	48.59	22.39	23.75	N	PASS
5	0.4785	19.89	10.92	10.24	30.13	21.16	56.37	46.37	26.24	25.21	N	PASS
6	1.3425	21.45	9.22	10.22	31.67	19.44	56.00	46.00	24.33	26.56	N	PASS


Note:1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version C:
Adapter: ADS-65HI-19A-124060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

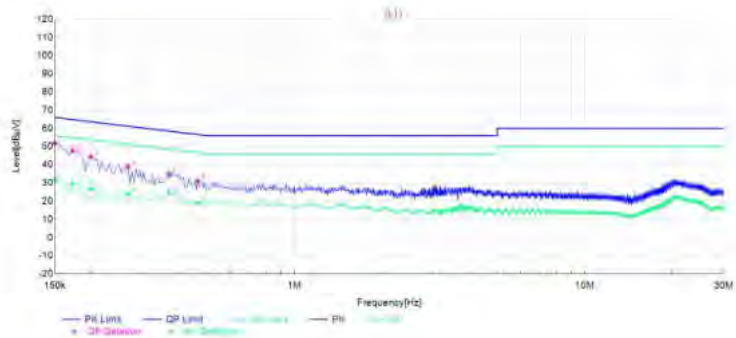

Final Data List


NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	41.57	21.53	10.35	51.92	31.88	66.00	56.00	14.08	24.12	L1	PASS
2	0.1725	37.48	19.58	10.24	47.72	29.82	64.84	54.84	17.12	25.02	L1	PASS
3	0.1995	34.23	16.31	10.15	44.38	26.46	63.63	53.63	19.25	27.17	L1	PASS
4	0.267	28.95	13.88	10.11	39.06	23.99	61.21	51.21	22.15	27.22	L1	PASS
5	0.3705	24.98	14.16	10.14	35.12	24.30	58.49	48.49	23.37	24.19	L1	PASS
6	0.465	20.82	8.50	10.23	31.05	18.73	56.60	46.60	25.55	27.87	L1	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

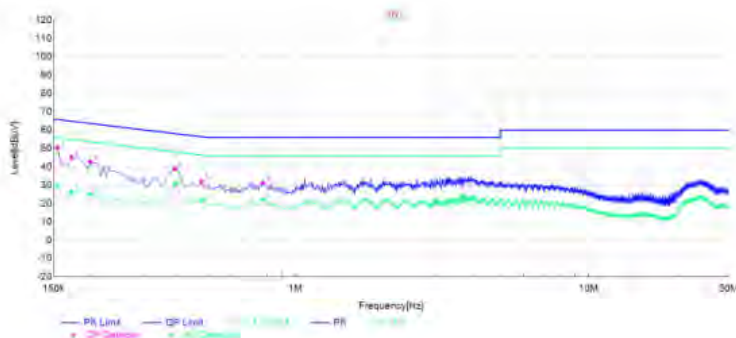

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	40.18	19.81	10.33	50.51	30.14	65.75	55.75	15.24	25.61	N	PASS
2	0.1725	35.04	15.74	10.24	45.28	25.98	64.84	54.84	19.56	28.86	N	PASS
3	0.1995	32.53	14.96	10.15	42.68	25.11	63.63	53.63	20.95	28.52	N	PASS
4	0.3885	28.88	20.63	10.15	39.03	30.78	58.10	48.10	19.07	17.32	N	PASS
5	0.4785	21.70	11.58	10.24	31.94	21.82	56.37	46.37	24.43	24.55	N	PASS
6	0.7755	21.06	12.01	10.25	31.31	22.26	56.00	46.00	24.69	23.74	N	PASS


Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

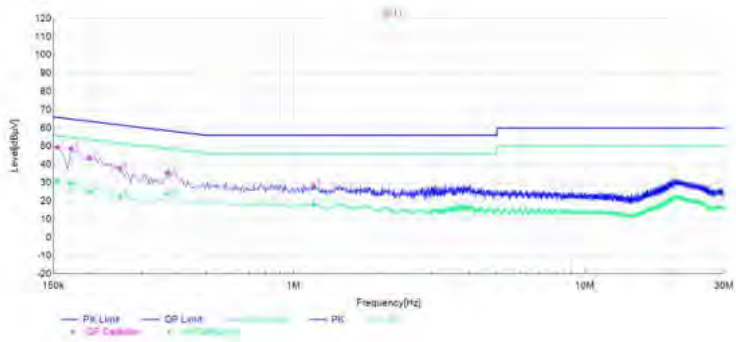

Final Data List


NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	39.07	20.35	10.33	49.40	30.68	65.75	55.75	16.35	25.07	L1	PASS
2	0.1725	38.31	19.54	10.24	48.55	29.78	64.84	54.84	16.29	25.06	L1	PASS
3	0.1995	33.51	14.75	10.15	43.66	24.90	63.63	53.63	19.97	28.73	L1	PASS
4	0.2535	27.81	12.30	10.12	37.93	22.42	61.64	51.64	23.71	29.22	L1	PASS
5	0.3705	25.40	13.62	10.14	35.54	23.76	58.49	48.49	22.95	24.73	L1	PASS
6	1.176	18.12	7.81	10.21	28.33	18.02	56.00	46.00	27.67	27.98	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

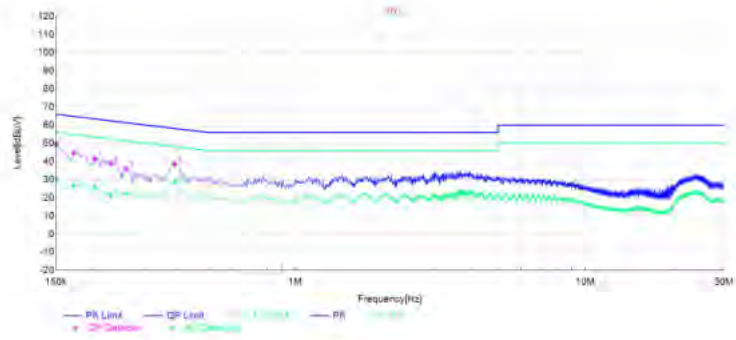

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	39.21	19.95	10.35	49.56	30.30	66.00	56.00	16.44	25.70	N	PASS
2	0.1725	34.51	16.55	10.24	44.75	26.79	64.84	54.84	20.09	28.05	N	PASS
3	0.204	31.51	15.51	10.15	41.66	25.66	63.45	53.45	21.79	27.79	N	PASS
4	0.231	29.10	11.46	10.13	39.23	21.59	62.41	52.41	23.18	30.82	N	PASS
5	0.2625	26.18	12.10	10.12	36.30	22.22	61.35	51.35	25.05	29.13	N	PASS
6	0.384	28.38	18.36	10.15	38.53	28.51	58.19	48.19	19.66	19.68	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version D:
Adapter: ADS-65HI-19A-124060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

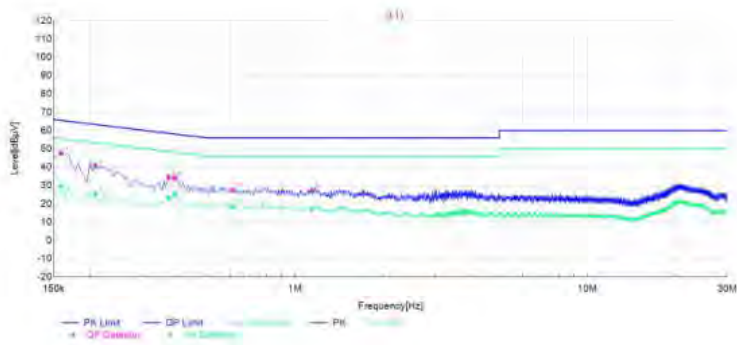


Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.159	37.26	19.46	10.31	47.57	29.77	65.52	55.52	17.95	25.75	L1	PASS
2	0.2085	30.71	15.48	10.15	40.86	25.63	63.26	53.26	22.40	27.63	L1	PASS
3	0.3705	24.48	13.34	10.14	34.62	23.48	58.49	48.49	23.87	25.01	L1	PASS
4	0.3885	24.04	15.07	10.15	34.19	25.22	58.10	48.10	23.91	22.88	L1	PASS
5	0.609	17.23	8.28	10.20	27.43	18.48	56.00	46.00	28.57	27.52	L1	PASS
6	1.1445	17.09	6.70	10.21	27.30	16.91	56.00	46.00	28.70	29.09	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

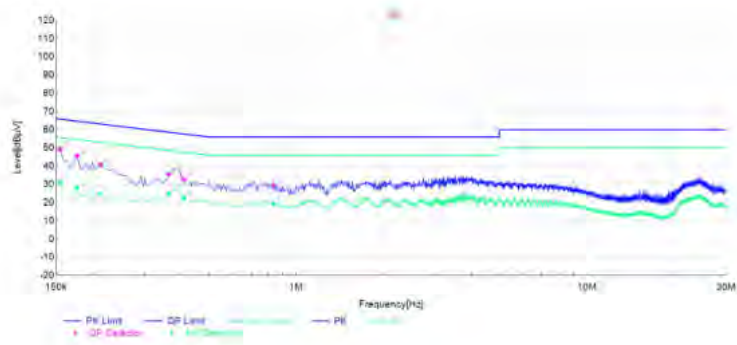

Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	39.08	20.85	10.33	49.41	31.18	65.75	55.75	16.34	24.57	N	PASS
2	0.177	35.48	17.96	10.22	45.70	28.18	64.63	54.63	18.93	26.45	N	PASS
3	0.213	30.68	14.69	10.14	40.82	24.83	63.09	53.09	22.27	28.26	N	PASS
4	0.366	25.40	14.58	10.14	35.54	24.72	58.59	48.59	23.05	23.87	N	PASS
5	0.411	22.64	12.51	10.18	32.82	22.69	57.63	47.63	24.81	24.94	N	PASS
6	0.8385	19.38	8.88	10.24	29.62	19.12	56.00	46.00	26.38	26.88	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

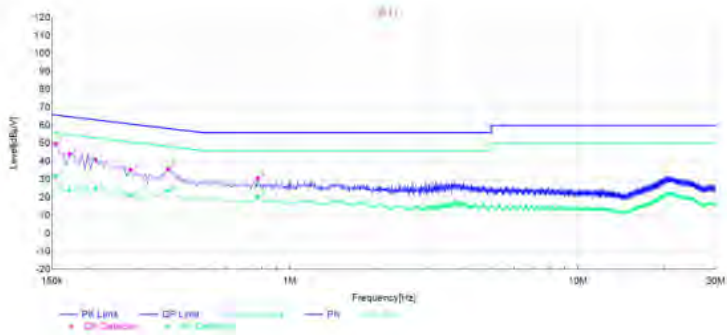

Final Data List


NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	39.50	21.56	10.33	49.83	31.89	65.75	55.75	15.92	23.86	L1	PASS
2	0.1725	33.84	13.66	10.24	44.08	23.90	64.84	54.84	20.76	30.94	L1	PASS
3	0.213	30.72	15.18	10.14	40.86	25.32	63.09	53.09	22.23	27.77	L1	PASS
4	0.2805	25.20	11.30	10.11	35.31	21.41	60.80	50.80	25.49	29.39	L1	PASS
5	0.3795	25.78	13.59	10.15	35.93	23.74	58.29	48.29	22.36	24.55	L1	PASS
6	0.7755	20.33	10.08	10.25	30.58	20.33	56.00	46.00	25.42	25.67	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

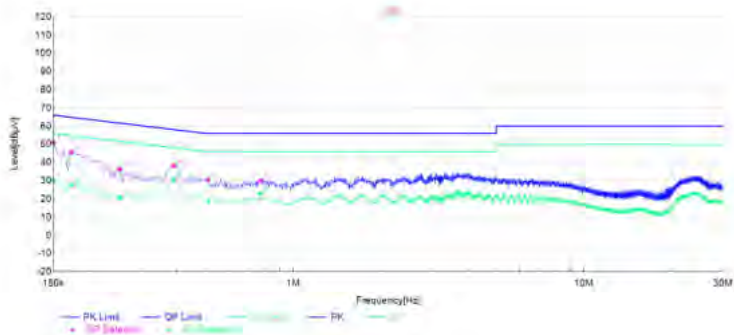

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	40.84	20.02	10.35	51.19	30.37	66.00	56.00	14.81	25.63	N	PASS
2	0.1725	35.43	17.53	10.24	45.67	27.77	64.84	54.84	19.17	27.07	N	PASS
3	0.2535	26.30	10.61	10.12	36.42	20.73	61.64	51.64	25.22	30.91	N	PASS
4	0.3885	28.05	20.62	10.15	38.20	30.77	58.10	48.10	19.90	17.33	N	PASS
5	0.51	20.34	8.57	10.25	30.59	18.82	56.00	46.00	25.41	27.18	N	PASS
6	0.7755	19.79	12.82	10.25	30.04	23.07	56.00	46.00	25.96	22.93	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version E:
Adapter: ADS-65HI-19A-124060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

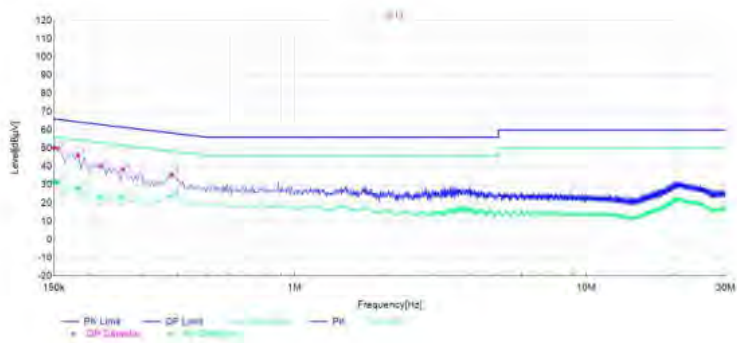

Final Data List


NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	39.80	21.36	10.35	50.15	31.71	66.00	56.00	15.85	24.29	L1	PASS
2	0.1545	39.40	20.73	10.33	49.73	31.06	65.75	55.75	16.02	24.69	L1	PASS
3	0.1815	36.00	17.98	10.20	46.20	28.18	64.42	54.42	18.22	26.24	L1	PASS
4	0.2175	30.17	12.85	10.14	40.31	22.99	62.91	52.91	22.60	29.92	L1	PASS
5	0.258	28.19	12.86	10.12	38.31	22.98	61.50	51.50	23.19	28.52	L1	PASS
6	0.3795	25.52	13.44	10.15	35.67	23.59	58.29	48.29	22.62	24.70	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

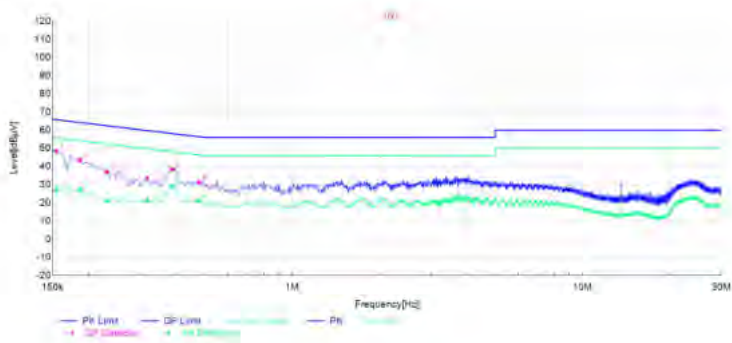

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	37.99	16.56	10.33	48.32	26.89	65.75	55.75	17.43	28.86	N	PASS
2	0.186	33.34	17.27	10.18	43.52	27.45	64.21	54.21	20.69	26.76	N	PASS
3	0.231	26.96	10.65	10.13	37.09	20.78	62.41	52.41	25.32	31.63	N	PASS
4	0.3165	23.20	11.13	10.11	33.31	21.24	59.80	49.80	26.49	28.56	N	PASS
5	0.3885	28.24	18.93	10.15	38.39	29.08	58.10	48.10	19.71	19.02	N	PASS
6	0.4785	21.14	11.05	10.24	31.38	21.29	56.37	46.37	24.99	25.08	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

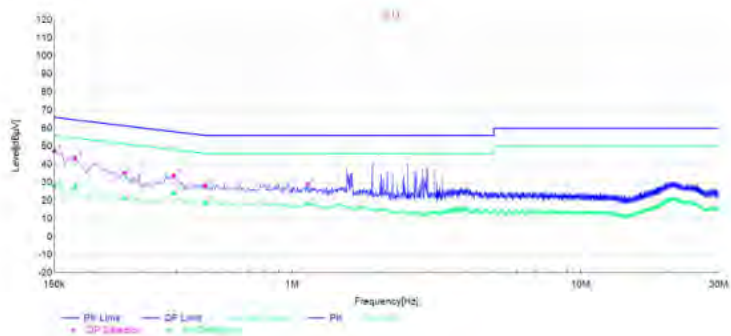

Final Data List


NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	36.93	17.62	10.35	47.28	27.97	66.00	56.00	18.72	28.03	L1	PASS
2	0.177	33.37	16.99	10.22	43.59	27.21	64.63	54.63	21.04	27.42	L1	PASS
3	0.2625	25.17	11.27	10.12	35.29	21.39	61.35	51.35	26.06	29.96	L1	PASS
4	0.3885	23.68	13.91	10.15	33.83	24.06	58.10	48.10	24.27	24.04	L1	PASS
5	0.501	18.01	8.45	10.25	28.26	18.70	56.00	46.00	27.74	27.30	L1	PASS
6	1.1355	18.67	8.26	10.21	28.88	18.47	56.00	46.00	27.12	27.53	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph


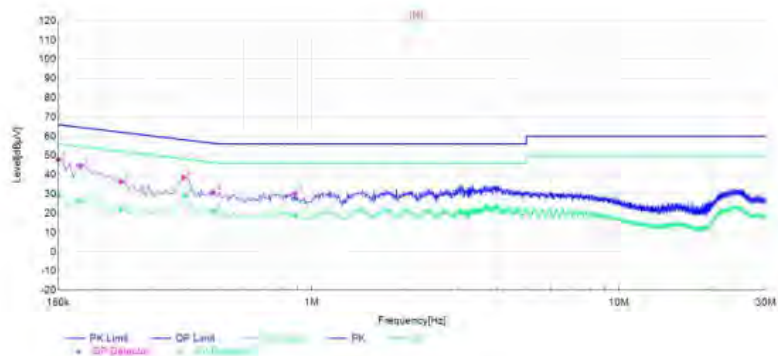


Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	37.52	18.91	10.35	47.87	29.26	66.00	56.00	18.13	26.74	N	PASS
2	0.177	34.26	16.32	10.22	44.48	26.54	64.63	54.63	20.15	28.09	N	PASS
3	0.24	26.14	12.04	10.13	36.27	22.17	62.10	52.10	25.83	29.93	N	PASS
4	0.384	28.49	19.00	10.15	38.64	29.15	58.19	48.19	19.55	19.04	N	PASS
5	0.4785	20.74	10.78	10.24	30.98	21.02	56.37	46.37	25.39	25.35	N	PASS
6	0.8835	20.01	8.25	10.23	30.24	18.48	56.00	46.00	25.76	27.52	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).


Version F:
Adapter: ADS-65HI-19A-124060F

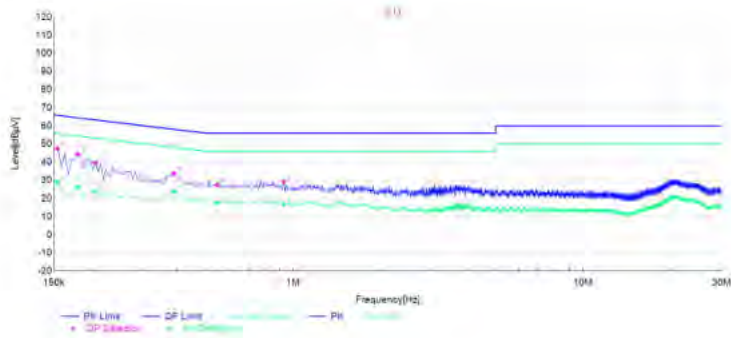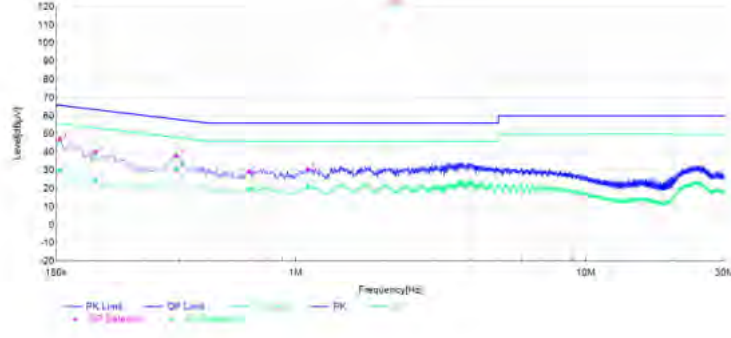Power supply:	AC 120V/60Hz	Polarization	L																																																																																																			
<div>Test Graph</div> <div></div> <div>Final Data List</div> <table><tr><th rowspan="2">NO.</th><th rowspan="2">Frequency</th><th>QP</th><th>AVG.</th><th rowspan="2">Factor</th><th>QP</th><th>AVG.</th><th>QP</th><th>AVG.</th><th>QP</th><th>AVG.</th><th rowspan="2">Line</th><th rowspan="2">Remark</th></tr><tr><th>Reading</th><th>Reading</th><th>Result</th><th>Result</th><th>Limit</th><th>Limit</th><th>Margin</th><th>Margin</th></tr><tr><td>1</td><td>0.1545</td><td>37.23</td><td>18.64</td><td>10.33</td><td>47.56</td><td>28.97</td><td>65.75</td><td>55.75</td><td>18.19</td><td>26.78</td><td>L1</td><td>PASS</td></tr><tr><td>2</td><td>0.1815</td><td>34.25</td><td>15.90</td><td>10.20</td><td>44.45</td><td>26.10</td><td>64.42</td><td>54.42</td><td>19.97</td><td>28.32</td><td>L1</td><td>PASS</td></tr><tr><td>3</td><td>0.2085</td><td>29.52</td><td>14.08</td><td>10.15</td><td>39.67</td><td>24.23</td><td>63.26</td><td>53.26</td><td>23.59</td><td>29.03</td><td>L1</td><td>PASS</td></tr><tr><td>4</td><td>0.3885</td><td>23.65</td><td>13.63</td><td>10.15</td><td>33.80</td><td>23.78</td><td>58.10</td><td>48.10</td><td>24.30</td><td>24.32</td><td>L1</td><td>PASS</td></tr><tr><td>5</td><td>0.5505</td><td>17.13</td><td>7.26</td><td>10.22</td><td>27.35</td><td>17.48</td><td>56.00</td><td>46.00</td><td>28.65</td><td>28.52</td><td>L1</td><td>PASS</td></tr><tr><td>6</td><td>0.9285</td><td>19.00</td><td>6.53</td><td>10.21</td><td>29.21</td><td>16.74</td><td>56.00</td><td>46.00</td><td>26.79</td><td>29.26</td><td>L1</td><td>PASS</td></tr></table> <div>Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).</div> <div>2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).</div>				NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark	Reading	Reading	Result	Result	Limit	Limit	Margin	Margin	1	0.1545	37.23	18.64	10.33	47.56	28.97	65.75	55.75	18.19	26.78	L1	PASS	2	0.1815	34.25	15.90	10.20	44.45	26.10	64.42	54.42	19.97	28.32	L1	PASS	3	0.2085	29.52	14.08	10.15	39.67	24.23	63.26	53.26	23.59	29.03	L1	PASS	4	0.3885	23.65	13.63	10.15	33.80	23.78	58.10	48.10	24.30	24.32	L1	PASS	5	0.5505	17.13	7.26	10.22	27.35	17.48	56.00	46.00	28.65	28.52	L1	PASS	6	0.9285	19.00	6.53	10.21	29.21	16.74	56.00	46.00	26.79	29.26	L1	PASS
NO.	Frequency	QP	AVG.			Factor	QP		AVG.	QP	AVG.	QP	AVG.	Line			Remark																																																																																					
		Reading	Reading	Result	Result		Limit	Limit	Margin	Margin																																																																																												
1	0.1545	37.23	18.64	10.33	47.56	28.97	65.75	55.75	18.19	26.78	L1	PASS																																																																																										
2	0.1815	34.25	15.90	10.20	44.45	26.10	64.42	54.42	19.97	28.32	L1	PASS																																																																																										
3	0.2085	29.52	14.08	10.15	39.67	24.23	63.26	53.26	23.59	29.03	L1	PASS																																																																																										
4	0.3885	23.65	13.63	10.15	33.80	23.78	58.10	48.10	24.30	24.32	L1	PASS																																																																																										
5	0.5505	17.13	7.26	10.22	27.35	17.48	56.00	46.00	28.65	28.52	L1	PASS																																																																																										
6	0.9285	19.00	6.53	10.21	29.21	16.74	56.00	46.00	26.79	29.26	L1	PASS																																																																																										
Power supply:	AC 120V/60Hz	Polarization	N																																																																																																			
<div>Test Graph</div> <div></div> <div>Final Data List</div> <table><tr><th rowspan="2">NO.</th><th rowspan="2">Frequency</th><th>QP</th><th>AVG.</th><th rowspan="2">Factor</th><th>QP</th><th>AVG.</th><th>QP</th><th>AVG.</th><th>QP</th><th>AVG.</th><th rowspan="2">Line</th><th rowspan="2">Remark</th></tr><tr><th>Reading</th><th>Reading</th><th>Result</th><th>Result</th><th>Limit</th><th>Limit</th><th>Margin</th><th>Margin</th></tr><tr><td>1</td><td>0.1545</td><td>36.79</td><td>19.77</td><td>10.33</td><td>47.12</td><td>30.10</td><td>65.75</td><td>55.75</td><td>18.63</td><td>25.65</td><td>N</td><td>PASS</td></tr><tr><td>2</td><td>0.1545</td><td>36.79</td><td>19.77</td><td>10.33</td><td>47.12</td><td>30.10</td><td>65.75</td><td>55.75</td><td>18.63</td><td>25.65</td><td>N</td><td>PASS</td></tr><tr><td>3</td><td>0.204</td><td>29.98</td><td>14.70</td><td>10.15</td><td>40.13</td><td>24.85</td><td>63.45</td><td>53.45</td><td>23.32</td><td>28.60</td><td>N</td><td>PASS</td></tr><tr><td>4</td><td>0.3885</td><td>27.85</td><td>20.65</td><td>10.15</td><td>38.00</td><td>30.80</td><td>58.10</td><td>48.10</td><td>20.10</td><td>17.30</td><td>N</td><td>PASS</td></tr><tr><td>5</td><td>0.6945</td><td>19.18</td><td>9.48</td><td>10.22</td><td>29.40</td><td>19.70</td><td>56.00</td><td>46.00</td><td>26.60</td><td>26.30</td><td>N</td><td>PASS</td></tr><tr><td>6</td><td>1.104</td><td>20.27</td><td>10.83</td><td>10.21</td><td>30.48</td><td>21.04</td><td>56.00</td><td>46.00</td><td>25.52</td><td>24.96</td><td>N</td><td>PASS</td></tr></table> <div>Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).</div> <div>2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).</div>				NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark	Reading	Reading	Result	Result	Limit	Limit	Margin	Margin	1	0.1545	36.79	19.77	10.33	47.12	30.10	65.75	55.75	18.63	25.65	N	PASS	2	0.1545	36.79	19.77	10.33	47.12	30.10	65.75	55.75	18.63	25.65	N	PASS	3	0.204	29.98	14.70	10.15	40.13	24.85	63.45	53.45	23.32	28.60	N	PASS	4	0.3885	27.85	20.65	10.15	38.00	30.80	58.10	48.10	20.10	17.30	N	PASS	5	0.6945	19.18	9.48	10.22	29.40	19.70	56.00	46.00	26.60	26.30	N	PASS	6	1.104	20.27	10.83	10.21	30.48	21.04	56.00	46.00	25.52	24.96	N	PASS
NO.	Frequency	QP	AVG.			Factor	QP		AVG.	QP	AVG.	QP	AVG.	Line			Remark																																																																																					
		Reading	Reading	Result	Result		Limit	Limit	Margin	Margin																																																																																												
1	0.1545	36.79	19.77	10.33	47.12	30.10	65.75	55.75	18.63	25.65	N	PASS																																																																																										
2	0.1545	36.79	19.77	10.33	47.12	30.10	65.75	55.75	18.63	25.65	N	PASS																																																																																										
3	0.204	29.98	14.70	10.15	40.13	24.85	63.45	53.45	23.32	28.60	N	PASS																																																																																										
4	0.3885	27.85	20.65	10.15	38.00	30.80	58.10	48.10	20.10	17.30	N	PASS																																																																																										
5	0.6945	19.18	9.48	10.22	29.40	19.70	56.00	46.00	26.60	26.30	N	PASS																																																																																										
6	1.104	20.27	10.83	10.21	30.48	21.04	56.00	46.00	25.52	24.96	N	PASS																																																																																										

Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

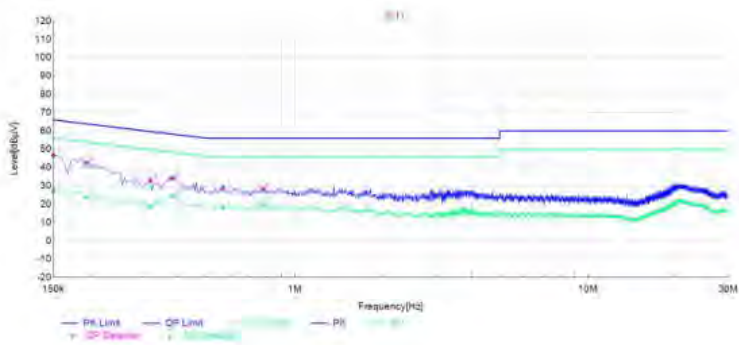

Final Data List


NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	36.33	17.05	10.35	46.68	27.40	66.00	56.00	19.32	28.60	L1	PASS
2	0.195	32.61	13.48	10.16	42.77	23.64	63.82	53.82	21.05	30.18	L1	PASS
3	0.321	22.98	8.45	10.12	33.10	18.57	59.68	49.68	26.58	31.11	L1	PASS
4	0.384	24.13	14.34	10.15	34.28	24.49	58.19	48.19	23.91	23.70	L1	PASS
5	0.5685	18.68	7.82	10.21	28.89	18.03	56.00	46.00	27.11	27.97	L1	PASS
6	0.7755	18.22	9.68	10.25	28.47	19.93	56.00	46.00	27.53	26.07	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

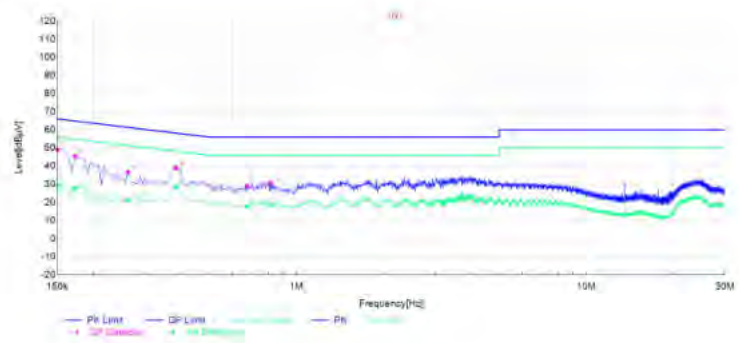

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	38.79	19.08	10.35	49.14	29.43	66.00	56.00	16.86	26.57	N	PASS
2	0.1725	35.16	17.44	10.24	45.40	27.68	64.84	54.84	19.44	27.16	N	PASS
3	0.2625	26.59	11.14	10.12	36.71	21.26	61.35	51.35	24.64	30.09	N	PASS
4	0.384	28.93	18.20	10.15	39.08	28.35	58.19	48.19	19.11	19.84	N	PASS
5	0.6765	18.63	7.50	10.22	28.85	17.72	56.00	46.00	27.15	28.28	N	PASS
6	0.816	20.22	7.96	10.24	30.46	18.20	56.00	46.00	25.54	27.80	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).


2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Note: All modes have been tested and the worst mode is recorded in the report, NFC has two optional antennas, with the worst mode recorded in the report (NFC antenna Model:DS2-52).


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

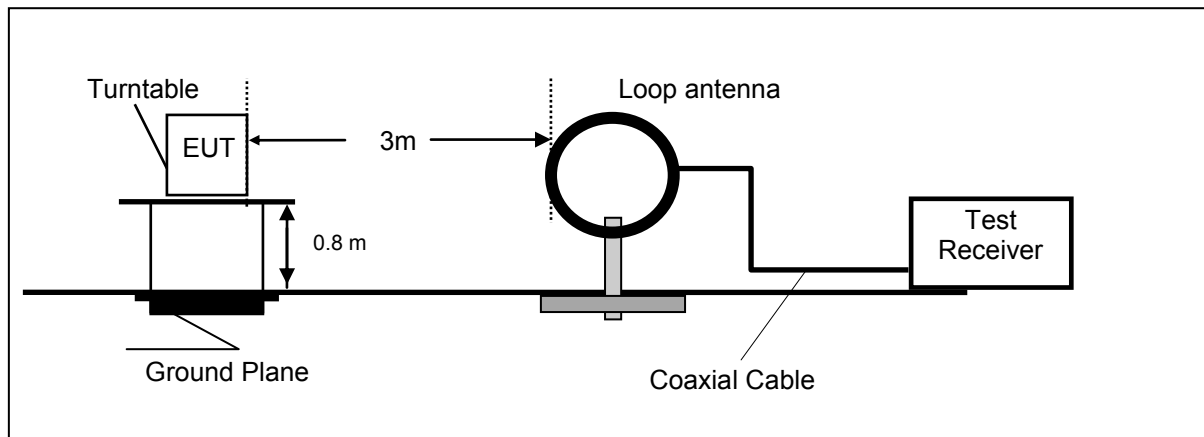

Frequency range 30MHz – 1000MHz

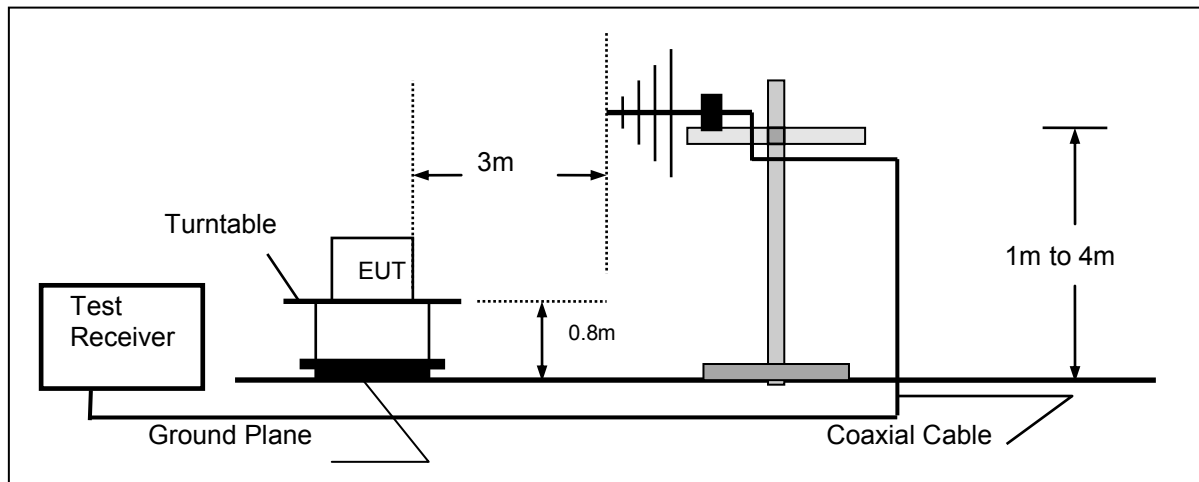

Frequency range above 1GHz-25GHz

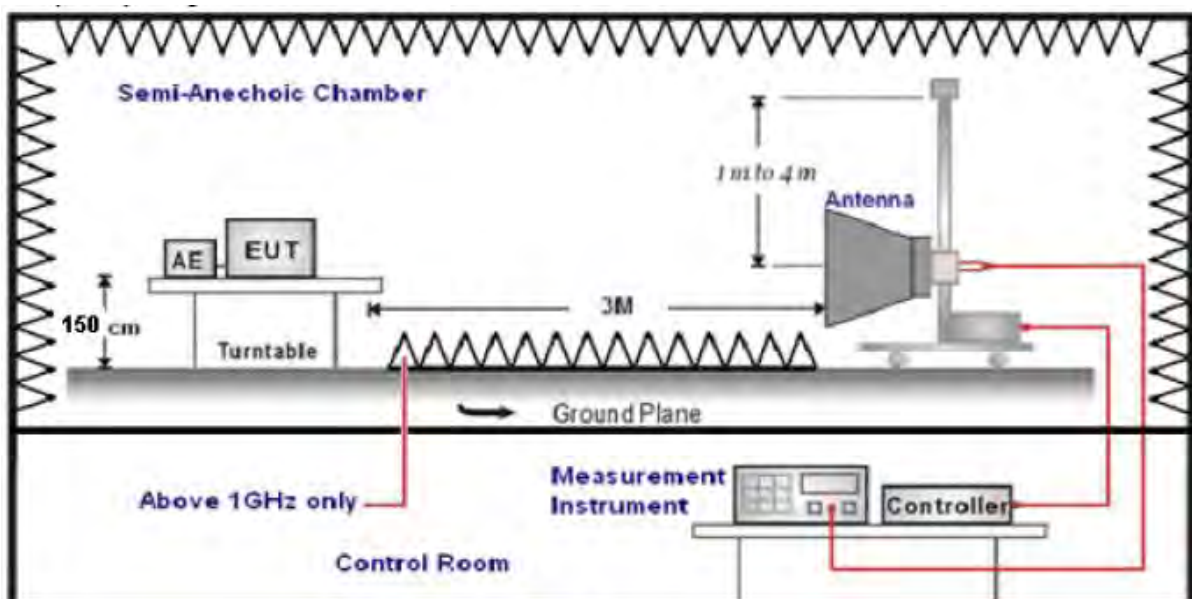

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at GFSK, π/4-DQPSK and 8DPSK mode from 9KHz to 25GHz and recorded worst case at GFSK(1Mbps-MCH) mode.

Temperature	26°C	Humidity	47%
Test Engineer	Evan Ouyang	Configurations	BT

For 9 KHz~30MHz

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);



Limit line = specific limits (dBuV) + distance extrapolation factor.

For 30MHz-1GHz
Version A:

Adapter: ADS-65HI-19A-124060F

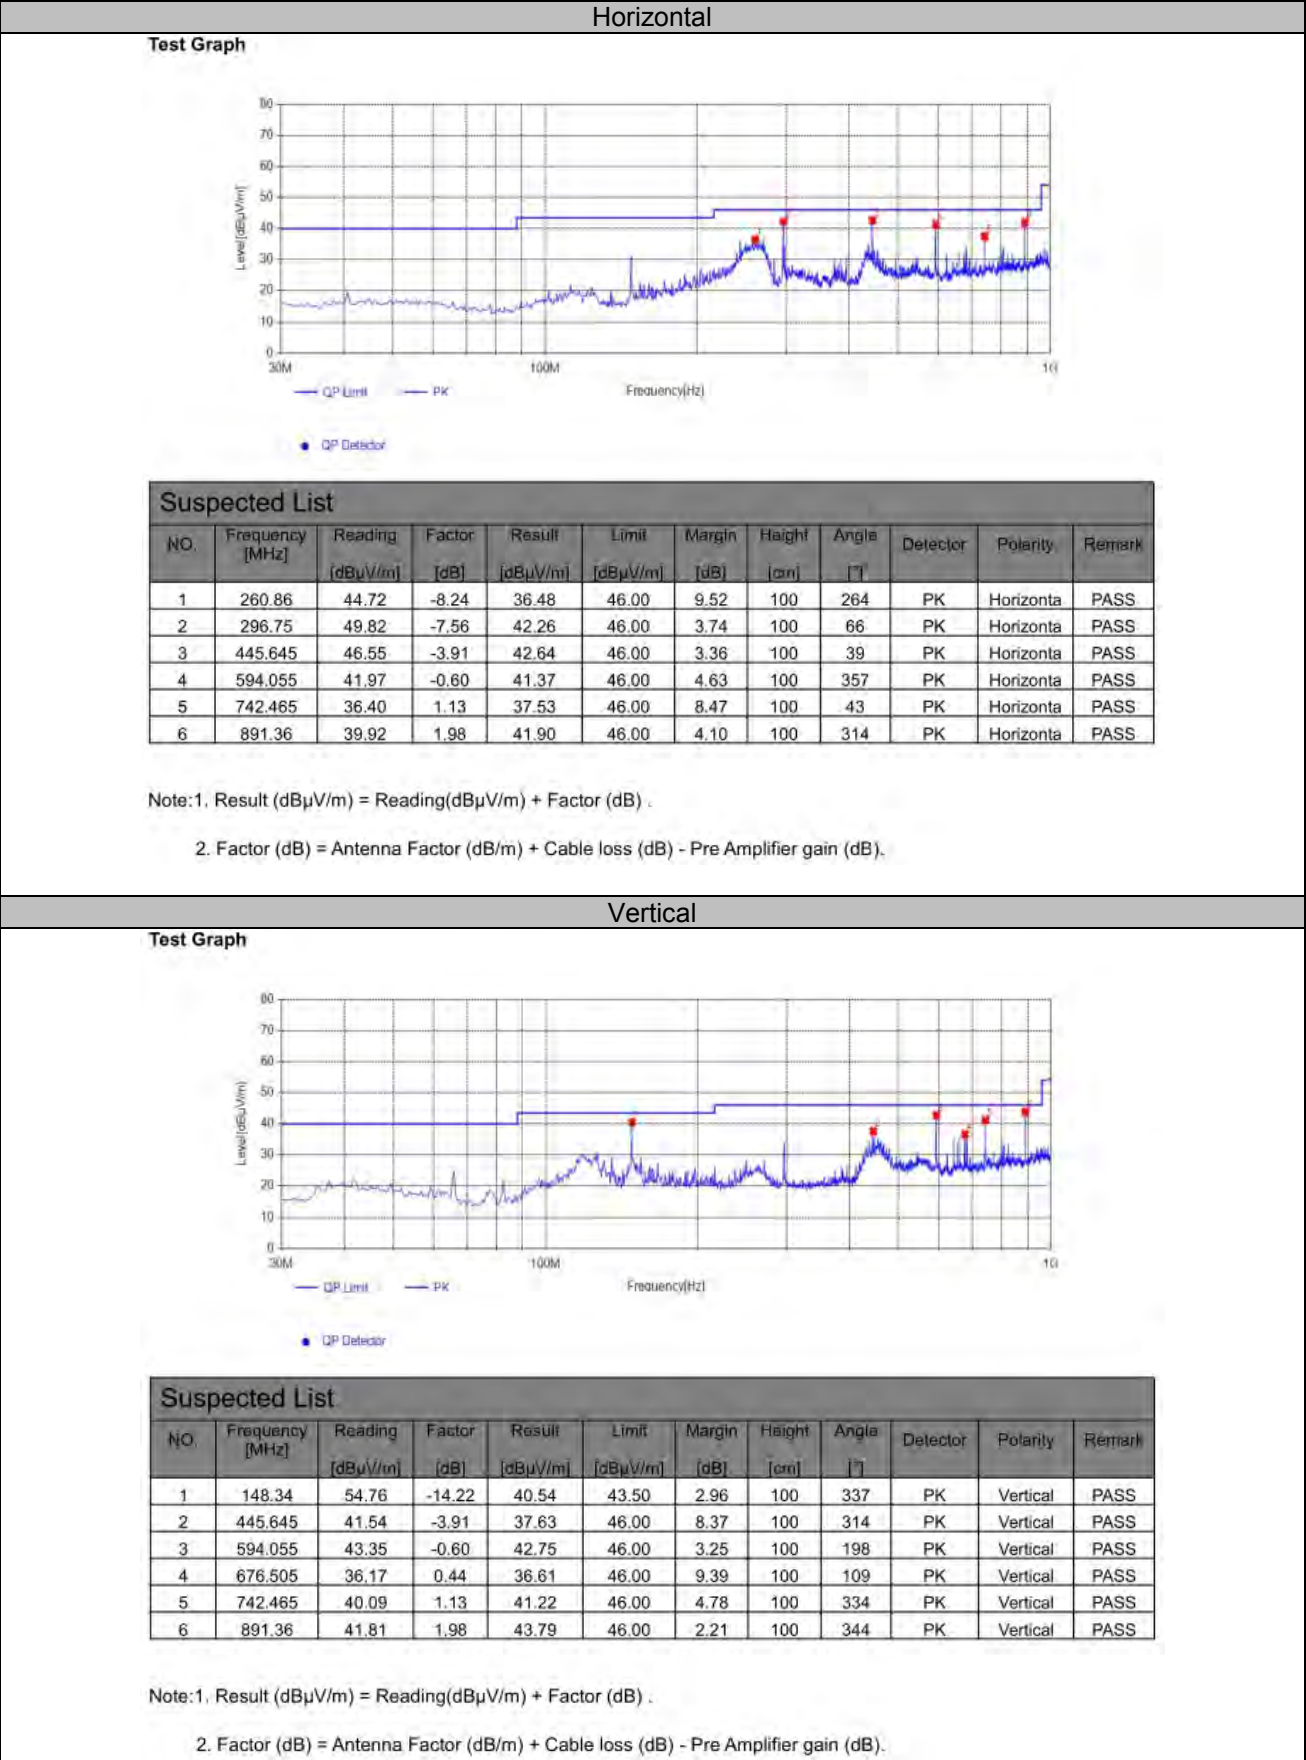

Adapter: CYSE65-240250

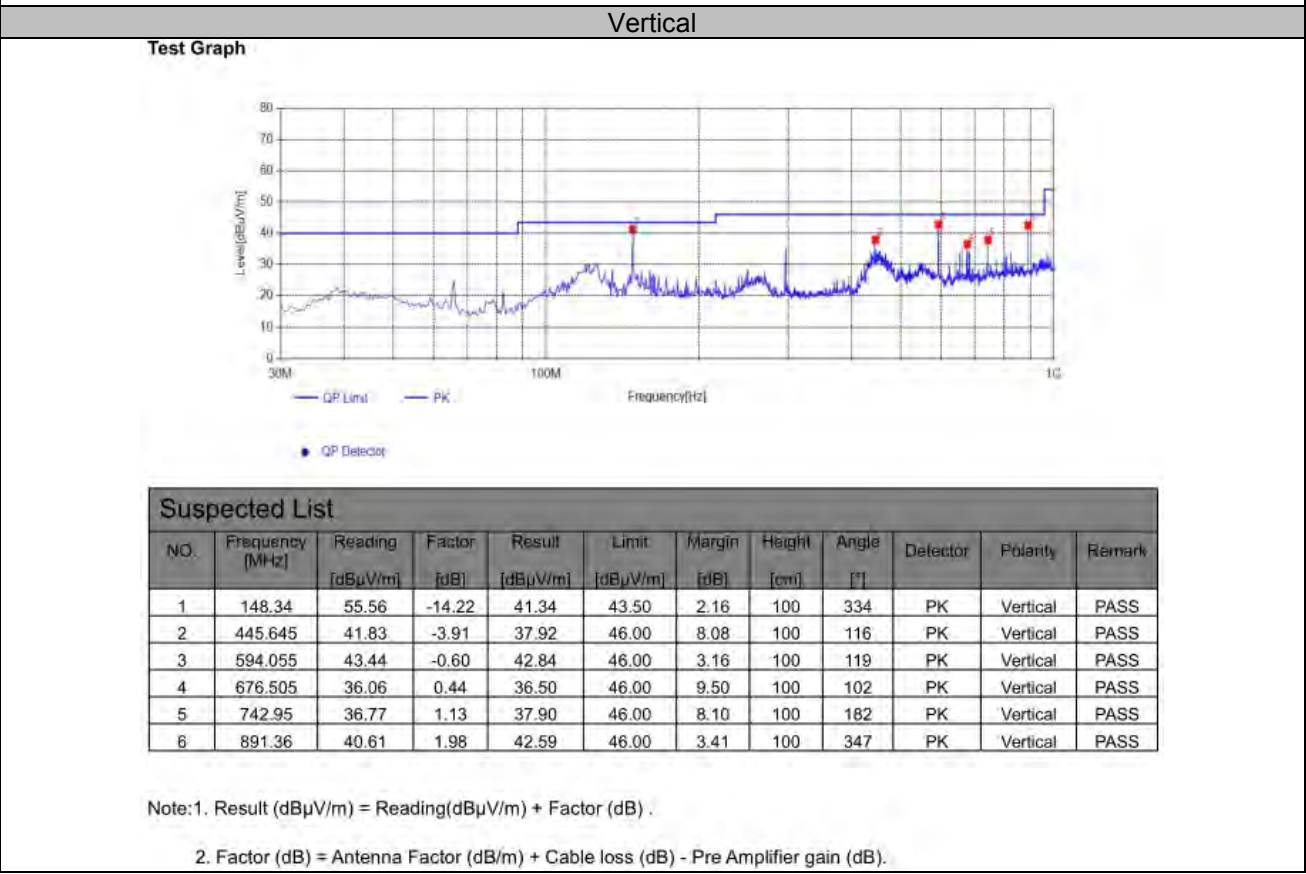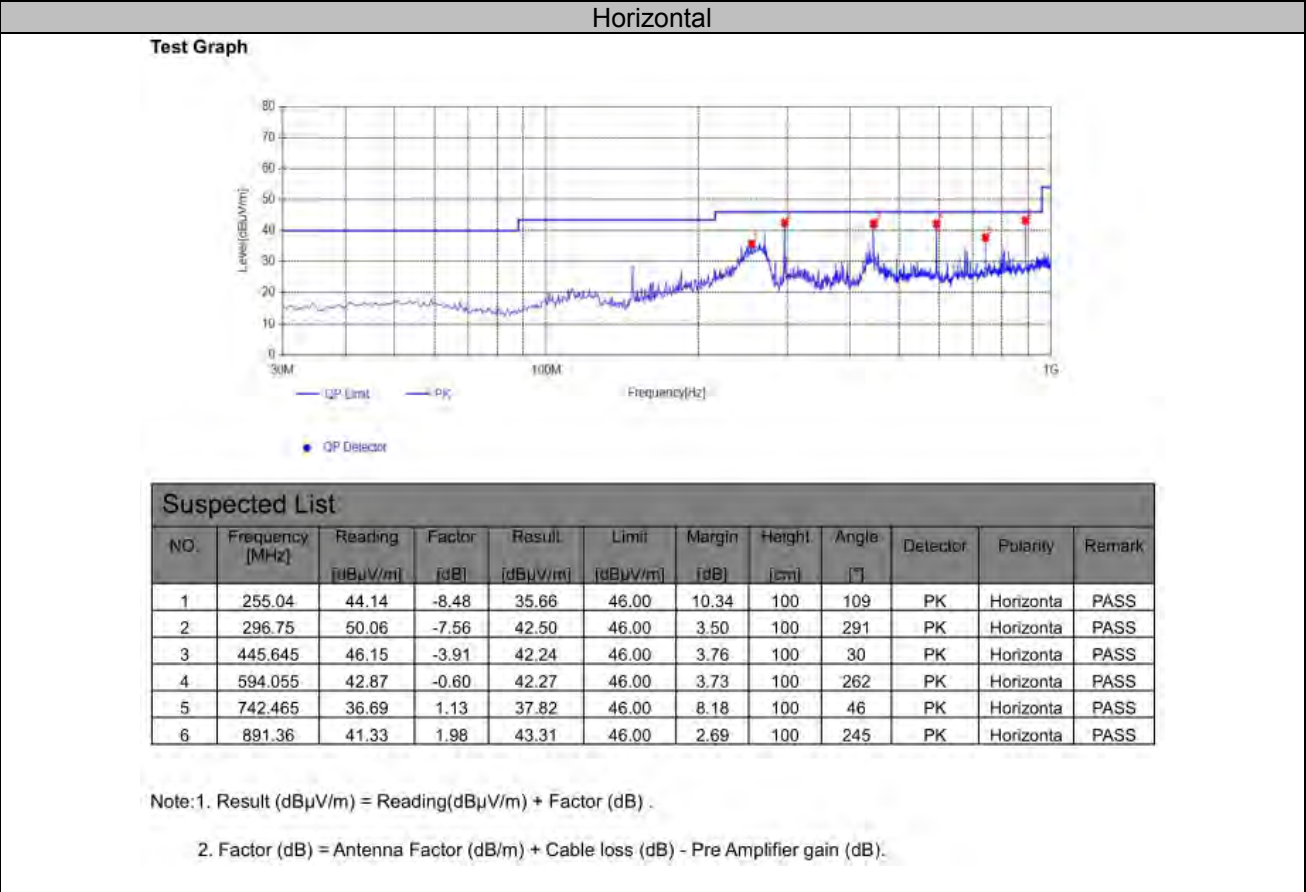


Version B:

Adapter: ADS-65HI-19A-124060F

Horizontal

Test Graph

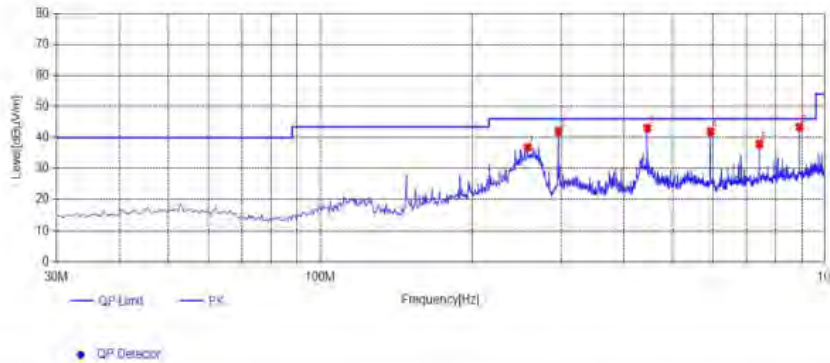

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	257.95	45.26	-8.36	36.90	46.00	9.10	100	102	PK	Horizontal	PASS
2	296.75	49.55	-7.56	41.99	46.00	4.01	100	305	PK	Horizontal	PASS
3	445.645	47.00	-3.91	43.09	46.00	2.91	100	172	PK	Horizontal	PASS
4	594.055	42.53	-0.60	41.93	46.00	4.07	100	222	PK	Horizontal	PASS
5	742.465	36.85	1.13	37.98	46.00	8.02	100	43	PK	Horizontal	PASS
6	891.36	41.48	1.98	43.46	46.00	2.54	100	285	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

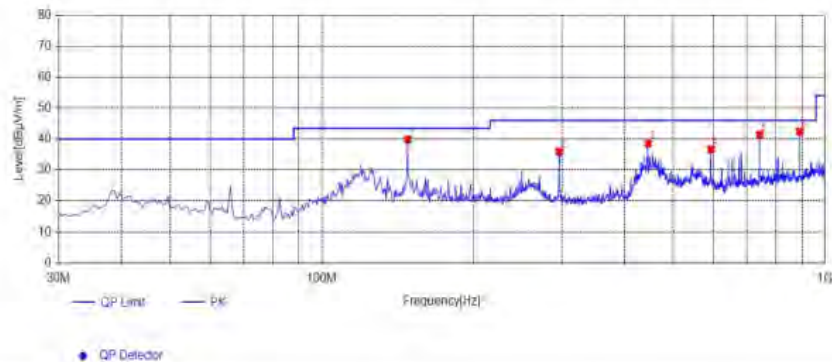


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	148.34	54.13	-14.22	39.91	43.50	3.59	100	350	PK	Vertical	PASS
2	296.75	43.51	-7.56	35.95	46.00	10.05	100	337	PK	Vertical	PASS
3	445.645	42.55	-3.91	38.64	46.00	7.36	100	334	PK	Vertical	PASS
4	594.055	37.30	-0.60	36.70	46.00	9.30	100	358	PK	Vertical	PASS
5	742.465	40.28	1.13	41.41	46.00	4.59	100	171	PK	Vertical	PASS
6	891.36	40.50	1.98	42.48	46.00	3.52	100	99	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250

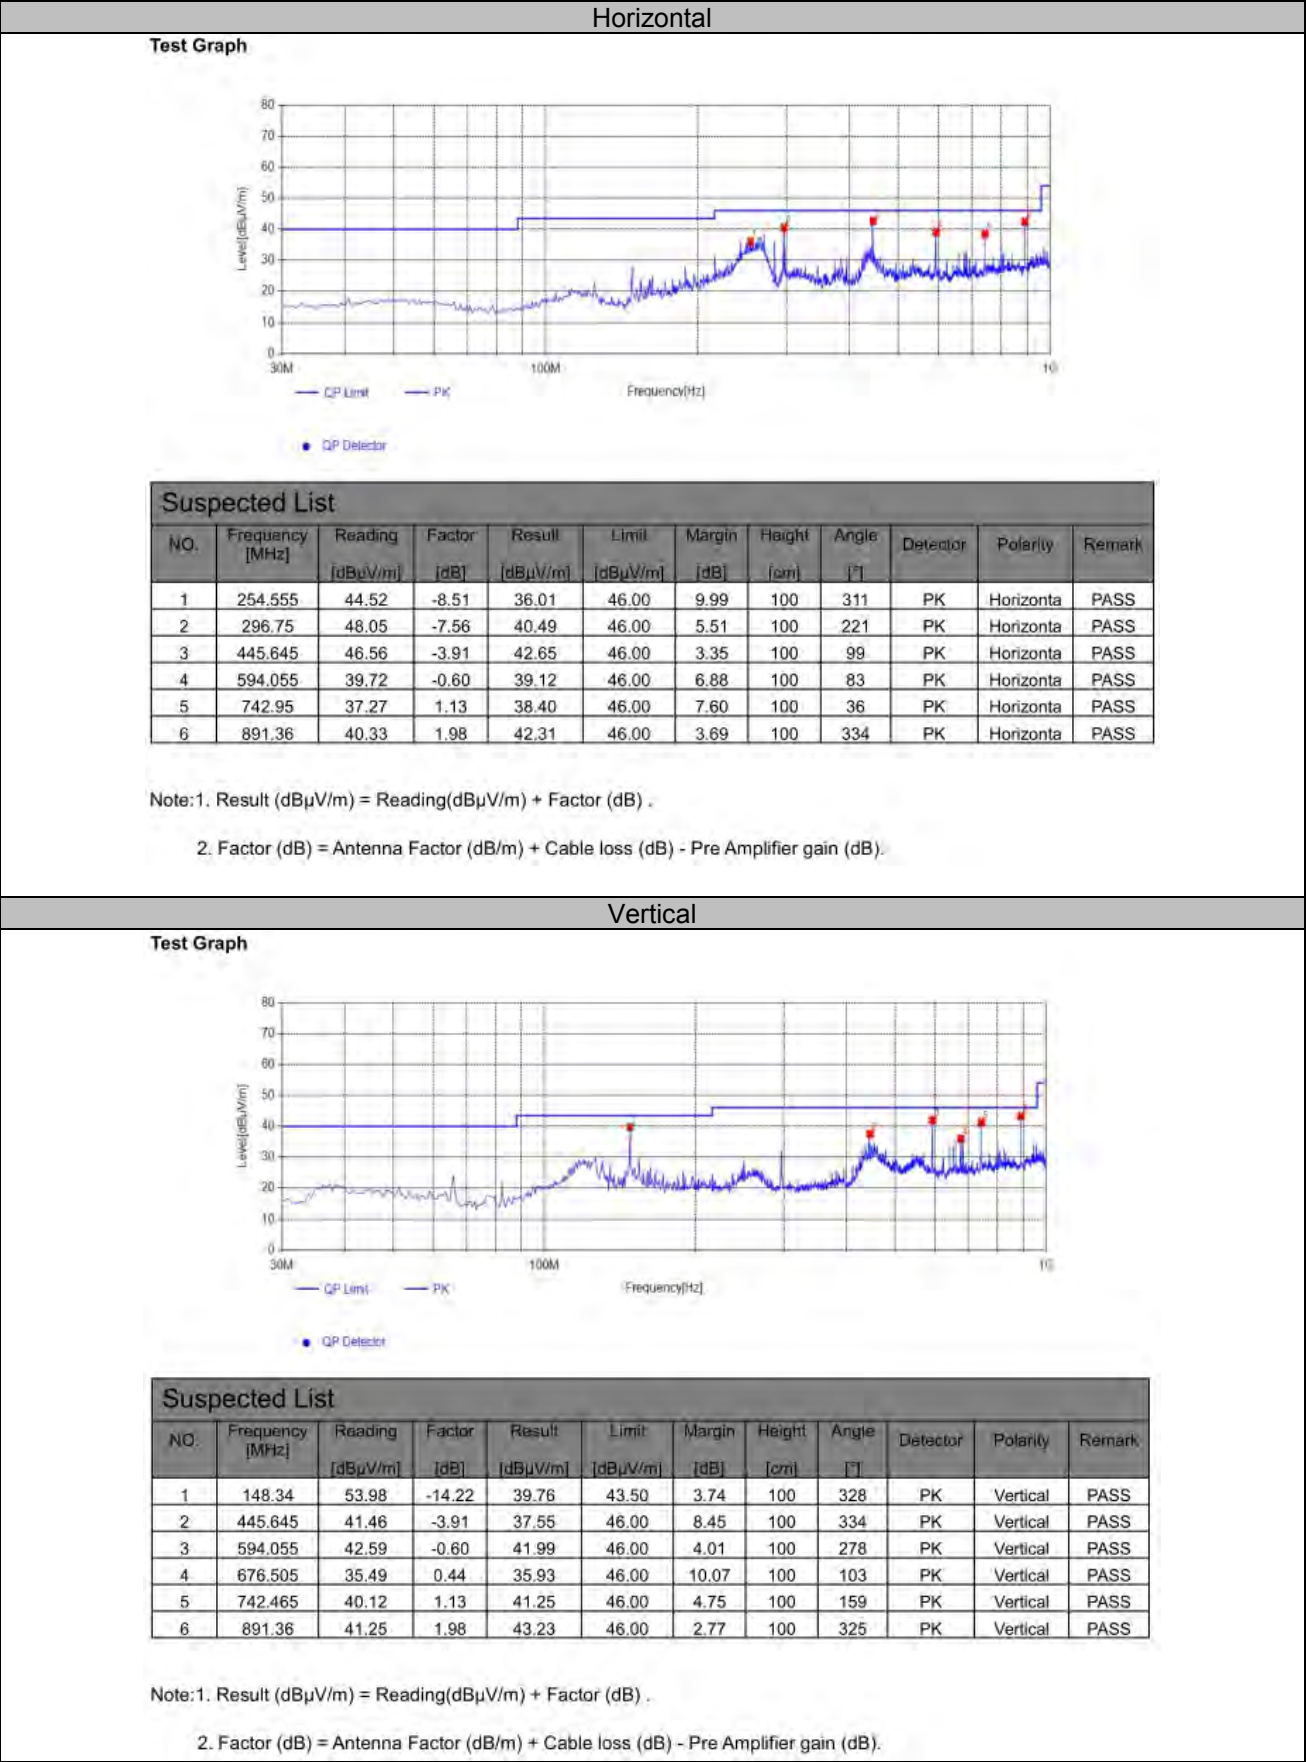


Version C:

Adapter: ADS-65HI-19A-124060F

Horizontal

Test Graph

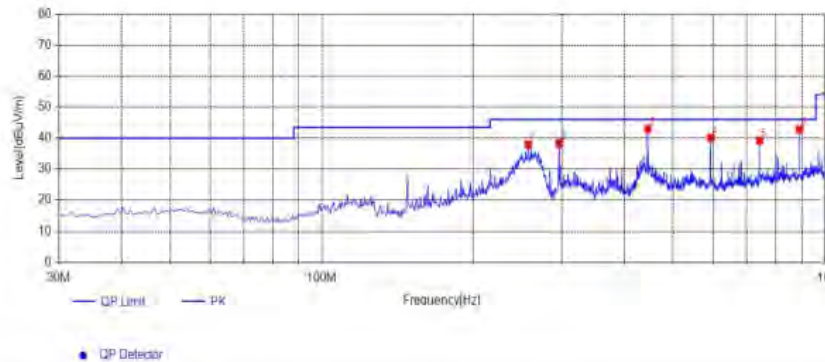

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Haight [cm]	Angle [°]	Detector	Polarity	Remark
1	257.465	46.35	-8.38	37.97	46.00	8.03	100	264	PK	Horizontal	PASS
2	296.75	45.87	-7.56	38.31	46.00	7.69	100	2	PK	Horizontal	PASS
3	445.645	46.95	-3.91	43.04	46.00	2.96	100	360	PK	Horizontal	PASS
4	594.055	40.73	-0.60	40.13	46.00	5.87	100	298	PK	Horizontal	PASS
5	742.465	38.11	1.13	39.24	46.00	6.76	100	49	PK	Horizontal	PASS
6	891.36	40.89	1.98	42.87	46.00	3.13	100	52	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

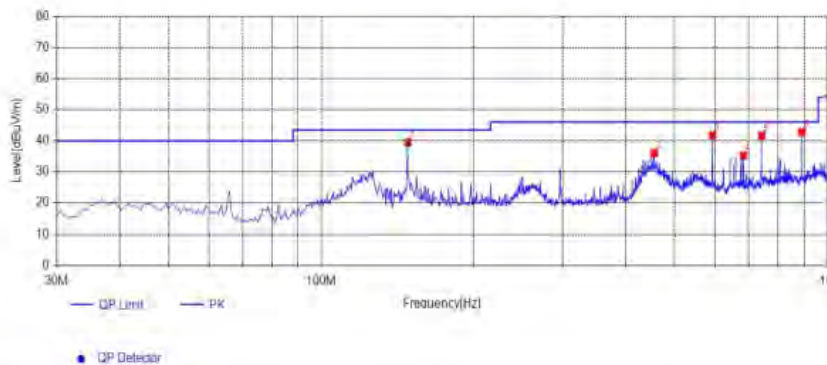



Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Haight [cm]	Angle [°]	Detector	Polarity	Remark
1	148.34	53.74	-14.22	39.52	43.50	3.98	100	327	PK	Vertical	PASS
2	455.345	39.73	-3.71	36.02	46.00	9.98	100	0	PK	Vertical	PASS
3	594.055	42.43	-0.60	41.83	46.00	4.17	100	358	PK	Vertical	PASS
4	683.295	34.84	0.49	35.33	46.00	10.67	100	161	PK	Vertical	PASS
5	742.465	40.56	1.13	41.69	46.00	4.31	100	161	PK	Vertical	PASS
6	891.36	40.86	1.98	42.84	46.00	3.16	100	29	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250

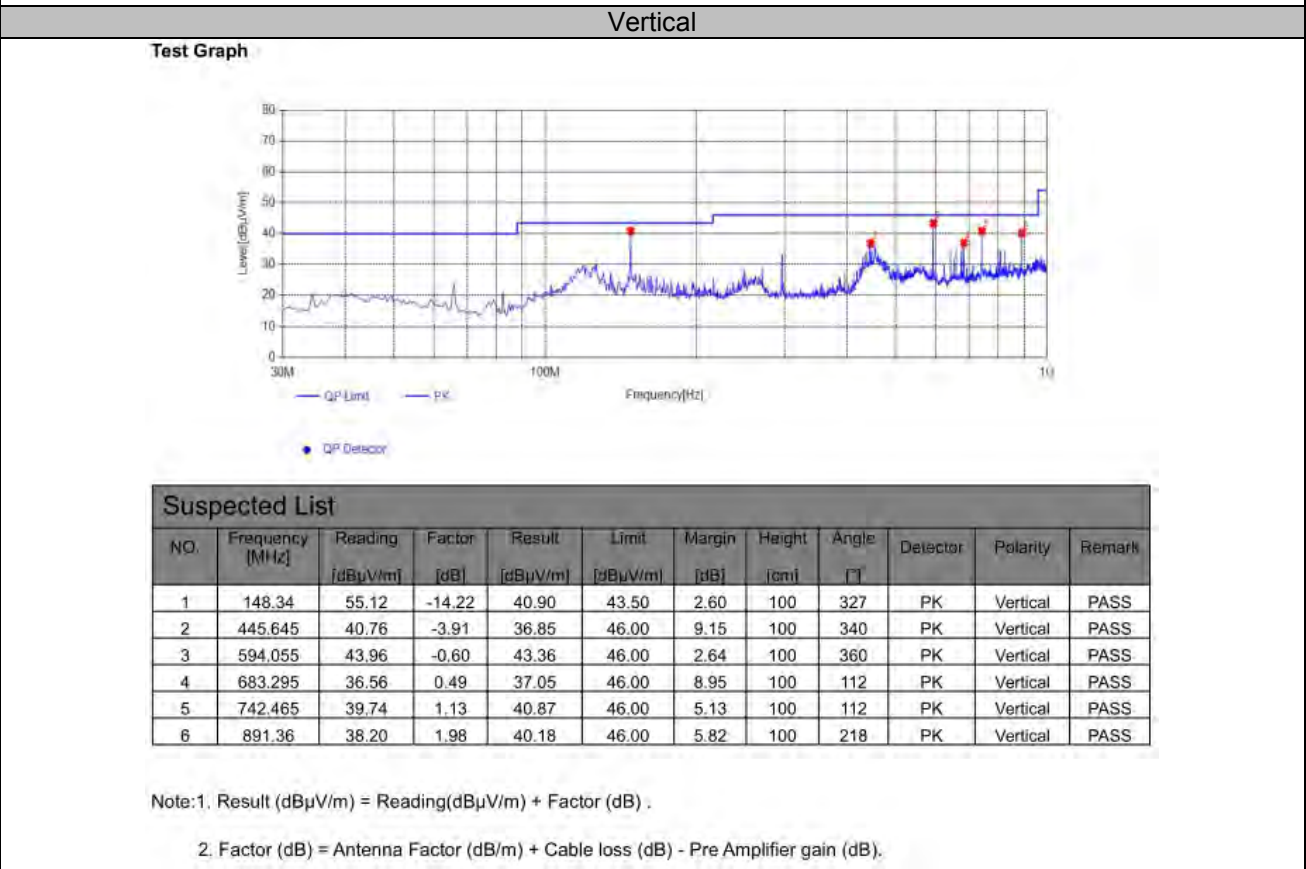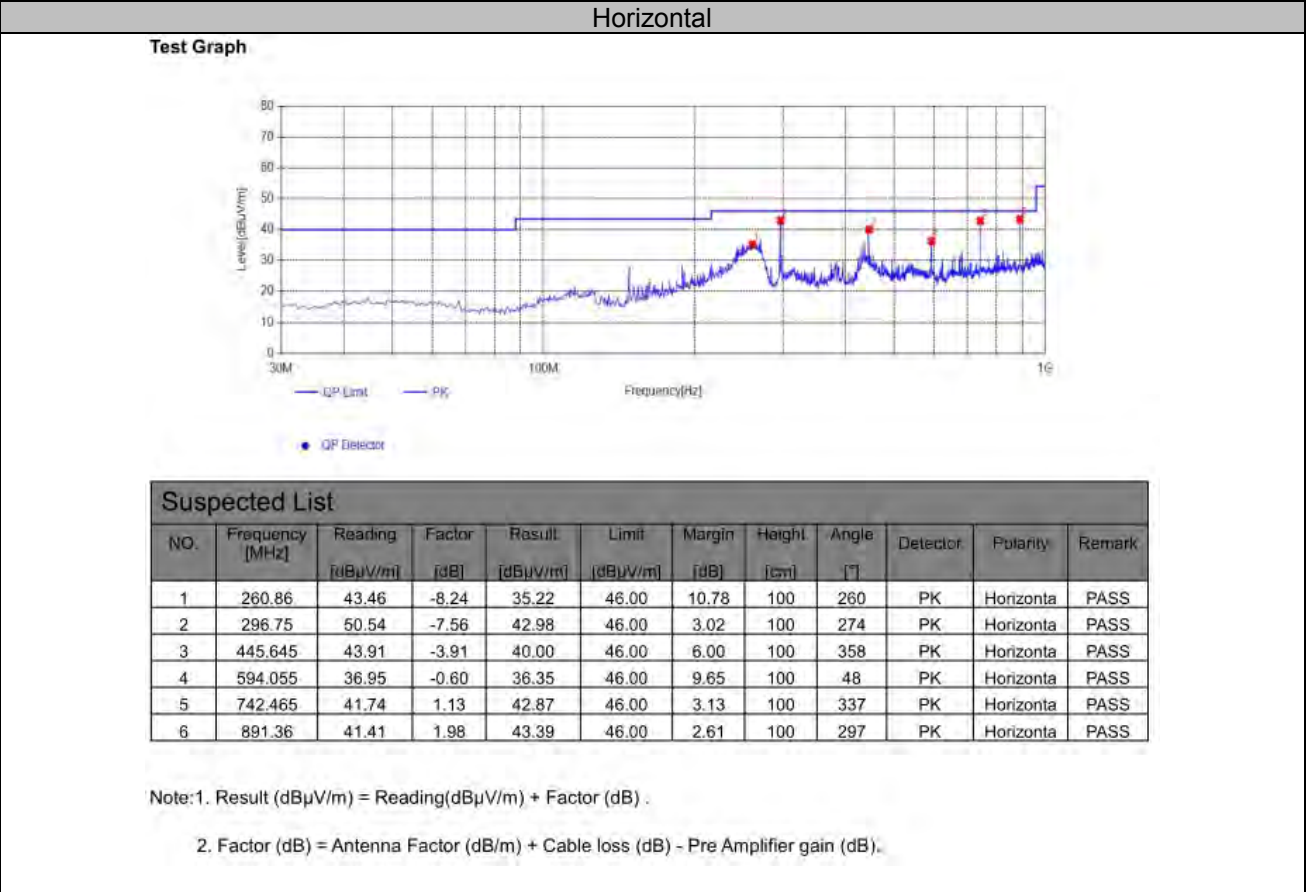


Version D:

Adapter: ADS-65HI-19A-124060F

Horizontal

Test Graph

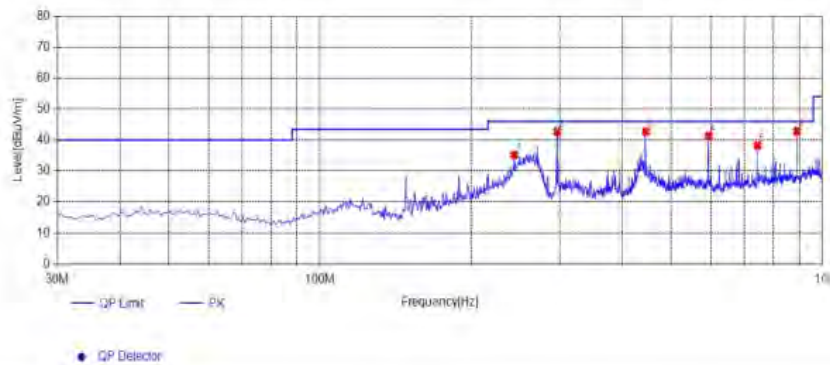

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	243.885	44.19	-8.96	35.23	46.00	10.77	100	69	PK	Horizontal	PASS
2	296.75	50.30	-7.56	42.74	46.00	3.26	100	308	PK	Horizontal	PASS
3	445.645	46.63	-3.91	42.72	46.00	3.28	100	13	PK	Horizontal	PASS
4	594.055	41.94	-0.60	41.34	46.00	4.66	100	360	PK	Horizontal	PASS
5	742.95	37.07	1.13	38.20	46.00	7.80	100	36	PK	Horizontal	PASS
6	891.36	40.88	1.98	42.86	46.00	3.14	100	46	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

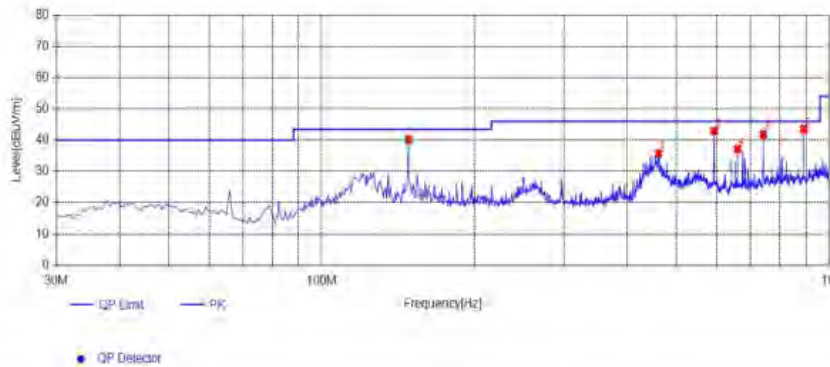



Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	148.34	54.43	-14.22	40.21	43.50	3.29	100	337	PK	Vertical	PASS
2	461.165	39.36	-3.58	35.78	46.00	10.22	100	354	PK	Vertical	PASS
3	594.055	43.62	-0.60	43.02	46.00	2.98	100	344	PK	Vertical	PASS
4	660.015	36.94	0.28	37.22	46.00	8.78	100	122	PK	Vertical	PASS
5	742.465	40.72	1.13	41.85	46.00	4.15	100	172	PK	Vertical	PASS
6	891.36	41.58	1.98	43.56	46.00	2.44	100	136	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250

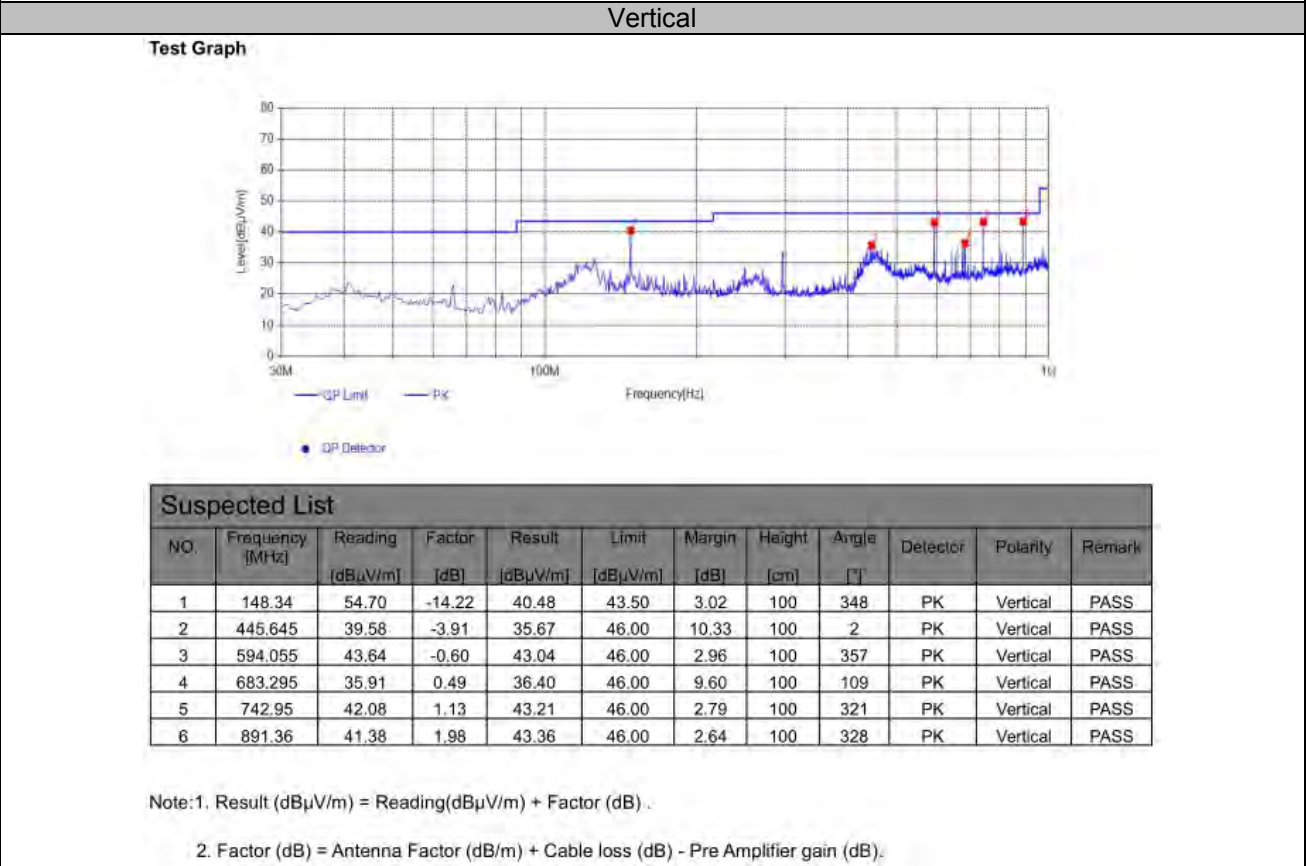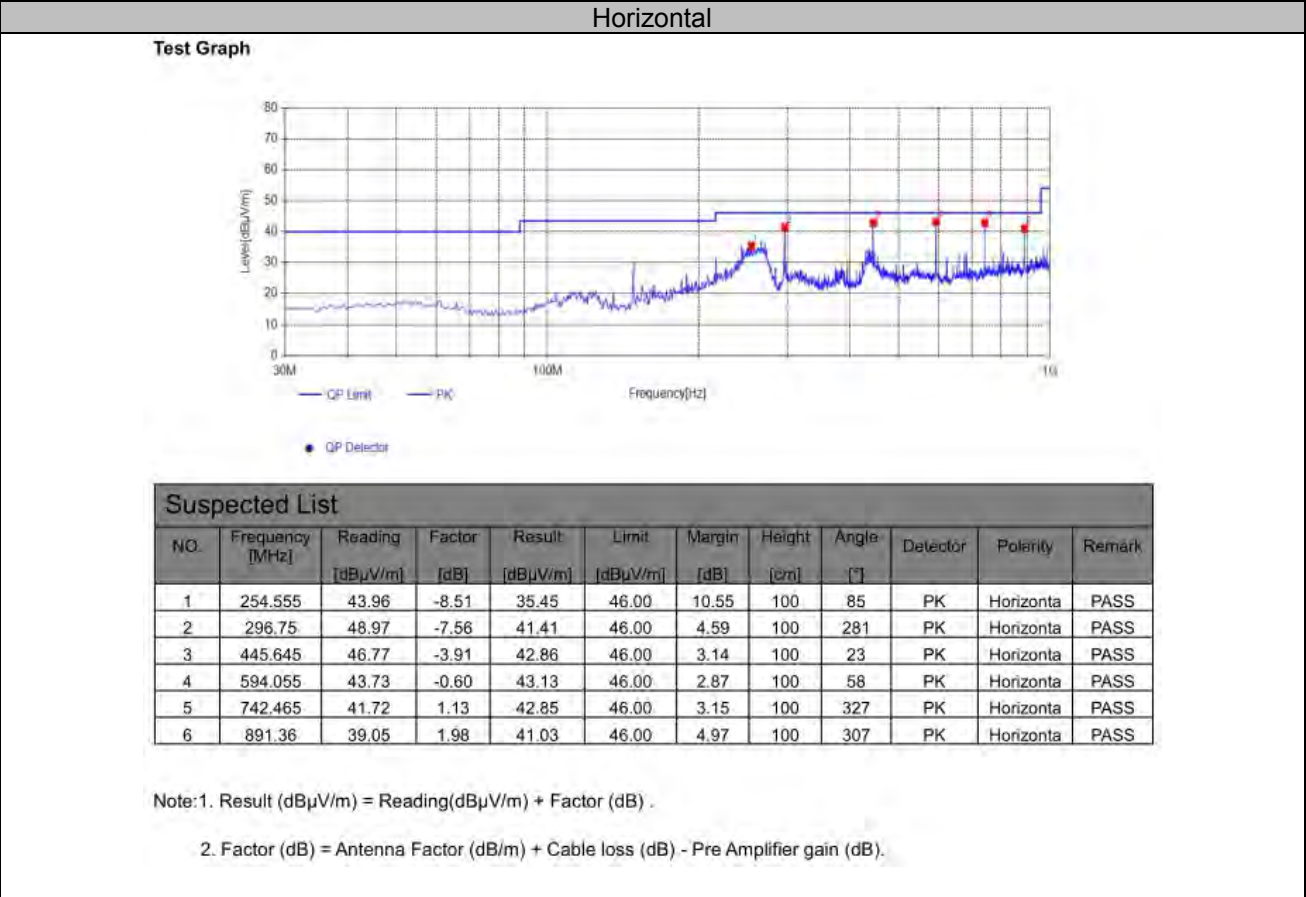


Version E:

Adapter: ADS-65HI-19A-124060F

Horizontal

Test Graph

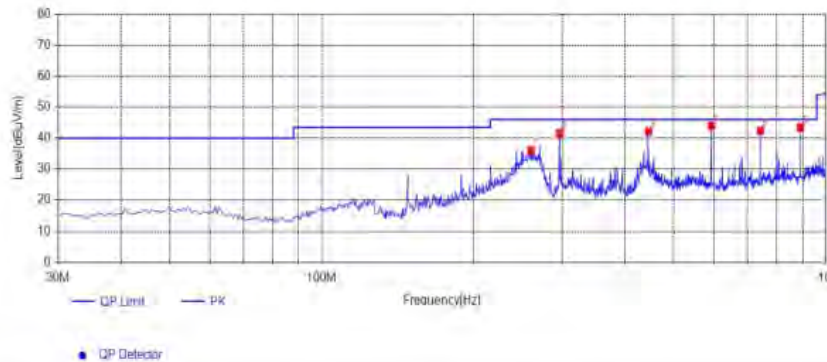

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Haight [cm]	Angle [°]	Detector	Polarity	Remark
1	260.375	44.30	-8.26	36.04	46.00	9.96	100	258	PK	Horizontal	PASS
2	296.75	49.17	-7.56	41.61	46.00	4.39	100	109	PK	Horizontal	PASS
3	445.645	46.06	-3.91	42.15	46.00	3.85	100	155	PK	Horizontal	PASS
4	594.055	44.59	-0.60	43.99	46.00	2.01	100	13	PK	Horizontal	PASS
5	742.465	41.20	1.13	42.33	46.00	3.67	100	245	PK	Horizontal	PASS
6	891.36	41.50	1.98	43.48	46.00	2.52	100	241	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

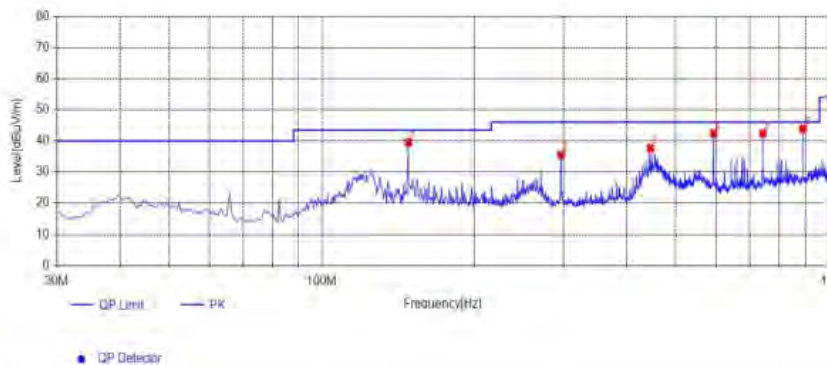


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Haight [cm]	Angle [°]	Detector	Polarity	Remark
1	148.34	53.79	-14.22	39.57	43.50	3.93	100	358	PK	Vertical	PASS
2	296.75	43.15	-7.56	35.59	46.00	10.41	100	340	PK	Vertical	PASS
3	445.645	41.60	-3.91	37.69	46.00	8.31	100	337	PK	Vertical	PASS
4	594.055	42.99	-0.60	42.39	46.00	3.61	100	136	PK	Vertical	PASS
5	742.465	41.22	1.13	42.35	46.00	3.65	100	202	PK	Vertical	PASS
6	891.36	41.92	1.98	43.90	46.00	2.10	100	340	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250

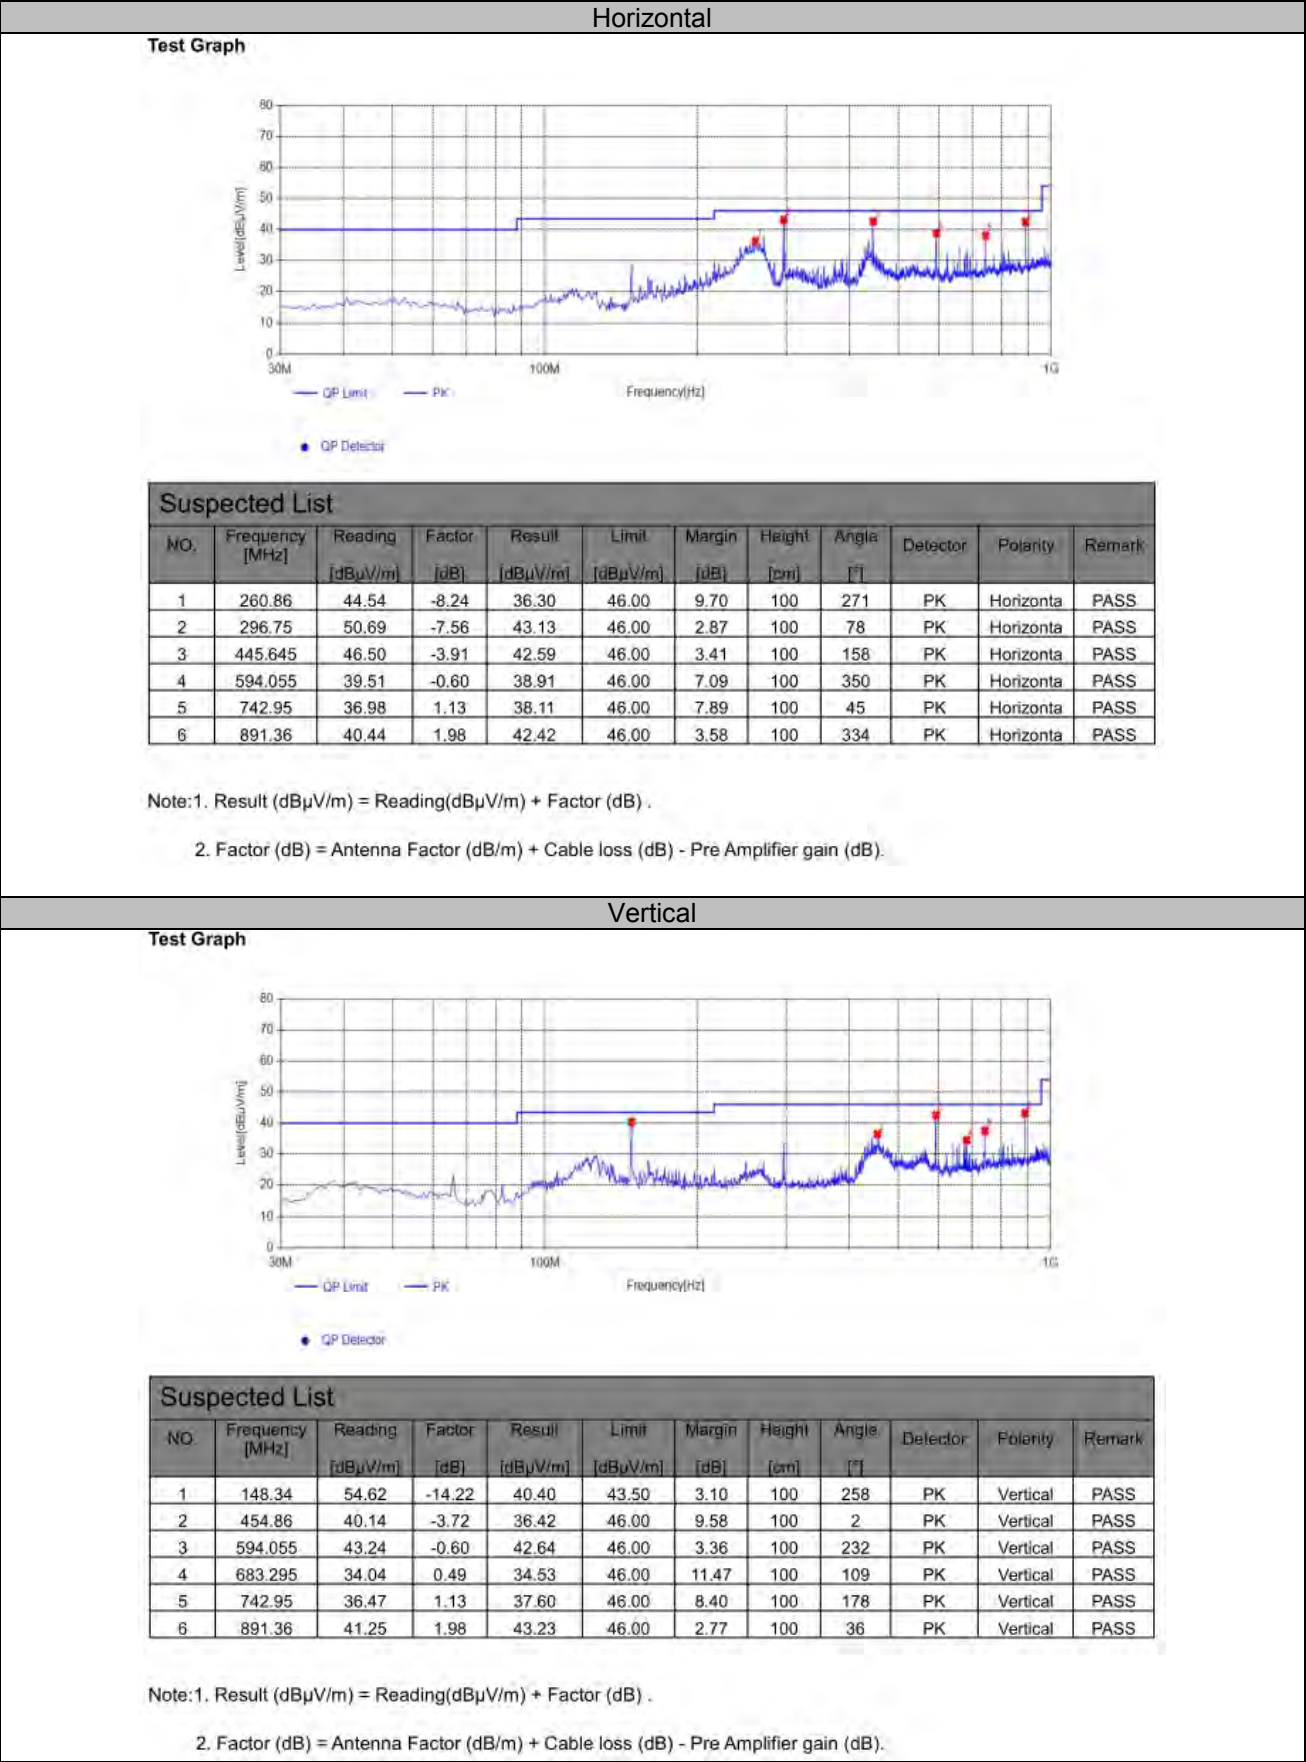


Version F:

Adapter: ADS-65HI-19A-124060F

Horizontal

Test Graph

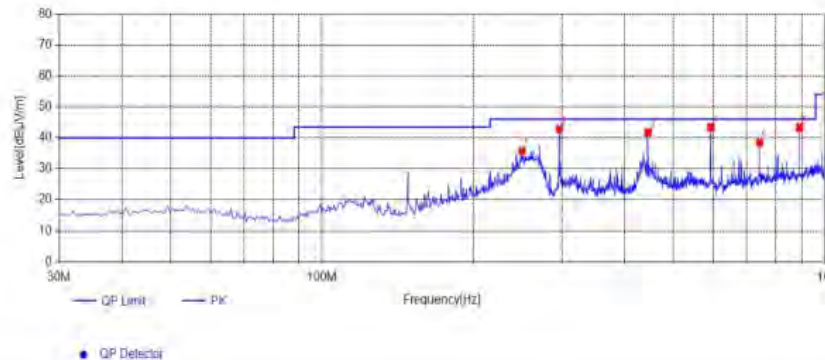

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	250.19	44.46	-8.70	35.76	46.00	10.24	100	132	PK	Horizontal	PASS
2	296.75	50.47	-7.56	42.91	46.00	3.09	100	298	PK	Horizontal	PASS
3	445.645	45.70	-3.91	41.79	46.00	4.21	100	42	PK	Horizontal	PASS
4	594.055	44.03	-0.60	43.43	46.00	2.57	100	56	PK	Horizontal	PASS
5	742.465	37.29	1.13	38.42	46.00	7.58	100	52	PK	Horizontal	PASS
6	891.36	41.29	1.98	43.27	46.00	2.73	100	311	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

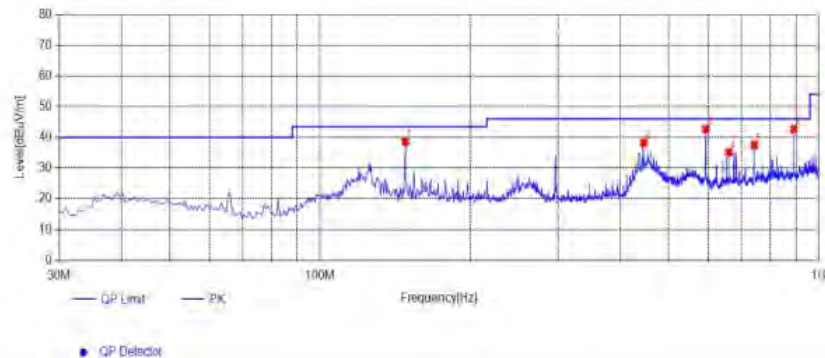

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	148.34	52.87	-14.22	38.65	43.50	4.85	100	268	PK	Vertical	PASS
2	445.645	42.14	-3.91	38.23	46.00	7.77	100	122	PK	Vertical	PASS
3	594.055	43.31	-0.60	42.71	46.00	3.29	100	241	PK	Vertical	PASS
4	660.5	34.92	0.28	35.20	46.00	10.80	100	96	PK	Vertical	PASS
5	742.465	36.40	1.13	37.53	46.00	8.47	100	347	PK	Vertical	PASS
6	891.36	40.73	1.98	42.71	46.00	3.29	100	298	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250

Horizontal

Test Graph

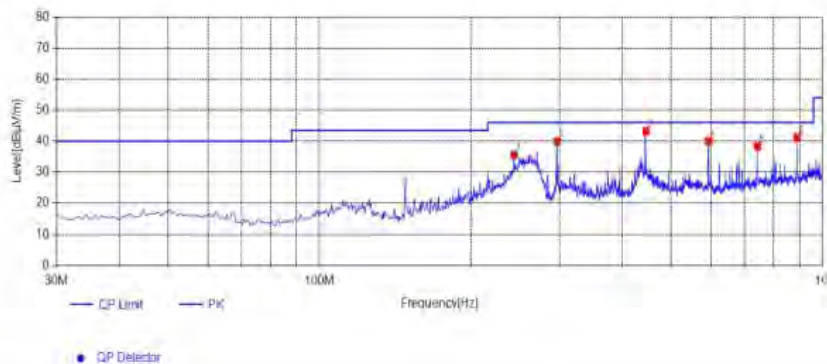

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	243.885	44.59	-8.96	35.63	46.00	10.37	100	267	PK	Horizontal	PASS
2	296.75	47.51	-7.56	39.95	46.00	6.05	100	112	PK	Horizontal	PASS
3	445.645	47.10	-3.91	43.19	46.00	2.81	100	95	PK	Horizontal	PASS
4	594.055	40.58	-0.60	39.98	46.00	6.02	100	211	PK	Horizontal	PASS
5	742.465	37.19	1.13	38.32	46.00	7.68	100	35	PK	Horizontal	PASS
6	891.36	39.26	1.98	41.24	46.00	4.76	100	320	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

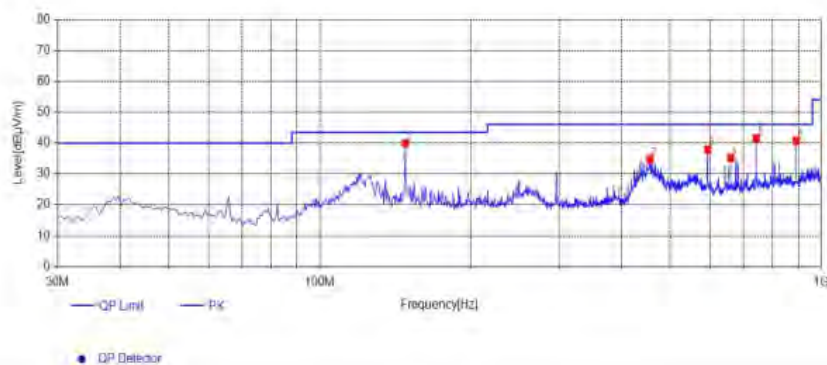

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	148.34	54.27	-14.22	40.05	43.50	3.45	100	347	PK	Vertical	PASS
2	455.345	38.55	-3.71	34.84	46.00	11.16	100	16	PK	Vertical	PASS
3	594.055	38.52	-0.60	37.92	46.00	8.08	100	267	PK	Vertical	PASS
4	660.015	34.91	0.28	35.19	46.00	10.81	100	105	PK	Vertical	PASS
5	742.465	40.50	1.13	41.63	46.00	4.37	100	155	PK	Vertical	PASS
6	891.36	38.74	1.98	40.72	46.00	5.28	100	310	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Note: All modes have been tested and the worst mode is recorded in the report, NFC has two optional antennas, with the worst mode recorded in the report (NFC antenna Model:DS2-52).

For 1GHz to 25GHz

GFSK /Channel 0 / 2402 MHz(Worst Case)

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	50.77	32.44	30.25	7.95	60.91	74.00	-13.09	Peak	Horizontal
4804.00	36.64	32.44	30.25	7.95	46.78	54.00	-7.22	Average	Horizontal
4804.00	50.38	31.60	36.50	7.00	52.48	74.00	-21.52	Peak	Vertical
4804.00	35.78	31.60	36.50	7.00	37.88	54.00	-16.12	Average	Vertical

Channel 39 / 2441 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4882.00	48.99	32.52	30.31	8.12	59.32	74.00	-14.68	Peak	Horizontal
4882.00	37.30	32.52	30.31	8.12	47.63	54.00	-6.37	Average	Horizontal
4882.00	51.22	31.02	36.50	7.60	53.34	74.00	-20.66	Peak	Vertical
4882.00	36.25	31.02	36.50	7.60	38.37	54.00	-15.63	Average	Vertical

Channel 78 / 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	50.69	32.68	30.27	7.88	60.98	74.00	-13.02	Peak	Horizontal
4960.00	36.37	32.68	30.27	7.88	46.66	54.00	-7.34	Average	Horizontal
4960.00	51.23	31.58	36.20	7.82	54.43	74.00	-19.57	Peak	Vertical
4960.00	38.85	31.58	36.20	7.82	42.05	54.00	-11.95	Average	Vertical

Note: All modes were tested and the worst mode was recorded in the report (version A_Adapter: ADS-65HI-19A-124060F_NFC antenna Model:DS2-52).

GFSK /Channel 0 / 2402 MHz(Worst Case)

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	50.84	32.44	30.25	7.95	60.98	74.00	-13.02	Peak	Horizontal
4804.00	34.95	32.44	30.25	7.95	45.09	54.00	-8.91	Average	Horizontal
4804.00	51.08	31.60	36.50	7.00	53.18	74.00	-20.82	Peak	Vertical
4804.00	36.65	31.60	36.50	7.00	38.75	54.00	-15.25	Average	Vertical

Channel 39 / 2441 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4882.00	50.58	32.52	30.31	8.12	60.91	74.00	-13.09	Peak	Horizontal
4882.00	37.50	32.52	30.31	8.12	47.83	54.00	-6.17	Average	Horizontal
4882.00	50.67	31.02	36.50	7.60	52.79	74.00	-21.21	Peak	Vertical
4882.00	35.74	31.02	36.50	7.60	37.86	54.00	-16.14	Average	Vertical

Channel 78 / 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	50.59	32.68	30.27	7.88	60.88	74.00	-13.12	Peak	Horizontal
4960.00	36.00	32.68	30.27	7.88	46.29	54.00	-7.71	Average	Horizontal
4960.00	51.39	31.58	36.20	7.82	54.59	74.00	-19.41	Peak	Vertical
4960.00	38.21	31.58	36.20	7.82	41.41	54.00	-12.59	Average	Vertical

Note: All modes were tested and the worst mode was recorded in the report (version B_Adapter: ADS-65HI-19A-124060F_NFC antenna Model:DS2-52).

GFSK /Channel 0 / 2402 MHz(Worst Case)

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	49.33	32.44	30.25	7.95	59.47	74.00	-14.53	Peak	Horizontal
4804.00	36.47	32.44	30.25	7.95	46.61	54.00	-7.39	Average	Horizontal
4804.00	51.19	31.60	36.50	7.00	53.29	74.00	-20.71	Peak	Vertical
4804.00	36.47	31.60	36.50	7.00	38.57	54.00	-15.43	Average	Vertical

Channel 39 / 2441 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4882.00	49.72	32.52	30.31	8.12	60.05	74.00	-13.95	Peak	Horizontal
4882.00	36.47	32.52	30.31	8.12	46.80	54.00	-7.20	Average	Horizontal
4882.00	50.61	31.02	36.50	7.60	52.73	74.00	-21.27	Peak	Vertical
4882.00	36.33	31.02	36.50	7.60	38.45	54.00	-15.55	Average	Vertical

Channel 78 / 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	51.69	32.68	30.27	7.88	61.98	74.00	-12.02	Peak	Horizontal
4960.00	35.22	32.68	30.27	7.88	45.51	54.00	-8.49	Average	Horizontal
4960.00	51.43	31.58	36.20	7.82	54.63	74.00	-19.37	Peak	Vertical
4960.00	38.00	31.58	36.20	7.82	41.20	54.00	-12.80	Average	Vertical

Note: All modes were tested and the worst mode was recorded in the report (version C_Adapter: ADS-65HI-19A-124060F_NFC antenna Model:DS2-52).

GFSK /Channel 0 / 2402 MHz(Worst Case)

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	49.32	32.44	30.25	7.95	59.46	74.00	-14.54	Peak	Horizontal
4804.00	36.31	32.44	30.25	7.95	46.45	54.00	-7.55	Average	Horizontal
4804.00	49.38	31.60	36.50	7.00	51.48	74.00	-22.52	Peak	Vertical
4804.00	35.74	31.60	36.50	7.00	37.84	54.00	-16.16	Average	Vertical

Channel 39 / 2441 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4882.00	50.86	32.52	30.31	8.12	61.19	74.00	-12.81	Peak	Horizontal
4882.00	36.45	32.52	30.31	8.12	46.78	54.00	-7.22	Average	Horizontal
4882.00	49.35	31.02	36.50	7.60	51.47	74.00	-22.53	Peak	Vertical
4882.00	35.20	31.02	36.50	7.60	37.32	54.00	-16.68	Average	Vertical

Channel 78 / 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	51.23	32.68	30.27	7.88	61.52	74.00	-12.48	Peak	Horizontal
4960.00	36.46	32.68	30.27	7.88	46.75	54.00	-7.25	Average	Horizontal
4960.00	52.44	31.58	36.20	7.82	55.64	74.00	-18.36	Peak	Vertical
4960.00	38.06	31.58	36.20	7.82	41.26	54.00	-12.74	Average	Vertical

Note: All modes were tested and the worst mode was recorded in the report (version D_Adapter: ADS-65HI-19A-124060F_NFC antenna Model:DS2-52).

GFSK /Channel 0 / 2402 MHz(Worst Case)

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	49.48	32.44	30.25	7.95	59.62	74.00	-14.38	Peak	Horizontal
4804.00	35.40	32.44	30.25	7.95	45.54	54.00	-8.46	Average	Horizontal
4804.00	51.03	31.60	36.50	7.00	53.13	74.00	-20.87	Peak	Vertical
4804.00	35.85	31.60	36.50	7.00	37.95	54.00	-16.05	Average	Vertical

Channel 39 / 2441 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4882.00	50.04	32.52	30.31	8.12	60.37	74.00	-13.63	Peak	Horizontal
4882.00	36.88	32.52	30.31	8.12	47.21	54.00	-6.79	Average	Horizontal
4882.00	50.02	31.02	36.50	7.60	52.14	74.00	-21.86	Peak	Vertical
4882.00	36.22	31.02	36.50	7.60	38.34	54.00	-15.66	Average	Vertical

Channel 78 / 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	50.86	32.68	30.27	7.88	61.15	74.00	-12.85	Peak	Horizontal
4960.00	35.77	32.68	30.27	7.88	46.06	54.00	-7.94	Average	Horizontal
4960.00	50.92	31.58	36.20	7.82	54.12	74.00	-19.88	Peak	Vertical
4960.00	37.19	31.58	36.20	7.82	40.39	54.00	-13.61	Average	Vertical

Note: All modes were tested and the worst mode was recorded in the report (version E_Adapter: ADS-65HI-19A-124060F_NFC antenna Model:DS2-52).

GFSK /Channel 0 / 2402 MHz(Worst Case)

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	50.91	32.44	30.25	7.95	61.05	74.00	-12.95	Peak	Horizontal
4804.00	35.99	32.44	30.25	7.95	46.13	54.00	-7.87	Average	Horizontal
4804.00	50.92	31.60	36.50	7.00	53.02	74.00	-20.98	Peak	Vertical
4804.00	36.40	31.60	36.50	7.00	38.50	54.00	-15.50	Average	Vertical

Channel 39 / 2441 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4882.00	49.41	32.52	30.31	8.12	59.74	74.00	-14.26	Peak	Horizontal
4882.00	36.76	32.52	30.31	8.12	47.09	54.00	-6.91	Average	Horizontal
4882.00	49.57	31.02	36.50	7.60	51.69	74.00	-22.31	Peak	Vertical
4882.00	35.10	31.02	36.50	7.60	37.22	54.00	-16.78	Average	Vertical

Channel 78 / 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	50.48	32.68	30.27	7.88	60.77	74.00	-13.23	Peak	Horizontal
4960.00	36.54	32.68	30.27	7.88	46.83	54.00	-7.17	Average	Horizontal
4960.00	50.88	31.58	36.20	7.82	54.08	74.00	-19.92	Peak	Vertical
4960.00	38.77	31.58	36.20	7.82	41.97	54.00	-12.03	Average	Vertical


Note: All modes were tested and the worst mode was recorded in the report (version F_Adapter: ADS-65HI-19A-124060F_NFC antenna Model:DS2-52).

Notes:

- 1). Measuring frequencies from 9 KHz~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Measured= Reading- Pre. Fac.+ Ant. Fac.+ Cab. Loss
- 5). Margin = Measured- Limit

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices:

The maximum peak conducted output power may be measured using a broadband peak RF power meter.

The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple detector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


TEST RESULTS

For reporting purpose only.

Please refer to Appendix A.3.

4.4. 99% and 20dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

TEST RESULTS


For reporting purpose only.

Please refer to Appendix A.1.

Please refer to Appendix A.2.

4.5. Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100KHz and VBW=300KHz.

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $\frac{2}{3} \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST RESULTS

For reporting purpose only.

Please refer to Appendix A.4.


4.6. Conducted Spurious Emissions and Band Edge Compliance of RF Emission

TEST REQUIREMENT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

For Radiated

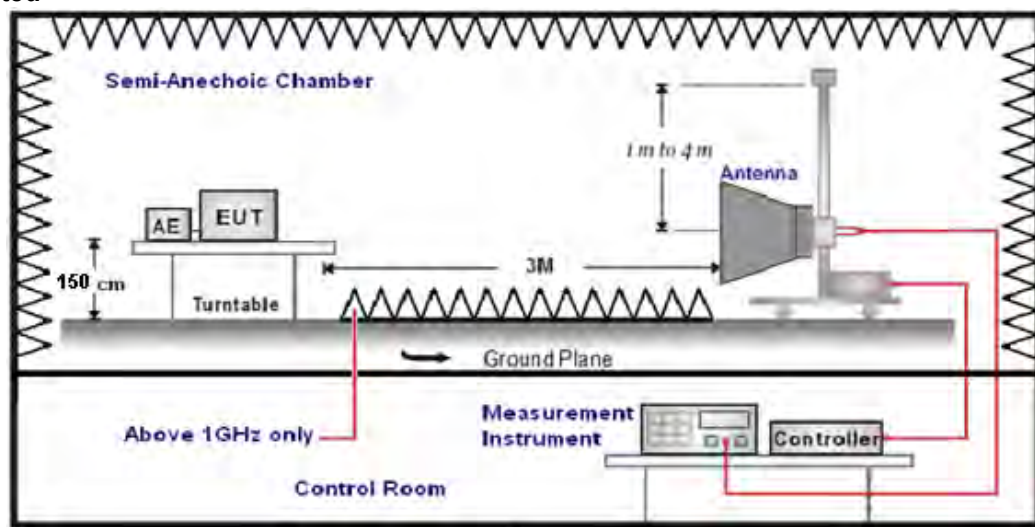

For Conducted



TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

Remark: we measured all conditions(DH1,DH3,DH5) and recorded worst case at DH1.

4.6.1 For Radiated Bandedge Measurement

For reporting purpose only.

Please refer to Appendix A.9.

4.6.2 For Conducted Bandedge Measurement

For reporting purpose only.

Please refer to Appendix A.7.


4.6.3 For Conducted Spurious Emissions Measurement

For reporting purpose only.

Please refer to Appendix A.8.

4.7. Number of hopping frequency

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=100KHz and VBW=300KHz.

LIMIT

Frequency hopping systems in the 2400–2483.5MHz band shall use at least 15 channels.


TEST RESULTS

For reporting purpose only.

Please refer to Appendix A.6.

4.8. Time Of Occupancy(Dwell Time)

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz, Span=0Hz.

LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST RESULTS

For reporting purpose only.

Please refer to Appendix A.5.

4.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

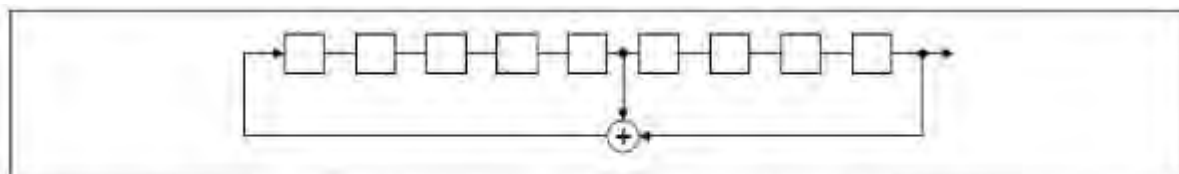

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

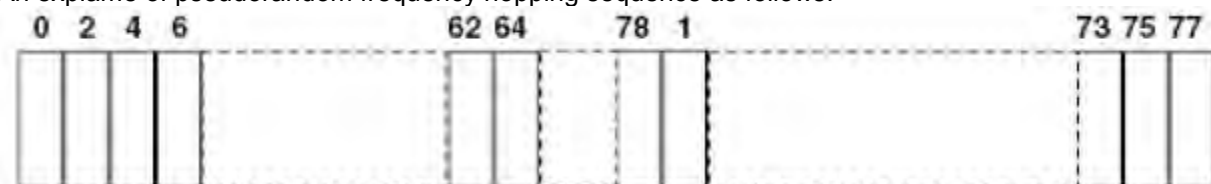

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

4.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The antenna used for this product is Internal Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.05dBi.

Reference to the **Internal photos**.

5. TEST SETUP PHOTOS OF THE EUT

Photo of Radiated Emissions Measurement

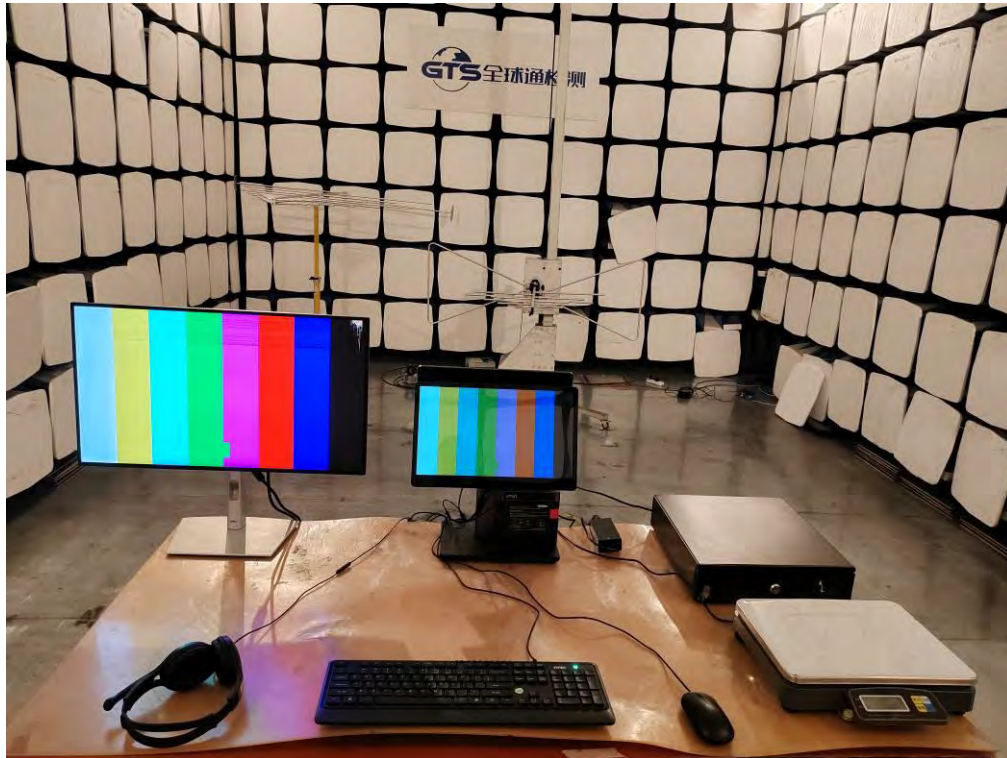


Fig. 1



Fig. 2

Photo of Conducted Emission Measurement



Fig. 3

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

6.1. External photos of the EUT



Fig. 1



Fig. 2



Fig. 3



Fig. 4

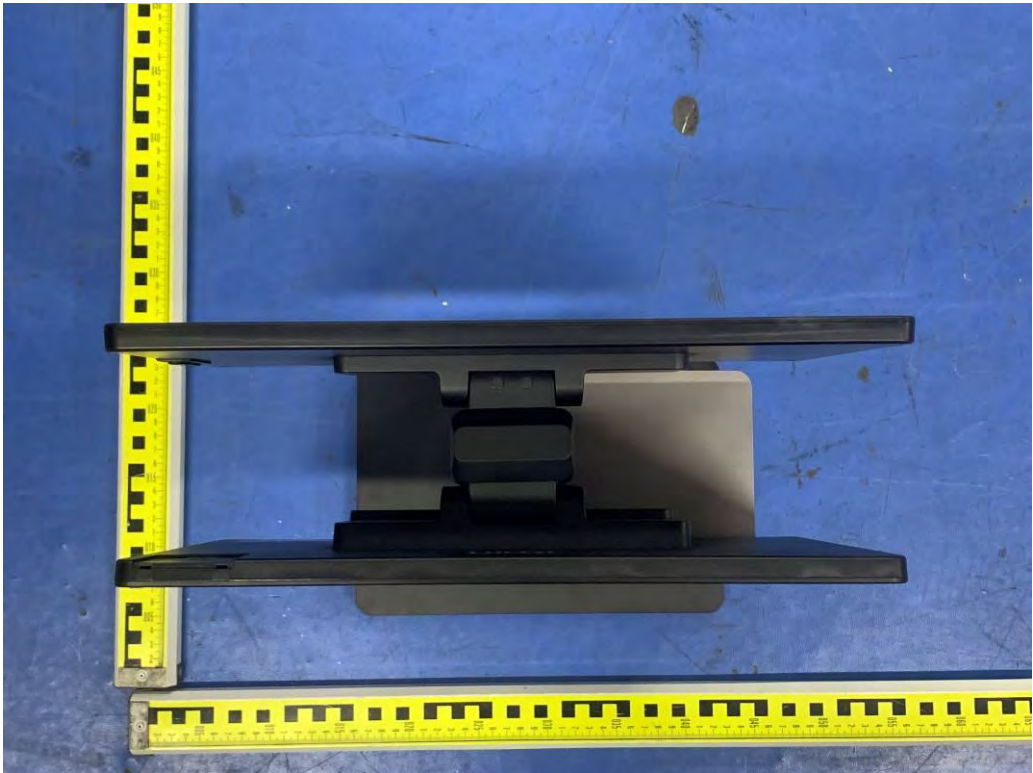


Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9

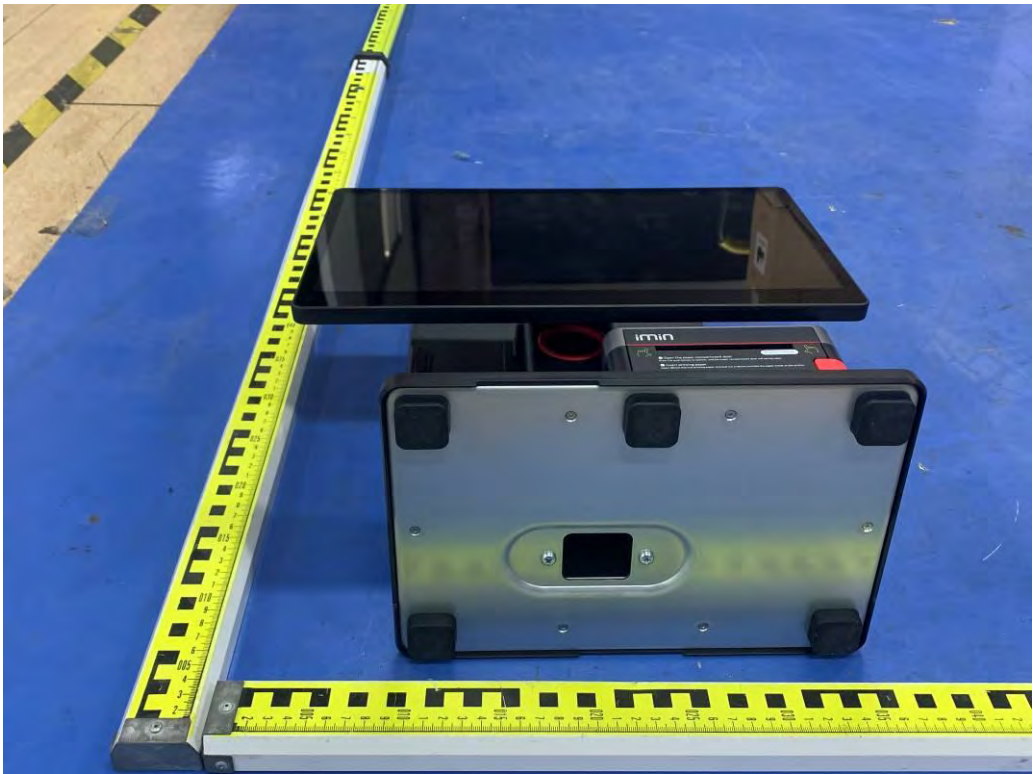


Fig. 10



Fig. 11



Fig. 12

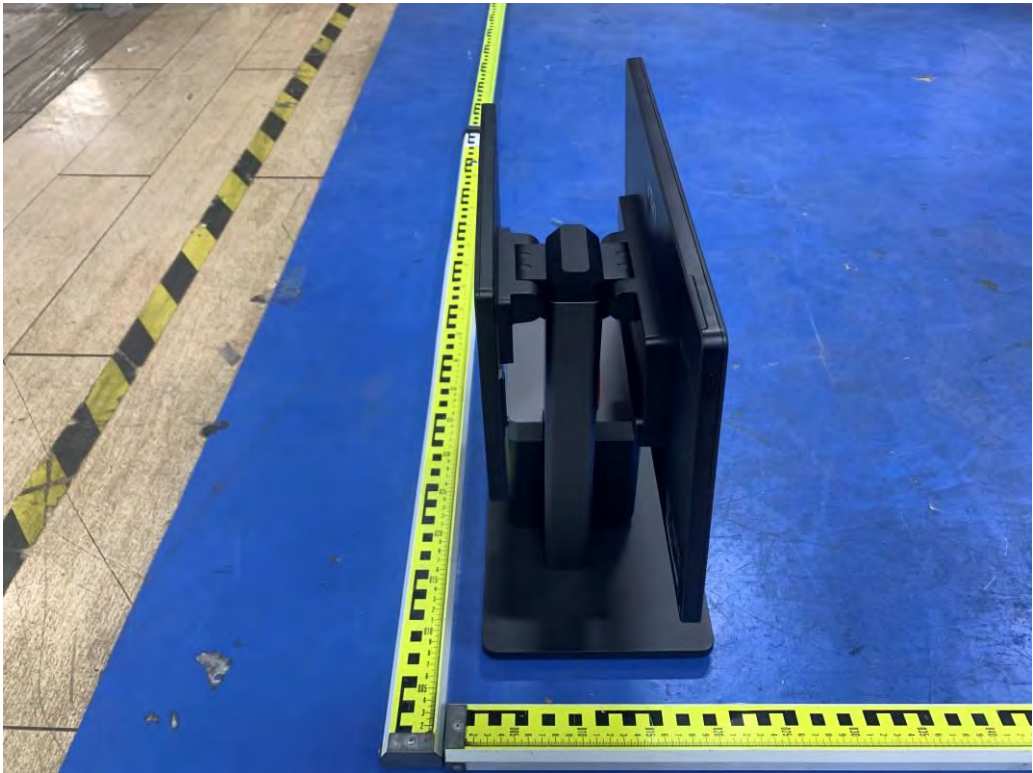


Fig. 13

Version C



Fig. 14



Fig. 15

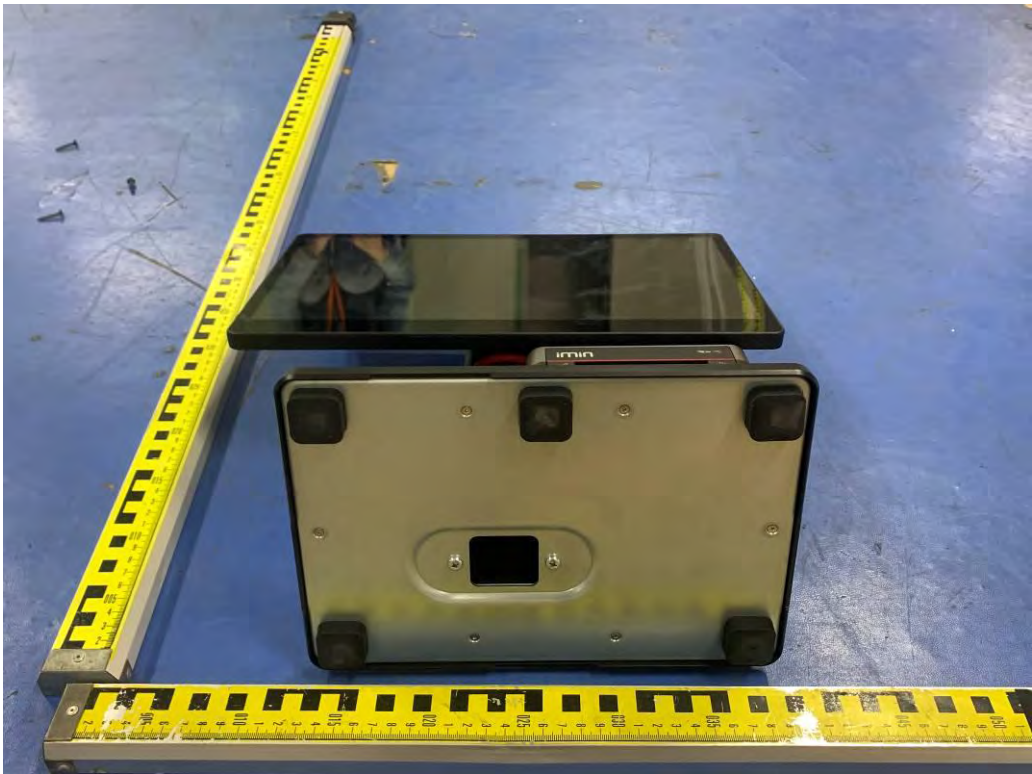


Fig. 16



Fig. 17

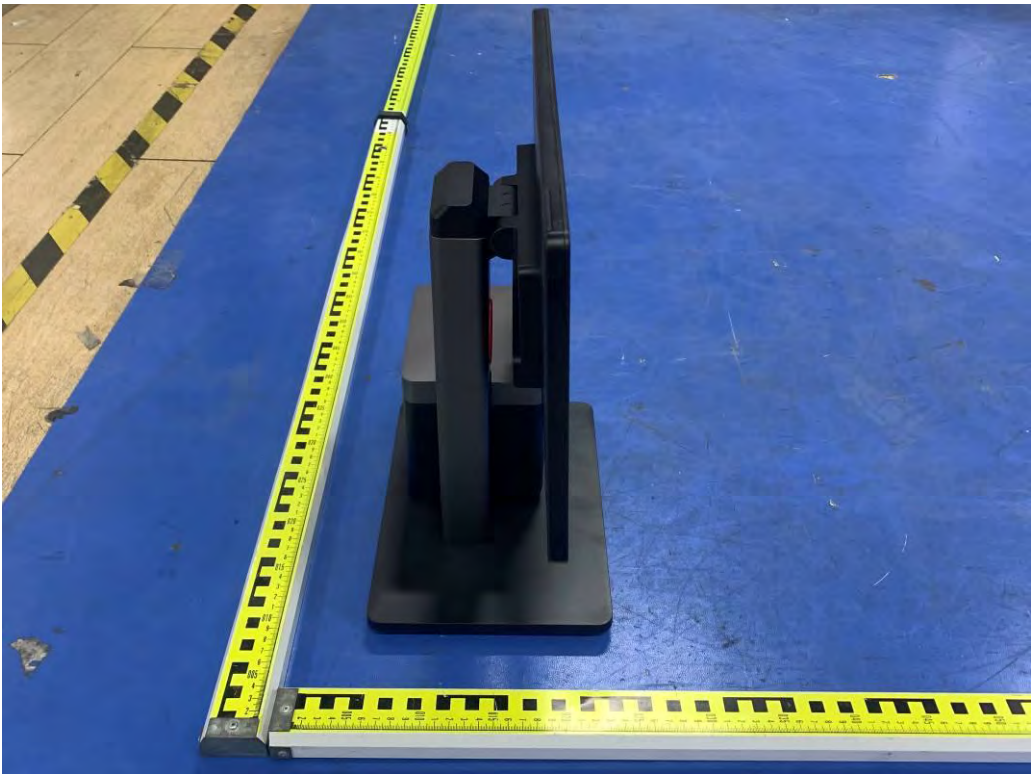


Fig. 18

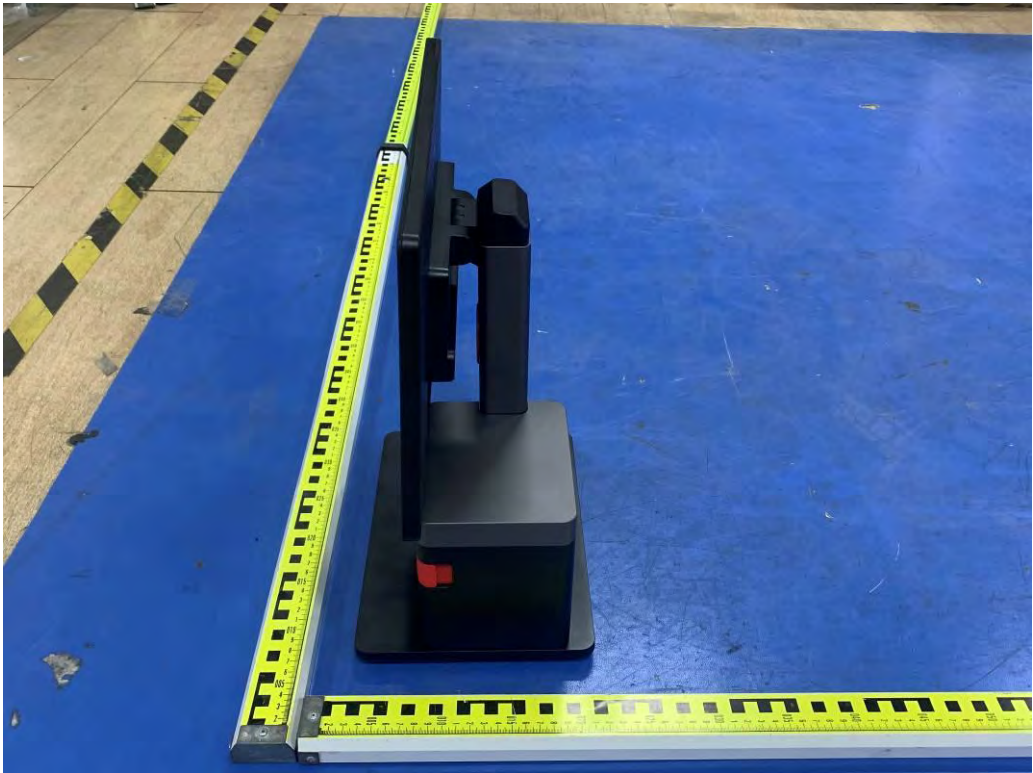


Fig. 19

Versions D



Fig. 20



Fig. 21

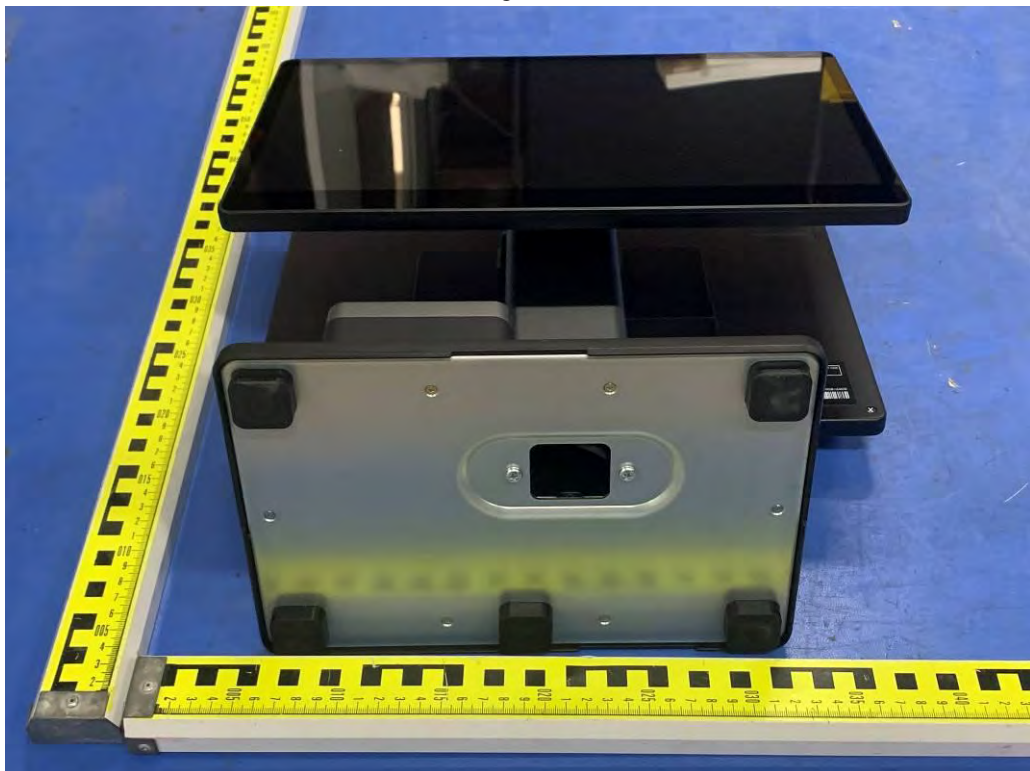


Fig. 22



Fig. 23



Fig. 24



Fig. 25

Versions E



Fig. 26



Fig. 27

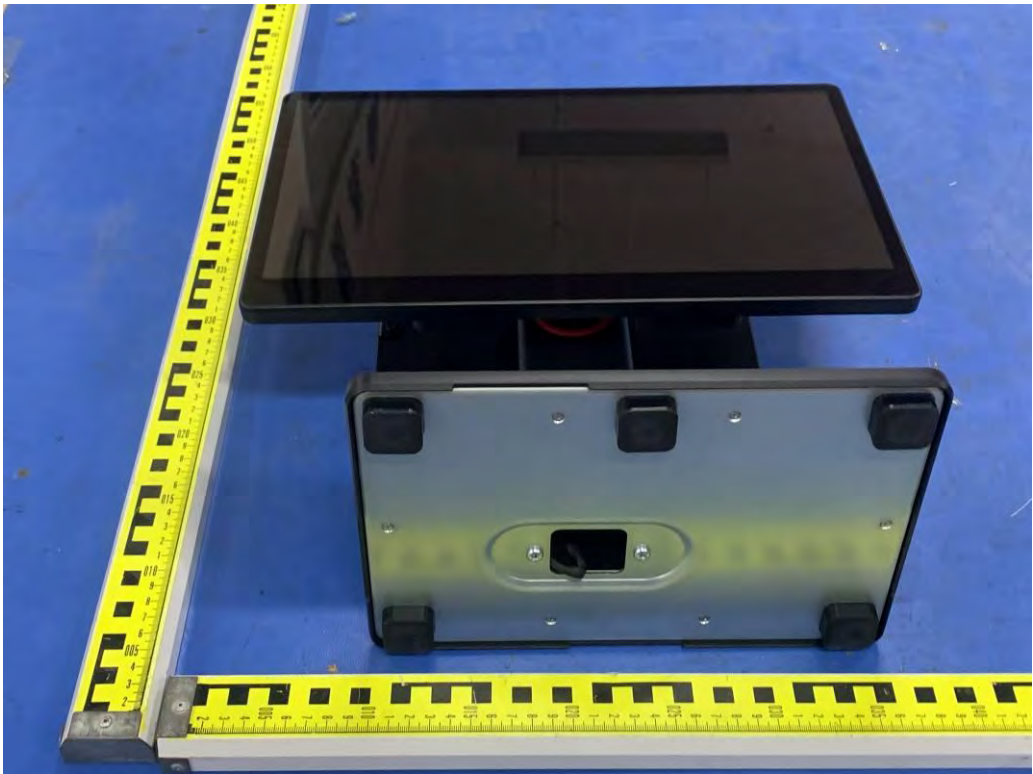


Fig. 28



Fig. 29



Fig. 30



Fig. 31

Versions F



Fig. 32



Fig. 33



Fig. 34



Fig. 35

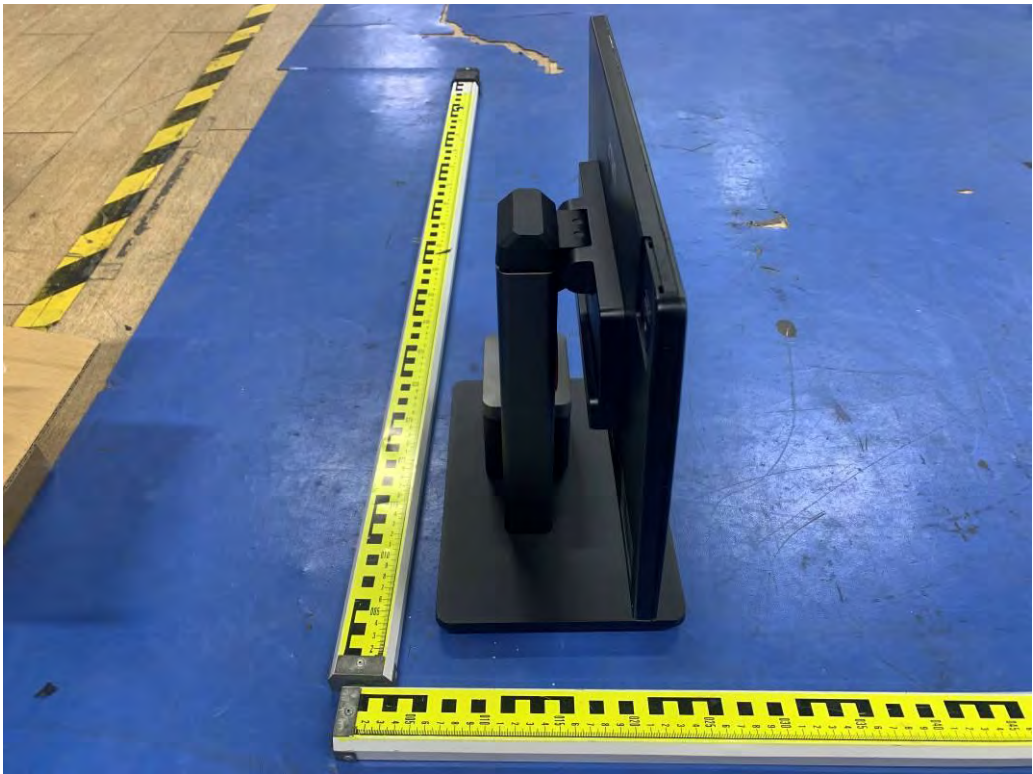


Fig. 36



Fig. 37



Fig. 38

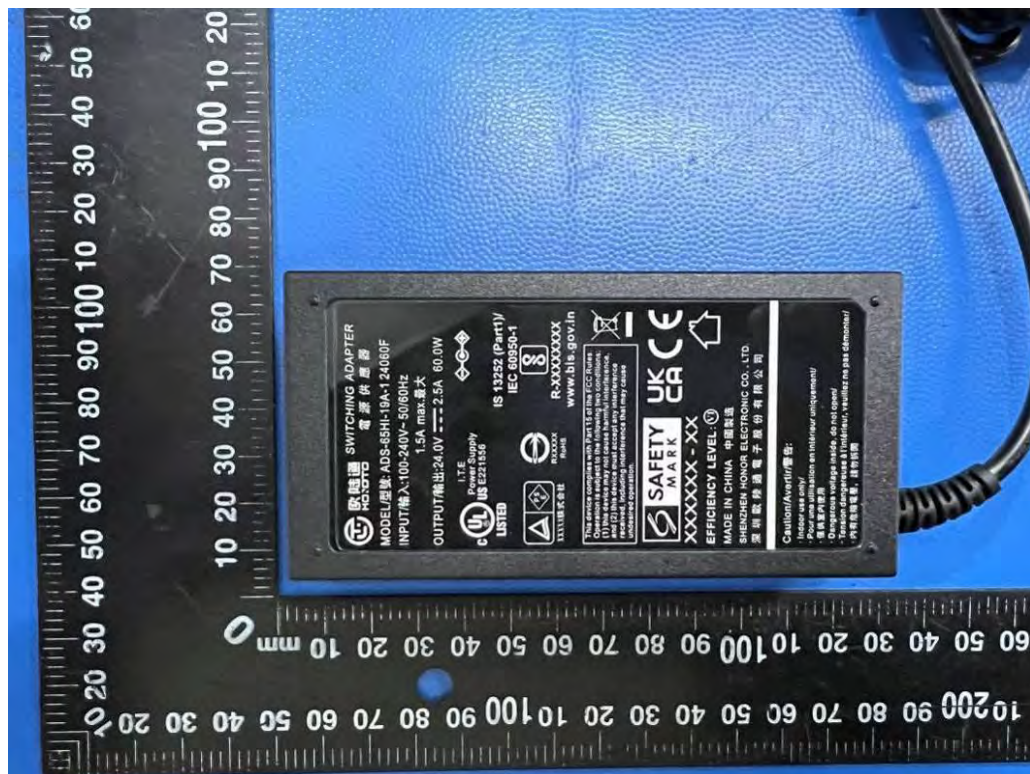


Fig. 39



Fig. 40



Fig. 41