

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-978_23.docx	Date of Report:	22-Aug-2014
Number of pages:	9	Customer's Contact person:	Juha Paukku
Testing laboratory:	TCC Microsoft Tampere Laboratory P.O.Box 403 Visiokatu 3 FIN-33101 TAMPERE, FINLAND Tel. +358 71 800 8000 Fax. +358 71 804 6880	Customer:	Microsoft P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-978 / Battery BL-5H LGC / Charger AC-20E Phihong / Headset WH-108		
FCC ID:	PDNRM-978	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24, TIA-603-C-2004 and IC standards, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	19-Feb-2014
Testing completed	04-Mar-2014
The customer's contact person	Juha Paukku
Test Plan referred to	T:\Projects\RM-977\TestPlan\RS_testplan_RM-977 BOM2.xlsm
Notes	-
Document name	T:\Projects\RM-978\EMC\FCC22&24_RM-978_23.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-977	004402476810209	2320	-	1058.0000.1406.10062	43149
Battery	BL-5H LGC	-	V3.0 PWB ver 2.0	-	-	43134
Charger	AC-20E Phihong	-	-	-	-	43135
Headset	WH-108	-	-	-	-	43136

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Microsoft Laboratory.

The test results of PDNRM-977 are re-used for certification of the PDNRM-978. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	3
2. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)	5
2.2. Test method and limit	6
2.3. GSM850 TX test results	7
2.4. GSM850-E1 TX test results	7
2.5. GSM1900 TX test results	7
2.6. GSM1900-E1 TX test results	7
3. Test Equipment.....	8
3.1. Conducted measurements	8
3.2. Radiated measurements	9

2. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-977, DUT 43149
Accessories with DUT numbers	BL-5H LGC, DUT 43134 ; AC-20E Pihong, DUT 43135 ; WH-108, DUT 43136
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 45 / 101.7
Date of measurements	04-Mar-2014
Measured by	Timo Raiskio

2.1.1 Test setup

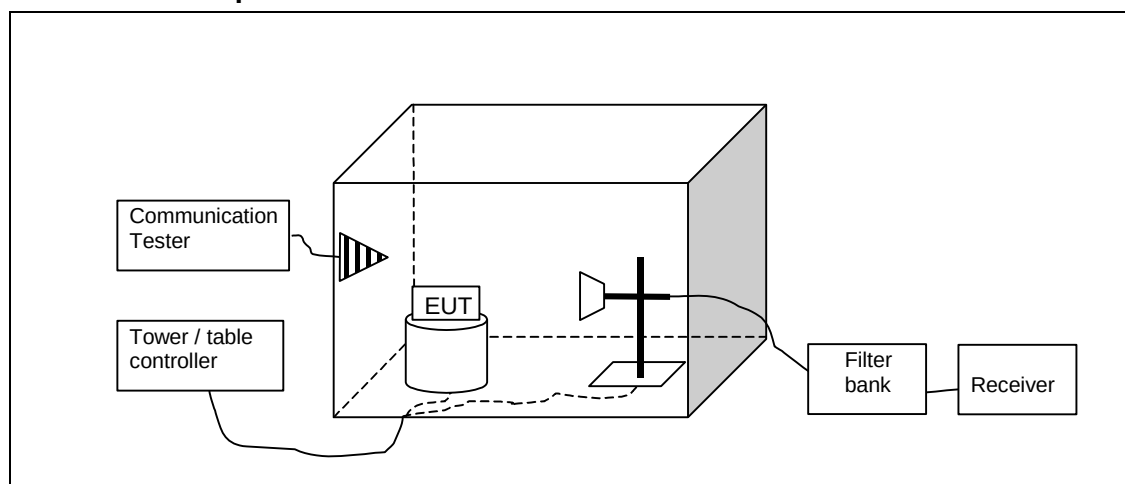

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used.

The measurement results are obtained as described below:

$$P [dBm] = P_{SUBST TX} + G_{SUBST TX ANT} - L_{SUBST CABLE}$$

Where $P_{SUBST TX}$ is signal generator level, which produces the same receiver reading P_{MEAS} in dBm as EUT. $G_{SUBST TX ANT}$ is substitution antenna gain and $L_{SUBST CABLE}$ is the loss of the cable between the signal generator and the substitution antenna.

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA850	30 - 8500	-13
GSM1900 / WCDMA1900	30 - 19100	-13

2.3. GSM850 TX test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

Peak detector

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
848.697	-72.97	5E-05	-57.77	-15.2	VERTICAL	PASSED
849.011	-75.22	3E-05	-60.03	-15.19	VERTICAL	PASSED
849.327	-76.32	2E-05	-61.13	-15.19	VERTICAL	PASSED
849.424	-78.51	1E-05	-63.32	-15.19	VERTICAL	PASSED
2509.739	-50.31	0.00931	-50.81	0.5	VERTICAL	PASSED
2510.22	-44.22	0.03781	-44.65	0.43	HORIZONTAL	PASSED

2.4. GSM850-E1 TX test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

Peak detector

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
1664.002	-58.9	0.00129	-51.99	-6.91	VERTICAL	PASSED
2508.658	-54.27	0.00374	-54.6	0.33	HORIZONTAL	PASSED

2.5. GSM1900 TX test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

Peak detector

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
1909.8	-40.21	0.09539	-37.33	-2.88	VERTICAL	PASSED
1910.45	-41.93	0.06412	-38.96	-2.97	HORIZONTAL	PASSED
1911.807	-40.37	0.09183	-37.44	-2.93	HORIZONTAL	PASSED
3759.84	-55.47	0.00284	-59.53	4.06	VERTICAL	PASSED
5646.493	-52.37	0.0058	-60	7.63	VERTICAL	PASSED
7550.782	-49.44	0.01138	-62.95	13.51	HORIZONTAL	PASSED

2.6. GSM1900-E1 TX test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

Peak detector

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
3760.02	-57.1	0.00195	-61.16	4.06	VERTICAL	PASSED
5633.246	-52.32	0.00586	-60.04	7.72	HORIZONTAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C, 15E
TM23007	Oscilloscope	TDS684B	Tektronix	15E
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24/27
2001	Bluetooth tester	CBT	R&S	15C, 15B
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2021	Communication Tester	CMW500	R&S	22/24/27
2022	Communication Tester	CMU200	R&S	22/24/27
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15E, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15E, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15E, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15E, 15B
-	RF system panel	OSP130	R&S	22/24/27, 15C, 15E, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chamber	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15E, 15B
TM38066	High pass filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
2028	High pass filter	WHKX 1.0/15G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27, 15C, 15E
2001	Bluetooth tester	CBT	R&S	15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27
2021	Communication Tester	CMW500	R&S	22/24/27
2025	Antenna	HFH2-Z2	R&S	15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
2052	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B, 15E
-	Antenna	QSH18S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E