

# FCC&IC Radio Test Report

**FCC ID: SIB-BGTAB-NV24A**

**IC: 6719D-BGTABNV24A**

This report concerns (check one): ☒ Original Grant ☐ Class II Change

**Project No.** : 1406C178  
**Equipment** : dreamtab  
**Model Name** : BGTAB-NV24A  
**Applicant** : Foxconn International Inc  
**Address** : NO 2 ZIYOU ST TUCHENG DISTRICT NEW  
TAIPEI, 236 Taiwan

**Date of Receipt** : Jun. 24, 2014  
**Date of Test** : Jun. 24, 2014~ Aug. 08, 2014  
**Issued Date** : Aug. 11, 2014  
**Tested by** : BTL Inc.

**Testing Engineer** : David Mao  
(David Mao)

**Technical Manager** : Leo Hung  
(Leo Hung)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China.  
TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	14
<b>4 . EMC EMISSION TEST</b>	<b>15</b>
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	20
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
<b>5 . BANDWIDTH TEST</b>	<b>21</b>
5.1 APPLIED PROCEDURES	21
5.1.1 TEST PROCEDURE	21
5.1.2 DEVIATION FROM STANDARD	21
5.1.3 TEST SETUP	21
5.1.4 EUT OPERATION CONDITIONS	21
5.1.5 EUT TEST CONDITIONS	21
5.1.6 TEST RESULTS	21

<b>Table of Contents</b>	<b>Page</b>
<b>6 . MAXIMUM OUTPUT POWER TEST</b>	<b>22</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>22</b>
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22
6.1.4 EUT OPERATION CONDITIONS	22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>23</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>23</b>
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP	23
7.1.4 EUT OPERATION CONDITIONS	23
7.1.5 EUT TEST CONDITIONS	23
7.1.6 TEST RESULTS	23
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>24</b>
<b>8.1 APPLIED PROCEDURES / LIMIT</b>	<b>24</b>
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD	24
8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>25</b>
<b>10 . EUT TEST PHOTO</b>	<b>27</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>31</b>
<b>ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>34</b>
<b>ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>36</b>
<b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>43</b>
<b>ATTACHMENT E - BANDWIDTH</b>	<b>92</b>
<b>ATTACHMENT F - MAXIMUM OUTPUT POWER</b>	<b>105</b>
<b>ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>109</b>
<b>ATTACHMENT H - POWER SPECTRAL DENSITY</b>	<b>134</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FICP-6-1406C178	Original Issue.	Aug. 11, 2014

## 1. CERTIFICATION

Equipment : dreamtab  
Brand Name : FUHU  
Model Name : BGTAB-NV24A  
Applicant : Foxconn International Inc  
Manufacturer : FUHU INC.  
Address : 909 N SEPULVEDA BLVD STE 540 EL SEGUNDO, CA 90245  
Factory : HONGFUJIN Precision Electronics (Chong Qing) Co., Ltd.  
Address : No.1, 1<sup>st</sup> E District RD., Shapingba District, Chongqing 401332, P.R. China  
Date of Test : Jun. 24, 2014~ Aug. 08, 2014  
Test Item : ENGINEERING SAMPLE  
Standard(s) : FCC Part15, Subpart C: 2013 (15.247) / ANSI C63.4-2009  
Canada RSS-210: 2010  
RSS-GEN Issue 3, Dec 2010

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-6-1406C178) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C: 2013 Canada RSS-210:2010; RSS-GEN Issue 3, Dec 2010				
Standard(s) Section		Test Item	Judgment	Remark
FCC	IC			
15.207	RSS-GEN 7.2.2	Conducted Emission	PASS	
15.247(d)	RSS-210 Annex 8 (A8.5)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	RSS-210 Annex 8 (A8.2(a))	6dB Bandwidth	PASS	
15.247(b)(3)	RSS-210 Annex 8 (A8.4(4))	Peak Output Power	PASS	
15.247(e)	RSS-210 Annex 8 (A8.2(b))	Power Spectral Density	PASS	
15.203	-	Antenna Requirement	PASS	
15.209/15.205	RSS-210 Annex 8 (A8.5)	Transmitter Radiated Emissions	PASS	

### NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

BTL's test firm number for FCC: 319330

BTL's test firm number for IC: 4428B-1

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	3.4	

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	dreamtab	
Brand Name	FUHU	
Model Name	BGTAB-NV24A	
Model Difference	N/A	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	Output Power (Max.)	802.11b: 18.73dBm 802.11g: 21.12dBm 802.11n(20MHz): 23.46dBm 802.11n(40MHz): 17.83dBm
Power Source	#1 DC supplied from AC Adapter. Model: ADS-65LSI-19-3 19065G #2 Supplied from rechargeable Li-ion polymer battery. Brand / Model: McNair / MLP2462113-4S	
Power Rating	#1 I/P AC 100-240V~ 50/60Hz 1.5A O/P: DC 19V 3.42A #2 14.8V 1650mAh 24.42Wh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

## 3. Table for Filed Antenna

### Group 1

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	FOXCONN	PCA-3007-25GC1-A2	Integral	N/A	-3.31	360mm
2	FOXCONN	PCA-3007-25GC1-A5	Integral	N/A	-4.52	65mm

### Group 2

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	MAG Corporation	PCA-3007-25GC1-A2	Integral	N/A	0.2	360mm
2	MAG Corporation	PCA-3007-25GC1-A5	Integral	N/A	-0.93	65mm

Note:

1The EUT incorporates a MIMO function. Physically, the EUT provides two completed two transmitters and two receivers (2T2R).

2. Two groups of antenna used with the same type, only differ in manufacturer and gain, group 2 is tested and recorded as the worst case in this report.

3. ANT 1 for 1TX was found to be the worst case and recorded.

## 4.

Operating Mode TX Mode	1TX	2TX
802.11b	V (ANT 1 )	-
802.11g	V (ANT 1)	-
802.11n(20MHz)	-	V (ANT 1 + ANT 2)
802.11n(40MHz)	-	V (ANT 1 + ANT 2)

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)  
802.11g mode: OFDM (6Mbps)  
802.11n HT20 mode : BPSK (13Mbps)  
802.11n HT40 mode : BPSK (27Mbps)  
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT is considered a portable unit; it was pre-tested on the position of each 3 axis.  
The worst case was found positioned on Z-plane. Therefore only the test data of this Z-plane was used for radiated emission measurement test

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	N/A		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b DSSS	16	16	15
IEEE 802.11g OFDM	13	14	13
IEEE 802.11n (20MHz)	11	13	12
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n (40MHz)	7	9	8

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

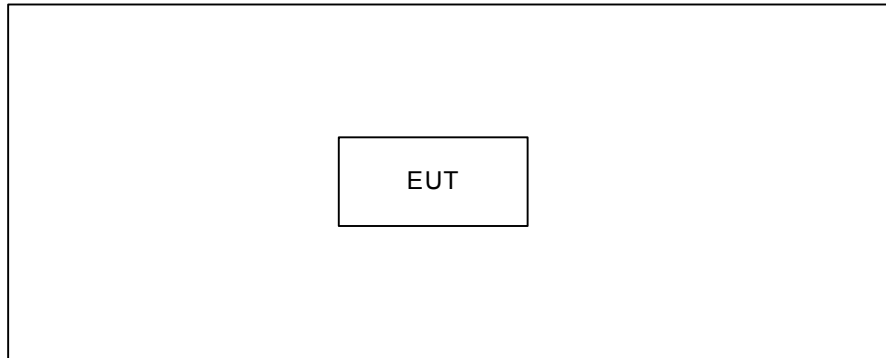

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " \* " decreases with the logarithm of the frequency

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

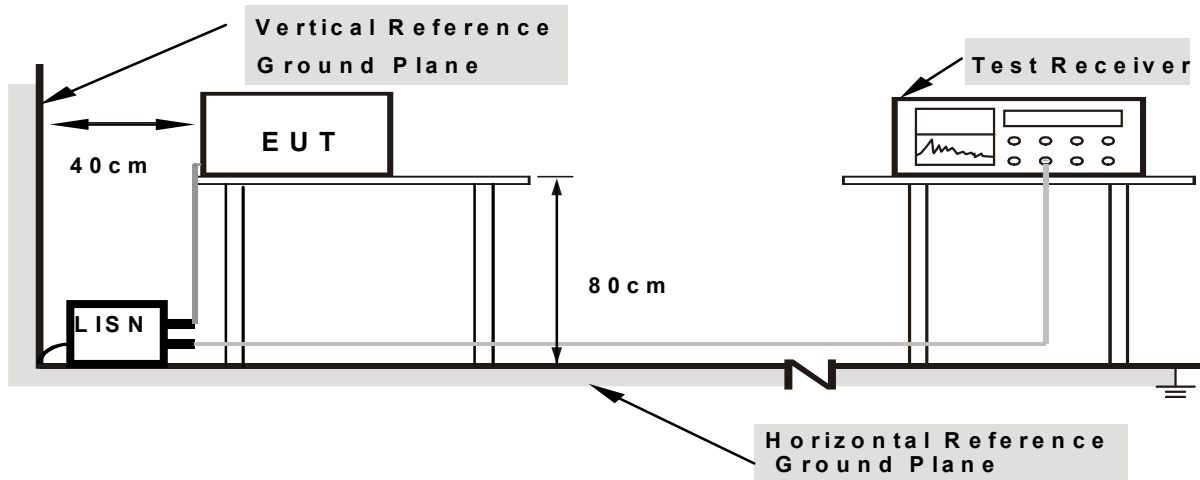

**Note:** 1.Support units were connected to second LISN .  
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80  
 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) & RSS-210 section 2.2& Annex 8 (A8.5), then the 15.209(a)& RSS-Gen limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

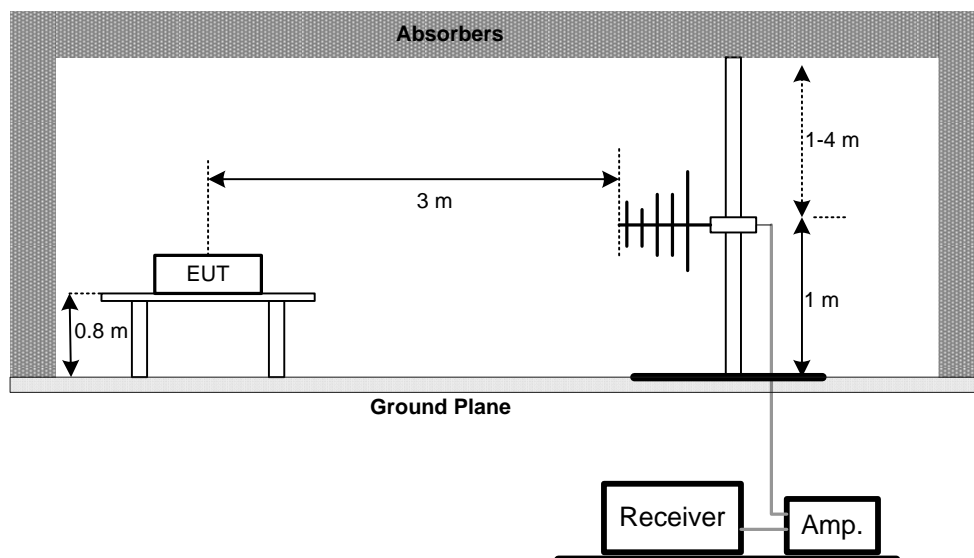

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

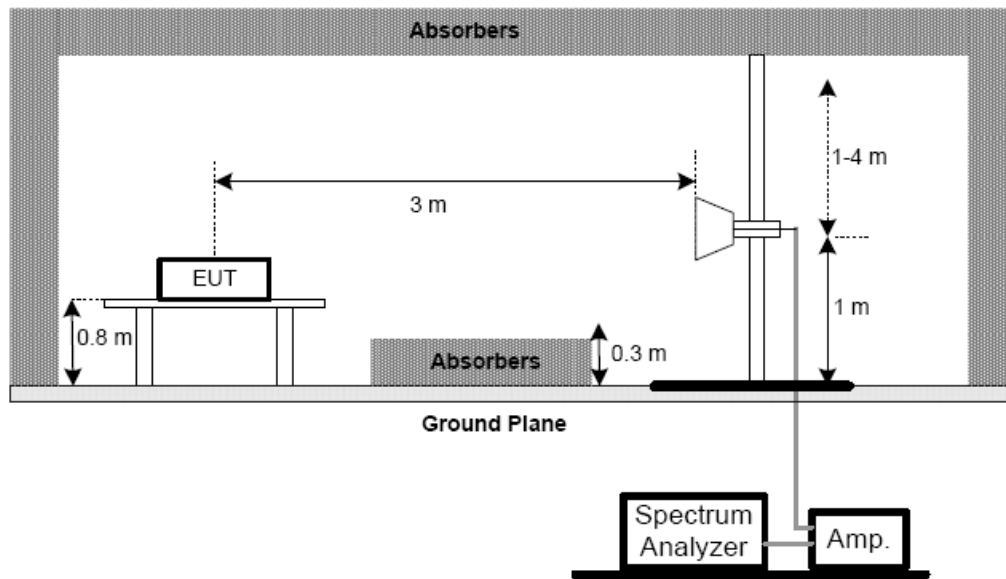

(C) For radiated emissions below 30MHz

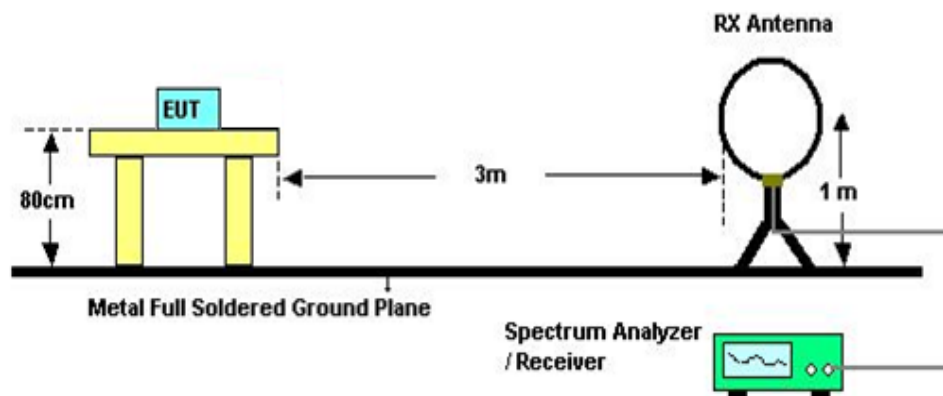

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 14.8V

#### **4.2.7 TEST RESULTS (9KHZ TO 30MHZ)**

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)**

Please refer to the Attachment C.

#### **4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Attachment D.

## 5. BANDWIDTH TEST

### 5.1 Applied procedures

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2) RSS-GEN section 4.6.1 RSS-210 Annex 8 (A8.2(a))	Bandwidth	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 14.8V

#### 5.1.6 TEST RESULTS

Please refer to the Attachment E.

## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C/ RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS-210 Annex 8.4(4)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.3 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 14.8V

#### 6.1.6 TEST RESULTS

Please refer to the Attachment F.

## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

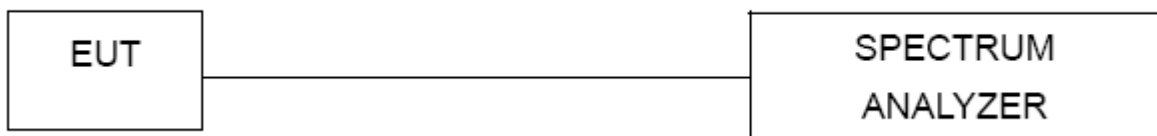

#### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 14.8V

#### 7.1.6 TEST RESULTS

Please refer to the Attachment G.

## 8. POWER SPECTRAL DENSITY TEST

### 8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C / RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-210 Annex 8( A8.2(b))	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 14.8V

#### 8.1.6 TEST RESULTS

Please refer to the Attachment H.



## 9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 29, 2015
2	LISN	R&S	ENV216	101447	Mar. 29, 2015
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 29, 2015
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29, 2015

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EMCO	3142C	00066462	Mar. 29, 2015
2	Antenna	EMCO	3142C	00066464	Mar. 29, 2015
3	Amplifier	Agilent	8447D	2944A11203	Nov. 11, 2014
4	Amplifier	Agilent	8447D	2944A11204	Nov. 11, 2014
5	Spectrum Analyzer	Agilent	E4443A	MY48250370	Nov. 11, 2014
6	RF Pre-selector	Agilent	N9039A	MY46520201	Nov. 11, 2014
7	Test Cable	N/A	Cable_5m_8m_15m	N/A	Jan. 14, 2015
8	Test Cable	N/A	Cable_5m_11m_15m	N/A	Jan. 14, 2015
9	Spectrum Analyzer	Agilent	E4447A	MY48250208	Nov. 11, 2014
10	RF Pre-selector	Agilent	N9039A	MY46520214	Nov. 11, 2014
11	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
12	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015
13	Amplifier	Agilent	8449B	3008A02584	Nov. 11, 2014
14	Spectrum Analyzer	Agilent	E4447A	MY48250208	Nov. 11, 2014
15	Test Cable	Huber+Suhner	SUCOFLEX_1 5m_4m	N/A	Jan. 14, 2015

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Mar. 29, 2015
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Mar. 29, 2015

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## 10. EUT TEST PHOTO

### Conducted Measurement Photos



## Radiated Measurement Photos

9KHz to 30MHz





## Radiated Measurement Photos

30MHz to 1000MHz



## Radiated Measurement Photos


Above 1000MHz



## **ATTACHMENT A - CONDUCTED EMISSION**

Test Mode : TX MODE

### Line

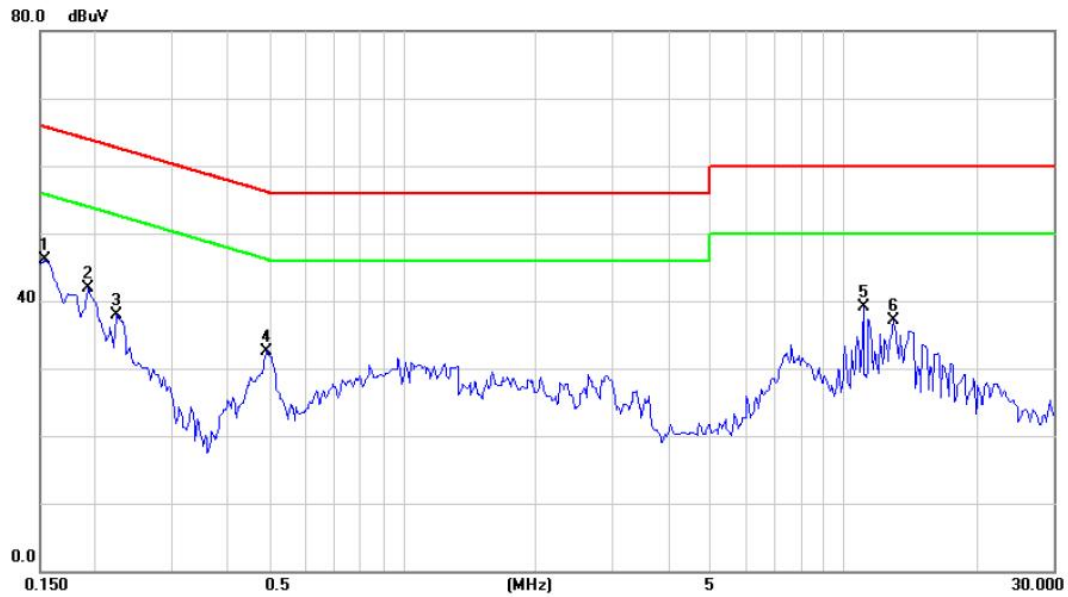


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1540	36.49	9.52	46.01	65.78	-19.77	peak	
2		0.1930	32.31	9.54	41.85	63.91	-22.06	peak	
3		0.2242	28.33	9.54	37.87	62.66	-24.79	peak	
4		0.4898	22.97	9.59	32.56	56.17	-23.61	peak	
5		11.0897	28.87	10.15	39.02	60.00	-20.98	peak	
6		12.9961	26.90	10.25	37.15	60.00	-22.85	peak	



Test Mode : TX MODE

### Neutral

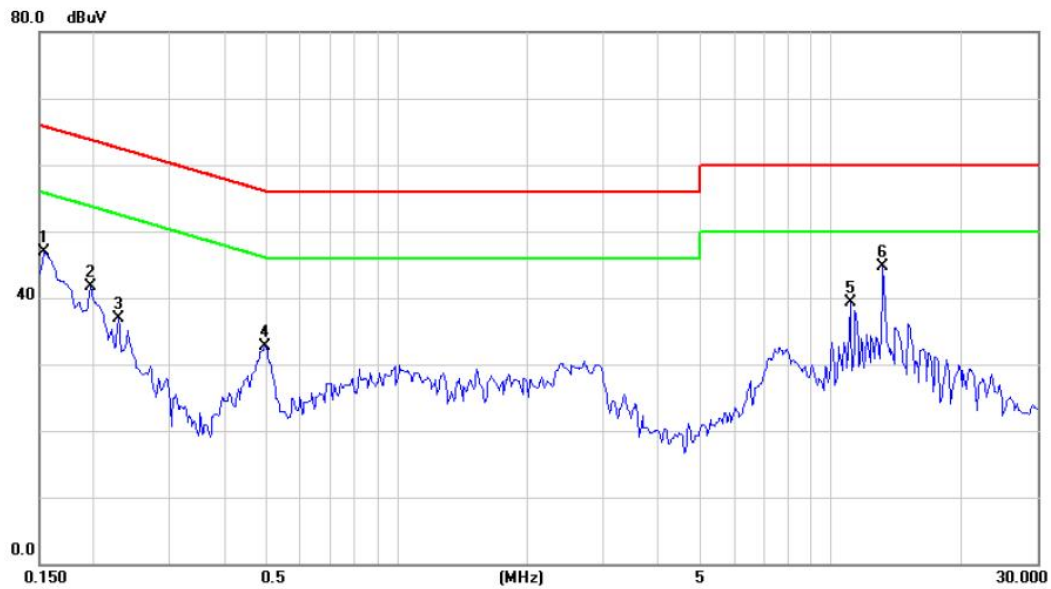

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	37.38	9.52	46.90	65.78	-18.88	peak	
2		0.1970	32.13	9.53	41.66	63.74	-22.08	peak	
3		0.2281	27.45	9.53	36.98	62.52	-25.54	peak	
4		0.4977	23.11	9.58	32.69	56.04	-23.35	peak	
5		11.0897	29.01	10.22	39.23	60.00	-20.77	peak	
6	*	13.2110	34.39	10.36	44.75	60.00	-15.25	peak	

## **ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)**

Test Mode: TX Mode 2412MHz

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0156	0°	13.41	24.58	37.99	103.74	-65.75	AVG
0.0156	0°	14.26	24.58	38.84	123.74	-84.90	PEAK
0.0311	0°	6.80	23.60	30.40	97.75	-67.35	AVG
0.0311	0°	8.00	23.60	31.60	117.75	-86.15	PEAK
0.0385	0°	4.30	23.13	27.43	95.90	-68.47	AVG
0.0385	0°	5.70	23.13	28.83	115.90	-87.07	PEAK
0.0470	0°	3.12	22.59	25.71	94.16	-68.45	AVG
0.0470	0°	4.78	22.59	27.37	114.16	-86.79	PEAK
2.0604	0°	28.71	19.46	48.17	69.54	-21.37	QP
3.3738	0°	20.37	18.94	39.31	69.54	-30.23	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0155	90°	13.18	24.30	37.48	123.80	-86.32	AVG
0.0155	90°	14.17	24.30	38.47	143.80	-105.33	PEAK
0.0311	90°	6.87	23.60	30.47	117.75	-87.28	AVG
0.0311	90°	7.79	23.60	31.39	137.75	-106.36	PEAK
0.0373	90°	5.93	23.20	29.13	116.17	-87.04	AVG
0.0373	90°	6.84	23.20	30.04	136.17	-106.13	PEAK
0.0470	90°	5.14	22.59	27.73	114.16	-86.43	AVG
0.0470	90°	6.09	22.59	28.68	134.16	-105.48	PEAK
2.0604	90°	29.63	19.46	49.09	69.54	-20.45	QP
3.2842	90°	17.12	18.93	36.05	69.54	-33.49	QP


Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

## **ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: TX B MODE CHANNEL 01


### Vertical

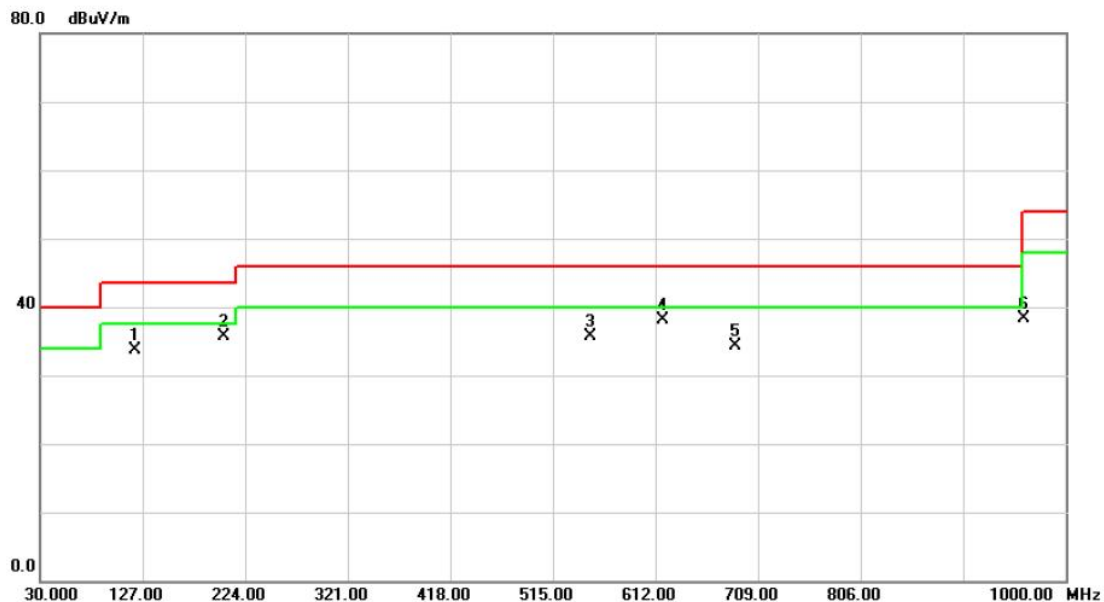

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.97	-14.19	33.78	43.50	-9.72	peak	
2	*	203.6300	50.82	-15.14	35.68	43.50	-7.82	peak	
3		549.9200	43.64	-7.93	35.71	46.00	-10.29	peak	
4		618.7900	44.95	-6.88	38.07	46.00	-7.93	peak	
5		687.6600	39.37	-4.98	34.39	46.00	-11.61	peak	
6		960.2300	38.52	-0.25	38.27	54.00	-15.73	peak	

Test Mode: TX B MODE CHANNEL 01


### Horizontal

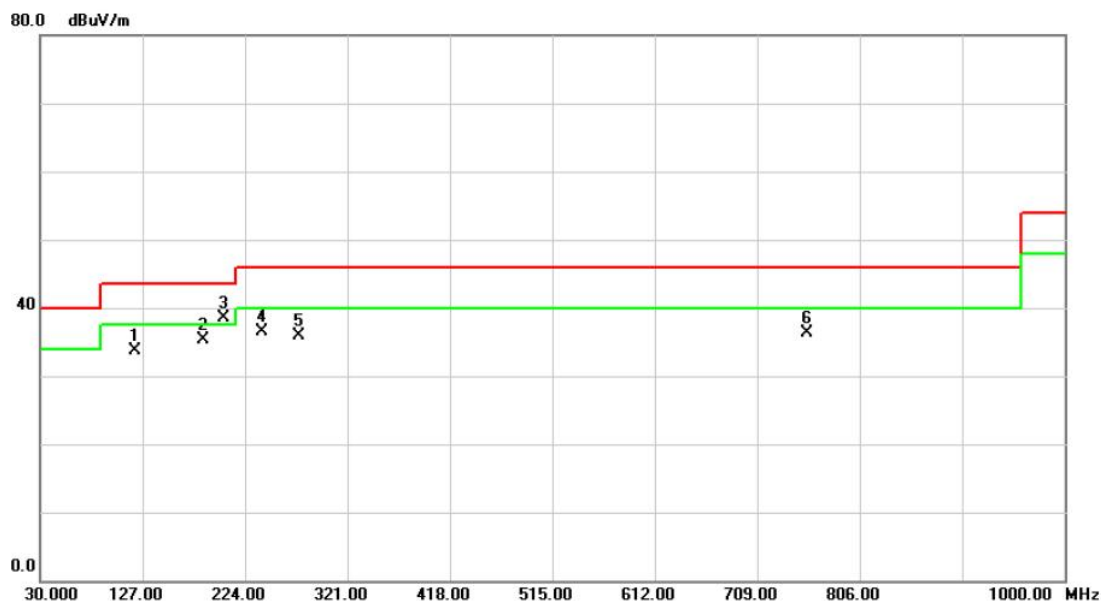

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		120.2100	47.82	-14.19	33.63	43.50	-9.87	peak	
2		184.2300	48.87	-13.57	35.30	43.50	-8.20	peak	
3	*	203.6300	53.59	-15.14	38.45	43.50	-5.05	peak	
4		240.4900	50.52	-14.04	36.48	46.00	-9.52	peak	
5		275.4100	48.53	-12.72	35.81	46.00	-10.19	peak	
6		756.5300	40.67	-4.40	36.27	46.00	-9.73	peak	

Test Mode: TX B MODE CHANNEL 06


### Vertical

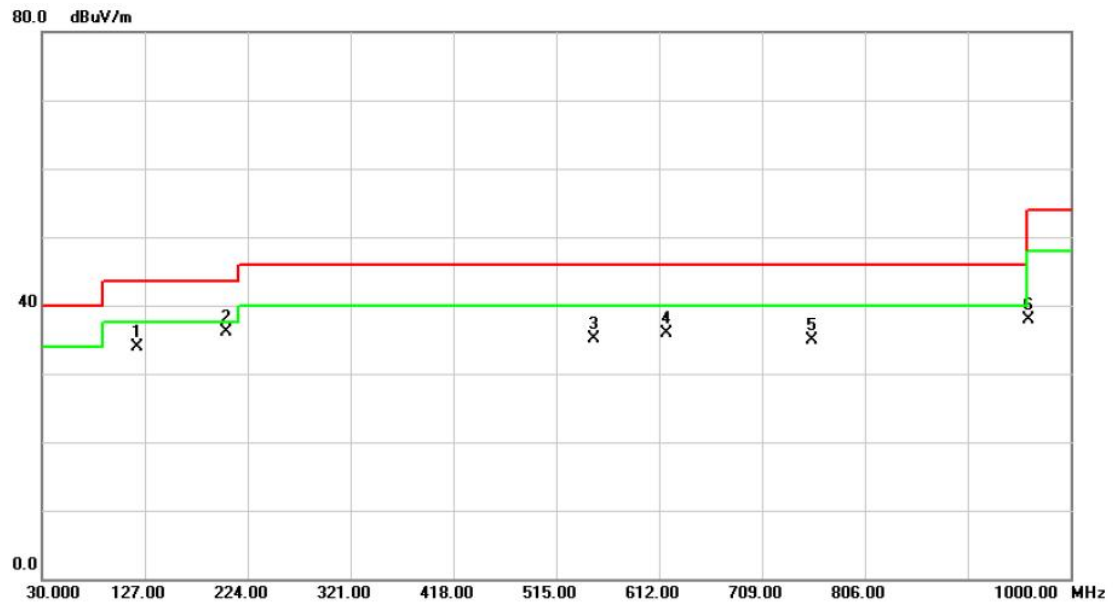

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	48.10	-14.19	33.91	43.50	-9.59	peak	
2	*	203.6300	51.21	-15.14	36.07	43.50	-7.43	peak	
3		549.9200	42.98	-7.93	35.05	46.00	-10.95	peak	
4		618.7900	42.78	-6.88	35.90	46.00	-10.10	peak	
5		756.5300	39.22	-4.40	34.82	46.00	-11.18	peak	
6		960.2300	38.23	-0.25	37.98	54.00	-16.02	peak	

Test Mode: TX B MODE CHANNEL 06

### Horizontal

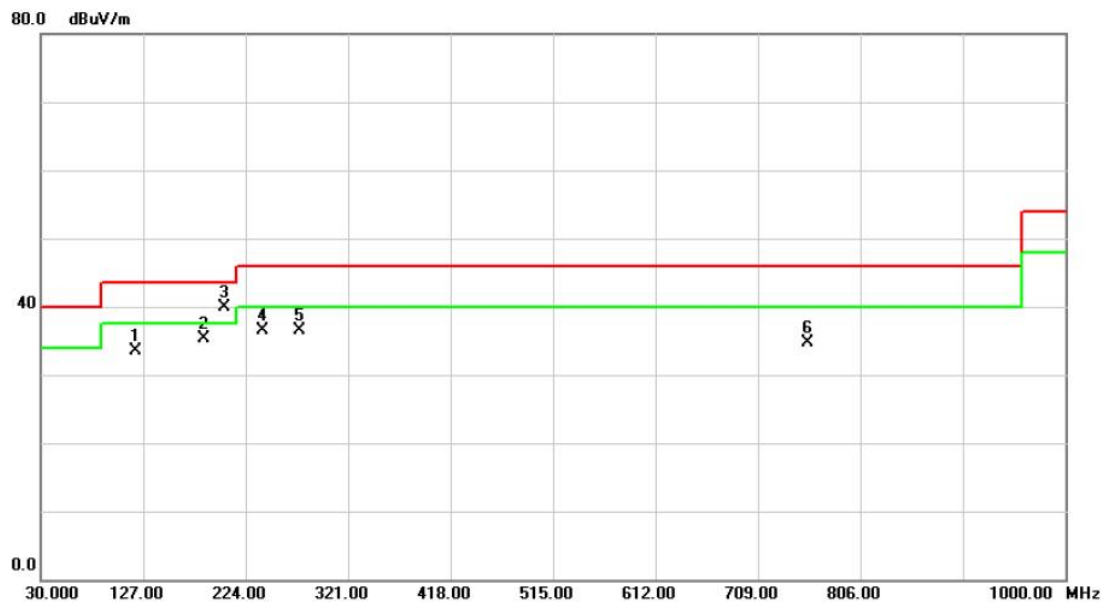


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.62	-14.19	33.43	43.50	-10.07	peak	
2		184.2300	48.95	-13.57	35.38	43.50	-8.12	peak	
3	*	203.6300	55.12	-15.14	39.98	43.50	-3.52	peak	
4		240.4900	50.52	-14.04	36.48	46.00	-9.52	peak	
5		275.4100	49.14	-12.72	36.42	46.00	-9.58	peak	
6		756.5300	39.16	-4.40	34.76	46.00	-11.24	peak	



Test Mode: TX B MODE CHANNEL 11


### Vertical

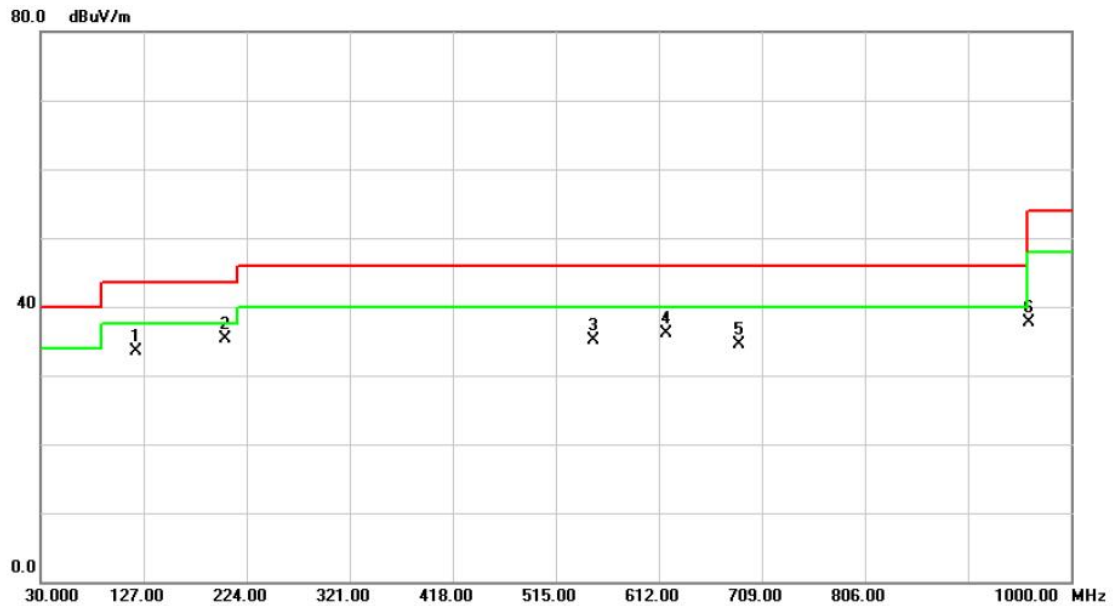

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		120.2100	47.63	-14.19	33.44	43.50	-10.06	peak	
2	*	203.6300	50.39	-15.14	35.25	43.50	-8.25	peak	
3		549.9200	42.99	-7.93	35.06	46.00	-10.94	peak	
4		618.7900	43.08	-6.88	36.20	46.00	-9.80	peak	
5		687.6600	39.53	-4.98	34.55	46.00	-11.45	peak	
6		960.2300	37.99	-0.25	37.74	54.00	-16.26	peak	

Test Mode: TX B MODE CHANNEL 11

### Horizontal

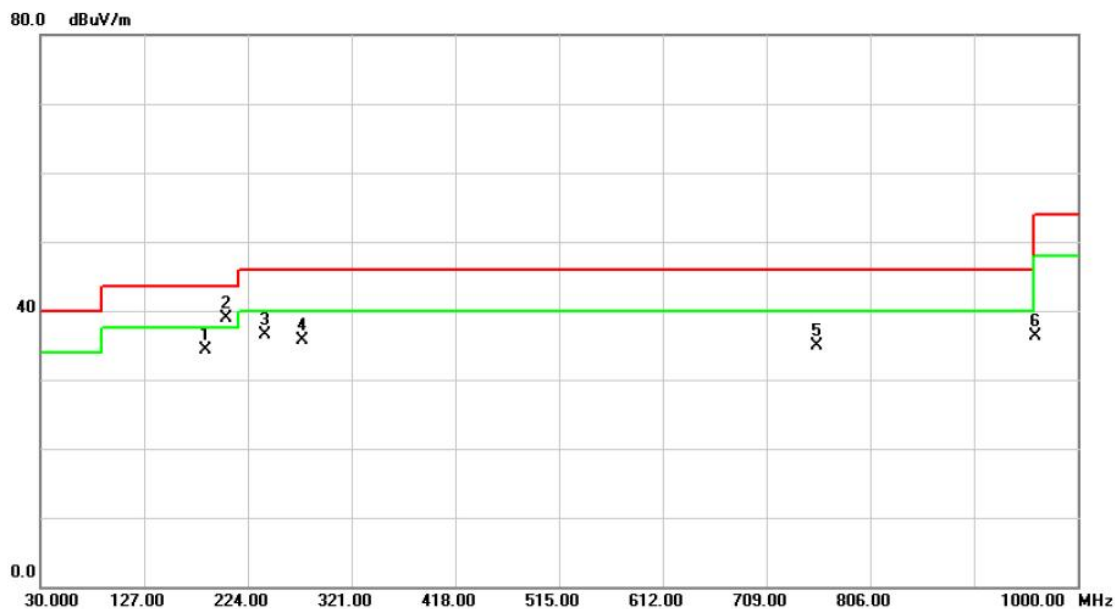


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		184.2300	47.93	-13.57	34.36	43.50	-9.14	peak	
2	*	203.6300	54.02	-15.14	38.88	43.50	-4.62	peak	
3		240.4900	50.58	-14.04	36.54	46.00	-9.46	peak	
4		275.4100	48.48	-12.72	35.76	46.00	-10.24	peak	
5		756.5300	39.36	-4.40	34.96	46.00	-11.04	peak	
6		960.2300	36.59	-0.25	36.34	54.00	-17.66	peak	

## **ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


### Vertical

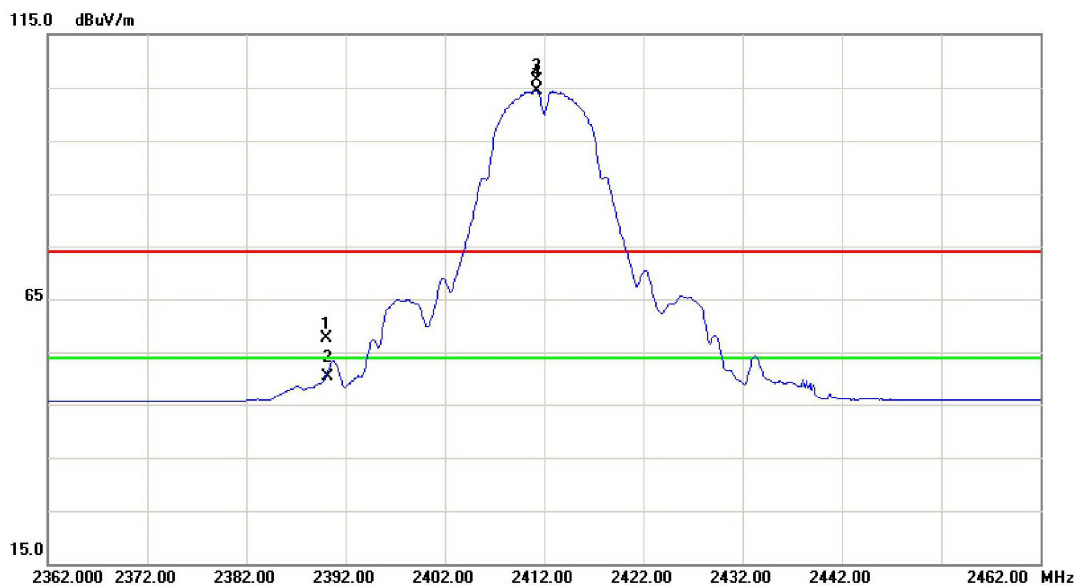

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	24.15	33.38	57.53	74.00	-16.47	peak	
2		2390.000	16.94	33.38	50.32	54.00	-3.68	AVG	
3	X	2411.200	72.93	33.44	106.37	74.00	32.37	peak	Fundamental frequency, no limit
4	*	2411.200	71.01	33.44	104.45	54.00	50.45	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


### Vertical

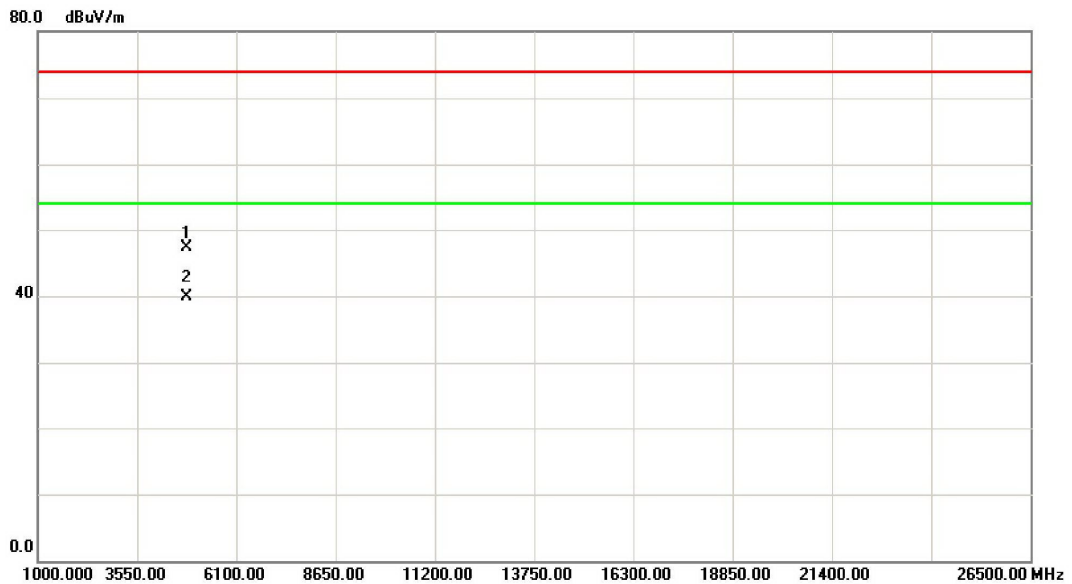

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.700	40.79	6.44	47.23	74.00	-26.77	peak	
2	*	4823.950	33.40	6.44	39.84	54.00	-14.16	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


### Horizontal

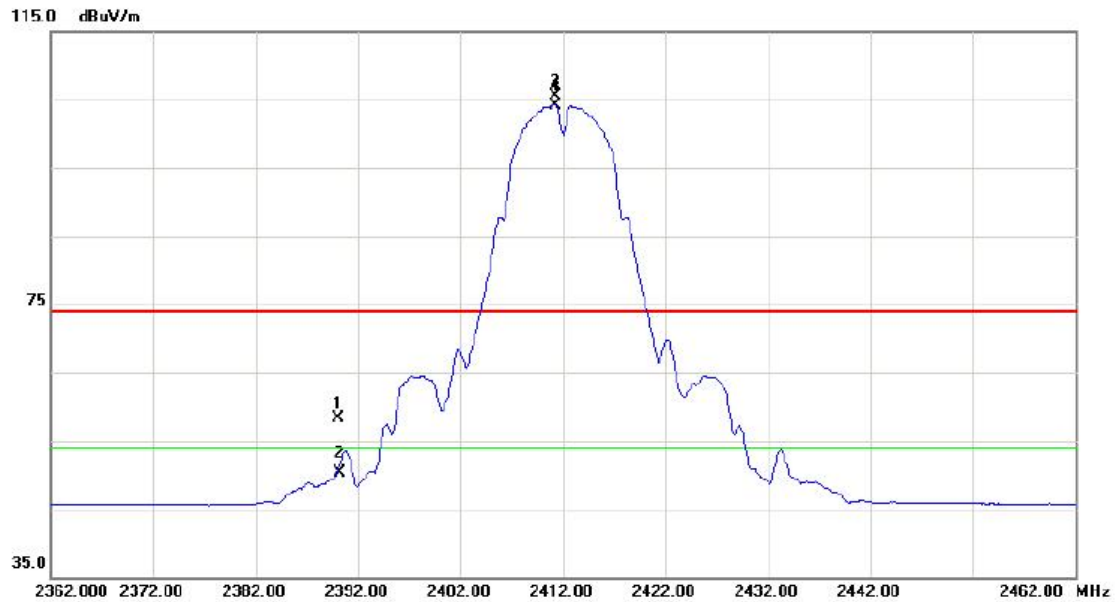

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	24.85	33.38	58.23	74.00	-15.77	peak	
2		2390.000	17.02	33.38	50.40	54.00	-3.60	AVG	
3	X	2411.200	72.04	33.44	105.48	74.00	31.48	peak	Fundamental frequency, no limit
4	*	2411.200	70.63	33.44	104.07	54.00	50.07	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


### Horizontal

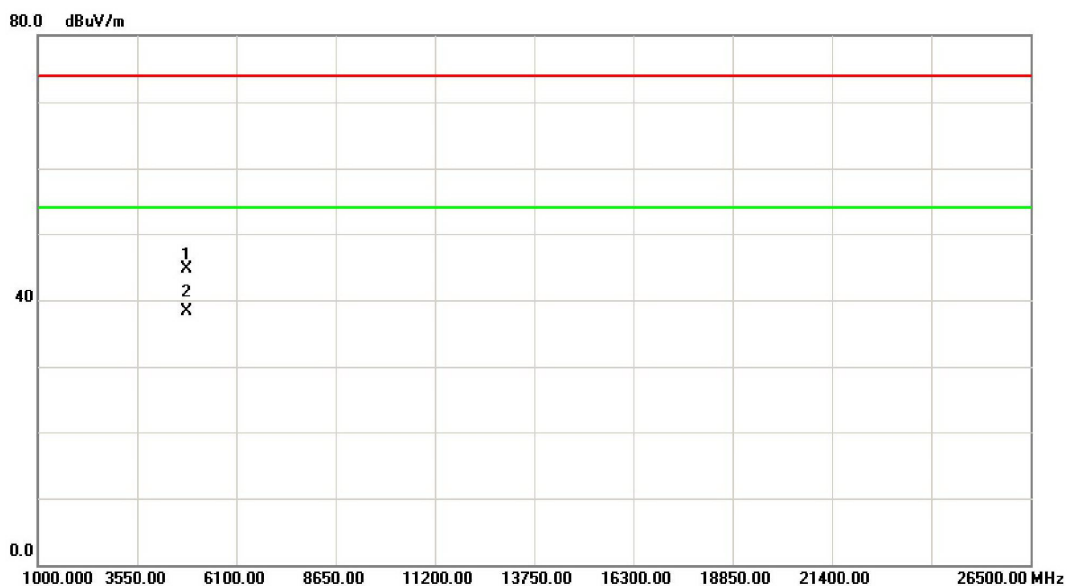

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.800	38.18	6.44	44.62	74.00	-29.38	peak	
2	*	4823.950	31.91	6.44	38.35	54.00	-15.65	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

### Vertical

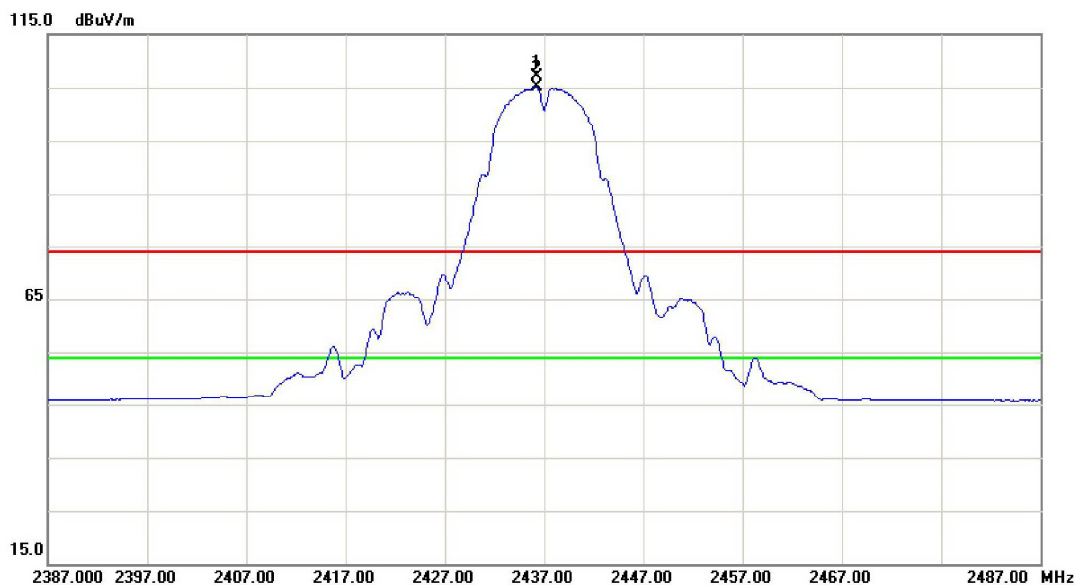


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.200	73.52	33.50	107.02	74.00	33.02	peak	Fundamental frequency, no limit
2	*	2436.200	71.61	33.50	105.11	54.00	51.11	AVG	Fundamental frequency, no limit



Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


### Vertical

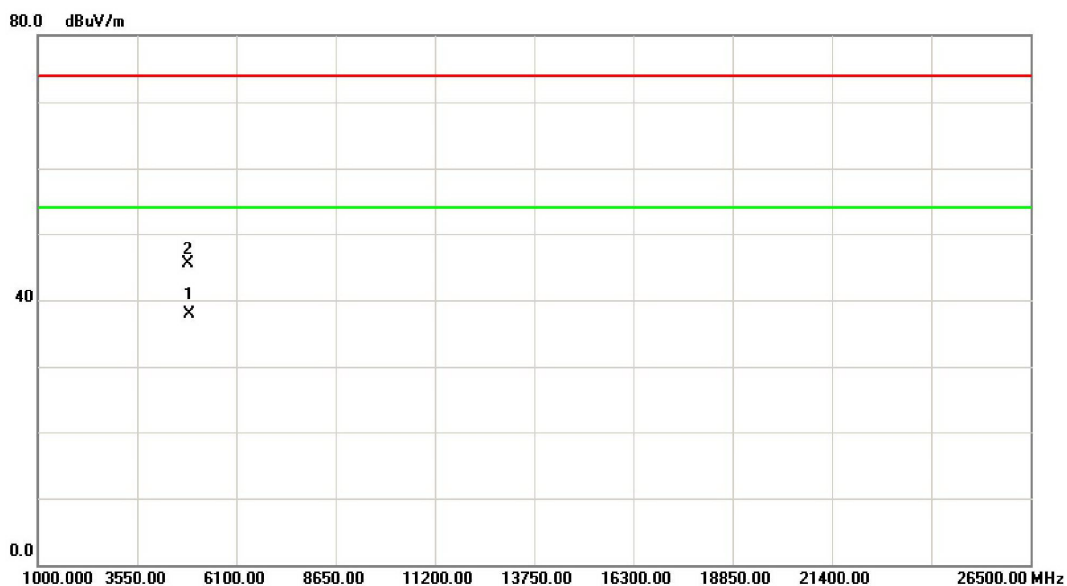

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4873.950	31.29	6.55	37.84	54.00	-16.16	AVG	
2		4874.080	39.03	6.55	45.58	74.00	-28.42	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


### Horizontal

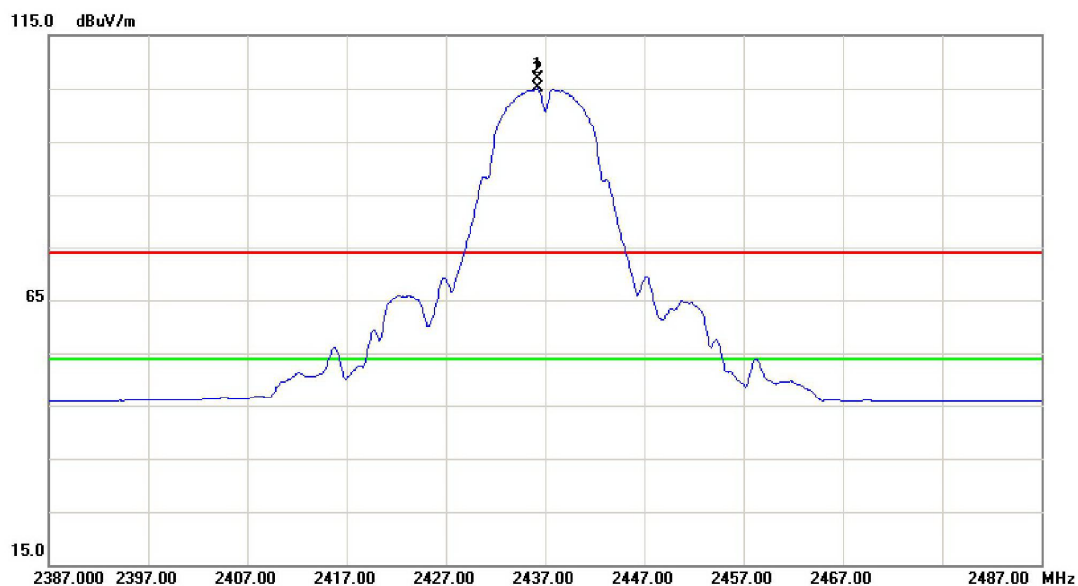

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.200	73.44	33.50	106.94	74.00	32.94	peak	Fundamental frequency, no limit
2	*	2436.200	71.51	33.50	105.01	54.00	51.01	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


### Horizontal

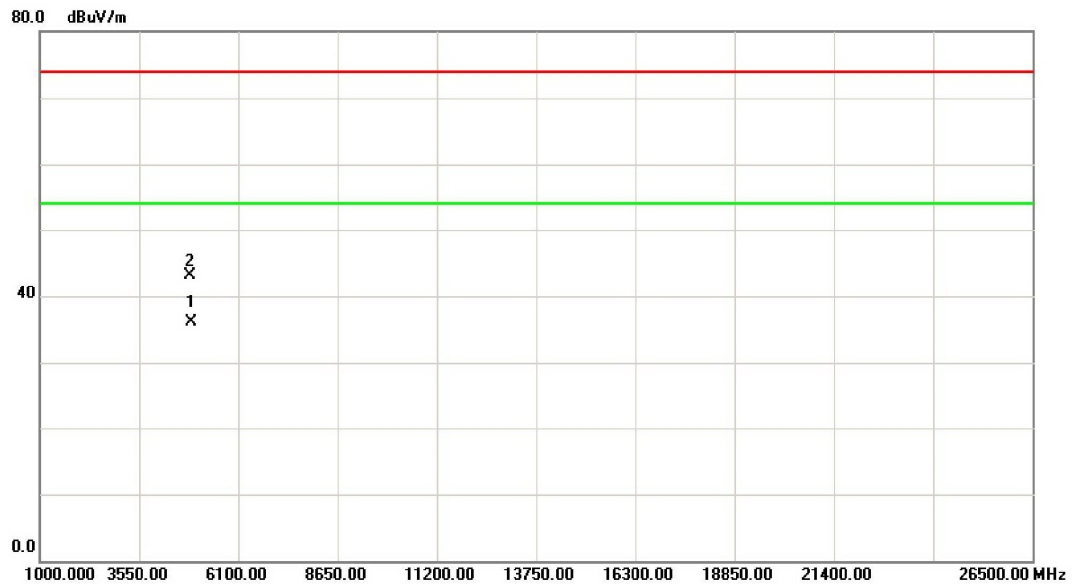

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4873.960	29.51	6.55	36.06	54.00	-17.94	AVG	
2		4874.100	36.60	6.55	43.15	74.00	-30.85	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

### Vertical

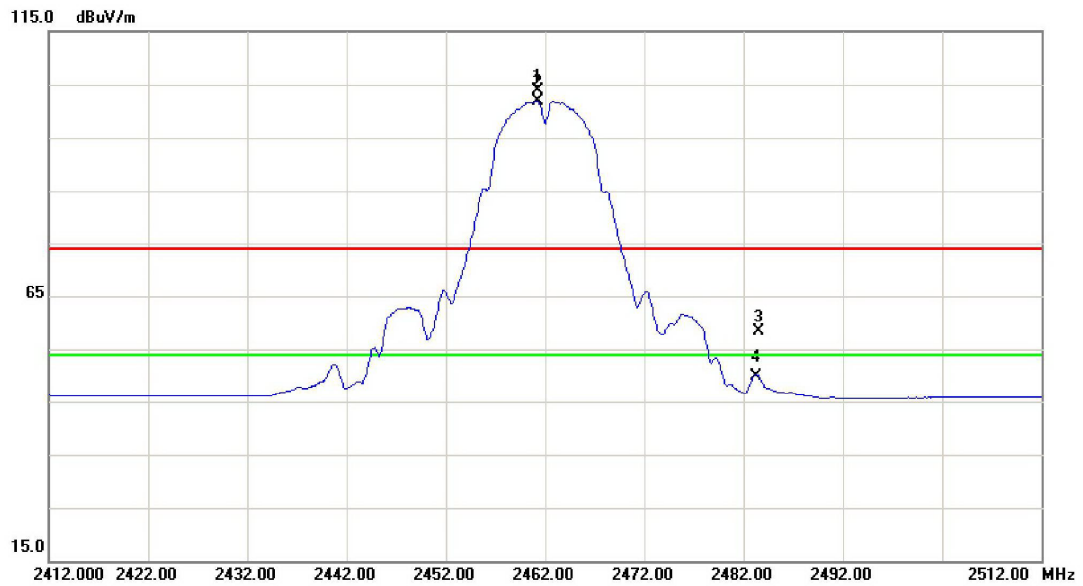

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.200	70.43	33.56	103.99	74.00	29.99	peak	Fundamental frequency, no limit
2	*	2461.200	68.43	33.56	101.99	54.00	47.99	AVG	Fundamental frequency, no limit
3		2483.500	24.66	33.62	58.28	74.00	-15.72	peak	
4		2483.500	16.38	33.62	50.00	54.00	-4.00	AVG	