



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	ZyXEL Communications Corporation
Applicant Address	No.2, Gongye E. 9th Road, Hsinchu Science Park, Hsinchu, Taiwan
FCC ID	I88C2100Z
Manufacturer's company (1)	MitraStar Technology Corporation
Manufacturer Address	No. 6, Innovation Rd II, Hsinchu Science Park, Hsinchu 30076, Taiwan
Manufacturer's company (2)	WuXi MitraStar Technology Co. Ltd
Manufacturer Address	60#-E, Minshan Road, Wuxi New district Jangsu, P.R.C.

Product Name	Dual-Band Wireless AC/N VDSL2 4-port Bonding Combo Wan IAD with HPNA3.1
Brand Name	ZyXEL
Model No.	C2100Z, VMG4825-B10A, VMG9823-B10A
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Aug. 12, 2015
Final Test Date	Oct. 13, 2015
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Multiple Listing.....	8
3.8. Table for Supporting Units	9
3.9. Table for Parameters of Test Software Setting	10
3.10. EUT Operation during Test	10
3.11. Duty Cycle	10
3.12. Test Configurations	11
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Power Measurement.....	18
4.3. Power Spectral Density Measurement	21
4.4. 6dB Spectrum Bandwidth Measurement	29
4.5. Radiated Emissions Measurement	39
4.6. Emissions Measurement	64
4.7. Antenna Requirements	90
5. LIST OF MEASURING EQUIPMENTS	91
6. MEASUREMENT UNCERTAINTY.....	92
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR581406AA	Rev. 01	Initial issue of report.	Dec. 08, 2015
FR581406AA	Rev. 02	Revising the FCC ID.	Dec. 28, 2015



1. VERIFICATION OF COMPLIANCE

Product Name : Dual-Band Wireless AC/N VDSL2 4-port Bonding Combo Wan IAD with HPNA3.1
Brand Name : ZyxEL
Model No. : C2100Z, VMG4825-B10A, VMG9823-B10A
Applicant : ZyxEL Communications Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 12, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.47 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	2.58 dB
4.3	15.247(e)	Power Spectral Density	Complies	5.75 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.83 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.04 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	IEEE 802.11b: WLAN (1TX, 1RX) IEEE 802.11g: WLAN (1TX, 1RX) IEEE 802.11n: WLAN (1TX, 1RX / 2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	1TX (Chain 5) IEEE 802.11b: 10.42 MHz IEEE 802.11g: 17.19 MHz IEEE 802.11n MCS0 (HT20): 18.06 MHz IEEE 802.11n MCS0 (HT40): 36.47 MHz 2TX (Chain 5 + Chain 6) IEEE 802.11n MCS8 (HT20): 18.00 MHz IEEE 802.11n MCS8 (HT40): 36.40 MHz
Maximum Conducted Output Power	1TX (Chain 5) IEEE 802.11b: 26.56 dBm IEEE 802.11g: 25.83 dBm IEEE 802.11n MCS0 (HT20): 24.93 dBm IEEE 802.11n MCS0 (HT40): 20.82 dBm 2TX (Chain 5 + Chain 6) IEEE 802.11n MCS8 (HT20): 27.42 dBm IEEE 802.11n MCS8 (HT40): 22.64 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for 802.11n/ac in 5GHz band.	

Antenna and Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11b	V	X	X	X
IEEE 802.11g	V	X	X	X
IEEE 802.11n	V	V	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7
802.11n (HT40)	1	MCS 0-7
802.11n (HT20)	2	MCS 8-15
802.11n (HT40)	2	MCS 8-15
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n		

3.2. Accessories

Power	Brand	Model	Rating
AC Power Adapter	DVE	DSA-36PFH-12 FUS	Input: 100-240Vac, 50/60Hz, 1A Output: 12Vdc, 3A
Others			
Ethernet cable	1.8 meter, non-shielded, w/o ferrite core		
Phone cable	3.66 meter, non-shielded, w/o ferrite core (For Model No.: C2100Z)		
Phone cable	1.8 meter, non-shielded, w/o ferrite core (For Model No.: VMG4825-B10A, VMG9823-B10A)		

3.3. Table for Filed Antenna

Ant.	Brand	Part No.	Type	Connector	Gain (dBi)	Cable Length (mm)	Remark
1	AIRGAIN	N5X20B-T-PK1-B125U N5X20B-TP-PK1-B125U	PCB	I-PEX	3.4	125	5G TX/RX
2	AIRGAIN	N5X20B-T-PK1-W85U N5X20B-TP-PK1-W85U	PCB	I-PEX	4.2	85	5G TX/RX
3	AIRGAIN	N5X20B-T-PK1-G65U N5X20B-TP-PK1-G65U	PCB	I-PEX	4.4	65	5G TX/RX
4	AIRGAIN	N5X20B-T-PK1-W85U N5X20B-TP-PK1-W85U	PCB	I-PEX	3.0	85	5G TX/RX
5	AIRGAIN	M2410CM-T2-B130S6 M2410CM-T2P-B130S6	Metal	Soldering	3.7	130	2.4G TX/RX
6	AIRGAIN	M2410CM-T2-G200S6 M2410CM-T2P-G200S6	Metal	Soldering	1.4	200	2.4G TX/RX

Note: The EUT has six antennas.

For 2.4GHz WLAN function:

For IEEE 802.11b/g/n mode (1TX/1RX):

Only Chain 5 could transmit/receive.

For IEEE 802.11n mode (2TX/2RX):


Chain 5 and Chain 6 could transmit/receive simultaneously.

For 5GHz WLAN function:

For IEEE 802.11a/n/ac mode (4TX/4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

PCB board

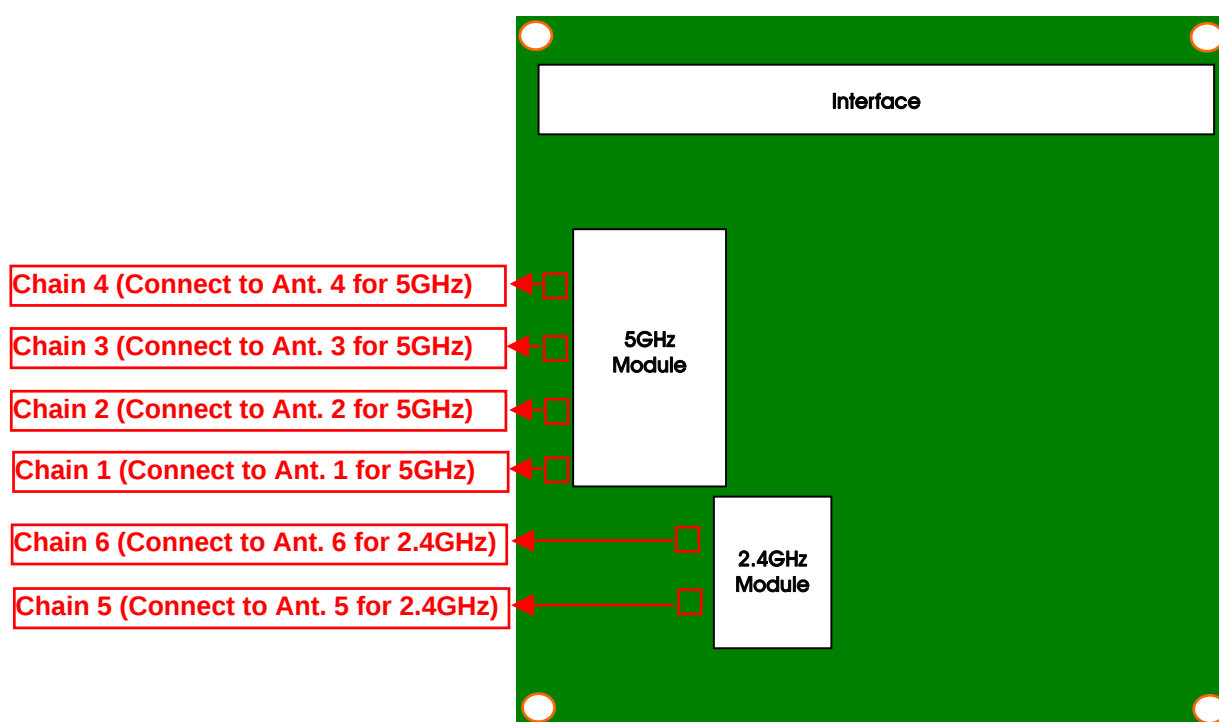

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	5
	11g/BPSK	6 Mbps	1/6/11	5
	11n HT20	MCS0	1/6/11	5
	11n HT40	MCS0	3/6/9	5
	11n HT20	MCS8	1/6/11	5+6
	11n HT40	MCS8	3/6/9	5+6
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	5
	11g/BPSK	6 Mbps	1/6/11	5
	11n HT20	MCS0	1/6/11	5
	11n HT40	MCS0	3/6/9	5
	11n HT20	MCS8	1/6/11	5+6
	11n HT40	MCS8	3/6/9	5+6
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	5
	11g/BPSK	6 Mbps	1/6/11	5
	11n HT20	MCS0	1/6/11	5
	11n HT40	MCS0	3/6/9	5
	11n HT20	MCS8	1/6/11	5+6
	11n HT40	MCS8	3/6/9	5+6
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/6/11	5
	11g/BPSK	6 Mbps	1/6/11	5
	11n HT20	MCS0	1/6/11	5
	11n HT40	MCS0	3/6/9	5
	11n HT20	MCS8	1/6/11	5+6
	11n HT40	MCS8	3/6/9	5+6

Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	5
	11g/BPSK	6 Mbps	1/6/11	5
	11n HT20	MCS0	1/6/11	5
	11n HT40	MCS0	3/6/9	5
	11n HT20	MCS8	1/6/11	5+6
	11n HT40	MCS8	3/6/9	5+6

Note: 1. The EUT can only be used at Y axis position.

2. The test configuration, test mode and test software were written in this test report are designated by the applicant.

The following test modes were performed for all tests:

For Co-location MPE and Radiated Emission Co-location test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA581406) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The EUT has three model numbers which are identical to each other in all aspects except for the following table:

Model No.	Interface							
	WAN	LAN	DSL	FXS	HPNA	USB	Wi-Fi 2.4GHz 2×2	Wi-Fi 5GHz 4×4
C2100Z	×1	×4	×1	×2	×1	×1	V	V
VMG9823-B10A	×1	×4	×1	×2	-	×1	V	V
VMG4825-B10A	×1	×4	×1	-	-	×1	V	V

Only the most complex mode for Model No.: C2100Z was performed for all the tests and recorded in this report.

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (below 1 GHz)

Support Unit	Brand	Model	FCC ID
NB*6	DELL	E4300	DoC
VDSL (Terminal System)	ZYXEL	VES1724-56	N/A
HPNA (Terminal System)	VIVO	HGW-2501	N/A
Flash Disk	Silicon Power	B06	DoC
Phone	PHILIPS	M20	N/A
Phone	PHILIPS	M20	N/A

For Test Site No: 03CH01-CB (above 1GHz) and TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*6	DELL	E6430	DoC
VDSL (Terminal System)	ZYXEL	VES1724-56	N/A
HPNA (Terminal System)	VIVO	HGW-2501	N/A
Flash Disk	Transcend	639205 7755	DoC
Phone	PHILIPS	M20	N/A
Phone	PHILIPS	M20	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Mtool 2.0.1.5					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b / Chain 5	97	100	99	-	-	-
802.11g / Chain 5	80	101	89	-	-	-
802.11n MCS0 HT20 / Chain 5	72	97	86	-	-	-
802.11n MCS0 HT40 / Chain 5	-	-	-	63	80	80
802.11n MCS8 HT20 / Chain 5 + Chain 6	67	96	79	-	-	-
802.11n MCS8 HT40 / Chain 5 + Chain 6	-	-	-	55	74	74

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+ Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b / Chain 5	1.000	1.000	100.00	0.00	0.01
802.11g / Chain 5	2.060	2.100	98.10	0.08	0.01
802.11n MCS0 HT20 / Chain 5	1.920	1.960	97.96	1.02	0.52
802.11n MCS0 HT40 / Chain 5	0.920	0.980	93.88	0.27	1.09
802.11n MCS8 HT20 / Chain 5 + Chain 6	0.972	1.008	96.43	1.04	1.03
802.11n MCS8 HT40 / Chain 5 + Chain 6	0.465	0.537	86.59	0.63	2.15

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

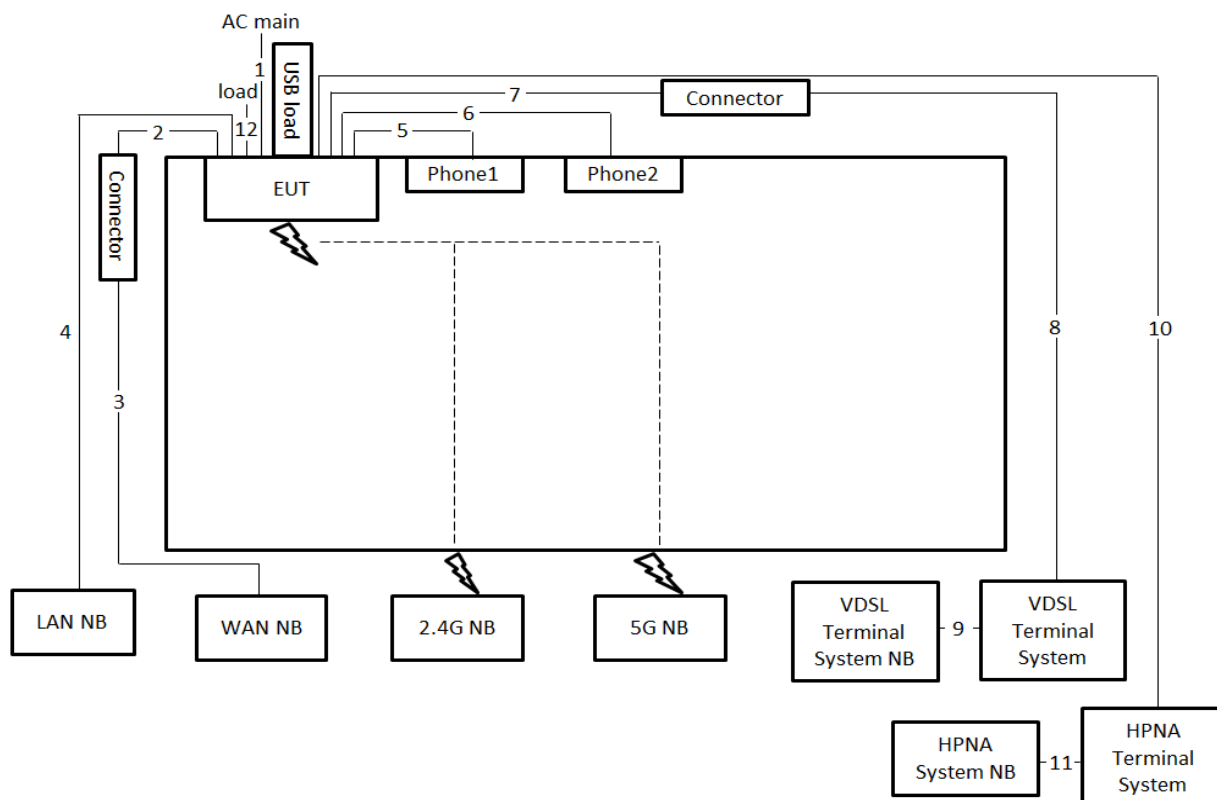

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Ethernet cable	No	1.8m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-11 cable	No	1.5m
6	RJ-11 cable	No	1.5m
7	Phone cable	No	3.66m
8	RJ-11 cable	No	10m
9	RJ-45 cable	No	1.5m
10	Coaxial cable	Yes	10m
11	RJ-45 cable	No	1.5m
12	RJ-45 cable*3	No	1.5m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

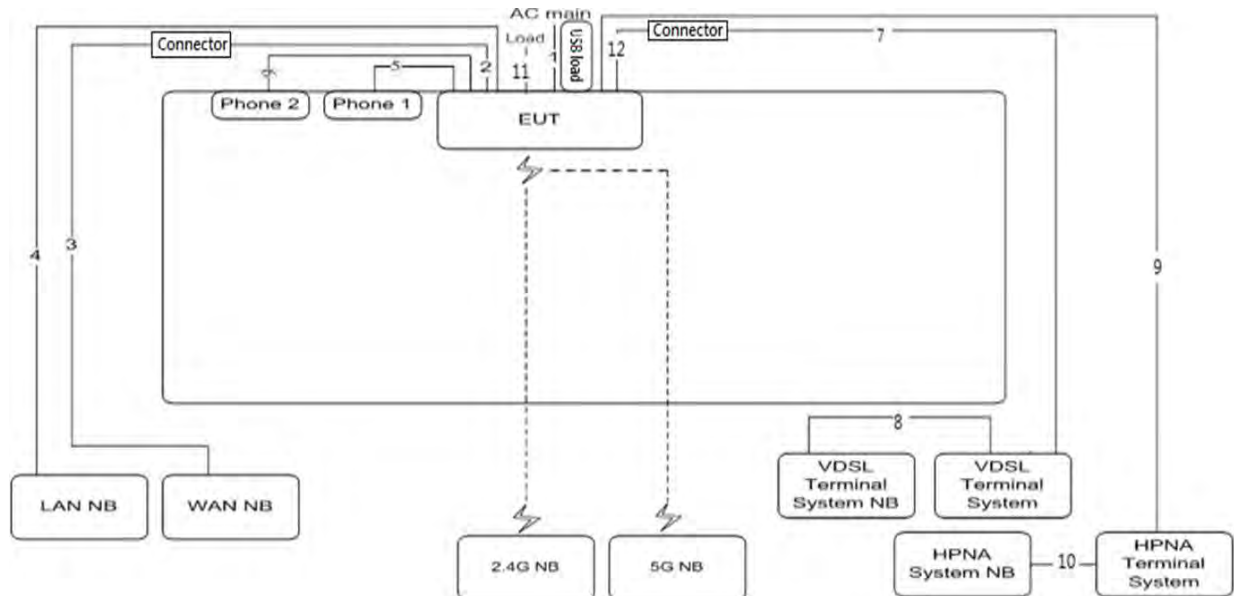

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Ethernet cable	No	1.8m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-11 cable	No	1.5m
6	RJ-11 cable	No	1.5m
7	RJ-11 cable	No	10m
8	RJ-45 cable	No	1.5m
9	Coaxial cable	Yes	10m
10	RJ-45 cable	No	1.5m
11	RJ-45 cable*3	No	1.5m
12	Phone cable	No	3.66m

Test Configuration: above 1GHz

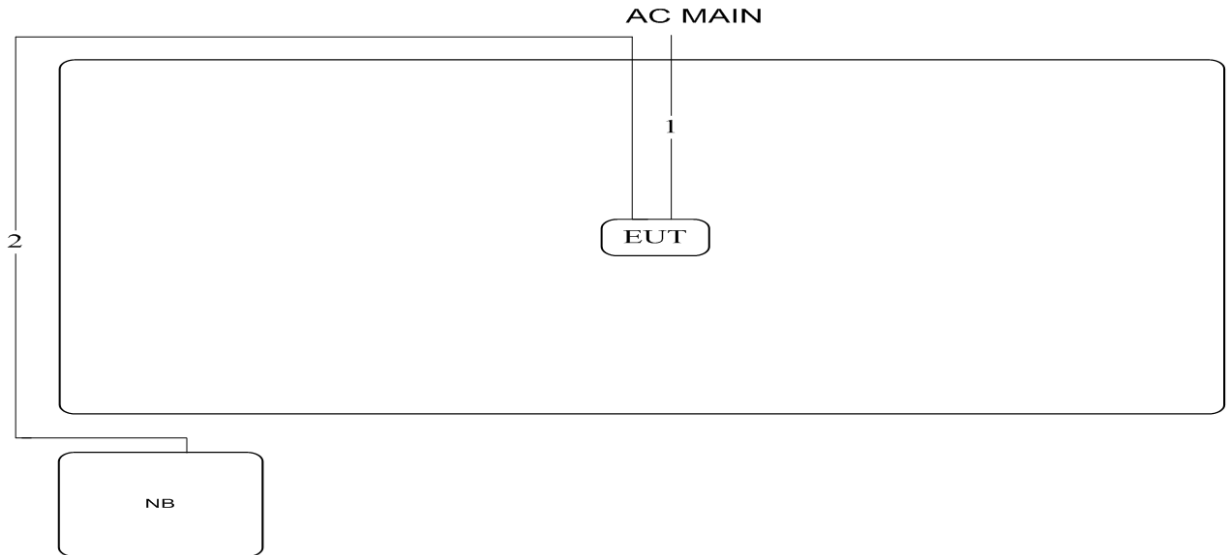

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

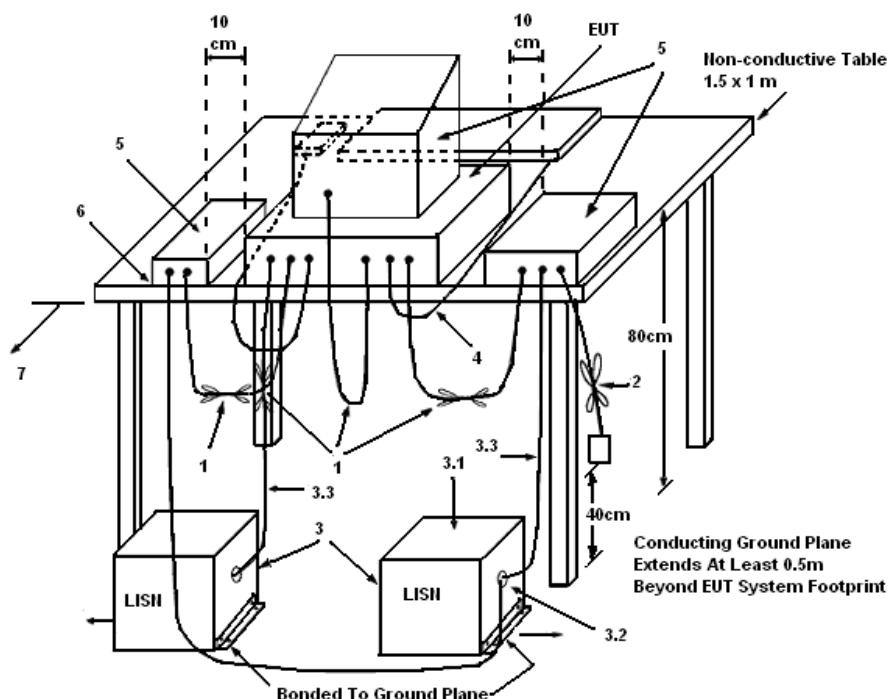

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	66%
Test Engineer	Hank Yang	Phase	Line
Configuration	Normal Link		

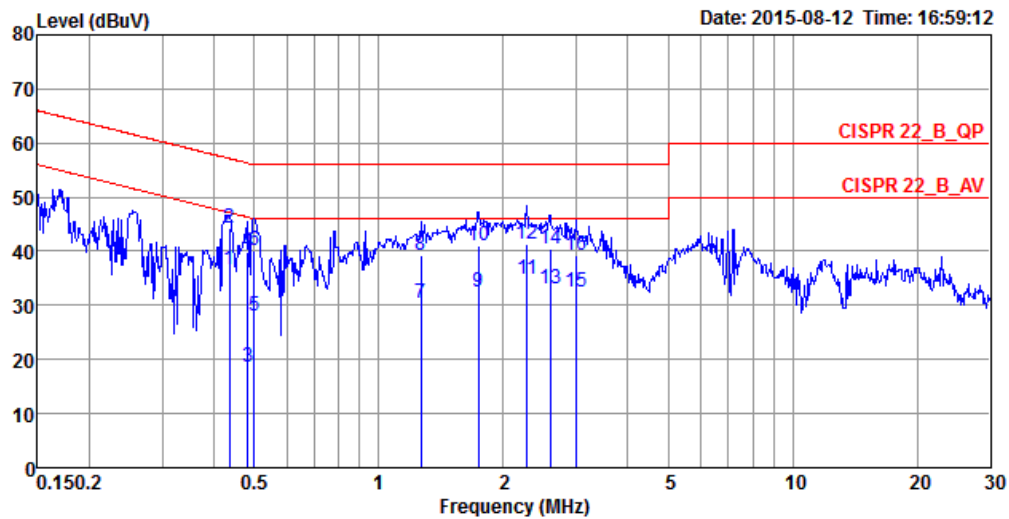

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.4351	36.68	-10.47	47.15	26.71	9.93	0.04	LINE	Average
2	0.4351	44.28	-12.87	57.15	34.31	9.93	0.04	LINE	QP
3	0.4837	18.72	-27.55	46.27	8.74	9.94	0.04	LINE	Average
4	0.4837	39.95	-16.32	56.27	29.97	9.94	0.04	LINE	QP
5	0.4994	27.92	-18.09	46.01	17.94	9.94	0.04	LINE	Average
6	0.4994	40.02	-15.99	56.01	30.04	9.94	0.04	LINE	QP
7	1.2621	30.55	-15.45	46.00	20.53	9.97	0.05	LINE	Average
8	1.2621	39.34	-16.66	56.00	29.32	9.97	0.05	LINE	QP
9	1.7437	32.44	-13.56	46.00	22.40	9.98	0.06	LINE	Average
10	1.7437	41.09	-14.91	56.00	31.05	9.98	0.06	LINE	QP
11	2.2847	34.92	-11.08	46.00	24.86	10.00	0.06	LINE	Average
12	2.2847	41.23	-14.77	56.00	31.17	10.00	0.06	LINE	QP
13	2.5945	32.96	-13.04	46.00	22.91	10.00	0.05	LINE	Average
14	2.5945	40.30	-15.70	56.00	30.25	10.00	0.05	LINE	QP
15	2.9935	32.40	-13.60	46.00	22.34	10.01	0.05	LINE	Average
16	2.9935	39.14	-16.86	56.00	29.08	10.01	0.05	LINE	QP

Temperature	23°C	Humidity	66%
Test Engineer	Hank Yang	Phase	Neutral
Configuration	Normal Link		

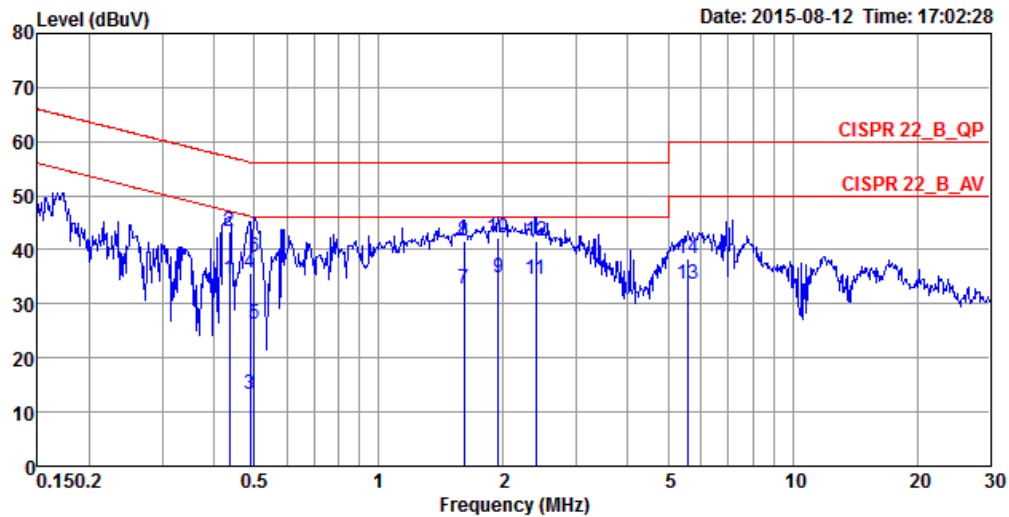

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.4351	34.61	-12.54	47.15	24.78	9.79	0.04	NEUTRAL	Average
2	0.4351	43.50	-13.65	57.15	33.67	9.79	0.04	NEUTRAL	QP
3	0.4889	13.35	-32.84	46.19	3.52	9.79	0.04	NEUTRAL	Average
4	0.4889	35.58	-20.61	56.19	25.75	9.79	0.04	NEUTRAL	QP
5	0.4994	26.26	-19.75	46.01	16.43	9.79	0.04	NEUTRAL	Average
6	0.4994	38.59	-17.42	56.01	28.76	9.79	0.04	NEUTRAL	QP
7	1.6105	32.68	-13.32	46.00	22.79	9.83	0.06	NEUTRAL	Average
8	1.6105	41.76	-14.24	56.00	31.87	9.83	0.06	NEUTRAL	QP
9	1.9489	34.69	-11.31	46.00	24.79	9.84	0.06	NEUTRAL	Average
10	1.9489	42.35	-13.65	56.00	32.45	9.84	0.06	NEUTRAL	QP
11	2.3962	34.42	-11.58	46.00	24.51	9.85	0.06	NEUTRAL	Average
12	2.3962	41.63	-14.37	56.00	31.72	9.85	0.06	NEUTRAL	QP
13	5.5936	33.61	-16.39	50.00	23.57	9.92	0.12	NEUTRAL	Average
14	5.5936	38.25	-21.75	60.00	28.21	9.92	0.12	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

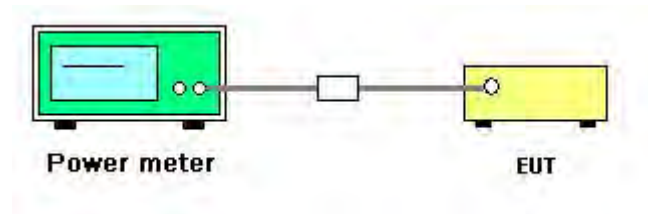

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Serway Li	Test Date	Sep. 07, 2015

Mode	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 5		
802.11b	2412 MHz	25.68	30.00	Complies
	2437 MHz	26.56	30.00	Complies
	2462 MHz	26.34	30.00	Complies
802.11g	2412 MHz	21.18	30.00	Complies
	2437 MHz	25.83	30.00	Complies
	2462 MHz	22.96	30.00	Complies
802.11n MCS0 HT20	2412 MHz	19.32	30.00	Complies
	2437 MHz	24.93	30.00	Complies
	2462 MHz	22.33	30.00	Complies
802.11n MCS0 HT40	2422 MHz	16.34	30.00	Complies
	2437 MHz	20.82	30.00	Complies
	2452 MHz	20.73	30.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Serway Li / Roki Liu	Test Date	Sep. 07, 2015

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 5	Chain 6	Total		
802.11n MCS0 HT20	2412 MHz	17.90	17.85	20.89	30.00	Complies
	2437 MHz	24.64	24.16	27.42	30.00	Complies
	2462 MHz	20.53	20.40	23.48	30.00	Complies
802.11n MCS0 HT40	2422 MHz	14.29	14.61	17.46	30.00	Complies
	2437 MHz	19.58	19.65	22.63	30.00	Complies
	2452 MHz	19.26	19.97	22.64	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

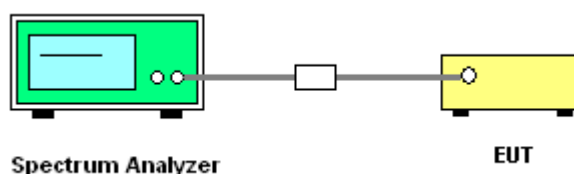

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Serway Li		

Mode	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
		Chain 5		
802.11b	2412 MHz	1.65	8.00	Complies
	2437 MHz	2.25	8.00	Complies
	2462 MHz	1.99	8.00	Complies
802.11g	2412 MHz	-4.08	8.00	Complies
	2437 MHz	-2.23	8.00	Complies
	2462 MHz	-4.41	8.00	Complies
802.11n MCS0 HT20	2412 MHz	-6.62	8.00	Complies
	2437 MHz	-3.22	8.00	Complies
	2462 MHz	-4.81	8.00	Complies
802.11n MCS0 HT40	2422 MHz	-13.47	8.00	Complies
	2437 MHz	-10.33	8.00	Complies
	2452 MHz	-10.64	8.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Serway Li / Roki Liu		


Mode	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 5	Chain 6	Total		
802.11n MCS8 HT20	2412 MHz	-8.13	-8.61	-5.35	8.00	Complies
	2437 MHz	-3.71	-3.00	-0.33	8.00	Complies
	2462 MHz	-7.02	-6.64	-3.82	8.00	Complies
802.11n MCS8 HT40	2422 MHz	-14.70	-13.82	-11.23	8.00	Complies
	2437 MHz	-12.24	-10.99	-8.56	8.00	Complies
	2452 MHz	-10.05	-10.74	-7.37	8.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 2.70\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 5 (1TX)

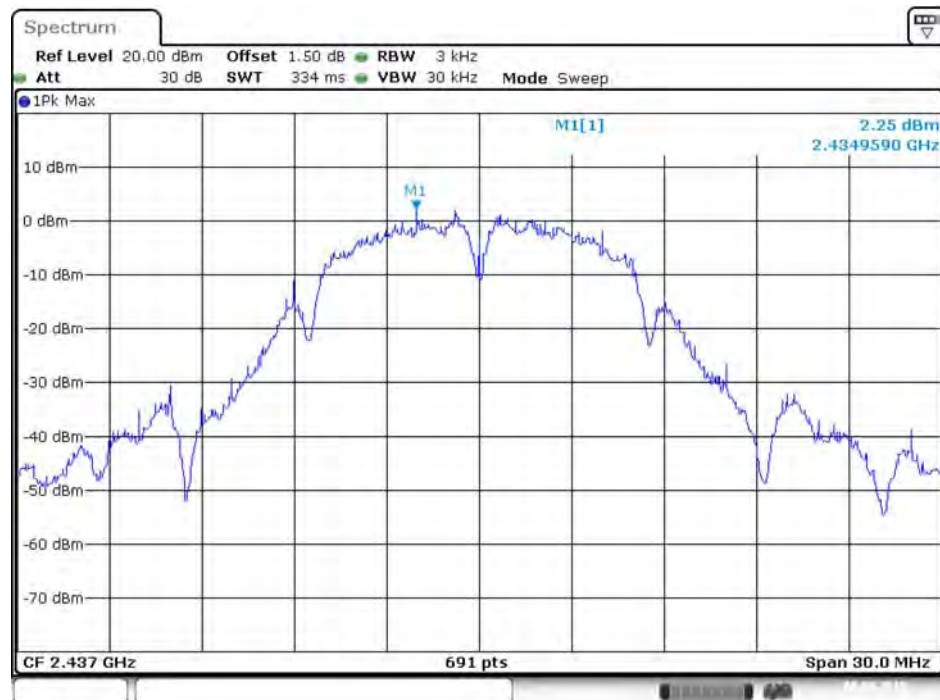


Date: 8.SEP.2015 03:54:46

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 5 (1TX)

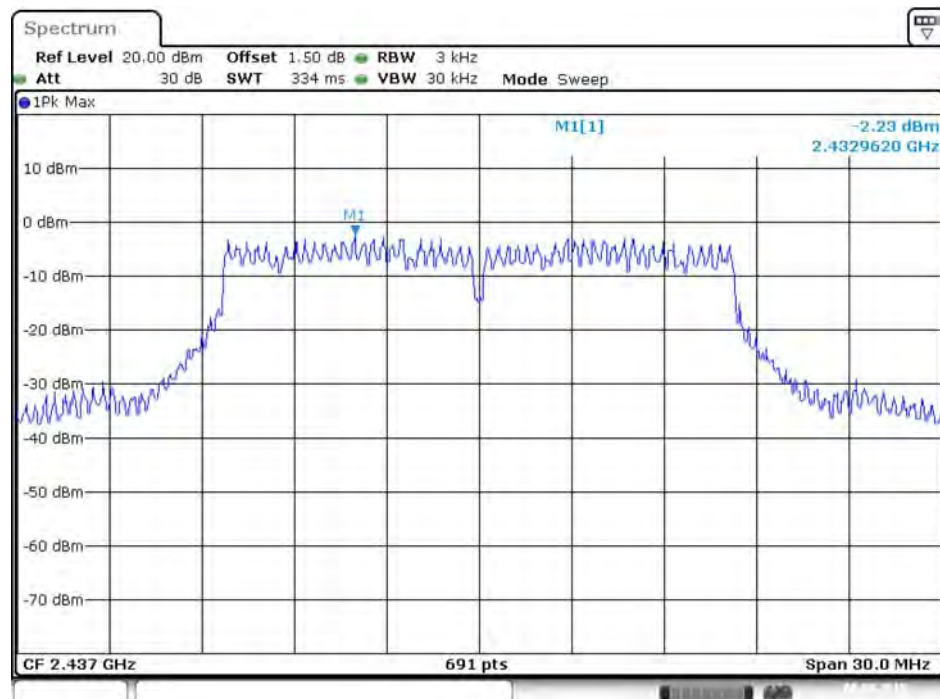


Date: 8.SEP.2015 04:05:41

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 5 (1TX)

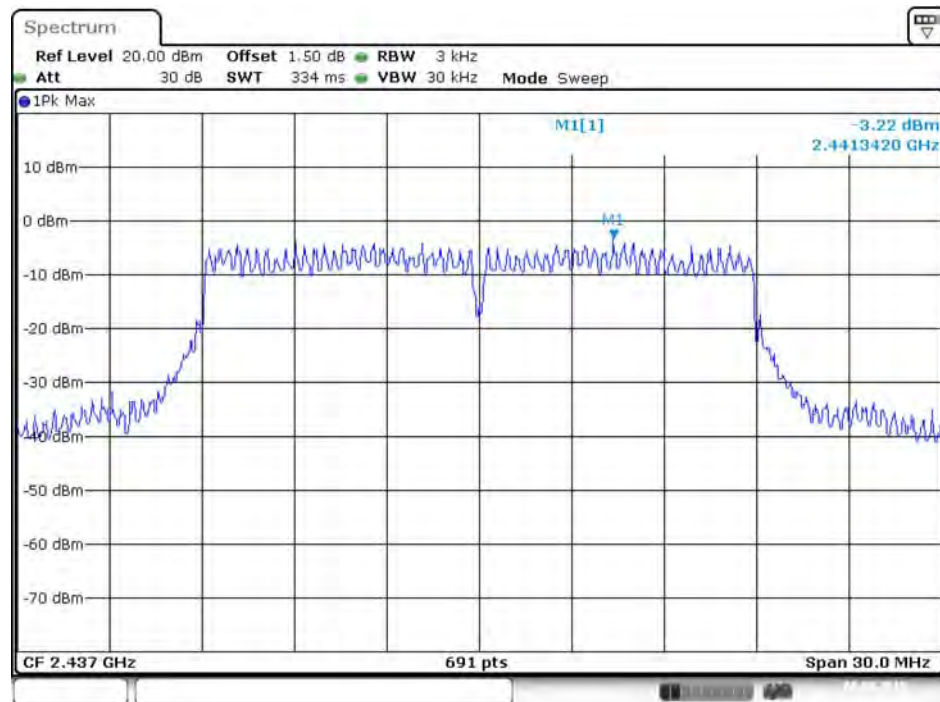


Date: 8.SEP.2015 04:10:11

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 5 (1TX)

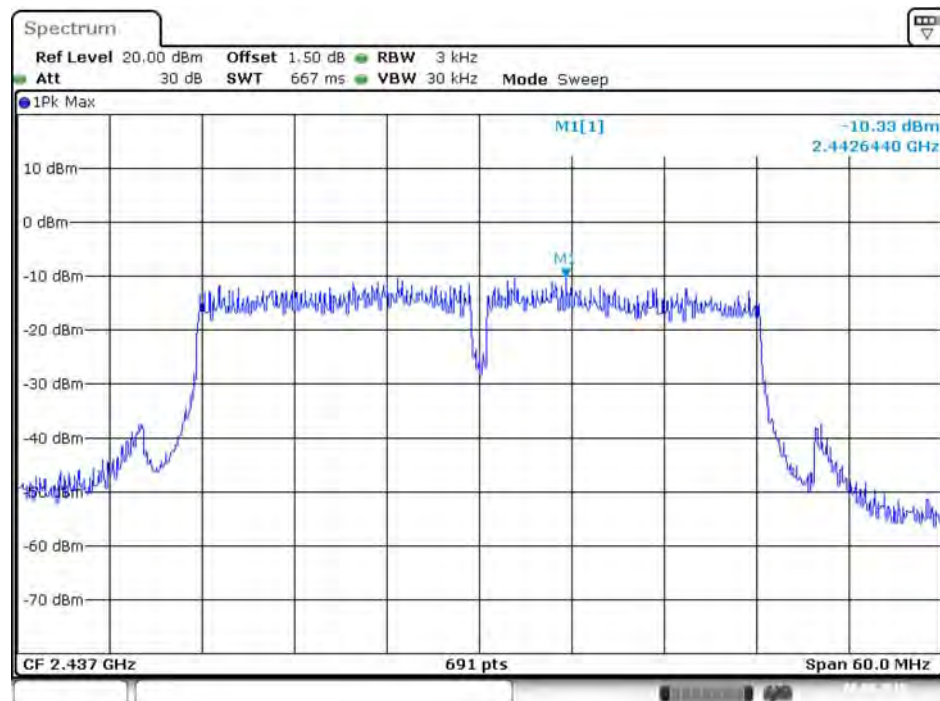


Date: 8.SEP.2015 04:14:28

Power Density Plot on Configuration IEEE 802.11n MCS8 HT20 / 2437 MHz / Chain 5 (2TX)

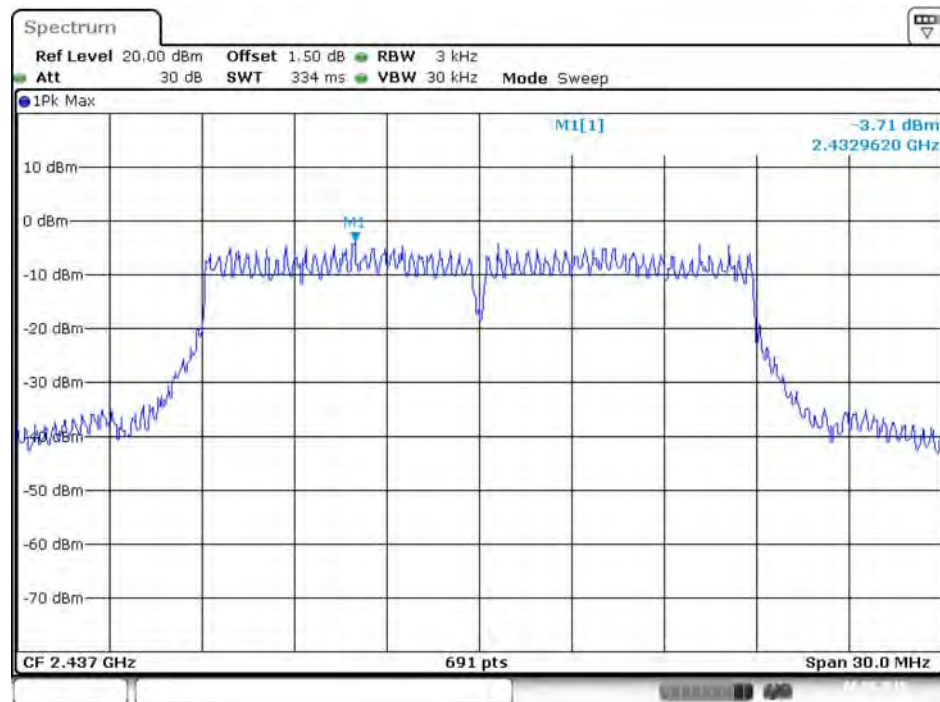


Date: 8.SEP.2015 10:01:58

Power Density Plot on Configuration IEEE 802.11n MCS8 HT20 / 2437 MHz / Chain 6 (2TX)

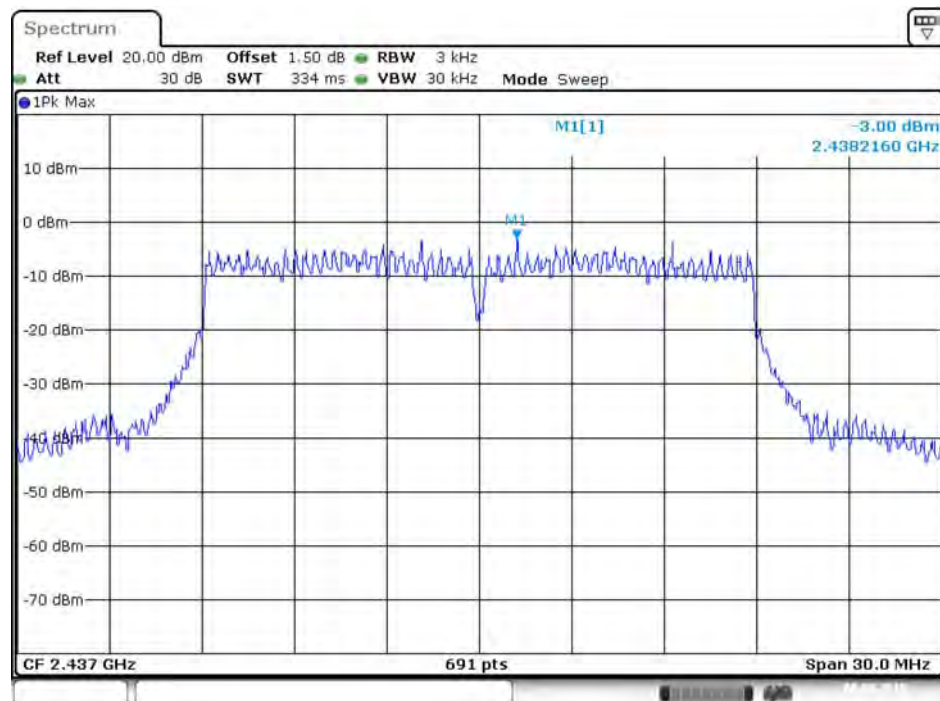


Date: 8.SEP.2015 09:59:57

Power Density Plot on Configuration IEEE 802.11n MCS8 HT40 / 2452 MHz / Chain 5 (2TX)

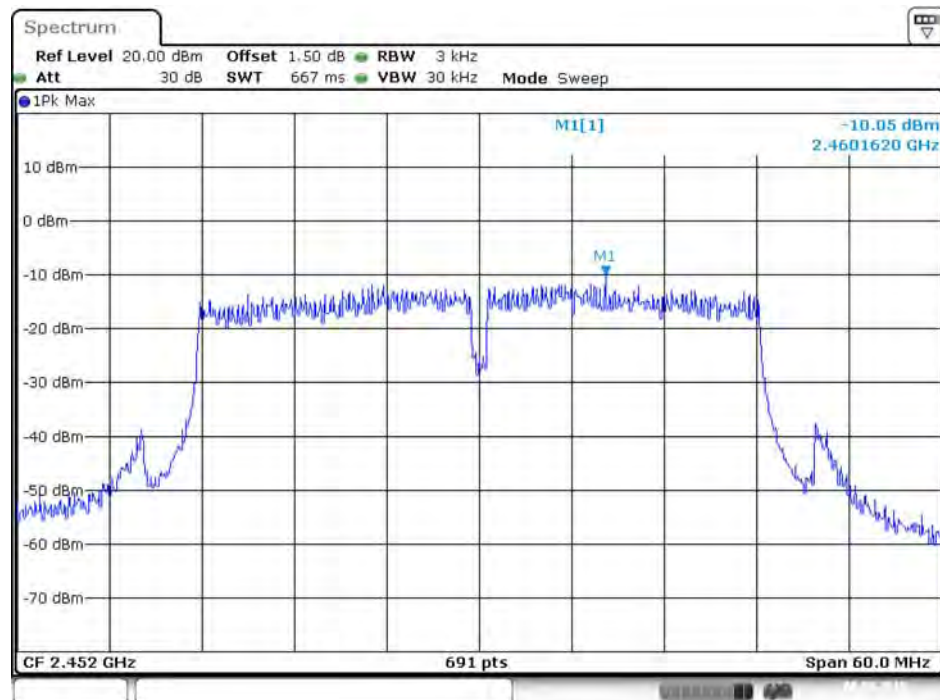

Date: 8.SEP.2015 10:11:37

Power Density Plot on Configuration IEEE 802.11n MCS8 HT40 / 2452 MHz / Chain 6 (2TX)

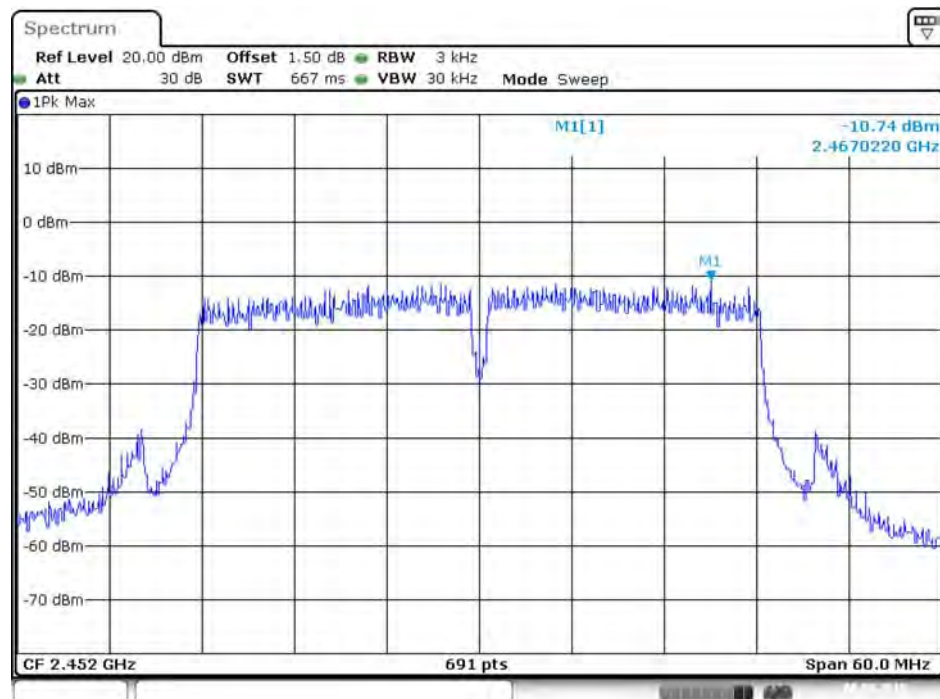

Date: 8.SEP.2015 10:10:44

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Serway Li		

Chain 5

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	8.06	10.42	500	Complies
	2437 MHz	8.06	10.42	500	Complies
	2462 MHz	8.06	10.42	500	Complies
802.11g	2412 MHz	16.41	17.02	500	Complies
	2437 MHz	16.41	17.19	500	Complies
	2462 MHz	16.46	17.11	500	Complies
802.11n MCS0 HT20	2412 MHz	17.57	18.06	500	Complies
	2437 MHz	17.57	18.06	500	Complies
	2462 MHz	17.57	17.97	500	Complies
802.11n MCS0 HT40	2422 MHz	35.36	36.47	500	Complies
	2437 MHz	35.48	36.47	500	Complies
	2452 MHz	35.36	36.32	500	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Serway Li / Roki Liu		


Chain 5 + Chain 6

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11n MCS8 HT20	2412 MHz	17.60	18.00	500	Complies
	2437 MHz	17.60	18.00	500	Complies
	2462 MHz	17.28	17.88	500	Complies
802.11n MCS8 HT40	2422 MHz	35.20	36.40	500	Complies
	2437 MHz	32.64	36.40	500	Complies
	2452 MHz	32.64	36.40	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 5

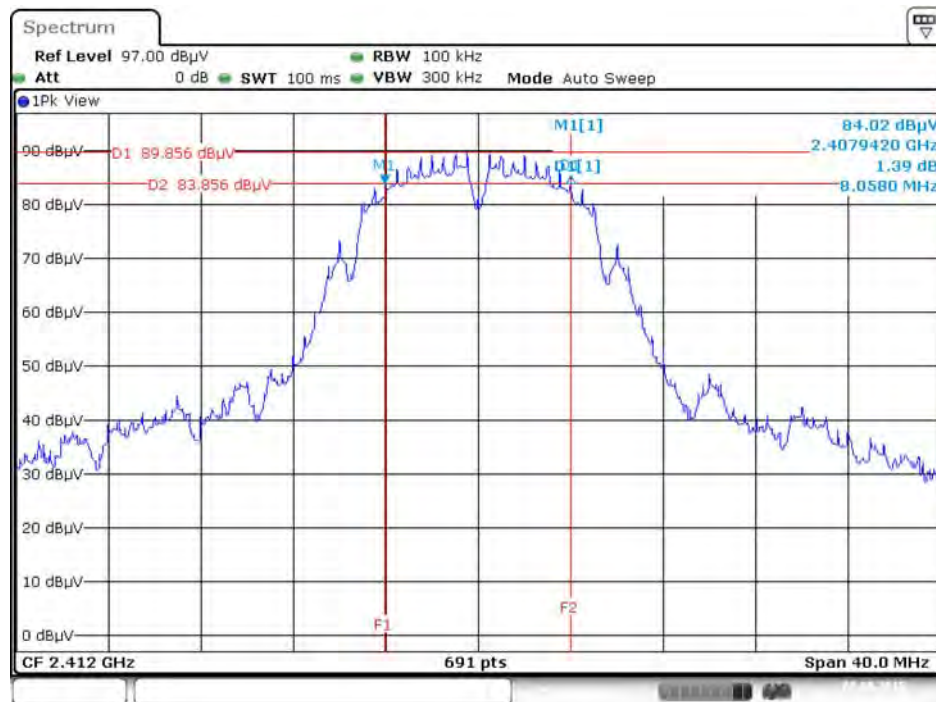


Date: 8.SEP.2015 02:47:54

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 5

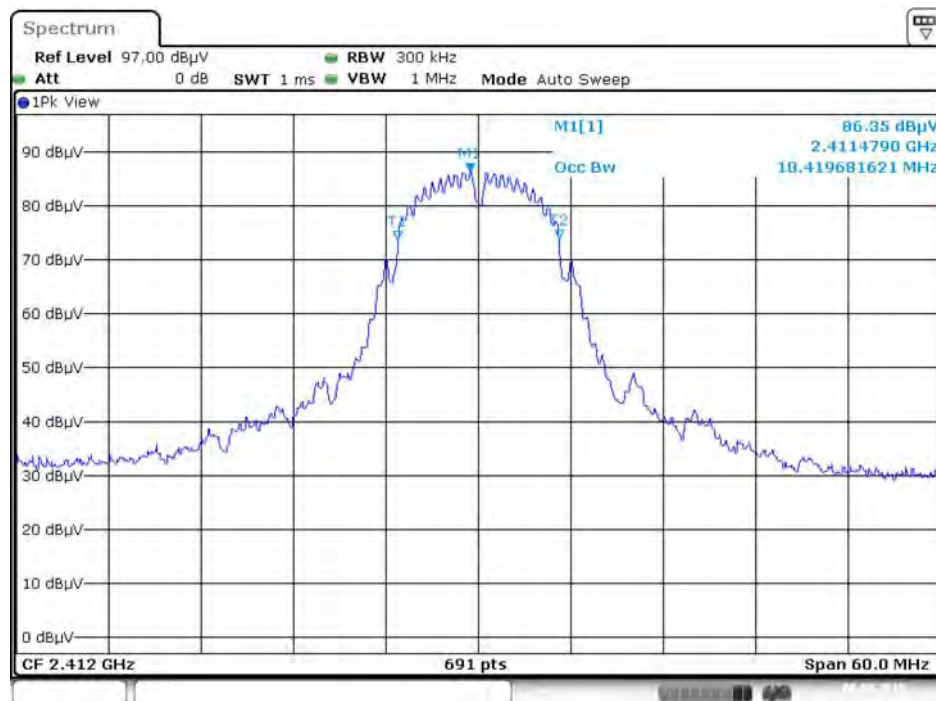

Date: 8.SEP.2015 03:32:21

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 5

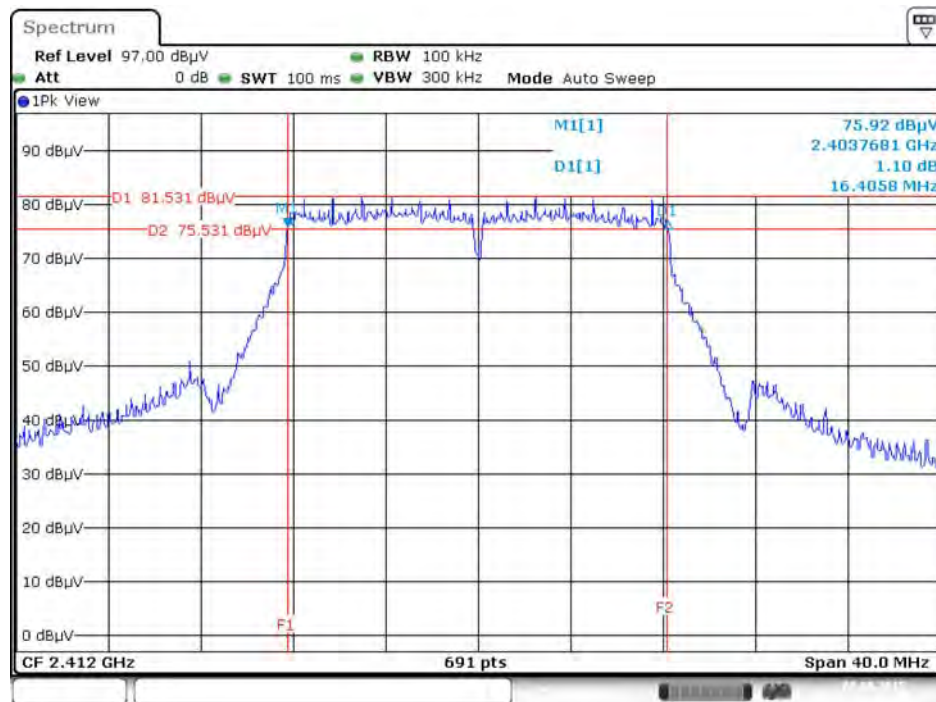


Date: 8.SEP.2015 02:51:56

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 5



Date: 8.SEP.2015 03:37:58

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 5

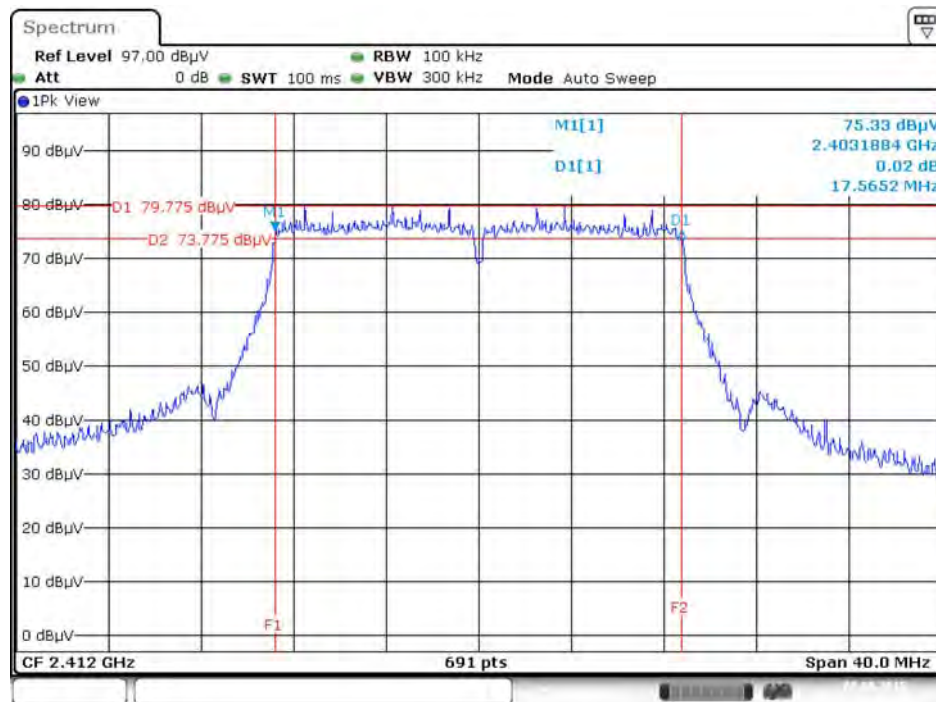


Date: 8.SEP.2015 02:56:17

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 5




Date: 8.SEP.2015 03:30:03

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 5

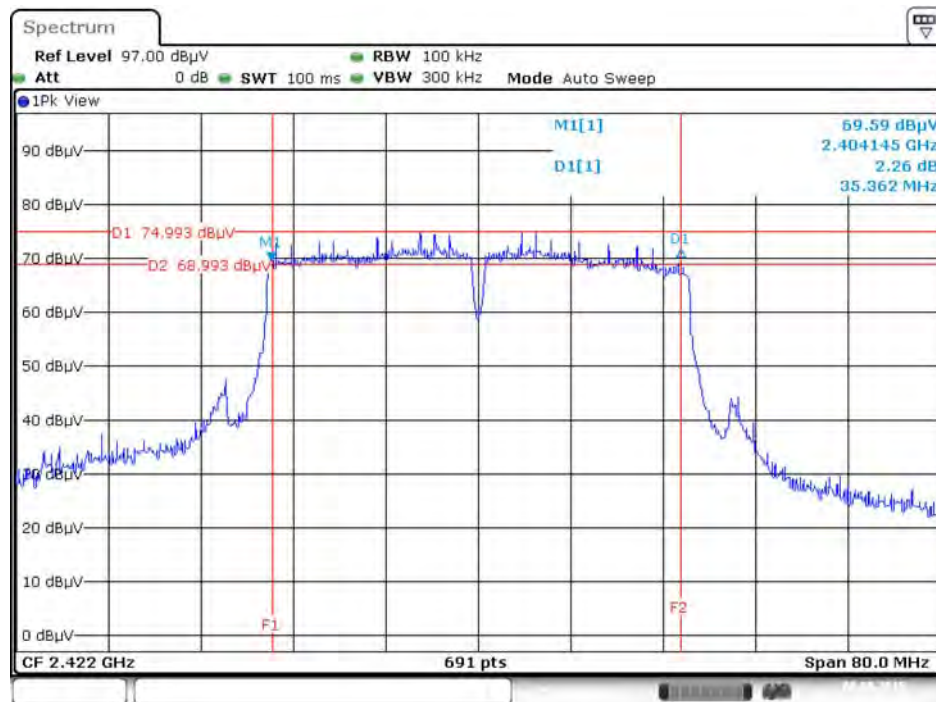


Date: 8.SEP.2015 03:00:21

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 5

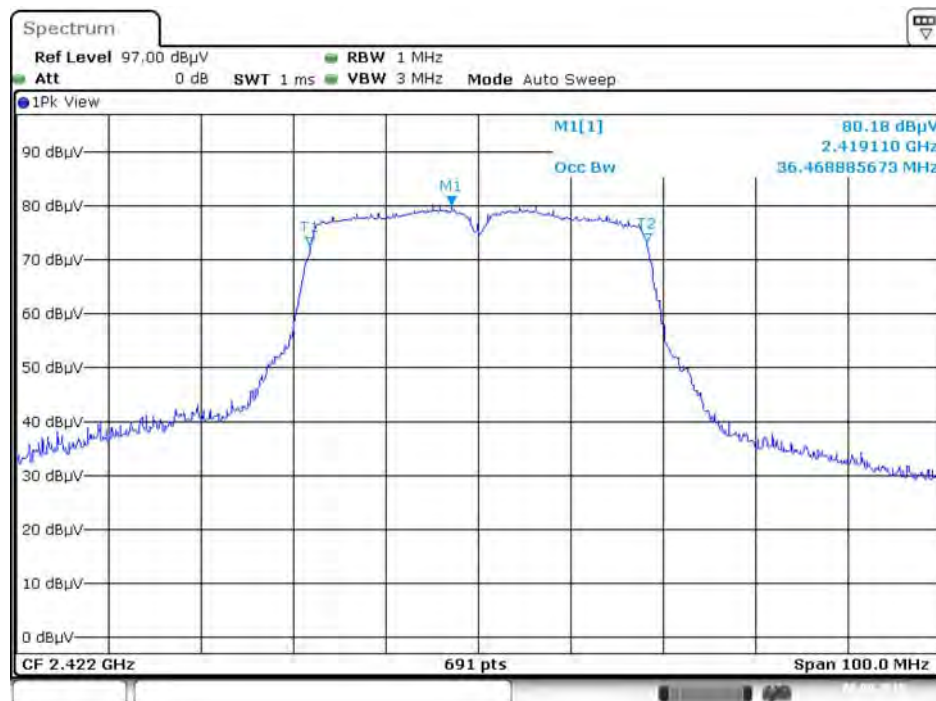


Date: 8.SEP.2015 03:25:24

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / 2462 MHz / Chain 5 + Chain 6

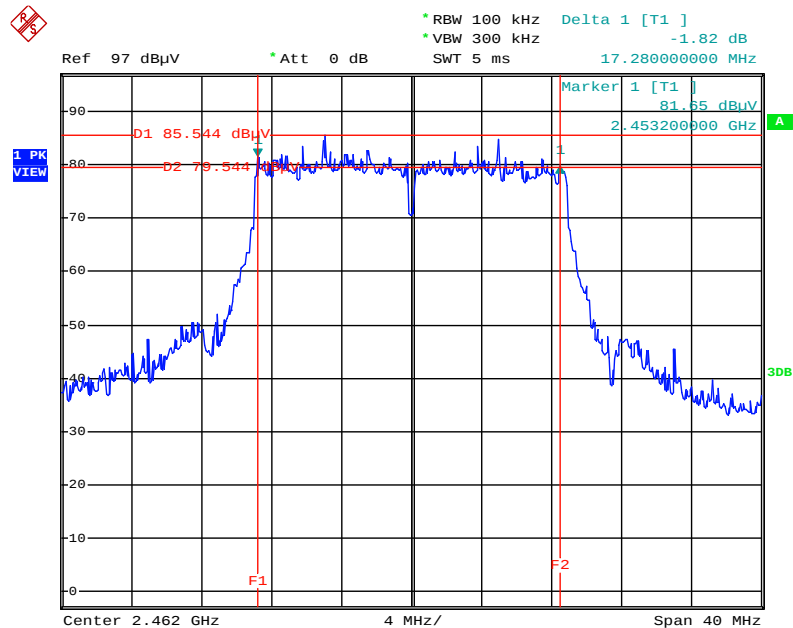


Date: 13.OCT.2015 17:58:56

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / 2412 MHz / Chain 5 + Chain 6

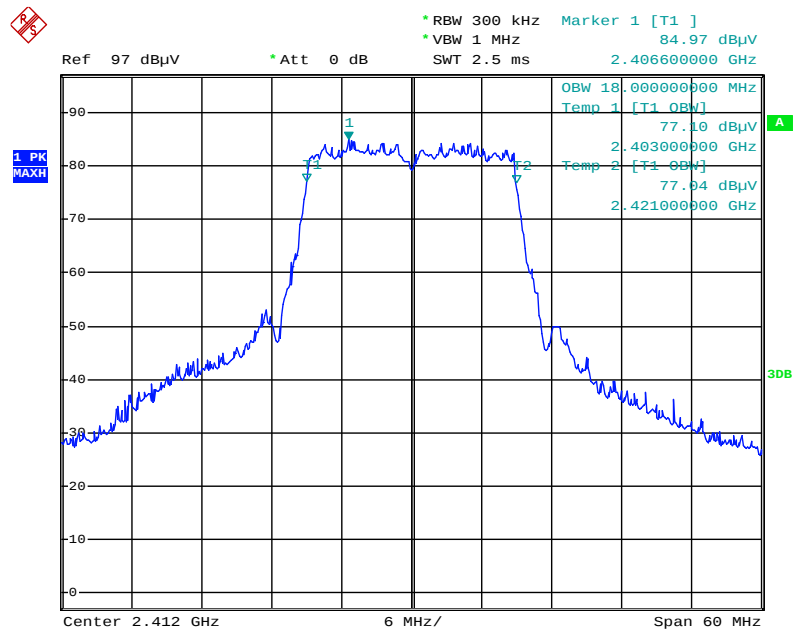


Date: 13.OCT.2015 18:06:22

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT40 / 2437 MHz / Chain 5 + Chain 6

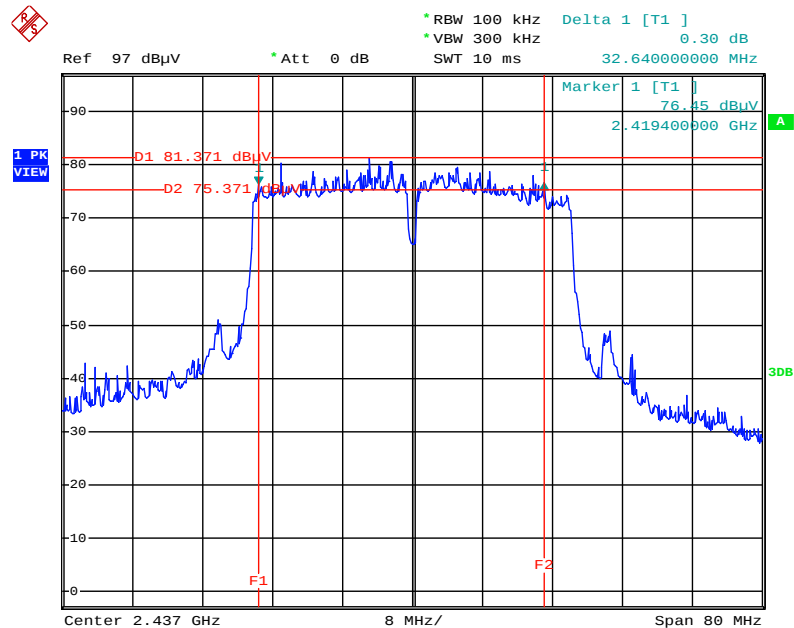

Date: 13.OCT.2015 18:02:50

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT40 / 2422 MHz / Chain 5 + Chain 6

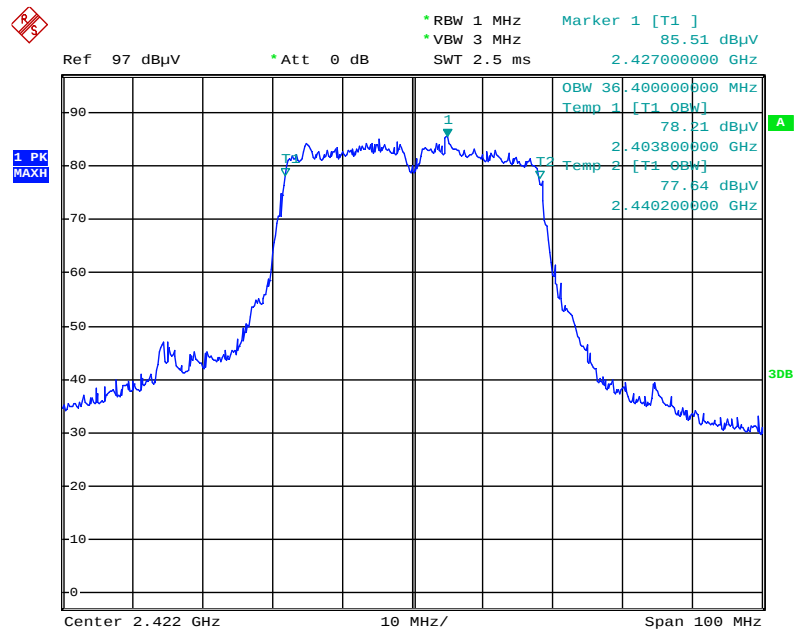

Date: 13.OCT.2015 18:05:35

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

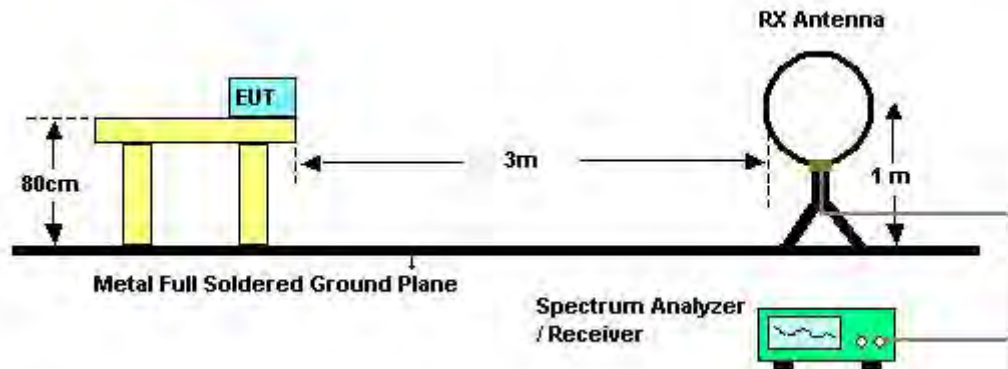

For Radiated Emissions: 30MHz~1GHz

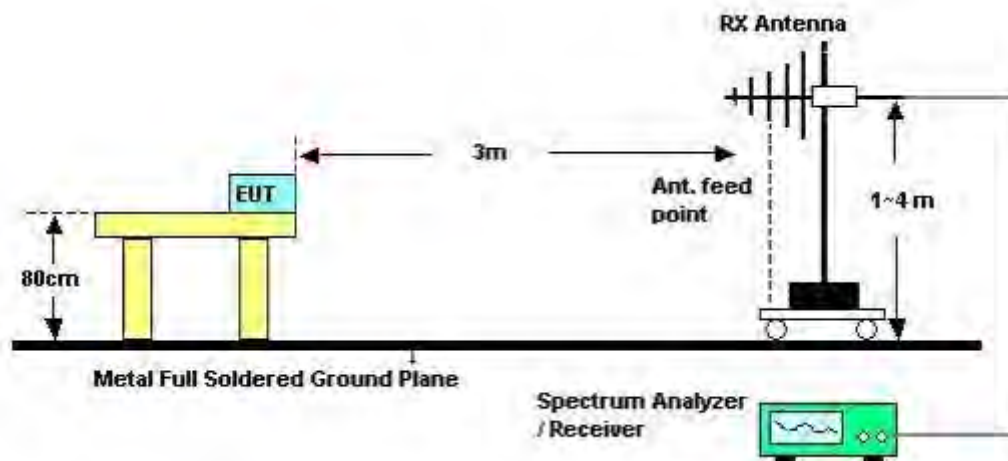

For Radiated Emissions: Above 1GHz

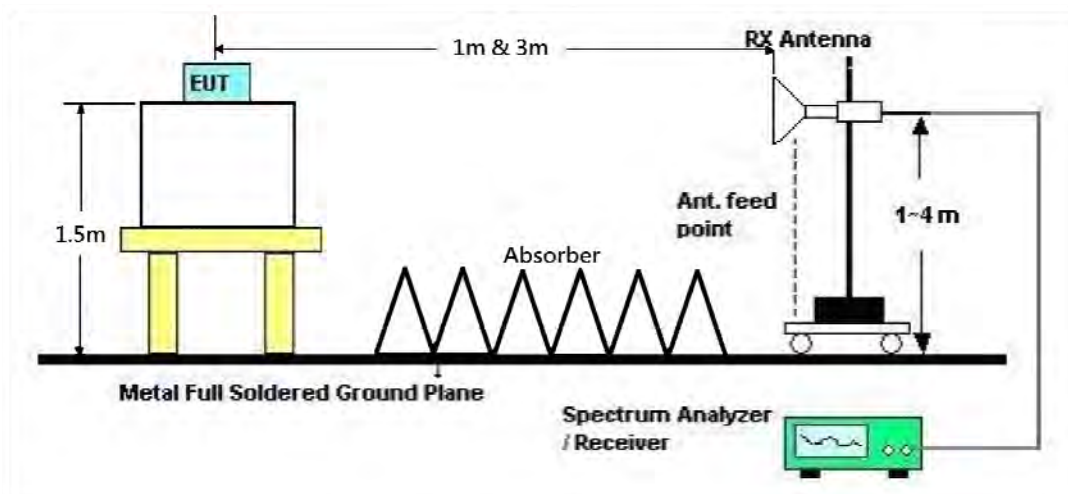

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	Normal Link
Test Date	Aug. 19, 2015		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	Normal Link

Horizontal

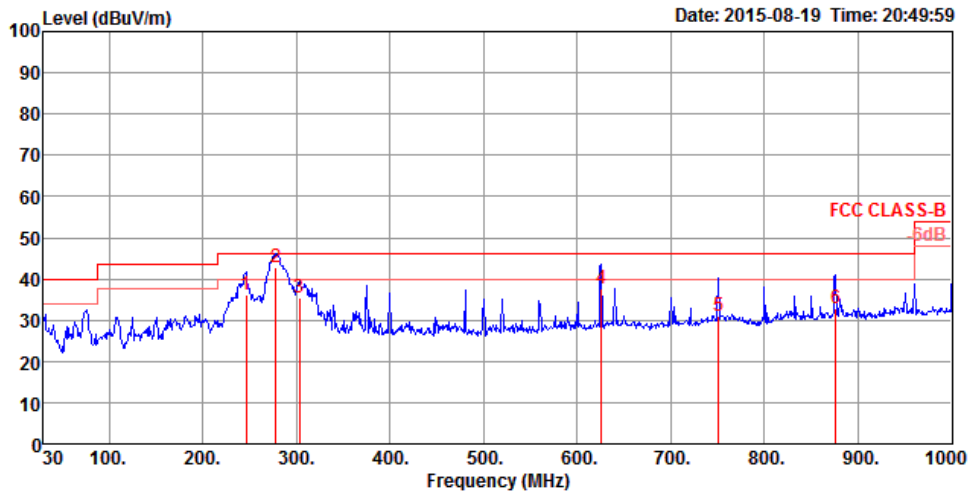

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	246.31	36.34	46.00	-9.66	54.66	1.37	12.61	32.30	125	165	QP	HORIZONTAL
2	278.32	42.93	46.00	-3.07	60.26	1.44	13.52	32.29	150	125	QP	HORIZONTAL
3	303.54	35.42	46.00	-10.58	52.20	1.50	14.00	32.28	100	120	QP	HORIZONTAL
4	625.58	37.56	46.00	-8.44	48.52	2.08	19.36	32.40	150	115	QP	HORIZONTAL
5	750.71	31.18	46.00	-14.82	40.86	2.22	20.40	32.30	125	134	QP	HORIZONTAL
6	875.84	33.00	46.00	-13.00	40.96	2.40	21.50	31.86	100	123	QP	HORIZONTAL

Vertical

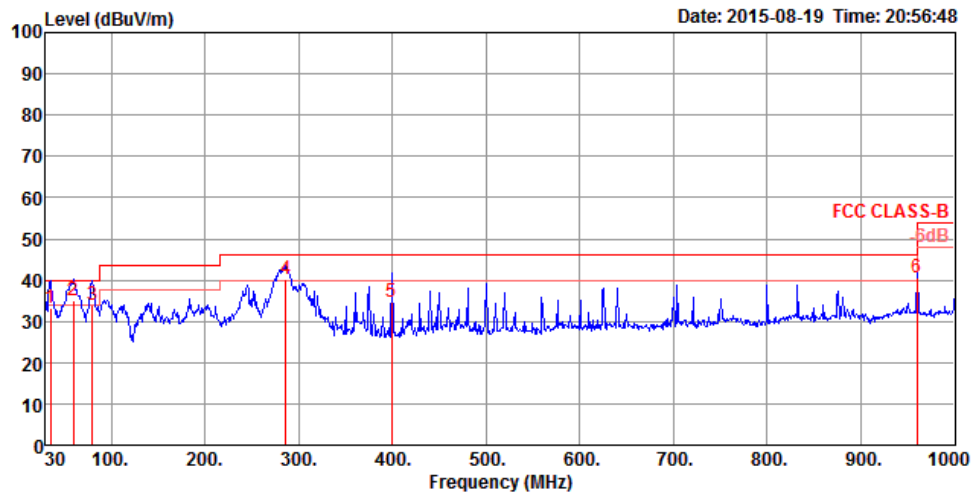

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	34.85	33.35	40.00	-6.65	47.94	0.64	17.17	32.40	100	16 QP	VERTICAL
2	59.10	35.14	40.00	-4.86	59.68	0.77	7.10	32.41	150	233 QP	VERTICAL
3	79.47	34.13	40.00	-5.87	58.12	0.85	7.56	32.40	100	231 QP	VERTICAL
4	286.08	40.38	46.00	-5.62	57.59	1.46	13.62	32.29	100	238 QP	VERTICAL
5	399.57	34.69	46.00	-11.31	48.82	1.73	16.47	32.33	200	46 QP	VERTICAL
6	960.00	40.49	46.00	-5.51	47.12	2.50	22.06	31.19	125	248 QP	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11b CH 1 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.94	44.74	54.00	-9.26	41.20	5.38	32.55	34.39	150	45	HORIZONTAL	Average
2	4823.98	49.40	74.00	-24.60	45.86	5.38	32.55	34.39	150	45	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.96	48.48	54.00	-5.52	44.94	5.38	32.55	34.39	300	102	VERTICAL	Average
2	4823.96	53.72	74.00	-20.28	50.18	5.38	32.55	34.39	300	102	VERTICAL	Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11b CH 6 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.94	45.96	54.00	-8.04	42.28	5.40	32.66	34.38	142	338	HORIZONTAL Average
2	4873.97	50.42	74.00	-23.58	46.74	5.40	32.66	34.38	142	338	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.91	55.93	74.00	-18.07	52.25	5.40	32.66	34.38	284	96	VERTICAL Peak
2	4873.96	53.17	54.00	-0.83	49.49	5.40	32.66	34.38	284	96	VERTICAL Average

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11b CH 11 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.98	42.94	54.00	-11.06	39.13	5.42	32.76	34.37	150	343	HORIZONTAL	Average
2	4924.07	48.76	74.00	-25.24	44.95	5.42	32.76	34.37	150	343	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.86	51.25	74.00	-22.75	47.44	5.42	32.76	34.37	150	312	VERTICAL	Peak
2	4923.98	46.56	54.00	-7.44	42.75	5.42	32.76	34.37	150	312	VERTICAL	Average

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11g CH 1 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4814.96	44.45	74.00	-29.55	40.91	5.38	32.55	34.39	187	306	HORIZONTAL Peak
2	4818.60	31.57	54.00	-22.43	28.03	5.38	32.55	34.39	187	306	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4820.00	45.86	74.00	-28.14	42.32	5.38	32.55	34.39	206	88	VERTICAL Peak
2	4823.88	31.93	54.00	-22.07	28.39	5.38	32.55	34.39	206	88	VERTICAL Average

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11g CH 6 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.76	48.72	74.00	-25.28	45.04	5.40	32.66	34.38	156	52	HORIZONTAL	Peak
2	4873.92	34.38	54.00	-19.62	30.70	5.40	32.66	34.38	156	52	HORIZONTAL	Average
3	7312.84	52.08	74.00	-21.92	42.82	7.05	37.14	34.93	140	204	HORIZONTAL	Peak
4	7314.80	39.24	54.00	-14.76	29.98	7.05	37.14	34.93	140	204	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4874.20	34.87	54.00	-19.13	31.19	5.40	32.66	34.38	159	319	VERTICAL	Average
2	4878.56	48.45	74.00	-25.55	44.77	5.40	32.66	34.38	159	319	VERTICAL	Peak
3	7302.84	53.14	74.00	-20.86	43.90	7.03	37.14	34.93	211	262	VERTICAL	Peak
4	7310.80	39.64	54.00	-14.36	30.38	7.05	37.14	34.93	211	262	VERTICAL	Average

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11g CH 11 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4915.84	45.29	74.00	-28.71	41.50	5.42	32.74	34.37	144	196	HORIZONTAL	Peak
2	4922.64	31.75	54.00	-22.25	27.96	5.42	32.74	34.37	144	196	HORIZONTAL	Average
3	7390.96	52.54	74.00	-21.46	43.16	7.10	37.25	34.97	175	147	HORIZONTAL	Peak
4	7393.44	39.03	54.00	-14.97	29.65	7.10	37.25	34.97	175	147	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4921.28	32.90	54.00	-21.10	29.11	5.42	32.74	34.37	153	86	VERTICAL	Average
2	4923.92	47.46	74.00	-26.54	43.65	5.42	32.76	34.37	153	86	VERTICAL	Peak
3	7382.68	51.65	74.00	-22.35	42.27	7.10	37.25	34.97	182	191	VERTICAL	Peak
4	7395.32	38.85	54.00	-15.15	29.49	7.10	37.25	34.99	182	191	VERTICAL	Average

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4825.76	44.46	74.00	-29.54	40.89	5.38	32.58	34.39	104	43	HORIZONTAL Peak
2	4830.20	31.32	54.00	-22.68	27.75	5.38	32.58	34.39	104	43	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4816.00	44.44	74.00	-29.56	40.90	5.38	32.55	34.39	173	258	VERTICAL Peak
2	4818.12	31.39	54.00	-22.61	27.85	5.38	32.55	34.39	173	258	VERTICAL Average

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4868.48	44.65	74.00	-29.35	40.97	5.40	32.66	34.38	146	205	HORIZONTAL Peak
2	4873.48	32.21	54.00	-21.79	28.53	5.40	32.66	34.38	146	205	HORIZONTAL Average
3	7310.04	50.99	74.00	-23.01	41.73	7.05	37.14	34.93	242	285	HORIZONTAL Peak
4	7319.48	38.33	54.00	-15.67	29.04	7.05	37.17	34.93	242	285	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4872.92	36.10	54.00	-17.90	32.42	5.40	32.66	34.38	193	112	VERTICAL Average
2	4873.64	49.61	74.00	-24.39	45.93	5.40	32.66	34.38	193	112	VERTICAL Peak
3	7313.88	38.52	54.00	-15.48	29.26	7.05	37.14	34.93	251	261	VERTICAL Average
4	7314.08	52.03	74.00	-21.97	42.77	7.05	37.14	34.93	251	261	VERTICAL Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4920.16	43.82	74.00	-30.18	40.03	5.42	32.74	34.37	151	210	HORIZONTAL Peak
2	4920.84	31.54	54.00	-22.46	27.75	5.42	32.74	34.37	151	210	HORIZONTAL Average
3	7391.40	51.74	74.00	-22.26	42.36	7.10	37.25	34.97	170	242	HORIZONTAL Peak
4	7395.68	38.33	54.00	-15.67	28.97	7.10	37.25	34.99	170	242	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4921.76	44.56	74.00	-29.44	40.77	5.42	32.74	34.37	176	305	VERTICAL Peak
2	4928.00	31.93	54.00	-22.07	28.12	5.42	32.76	34.37	176	305	VERTICAL Average
3	7392.96	38.41	54.00	-15.59	29.03	7.10	37.25	34.97	173	273	VERTICAL Average
4	7396.00	51.12	74.00	-22.88	41.76	7.10	37.25	34.99	173	273	VERTICAL Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4840.88	31.21	54.00	-22.79	27.61	5.39	32.60	34.39	164	277	HORIZONTAL	Average
2	4846.88	43.82	74.00	-30.18	40.22	5.39	32.60	34.39	164	277	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4838.64	31.25	54.00	-22.75	27.68	5.38	32.58	34.39	143	286	VERTICAL	Average
2	4845.56	44.06	74.00	-29.94	40.46	5.39	32.60	34.39	143	286	VERTICAL	Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4876.36	31.39	54.00	-22.61	27.71	5.40	32.66	34.38	147	341	HORIZONTAL	Average
2	4877.52	44.70	74.00	-29.30	41.02	5.40	32.66	34.38	147	341	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4876.72	31.49	54.00	-22.51	27.81	5.40	32.66	34.38	142	348	VERTICAL	Average
2	4882.84	44.13	74.00	-29.87	40.43	5.40	32.68	34.38	142	348	VERTICAL	Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 5
Test Date	Aug. 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4896.52	31.44	54.00	-22.56	27.70	5.41	32.71	34.38	124	292	HORIZONTAL	Average
2	4904.76	44.27	74.00	-29.73	40.53	5.41	32.71	34.38	124	292	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4895.72	31.39	54.00	-22.61	27.65	5.41	32.71	34.38	136	350	VERTICAL	Average
2	4901.60	44.07	74.00	-29.93	40.33	5.41	32.71	34.38	136	350	VERTICAL	Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT20 CH 1 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.68	32.79	54.00	-21.21	29.25	5.38	32.55	34.39	165	239	HORIZONTAL	Average
2	4829.84	45.90	74.00	-28.10	42.33	5.38	32.58	34.39	165	239	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4820.60	32.83	54.00	-21.17	29.29	5.38	32.55	34.39	165	145	VERTICAL	Average
2	4825.44	45.50	74.00	-28.50	41.93	5.38	32.58	34.39	165	145	VERTICAL	Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT20 CH 6 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4875.52	33.79	54.00	-20.21	30.11	5.40	32.66	34.38	165	260	HORIZONTAL	Average
2	4875.68	47.07	74.00	-26.93	43.39	5.40	32.66	34.38	165	260	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.52	34.62	54.00	-19.38	30.94	5.40	32.66	34.38	165	316	VERTICAL	Average
2	4876.52	47.41	74.00	-26.59	43.73	5.40	32.66	34.38	165	316	VERTICAL	Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT20 CH 11 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4918.88	32.35	54.00	-21.65	28.56	5.42	32.74	34.37	165	219	HORIZONTAL	Average
2	4925.64	45.00	74.00	-29.00	41.19	5.42	32.76	34.37	165	219	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4918.72	32.60	54.00	-21.40	28.81	5.42	32.74	34.37	165	165	VERTICAL	Average
2	4923.08	45.41	74.00	-28.59	41.62	5.42	32.74	34.37	165	165	VERTICAL	Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT40 CH 3 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4835.12	44.71	74.00	-29.29	41.14	5.38	32.58	34.39	165	111	HORIZONTAL Peak
2	4835.44	32.05	54.00	-21.95	28.48	5.38	32.58	34.39	165	111	HORIZONTAL Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4834.24	32.16	54.00	-21.84	28.59	5.38	32.58	34.39	165	186	VERTICAL Average
2	4840.52	44.43	74.00	-29.57	40.84	5.38	32.60	34.39	165	186	VERTICAL Peak

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT40 CH 6 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4875.08	44.85	74.00	-29.15	41.17	5.40	32.66	34.38	165	134	HORIZONTAL	Peak
2	4879.48	32.22	54.00	-21.78	28.54	5.40	32.66	34.38	165	134	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4878.12	45.07	74.00	-28.93	41.39	5.40	32.66	34.38	165	178	VERTICAL	Peak
2	4879.24	32.27	54.00	-21.73	28.59	5.40	32.66	34.38	165	178	VERTICAL	Average

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT40 CH 9 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4901.92	32.54	54.00	-21.46	28.80	5.41	32.71	34.38	165	138	HORIZONTAL	Average
2	4913.08	46.98	74.00	-27.02	43.19	5.42	32.74	34.37	165	138	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4899.40	32.67	54.00	-21.33	28.93	5.41	32.71	34.38	165	194	VERTICAL	Average
2	4909.40	44.95	74.00	-29.05	41.16	5.42	32.74	34.37	165	194	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 5
Test Date	Aug. 19, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2390.00	53.73	54.00	-0.27	22.08	3.73	27.92	0.00	225	270	VERTICAL	Average
2	2390.00	65.08	74.00	-8.92	33.43	3.73	27.92	0.00	225	270	VERTICAL	Peak
3	2411.20	112.45			80.81	3.75	27.89	0.00	225	270	VERTICAL	Average
4	2413.00	116.59			84.95	3.75	27.89	0.00	225	270	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2379.80	52.33	54.00	-1.67	20.68	3.72	27.93	0.00	220	272	VERTICAL	Average
2	2388.60	63.65	74.00	-10.35	32.00	3.73	27.92	0.00	220	272	VERTICAL	Peak
3	2436.20	112.52			80.88	3.77	27.87	0.00	220	272	VERTICAL	Average
4	2436.20	116.56			84.92	3.77	27.87	0.00	220	272	VERTICAL	Peak
5	2483.80	47.08	54.00	-6.92	15.44	3.82	27.82	0.00	220	272	VERTICAL	Average
6	2484.20	58.76	74.00	-15.24	27.12	3.82	27.82	0.00	220	272	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2461.20	111.01			79.38	3.79	27.84	0.00	262	241	HORIZONTAL Average
2	2461.20	115.05			83.42	3.79	27.84	0.00	262	241	HORIZONTAL Peak
3	2483.50	53.30	54.00	-0.70	21.66	3.82	27.82	0.00	262	241	HORIZONTAL Average
4	2487.00	63.00	74.00	-11.00	31.36	3.82	27.82	0.00	262	241	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 5
Test Date	Aug. 19, 2015 / Aug. 26, 2015		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2388.80	68.92	74.00	-5.08	37.27	3.73	27.92	0.00	225	272	VERTICAL Peak
2	2390.00	53.96	54.00	-0.04	22.31	3.73	27.92	0.00	225	272	VERTICAL Average
3	2412.40	113.84			82.20	3.75	27.89	0.00	225	272	VERTICAL Peak
4	2414.80	102.12			70.48	3.75	27.89	0.00	225	272	VERTICAL Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2387.40	67.65	74.00	-6.35	36.00	3.73	27.92	0.00	221	270	VERTICAL Peak
2	2390.00	53.09	54.00	-0.91	21.44	3.73	27.92	0.00	221	270	VERTICAL Average
3	2432.20	117.27			85.63	3.77	27.87	0.00	221	270	VERTICAL Peak
4	2433.80	106.76			75.12	3.77	27.87	0.00	221	270	VERTICAL Average
5	2483.50	49.69	54.00	-4.31	18.05	3.82	27.82	0.00	221	270	VERTICAL Average
6	2485.80	63.59	74.00	-10.41	31.95	3.82	27.82	0.00	221	270	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2458.80	102.41			70.77	3.79	27.85	0.00	260	269	VERTICAL Average
2	2458.80	113.42			81.78	3.79	27.85	0.00	260	269	VERTICAL Peak
3	2483.50	53.83	54.00	-0.17	22.19	3.82	27.82	0.00	260	269	VERTICAL Average
4	2483.50	72.93	74.00	-1.07	41.29	3.82	27.82	0.00	260	269	VERTICAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 5
Test Date	Aug. 19, 2015 / Aug. 26, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.78	54.00	-0.22	22.13	3.73	27.92	0.00	229	268	VERTICAL Average
2	2390.00	67.15	74.00	-6.85	35.50	3.73	27.92	0.00	229	268	VERTICAL Peak
3	2407.60	111.95			80.30	3.75	27.90	0.00	229	268	VERTICAL Peak
4	2414.40	102.01			70.37	3.75	27.89	0.00	229	268	VERTICAL Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.80	54.00	-0.20	22.15	3.73	27.92	0.00	241	238	HORIZONTAL Average
2	2390.00	66.41	74.00	-7.59	34.76	3.73	27.92	0.00	241	238	HORIZONTAL Peak
3	2432.20	116.92			85.28	3.77	27.87	0.00	241	238	HORIZONTAL Peak
4	2433.00	106.54			74.90	3.77	27.87	0.00	241	238	HORIZONTAL Average
5	2483.50	49.43	54.00	-4.57	17.79	3.82	27.82	0.00	241	238	HORIZONTAL Average
6	2483.80	63.11	74.00	-10.89	31.47	3.82	27.82	0.00	241	238	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2456.40	113.88			82.24	3.79	27.85	0.00	238	270	VERTICAL Peak
2	2458.00	103.53			71.89	3.79	27.85	0.00	238	270	VERTICAL Average
3	2483.50	53.73	54.00	-0.27	22.09	3.82	27.82	0.00	238	270	VERTICAL Average
4	2483.50	72.68	74.00	-1.32	41.04	3.82	27.82	0.00	238	270	VERTICAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 5
Test Date	Aug. 19, 2015		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.60	53.80	54.00	-0.20	22.15	3.73	27.92	0.00	226	268	VERTICAL Average
2	2390.00	68.38	74.00	-5.62	36.73	3.73	27.92	0.00	226	268	VERTICAL Peak
3	2416.80	106.13			74.48	3.76	27.89	0.00	226	268	VERTICAL Peak
4	2417.20	96.21			64.56	3.76	27.89	0.00	226	268	VERTICAL Average

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2386.20	67.78	74.00	-6.22	36.13	3.73	27.92	0.00	220	268	VERTICAL Peak
2	2390.00	53.61	54.00	-0.39	21.96	3.73	27.92	0.00	220	268	VERTICAL Average
3	2431.40	100.60			68.95	3.77	27.88	0.00	220	268	VERTICAL Average
4	2431.80	110.89			79.24	3.77	27.88	0.00	220	268	VERTICAL Peak
5	2483.50	48.07	54.00	-5.93	16.43	3.82	27.82	0.00	220	268	VERTICAL Average
6	2484.60	62.03	74.00	-11.97	30.39	3.82	27.82	0.00	220	268	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2446.00	110.21			78.57	3.78	27.86	0.00	223	269	VERTICAL Peak
2	2446.40	100.03			68.40	3.78	27.85	0.00	223	269	VERTICAL Average
3	2483.50	53.87	54.00	-0.13	22.23	3.82	27.82	0.00	223	269	VERTICAL Average
4	2483.50	70.31	74.00	-3.69	38.67	3.82	27.82	0.00	223	269	VERTICAL Peak

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT20 CH 1, 6, 11 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2389.80	66.00	74.00	-8.00	34.35	3.73	27.92	0.00	150	251	HORIZONTAL Peak
2	2390.00	53.77	54.00	-0.23	22.12	3.73	27.92	0.00	150	251	HORIZONTAL Average
3	2408.40	102.67			71.02	3.75	27.90	0.00	150	251	HORIZONTAL Average
4	2410.20	112.85			81.20	3.75	27.90	0.00	150	251	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2379.80	53.91	54.00	-0.09	22.26	3.72	27.93	0.00	224	266	VERTICAL Average
2	2387.00	64.99	74.00	-9.01	33.34	3.73	27.92	0.00	224	266	VERTICAL Peak
3	2433.80	119.34			87.70	3.77	27.87	0.00	224	266	VERTICAL Peak
4	2434.20	108.52			76.88	3.77	27.87	0.00	224	266	VERTICAL Average
5	2483.80	49.81	54.00	-4.19	18.17	3.82	27.82	0.00	224	266	VERTICAL Average
6	2487.40	61.38	74.00	-12.62	29.74	3.82	27.82	0.00	224	266	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2458.00	105.01			73.37	3.79	27.85	0.00	168	267	HORIZONTAL Average
2	2458.40	115.78			84.14	3.79	27.85	0.00	168	267	HORIZONTAL Peak
3	2483.50	53.57	54.00	-0.43	21.93	3.82	27.82	0.00	168	267	HORIZONTAL Average
4	2484.80	67.21	74.00	-6.79	35.57	3.82	27.82	0.00	168	267	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11n MCS8 HT40 CH 3, 6, 9 / Chain 5 + Chain 6
Test Date	Aug. 20, 2015		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.60	53.83	54.00	-0.17	22.18	3.73	27.92	0.00	157	255	HORIZONTAL	Average
2	2390.00	66.44	74.00	-7.56	34.79	3.73	27.92	0.00	157	255	HORIZONTAL	Peak
3	2419.20	96.65			65.00	3.76	27.89	0.00	157	255	HORIZONTAL	Average
4	2429.20	106.48			74.84	3.76	27.88	0.00	157	255	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.00	64.42	74.00	-9.58	32.77	3.73	27.92	0.00	161	268	VERTICAL	Peak
2	2389.60	53.76	54.00	-0.24	22.11	3.73	27.92	0.00	161	268	VERTICAL	Average
3	2431.60	111.42			79.77	3.77	27.88	0.00	161	268	VERTICAL	Peak
4	2432.20	101.49			69.85	3.77	27.87	0.00	161	268	VERTICAL	Average
5	2483.50	49.67	54.00	-4.33	18.03	3.82	27.82	0.00	161	268	VERTICAL	Average
6	2484.40	60.27	74.00	-13.73	28.63	3.82	27.82	0.00	161	268	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2445.60	102.04			70.40	3.78	27.86	0.00	130	253	HORIZONTAL	Average
2	2446.00	111.87			80.23	3.78	27.86	0.00	130	253	HORIZONTAL	Peak
3	2483.50	53.95	54.00	-0.05	22.31	3.82	27.82	0.00	130	253	HORIZONTAL	Average
4	2484.40	64.55	74.00	-9.45	32.91	3.82	27.82	0.00	130	253	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level / Chain 5

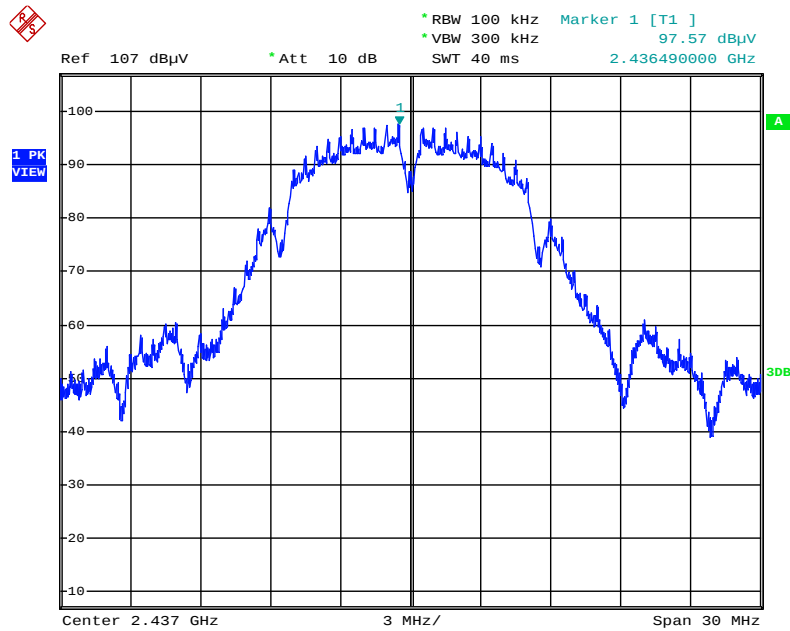


Date: 20.AUG.2015 02:05:47

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 5

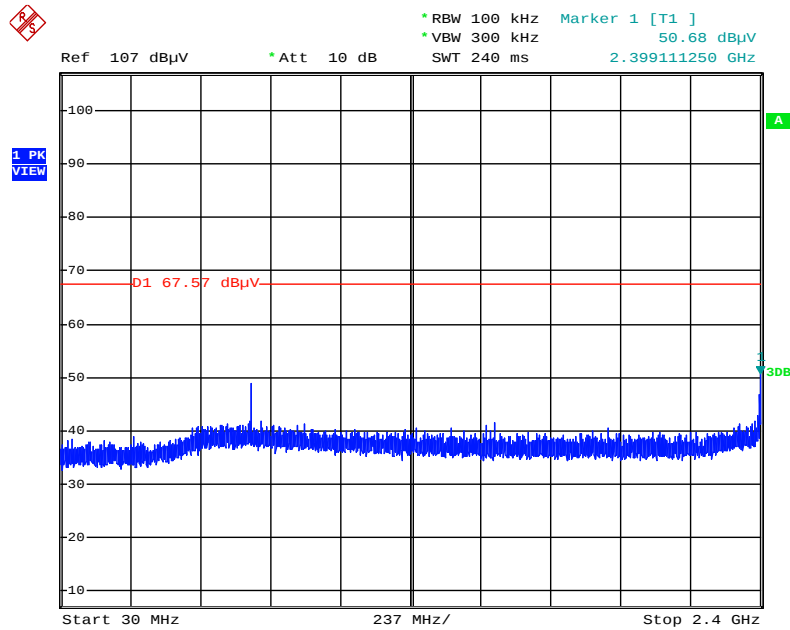


Date: 20.AUG.2015 02:07:13

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc) / Chain 5

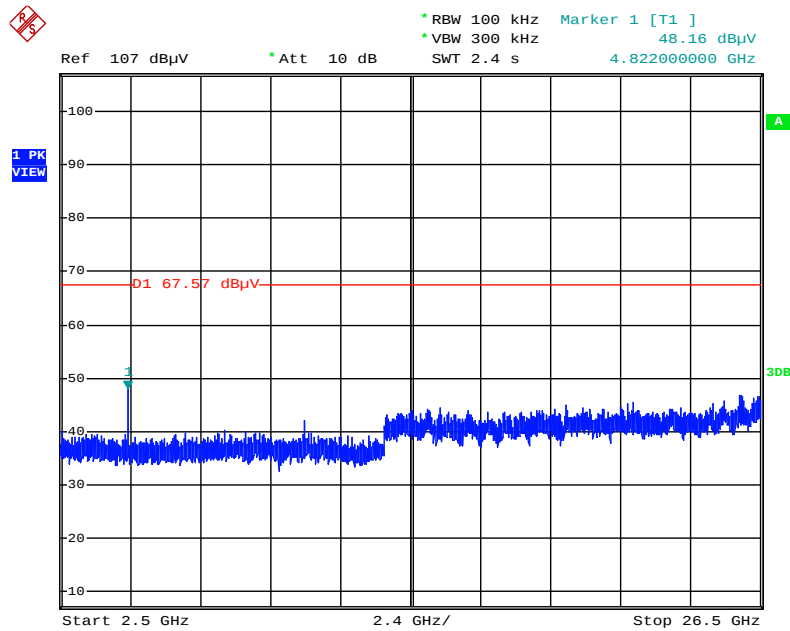


Date: 20.AUG.2015 02:07:36

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) / Chain 5

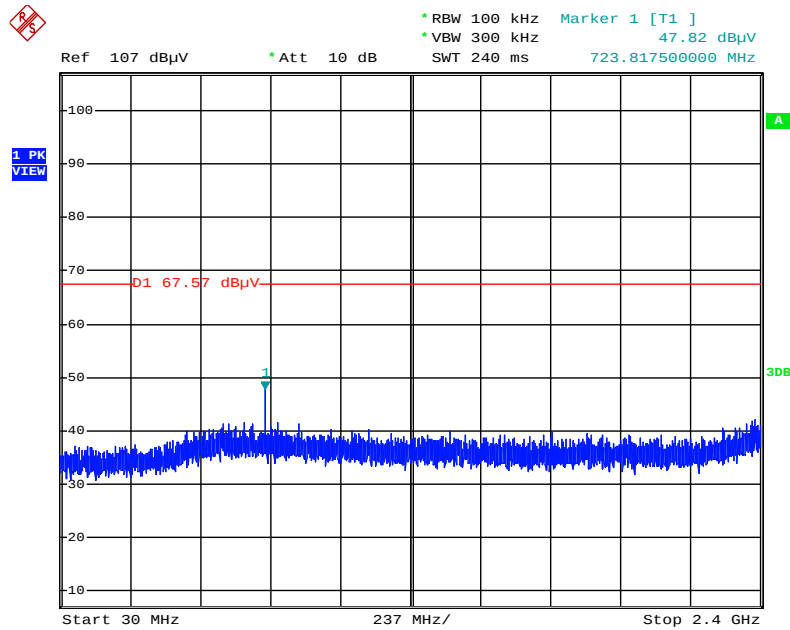


Date: 20.AUG.2015 02:08:03

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 5

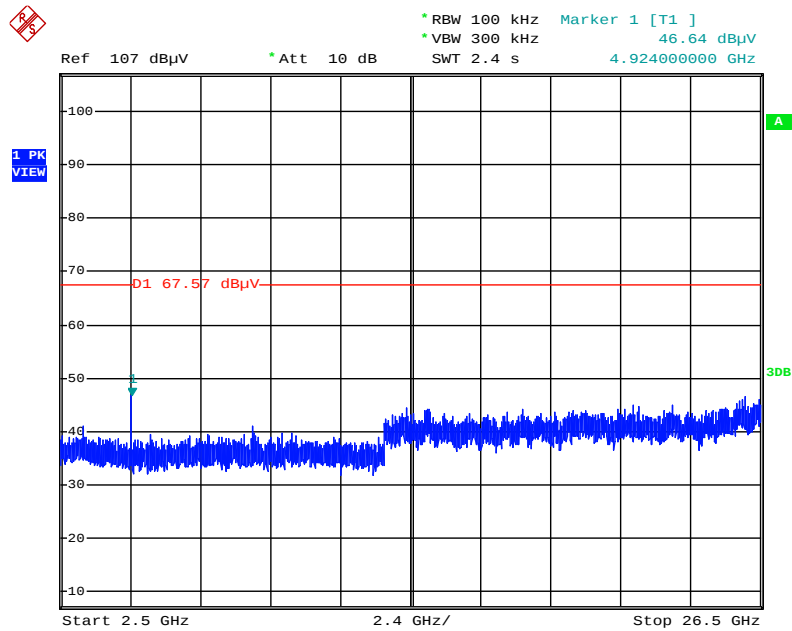


Date: 20.AUG.2015 02:08:21

Plot on Configuration IEEE 802.11g / Reference Level / Chain 5

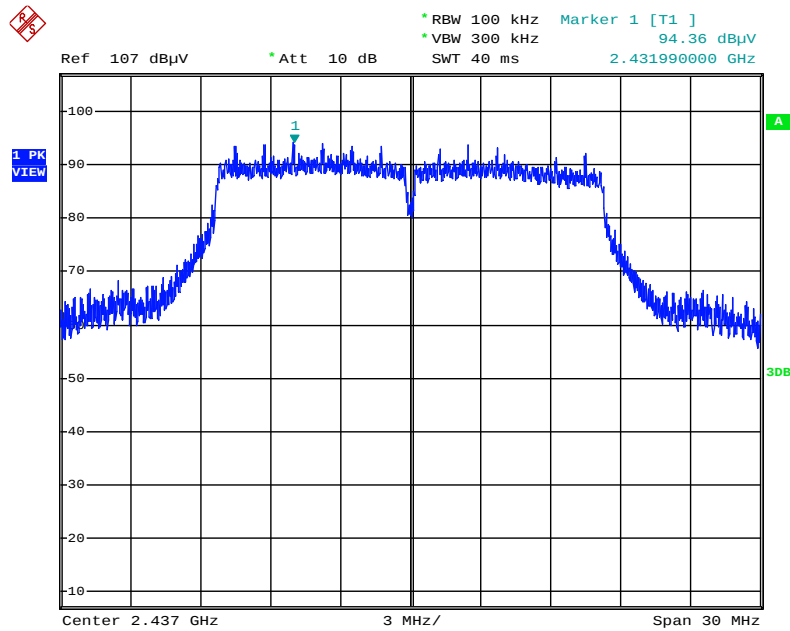


Date: 20.AUG.2015 02:09:10

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 5

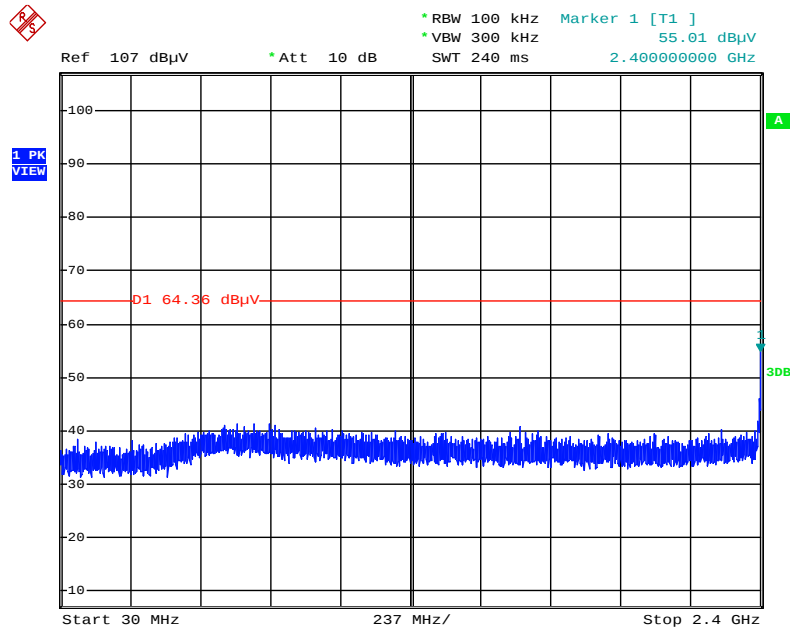


Date: 20.AUG.2015 02:09:45

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc) / Chain 5

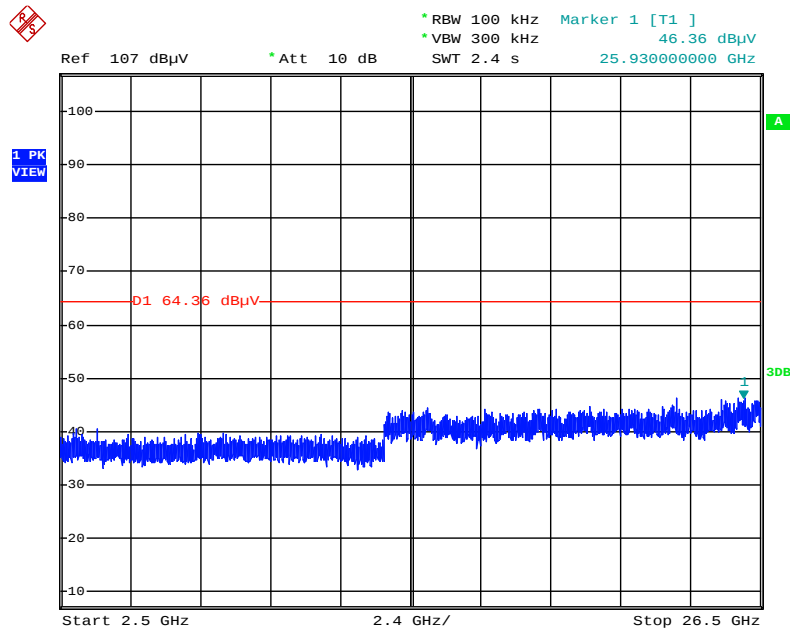

Date: 20.AUG.2015 02:10:10

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Chain 5

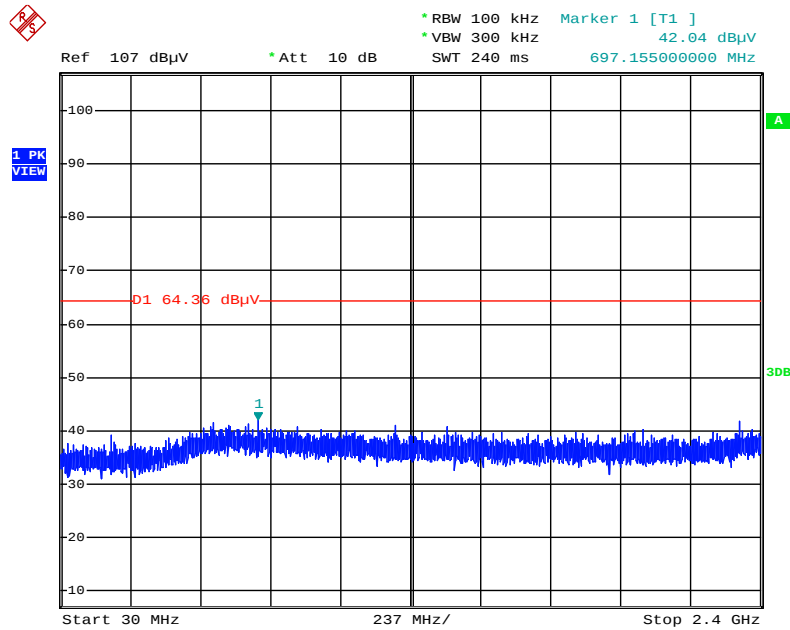

Date: 20.AUG.2015 02:10:43



Ref 107 dBμV Att 10 dB RBW 100 kHz VBW 300 kHz SWT 2.4 s Marker 1 [T1] 47.17 dBμV 25.771000000 GHz

1 PK VIEW


D1 64.36 dBμV

1 3dB

Start 2.5 GHz 2.4 GHz/ Stop 26.5 GHz


Issued Date : Dec. 28, 2015

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level / Chain 5

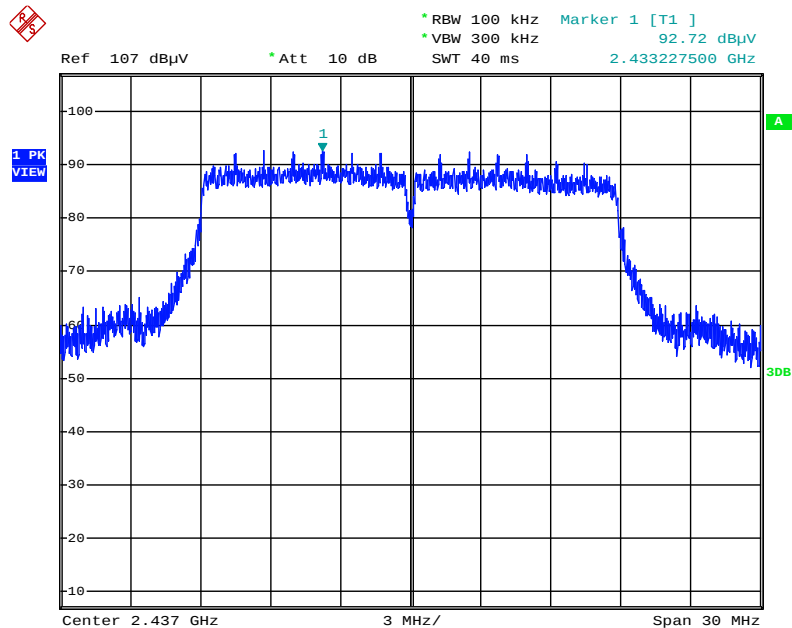


Date: 20.AUG.2015 02:11:52

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 5

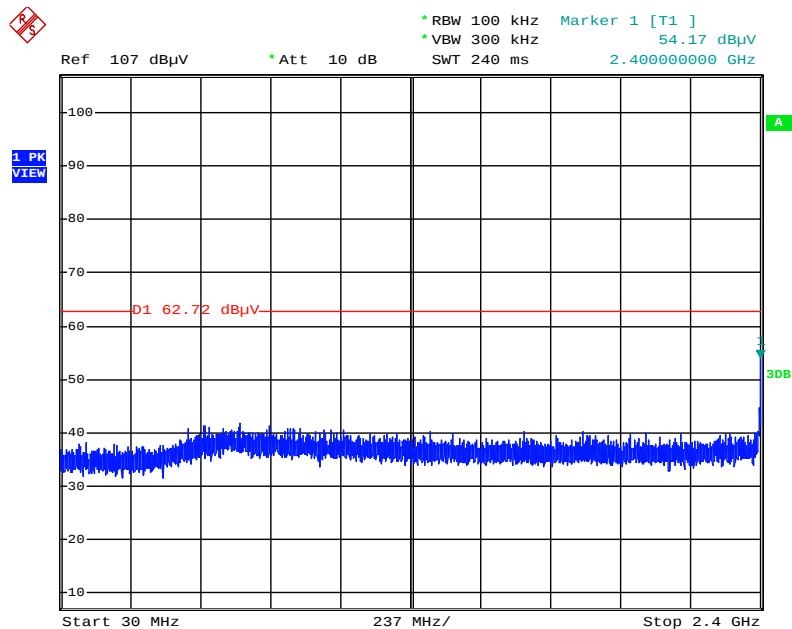


Date: 20.AUG.2015 02:12:32

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc) / Chain 5

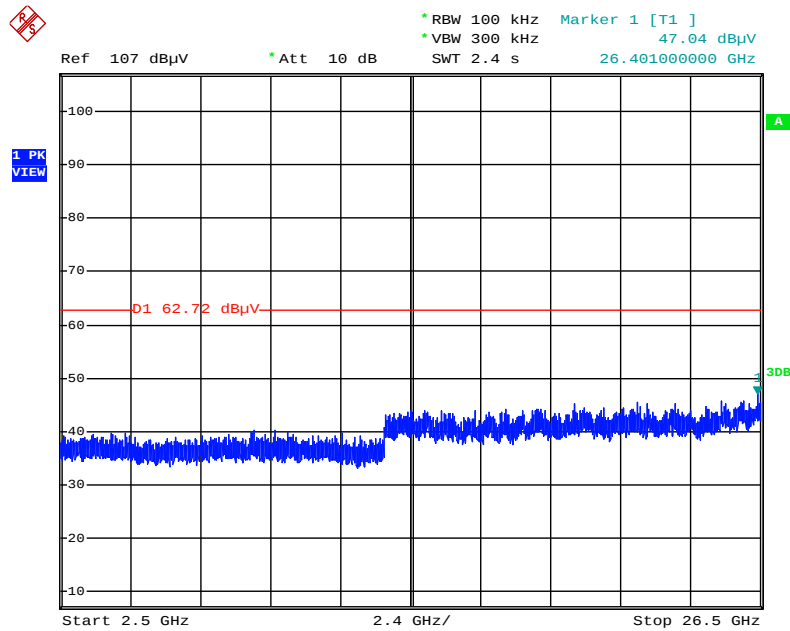


Date: 20.AUG.2015 02:12:55

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc) / Chain 5

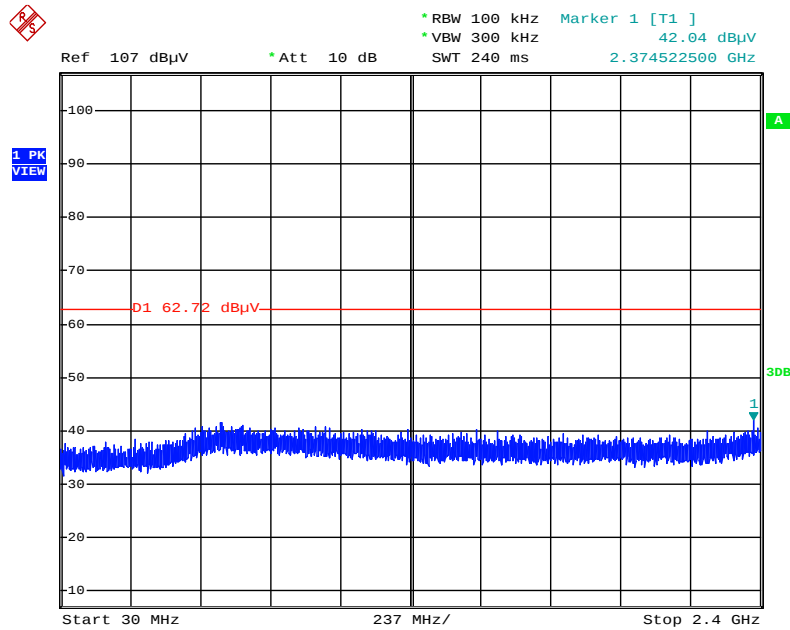


Date: 20.AUG.2015 02:13:43

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc) / Chain 5

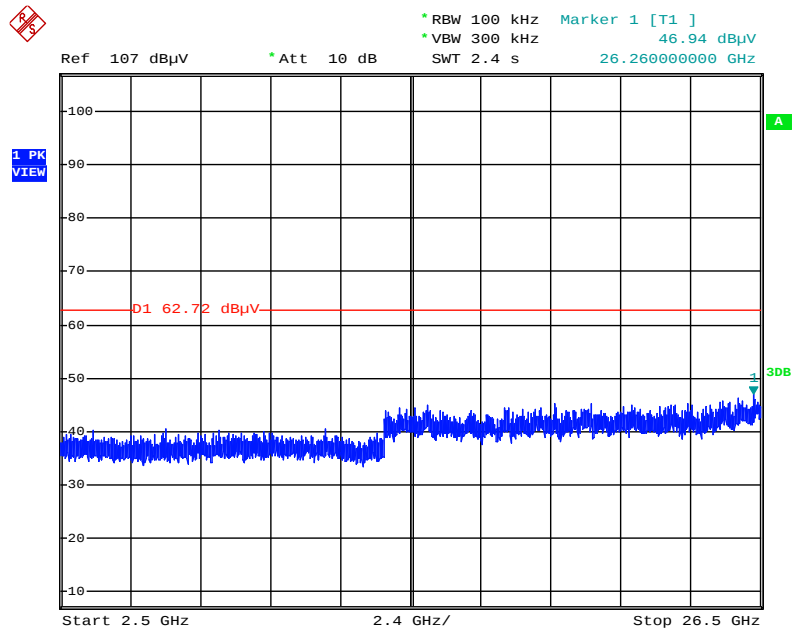


Date: 20.AUG.2015 02:14:13

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level / Chain 5

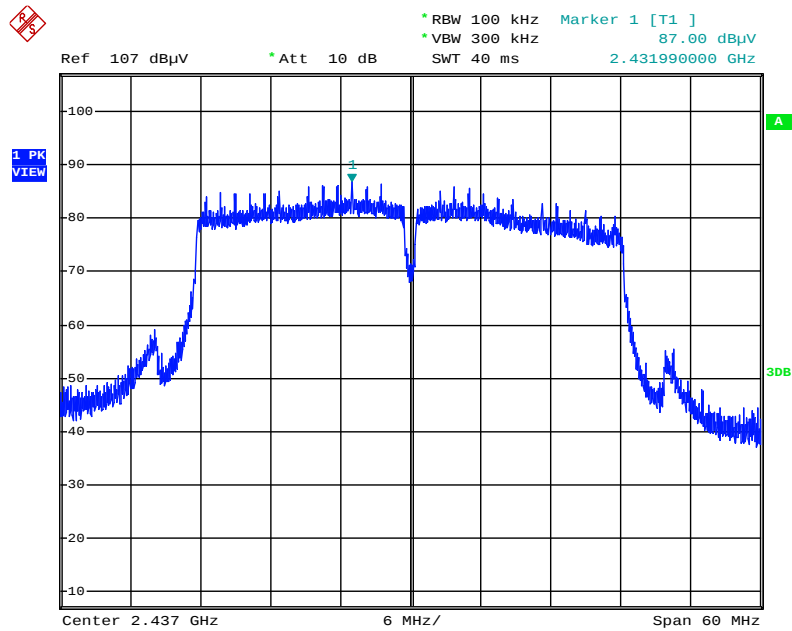


Date: 20.AUG.2015 02:15:49

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc) / Chain 5

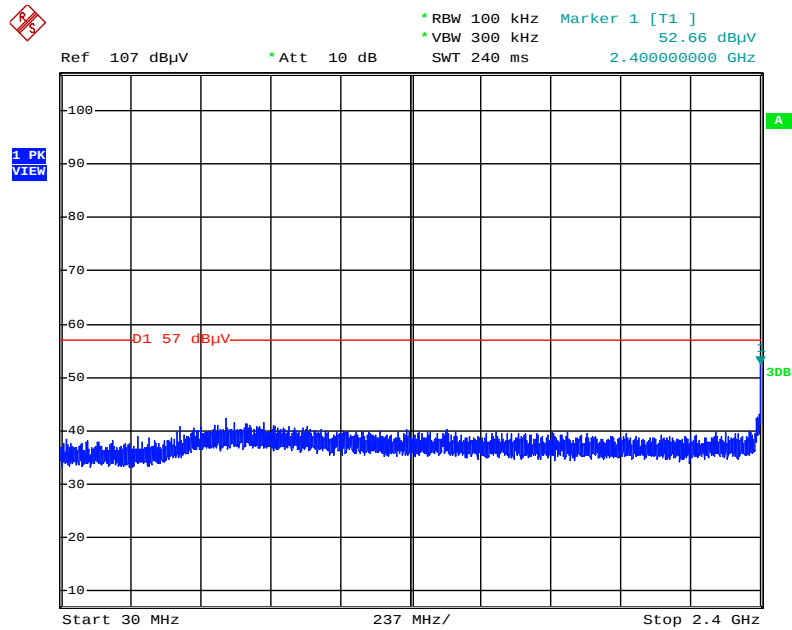


Date: 20.AUG.2015 02:17:18

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc) / Chain 5

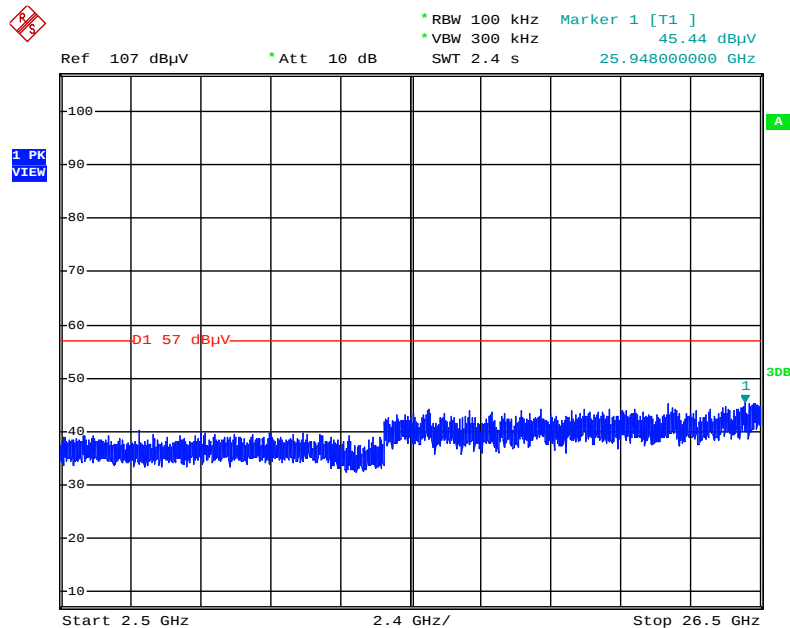


Date: 20.AUG.2015 02:17:38

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc) / Chain 5

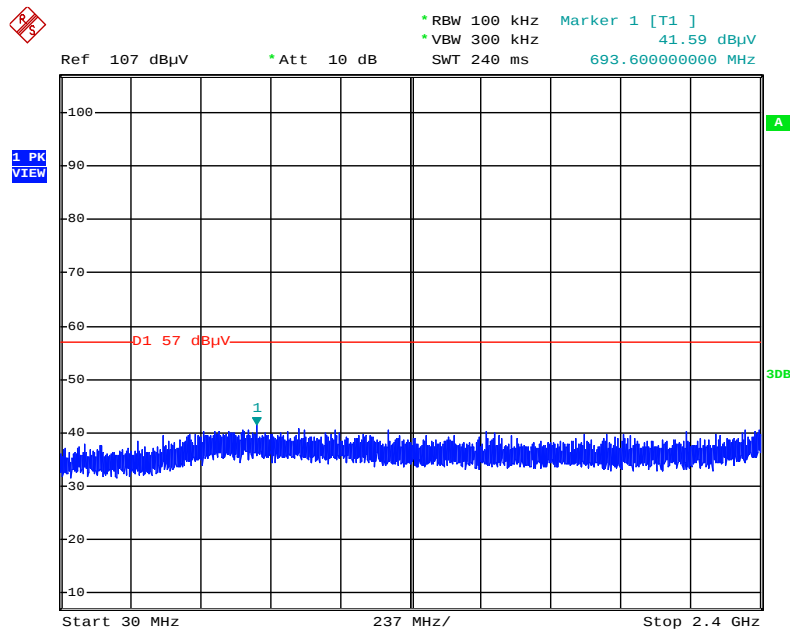


Date: 20.AUG.2015 02:18:08

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc) / Chain 5

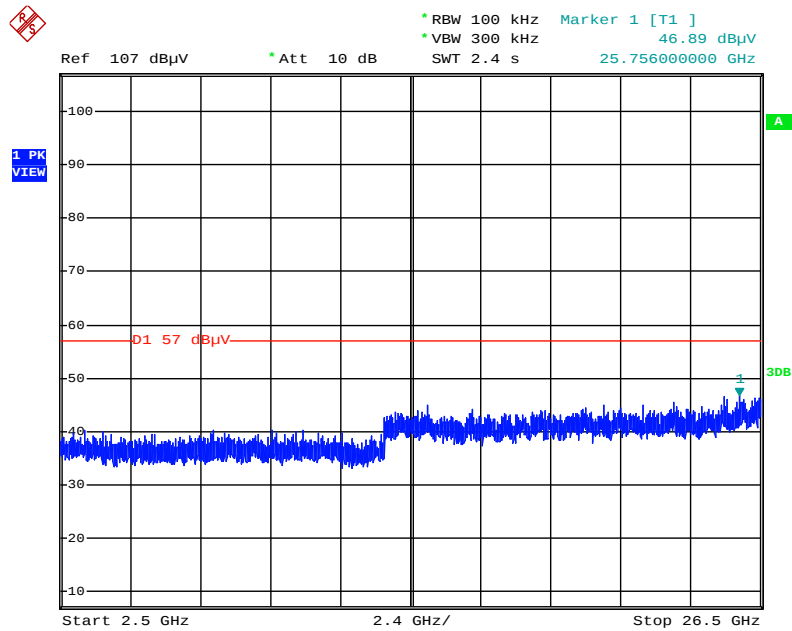


Date: 20.AUG.2015 02:18:32

Plot on Configuration IEEE 802.11n MCS8 HT20 / Reference Level / Chain 5 + Chain 6

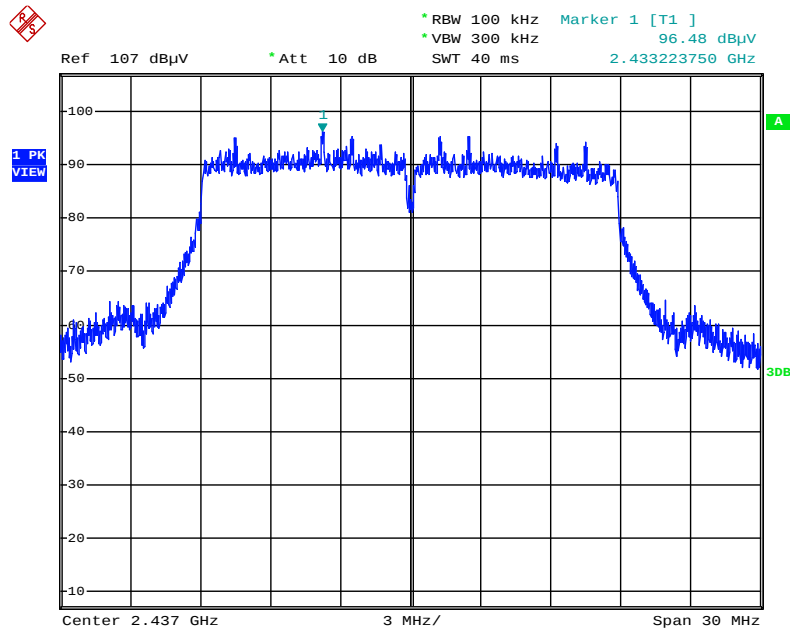


Date: 20.AUG.2015 02:20:53

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc) / Chain 5 + Chain 6

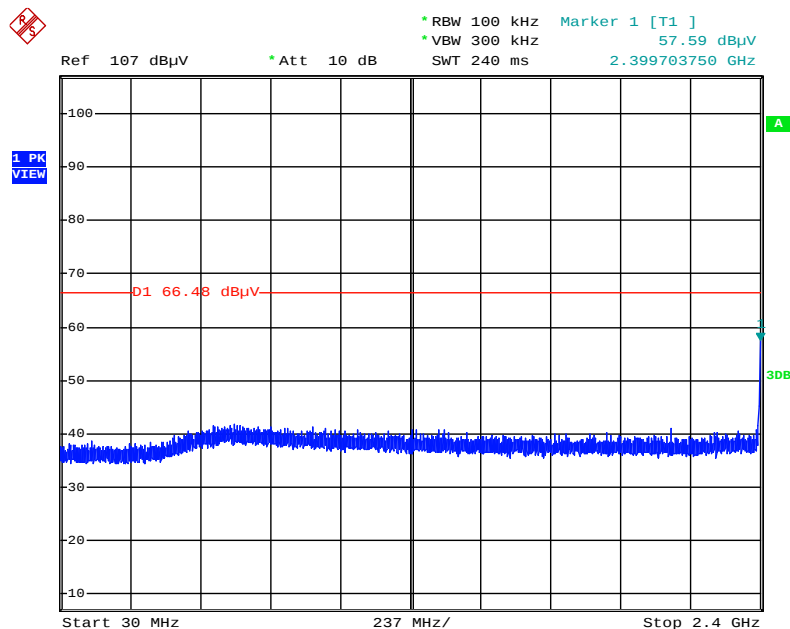


Date: 20.AUG.2015 02:23:43

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc) /
Chain 5 + Chain 6

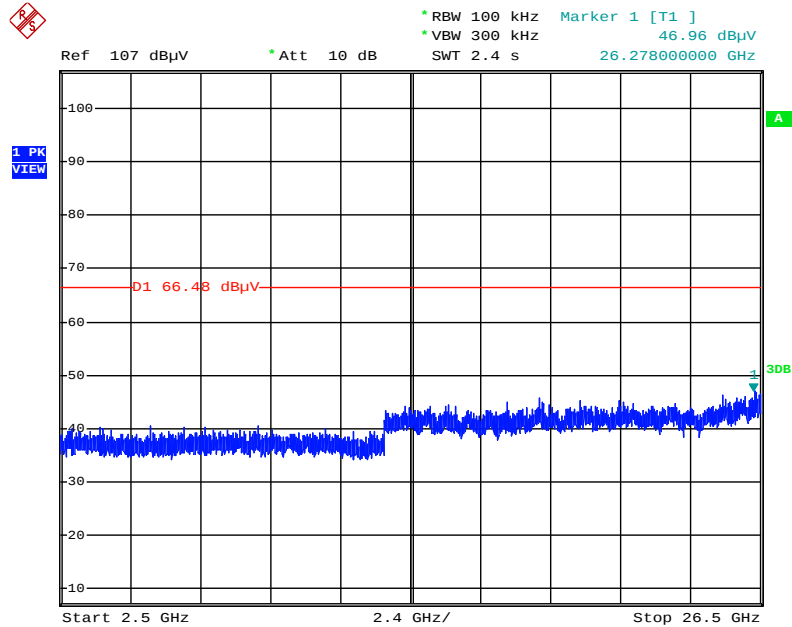


Date: 20.AUG.2015 02:24:33

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc) /
Chain 5 + Chain 6

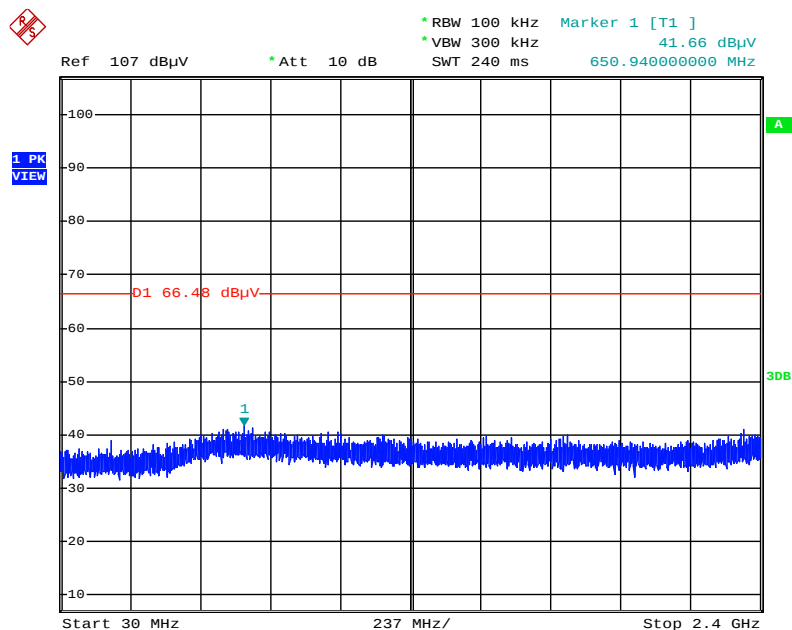


Date: 20.AUG.2015 02:25:29

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc) /
Chain 5 + Chain 6

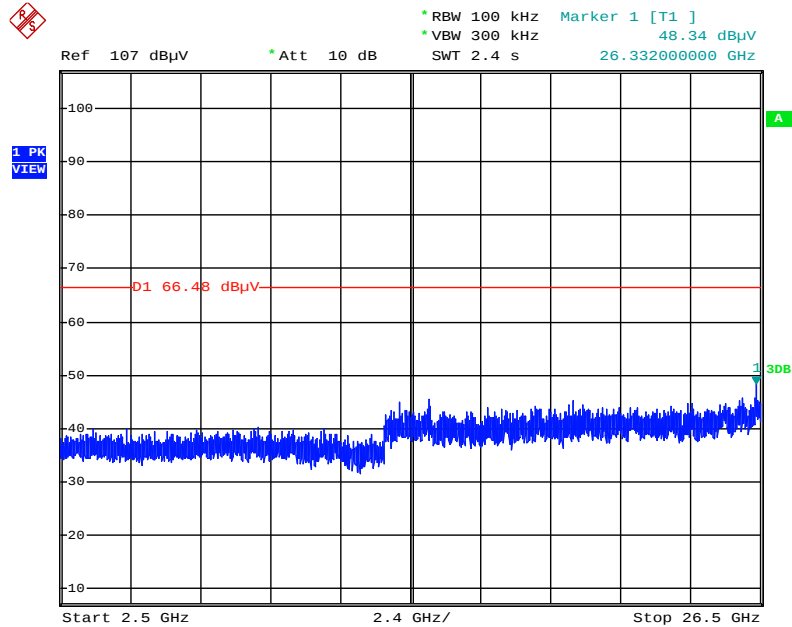


Date: 20.AUG.2015 02:25:55

Plot on Configuration IEEE 802.11n MCS8 HT40 / Reference Level / Chain 5 + Chain 6

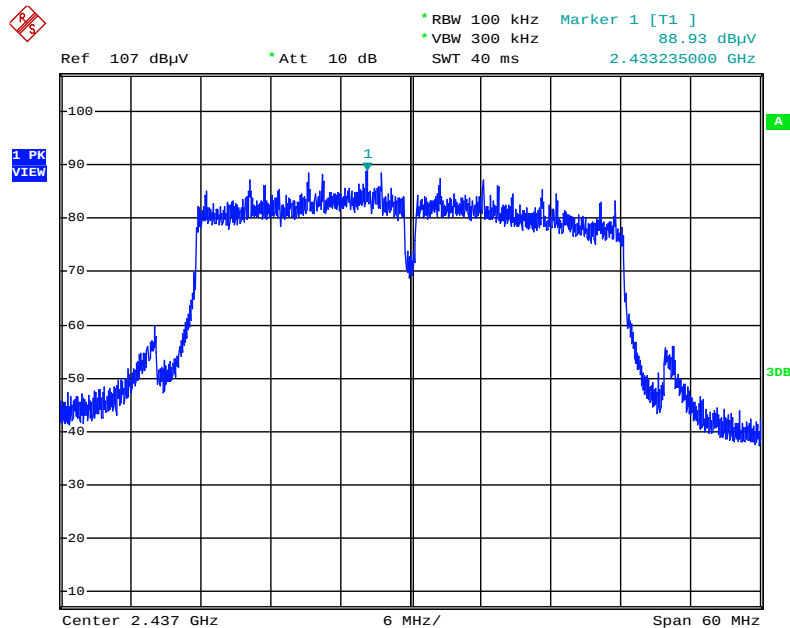


Date: 20.AUG.2015 02:26:59

Plot on Configuration IEEE 802.11n MCS8 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc) / Chain 5 + Chain 6

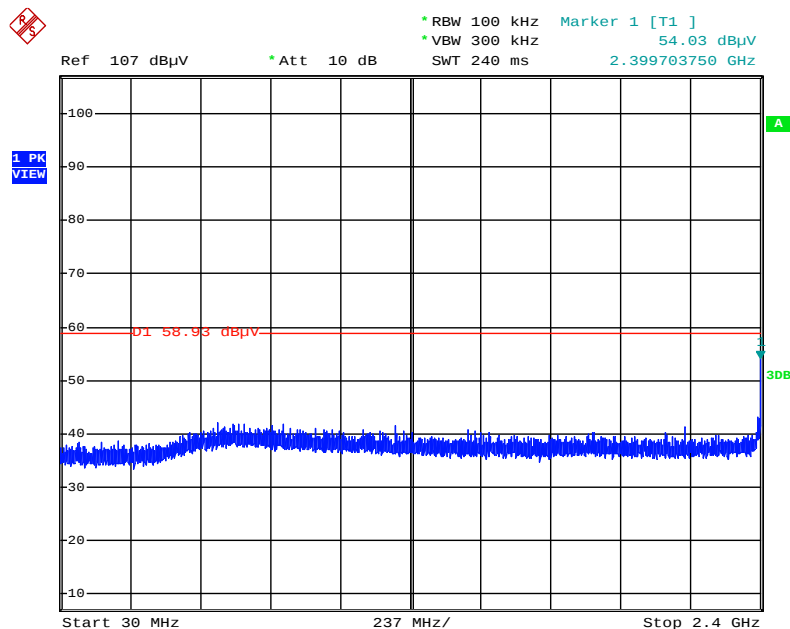


Date: 20.AUG.2015 02:28:37

Plot on Configuration IEEE 802.11n MCS8 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc) /
Chain 5 + Chain 6

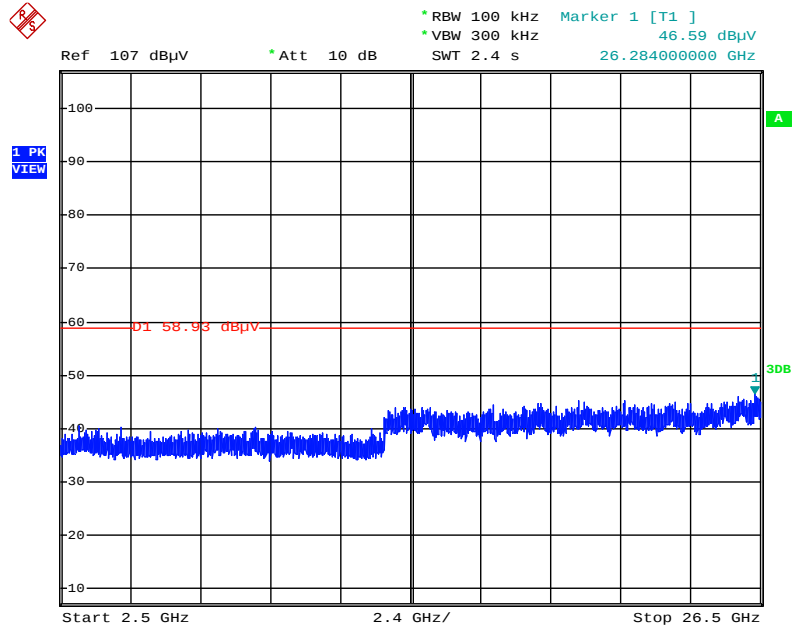


Date: 20.AUG.2015 02:29:18

Plot on Configuration IEEE 802.11n MCS8 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc) /
Chain 5 + Chain 6

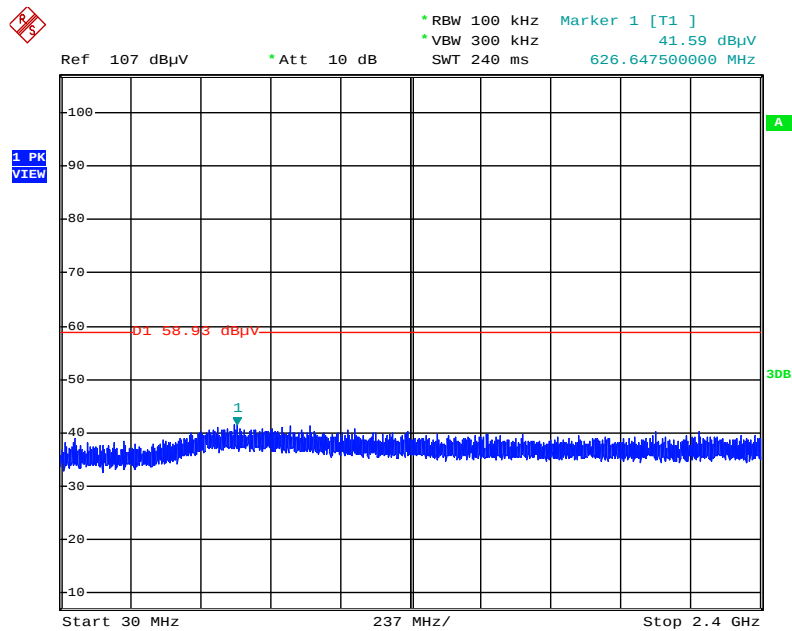

Date: 20.AUG.2015 02:30:28

Plot on Configuration IEEE 802.11n MCS8 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc) /
Chain 5 + Chain 6

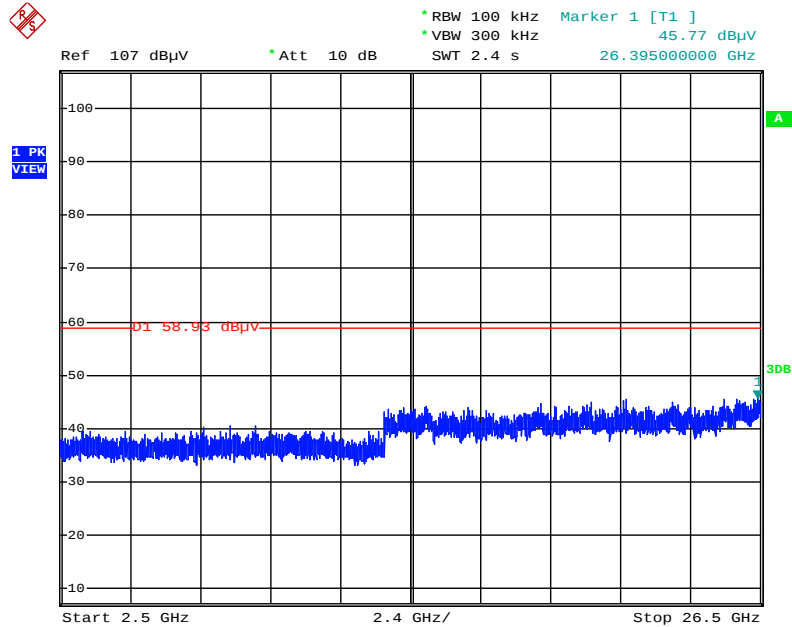

Date: 20.AUG.2015 02:30:51

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%