



FCC TEST REPORT

**Test report
On Behalf of
Shenzhen Feasycom Technology Co.,LTD
For
Bluetooth and Wi-Fi combo module
Model No.: FSC-BW236**

FCC ID: 2AMWOFSC-BW236

Prepared for : Shenzhen Feasycom Technology Co.,LTD
Room 2004A, 20th Floor, Huichao Technology Building, Jinhai Road,
Xixiang, Baoan District, Shenzhen, China 518102

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: Oct. 26, 2020 -- Nov. 04, 2020

Date of Report: Nov. 04, 2020

Report Number: HK2010293163-2E



TEST RESULT CERTIFICATION

Applicant's name..... : Shenzhen Feasycom Technology Co.,LTD
Address : Room 2004A, 20th Floor, Huichao Technology Building, Jinhai Road, Xixiang, Baoan District, Shenzhen, China 518102
Manufacture's Name..... : Shenzhen Feasycom Technology Co.,LTD
Address : Room 2004A, 20th Floor, Huichao Technology Building, Jinhai Road, Xixiang, Baoan District, Shenzhen, China 518102

Product description

Trade Mark : Feasycom
Product name : Bluetooth and Wi-Fi combo module
Model and/or type reference : FSC-BW236

Standards..... : FCC Part 15 Subpart C Section 15.247

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test..... :
Date (s) of performance of tests..... : Oct. 26, 2020 -- Nov. 04, 2020
Date of Issue..... : Nov. 04, 2020
Test Result : **Pass**

Testing Engineer : Gary Qian
(Gary Qian)

Technical Manager : Eden Hu
(Eden Hu)

Authorized Signatory : Jason Zhou
(Jason Zhou)



TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST PROCEDURES AND RESULTS	4
1.2. TEST FACILITY	4
1.3. Measurement Uncertainty	5
2. EUT Description	6
2.1. GENERAL DESCRIPTION OF EUT	6
2.2. Carrier Frequency of Channels	6
2.3. Operation of EUT during testing	6
2.4. DESCRIPTION OF TEST SETUP.....	7
3. General Information	8
3.1. Test environment and mode	8
3.2. Description of Support Units.....	9
4. Test Results and Measurement Data	10
4.1. Conducted Emission.....	10
4.2. Maximum Conducted Output Power	14
4.3. Emission Bandwidth	16
4.4. Power Spectral Density	22
4.5. Conducted Band Edge and Spurious Emission Measurement	28
4.6. Radiated Spurious Emission Measurement	46
4.7. ANTENNA REQUIREMENT	72
4.8. PHOTOGRAPH OF TEST	73
5. PHOTOS OF THE EUT	75



1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§5.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Shenzhen HUAK Testing Technology Co., Ltd.

Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.7:2015 & ANSI C63.10:2013 requirements.



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Product Name:	Bluetooth and Wi-Fi combo module
Model/Type reference:	FSC-BW236
Serial Model:	/
Trade Mark:	Feasycom
FCC ID	2AMWOFSC-BW236
Hardware Version:	V1.2
Software Version:	V2.2
Operation frequency	802.11b/g/n20: 2412~2462 MHz 802.11n40: 2422~2452 MHz
Number of Channels	802.11b/g/n20: 11CH
Modulation Type	CCK/DSSS/OFDM
Antenna type:	PCB Antenna
Antenna gain:	0dBi
Power Source	DC 3.3V from test board(5.0V)

Note: 1. For more details, refer to the user's manual of the EUT.

2. Test board powered by DC5.0V

2.2. Carrier Frequency of Channels

Channel List for 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Note: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below.

2.3. Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n(HT20)**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

Transmitting mode for 802.11n(HT40)


Low Channel: 2422MHz




Middle Channel: 2437MHz
High Channel: 2452MHz

2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing:

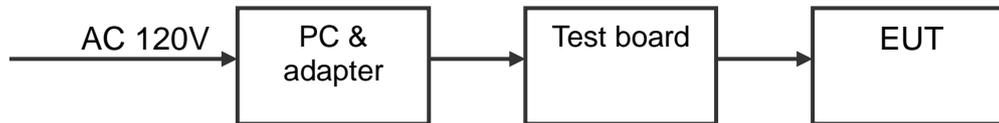

Operation of EUT during Radiation and Above1GHz Radiation testing:

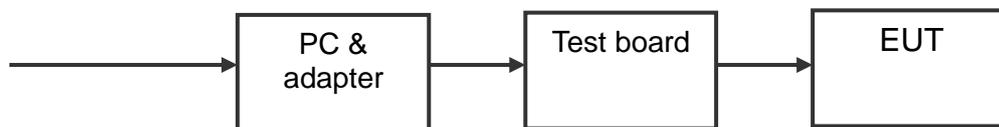

NOTE: DC 3.3V(EUT) from test board(5.0V)



3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	MCS0
802.11n(H40)	MCS7
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.	
2. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n(H20), MCS7 for 802.11n(H40). Duty cycle setting during the transmission is 100%with maximum power setting for all modulations.	



3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Description	Information	Manufacturer	Remark	Certificate
Computer	Model: TP00067A	DELL	Provide by lab	ID
PC Adapter	MODEL:PW25T12A1 INPUT:100-240V AC 50/60Hz OUTPUT:12V 6A	DELL	Provide by lab	SDOC

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



4. Test Results and Measurement Data

4.1. Conducted Emission

Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p style="text-align: center;">Reference Plane</p> <p style="text-align: center;">40cm 80cm</p> <p style="text-align: center;">E.U.T AC power LISN Filter AC power</p> <p style="text-align: center;">Test table/Insulation plane EMI Receiver</p> <p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														

**Test Instruments**

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 26, 2020
LISN	R&S	ENV216	HKE-002	Dec. 26, 2020
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




Test data

Note :

All the test modes completed for test. only the worst result of 802.11g at 2462MHz was reported as below:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

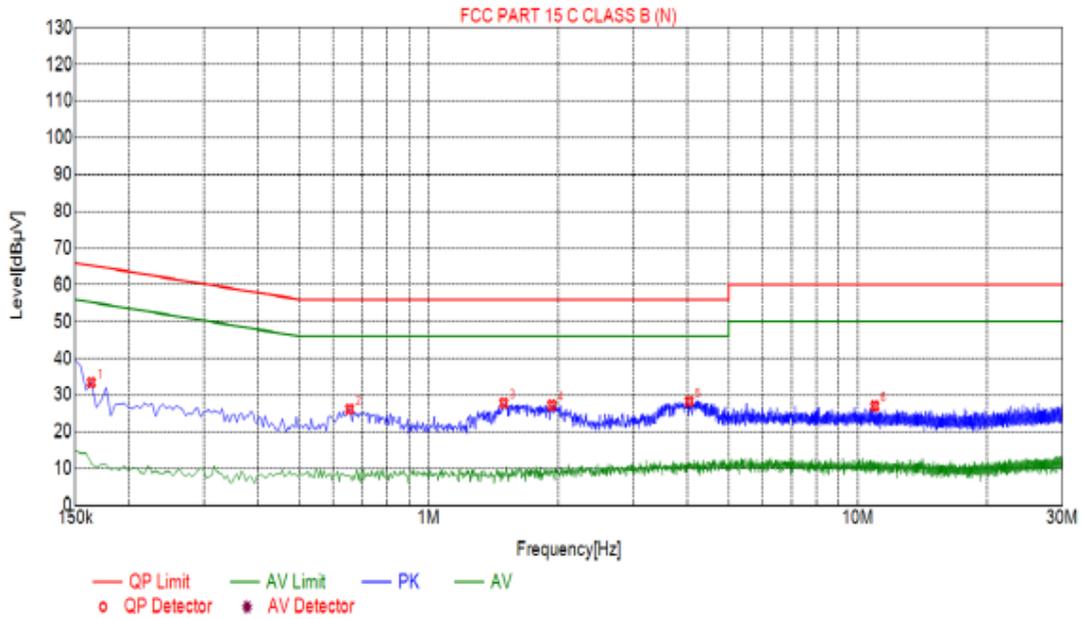


Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.1635	33.46	19.98	65.28	31.82	13.48	PK	N
2	0.6540	26.21	20.05	56.00	29.79	6.16	PK	N
3	1.4955	27.80	20.10	56.00	28.20	7.70	PK	N
4	1.9365	27.23	20.14	56.00	28.77	7.09	PK	N
5	4.0470	28.31	20.25	56.00	27.69	8.06	PK	N
6	10.9545	27.00	20.01	60.00	33.00	6.99	PK	N

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

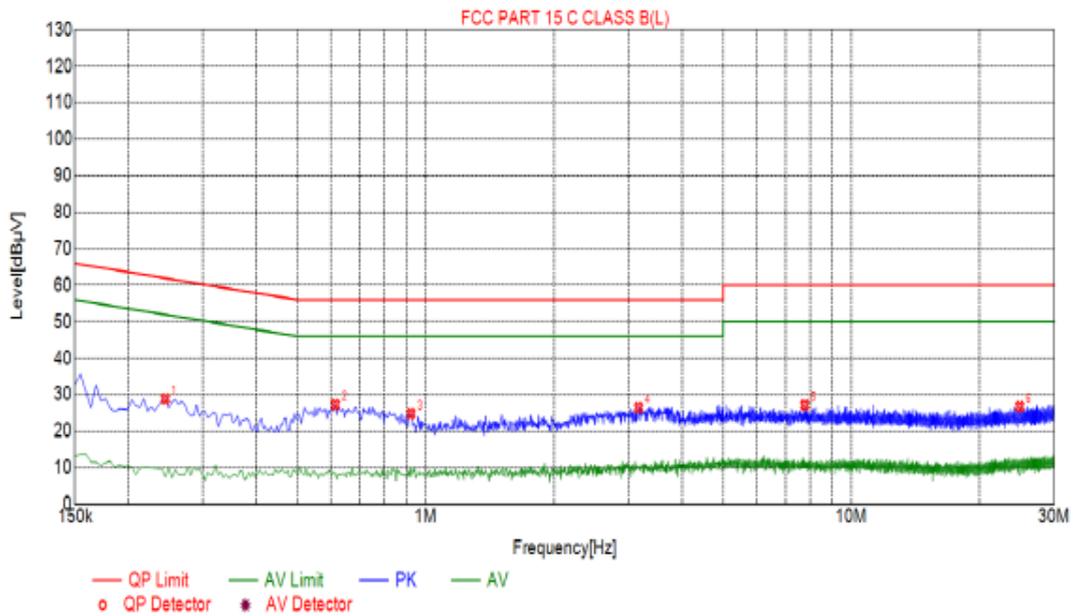

Suspected List								
NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.2445	28.87	20.03	61.94	33.07	8.84	PK	L
2	0.6135	27.26	20.05	56.00	28.74	7.21	PK	L
3	0.9240	24.79	20.06	56.00	31.21	4.73	PK	L
4	3.1650	26.49	20.23	56.00	29.51	6.26	PK	L
5	7.7775	27.15	20.16	60.00	32.85	6.99	PK	L
6	24.8885	26.75	20.24	60.00	33.25	6.51	PK	L

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor



4.2. Maximum Conducted Output Power

Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB 558074
Limit:	30dBm
Test Setup:	<p>The diagram shows a green Power meter on the left, connected by a grey cable to a small white attenuator box in the middle, which is then connected by another grey cable to a yellow EUT (Equipment Under Test) on the right.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 guidance V05r02 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the Peak output power and record the results in the test report.
Test Result:	PASS

Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power meter	Agilent	E4417B	HKE-107	Dec. 26, 2020
Power Sensor	Agilent	U2021X	HKE-113	Dec. 26, 2020
RF cable	Times	1-40G	HKE-034	Dec. 26, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 26, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test Data**

TX 802.11b Mode				
Test Channel	Frequency	Maximum Peak Conducted Output Power	Average Output Power	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	15.20	11.34	30
CH06	2437	15.76	11.27	30
CH11	2462	16.05	11.96	30
TX 802.11g Mode				
CH01	2412	15.62	11.05	30
CH06	2437	15.90	11.33	30
CH11	2462	16.35	11.14	30
TX 802.11n20 Mode				
CH01	2412	15.61	11.15	30
CH06	2437	15.91	10.98	30
CH11	2462	16.20	11.06	30
TX 802.11n40 Mode				
CH03	2422	13.59	8.27	30
CH06	2437	13.65	8.55	30
CH09	2452	13.64	8.24	30

**Test data**

Test channel	6dB Emission Bandwidth (MHz)			
	802.11b	802.11g	802.11n(H20)	802.11n(H40)
Lowest	9.604	16.56	17.74	36.41
Middle	9.578	16.50	17.75	36.41
Highest	10.03	16.51	17.67	36.40
Limit:	>500kHz			
Test Result:	PASS			

Test plots as follows:



802.11b Modulation

Lowest channel



Middle channel



Highest channel





802.11g Modulation

Lowest channel



Middle channel



Highest channel





802.11n (HT20) Modulation

Lowest channel



Middle channel




Highest channel






802.11n (HT40) Modulation


Lowest channel

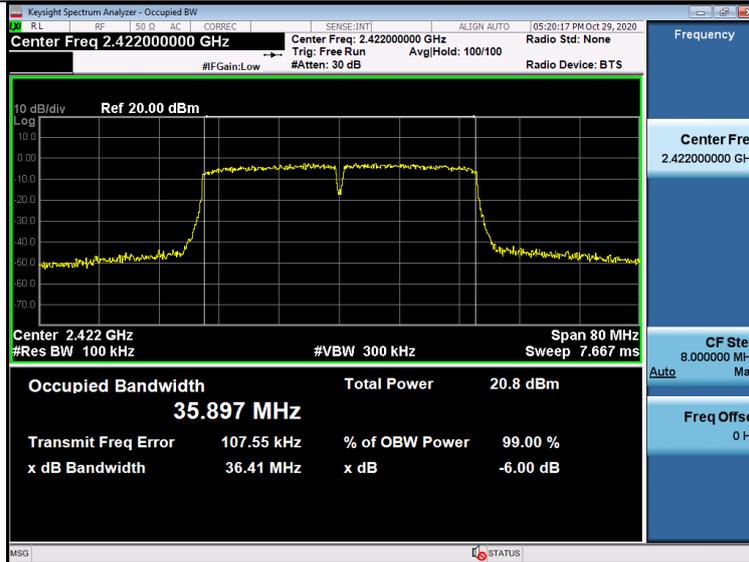

Middle channel

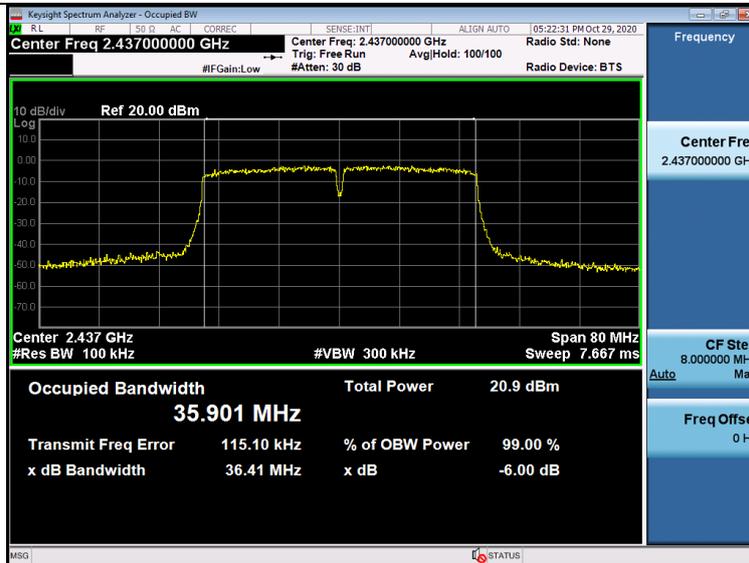


Highest channel

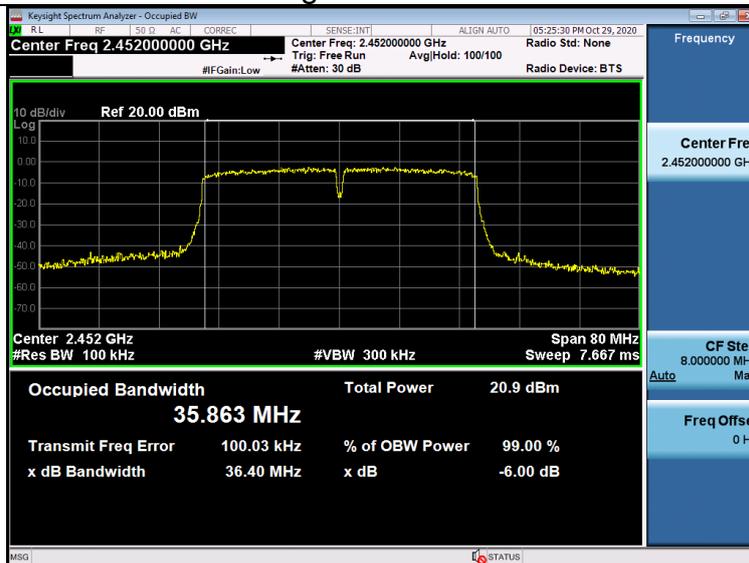



4.4. Power Spectral Density

Test Specification

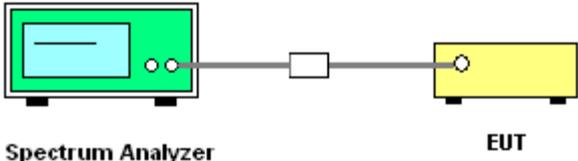Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v05r02 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = Peak, Sweep time = auto couple. 6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 26, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 26, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**

EUT Set Mode	Channel	Result (dBm/3kHz)
802.11b	Lowest	-15.675
	Middle	-15.206
	Highest	-14.770
802.11g	Lowest	-13.787
	Middle	-13.500
	Highest	-13.020
802.11n(H20)	Lowest	-13.721
	Middle	-13.446
	Highest	-12.892
802.11n(H40)	Lowest	-13.360
	Middle	-13.216
	Highest	-14.464
Limit:	8dBm/3kHz	
Test Result:	PASS	

Test plots as follows:



802.11b Modulation

Lowest channel



Middle channel




Highest channel






802.11g Modulation

Lowest channel

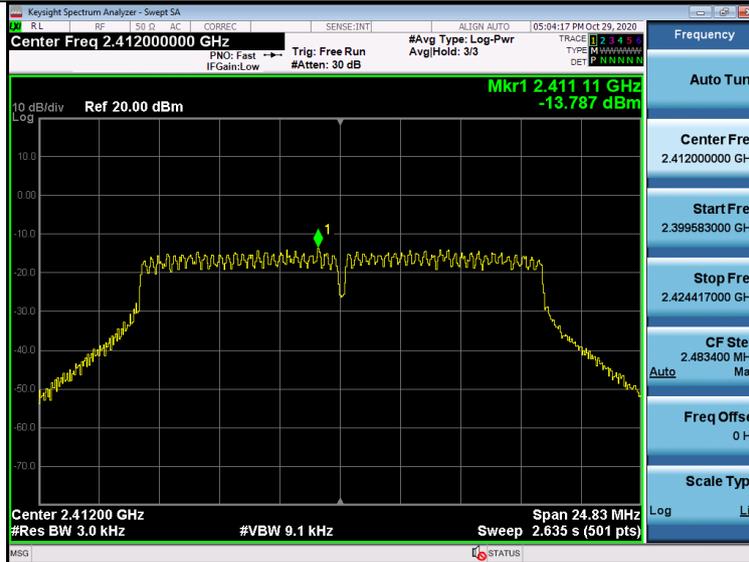

Middle channel

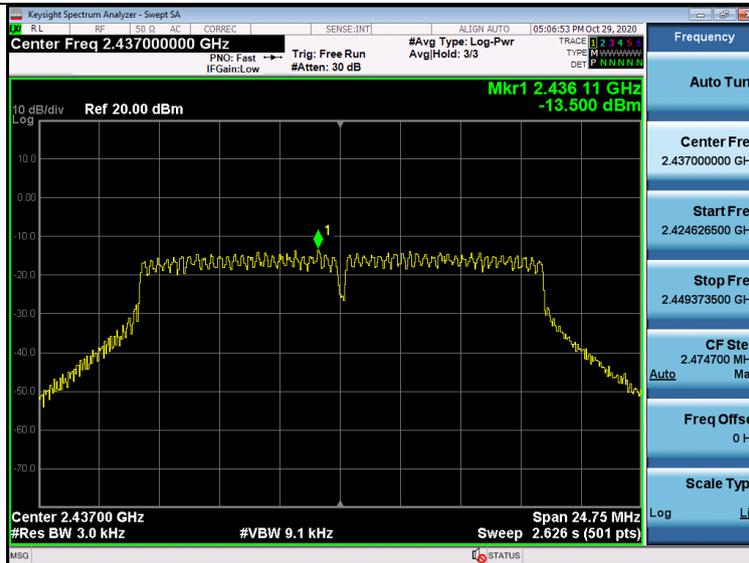


Highest channel






802.11n (HT20) Modulation


Lowest channel

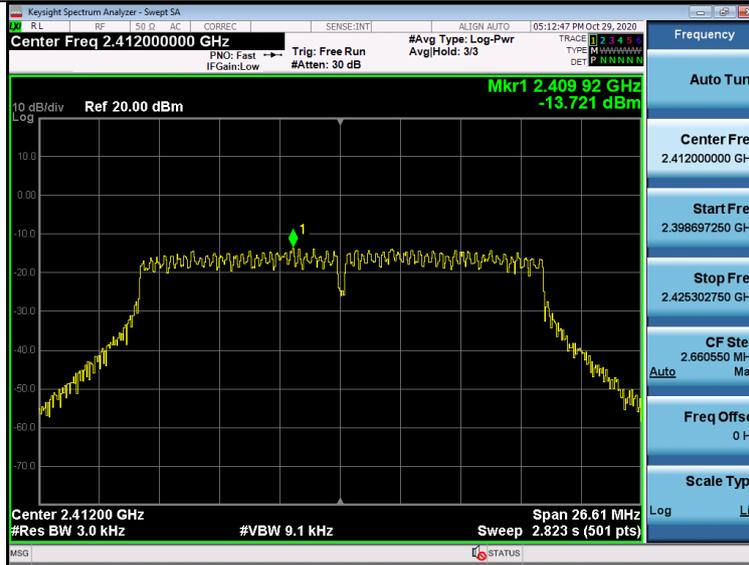

Middle channel

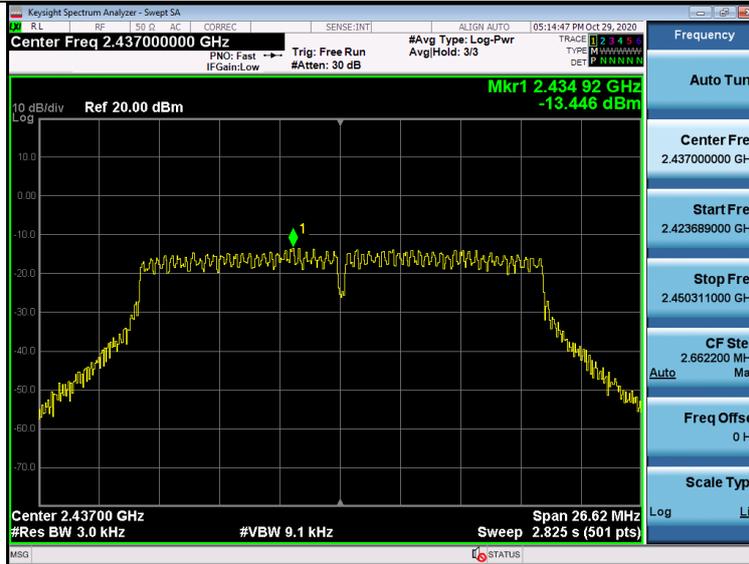


Highest channel

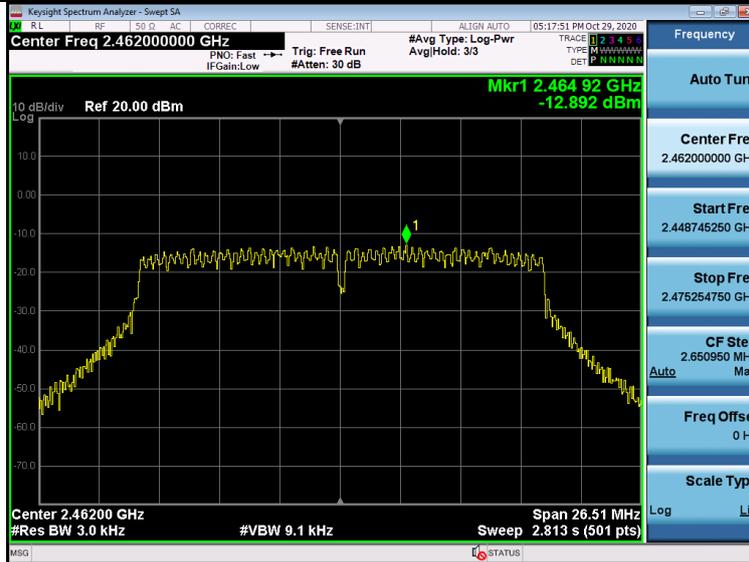



802.11n (HT40) Modulation


Lowest channel

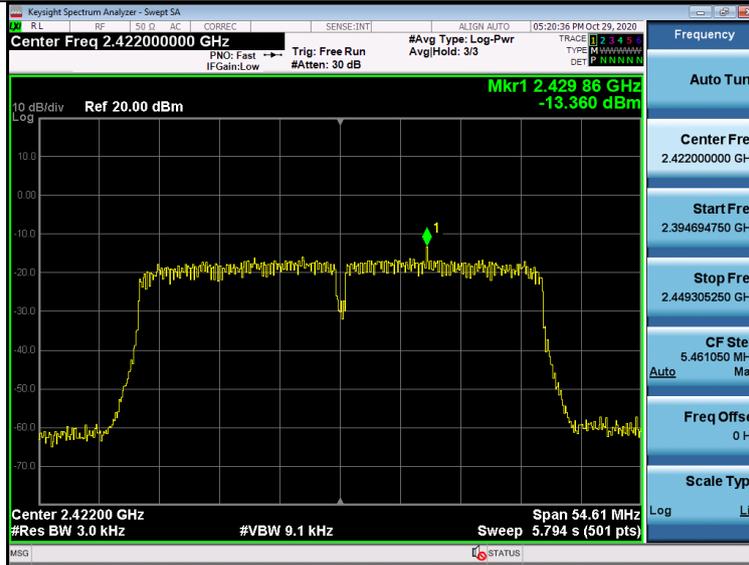

Middle channel



Highest channel

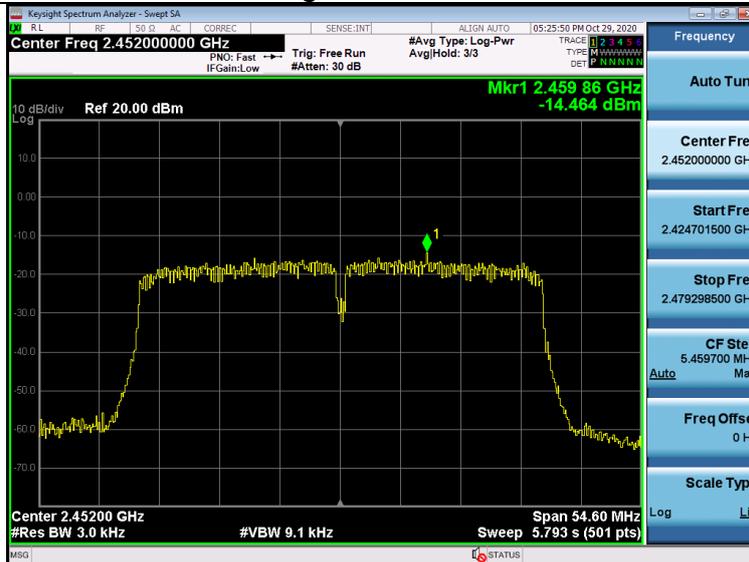

**Test Instruments**

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2020
Signal generator	Agilent	N5183A	HKE-071	Dec. 26, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 26, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 26, 2020


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Test Data**802.11b Modulation**




Spurious emission

Reference

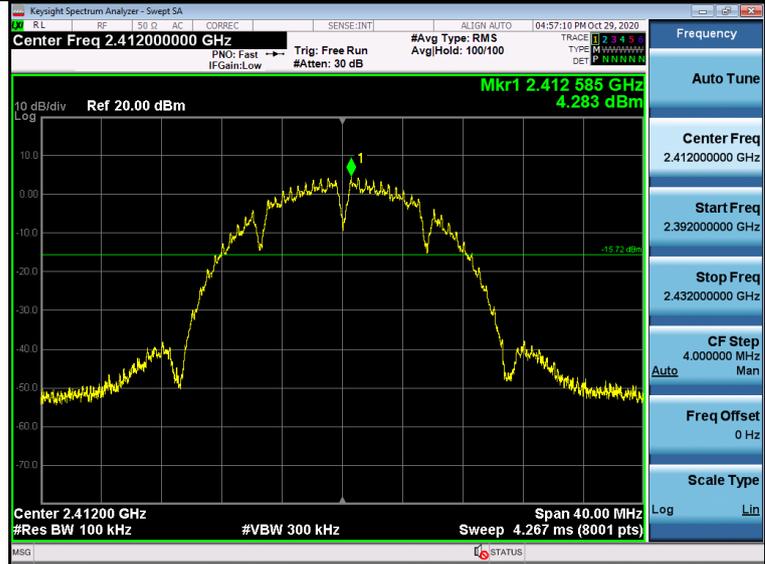


30MHz-10GHz

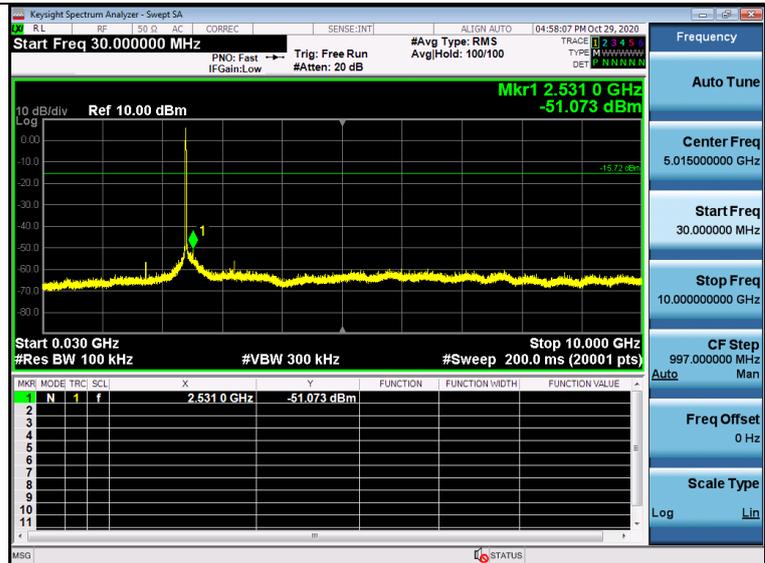

Low Channel

Above 10GHz

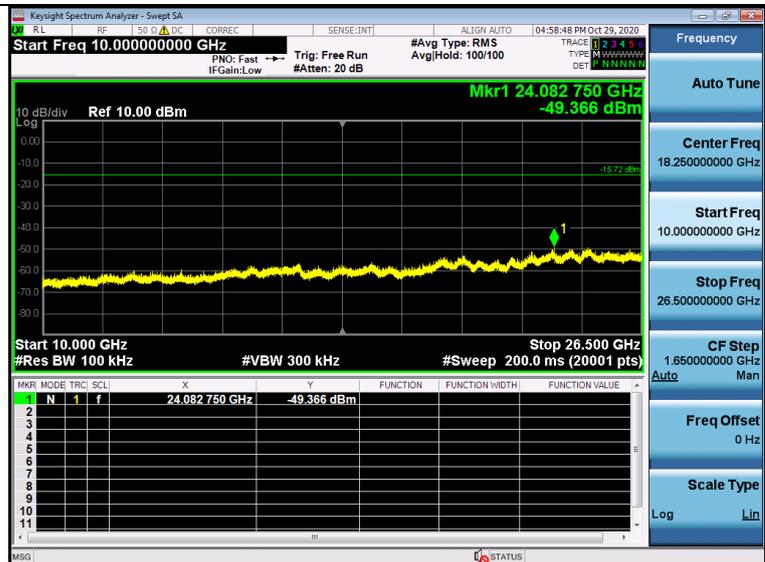




Middle Channel


Reference



30MHz-10GHz

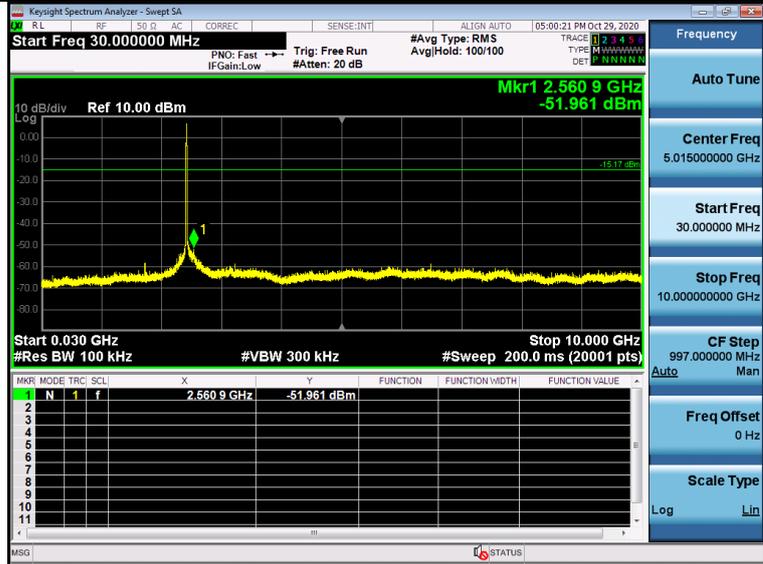


Above 10GHz

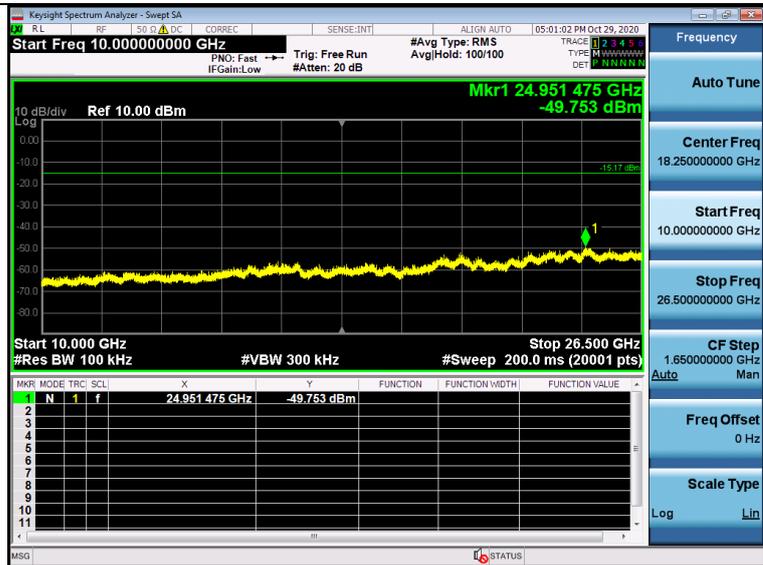


High Channel


Reference

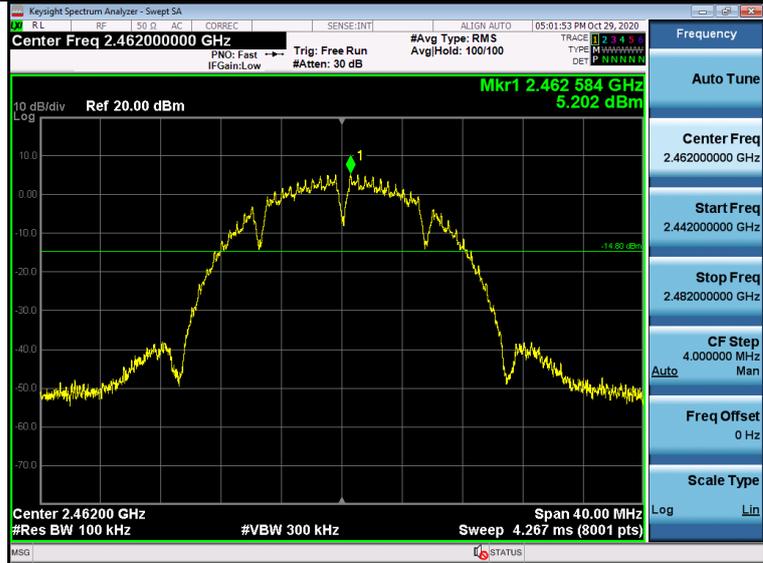


30MHz-10GHz

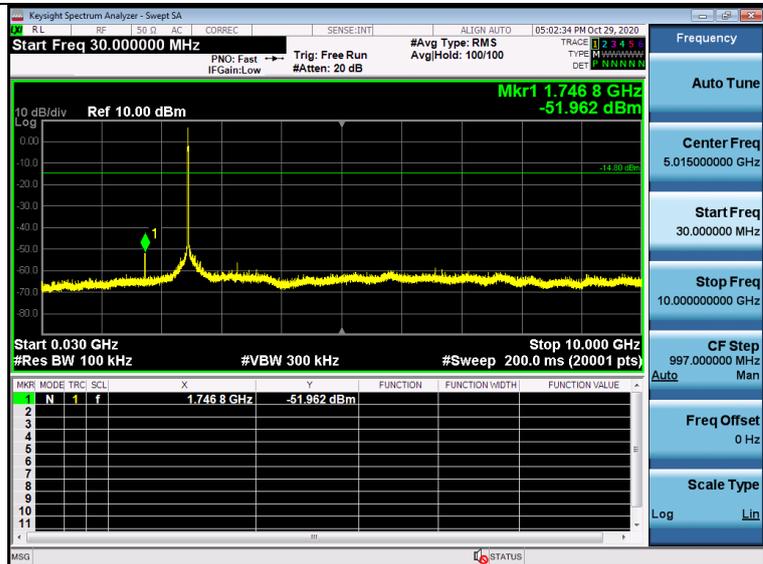

Above 10GHz

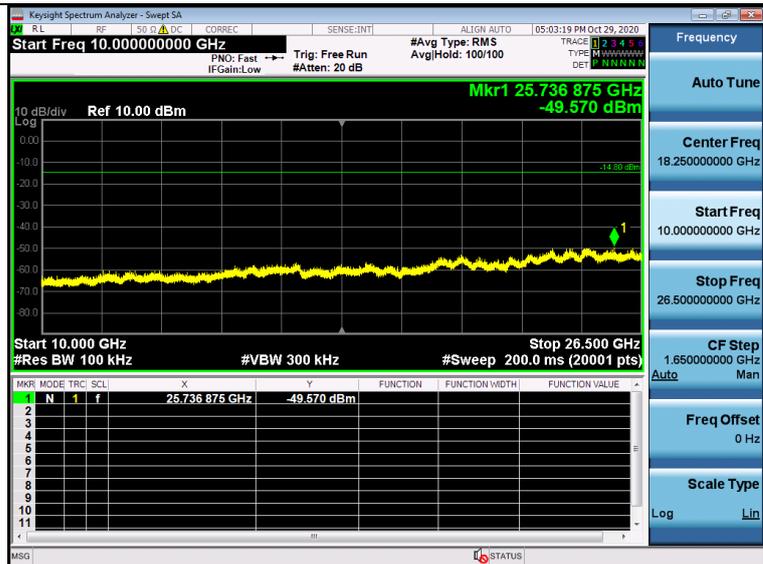

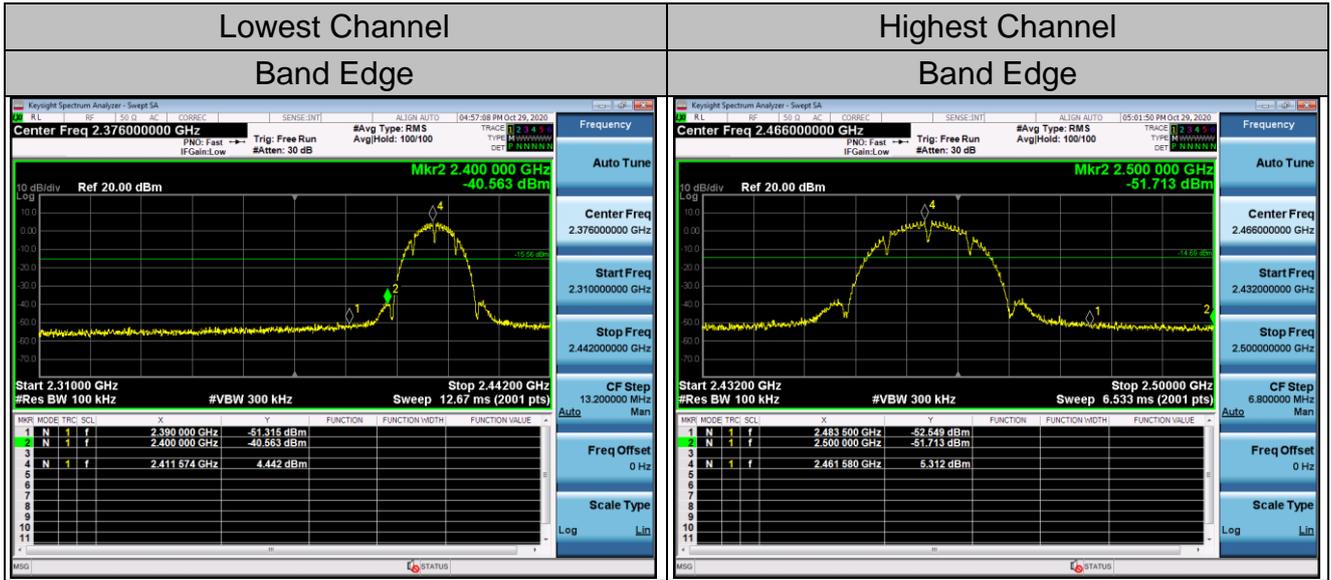




802.11g Modulation


Spurious emission

Low Channel


Reference

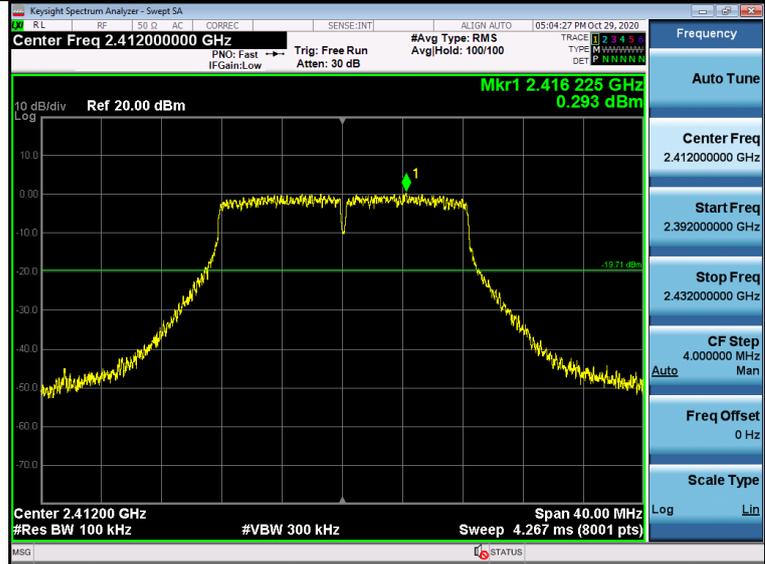

30MHz-10GHz

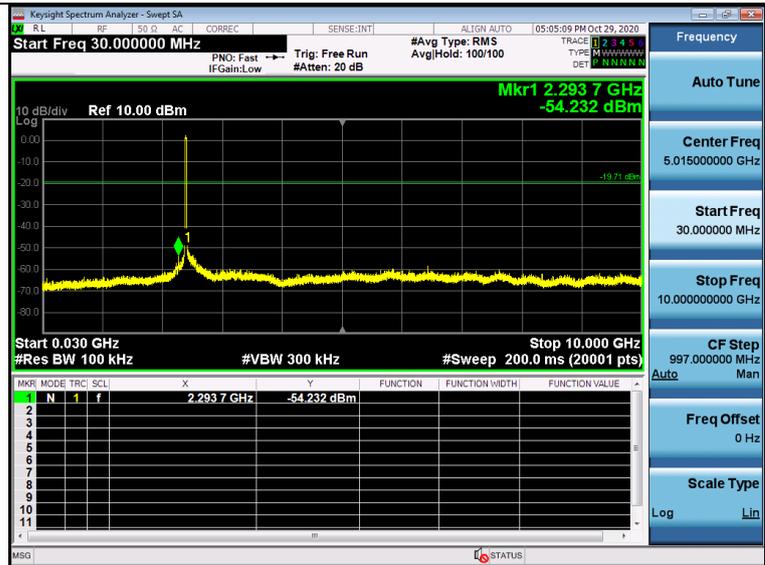


Above 10GHz

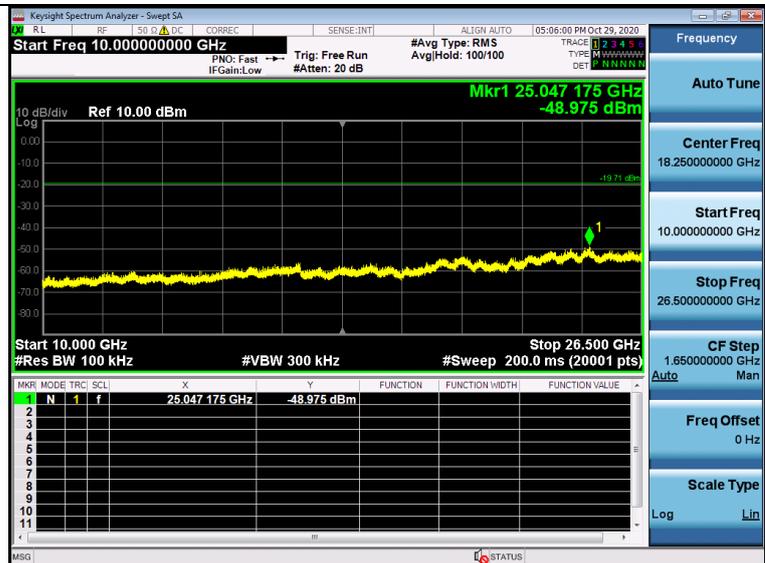




Middle Channel


Reference

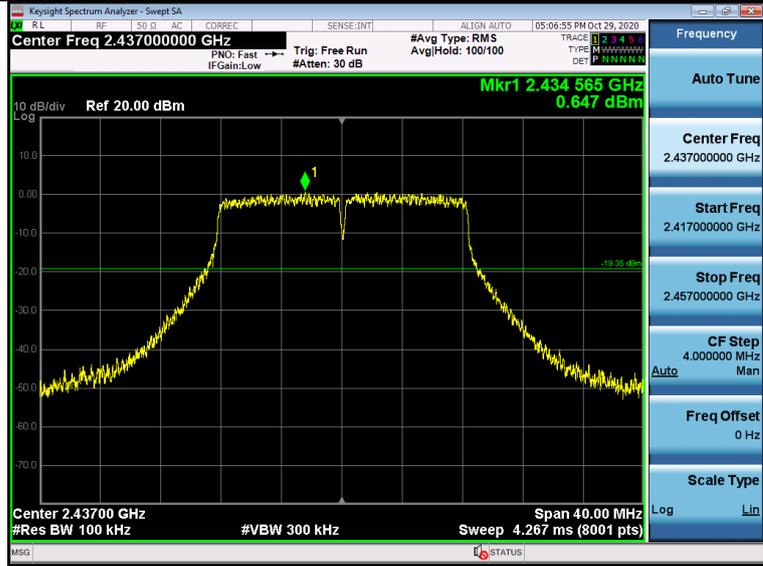

30MHz-10GHz

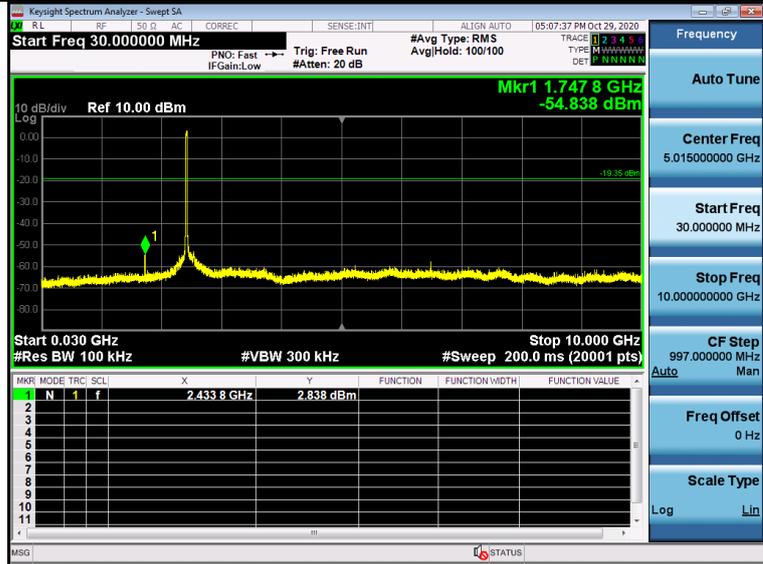


Above 10GHz

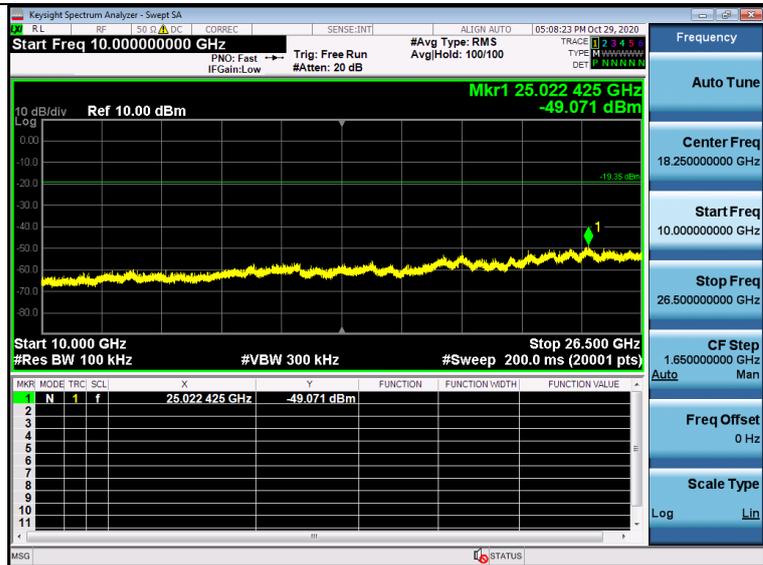




Reference

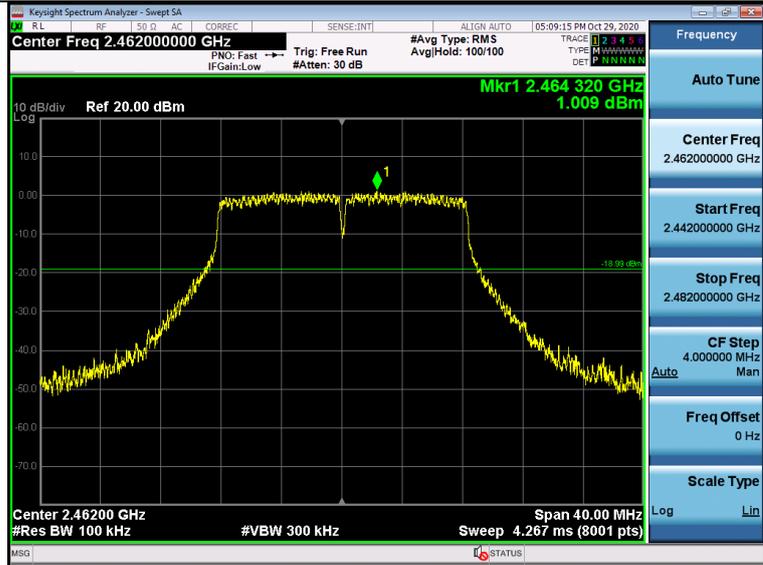



30MHz-10GHz

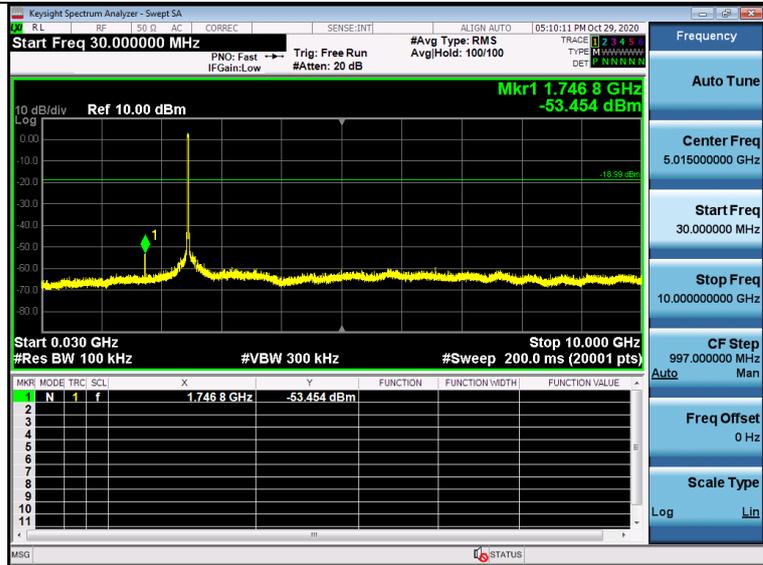

High Channel

Above 10GHz

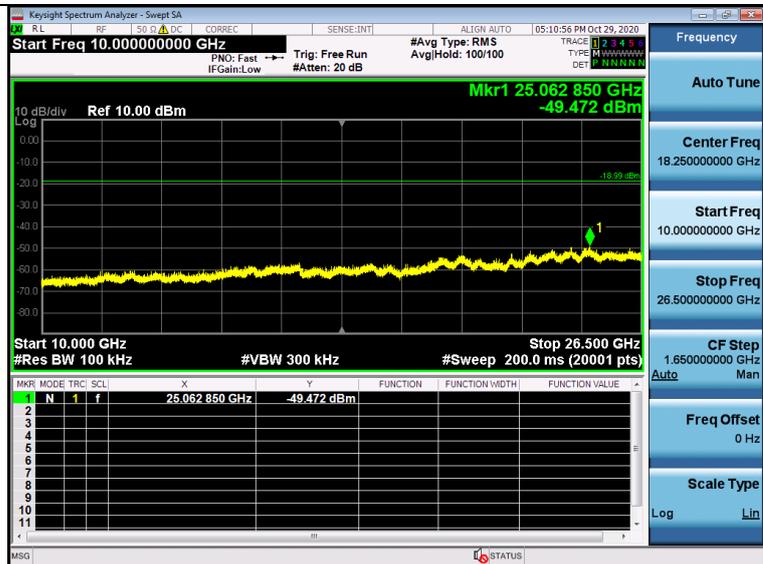

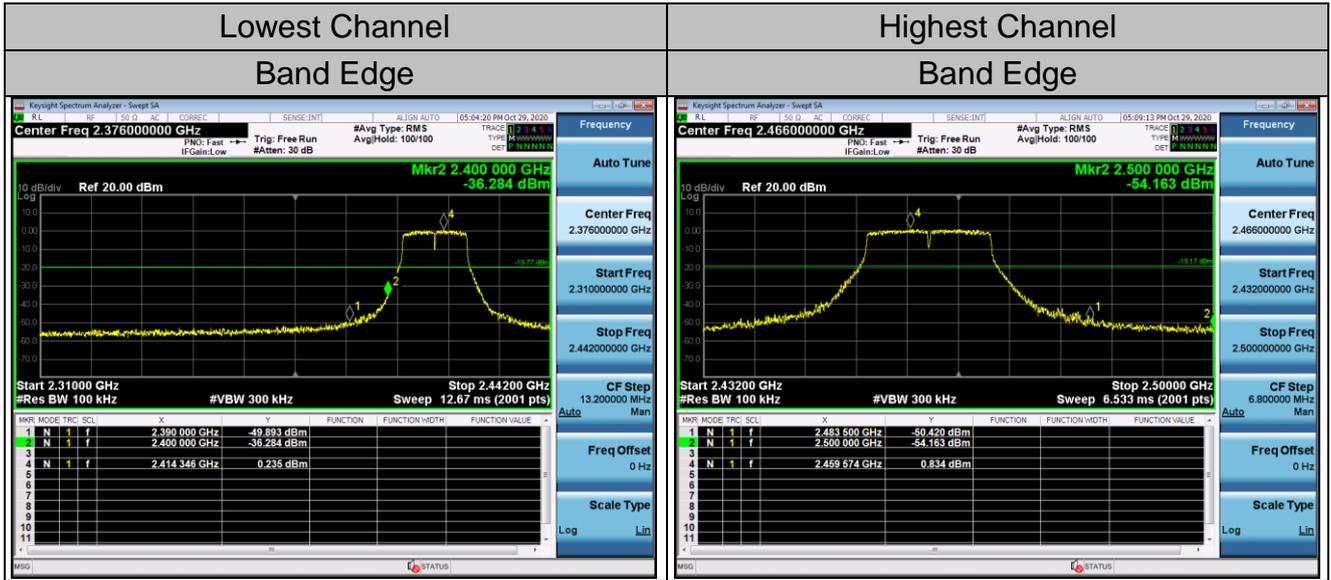




802.11n (HT20) Modulation


Spurious emission

Low Channel


Reference

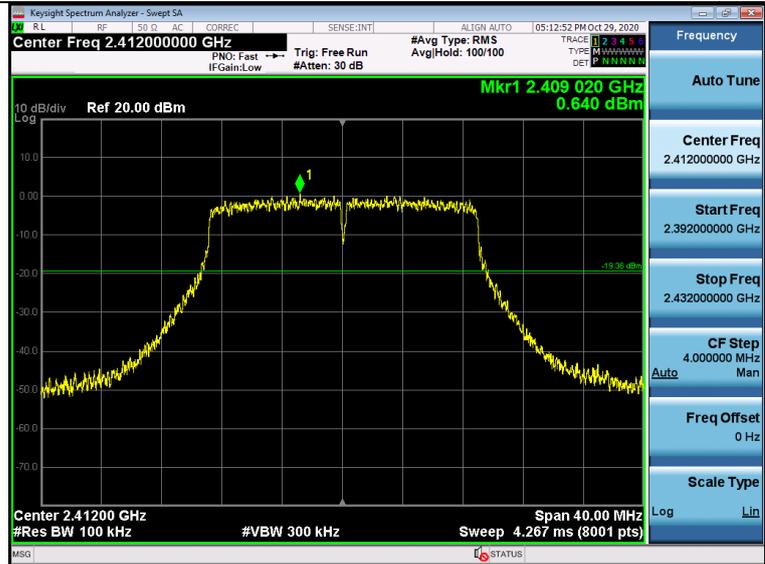

30MHz-10GHz

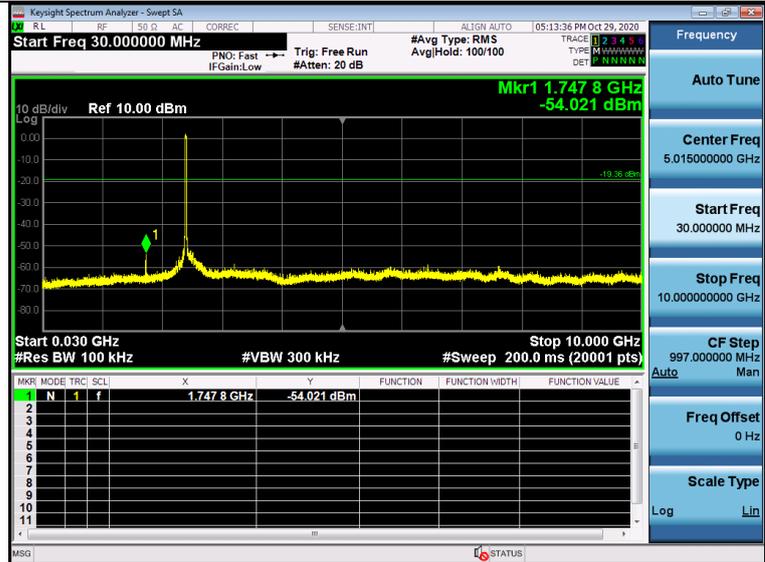


Above 10GHz

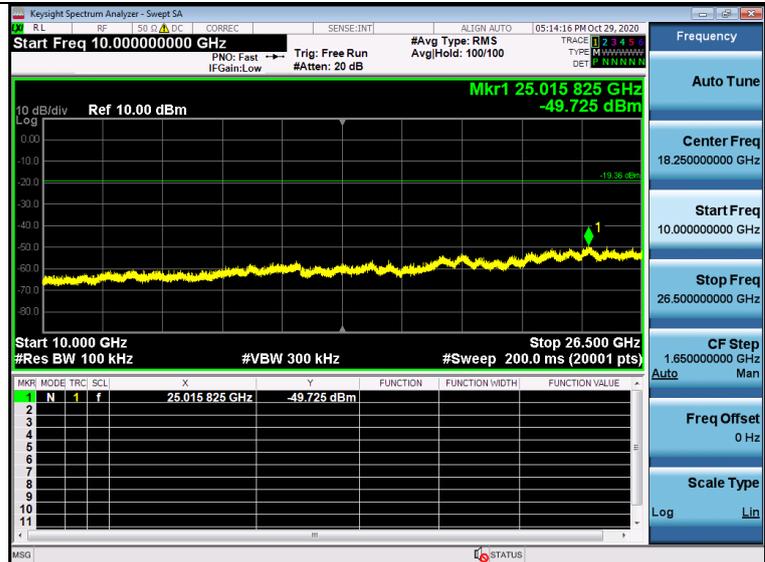




Middle Channel


Reference

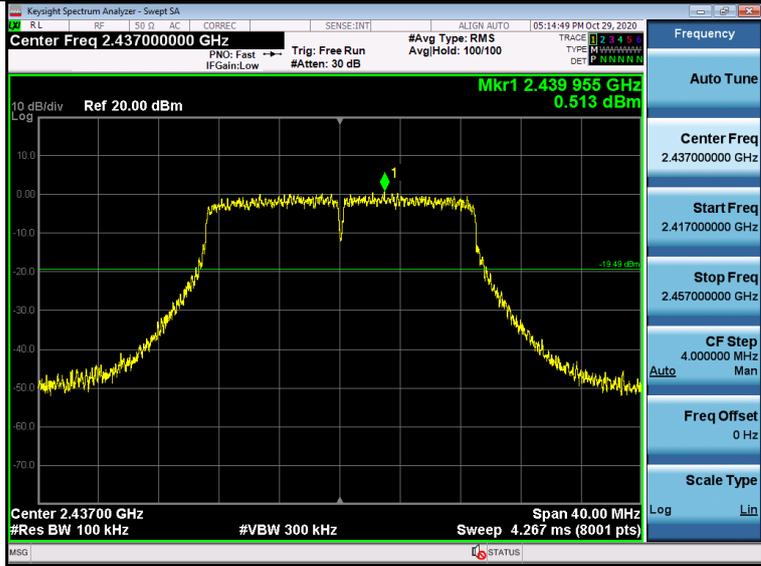

30MHz-10GHz

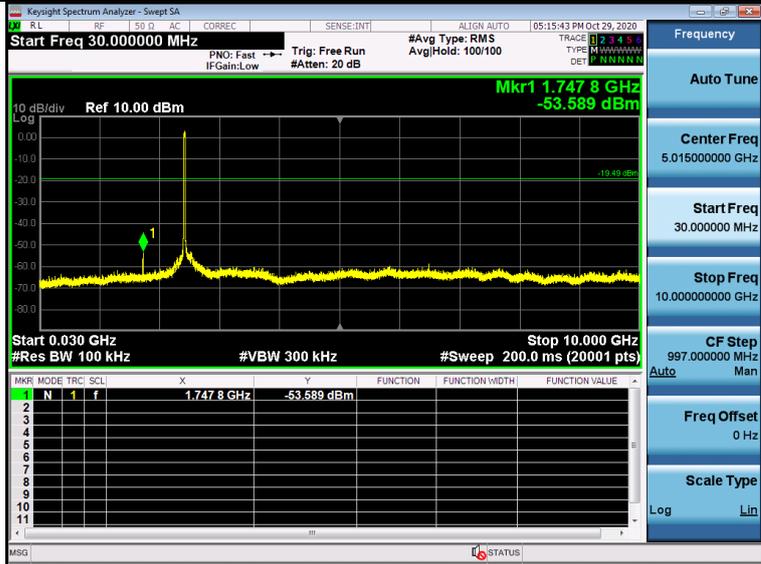


Above 10GHz

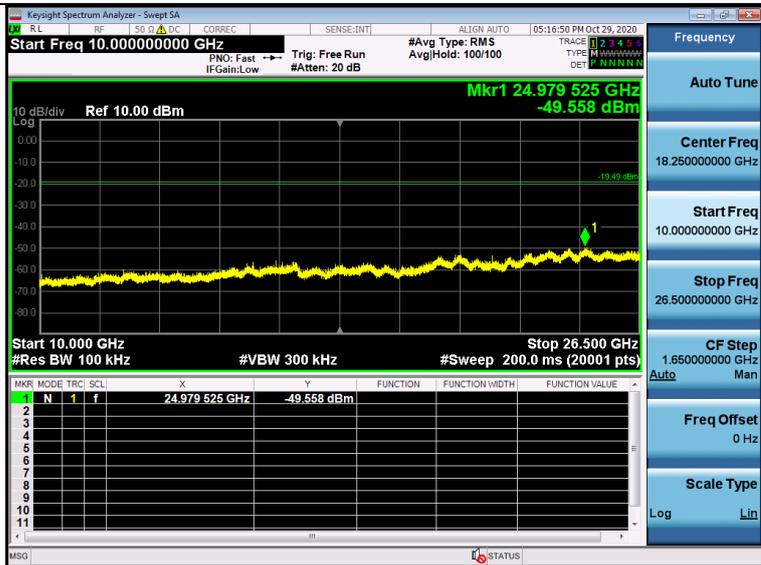




High Channel


Reference

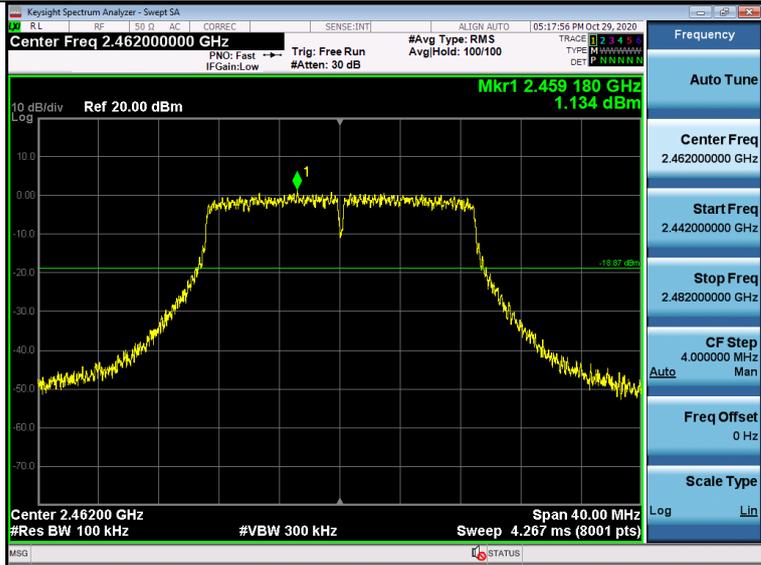


30MHz-10GHz

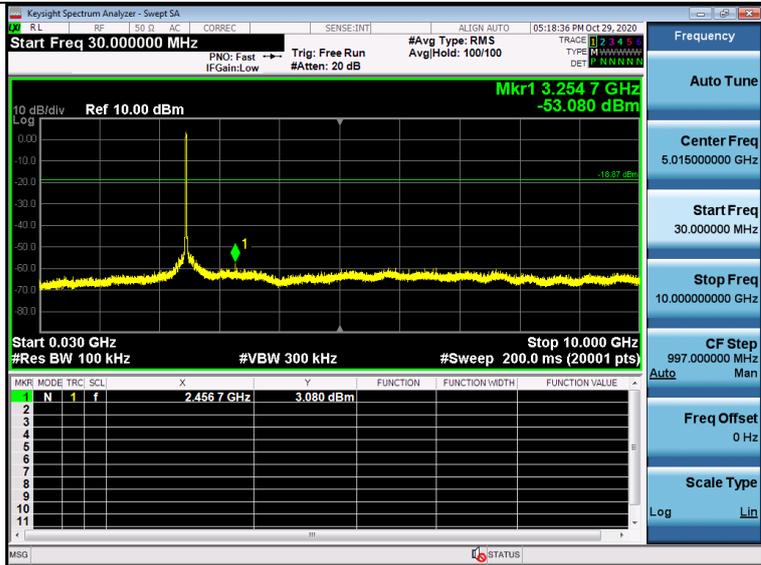

Above 10GHz

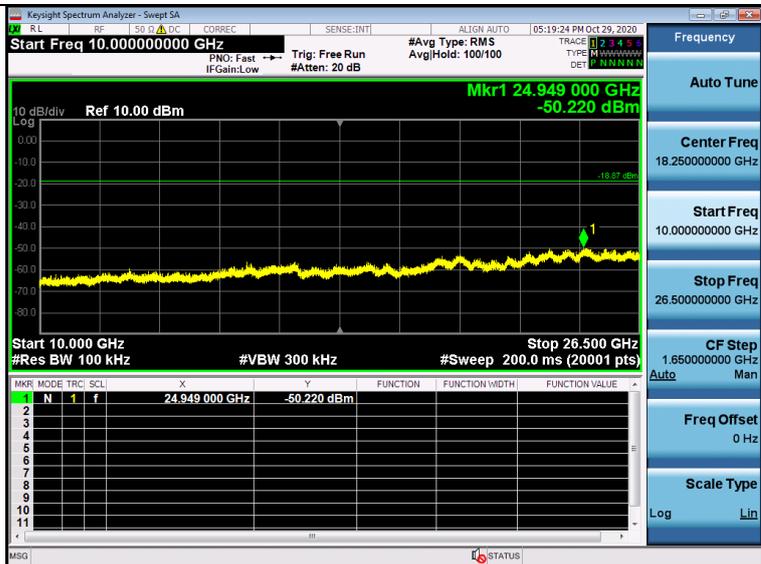

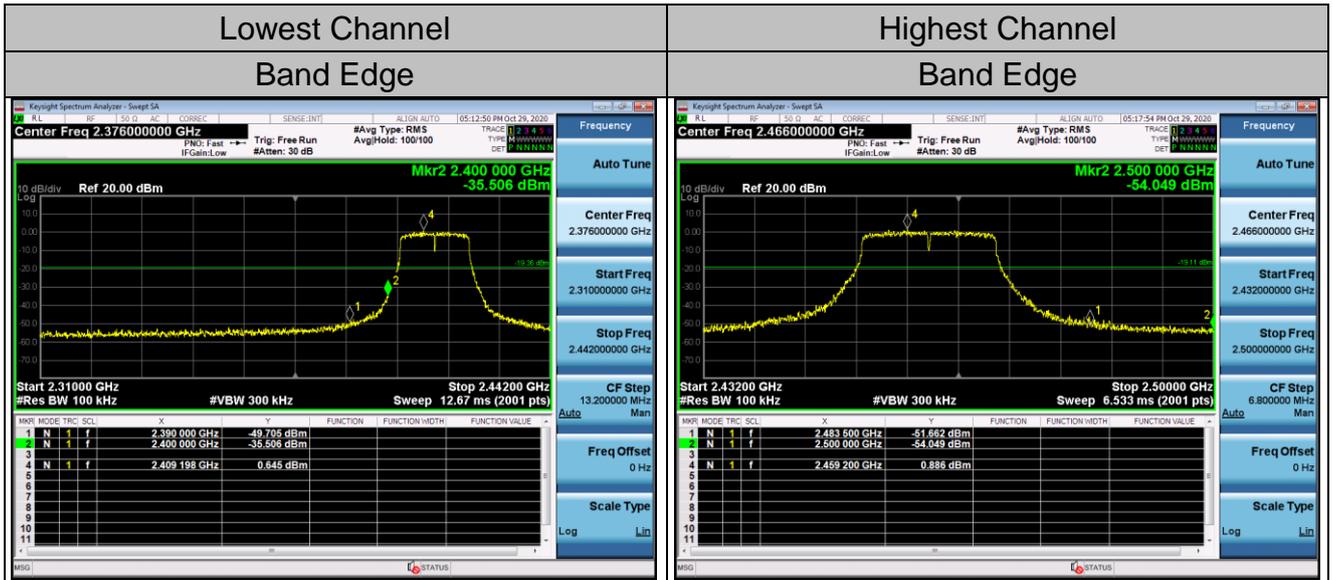




802.11n (HT40) Modulation


Spurious emission

Low Channel


Reference

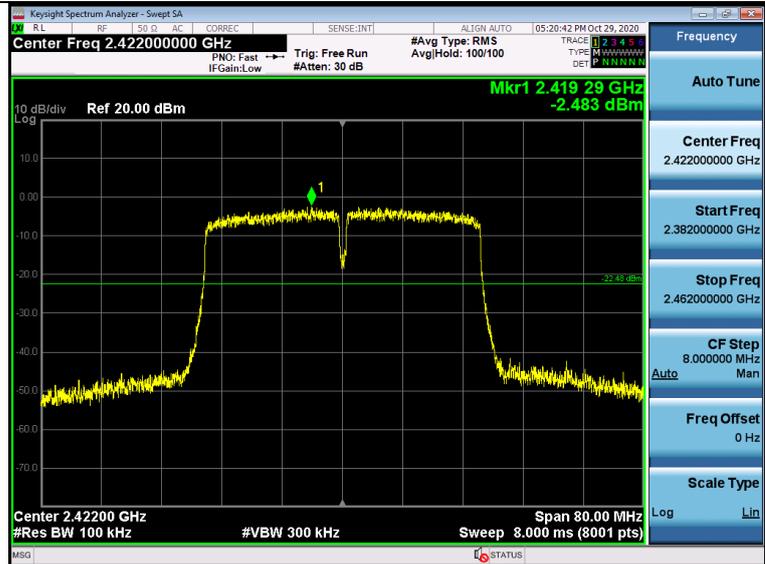

30MHz-10GHz

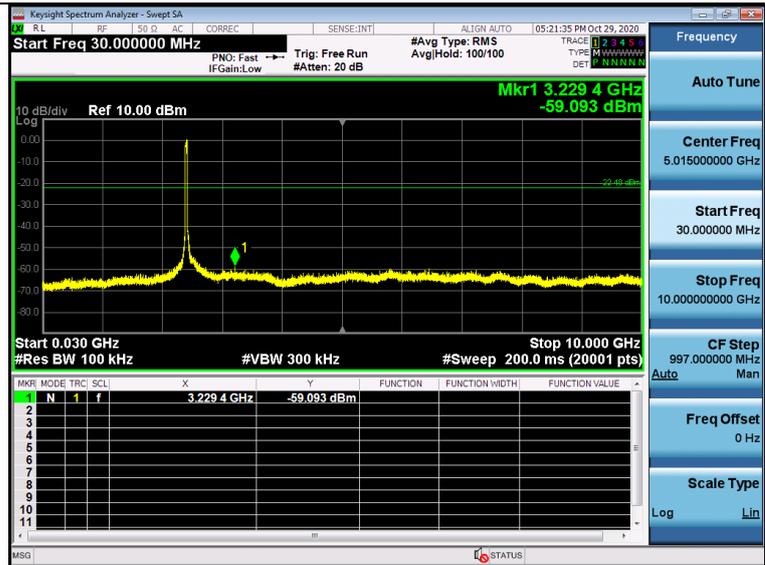


Above 10GHz

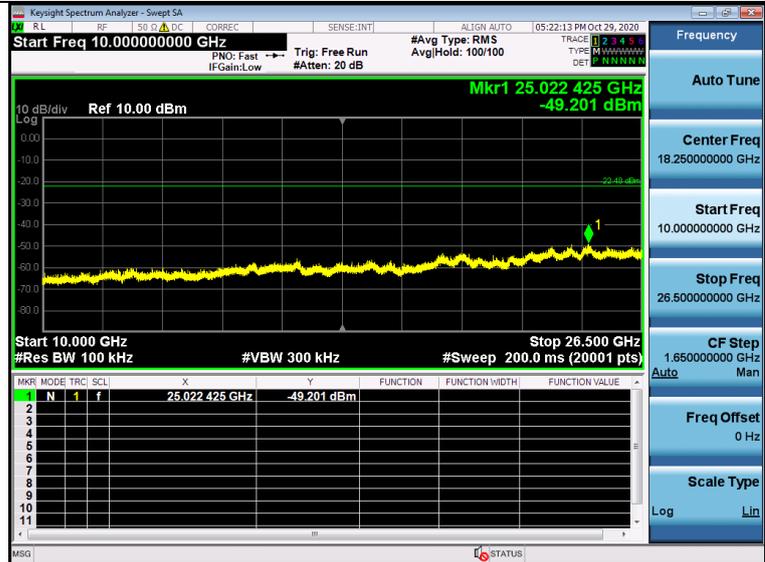




Middle Channel


Reference

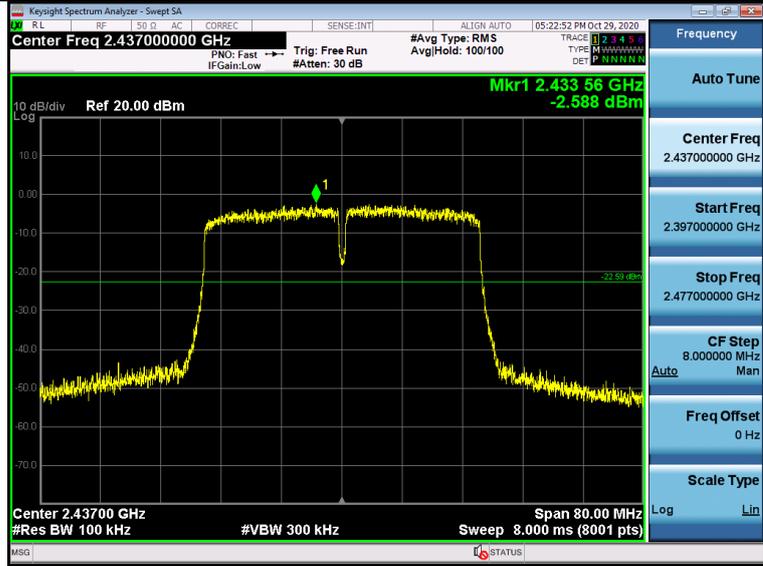

30MHz-10GHz

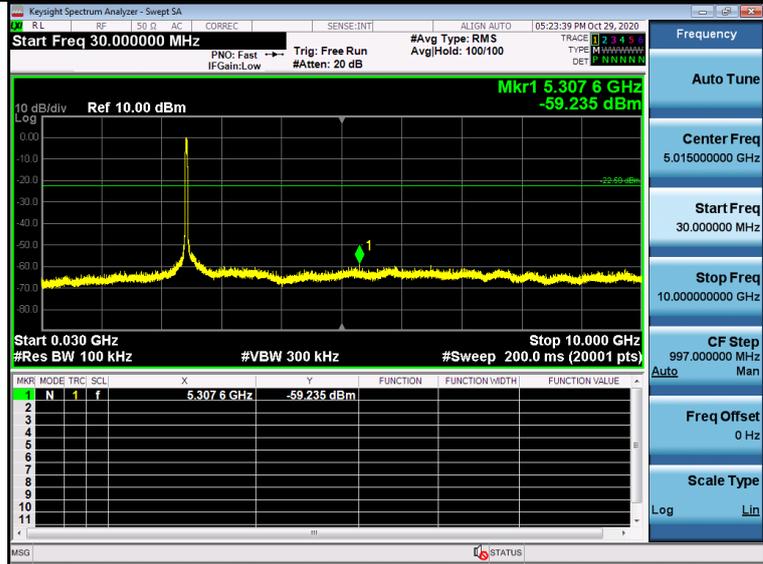


Above 10GHz

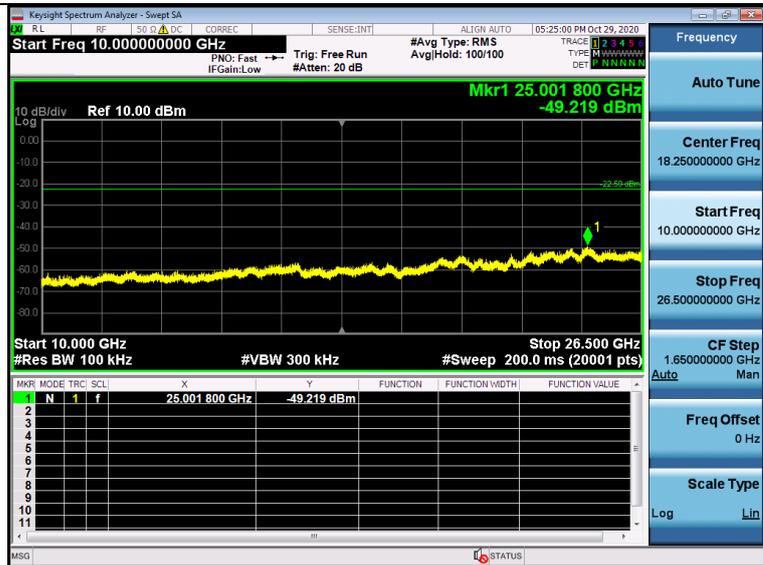




Reference

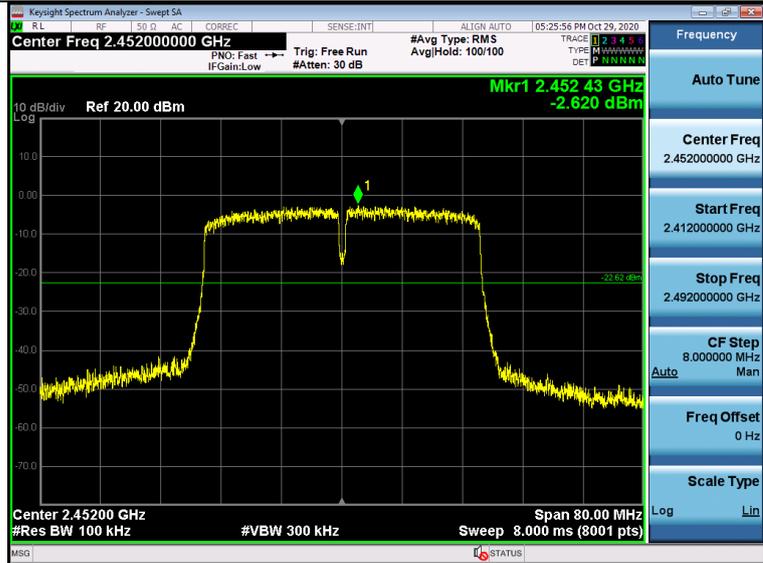



30MHz-10GHz

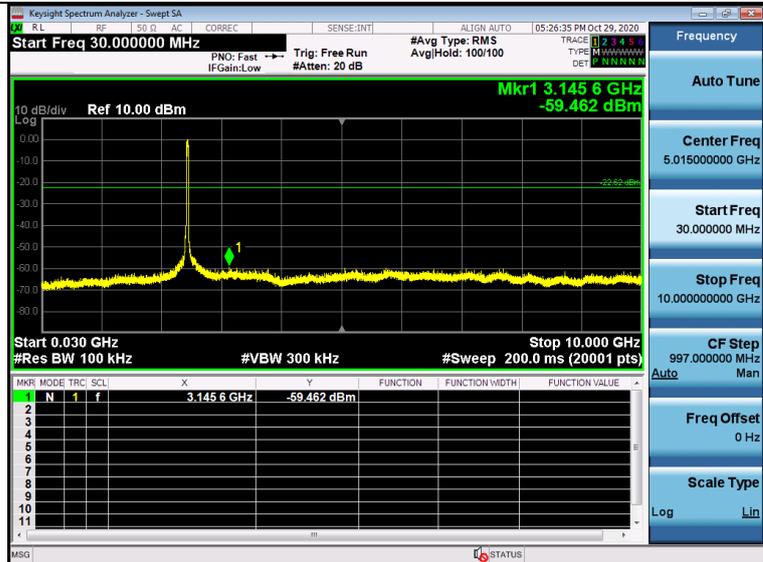

High Channel

Above 10GHz

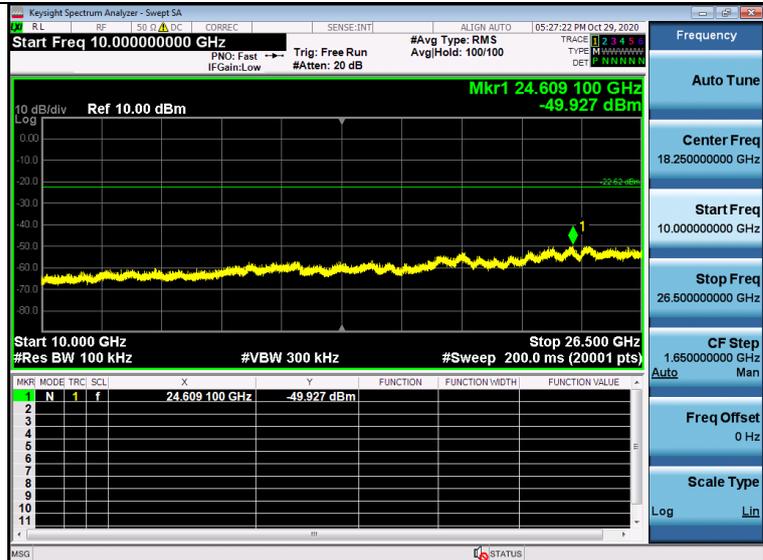

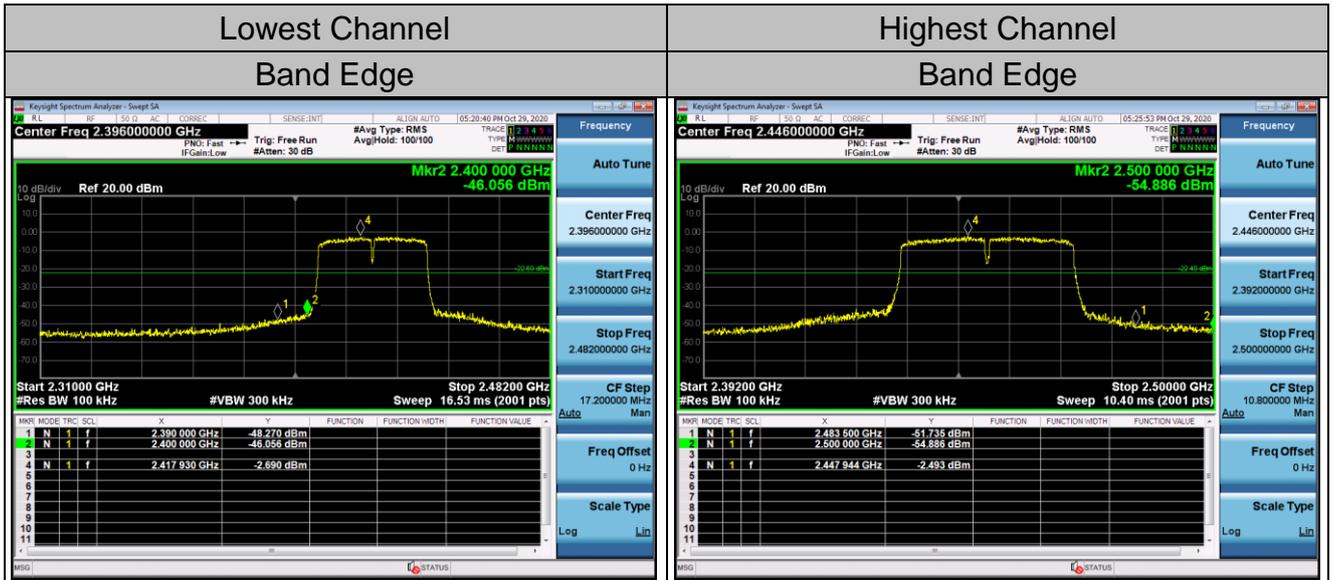





4.6. Radiated Spurious Emission Measurement

Test Specification

Test Requirement:	FCC Part15 C Section 15.209					
Test Method:	ANSI C63.10: 2013					
Frequency Range:	9 kHz to 25 GHz					
Measurement Distance:	3 m					
Antenna Polarization:	Horizontal & Vertical					
Operation mode:	Transmitting mode with modulation					
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
Peak		1MHz	10Hz	Average Value		
Limit:	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490		2400/F(KHz)	300		
	0.490-1.705		24000/F(KHz)	30		
	1.705-30		30	30		
	30-88		100	3		
	88-216		150	3		
	216-960		200	3		
	Above 960		500	3		
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	
	Above 1GHz		500	3	Average	
			5000	3	Peak	
	Test setup:	For radiated emissions below 30MHz				
		<p>30MHz to 1GHz</p>				

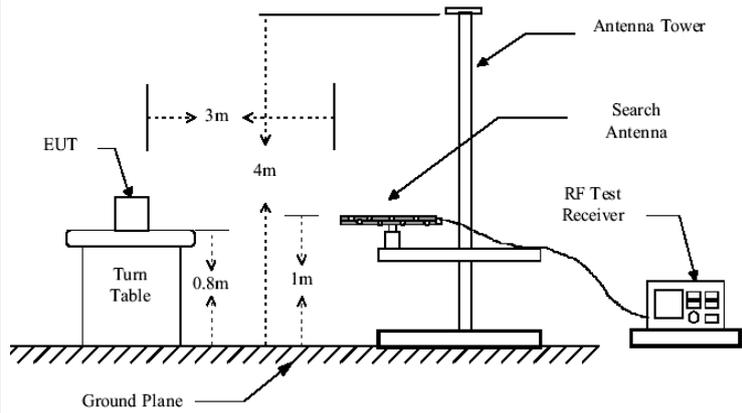

Above 1GHz

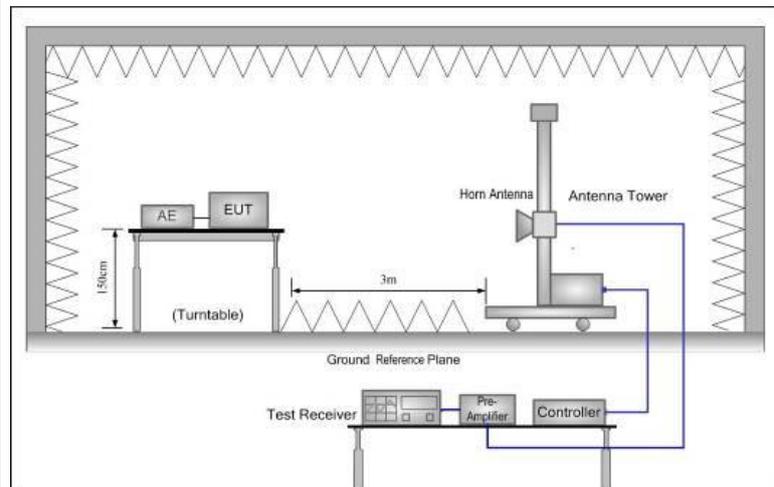

Test Procedure:

1. For the radiated emission test below 1GHz:
 The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.

For the radiated emission test above 1GHz:
 Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement



	<p>antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none">3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.5. Use the following spectrum analyzer settings:<ol style="list-style-type: none">(1) Span shall wide enough to fully capture the emission being measured;(2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;(3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS

**Test Instruments**

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI-7	HKE-010	Dec. 26, 2020
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2020
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 26, 2020
Preamplifier	Agilent	83051A	HKE-016	Dec. 26, 2020
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2020
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 26, 2020
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2020
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 26, 2020
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Dec. 26, 2020
High Gain Antenna	Schwarzbeck	LB-180400KF	HKE-054	Dec. 26, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




Test Data

All the test modes completed for test. only the worst result of 802.11g at 2462MHz was reported as below:

Below 1GHz

Horizontal

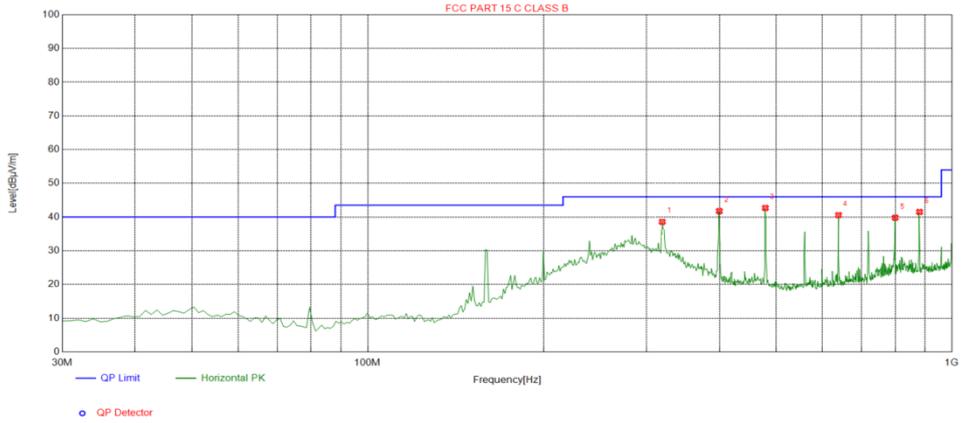

Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	319.3493	-12.13	50.71	38.58	46.00	8.42	100	6	Horizontal
2	399.9399	-10.41	52.17	41.76	46.00	4.24	100	24	Horizontal
3	479.5596	-8.44	51.13	42.69	46.00	3.31	100	101	Horizontal
4	639.7698	-5.65	46.21	40.56	46.00	5.44	100	28	Horizontal
5	799.9800	-3.12	42.92	39.80	46.00	6.20	100	198	Horizontal
6	880.5706	-2.05	43.55	41.50	46.00	4.50	100	133	Horizontal


Remark: Margin = Limit – Level

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Level=Test receiver reading + correction factor



Vertical

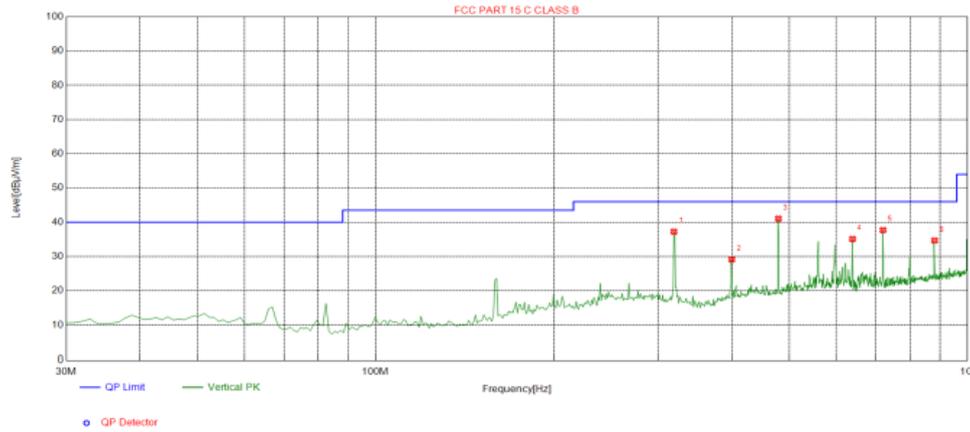

Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	319.3493	-12.13	49.40	37.27	46.00	8.73	100	220	Vertical
2	399.9399	-10.41	39.55	29.14	46.00	16.86	100	120	Vertical
3	479.5596	-8.44	49.49	41.05	46.00	4.95	100	296	Vertical
4	639.7698	-5.65	40.76	35.11	46.00	10.89	100	79	Vertical
5	720.3604	-4.70	42.40	37.70	46.00	8.30	100	82	Vertical
6	880.5706	-2.05	36.73	34.68	46.00	11.32	100	85	Vertical

Remark: Margin = Limit – Level

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Level=Test receiver reading + correction factor

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBµV/m)	Limit@3m (dBµV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

**For 1GHz to 25GHz**

LOW CH1 (802.11b Mode)/2412MHz

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824.00	57.77	-3.64	54.13	74	-19.87	Peak
4824.00	36.45	-3.64	32.81	54	-21.19	AVG
7236.00	54.06	-0.95	53.11	74	-20.89	Peak
7236.00	38.18	-0.95	37.23	54	-16.77	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824.00	56.15	-3.64	52.51	74	-21.49	Peak
4824.00	36.77	-3.64	33.13	54	-20.87	AVG
7236.00	53.54	-0.95	52.59	74	-21.41	Peak
7236.00	37.82	-0.95	36.87	54	-17.13	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	57.43	-3.51	53.92	74	-20.08	57.59
4874.00	35.90	-3.51	32.39	54	-21.61	40.94
7311.00	54.15	-0.82	53.33	74	-20.67	54.06
7311.00	38.33	-0.82	37.51	54	-16.49	37.57

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	55.71	-3.51	52.20	74	-21.80	Peak
4874.00	36.96	-3.51	33.45	54	-20.55	AVG
7311.00	52.22	-0.82	51.40	74	-22.60	Peak
7311.00	36.97	-0.82	36.15	54	-17.85	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924.00	57.39	-3.43	53.96	74	-20.04	Peak
4924.00	35.97	-3.43	32.54	54	-21.46	AVG
7386.00	51.86	-0.75	51.11	74	-22.89	Peak
7386.00	37.52	-0.75	36.77	54	-17.23	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924.00	55.70	-3.43	52.27	74	-21.73	Peak
4924.00	36.07	-3.43	32.64	54	-21.36	AVG
7386.00	52.28	-0.75	51.53	74	-22.47	Peak
7386.00	36.99	-0.75	36.24	54	-17.76	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) The other emissions are 20 dB below the limit value, which are not reported. It is deemed to comply with the requireme.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824.00	56.20	-3.43	52.77	74	-21.23	Peak
4824.00	36.13	-3.43	32.70	54	-21.30	AVG
7236.00	53.31	-0.75	52.56	74	-21.44	Peak
7236.00	38.29	-0.75	37.54	54	-16.46	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824.00	57.03	-3.43	53.60	74	-20.40	Peak
4824.00	35.82	-3.43	32.39	54	-21.61	AVG
7236.00	52.21	-0.75	51.46	74	-22.54	Peak
7236.00	37.21	-0.75	36.46	54	-17.54	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	58.40	-3.51	54.89	74	-19.11	Peak
4874.00	36.97	-3.51	33.46	54	-20.54	AVG
7311.00	53.65	-0.82	52.83	74	-21.17	Peak
7311.00	38.26	-0.82	37.44	54	-16.56	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	57.54	-3.51	54.03	74	-19.97	56.67
4874.00	36.38	-3.51	32.87	54	-21.13	34.78
7311.00	52.64	-0.82	51.82	74	-22.18	52.01
7311.00	38.13	-0.82	37.31	54	-16.69	33.01

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924.00	57.55	-3.43	54.12	74	-19.88	Peak
4924.00	36.61	-3.43	33.18	54	-20.82	AVG
7386.00	52.02	-0.75	51.27	74	-22.73	Peak
7386.00	38.73	-0.75	37.98	54	-16.02	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924.00	57.29	-3.43	53.86	74	-20.14	Peak
4924.00	37.22	-3.43	33.79	54	-20.21	AVG
7386.00	52.15	-0.75	51.40	74	-22.60	Peak
7386.00	38.11	-0.75	37.36	54	-16.64	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The other emissions are 20 dB below the limit value, which are not reported. It is deemed to comply with the requireme.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824.00	58.25	-3.64	54.61	74	-19.39	Peak
4824.00	36.47	-3.64	32.83	54	-21.17	AVG
7236.00	54.35	-0.95	53.40	74	-20.60	Peak
7236.00	37.85	-0.95	36.90	54	-17.10	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824.00	57.57	-3.64	53.93	74	-20.07	Peak
4824.00	37.24	-3.64	33.60	54	-20.40	AVG
7236.00	54.59	-0.95	53.64	74	-20.36	Peak
7236.00	38.50	-0.95	37.55	54	-16.45	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	58.46	-3.51	54.95	74	-19.05	Peak
4874.00	36.37	-3.51	32.86	54	-21.14	AVG
7311.00	54.16	-0.82	53.34	74	-20.66	Peak
7311.00	38.15	-0.82	37.33	54	-16.67	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	55.90	-3.51	52.39	74	-21.61	Peak
4874.00	35.76	-3.51	32.25	54	-21.75	AVG
7311.00	52.12	-0.82	51.30	74	-22.70	Peak
7311.00	38.69	-0.82	37.87	54	-16.13	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924.00	55.62	-3.43	52.19	74	-21.81	Peak
4924.00	35.77	-3.43	32.34	54	-21.66	AVG
7386.00	54.24	-0.75	53.49	74	-20.51	Peak
7386.00	37.88	-0.75	37.13	54	-16.87	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924.00	55.72	-3.43	52.29	74	-21.71	Peak
4924.00	36.26	-3.43	32.83	54	-21.17	AVG
7386.00	52.58	-0.75	51.83	74	-22.17	Peak
7386.00	38.18	-0.75	37.43	54	-16.57	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) The other emissions are 20 dB below the limit value, which are not reported. It is deemed to comply with the requireme.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	57.26	-3.63	53.63	74	-20.37	Peak
4844	36.35	-3.63	32.72	54	-21.28	AVG
7266	53.92	-0.94	52.98	74	-21.02	Peak
7266	37.24	-0.94	36.30	54	-17.70	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	57.49	-3.63	53.86	74	-20.14	Peak
4844	36.26	-3.63	32.63	54	-21.37	AVG
7266	53.31	-0.94	52.37	74	-21.63	Peak
7266	37.13	-0.94	36.19	54	-17.81	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	55.99	-3.51	52.48	74	-21.52	Peak
4874.00	37.20	-3.51	33.69	54	-20.31	AVG
7311.00	53.33	-0.82	52.51	74	-21.49	Peak
7311.00	38.00	-0.82	37.18	54	-16.82	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	57.67	-3.51	54.16	74	-19.84	Peak
4874.00	35.68	-3.51	32.17	54	-21.83	AVG
7311.00	51.90	-0.82	51.08	74	-22.92	Peak
7311.00	37.95	-0.82	37.13	54	-16.87	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	56.42	-3.43	52.99	74	-21.01	Peak
4904	37.31	-3.43	33.88	54	-20.12	AVG
7356	53.43	-0.75	52.68	74	-21.32	Peak
7356	37.73	-0.75	36.98	54	-17.02	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	56.64	-3.43	53.21	74	-20.79	Peak
4904	37.37	-3.43	33.94	54	-20.06	AVG
7356	54.66	-0.75	53.91	74	-20.09	Peak
7356	37.21	-0.75	36.46	54	-17.54	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) The other emissions are 20 dB below the limit value, which are not reported. It is deemed to comply with the requireme.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Test Result of Radiated Spurious at Band edges**

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	56.72	-5.81	50.91	74	-23.09	Peak
2310	41.47	-5.81	35.66	54	-18.34	AVG
2390	57.00	-5.84	51.16	74	-22.84	Peak
2390	41.26	-5.84	35.42	54	-18.58	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	57.86	-5.81	52.05	74	-21.95	Peak
2310	43.45	-5.81	37.64	54	-16.36	AVG
2390	57.14	-5.84	51.30	74	-22.70	Peak
2390	40.95	-5.84	35.11	54	-18.89	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	57.64	-6.04	51.60	74	-22.40	Peak
2483.5	41.23	-6.04	35.19	54	-18.81	AVG
2500	57.14	-6.06	51.08	74	-22.92	Peak
2500	41.47	-6.06	35.41	54	-18.59	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	59.59	-6.04	53.55	74	-20.45	Peak
2483.5	43.53	-6.04	37.49	54	-16.51	AVG
2500	57.47	-6.06	51.41	74	-22.59	Peak
2500	41.96	-6.06	35.90	54	-18.10	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	58.61	-5.81	52.80	74	-21.20	Peak
2310	42.41	-5.81	36.60	54	-17.40	AVG
2390	57.81	-5.84	51.97	74	-22.03	Peak
2390	41.17	-5.84	35.33	54	-18.67	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	57.22	-5.81	51.41	74	-22.59	Peak
2310	42.64	-5.81	36.83	54	-17.17	AVG
2390	57.70	-5.84	51.86	74	-22.14	Peak
2390	40.29	-5.84	34.45	54	-19.55	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	59.05	-6.04	53.01	74	-20.99	Peak
2483.5	43.79	-6.04	37.75	54	-16.25	AVG
2500	56.15	-6.06	50.09	74	-23.91	Peak
2500	40.39	-6.06	34.33	54	-19.67	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.07	-6.04	50.03	74	-23.97	Peak
2483.5	43.04	-6.04	37.00	54	-17.00	AVG
2500	57.43	-6.06	51.37	74	-22.63	Peak
2500	41.68	-6.06	35.62	54	-18.38	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	58.00	-5.81	52.19	74	-21.81	Peak
2310	41.73	-5.81	35.92	54	-18.08	AVG
2390	57.59	-5.84	51.75	74	-22.25	Peak
2390	41.75	-5.84	35.91	54	-18.09	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	56.48	-5.81	50.67	74	-23.33	Peak
2310	42.19	-5.81	36.38	54	-17.62	AVG
2390	57.16	-5.84	51.32	74	-22.68	Peak
2390	40.31	-5.84	34.47	54	-19.53	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	58.59	-6.04	52.55	74	-21.45	Peak
2483.5	42.12	-6.04	36.08	54	-17.92	AVG
2500	56.18	-6.06	50.12	74	-23.88	Peak
2500	40.13	-6.06	34.07	54	-19.93	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	59.18	-6.04	53.14	74	-20.86	Peak
2483.5	42.53	-6.04	36.49	54	-17.51	AVG
2500	56.51	-6.06	50.45	74	-23.55	Peak
2500	41.28	-6.06	35.22	54	-18.78	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	58.52	-5.81	52.71	74	-21.29	Peak
2310	41.57	-5.81	35.76	54	-18.24	AVG
2390	56.82	-5.84	50.98	74	-23.02	Peak
2390	40.66	-5.84	34.82	54	-19.18	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	59.43	-5.81	53.62	74	-20.38	Peak
2310	42.69	-5.81	36.88	54	-17.12	AVG
2390	57.44	-5.84	51.60	74	-22.40	Peak
2390	40.54	-5.84	34.70	54	-19.30	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier



Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	57.50	-6.04	51.46	74	-22.54	Peak
2483.5	43.42	-6.04	37.38	54	-16.62	AVG
2500	57.71	-6.06	51.65	74	-22.35	Peak
2500	41.41	-6.06	35.35	54	-18.65	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	57.77	-6.04	51.73	74	-22.27	Peak
2483.5	41.07	-6.04	35.03	54	-18.97	AVG
2500	56.67	-6.06	50.61	74	-23.39	Peak
2500	41.51	-6.06	35.45	54	-18.55	AVG

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

4.7. ANTENNA REQUIREMENT

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.


Antenna Connected Construction

The PCB antenna used in the product is a permanently connected antenna that complies with the provisions of part 15.203 requirement in this section. The antenna used in this product is a PCB antenna, The directional gains of antenna used for transmitting is 0dbi.

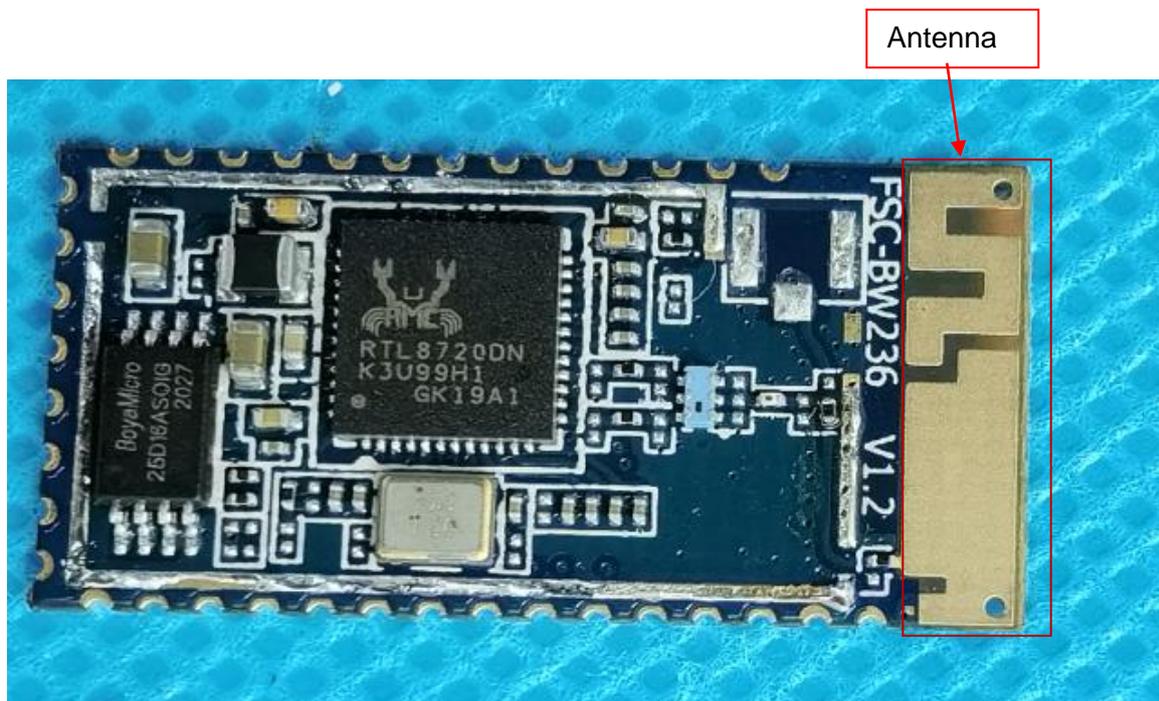


4.8. PHOTOGRAPH OF TEST

30MHz-1000MHz

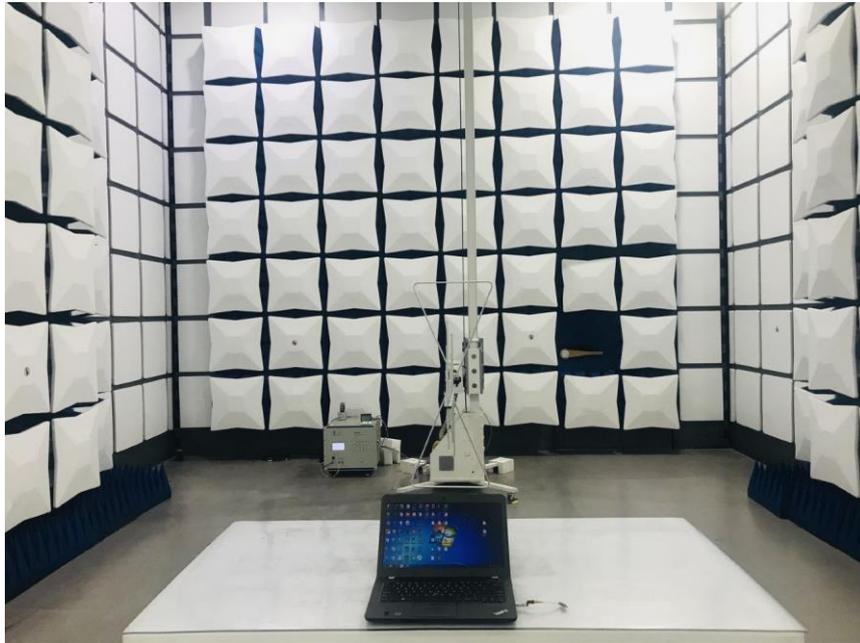

Above 1000MHz

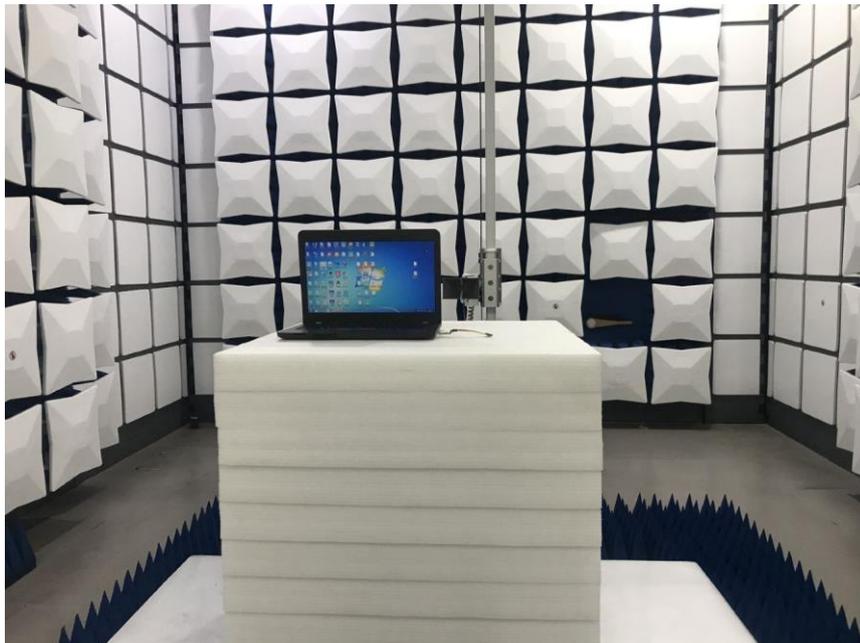



Conducted Emission





5. PHOTOS OF THE EUT

Please refer to the report No.: HK2010293163-1E

END