



RF TEST REPORT

Applicant Sengled Co., Ltd.
FCC ID 2AGN8-E13N11
Product sengled element
Model E13-N11
Report No. R1801A0029-R1V1
Issue Date April 20, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

| | |
|--|----|
| 1. Test Laboratory | 4 |
| 1.1. Notes of the test report | 4 |
| 1.2. Test facility | 4 |
| 1.3. Testing Location | 5 |
| 2. General Description of Equipment under Test | 6 |
| 3. Applied Standards | 7 |
| 4. Test Configuration | 8 |
| 5. Test Case Results | 9 |
| 5.1. Maximum conducted output power | 9 |
| 5.2. 6dB Bandwidth | 11 |
| 5.3. Band Edge | 13 |
| 5.4. Power Spectral Density | 15 |
| 5.5. Spurious RF Conducted Emissions | 17 |
| 5.6. Radiated Emissions in the Restricted Band | 19 |
| 5.7. Radiates Emission | 23 |
| 5.8. Conducted Emission | 33 |
| 6. Main Test Instruments | 35 |
| ANNEX A: EUT Appearance and Test Setup | 36 |
| A.1 EUT Appearance | 36 |
| A.2 Test Setup | 37 |

Summary of measurement results

| Number | Summary of measurements of results | Clause in FCC rules | Verdict |
|---|--|-------------------------|---------|
| 1 | Maximum peak conducted output power | 15.247(b)(3) | PASS |
| 2 | 6 dB bandwidth | 15.247(a)(2) | PASS |
| 3 | Maximum power spectral density | 15.247(e) | PASS |
| 4 | Band Edge | 15.247(d) | PASS |
| 5 | Spurious RF Conducted Emissions | 15.247(d) | PASS |
| 6 | Radiated Emissions in restricted frequency bands | 15.247(d),15.205,15.209 | PASS |
| 7 | Radiated Emissions | 15.247(d),15.205,15.209 | PASS |
| 8 | Conducted Emissions | 15.207 | PASS |
| Date of Testing: January 16, 2018~ April 16, 2018 | | | |

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

| | |
|-----------------------------|---|
| Applicant | Sengled Co., Ltd. |
| Applicant address | Room 201/15,Building 1, No.498, Guoshoujing Road, Pilot Free Trade Zone, Shanghai City,P.R. China |
| Manufacturer | Sengled Co., Ltd. |
| Manufacturer address | Room 201/15,Building 1, No.498, Guoshoujing Road, Pilot Free Trade Zone, Shanghai City,P.R. China |

General information

| EUT Description | |
|---|---|
| Model: | E13-N11 |
| IMEI: | / |
| Hardware Version: | V1.0 |
| Software Version: | V1.0 |
| Power Supply: | External power supply |
| Antenna Type: | Internal Antenna |
| Antenna Connector: | A permanently attached antenna (meet with the standard FCC Part 15.203 requirement) |
| Test Mode: | Zigbee |
| Modulation Type: | O-QPSK |
| Antenna Gain: | -0.79 dBi for 2405MHz -1.21 dBi for 2440MHz -2.76 dBi for 2480MHz |
| Max. Conducted Power | 4.49 dBm |
| Operating Frequency Range(s) | 2405 ~ 2480 MHz |
| Note: The information of the EUT is declared by the manufacturer. | |



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2018) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**

4. Test Configuration

Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

| Mode | Channel | Frequency |
|--------|---------|-----------|
| Zigbee | 11 | 2405MHz |
| | 12 | 2410MHz |
| | 13 | 2415MHz |
| | 14 | 2420MHz |
| | 15 | 2425MHz |
| | 16 | 2430MHz |
| | 17 | 2435MHz |
| | 18 | 2440MHz |
| | 19 | 2445MHz |
| | 20 | 2450MHz |
| | 21 | 2455MHz |
| | 22 | 2460MHz |
| | 23 | 2465MHz |
| | 24 | 2470MHz |
| | 25 | 2475MHz |
| | 26 | 2480MHz |

5. Test Case Results

5.1. Maximum conducted output power


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The signal transmission is continuous.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

| | |
|----------------------|-------------------|
| Average Output Power | $\leq 1W$ (30dBm) |
|----------------------|-------------------|


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

| Network Standards | Carrier frequency (MHz) | Output Power (dBm) | Limit (dBm) | Conclusion |
|-------------------|-------------------------|--------------------|-------------|------------|
| Zigbee | 2405 | 3.72 | 30 | PASS |
| | 2440 | 4.49 | 30 | PASS |
| | 2480 | -17.1 | 30 | PASS |


Zigbee, Carrier frequency (MHz): 2405

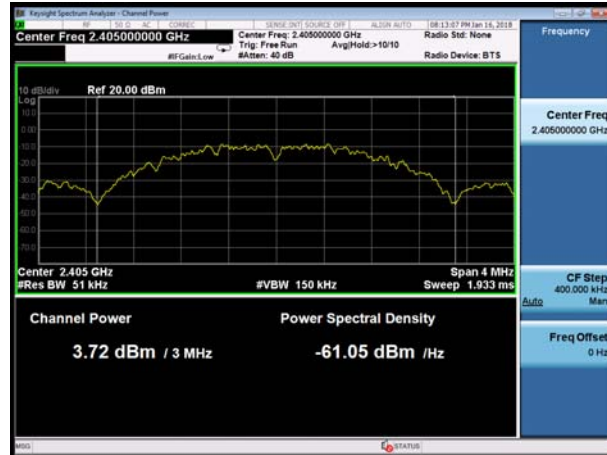

Zigbee, Carrier frequency (MHz): 2440



Zigbee, Carrier frequency (MHz): 2480

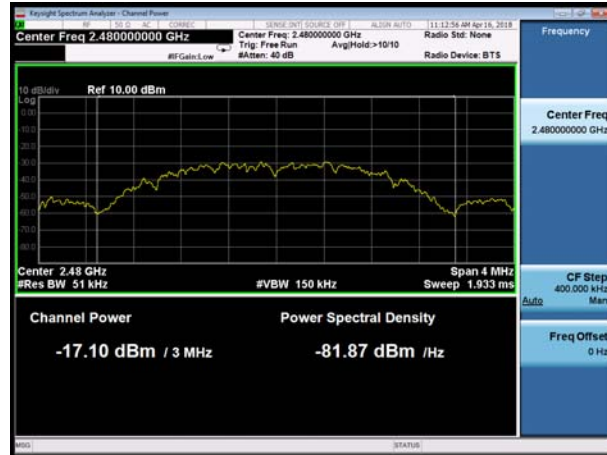

5.2. 6dB Bandwidth


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

| | |
|------------------------|-----------|
| minimum 6 dB bandwidth | ≥ 500 kHz |
|------------------------|-----------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

| Network Standards | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 6 dB bandwidth (MHz) | Limit (kHz) | Conclusion |
|-------------------|-------------------------|---------------------|------------------------------|-------------|------------|
| Zigbee | 2405 | 2.3604 | 1.597 | 500 | PASS |
| | 2440 | 2.3839 | 1.625 | 500 | PASS |
| | 2480 | 2.3574 | 1.591 | 500 | PASS |

Zigbee, Carrier frequency (MHz): 2405



Zigbee, Carrier frequency (MHz): 2440



Zigbee, Carrier frequency (MHz): 2480



5.3. Band Edge


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

| Frequency | Uncertainty |
|-----------|-------------|
| 2GHz-3GHz | 1.407 dB |




Test Results: PASS

Zigbee, Channel No.: 11

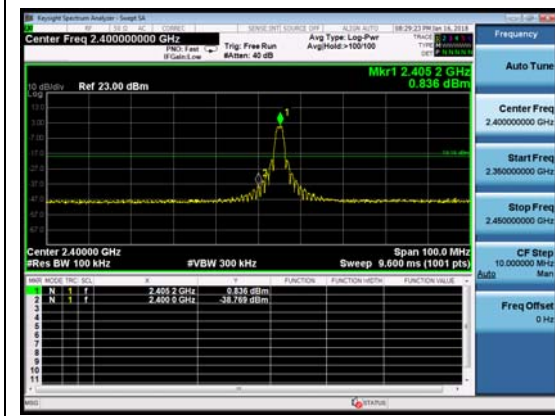

Zigbee, Channel No.: 26

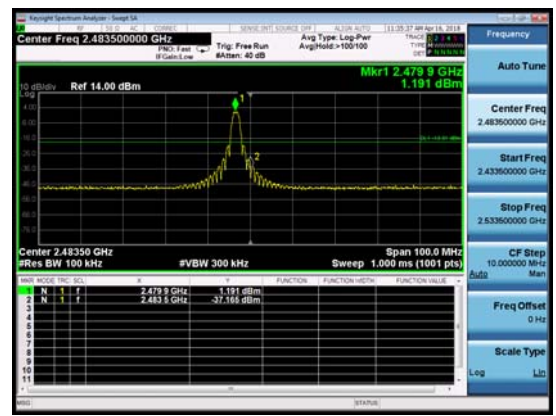

5.4. Power Spectral Density


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. Method AVGPS-2 in KDB558074 D01 was used for this test.

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

| Limits | $\leq 8 \text{ dBm} / 3\text{kHz}$ |
|--------|------------------------------------|
|--------|------------------------------------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:

| Network Standards | Channel Number | Power Spectral Density (dBm / 3kHz) | Limit (dBm / 3kHz) | Conclusion |
|-------------------|----------------|-------------------------------------|--------------------|------------|
| Zigbee | 11 | -20.349 | 8 | PASS |
| | 18 | -19.840 | 8 | PASS |
| | 26 | -19.467 | 8 | PASS |

Zigbee, Channel No.: 11



Zigbee, Channel No.: 18



Zigbee, Channel No.: 26



5.5. Spurious RF Conducted Emissions


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

| Network Standards | Carrier frequency (MHz) | Reference value (dBm) | Limit |
|-------------------|-------------------------|-----------------------|--------|
| Zigbee | 2405 | 0.92 | -19.08 |
| | 2440 | 0.28 | -19.73 |
| | 2480 | 0.33 | -19.67 |

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

| Frequency | Uncertainty |
|-------------|-------------|
| 100kHz-2GHz | 0.684 dB |
| 2GHz-26GHz | 1.407 dB |

**Test Results:**

The signal beyond the limit is carrier.

Zigbee, Channel No.: CH11

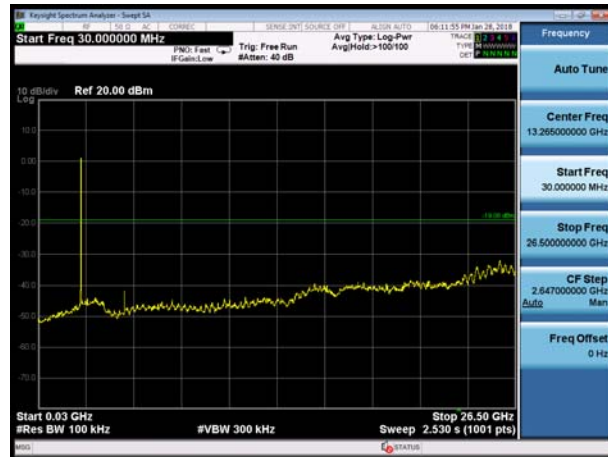

Zigbee, Channel No.: CH18



Zigbee, Channel No.: CH26



5.6. Radiated Emissions in the Restricted Band

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. RBW is set to 100kHz. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to KDB 558074.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW $\geq [3 \times \text{RBW}]$
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1 / D$, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and

OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the antenna is vertical.

The test is in transmitting mode.

Test setup

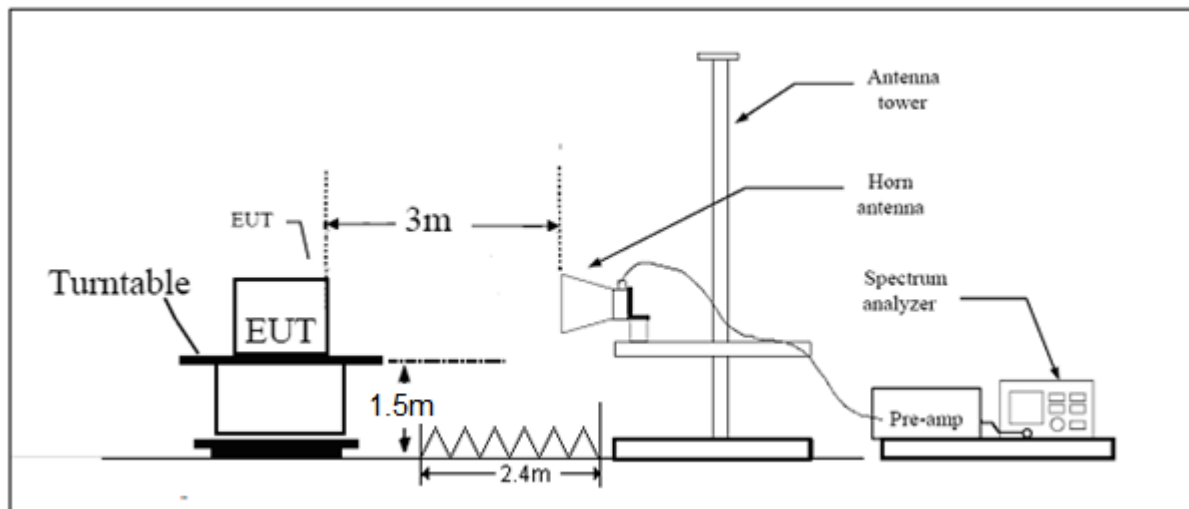

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above960 | 500 | 54 |

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.


Test Results:

The signal beyond the limit is carrier.


Zigbee-Channel 11: Peak

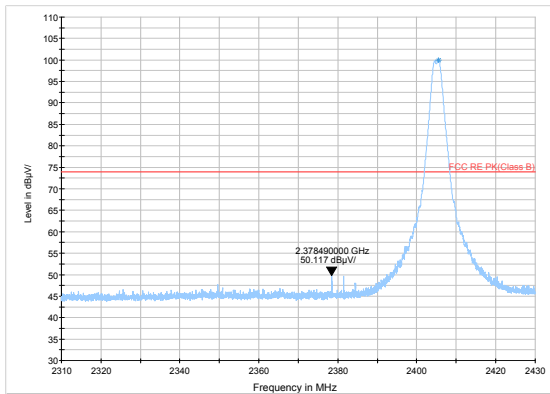


Zigbee-Channel 11: Average

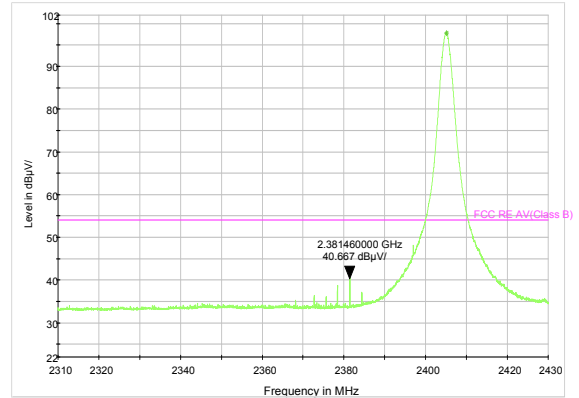

Zigbee-Channel 26: Peak

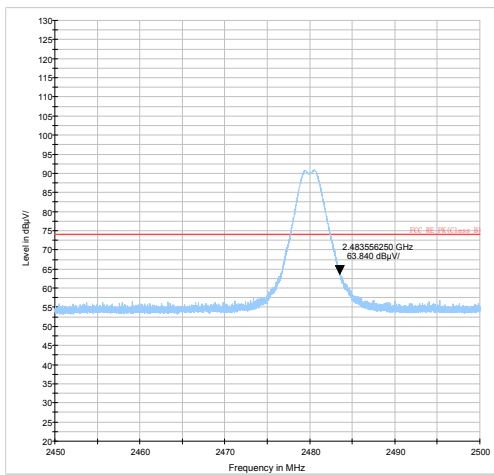

Zigbee-Channel 26: Average

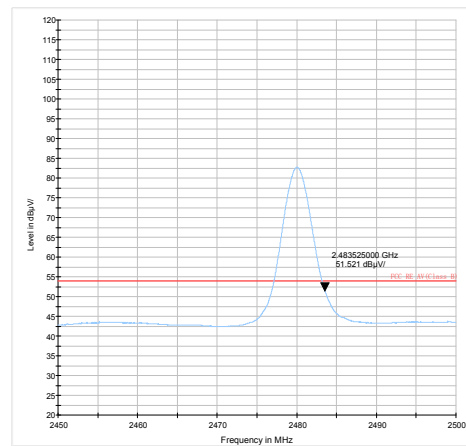

5.7. Radiates Emission

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 102.5kPa |

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz, when duty cycle is not less than 98%

$VBW \geq 1/T$ when duty cycle is less than 98%, where T is transmit on time


Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz~~~ 30MHz

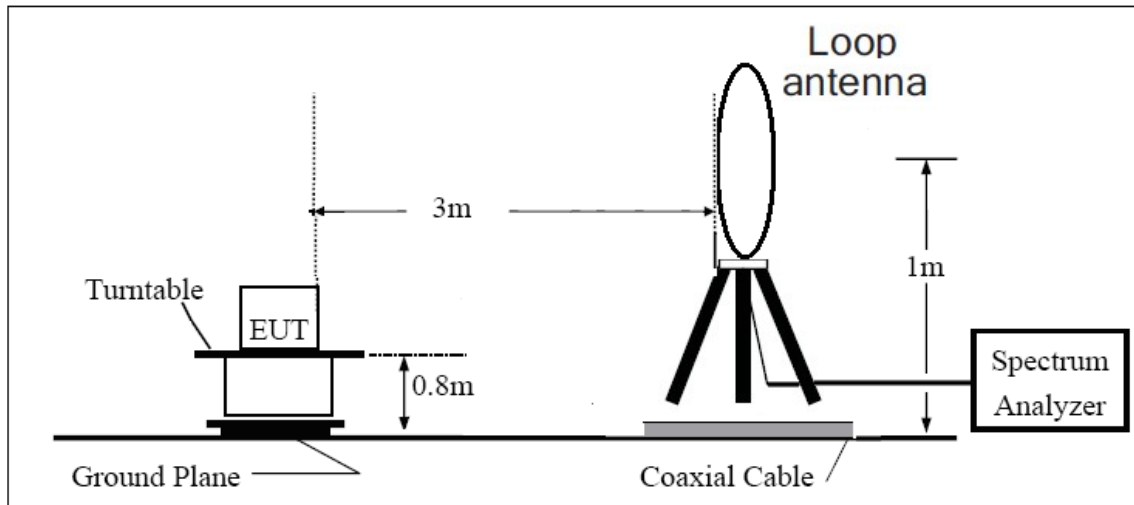

30MHz~~~ 1GHz

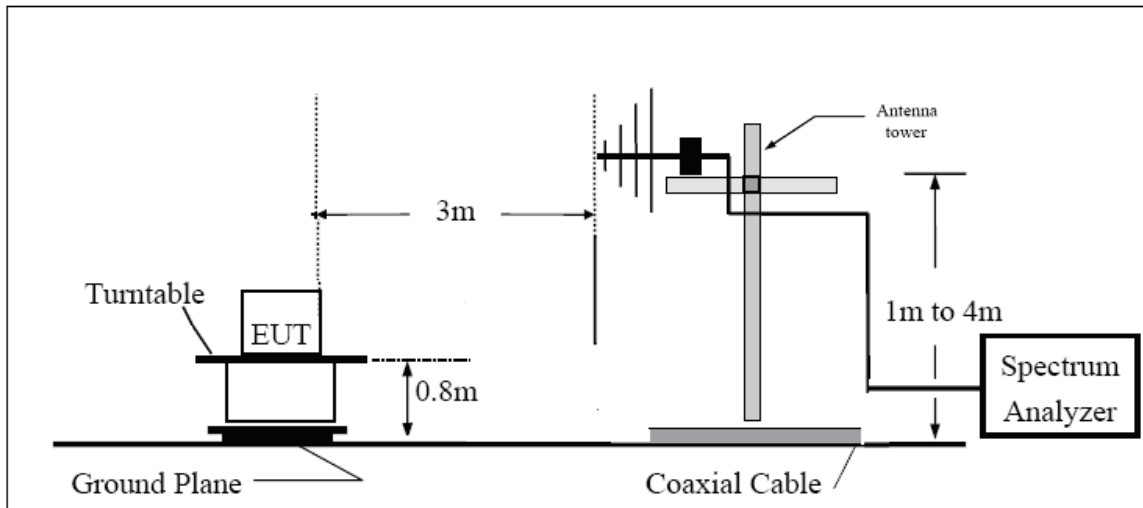

Above 1GHz

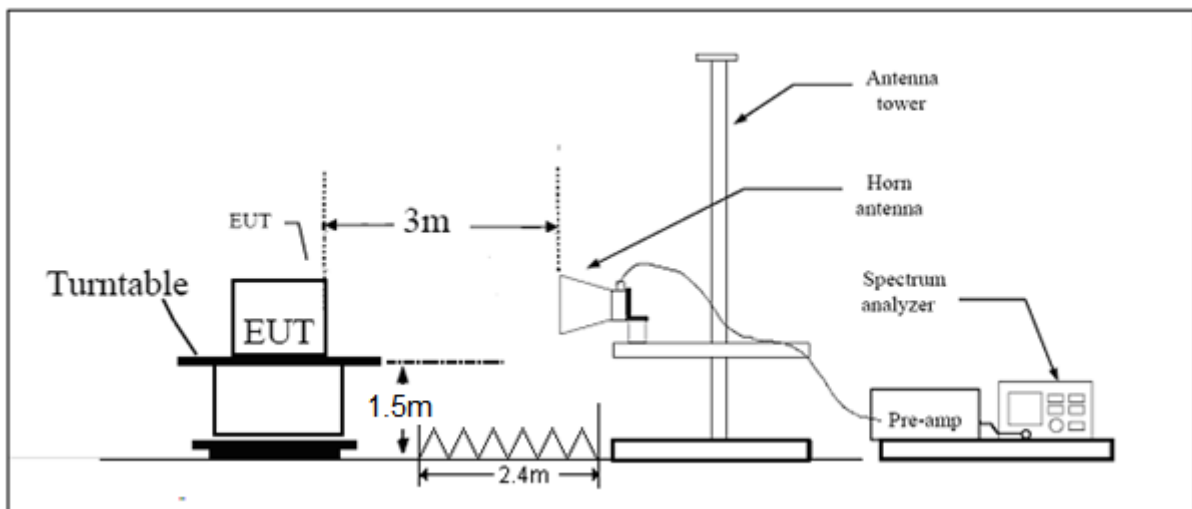

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490 | 2400/F(kHz) | / |
| 0.490–1.705 | 24000/F(kHz) | / |
| 1.705–30.0 | 30 | / |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above960 | 500 | 54 |

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

| Frequency | Uncertainty |
|--------------|-------------|
| 9KHz-30MHz | 3.55 dB |
| 30MHz-200MHz | 4.19 dB |
| 200MHz-1GHz | 3.63 dB |
| Above 1GHz | 3.68 dB |

Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, **Zigbee CH11** are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:


RE 0.03-1GHz QP Class B

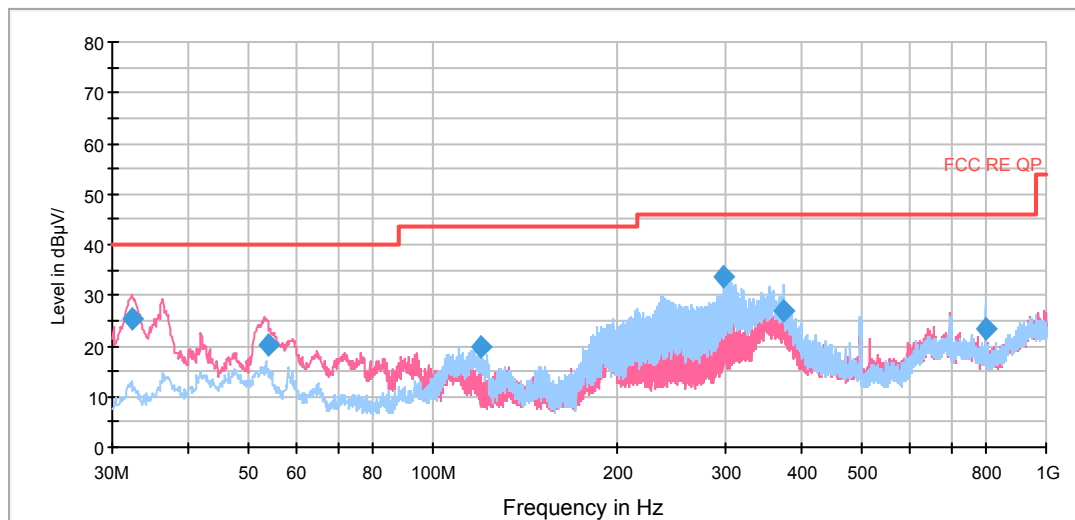

Radiates Emission from 30MHz to 1GHz


Zigbee CH11

RE 1G-3GHz PK+AV

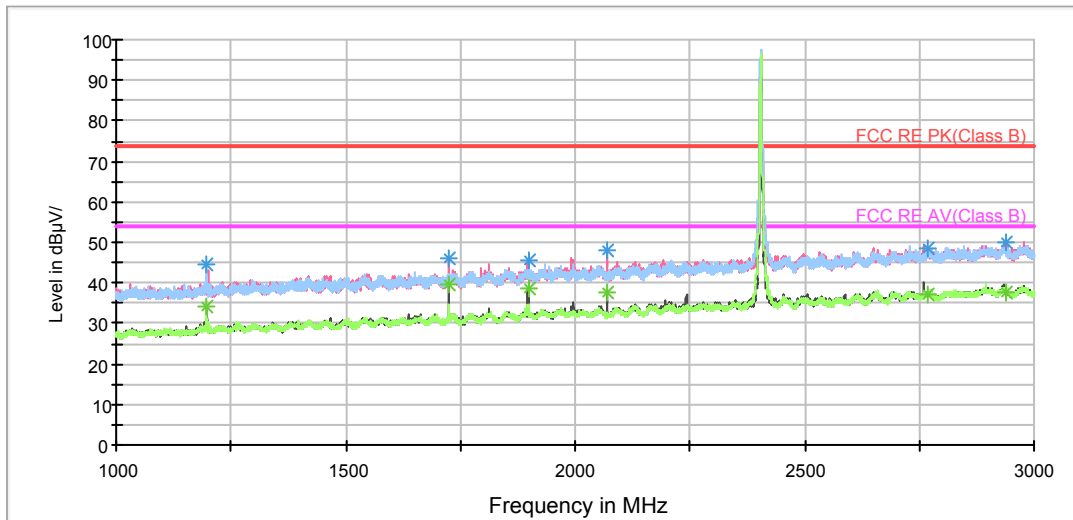


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

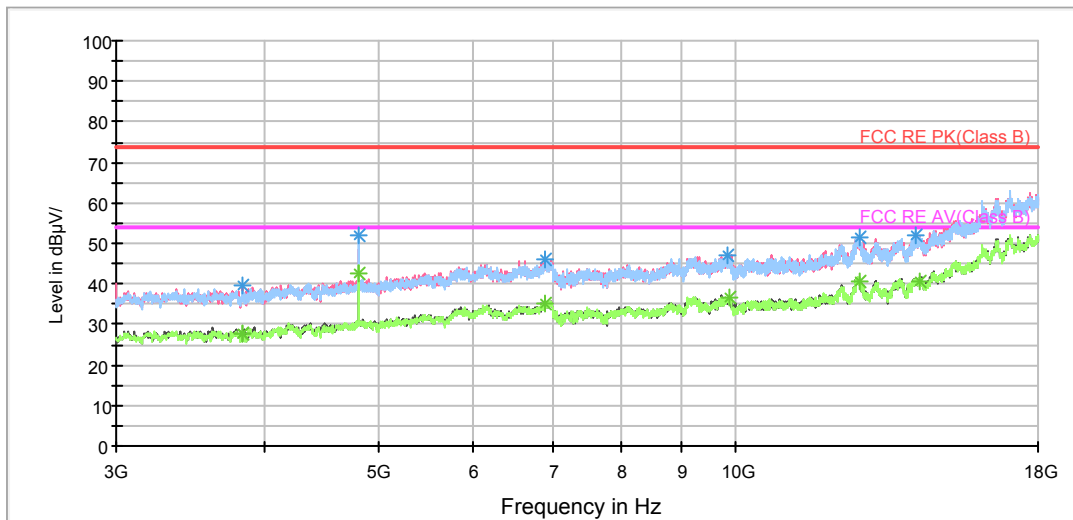

Radiates Emission from 3GHz to 18GHz

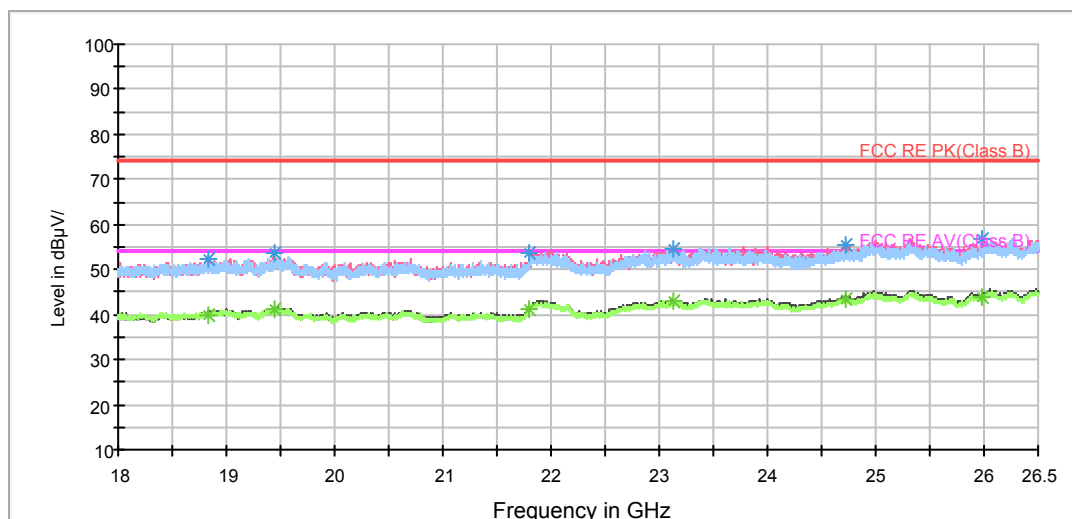

Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1197.500000 | 44.3 | 200.0 | H | 11.0 | 52.5 | -8.2 | 29.7 | 74 |
| 1725.000000 | 45.9 | 200.0 | V | 317.0 | 50.9 | -5.0 | 28.1 | 74 |
| 1897.500000 | 45.4 | 100.0 | V | 262.0 | 49.3 | -3.9 | 28.6 | 74 |
| 2070.000000 | 48.2 | 100.0 | V | 80.0 | 51.3 | -3.1 | 25.8 | 74 |
| 2769.500000 | 48.7 | 200.0 | H | 127.0 | 47.9 | 0.8 | 25.3 | 74 |
| 2938.750000 | 49.8 | 100.0 | V | 117.0 | 47.9 | 1.9 | 24.2 | 74 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1197.500000 | 34.4 | 200.0 | H | 11.0 | 42.6 | -8.2 | 19.6 | 54 |
| 1725.000000 | 39.5 | 200.0 | V | 317.0 | 44.5 | -5.0 | 14.5 | 54 |
| 1897.500000 | 38.5 | 100.0 | V | 262.0 | 42.4 | -3.9 | 15.5 | 54 |
| 2070.000000 | 37.5 | 100.0 | V | 80.0 | 40.6 | -3.1 | 16.5 | 54 |
| 2769.500000 | 36.9 | 200.0 | H | 127.0 | 36.1 | 0.8 | 17.1 | 54 |
| 2938.750000 | 37.7 | 100.0 | V | 117.0 | 35.8 | 1.9 | 16.3 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Zigbee CH18

RE 1G-3GHz PK+AV

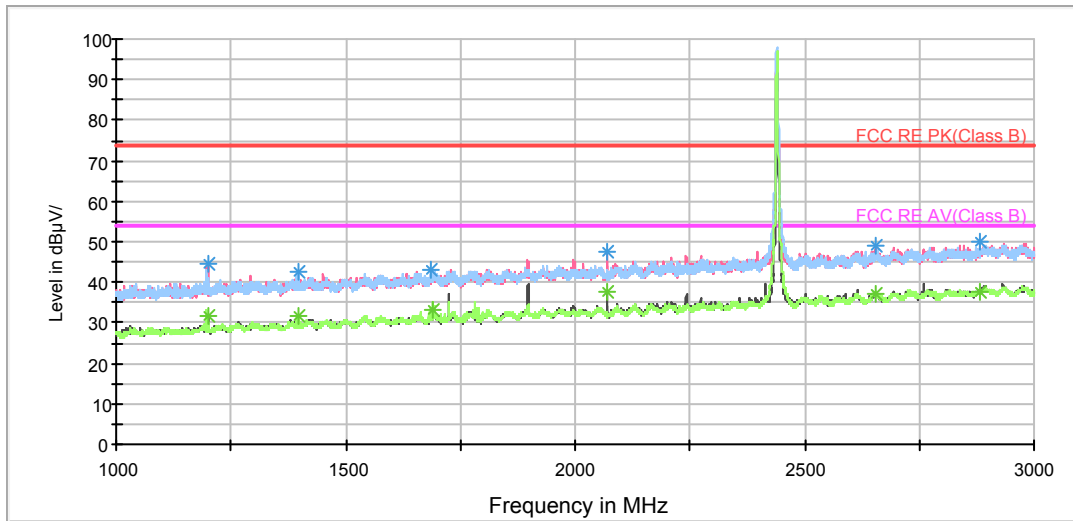


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

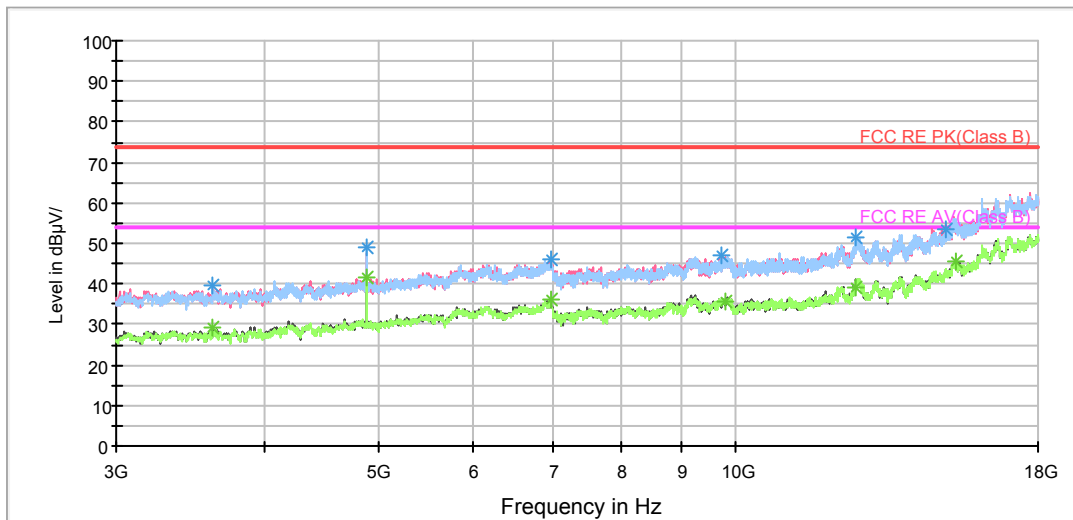

Radiates Emission from 3GHz to 18GHz

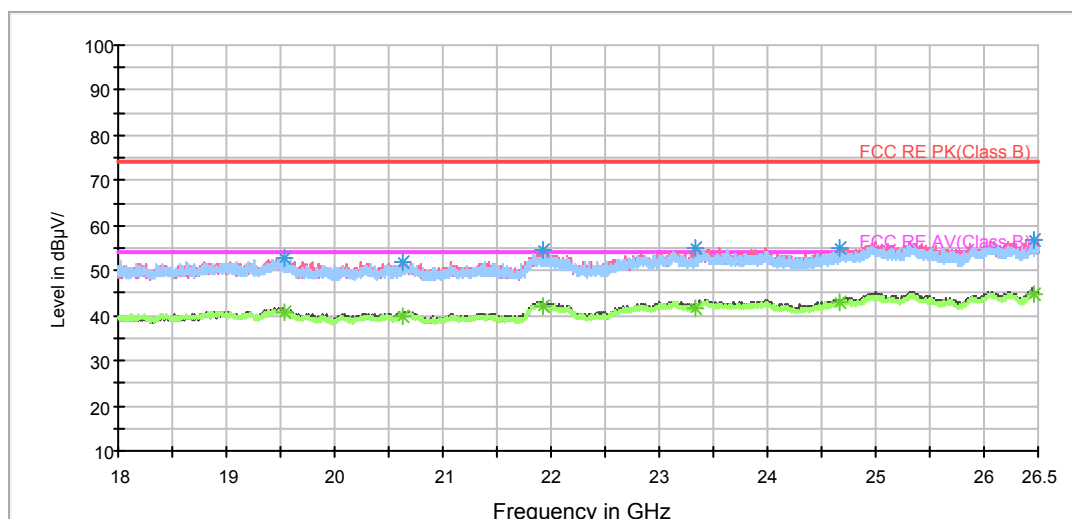

Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1200.000000 | 44.7 | 200.0 | V | 0.0 | 52.9 | -8.2 | 29.3 | 74 |
| 1398.750000 | 42.5 | 200.0 | H | 309.0 | 49.6 | -7.1 | 31.5 | 74 |
| 1686.250000 | 43.1 | 100.0 | H | 146.0 | 48.1 | -5.0 | 30.9 | 74 |
| 2070.000000 | 47.4 | 100.0 | V | 98.0 | 50.5 | -3.1 | 26.6 | 74 |
| 2653.250000 | 49.1 | 200.0 | V | 19.0 | 48.7 | 0.4 | 24.9 | 74 |
| 2882.750000 | 49.8 | 100.0 | H | 173.0 | 47.6 | 2.2 | 24.2 | 74 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1200.000000 | 31.7 | 200.0 | V | 0.0 | 39.9 | -8.2 | 22.3 | 54 |
| 1399.000000 | 31.5 | 100.0 | V | 185.0 | 38.6 | -7.1 | 22.5 | 54 |
| 1690.000000 | 33.0 | 100.0 | H | 0.0 | 38.0 | -5.0 | 21.0 | 54 |
| 2070.000000 | 37.5 | 100.0 | V | 98.0 | 40.6 | -3.1 | 16.5 | 54 |
| 2653.250000 | 37.3 | 200.0 | V | 19.0 | 36.9 | 0.4 | 16.7 | 54 |
| 2882.750000 | 37.5 | 100.0 | H | 173.0 | 35.3 | 2.2 | 16.5 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Zigbee CH26

RE 1G-3GHz PK+AV

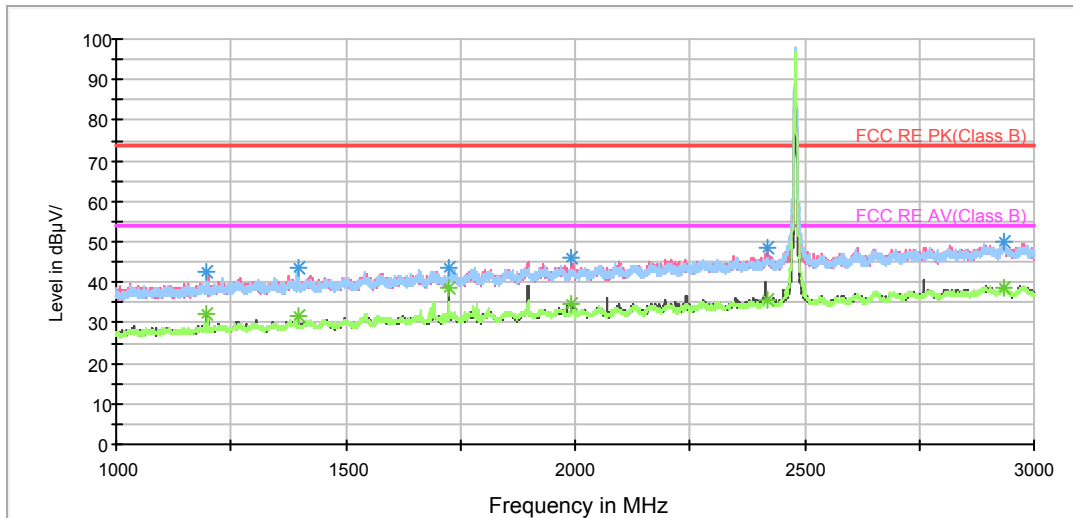


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

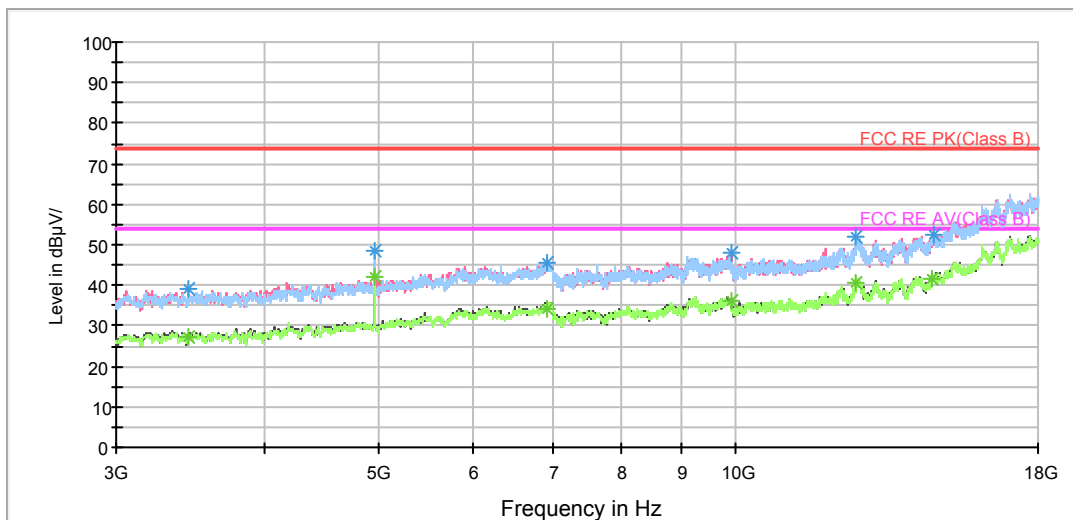

Radiates Emission from 3GHz to 18GHz

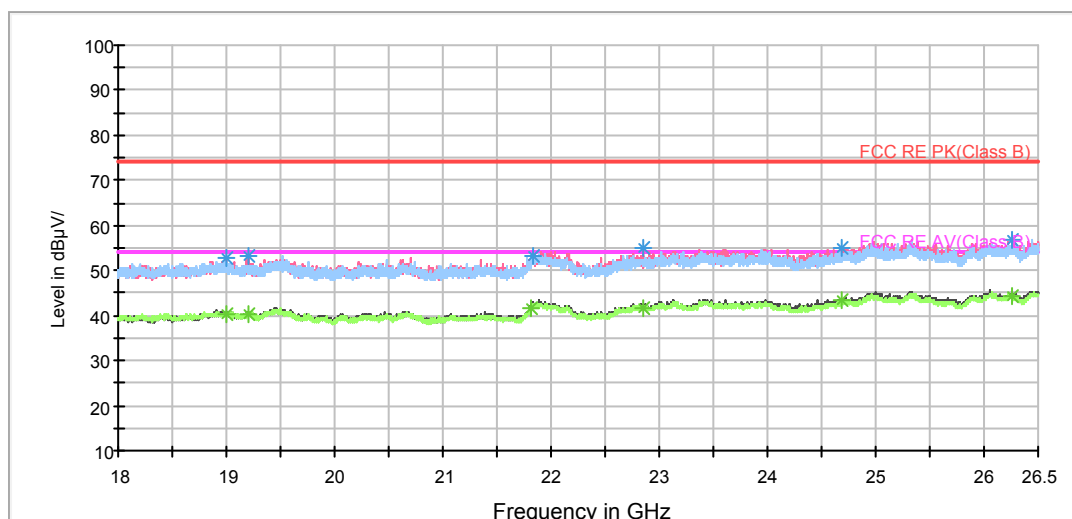

Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1197.250000 | 42.5 | 100.0 | H | 327.0 | 50.7 | -8.2 | 31.5 | 74 |
| 1397.000000 | 43.6 | 100.0 | H | 103.0 | 50.7 | -7.1 | 30.4 | 74 |
| 1724.750000 | 43.8 | 200.0 | V | 64.0 | 48.8 | -5.0 | 30.2 | 74 |
| 1993.000000 | 45.9 | 200.0 | V | 356.0 | 49.2 | -3.3 | 28.1 | 74 |
| 2419.250000 | 48.5 | 100.0 | V | 0.0 | 49.1 | -0.6 | 25.5 | 74 |
| 2934.250000 | 50.1 | 200.0 | H | 207.0 | 48.3 | 1.8 | 23.9 | 74 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1198.000000 | 32.3 | 200.0 | V | 12.0 | 40.5 | -8.2 | 21.7 | 54 |
| 1397.000000 | 31.7 | 100.0 | H | 103.0 | 38.8 | -7.1 | 22.3 | 54 |
| 1725.000000 | 38.5 | 200.0 | V | 64.0 | 43.5 | -5.0 | 15.5 | 54 |
| 1993.000000 | 34.5 | 200.0 | V | 356.0 | 37.8 | -3.3 | 19.5 | 54 |
| 2419.250000 | 35.7 | 100.0 | V | 0.0 | 36.3 | -0.6 | 18.3 | 54 |
| 2934.250000 | 38.4 | 200.0 | H | 207.0 | 36.6 | 1.8 | 15.6 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.8. Conducted Emission


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.
The test is in transmitting mode.

Test Setup

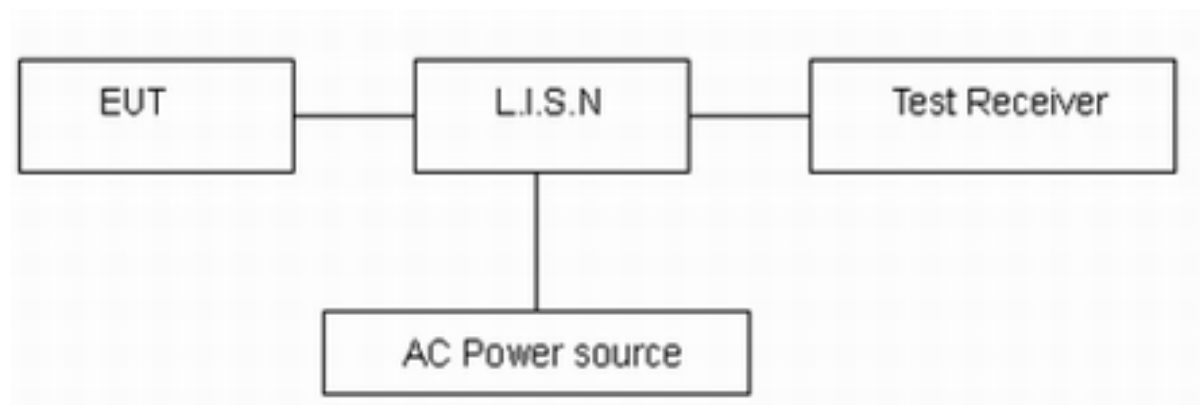

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits


| Frequency (MHz) | Conducted Limits(dBμV) | |
|---|------------------------|------------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |
| *: Decreases with the logarithm of the frequency. | | |

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.


Test Results:

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

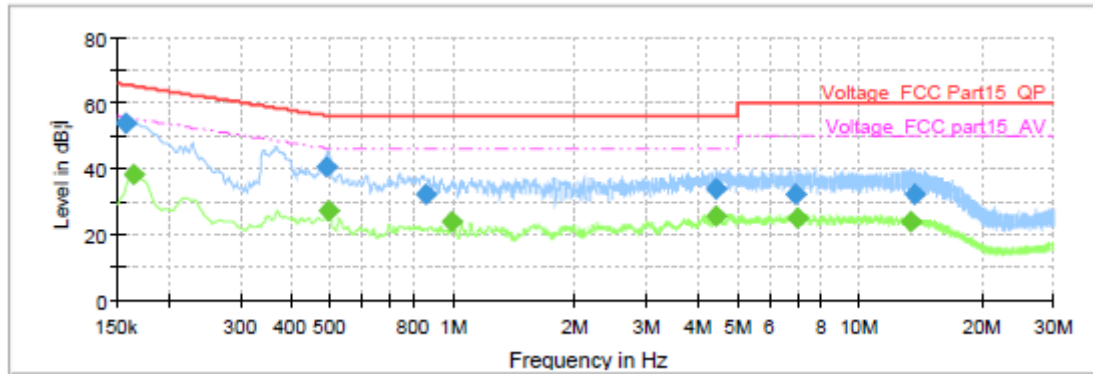

| Frequency (MHz) | QuasiPeak (dB μ V) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.156750 | 54.01 | --- | 65.63 | 11.62 | 1000.0 | 9.000 | L1 | ON | 19.6 |
| 0.163500 | --- | 38.10 | 55.28 | 17.18 | 1000.0 | 9.000 | L1 | ON | 19.6 |
| 0.489750 | 40.47 | --- | 56.17 | 15.70 | 1000.0 | 9.000 | L1 | ON | 19.6 |
| 0.496500 | --- | 26.95 | 46.06 | 19.11 | 1000.0 | 9.000 | L1 | ON | 19.6 |
| 0.854250 | 31.98 | --- | 56.00 | 24.02 | 1000.0 | 9.000 | L1 | ON | 19.6 |
| 0.991500 | --- | 24.06 | 46.00 | 21.94 | 1000.0 | 9.000 | L1 | ON | 19.6 |
| 4.425000 | 33.84 | --- | 56.00 | 22.16 | 1000.0 | 9.000 | L1 | ON | 19.7 |
| 4.449750 | --- | 25.29 | 46.00 | 20.71 | 1000.0 | 9.000 | L1 | ON | 19.7 |
| 6.987750 | 32.33 | --- | 60.00 | 27.67 | 1000.0 | 9.000 | L1 | ON | 19.7 |
| 7.068750 | --- | 25.21 | 50.00 | 24.79 | 1000.0 | 9.000 | L1 | ON | 19.7 |
| 13.285500 | --- | 24.08 | 50.00 | 25.92 | 1000.0 | 9.000 | L1 | ON | 19.9 |
| 13.629750 | 32.23 | --- | 60.00 | 27.77 | 1000.0 | 9.000 | L1 | ON | 20.0 |

L Line

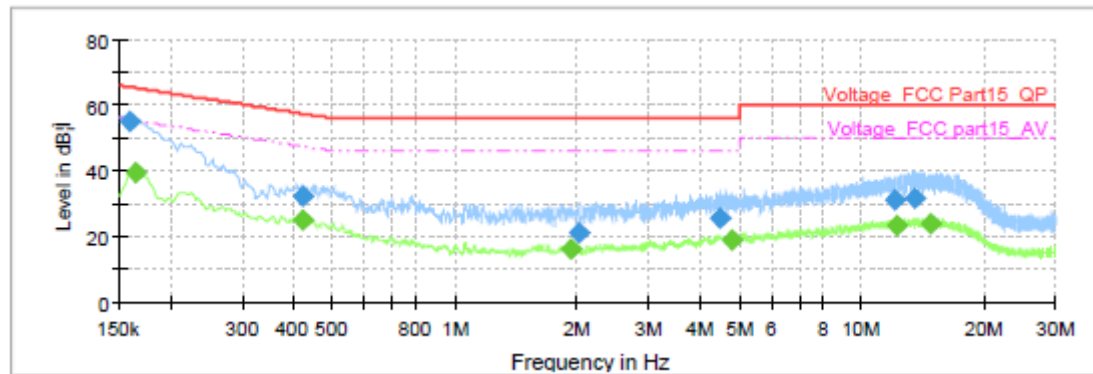

| Frequency (MHz) | QuasiPeak (dB μ V) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.159000 | 54.84 | --- | 65.52 | 10.68 | 1000.0 | 9.000 | N | ON | 19.7 |
| 0.163500 | --- | 39.32 | 55.28 | 15.96 | 1000.0 | 9.000 | N | ON | 19.7 |
| 0.422250 | --- | 24.83 | 47.40 | 22.57 | 1000.0 | 9.000 | N | ON | 19.6 |
| 0.422250 | 32.17 | --- | 57.40 | 25.23 | 1000.0 | 9.000 | N | ON | 19.6 |
| 1.932000 | --- | 16.00 | 46.00 | 30.00 | 1000.0 | 9.000 | N | ON | 19.6 |
| 2.010750 | 20.88 | --- | 56.00 | 35.12 | 1000.0 | 9.000 | N | ON | 19.6 |
| 4.465500 | 25.45 | --- | 56.00 | 30.55 | 1000.0 | 9.000 | N | ON | 19.7 |
| 4.809750 | --- | 19.13 | 46.00 | 26.87 | 1000.0 | 9.000 | N | ON | 19.7 |
| 12.090750 | 31.12 | --- | 60.00 | 28.88 | 1000.0 | 9.000 | N | ON | 19.9 |
| 12.156000 | --- | 23.43 | 50.00 | 26.57 | 1000.0 | 9.000 | N | ON | 19.9 |
| 13.452000 | 31.68 | --- | 60.00 | 28.32 | 1000.0 | 9.000 | N | ON | 19.9 |
| 14.716500 | --- | 23.99 | 50.00 | 26.01 | 1000.0 | 9.000 | N | ON | 19.9 |

N Line

6. Main Test Instruments

| Name | Manufacturer | Type | Serial Number | Calibration Date | Expiration Date |
|--------------------------------------|--------------|-----------|---------------|------------------|-----------------|
| Spectrum Analyzer | R&S | FSV30 | 100815 | 2017-12-17 | 2018-12-16 |
| EMI Test Receiver | R&S | ESCI | 100948 | 2017-05-20 | 2018-05-19 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB 9163 | 9163-201 | 2017-11-18 | 2020-11-17 |
| Double Ridged Waveguide Horn Antenna | R&S | HF907 | 100126 | 2014-12-06 | 2019-12-05 |
| Loop Antenna | SCHWARZBECK | FMZB1519 | 1519-047 | 2017-02-18 | 2020-02-17 |
| Standard Gain Horn | ETS-Lindgren | 3160-09 | 00102644 | 2015-01-30 | 2020-01-29 |
| EMI Test Receiver | R&S | ESCS30 | 100138 | 2017-12-17 | 2018-12-16 |
| LISN | R&S | ENV216 | 101171 | 2016-12-16 | 2019-12-15 |
| Spectrum Analyzer | Agilent | N9010A | MY47191109 | 2017-05-20 | 2018-05-19 |
| RF Cable | Agilent | SMA 15cm | 0001 | / | / |

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance




Picture 1 EUT

A.2 Test Setup



30M Hz-1GHz

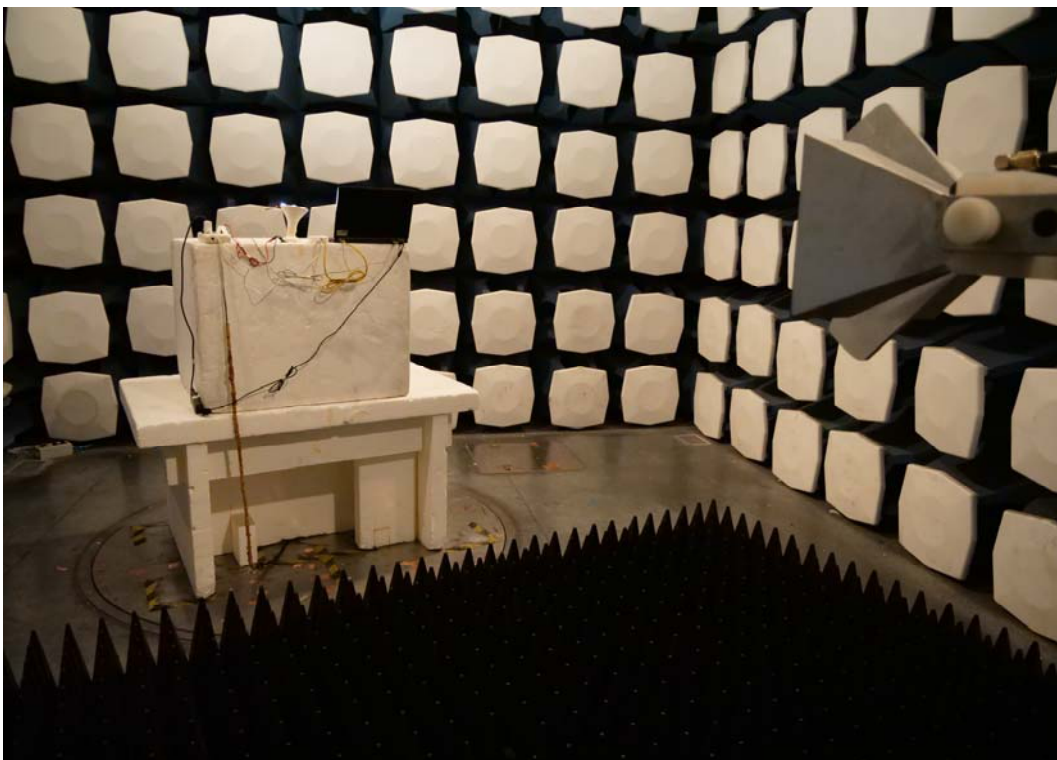

Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup