

# FCC SAR TEST REPORT

**Test File No : F690501/RF-SAR002462**

|                             |                                                                                         |
|-----------------------------|-----------------------------------------------------------------------------------------|
| <b>Equipment Under Test</b> | Module                                                                                  |
| <b>Model Name</b>           | 8265D2W                                                                                 |
| <b>Host Device</b>          | NOTEBOOK PC                                                                             |
| <b>Host Device Name</b>     | NP940X5M                                                                                |
| <b>Applicant</b>            | Intel Mobile Communications                                                             |
| <b>Address of Applicant</b> | Intel Mobile Communications 100 Center Point Circle Suite 200<br>Columbia, SC 29210 USA |
| <b>FCC ID</b>               | PD98265D2                                                                               |
| <b>Exposure Category</b>    | General Population/Uncontrolled Exposure                                                |
| <b>Standards</b>            | FCC 47 CFR Part 2 (2.1093)<br>IEEE 1528, 2013<br>ANSI/IEEE C95.1, C95.3                 |
| <b>Date of Receipt</b>      | 2017-04-10                                                                              |
| <b>Date of Test(s)</b>      | 2017-04-22 ~ 2017-04-28                                                                 |
| <b>Date of Issue</b>        | 2017-05-02                                                                              |
| <b>Test Result</b>          | Refer to the Page 05                                                                    |

In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Korea Co., Ltd. or testing done by SGS Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Korea Co., Ltd. in writing.



**Report prepared by /**  
**Jongho Park**  
**Test Engineer**



**Approved by /**  
**Minhyuk Han**  
**Technical Manager**

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 2 / 100

**Revision history**

| Revision | Date of issue | Revisions     | Revised By |
|----------|---------------|---------------|------------|
| -        | May 02, 2017  | Initial issue | -          |

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

### Contents

|        |                                                                       |    |
|--------|-----------------------------------------------------------------------|----|
| 1      | Testing Laboratory_____                                               | 5  |
| 2      | Details of Manufacturer_____                                          | 5  |
| 3      | Description of EUT(s)_____                                            | 5  |
| 4      | The Highest Reported SAR Values_____                                  | 5  |
| 5      | Test Methodology_____                                                 | 6  |
| 6      | Test Environment_____                                                 | 6  |
| 7      | Specific Absorption Rate (SAR)_____                                   | 7  |
| 7.1    | Introduction_____                                                     | 7  |
| 7.2    | SAR Definition_____                                                   | 7  |
| 7.3    | Test Standards and Limits_____                                        | 7  |
| 8      | The SAR Measurement System_____                                       | 9  |
| 9      | System Components_____                                                | 10 |
| 9.1    | Probe_____                                                            | 10 |
| 9.2    | ELI Phantom_____                                                      | 10 |
| 9.3    | Device Holder_____                                                    | 11 |
| 10     | SAR Measurement Procedures_____                                       | 12 |
| 10.1   | Normal SAR Measurement Procedure_____                                 | 12 |
| 11     | SAR System Verification_____                                          | 14 |
| 12     | Tissue Simulant Fluid for the Frequency Band_____                     | 15 |
| 13     | Instruments List_____                                                 | 17 |
| 14     | FCC Power Measurement Procedures_____                                 | 18 |
| 15     | Measured and Reported SAR_____                                        | 18 |
| 16     | Maximum Output Power Specifications_____                              | 19 |
| 16.1   | Bluetooth Maximum Output Power Specifications _____                   | 19 |
| 17     | WLAN_____                                                             | 20 |
| 17.1   | General Device Setup _____                                            | 20 |
| 17.2   | U-NII-1 and U-NII-2A _____                                            | 20 |
| 17.3   | U-NII-2C and U-NII-3_____                                             | 20 |
| 17.4   | 2.4 GHz SAR Test Requirements_____                                    | 20 |
| 17.5   | OFDM Transmission Mode and SAR Test Channel Selection_____            | 21 |
| 17.6   | Initial Test Configuration Procedure _____                            | 21 |
| 17.7   | Subsequent Test Configuration Procedures_____                         | 21 |
| 18     | RF Conducted Power Measurement_____                                   | 22 |
| 19     | Transmit Antenna Separation Distances_____                            | 26 |
| 19.1   | Tablet PC Device Type_____                                            | 26 |
| 20     | Bluetooth Duty Cycle used for SAR Testing_____                        | 28 |
| 21     | SAR Data Summary_____                                                 | 29 |
| 21.1   | Notebook Device Type_____                                             | 29 |
| 21.2   | Tablet PC Device Type_____                                            | 30 |
| 22     | SAR Measurement Variability_____                                      | 33 |
| 22.1   | Measurement Variability_____                                          | 33 |
| 22.2   | Measurement Uncertainty_____                                          | 33 |
| 23     | Simultaneous Multi-band Transmission Evaluation_____                  | 34 |
| 23.1   | Introduction_____                                                     | 34 |
| 23.2   | Simultaneous Transmission possibilities are listed as below _____     | 34 |
| 23.3   | The Simultaneous Transmission possibilities are listed as below _____ | 34 |
| 23.3.1 | Notebook Body SAR Simultaneous Transmission Analysis _____            | 34 |

|        |                                                       |     |
|--------|-------------------------------------------------------|-----|
| 23.3.2 | Tablet PC Body SAR Simultaneous Transmission Analysis | 34  |
| 23.4   | SPLSR Evaluation and Analysis                         | 35  |
|        | Appendixes List                                       | 36  |
|        | Appendixes A.1                                        | 37  |
|        | Appendixes A.2                                        | 39  |
|        | Appendixes A.3                                        | 40  |
|        | Appendixes A.4                                        | 41  |
|        | Appendixes A.5                                        | 42  |
|        | Appendixes A.6                                        | 43  |
|        | Appendixes A.7                                        | 44  |
|        | Appendixes A.8                                        | 45  |
|        | Appendixes A.9                                        | 46  |
|        | Appendixes A.10                                       | 47  |
|        | Appendixes A.11                                       | 48  |
|        | Appendixes A.12                                       | 49  |
|        | Appendixes A.13                                       | 50  |
|        | Appendixes A.14                                       | 51  |
|        | Appendixes A.15                                       | 52  |
|        | Appendixes A.16                                       | 53  |
|        | Appendixes A.17                                       | 54  |
|        | Appendixes A.18                                       | 55  |
|        | Appendixes A.19                                       | 56  |
|        | Appendixes A.20                                       | 57  |
|        | Appendixes A.21                                       | 58  |
|        | Appendixes A.22                                       | 59  |
|        | Appendixes B.1                                        | 60  |
|        | Appendixes C.1                                        | 61  |
|        | Appendixes C.2                                        | 72  |
|        | Appendixes C.3                                        | 77  |
|        | THE END                                               | 100 |

## 1 Testing Laboratory

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| <b>Company Name</b> | SGS Korea Co., Ltd. (Gunpo Laboratory)                                             |
| <b>Address</b>      | Wireless Div. 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea |
| <b>Telephone</b>    | +82 -31 428 5700                                                                   |
| <b>FAX</b>          | +82 -31 427 2371                                                                   |

## 2 Details of Manufacturer

|                  |                                                                                      |
|------------------|--------------------------------------------------------------------------------------|
| <b>Applicant</b> | Intel Mobile Communications                                                          |
| <b>Address</b>   | Intel Mobile Communications 100 Center Point Circle Suite 200 Columbia, SC 29210 USA |
| <b>Email</b>     | Mj615.park@samsung.com                                                               |
| <b>Phone No.</b> | +85-31-8062-4327                                                                     |

## 3 Description of EUT(s)

|                            |                             |
|----------------------------|-----------------------------|
| <b>EUT Type</b>            | Module                      |
| <b>Model Name</b>          | 8265D2W                     |
| <b>Host Device</b>         | NOTEBOOK PC                 |
| <b>Host Device Name</b>    | NP940X5M                    |
| <b>Mode of Operation</b>   | WLAN, Bluetooth             |
| <b>Crest Factor</b>        | 1 (WLAN), 1.311 (Bluetooth) |
| <b>Body worn Accessory</b> | None                        |
| <b>Tx Frequency Range</b>  | 2412                        |

## 5 Test Methodology

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

|                                     |                             |                                                                                                    |
|-------------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | <b>KDB 865664 D01v01r04</b> | <b>SAR Measurement Requirements for 100 MHz to 6 GHz</b>                                           |
| <input checked="" type="checkbox"/> | <b>KDB 447498 D01v06</b>    | <b>Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies</b>     |
| <input type="checkbox"/>            | KDB 447498 D02v02r01        | SAR Measurement Procedures for USB Dongle Transmitters                                             |
| <input checked="" type="checkbox"/> | <b>KDB 248227 D01v02r02</b> | <b>SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters</b>                                           |
| <input type="checkbox"/>            | KDB 615223 D01v01r01        | 802.16e/WiMax SAR Measurement Guidance                                                             |
| <input checked="" type="checkbox"/> | <b>KDB 616217 D04v01r02</b> | <b>SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers</b>            |
| <input type="checkbox"/>            | KDB 643646 D01v01r03        | SAR Test Reduction Considerations for Occupational PTT Radios                                      |
| <input type="checkbox"/>            | KDB 648474 D03v01r04        | Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers |
| <input type="checkbox"/>            | KDB 648474 D04v01r03        | SAR Evaluation Considerations for Wireless Handsets                                                |
| <input type="checkbox"/>            | KDB 680106 D01v02           | RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications             |
| <input type="checkbox"/>            | KDB 941225 D01v03r01        | 3G SAR Measurement Procedures                                                                      |
| <input type="checkbox"/>            | KDB 941225 D05v02r05        | SAR Evaluation Considerations for LTE Devices                                                      |
| <input type="checkbox"/>            | KDB 941225 D06v02r01        | SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities                   |
| <input type="checkbox"/>            | KDB 941225 D07v01r02        | SAR Evaluation Procedures for UMPC Mini-Tablet Devices                                             |

## 6 Testing Environment

|                                       |               |
|---------------------------------------|---------------|
| Ambient temperature                   | : 18°C ~ 25°C |
| Relative humidity                     | : 30% ~ 70%   |
| Liquid temperature of during the test | : <           |

## 7 Specific Absorption Rate (SAR)

### 7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled

### 7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

### 7.3 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,"

3



source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100

## 8 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E_i|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

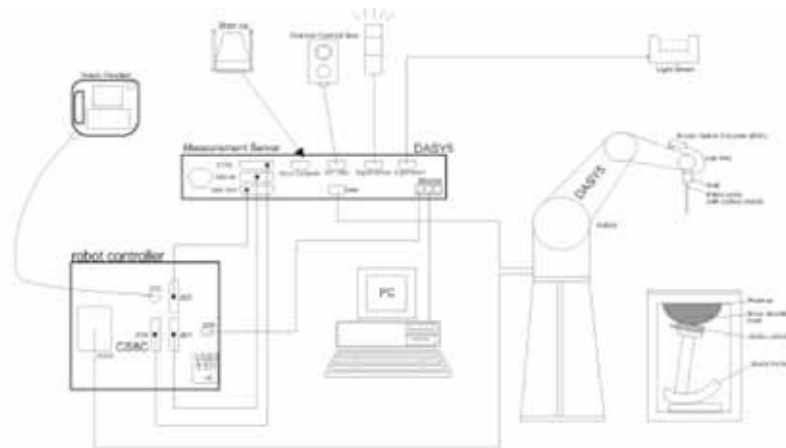


Fig a. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY 5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The ELI phantom enabling testing flat usage.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

## 9 System Components

### 9.1 Probe

- Construction** : Symmetrical design with triangular core.  
Built-in shielding against static charges.  
PEEK enclosure material (resistant to organic solvents,  
e.g., DGBE)
- Calibration** : Basic Broad Band Calibration in air Conversion Factors  
(CF) for HSL 835 and HSL1900.  
Additional CF-Calibration for other liquids and  
frequencies upon request.
- Frequency** : 10

EX3DV4 E-Field Probe

### 9.3 Device Holder

Construction: : Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (a.q.. laptops, Cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioned.



Device Holder



## **10 SAR Measurement Procedures**

### **10.1 Normal SAR Measurement Procedure**

#### **Step 1: Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

|                                                                                                                                                                                                                                                                                  |                                      |                                                                                       | ≤ 3 GHz                                                                                                                                                                                                                                                           | > 3 GHz                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface                                                                                                                                                                           |                                      |                                                                                       | 5 ± 1 mm                                                                                                                                                                                                                                                          | ½·δ·ln(2) ± 0.5 mm                                             |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location                                                                                                                                                                                        |                                      |                                                                                       | 30° ± 1°                                                                                                                                                                                                                                                          | 20° ± 1°                                                       |
| Maximum area scan spatial resolution: Δx <sub>Area</sub> , Δy <sub>Area</sub>                                                                                                                                                                                                    |                                      |                                                                                       | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm                                                                                                                                                                                                                            | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm                       |
|                                                                                                                                                                                                                                                                                  |                                      |                                                                                       | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                |
| Maximum zoom scan spatial resolution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>                                                                                                                                                                                                    |                                      |                                                                                       | ≤ 2 GHz: ≤ 8 mm<br>2 – 3 GHz: ≤ 5 mm*                                                                                                                                                                                                                             | 3 – 4 GHz: ≤ 5 mm*<br>4 – 6 GHz: ≤ 4 mm*                       |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                  | uniform grid: Δz <sub>Zoom</sub> (n) |                                                                                       | ≤ 5 mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: ≤ 4 mm<br>4 – 5 GHz: ≤ 3 mm<br>5 – 6 GHz: ≤ 2 mm    |
|                                                                                                                                                                                                                                                                                  | graded grid                          | Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface | ≤ 4 mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: ≤ 3 mm<br>4 – 5 GHz: ≤ 2.5 mm<br>5 – 6 GHz: ≤ 2 mm  |
|                                                                                                                                                                                                                                                                                  |                                      | Δz <sub>Zoom</sub> (n>1): between subsequent points                                   | ≤ 1.5·Δz <sub>Zoom</sub> (n-1)                                                                                                                                                                                                                                    |                                                                |
| Minimum zoom scan volume                                                                                                                                                                                                                                                         | x, y, z                              |                                                                                       | ≥ 30 mm                                                                                                                                                                                                                                                           | 3 – 4 GHz: ≥ 28 mm<br>4 – 5 GHz: ≥ 25 mm<br>5 – 6 GHz: ≥ 22 mm |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                                       |                                      |                                                                                       |                                                                                                                                                                                                                                                                   |                                                                |
| * When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                      |                                                                                       |                                                                                                                                                                                                                                                                   |                                                                |

## 11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. 1. The daily system accuracy verification occurs within the flat section of the ELI phantom. A SAR measurement was performed to see if the measured SAR was within  $\pm 10\%$  from the target SAR values. These tests were done at 2450



## **12 Tissue Simulant Fluid for the Frequency Band**

The dielectric properties for this simulant fluid were measured by using the Speag Model DAK-3.5 Dielectric Probe in conjunction with Agilent E5071C Network Analyzer(300

The composition of the brain & muscle tissue simulating liquid

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Ingredients<br>(% by weight) | Frequency ( |
|------------------------------|-------------|
|------------------------------|-------------|

### 13 Instruments List

|                           |                                                                          |                 |            |              |            |
|---------------------------|--------------------------------------------------------------------------|-----------------|------------|--------------|------------|
| Test Platform             | SPEAG DASY5 Professional                                                 |                 |            |              |            |
| Location                  | SGS Korea Co., Ltd. 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, E&E Lab |                 |            |              |            |
| Manufacture               | SPEAG                                                                    |                 |            |              |            |
| Description               | SAR Test System (Frequency range 300 MHz – 6 GHz)                        |                 |            |              |            |
| Software Reference        | DASY52: 52.8.8(1258)<br>SEMCAD X: 14.6.10(7373)                          |                 |            |              |            |
| Hardware Reference        |                                                                          |                 |            |              |            |
| Equipment                 | Type                                                                     | Serial Number   | Cal Date   | Cal Interval | Cal Due    |
| Robot                     | TX90XL                                                                   | F12/5LP8A1/A/01 | N/A        | N/A          | N/A        |
| Phantom                   | ELI Phantom                                                              | TP-1244         | N/A        | N/A          | N/A        |
| Mounting Device           | Laptop Extension Kit                                                     | N/A             | N/A        | N/A          | N/A        |
| Verification Dipole       | D2450V2                                                                  | 734             | 2016-05-24 | Biennial     | 2018-05-24 |
| Verification Dipole       | D5GHzV2                                                                  | 1130            | 2016-05-23 | Biennial     | 2018-05-23 |
| Dielectric Assessment Kit | DAK-3.5                                                                  | 1228            | 2016-11-17 | Annual       | 2017-11-17 |
| DAE                       | DAE3                                                                     | 1503            | 2016-06-27 | Annual       | 2017-06-27 |
| E-Field Probe             | EX3DV4                                                                   | 3862            | 2016-10-06 | Annual       | 2017-10-06 |
| Network Analyzer          | E5071C                                                                   | MY46111535      | 2016-05-24 | Annual       | 2017-05-24 |
| Power Meter               | E4419B                                                                   | GB43311125      | 2016-06-20 | Annual       | 2017-06-20 |
| Power Meter               | E4419B                                                                   | GB43311715      | 2016-06-20 | Annual       | 2017-06-20 |
| Power Sensor              | E9300H                                                                   | MY41495307      | 2016-06-21 | Annual       | 2017-06-21 |
| Power Sensor              | E9300H                                                                   | MY41495314      | 2016-06-11 | Annual       | 2017-06-11 |
| Power Sensor              | E9327A                                                                   | US40441371      | 2016-12-16 | Annual       | 2017-12-16 |
| Signal Generator          | E8247C                                                                   | MY43321024      | 2016-06-20 | Annual       | 2017-06-20 |
| Power Amplifier           | AMP2027                                                                  | 10008           | 2016-07-12 | Annual       | 2017-07-12 |
| Dual Directional Coupler  | 772D                                                                     | MY52180226      | 2016-08-19 | Annual       | 2017-08-19 |
| LP Filter                 | LA-30N                                                                   | N/A             | 2016-06-21 | Annual       | 2017-06-21 |
| LP Filter                 | LA-60N                                                                   | N/A             | 2016-06-21 | Annual       | 2017-06-21 |
| Attenuator                | 05AS102-K03                                                              | A1              | 2016-12-15 | Annual       | 2017-12-15 |
| Attenuator                | 05AS102-K20                                                              | A3              | 2016-12-15 | Annual       | 2017-12-15 |
| Attenuator                | 05AS102-K20                                                              | A4              | 2016-12-15 | Annual       | 2017-12-15 |
| Digital Hygro-Thermometer | BJ5478                                                                   | 12091382-1      | 2016-06-21 | Annual       | 2017-06-21 |
| Digital Thermometer       | DTM3000                                                                  | 3027            | 2016-06-22 | Annual       | 2017-06-22 |
| Spectrum Analyzer         | E4445A                                                                   | MY44020523      | 2016-06-20 | Annual       | 2017-06-20 |

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

## **14 FCC Power Measurement Procedures**

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

## **15 Measured and Reported SAR**

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.



## 16 Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

### Average power for Production (

## 17 WLAN

### 17.1 General Device Setup

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 17.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg.

### 17.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels.

When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

### 17.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

#### **17.5 OFDM Transmission Mode and SAR Test Channel Selection**

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

#### **17.6 Initial Test Configuration Procedure**

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements

#### **17.7 Subsequent Test Configuration Procedures**

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required.



## **18 RF Conducted Power Measurement**

### **WLAN 2.4**



**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 23 / 100

---

**WLAN 5.3**

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

---

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)



**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 24 / 100

---

**WLAN 5.6**

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

---

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)



**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 25 / 100

---

**WLAN 5.8**

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02


(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

---

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

## 19 Transmit Antenna Separation Distances

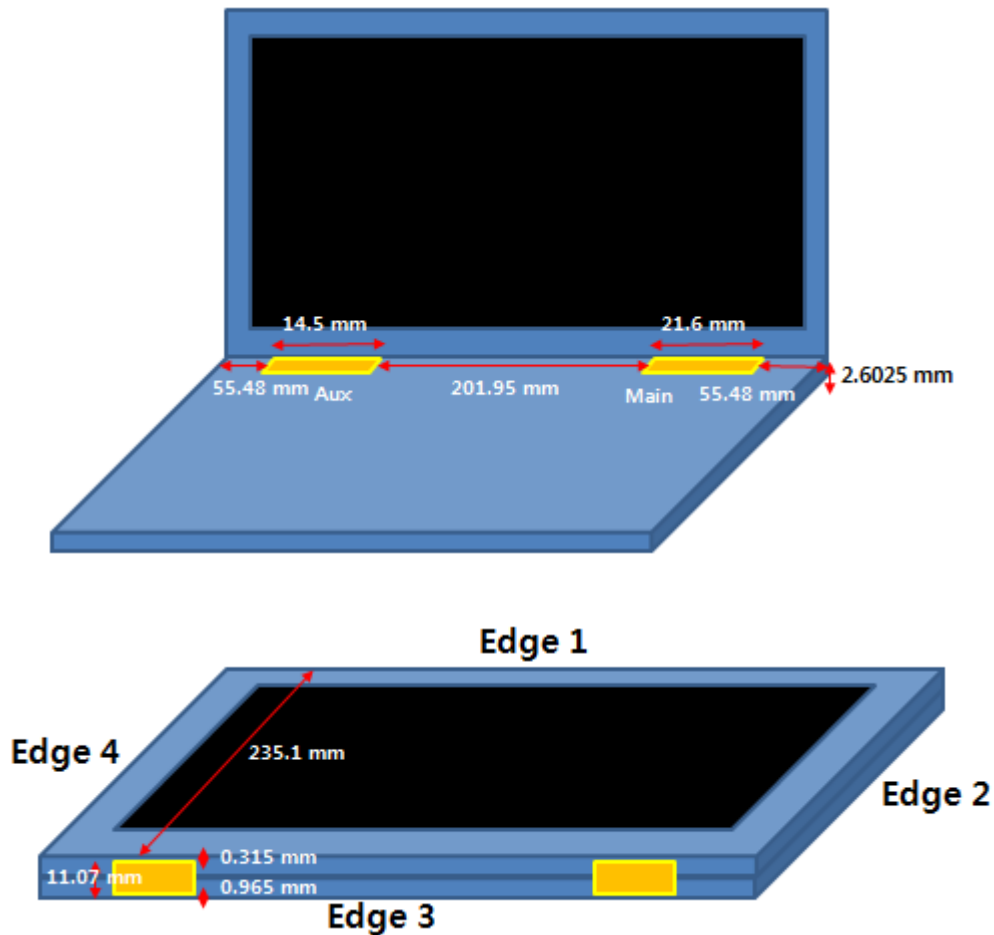

<The Distance information of Antenna to Edges of Notebook and Tablet PC>

## 19.1 Tablet PC Device Type


Based on the maximum tune-up tolerance limit of WLAN and Bluetooth, and the antenna to use separation distance, Table “EXEMPT” SAR was not required and Table “Measure” SAR was required.

| Frequency (MHz)          | Output power |    | Separation distances (mm) |        |        |        |        |       | SAR Exemption |        |        |               |        |       |
|--------------------------|--------------|----|---------------------------|--------|--------|--------|--------|-------|---------------|--------|--------|---------------|--------|-------|
|                          | d8m          | mW | Rear                      | Edge 1 | Edge 2 | Edge 3 | Edge 4 | Front | Rear          | Edge 1 | Edge 2 | Edge 3        | Edge 4 | Front |
| <b>WLAN Main Antenna</b> |              |    |                           |        |        |        |        |       |               |        |        |               |        |       |
| 2462                     | 16.00        | 40 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 12.55 Measure | N/A    | EXEMPT | 12.55 Measure | EXEMPT | N/A   |
| 5240                     | 9.50         | 9  | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 4.12 Measure  | N/A    | EXEMPT | 4.12 Measure  | EXEMPT | N/A   |
| 5320                     | 9.50         | 9  | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 4.15 Measure  | N/A    | EXEMPT | 4.15 Measure  | EXEMPT | N/A   |
| 5720                     | 10.00        | 10 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 4.78 Measure  | N/A    | EXEMPT | 4.78 Measure  | EXEMPT | N/A   |
| 5825                     | 10.00        | 10 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 4.83 Measure  | N/A    | EXEMPT | 4.83 Measure  | EXEMPT | N/A   |
| <b>WLAN Aux Antenna</b>  |              |    |                           |        |        |        |        |       |               |        |        |               |        |       |
| 2462                     | 16.00        | 40 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 12.55 Measure | N/A    | EXEMPT | 12.55 Measure | EXEMPT | N/A   |
| 5240                     | 11.50        | 14 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 6.41 Measure  | N/A    | EXEMPT | 6.41 Measure  | EXEMPT | N/A   |
| 5320                     | 11.50        | 14 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 6.46 Measure  | N/A    | EXEMPT | 6.46 Measure  | EXEMPT | N/A   |
| 5720                     | 12.50        | 18 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 8.61 Measure  | N/A    | EXEMPT | 8.61 Measure  | EXEMPT | N/A   |
| 5825                     | 14.00        | 25 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 12.07 Measure | N/A    | EXEMPT | 12.07 Measure | EXEMPT | N/A   |
| <b>Bluetooth Antenna</b> |              |    |                           |        |        |        |        |       |               |        |        |               |        |       |
| 2480                     | 11.50        | 14 | 5                         | > 200  | 55.48  | 5      | 55.48  | N/A   | 4.41 Measure  | N/A    | EXEMPT | 4.41 Measure  | EXEMPT | N/A   |

### Note

1. Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
3. Output power is the maximum rated power (including tune-up or manufacturing tolerances).
4. If the antenna separation distance is > 50mm then the value listed is the output power threshold, above which SAR measurement is required. For separation ≤ 50mm the value is the KDB 447498 D01v06 calculated value and must be less than 3 for SAR exemption.
5. Formulas round separation distance to nearest mm and power to nearest

## 20 Bluetooth Duty Cycle used for SAR Testing

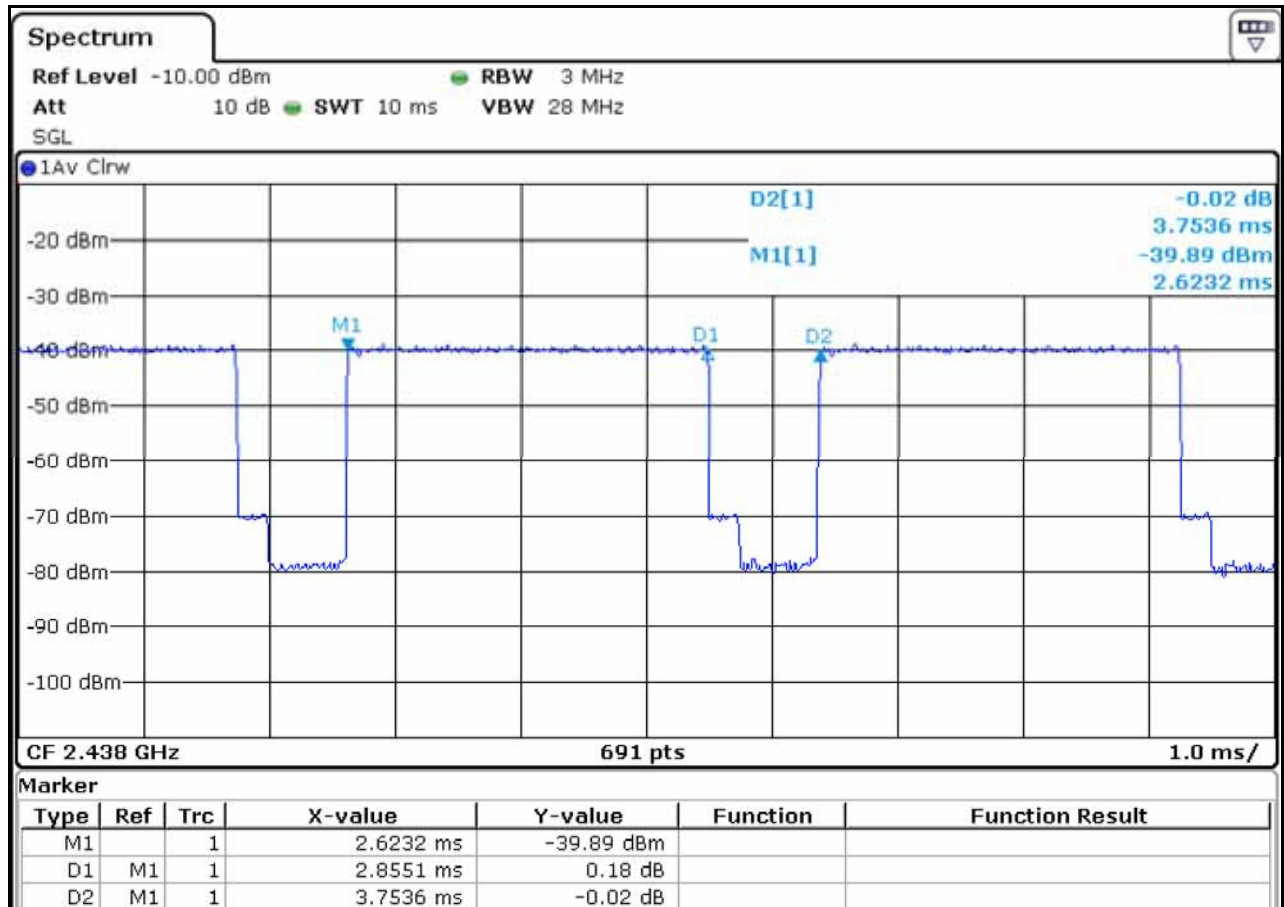

### Bluetooth Duty cycle measurement

$$T_{on} = 2.86 \text{ ms}$$

$$T_{on} + T_{off} = 3.75 \text{ ms}$$

$$\text{Duty Cycle} = (T_{on} / T_{on} + T_{off}) \times 100$$

$$76.3 \% = (2.86 / 3.75) \times 100$$

Bluetooth Duty cycle: **76.3 %**

$$\text{SAR Crest Factor} = 100 / 76.3 = 1.311$$

## 21 SAR Data Summary

### 21.1 Notebook Device Type

#### WLAN 2.45 GHz Body SAR

| EUT<br>Position | Mode | Traffic Channel<br>Frequency<br>( | Power(dBm) | Peak SAR<br>of Area<br>Scan(W/kg) | Cube | 1-g SAR<br>(W/kg) | Scaling Factor<br>(Power) | Scaling<br>Factor<br>(Duty<br>cycle) | 1-g Scaled<br>SAR<br>(W/kg) | Plot<br>No |
|-----------------|------|-----------------------------------|------------|-----------------------------------|------|-------------------|---------------------------|--------------------------------------|-----------------------------|------------|
|-----------------|------|-----------------------------------|------------|-----------------------------------|------|-------------------|---------------------------|--------------------------------------|-----------------------------|------------|

## 21.2 Tablet PC Device Type

### WLAN 2.45 GHz Body SAR

| EUT<br>Position | Mode | Traffic Channel<br>Frequency<br>( | Power(dBm) | Peak SAR<br>of Area<br>Scan(W/kg) | Cube | 1-g SAR<br>(W/kg)) | Scaling Factor<br>(Power) | Scaling<br>Factor<br>(Duty<br>cycle) | 1-g Scaled<br>SAR<br>(W/kg) | Plot<br>No |
|-----------------|------|-----------------------------------|------------|-----------------------------------|------|--------------------|---------------------------|--------------------------------------|-----------------------------|------------|
|-----------------|------|-----------------------------------|------------|-----------------------------------|------|--------------------|---------------------------|--------------------------------------|-----------------------------|------------|

### WLAN 5.8 GHz Body SAR

| EUT<br>Position | Mode | Traffic Channel<br>Frequency<br>( | Power(dBm) | Peak SAR of<br>Area<br>Scan(W/kg) | 1-g SAR<br>(W/kg) | Scaling Factor<br>(Power) | Scaling<br>Factor<br>(Duty<br>cycle) | 1-g Scaled<br>SAR<br>(W/kg) | Plot<br>No |
|-----------------|------|-----------------------------------|------------|-----------------------------------|-------------------|---------------------------|--------------------------------------|-----------------------------|------------|
|-----------------|------|-----------------------------------|------------|-----------------------------------|-------------------|---------------------------|--------------------------------------|-----------------------------|------------|

**WLAN Notes:**

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg.
3. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg or all test channels were measured.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
5. WLAN transmission was verified using a spectrum analyzer.
6. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
7. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is  $\leq 1.2$ W/kg, SAR is not required for UNII band1  $> 1.2$ W/kg, both bands should be tested independently for SAR. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg.

## 22. SAR Measurement Variability

### 22.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1. When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.**
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
4. Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

| EUT Position | Mode      | Traffic Channel |         | Separation Distance (mm) | Measured 1g SAR (W/kg) | 1 <sup>st</sup> Repeated 1g SAR(W/kg) | Ratio |
|--------------|-----------|-----------------|---------|--------------------------|------------------------|---------------------------------------|-------|
|              |           | Frequency (MHz) | Channel |                          |                        |                                       |       |
| Edge3        | WLAN 5GHz | 5290            | 58      | 0                        | 0.826                  | 0.869                                 | 1.05  |
| Edge3        | WLAN 5GHz | 5610            | 122     | 0                        | 0.999                  | 0.912                                 | 0.91  |

### 22.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

## 23 Simultaneous Multi-band Transmission Evaluation

### 23.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 23.2 The Simultaneous Transmission possibilities are listed as below

| No | Capable TX Configuration                   | Operation |
|----|--------------------------------------------|-----------|
| 1  | WLAN Main + WLAN Aux                       | Yes       |
| 2  | WLAN 2.45 GHz Main Ant + Bluetooth Aux Ant | Yes       |
| 3  | WLAN 5 GHz Main Ant + Bluetooth Aux Ant    | Yes       |

**Note:**

- The simultaneous transmission possibilities are listed as below.
- WLAN Aux Ant and Bluetooth Aux Ant share the same antenna and cannot transmit simultaneously.

### 23.3 Simultaneous Transmission Procedures

#### 23.3.1 Notebook Body SAR Simultaneous Transmission Analysis

| Simultaneous TX  | configuration | Main Ant SAR(W/kg)         | Aux Ant SAR(W/kg)            | $\Sigma$ SAR (W/kg) |
|------------------|---------------|----------------------------|------------------------------|---------------------|
| WLAN 2.4 GHz     | Base          | 0.661                      | 0.269                        | 0.930               |
| WLAN 5.3 GHz     | Base          | 0.796                      | 0.361                        | 1.157               |
| WLAN 5.6 GHz     | Base          | 0.770                      | 0.302                        | 1.072               |
| WLAN 5.8 GHz     | Base          | 0.260                      | 0.387                        | 0.647               |
| WLAN + Bluetooth | configuration | 2.4 GHz Main Ant SAR(W/kg) | Bluetooth Aux Ant SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|                  | Base          | 0.661                      | 0.050                        | 0.711               |
|                  | configuration | 5 GHz Main Ant SAR(W/kg)   | Bluetooth Aux Ant SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|                  | Base          | 0.796                      | 0.050                        | 0.846               |

#### 23.3.2 Tablet PC Body SAR Simultaneous Transmission Analysis

| Simultaneous TX          | configuration | Main Ant SAR(W/kg)         | Aux Ant SAR(W/kg)            | $\Sigma$ SAR (W/kg) |
|--------------------------|---------------|----------------------------|------------------------------|---------------------|
| 2.4 GHz WLAN Tablet Mode | Rear          | 0.230                      | 0.387                        | 0.617               |
|                          | Edge3         | 0.497                      | 0.521                        | 1.018               |
| 5.3 GHz WLAN Tablet Mode | Rear          | 0.195                      | 0.259                        | 0.454               |
|                          | Edge3         | 1.045                      | 0.689                        | 1.734               |
| 5.6 GHz WLAN Tablet Mode | Rear          | 0.214                      | 0.213                        | 0.427               |
|                          | Edge3         | 1.078                      | 0.857                        | 1.935               |
| 5.8 GHz WLAN Tablet Mode | Rear          | 0.061                      | 0.314                        | 0.375               |
|                          | Edge3         | 0.537                      | 0.696                        | 1.233               |
| WLAN + Bluetooth         | configuration | 2.4 GHz Main Ant SAR(W/kg) | Bluetooth Aux Ant SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|                          | Rear          | 0.230                      | 0.008                        | 0.238               |
|                          | Edge 3        | 0.497                      | 0.155                        | 0.652               |
|                          | configuration | 5 GHz Main Ant SAR(W/kg)   | Bluetooth Aux Ant SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|                          | Rear          | 0.214                      | 0.008                        | 0.222               |
|                          | Edge3         | 1.078                      | 0.155                        | 1.233               |

### 23.4 SPLSR Evaluation and Analysis

FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio for each pair of antennas is  $\leq 0.04$ , simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.


$$\text{Distance} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$


#### Notebook Body SAR Peak Location Separation Ratio (SPLSR)

| Simultaneous Tx | Position | Man Ant | Aux Ant | $\Sigma$ SAR (W/kg) | Calculated Distance (mm) | SPLSR ( $\leq 0.04$ ) | Volume Scan | Page No |
|-----------------|----------|---------|---------|---------------------|--------------------------|-----------------------|-------------|---------|
| WLAN 5.3 GHz    | Edge3    | 1.045   | 0.689   | 1.734               | 221.04                   | 0.012                 | No          | 37      |
| WLAN 5.6 GHz    | Edge3    | 1.078   | 0.857   | 1.935               | 218.08                   | 0.012                 | No          | 37      |

#### Notebook (Base) 5.3 GHz (WLAN Main Ant + WLAN Aux Ant)

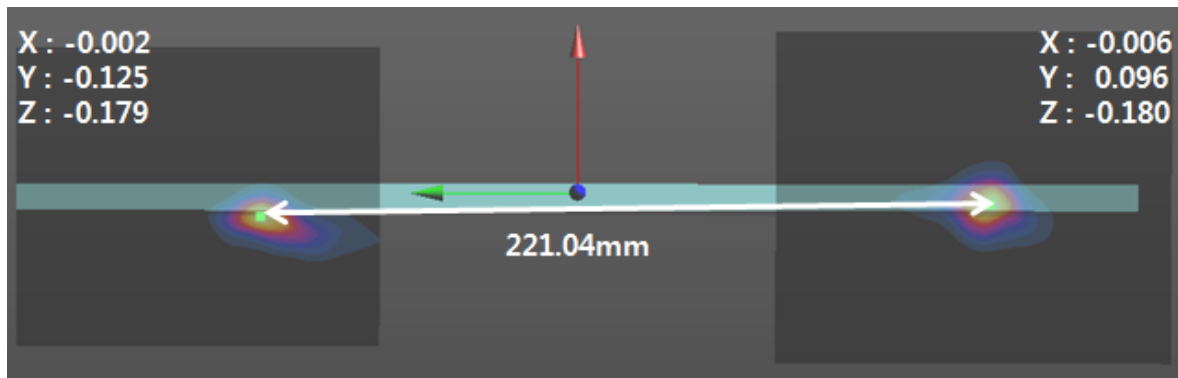

#### Notebook (Base) 5.6 GHz (WLAN Main Ant + WLAN Aux Ant)

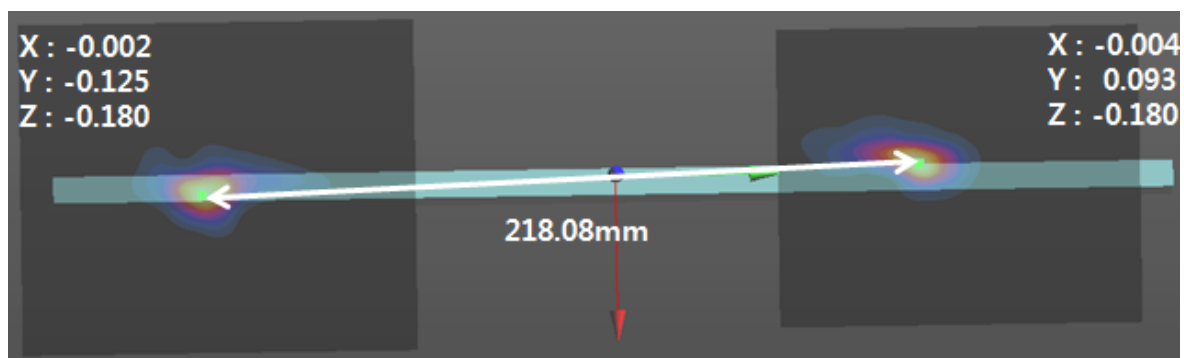

## Appendixes List

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Appendix A</b> | <p>A.1 Verification Test Plots for 2450MHz</p> <p>A.2 Verification Test Plots for 5300 MHz</p> <p>A.3 Verification Test Plots for 5600 MHz</p> <p>A.4 Verification Test Plots for 5800 MHz</p> <p>A.5 SAR Test Plots for WLAN 2450 MHz Main (Notebook Mode)</p> <p>A.6 SAR Test Plots for WLAN 2450 MHz Aux (Notebook Mode)</p> <p>A.7 SAR Test Plots for WLAN 5200 MHz Main (Notebook Mode)</p> <p>A.8 SAR Test Plots for WLAN 5200 MHz Aux (Notebook Mode)</p> <p>A.9 SAR Test Plots for WLAN 5600 MHz Main (Notebook Mode)</p> <p>A.10 SAR Test Plots for WLAN 5600 MHz Aux (Notebook Mode)</p> <p>A.11 SAR Test Plots for WLAN 5800 MHz Main (Notebook Mode)</p> <p>A.12 SAR Test Plots for WLAN 5800 MHz Aux (Notebook Mode)</p> <p>A.13 SAR Test Plots for WLAN 5800 MHz Aux (Notebook Mode)</p> <p>A.13 SAR Test Plots for Bluetooth (Notebook Mode)</p> <p>A.14 SAR Test Plots for WLAN 2450 MHz Main (Tablet Mode)</p> <p>A.15 SAR Test Plots for WLAN 2450 MHz Aux (Tablet Mode)</p> <p>A.16 SAR Test Plots for WLAN 5300 MHz Main (Tablet Mode)</p> <p>A.17 SAR Test Plots for WLAN 5300 MHz Aux (Tablet Mode)</p> <p>A.18 SAR Test Plots for WLAN 5500 MHz Main (Tablet Mode)</p> <p>A.19 SAR Test Plots for WLAN 5500 MHz Aux (Tablet Mode)</p> <p>A.20 SAR Test Plots for WLAN 5800 MHz Main (Tablet Mode)</p> <p>A.21 SAR Test Plots for WLAN 5800 MHz Aux (Tablet Mode)</p> <p>A.22 SAR Test Plots for Bluetooth (Tablet Mode)</p> |
| <b>Appendix B</b> | <p>B.1 Uncertainty Analysis</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Appendix C</b> | <p>C.1 Calibration certificate for Probe</p> <p>C.2 Calibration certificate for DAE</p> <p>C.3 Calibration certificate for Dipole</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## Appendix A.1 Verification Test Plots for 2450 MHz

Date: 2017-04-22

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [2450MHz\\_Verification\(1\).da53.0](#)

Input Power : 100 mW

Ambient Temp : 23.0 °C Tissue Temp : 21.7 °C

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.967$  S/m;  $\epsilon_r = 54.926$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Verification/2450MHz Verification/Area Scan (101x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
Maximum value of SAR (interpolated) = 8.46 W/kg


**Verification/2450MHz Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 67.03 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 10.2 W/kg

**SAR(1 g) = 5.24 W/kg; SAR(10 g) = 2.45 W/kg**

Maximum value of SAR (measured) = 8.47 W/kg

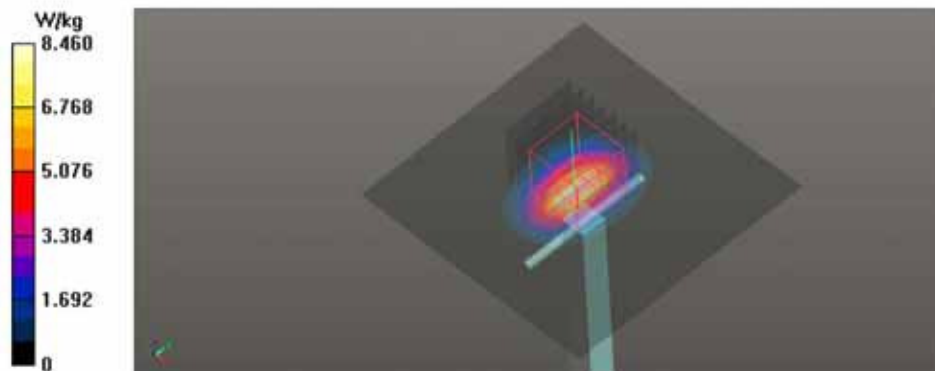

Date: 2017-04-28

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [2450MHz\\_Verification\(2\).da53.0](#)

Input Power : 100 mW

Ambient Temp : 23.3 °C Tissue Temp : 21.4 °C

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.954$  S/m;  $\epsilon_r = 54.557$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Verification/2450MHz Verification/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 8.42 W/kg


**Verification/2450MHz Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.22 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 10.1 W/kg

**SAR(1 g) = 5.25 W/kg; SAR(10 g) = 2.45 W/kg**

Maximum value of SAR (measured) = 8.44 W/kg

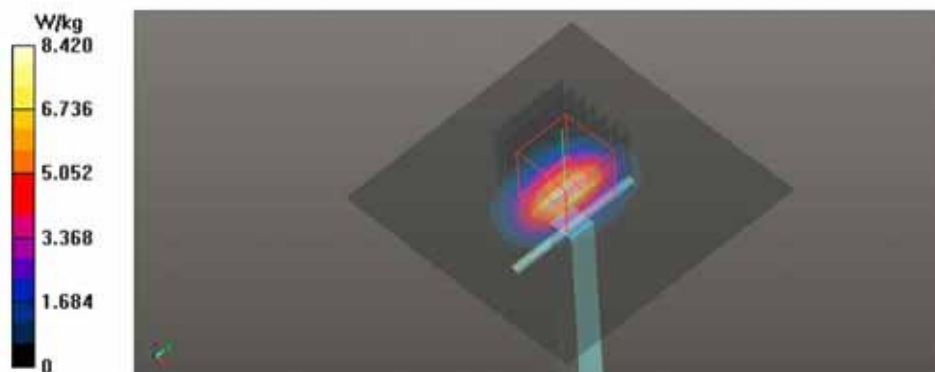

## Appendix A.2 Verification Test Plots for 5300 MHz

Date: 2017-04-24

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [5300MHz\\_Verification\\_da53-0](#)

Input Power : 100 mW

Ambient Temp : 23.2 °C Tissue Temp : 21.7 °C

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130**

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.197$  S/m;  $\epsilon_r = 48.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(4.35, 4.35, 4.35); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Verification/5300MHz Verification/Area Scan (81x81x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
Maximum value of SAR (interpolated) = 18.7 W/kg


**Verification/5300MHz Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 65.61 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 27.6 W/kg

**SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.11 W/kg**

Maximum value of SAR (measured) = 19.0 W/kg

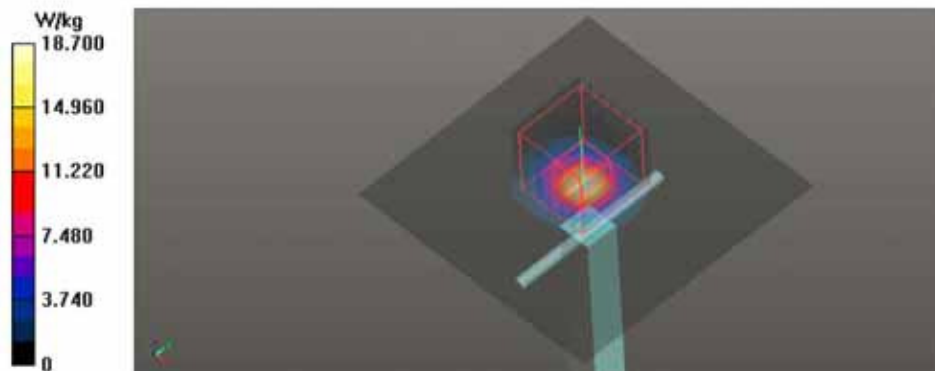

### Appendix A.3 Verification Test Plots for 5600 MHz

Date: 2017-04-25

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [5600MHz\\_Verification.da53:0](#)

Input Power : 100 mW

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.708$  S/m;  $\epsilon_r = 48.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.69, 3.69, 3.69); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Verification/5600MHz Verification/Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 20.7 W/kg


**Verification/5600MHz Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.15 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 30.2 W/kg

**SAR(1 g) = 8.29 W/kg; SAR(10 g) = 2.16 W/kg**

Maximum value of SAR (measured) = 21.3 W/kg

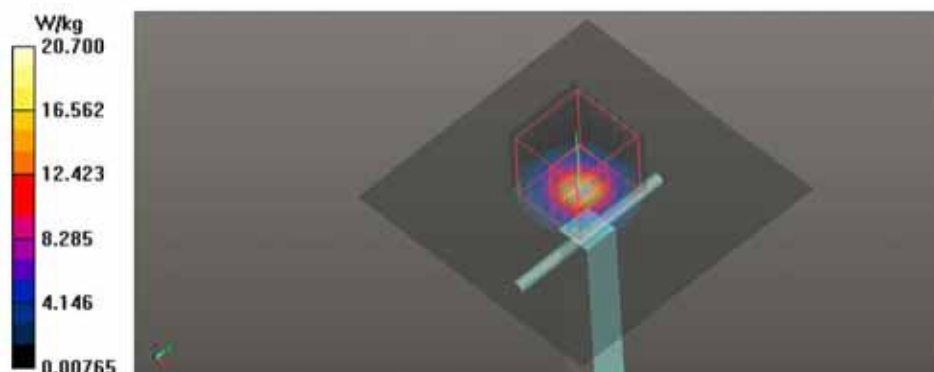

## Appendix A.4 Verification Test Plots for 5800 MHz

Date: 2017-04-27

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5800MHz\\_Verification.da53:0](#)

Input Power : 100 mW

Ambient Temp : 23.3 °C Tissue Temp : 21.6 °C

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.883$  S/m;  $\epsilon_r = 47.296$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.84, 3.84, 3.84); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Verification/5800MHz Verification/Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.6 W/kg


**Verification/5800MHz Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.33 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.2 W/kg

**SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.19 W/kg**

Maximum value of SAR (measured) = 20.2 W/kg

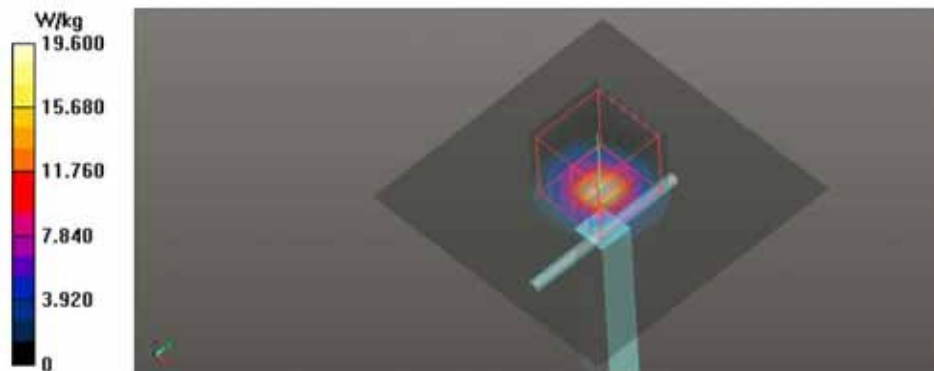

## Appendix A.5 SAR Test Plots for WLAN 2450 MHz Main (Notebook Mode)

Date: 2017-04-22

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [WLAN\\_802.11b\\_Base\\_CH1\\_Main.da53:0](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.917$  S/m;  $\epsilon_r = 55.024$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11b\_Base\_CH1\_Main/Area Scan (101x151x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

**Body/WLAN\_802.11b\_Base\_CH1\_Main/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.74 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.252 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg


**Body/WLAN\_802.11b\_Base\_CH1\_Main/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.74 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.193 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

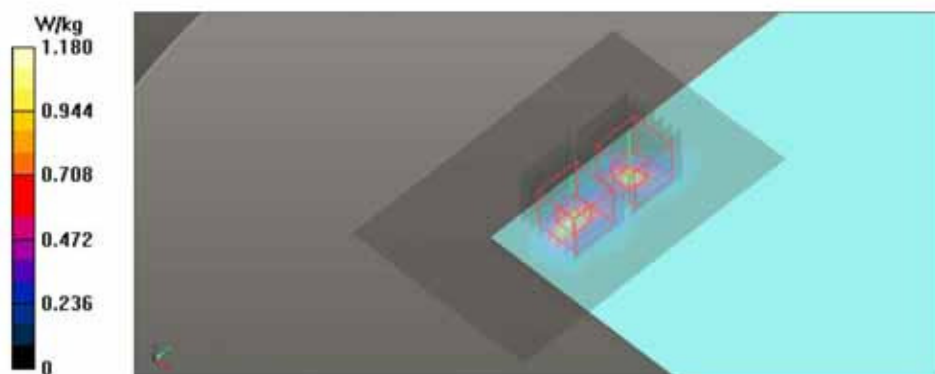

## Appendix A.6 SAR Test Plots for WLAN 2450 MHz Aux (Notebook Mode)

Date: 2017-04-22

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: WLAN\_802.11b\_Base\_CH1\_Aux.da53:0

Ambient Temp : 23.0 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.917$  S/m;  $\epsilon_r = 55.024$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11b\_Base\_CH1\_Aux/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.355 W/kg


**Body/WLAN\_802.11b\_Base\_CH1\_Aux/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.964 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.816 W/kg

**SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.581 W/kg

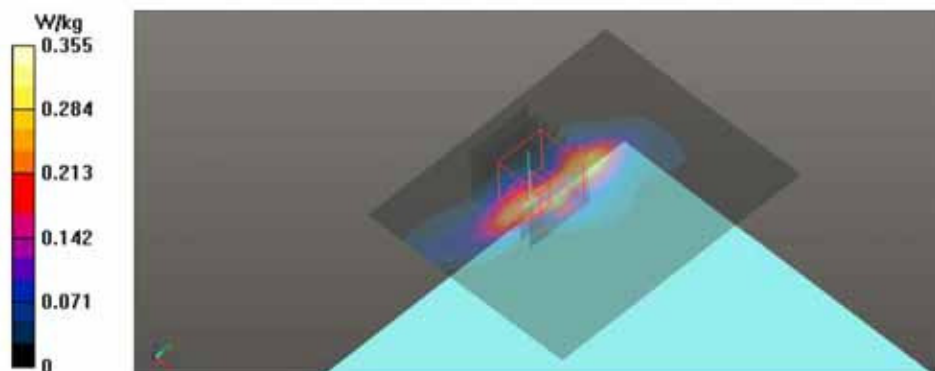

## Appendix A.7 SAR Test Plots for WLAN 5300 MHz Main (Notebook Mode)

Date: 2017-04-24

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [WLAN\\_802.11ac\\_VHT80\\_Base\\_CH58\\_Main.da53:0](#)

Ambient Temp : 23.2 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5290$  MHz;  $\sigma = 5.183$  S/m;  $\epsilon_r = 48.127$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(4.35, 4.35, 4.35); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH58\_Main/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.64 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH58\_Main/Zoom Scan (8x8x7)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.947 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.36 W/kg

**SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.187 W/kg**

Maximum value of SAR (measured) = 1.71 W/kg

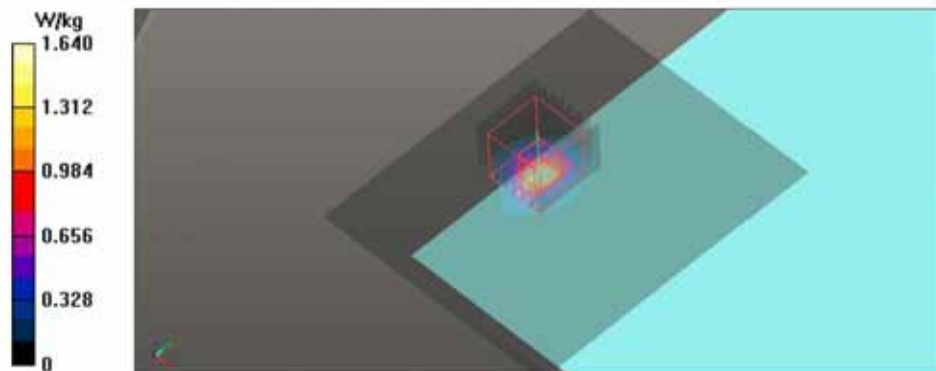

## Appendix A.8 SAR Test Plots for WLAN 5300 MHz Aux (Notebook Mode)

Date: 2017-04-24

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: WLAN\_802.11ac\_VHT80\_Base\_CH58\_Aux\_da53-0

Ambient Temp : 23.2 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5290$  MHz;  $\sigma = 5.183$  S/m;  $\epsilon_r = 48.127$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(4.35, 4.35, 4.35); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH58\_Aux/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.948 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH58\_Aux/Zoom Scan (8x8x7)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.048 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.853 W/kg

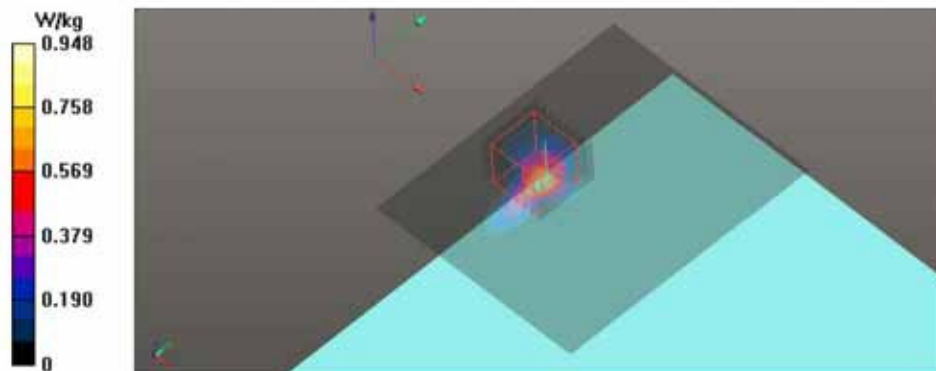

## Appendix A.9 SAR Test Plots for WLAN 5600 MHz Main (Notebook Mode)

Date: 2017-04-25

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [WLAN\\_802.11ac\\_VHT80\\_Base\\_CH106\\_Main.da53.0](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5530$  MHz;  $\sigma = 5.609$  S/m;  $\epsilon_r = 48.219$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.69, 3.69, 3.69); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH106\_Main/Area Scan (91x111x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.87 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH106\_Main/Zoom Scan (8x8x7)/Cube 0:** Measurement grid:


$dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 1.951 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.79 W/kg

**SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.209 W/kg**

Maximum value of SAR (measured) = 1.89 W/kg

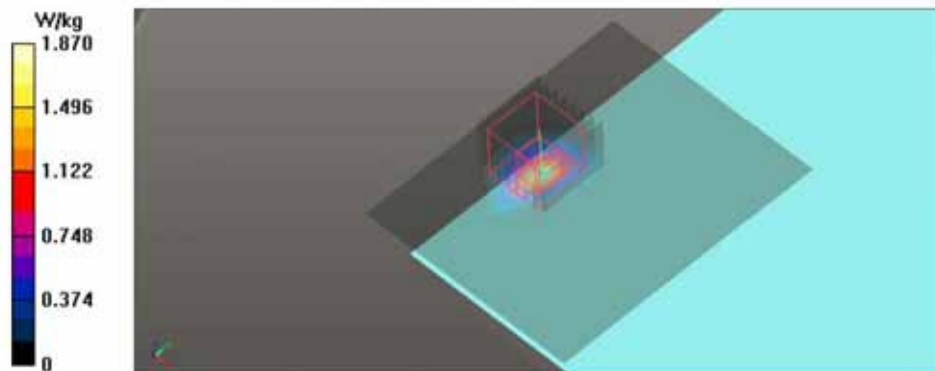

## Appendix A.10 SAR Test Plots for WLAN 5600 MHz Aux (Notebook Mode)

Date: 2017-04-25

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: WLAN\_802.11ac\_VHT80\_Base\_CH122\_Aux.da53-0

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5610$  MHz;  $\sigma = 5.725$  S/m;  $\epsilon_r = 48.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.69, 3.69, 3.69); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH122\_Aux/Area Scan (81x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.653 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH122\_Aux/Zoom Scan (9x9x7)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.987 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.659 W/kg

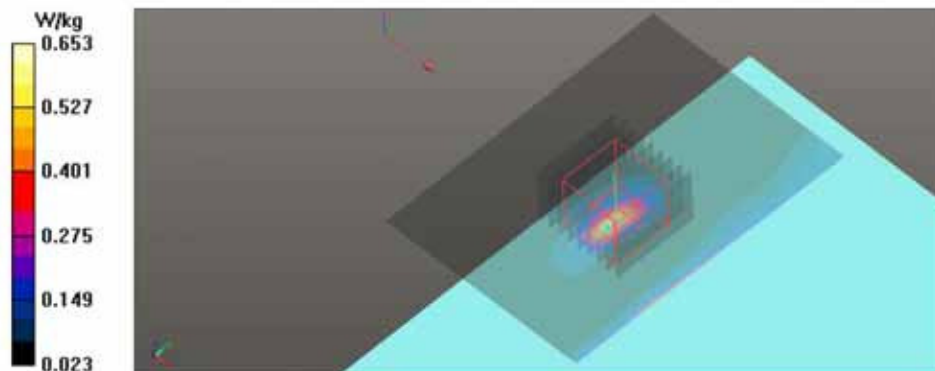

## Appendix A.11 SAR Test Plots for WLAN 5800 MHz Main (Notebook Mode)

Date: 2017-04-27

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [WLAN\\_802.11ac\\_VHT80\\_Base\\_CH155\\_Main.da53.0](#)

Ambient Temp : 23.3 °C Tissue Temp : 21.6 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.845$  S/m;  $\epsilon_r = 47.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.84, 3.84, 3.84); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH155\_Main/Area Scan (91x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.883 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH155\_Main/Zoom Scan (9x9x7)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.521 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.34 W/kg

**SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.836 W/kg

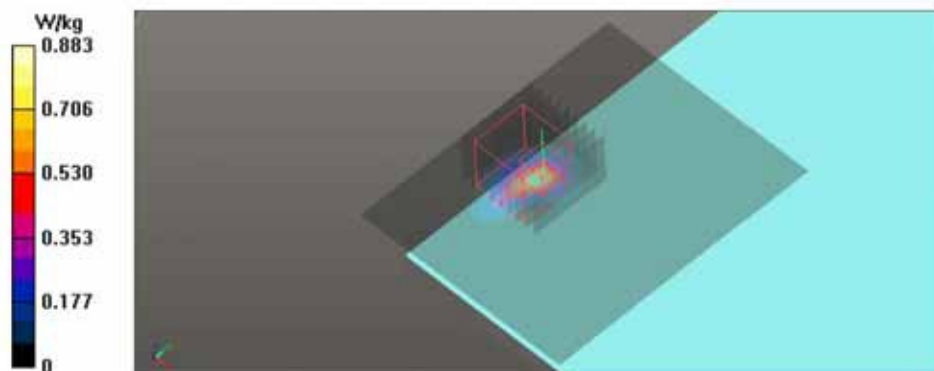

## Appendix A.12 SAR Test Plots for WLAN 5800 MHz Aux (Notebook Mode)

Date: 2017-04-27

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [WLAN\\_802.11ac\\_VHT80\\_Base\\_CH155\\_Aux.da53:0](#)

Ambient Temp : 23.3 °C Tissue Temp : 21.6 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.845$  S/m;  $\epsilon_r = 47.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.84, 3.84, 3.84); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH155\_Aux/Area Scan (91x111x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.06 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Base\_CH155\_Aux/Zoom Scan (9x9x7)/Cube 0:** Measurement grid:


$dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 1.503 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.26 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 1.32 W/kg

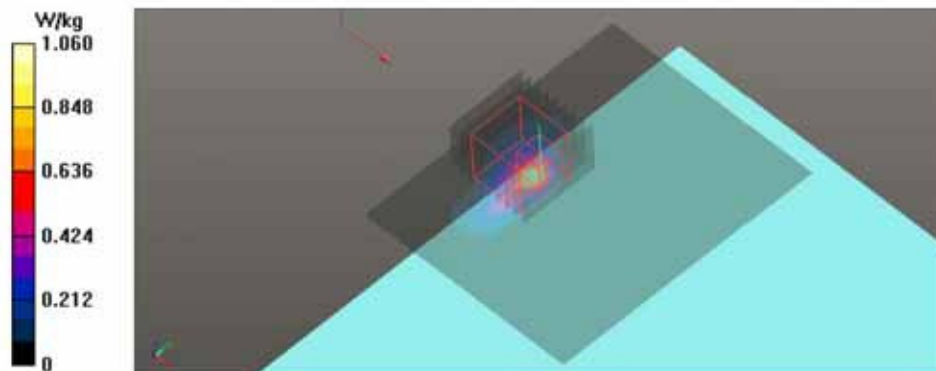

## Appendix A.13 SAR Test Plots for Bluetooth (Notebook Mode)

Date: 2017-04-28

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: 2.45GHz\_Bluetooth\_Base\_Ch39.da53:0

Ambient Temp : 23.3 °C Tissue Temp : 21.6 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.311

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.942$  S/m;  $\epsilon_r = 54.579$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/2.45GHz\_Bluetooth\_Base\_Ch39/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.117 W/kg


**Body/2.45GHz\_Bluetooth\_Base\_Ch39/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8950 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.148 W/kg

**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.110 W/kg

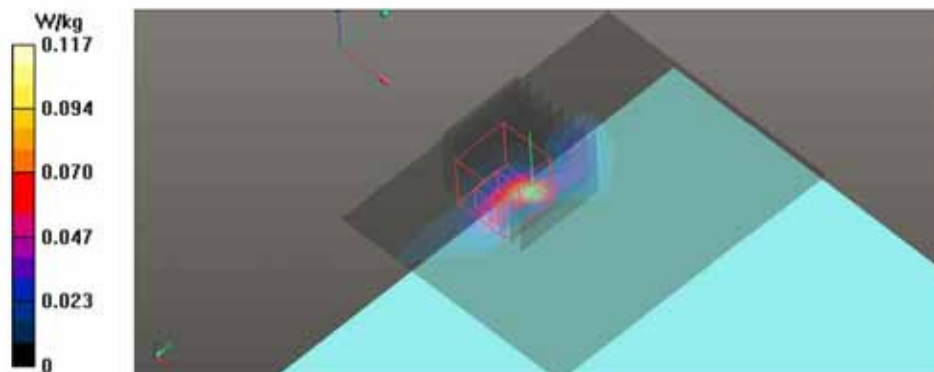

## Appendix A.14 SAR Test Plots for WLAN 2450 MHz Main (Tablet Mode)

Date: 2017-04-22

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: WLAN\_802.11b\_Edge3\_CH1\_Main.da53-0

Ambient Temp : 23.0 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.917$  S/m;  $\epsilon_r = 55.024$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11b\_Edge3\_CH1\_Main/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.934 W/kg

**Body/WLAN\_802.11b\_Edge3\_CH1\_Main/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.19 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.199 W/kg**

Maximum value of SAR (measured) = 0.922 W/kg


**Body/WLAN\_802.11b\_Edge3\_CH1\_Main/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.19 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.938 W/kg

**SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 0.777 W/kg

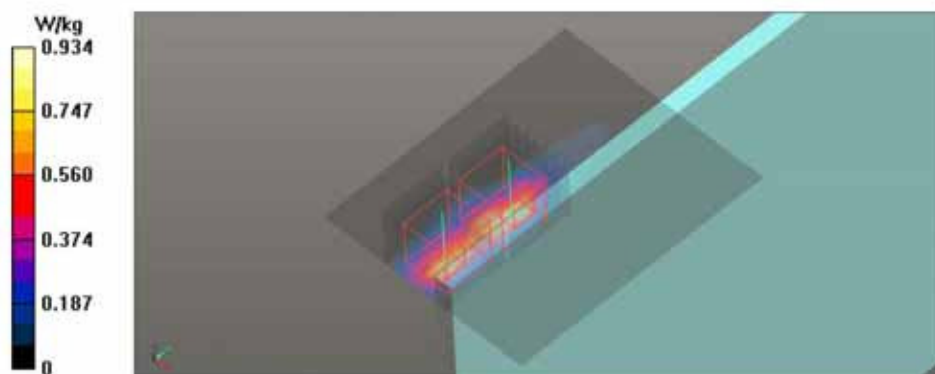

## Appendix A.15 SAR Test Plots for WLAN 2450 MHz Aux (Tablet Mode)

Date: 2017-04-22

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [WLAN\\_802.11b\\_Edge3\\_CH1\\_Aux.da53:0](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, WLAN 2.45GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.917$  S/m;  $\epsilon_r = 55.024$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11b\_Edge3\_CH1\_Aux 2/Area Scan (101x141x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.906 W/kg

**Body/WLAN\_802.11b\_Edge3\_CH1\_Aux 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.353 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.191 W/kg**

Maximum value of SAR (measured) = 0.894 W/kg


**Body/WLAN\_802.11b\_Edge3\_CH1\_Aux 2/Zoom Scan (7x7x7)/Cube 1:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.353 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.876 W/kg

**SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.196 W/kg**

Maximum value of SAR (measured) = 0.713 W/kg

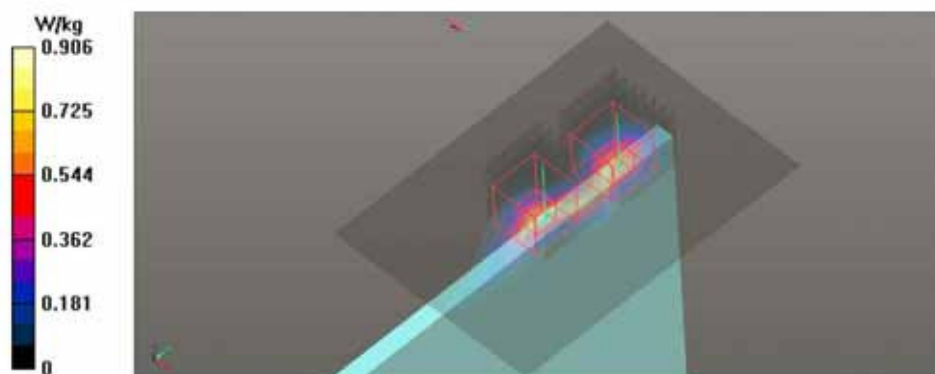

## Appendix A.16 SAR Test Plots for WLAN 5300 MHz Main (Tablet Mode)

Date: 2017-04-24

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: WLAN\_802.11ac\_VHT80\_Edge3\_CH58\_Main\_Repeated\_Test.da53:0

Ambient Temp : 23.2 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5290$  MHz;  $\sigma = 5.183$  S/m;  $\epsilon_r = 48.127$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(4.35, 4.35, 4.35); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH58\_Main\_Repeated Test/Area Scan (101x121x1):**

Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 2.38 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH58\_Main\_Repeated Test/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 1.987 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.07 W/kg

**SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 2.07 W/kg

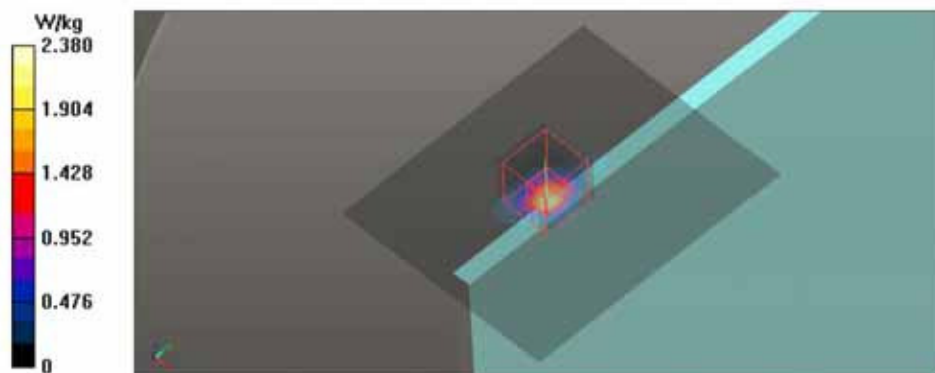

## Appendix A.17 SAR Test Plots for WLAN 5300 MHz Aux (Tablet Mode)

Date: 2017-04-24

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: [WLAN\\_802.11ac\\_VHT80\\_Edge3\\_CH58\\_Aux.da53:0](#)

Ambient Temp : 23.2 °C Tissue Temp : 21.7 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5290$  MHz;  $\sigma = 5.183$  S/m;  $\epsilon_r = 48.127$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(4.35, 4.35, 4.35); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH58\_Aux/Area Scan (91x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.28 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH58\_Aux/Zoom Scan (9x9x7)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.004 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 4.15 W/kg

**SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 1.85 W/kg

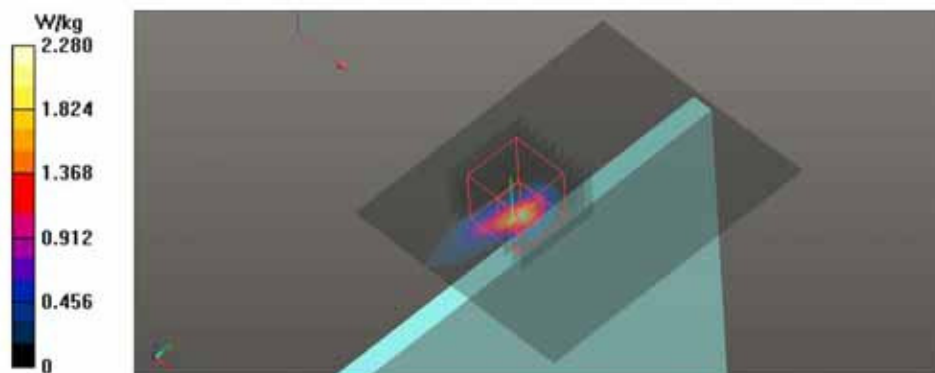

## Appendix A.18 SAR Test Plots for WLAN 5600 MHz Main (Tablet Mode)

Date: 2017-04-25

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: WLAN\_802.11ac\_VHT80\_Edge3\_CH122\_Main.da53:0

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5610$  MHz;  $\sigma = 5.725$  S/m;  $\epsilon_r = 48.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.69, 3.69, 3.69); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH122\_Main/Area Scan (101x121x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 2.73 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH122\_Main/Zoom Scan (8x8x7)/Cube 0:** Measurement grid:


$dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 2.025 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.98 W/kg

**SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.282 W/kg**

Maximum value of SAR (measured) = 2.24 W/kg

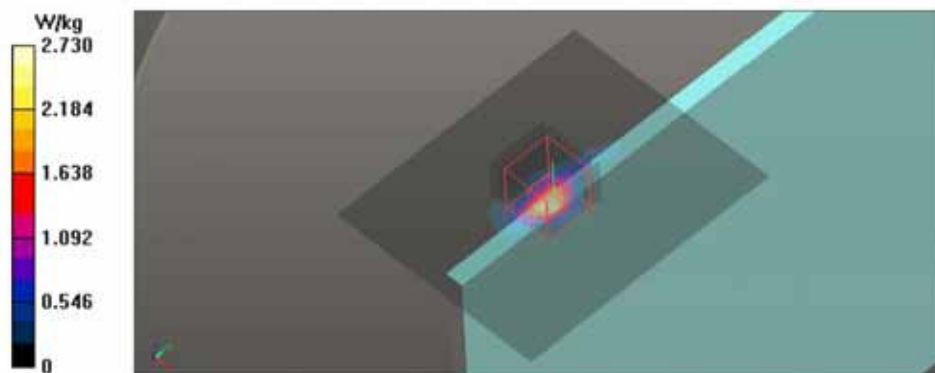

## Appendix A.19 SAR Test Plots for WLAN 5600 MHz Aux (Tablet Mode)

Date: 2017-04-25

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: WLAN\_802.11ac\_VHT80\_Edge3\_CH106\_Aux\_da53:0

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5530$  MHz;  $\sigma = 5.609$  S/m;  $\epsilon_r = 48.219$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.69, 3.69, 3.69); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH106\_Aux/Area Scan (91x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.44 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH106\_Aux/Zoom Scan (9x9x7)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.131 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.84 W/kg

**SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.244 W/kg**

Maximum value of SAR (measured) = 2.33 W/kg

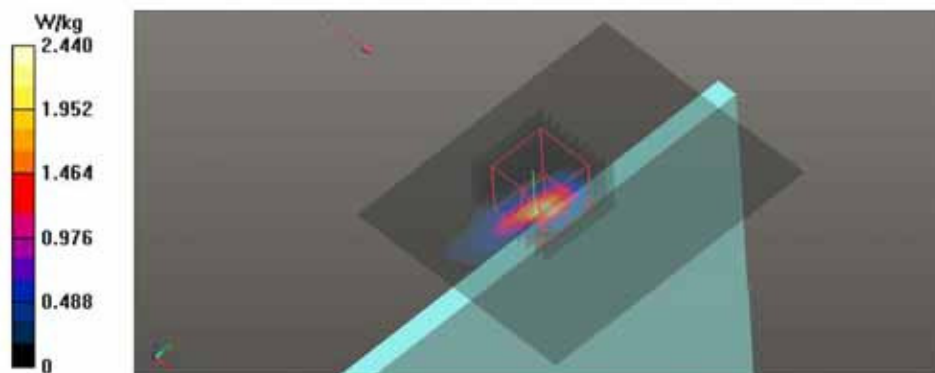

## Appendix A.20 SAR Test Plots for WLAN 5800 MHz Main (Tablet Mode)

Date: 2017-04-27

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: WLAN\_802.11ac\_VHT80\_Edge3\_CH155\_Main.da53:0

Ambient Temp : 23.3 °C Tissue Temp : 21.6 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5775 \text{ MHz}$ ;  $\sigma = 5.845 \text{ S/m}$ ;  $\epsilon_r = 47.35$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.84, 3.84, 3.84); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH155\_Main/Area Scan (91x111x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.44 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH155\_Main/Zoom Scan (9x9x7)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 2.114 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.88 W/kg

**SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 1.30 W/kg

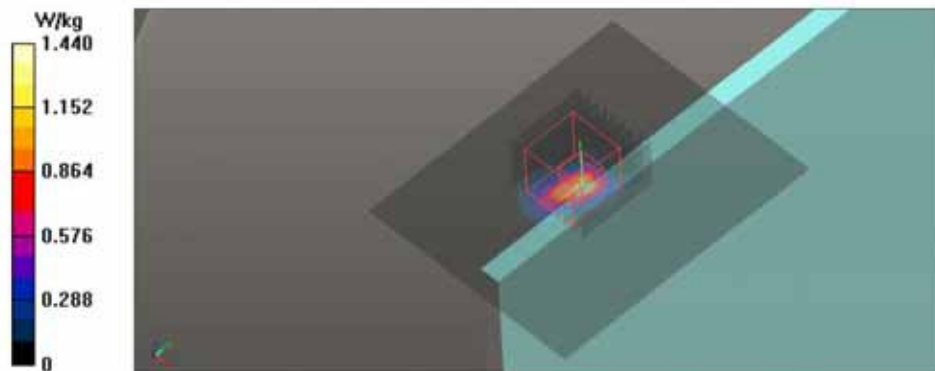

## Appendix A.21 SAR Test Plots for WLAN 5800 MHz Aux (Tablet Mode)

Date: 2017-04-27

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: WLAN\_802.11ac\_VHT80\_Edge3\_CH155\_Aux\_da53:0

Ambient Temp : 23.3 °C Tissue Temp : 21.6 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, 5GHz WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5775 \text{ MHz}$ ;  $\sigma = 5.845 \text{ S/m}$ ;  $\epsilon_r = 47.35$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(3.84, 3.84, 3.84); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH155\_Aux/Area Scan (91x111x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.75 W/kg

**Body/WLAN\_802.11ac\_VHT80\_Edge3\_CH155\_Aux/Zoom Scan (9x9x7)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 2.292 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.96 W/kg

**SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.184 W/kg**

Maximum value of SAR (measured) = 1.96 W/kg

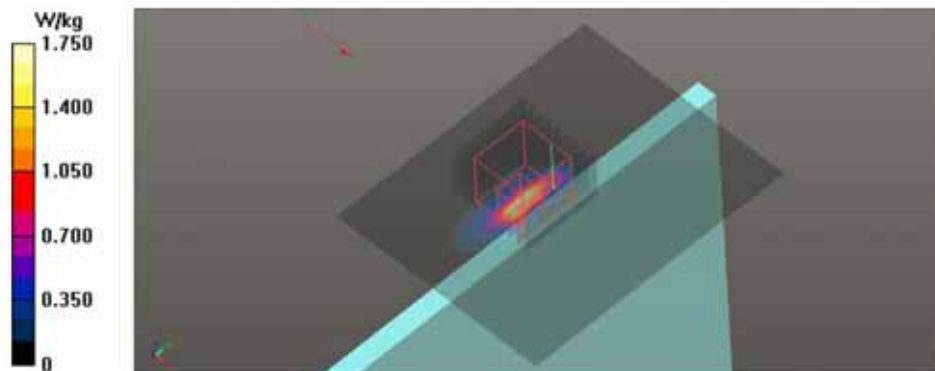

## Appendix A.22 SAR Test Plots for Bluetooth (Tablet Mode)

Date: 2017-04-28

Test Laboratory : SGS Korea (Gunpo Laboratory)  
File Name: 2.45GHz\_Bluetooth\_Edge3\_Ch39.da53:0

Ambient Temp : 23.3 °C Tissue Temp : 21.6 °C

**DUT: NP940X5M; Type: Samsung Notebook; Serial: 0RTE91ZJ300051**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.311

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.942$  S/m;  $\epsilon_r = 54.579$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3862; ConvF(7.57, 7.57, 7.57); Calibrated: 2016-10-06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1503; Calibrated: 2016-06-27
- Phantom: ELI v5.0 1244; Type: QDOVA002AA; Serial: TP:1244
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

**Body/2.45GHz\_Bluetooth\_Edge3\_Ch39/Area Scan (101x121x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.263 W/kg


**Body/2.45GHz\_Bluetooth\_Edge3\_Ch39/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 1.077 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.322 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.046 W/kg**

Maximum value of SAR (measured) = 0.241 W/kg

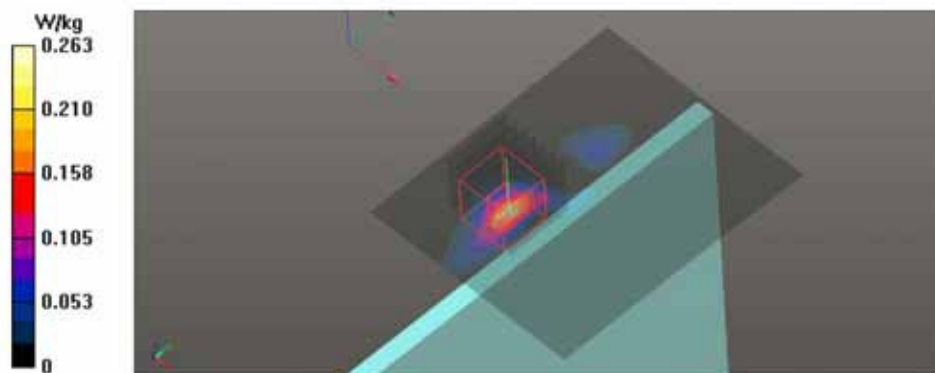

### Appendix B.1 Uncertainty Analysis DASY5 #3

Measurement uncertainty for 300 MHz to 6 GHz averaged over 1 gram

| a                     | b         | c    | d      | e = f(d,k) | f    | g     | h                  | i                  | k                   |
|-----------------------|-----------|------|--------|------------|------|-------|--------------------|--------------------|---------------------|
|                       |           |      |        |            |      |       | cx <sub>f</sub> /e | cx <sub>g</sub> /e |                     |
| Uncertainty Component | IEEE 1528 | Tol  | Prob . | Div.       | Ci   | Ci    | 1g                 | 10g                | Vi                  |
|                       | 2013      | (%)  | Dist.  |            | (1g) | (10g) | ui (%)             | ui (%)             | (V <sub>eff</sub> ) |
| Probe calibration     | E.2.1     | 6.55 | N      | 1          | 1    | 1     | 6.55               | 6.55               |                     |

## Appendix C.1 Calibration certificate for Probe

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **EX3-3862\_Oct16**

### CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3862**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **October 6, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 06-Apr-16 (No. 217-02288/02289)   | Apr-17                 |
| Power sensor NRP-Z91       | SN: 103244       | 06-Apr-16 (No. 217-02288)         | Apr-17                 |
| Power sensor NRP-Z91       | SN: 103245       | 06-Apr-16 (No. 217-02289)         | Apr-17                 |
| Reference 20 dB Attenuator | SN: 55277 (20x)  | 05-Apr-16 (No. 217-02293)         | Apr-17                 |
| Reference Probe ES3DV2     | SN: 3013         | 31-Dec-15 (No. ES3-3013, Dec15)   | Dec-16                 |
| DAE4                       | SN: 660          | 23-Dec-15 (No. DAE4-660, Dec15)   | Dec-16                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

|                                                                                                                 | Name          | Function              | Signature                                                                             |
|-----------------------------------------------------------------------------------------------------------------|---------------|-----------------------|---------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | Michael Weber | Laboratory Technician |  |
| Approved by:                                                                                                    | Katja Pokovic | Technical Manager     |  |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |               |                       |                                                                                       |
| Issued: October 6, 2016                                                                                         |               |                       |                                                                                       |

Certificate No: EX3-3862\_Oct16

Page 1 of 11

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

#### Glossary:

|                       |                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                          |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                         |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                        |
| DCP                   | diode compression point                                                                                                                           |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                      |
| A, B, C, D            | modulation dependent linearization parameters                                                                                                     |
| Polarization $\phi$   | $\phi$ rotation around probe axis                                                                                                                 |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\theta = 0$ is normal to probe axis |
| Connector Angle       | information used in DASY system to align probe sensor X to the robot coordinate system                                                            |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

EX3DV4 – SN:3862

October 6, 2016

# Probe EX3DV4

## SN:3862

Manufactured: February 2, 2012  
Calibrated: October 6, 2016

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3862

October 6, 2016

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3862

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|-----------------------------------------------------------|----------|----------|----------|-----------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.37     | 0.34     | 0.39     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                                     | 102.3    | 96.5     | 102.3    |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 181.7    | ±3.3 %                    |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 195.5    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 179.2    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3862

October 6, 2016

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3862

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 835                  | 41.5                               | 0.90                            | 10.34   | 10.34   | 10.34   | 0.41               | 0.86                    | ± 12.0 %  |
| 900                  | 41.5                               | 0.97                            | 9.86    | 9.86    | 9.86    | 0.33               | 0.96                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 8.69    | 8.69    | 8.69    | 0.31               | 0.89                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 8.41    | 8.41    | 8.41    | 0.32               | 0.80                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 8.01    | 8.01    | 8.01    | 0.25               | 0.99                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 7.54    | 7.54    | 7.54    | 0.23               | 1.08                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 7.42    | 7.42    | 7.42    | 0.36               | 0.84                    | ± 12.0 %  |
| 5200                 | 36.0                               | 4.66                            | 5.50    | 5.50    | 5.50    | 0.30               | 1.80                    | ± 13.1 %  |
| 5300                 | 35.9                               | 4.76                            | 5.17    | 5.17    | 5.17    | 0.35               | 1.80                    | ± 13.1 %  |
| 5500                 | 35.6                               | 4.96                            | 4.90    | 4.90    | 4.90    | 0.40               | 1.80                    | ± 13.1 %  |
| 5600                 | 35.5                               | 5.07                            | 4.62    | 4.62    | 4.62    | 0.45               | 1.80                    | ± 13.1 %  |
| 5800                 | 35.3                               | 5.27                            | 4.70    | 4.70    | 4.70    | 0.45               | 1.80                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3862

October 6, 2016

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3862

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 835                  | 55.2                               | 0.97                            | 10.02   | 10.02   | 10.02   | 0.46               | 0.80                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 8.35    | 8.35    | 8.35    | 0.30               | 0.80                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 8.03    | 8.03    | 8.03    | 0.37               | 0.80                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 7.57    | 7.57    | 7.57    | 0.34               | 0.80                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 7.40    | 7.40    | 7.40    | 0.41               | 0.80                    | ± 12.0 %  |
| 5200                 | 49.0                               | 5.30                            | 4.52    | 4.52    | 4.52    | 0.45               | 1.90                    | ± 13.1 %  |
| 5300                 | 48.9                               | 5.42                            | 4.35    | 4.35    | 4.35    | 0.45               | 1.90                    | ± 13.1 %  |
| 5600                 | 48.5                               | 5.77                            | 3.69    | 3.69    | 3.69    | 0.60               | 1.90                    | ± 13.1 %  |
| 5800                 | 48.2                               | 6.00                            | 3.84    | 3.84    | 3.84    | 0.60               | 1.90                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3862

October 6, 2016

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

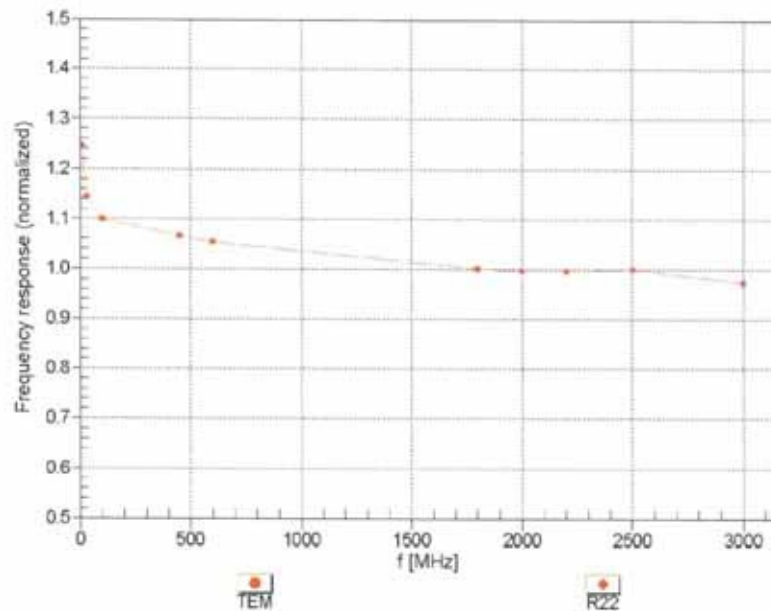

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

Certificate No: EX3-3862\_Oct16

Page 7 of 11

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)



RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:3862

October 6, 2016

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

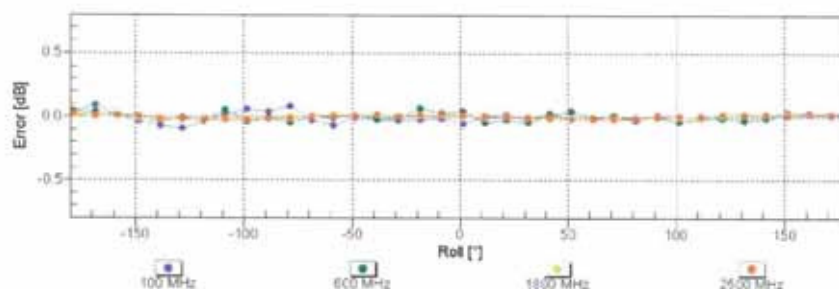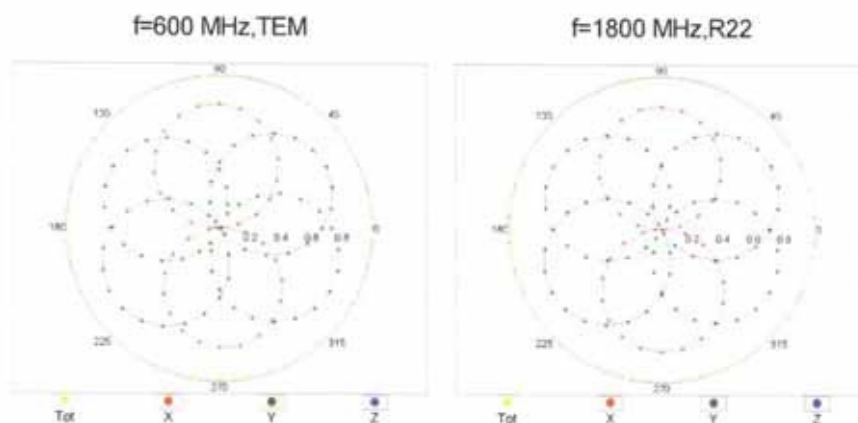

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )



Certificate No: EX3-3862\_Oct16

Page 8 of 11

EX3DV4- SN:3862

October 6, 2016

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$ )

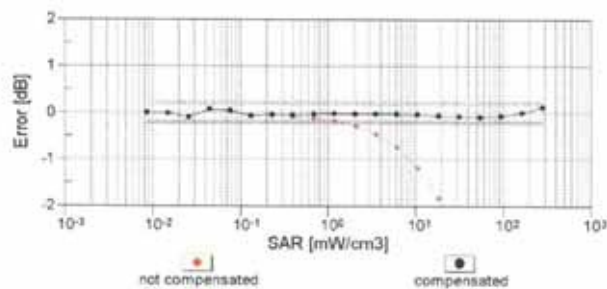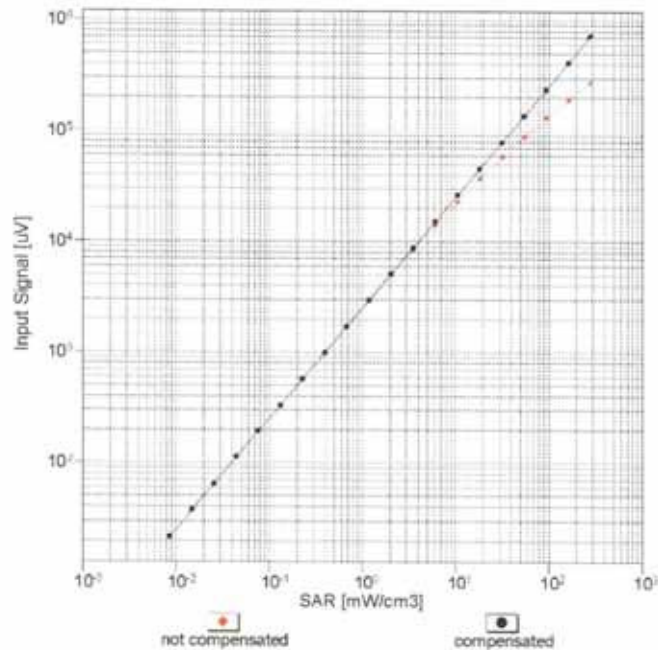

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )


Certificate No: EX3-3862\_Oct16

Page 9 of 11


EX3DV4- SN:3862

October 6, 2016

## Conversion Factor Assessment

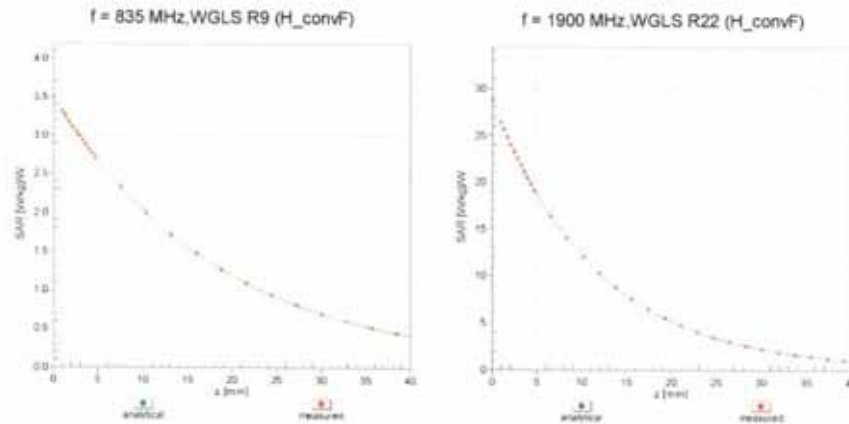

## Deviation from Isotropy in Liquid Error ( $\phi$ , $\theta$ ), $f = 900 \text{ MHz}$

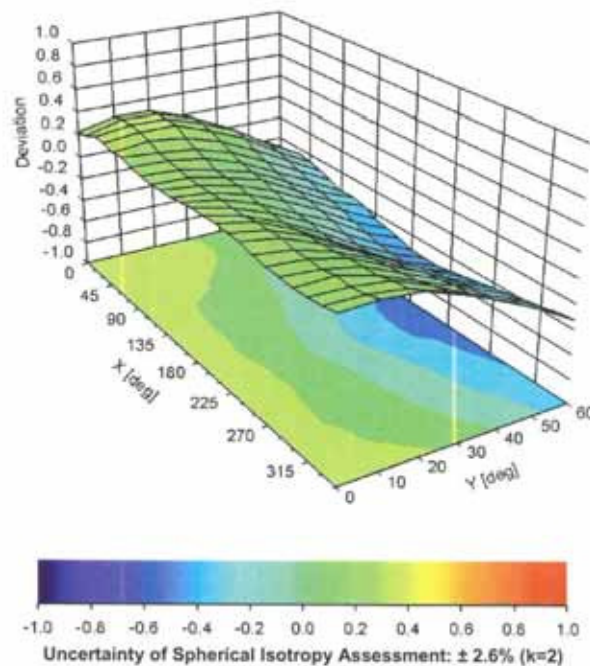

Certificate No: EX3-3862\_Oct16

Page 10 of 11

EX3DV4- SN:3862

October 6, 2016

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3862

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -28.5      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |

## Appendix C.2

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

## Appendix C.2 Calibration certificate for DAE

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **DAE4-1503\_Jun16**

| CALIBRATION CERTIFICATE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                   |                            |                                                                                                    |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------|-------------------|------|----------------------------|-----------------------|-------------------------------|-------------|----------------------|--------|---------------------|------|-----------------------|-----------------|---------------------------|--------------------|----------------------------|------------------------|---------------------|--------------------|----------------------------|------------------------|
| Object                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | DAE4 - SD 000 D04 BM - SN: 1503                                                   |                            |                                                                                                    |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Calibration procedure(s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | QA CAL-06.v29<br>Calibration procedure for the data acquisition electronics (DAE) |                            |                                                                                                    |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Calibration date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | June 27, 2016                                                                     |                            |                                                                                                    |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).<br/>           The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Keithley Multimeter Type 2001</td> <td>SN: 0810276</td> <td>09-Sep-15 (No:17153)</td> <td>Sep-16</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Auto DAE Calibration Unit</td> <td>SE UWS 053 AA 1001</td> <td>05-Jan-16 (in house check)</td> <td>In house check: Jan-17</td> </tr> <tr> <td>Calibrator Box V2.1</td> <td>SE UMS 006 AA 1002</td> <td>05-Jan-16 (in house check)</td> <td>In house check: Jan-17</td> </tr> </tbody> </table> |                                                                                   |                            |                                                                                                    | Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | Keithley Multimeter Type 2001 | SN: 0810276 | 09-Sep-15 (No:17153) | Sep-16 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | Auto DAE Calibration Unit | SE UWS 053 AA 1001 | 05-Jan-16 (in house check) | In house check: Jan-17 | Calibrator Box V2.1 | SE UMS 006 AA 1002 | 05-Jan-16 (in house check) | In house check: Jan-17 |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ID #                                                                              | Cal Date (Certificate No.) | Scheduled Calibration                                                                              |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Keithley Multimeter Type 2001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | SN: 0810276                                                                       | 09-Sep-15 (No:17153)       | Sep-16                                                                                             |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ID #                                                                              | Check Date (in house)      | Scheduled Check                                                                                    |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Auto DAE Calibration Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | SE UWS 053 AA 1001                                                                | 05-Jan-16 (in house check) | In house check: Jan-17                                                                             |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Calibrator Box V2.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SE UMS 006 AA 1002                                                                | 05-Jan-16 (in house check) | In house check: Jan-17                                                                             |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Calibrated by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Name<br>Dominique Steffen                                                         | Function<br>Technician     | Signature<br> |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| Approved by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Fin Bomholt                                                                       | Deputy Technical Manager   |               |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                   |                            | Issued: June 27, 2016                                                                              |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                   |                            |                                                                                                    |                   |      |                            |                       |                               |             |                      |        |                     |      |                       |                 |                           |                    |                            |                        |                     |                    |                            |                        |

Certificate No: DAE4-1503\_Jun16

Page 1 of 5

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.

#### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV, full range = -100...+300 mV  
 Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                     | Y                     | Z                     |
|---------------------|-----------------------|-----------------------|-----------------------|
| High Range          | 403.951 ± 0.02% (k=2) | 404.168 ± 0.02% (k=2) | 404.135 ± 0.02% (k=2) |
| Low Range           | 3.94895 ± 1.50% (k=2) | 3.97690 ± 1.50% (k=2) | 3.95594 ± 1.50% (k=2) |

#### Connector Angle

|                                           |              |
|-------------------------------------------|--------------|
| Connector Angle to be used in DASY system | 59.0 ° ± 1 ° |
|-------------------------------------------|--------------|

**Appendix (Additional assessments outside the scope of SCS0108)**

**1. DC Voltage Linearity**

| High Range        | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|--------------|-----------------|-----------|
| Channel X + Input | 200028.83    | -3.53           | -0.00     |
| Channel X + Input | 20005.73     | 1.52            | 0.01      |
| Channel X - Input | -20001.37    | 3.65            | -0.02     |
| Channel Y + Input | 200030.67    | -1.62           | -0.00     |
| Channel Y + Input | 20002.54     | -1.59           | -0.01     |
| Channel Y - Input | -20004.27    | 0.86            | -0.00     |
| Channel Z + Input | 200032.13    | -0.44           | -0.00     |
| Channel Z + Input | 20003.27     | -0.80           | -0.00     |
| Channel Z - Input | -20002.96    | 2.33            | -0.01     |

| Low Range         | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|--------------|-----------------|-----------|
| Channel X + Input | 2001.01      | 0.31            | 0.02      |
| Channel X + Input | 200.95       | 0.21            | 0.10      |
| Channel X - Input | -199.31      | 0.03            | -0.02     |
| Channel Y + Input | 2000.60      | 0.04            | 0.00      |
| Channel Y + Input | 200.45       | -0.19           | -0.10     |
| Channel Y - Input | -199.53      | -0.04           | 0.02      |
| Channel Z + Input | 2000.98      | 0.44            | 0.02      |
| Channel Z + Input | 199.69       | -0.91           | -0.45     |
| Channel Z - Input | -200.83      | -1.35           | 0.67      |

**2. Common mode sensitivity**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|---------------------------------|--------------------------------|
| Channel X | 200                            | 9.87                            | 8.36                           |
|           | - 200                          | -7.26                           | -8.72                          |
| Channel Y | 200                            | -10.69                          | -10.84                         |
|           | - 200                          | 9.63                            | 9.90                           |
| Channel Z | 200                            | -13.01                          | -13.44                         |
|           | - 200                          | 12.60                           | 11.81                          |

**3. Channel separation**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|----------------|----------------|----------------|
| Channel X | 200                | -              | 0.41           | -3.30          |
| Channel Y | 200                | 7.10           | -              | 2.58           |
| Channel Z | 200                | 10.37          | 4.97           | -              |

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15551            | 16361           |
| Channel Y | 16217            | 15592           |
| Channel Z | 15480            | 15585           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

|           | Average ( $\mu$ V) | min. Offset ( $\mu$ V) | max. Offset ( $\mu$ V) | Std. Deviation ( $\mu$ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.93               | -0.00                  | 1.98                   | 0.43                      |
| Channel Y | -0.02              | -1.06                  | 1.11                   | 0.37                      |
| Channel Z | 0.32               | -0.91                  | 1.46                   | 0.51                      |

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

|           | Zeroing (k $\Omega$ m) | Measuring (M $\Omega$ m) |
|-----------|------------------------|--------------------------|
| Channel X | 200                    | 200                      |
| Channel Y | 200                    | 200                      |
| Channel Z | 200                    | 200                      |

#### 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (Typical values for information)


| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |

### Appendix C.3 Calibration certificate for Dipole

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **SGS Korea (Dymstec)**

Certificate No: **D2450V2-734\_May16**

#### CALIBRATION CERTIFICATE

Object **D2450V2 - SN:734**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **May 24, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289)   | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)         | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)         | Apr-17                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)         | Apr-17                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)         | Apr-17                 |
| Reference Probe EX3DV4      | SN: 7349           | 31-Dec-15 (No. EX3-7349_Dec15)    | Dec-16                 |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)    | Dec-16                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

|                |                              |                                   |                                                                                                    |
|----------------|------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by: | Name<br><b>Michael Weber</b> | Function<br>Laboratory Technician | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>         | Technical Manager                 |               |

Issued: May 25, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-734\_May16

Page 1 of 8

Report File No : F690501/RF-SAR002462

Date of Issue : 2017-05-02

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL tissue simulating liquid  
 ConvF sensitivity in TSL / NORM x,y,z  
 N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2450 MHz $\pm$ 1 MHz   |             |

### Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 38.6 $\pm$ 6 % | 1.87 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

### SAR result with Head TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 12.8 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 50.1 W/kg $\pm$ 17.0 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 5.92 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.4 W/kg $\pm$ 16.5 % (k=2) |

### Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.6 $\pm$ 6 % | 2.02 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

### SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 12.6 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 49.5 W/kg $\pm$ 17.0 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 5.90 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.4 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.6 $\Omega$ + 5.0 j $\Omega$ |
| Return Loss                          | - 23.7 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.7 $\Omega$ + 7.2 j $\Omega$ |
| Return Loss                          | - 22.9 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.152 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |              |
|-----------------|--------------|
| Manufactured by | SPEAG        |
| Manufactured on | May 07, 2003 |

## DASY5 Validation Report for Head TSL

Date: 24.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 734**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.76, 7.76, 7.76); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.0 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 25.8 W/kg

**SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.92 W/kg**

Maximum value of SAR (measured) = 20.8 W/kg

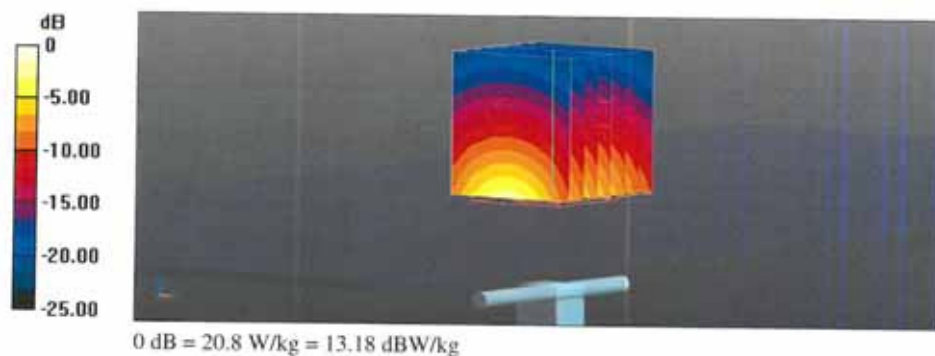

### Impedance Measurement Plot for Head TSL

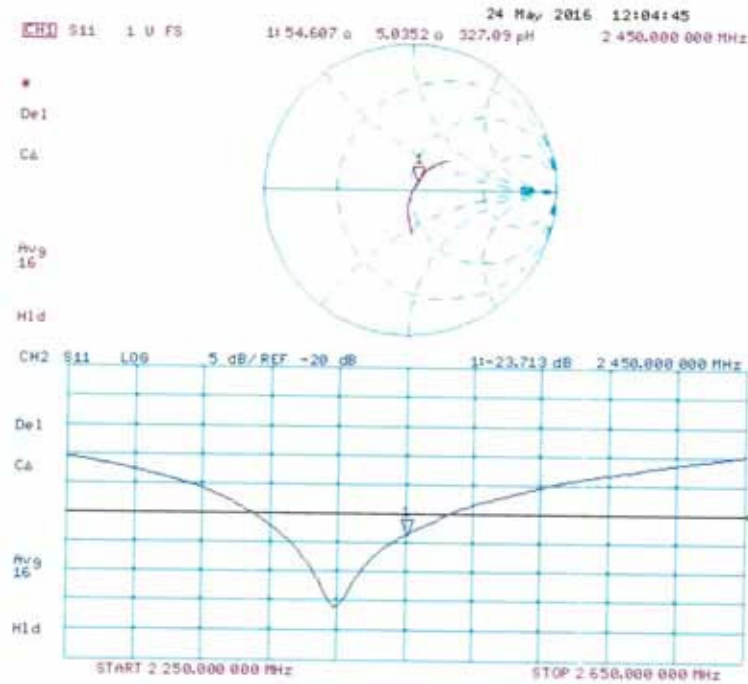

## DASY5 Validation Report for Body TSL

Date: 24.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 734**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  S/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.2 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 25.2 W/kg

**SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.9 W/kg**

Maximum value of SAR (measured) = 20.6 W/kg

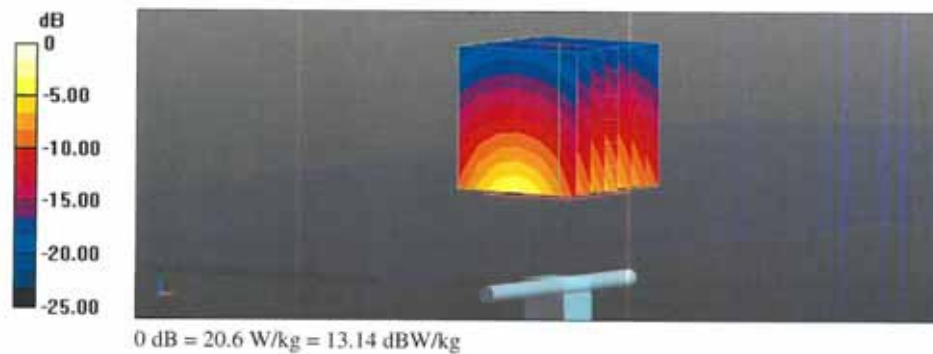


**Impedance Measurement Plot for Body TSL**

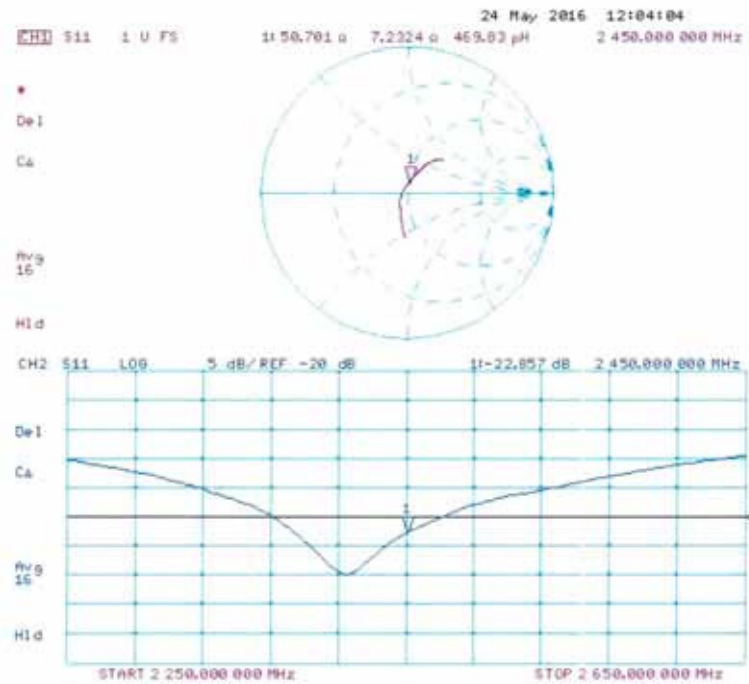

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **D5GHzV2-1130\_May16**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1130**

Calibration procedure(s) **QA CAL-22.v2**  
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **May 23, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289)   | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)         | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)         | Apr-17                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)         | Apr-17                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)         | Apr-17                 |
| Reference Probe EX3DV4      | SN: 3503           | 31-Dec-15 (No. EX3-3503_Dec15)    | Dec-16                 |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)    | Dec-16                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37460704     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: May 25, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D5GHzV2-1130\_May16

Page 1 of 16

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                                                                                                                      |                                  |
|------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| DASY Version                 | DASY5                                                                                                                | V52.8.8                          |
| Extrapolation                | Advanced Extrapolation                                                                                               |                                  |
| Phantom                      | Modular Flat Phantom V5.0                                                                                            |                                  |
| Distance Dipole Center - TSL | 10 mm                                                                                                                | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4.0 mm, dz = 1.4 mm                                                                                         | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 5200 MHz $\pm$ 1 MHz<br>5300 MHz $\pm$ 1 MHz<br>5500 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5800 MHz $\pm$ 1 MHz |                                  |

### Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 36.0           | 4.66 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 34.8 $\pm$ 6 % | 4.52 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

### SAR result with Head TSL at 5200 MHz

|                                                       |                    |                                                |
|-------------------------------------------------------|--------------------|------------------------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                                |
| SAR measured                                          | 100 mW input power | 7.63 W/kg                                      |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>75.7 W/kg <math>\pm</math> 19.9 % (k=2)</b> |

|                                                         |                    |                                                |
|---------------------------------------------------------|--------------------|------------------------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                                |
| SAR measured                                            | 100 mW input power | 2.21 W/kg                                      |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>21.9 W/kg <math>\pm</math> 19.5 % (k=2)</b> |

#### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.7 ± 6 %   | 4.61 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Head TSL at 5300 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 100 mW input power | 8.05 W/kg                         |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>79.9 W / kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.34 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.2 W/kg ± 19.5 % (k=2)</b> |

#### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.6         | 4.96 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.4 ± 6 %   | 4.81 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Head TSL at 5500 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 8.01 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>79.4 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.31 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>22.9 W/kg ± 19.5 % (k=2)</b> |

#### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.3 ± 6 %   | 4.91 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Head TSL at 5600 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 8.15 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>80.8 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.34 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.2 W/kg ± 19.5 % (k=2)</b> |

#### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.0 ± 6 %   | 5.12 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Head TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 7.74 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>76.7 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.20 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>21.8 W/kg ± 19.5 % (k=2)</b> |

#### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.3 ± 6 %   | 5.43 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Body TSL at 5200 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 7.40 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>73.5 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.09 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>20.7 W/kg ± 19.5 % (k=2)</b> |

#### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.42 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.1 ± 6 %   | 5.56 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Body TSL at 5300 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 7.69 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>76.4 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.17 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.5 W/kg ± 19.5 % (k=2)</b> |

#### Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.6         | 5.65 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.7 ± 6 %   | 5.83 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Body TSL at 5500 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 7.93 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>78.8 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.23 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>22.1 W/kg ± 19.5 % (k=2)</b> |

#### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.5 ± 6 %   | 5.97 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

#### SAR result with Body TSL at 5600 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 7.95 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>78.9 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.24 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>22.2 W/kg ± 19.5 % (k=2)</b> |

**Body TSL parameters at 5800 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.2 ± 6 %   | 6.26 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

**SAR result with Body TSL at 5800 MHz**

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                          | 100 mW input power | 7.65 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>76.0 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured                                            | 100 mW input power | 2.14 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.2 W/kg ± 19.5 % (k=2)</b> |

**Appendix (Additional assessments outside the scope of SCS 0108)**

**Antenna Parameters with Head TSL at 5200 MHz**

|                                      |                                 |
|--------------------------------------|---------------------------------|
| Impedance, transformed to feed point | 51.5 $\Omega$ - 10.0 j $\Omega$ |
| Return Loss                          | - 20.0 dB                       |

**Antenna Parameters with Head TSL at 5300 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.1 $\Omega$ - 4.5 j $\Omega$ |
| Return Loss                          | - 26.3 dB                      |

**Antenna Parameters with Head TSL at 5500 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.7 $\Omega$ - 5.6 j $\Omega$ |
| Return Loss                          | - 24.8 dB                      |

**Antenna Parameters with Head TSL at 5600 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.2 $\Omega$ - 3.2 j $\Omega$ |
| Return Loss                          | - 23.7 dB                      |

**Antenna Parameters with Head TSL at 5800 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.7 $\Omega$ - 2.6 j $\Omega$ |
| Return Loss                          | - 25.8 dB                      |

**Antenna Parameters with Body TSL at 5200 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.4 $\Omega$ - 8.9 j $\Omega$ |
| Return Loss                          | - 21.0 dB                      |

**Antenna Parameters with Body TSL at 5300 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.9 $\Omega$ - 3.1 j $\Omega$ |
| Return Loss                          | - 29.9 dB                      |

**Antenna Parameters with Body TSL at 5500 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.5 $\Omega$ - 4.1 j $\Omega$ |
| Return Loss                          | - 26.6 dB                      |

#### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 57.9 $\Omega$ - 1.4 j $\Omega$ |
| Return Loss                          | - 22.6 dB                      |

#### Antenna Parameters with Body TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.5 $\Omega$ - 1.1 j $\Omega$ |
| Return Loss                          | - 24.2 dB                      |

#### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.205 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 08, 2011 |

## DASY5 Validation Report for Head TSL

Date: 23.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1130**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.52$  S/m;  $\epsilon_r = 34.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.61$  S/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.81$  S/m;  $\epsilon_r = 34.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.91$  S/m;  $\epsilon_r = 34.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.12$  S/m;  $\epsilon_r = 34$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.59, 5.59, 5.59); Calibrated: 31.12.2015, ConvF(5.25, 5.25, 5.25); Calibrated: 31.12.2015, ConvF(5.18, 5.18, 5.18); Calibrated: 31.12.2015, ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.95, 4.95, 4.95); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### **Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.75 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.6 W/kg

**SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.21 W/kg**

Maximum value of SAR (measured) = 17.7 W/kg

### **Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.16 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.1 W/kg

**SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.34 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg

### **Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.23 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 31.5 W/kg

**SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.31 W/kg**


Maximum value of SAR (measured) = 18.9 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 72.60 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 31.9 W/kg  
**SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.34 W/kg**  
 Maximum value of SAR (measured) = 19.5 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 69.86 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 31.8 W/kg  
**SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.2 W/kg**  
 Maximum value of SAR (measured) = 19.5 W/kg

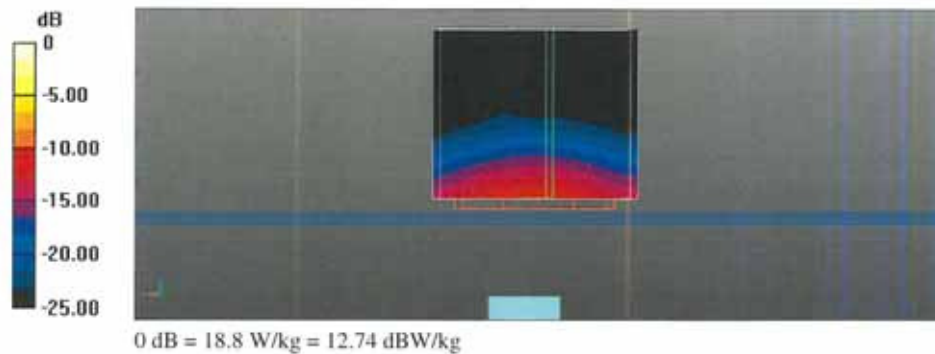

## Impedance Measurement Plot for Head TSL

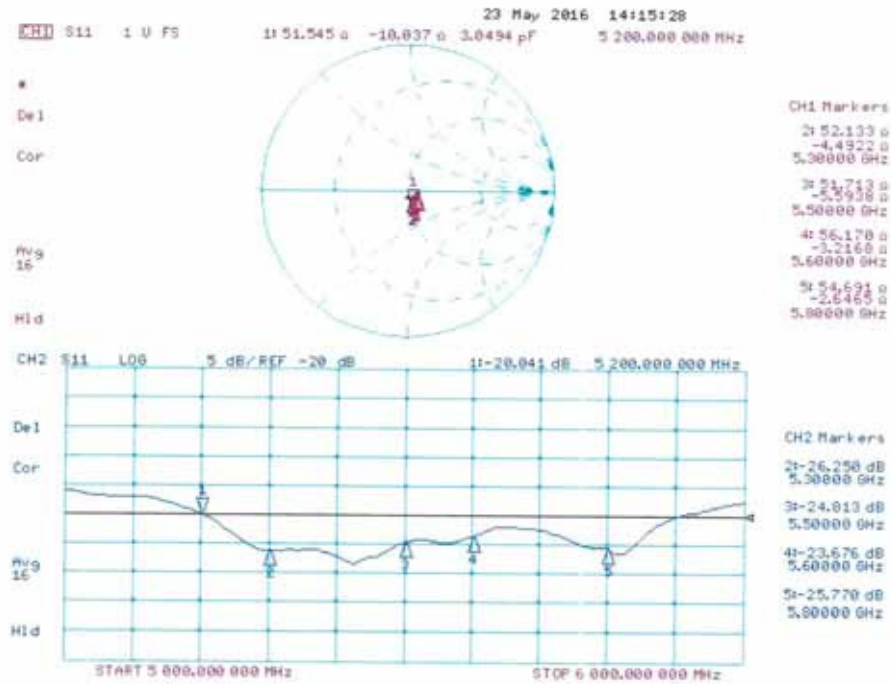

## DASY5 Validation Report for Body TSL

Date: 20.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1130**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.43$  S/m;  $\epsilon_r = 47.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.56$  S/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.83$  S/m;  $\epsilon_r = 46.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.97$  S/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.26$  S/m;  $\epsilon_r = 46.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.75, 4.75, 4.75); Calibrated: 31.12.2015, ConvF(4.4, 4.4, 4.4); Calibrated: 31.12.2015, ConvF(4.35, 4.35, 4.35); Calibrated: 31.12.2015, ConvF(4.27, 4.27, 4.27); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.11 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.3 W/kg

**SAR(1 g) = 7.4 W/kg; SAR(10 g) = 2.09 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.08 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 29.1 W/kg

**SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 17.6 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.44 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 31.9 W/kg

**SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.23 W/kg**


Maximum value of SAR (measured) = 18.6 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 67.01 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 32.6 W/kg  
**SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.24 W/kg**  
 Maximum value of SAR (measured) = 18.7 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 64.61 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 33.2 W/kg  
**SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.14 W/kg**  
 Maximum value of SAR (measured) = 18.3 W/kg

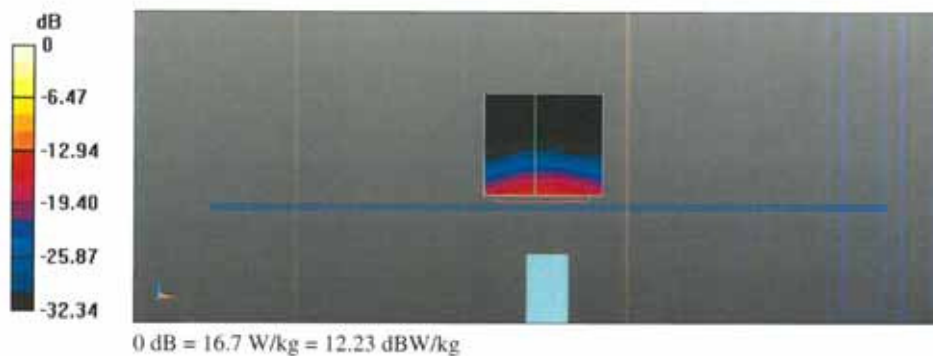

### Impedance Measurement Plot for Body TSL

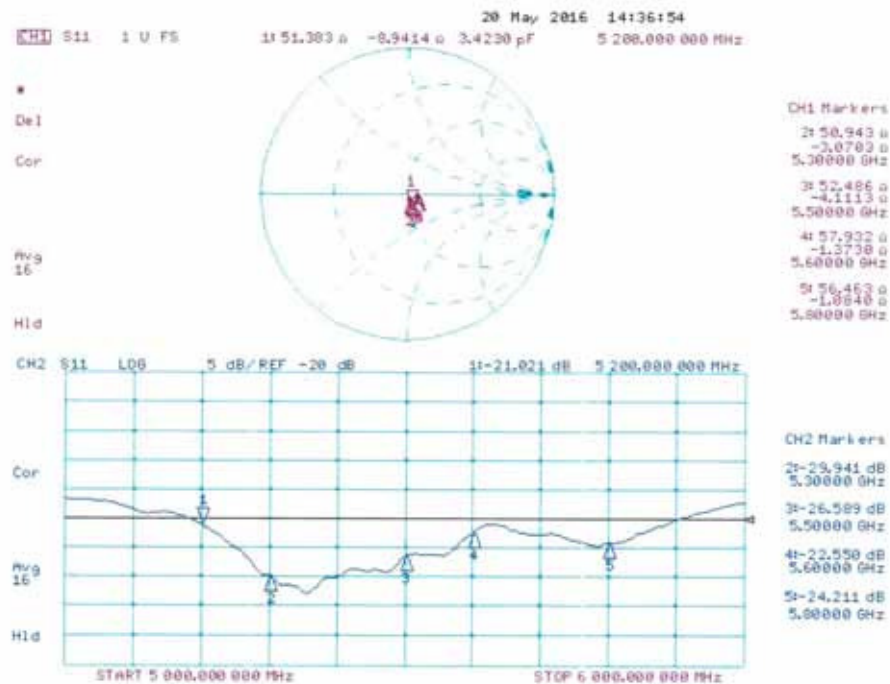

**-THE END-**