



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 90

TEST REPORT

For

#ABELL INDUSTRIES CO., LTD.

2/F, Bldg. 14, ZhongXing Industrial City, NanShan Dist, ShenZhen, P.R. China

#FCC ID: TEYR-80

Report Type: Original Report	# Product Type: Digital repeater
Report Number: RDG190920003-00A	
Report Date: 2019-10-12	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
APPLICABLE STANDARD	8
FCC §2.1046 & §90.205 - RF OUTPUT POWER.....	9
APPLICABLE STANDARD	9
TEST PROCEDURE	9
TEST DATA	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
APPLICABLE STANDARD	10
TEST PROCEDURE	10
TEST DATA	10
FCC §2.1049 & §90.209 & §90.210 – OCCUPIED BANDWIDTH&EMISSION MASK	14
APPLICABLE STANDARD	14
TEST PROCEDURE	14
TEST DATA	14
FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA	20
FCC §2.1053; §90.210 - RADIATED SPURIOUS EMISSIONS	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	23
FCC §2.1055 & §90.213 - FREQUENCY STABILITY.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26
FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	29

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

#EUT Name:	Digital repeater
#EUT Model:	R-80
Operation Frequency:	400-470 MHz
Output Power(Conducted):	High Power Level: 50W Low Power Level: 5W
Modulation Type:	FM/4FSK
Channel Spacing:	12.5kHz
Rated Input Voltage:	110-240V AC
External Dimension:	482cm(L)*440cm(W)*89cm(H)
Serial Number:	190920003
EUT Received Date:	2019-09-24
EUT Status:	The test samples were in good condition.

Objective

This test report is prepared on behalf of **ABELL INDUSTRIES CO., LTD.** in accordance with Part 2, and Part 90 of the Federal Communication Commission rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.


Equipment Modifications

No modification was made to the EUT tested.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Load	/	/

Block Diagram of Test Setup

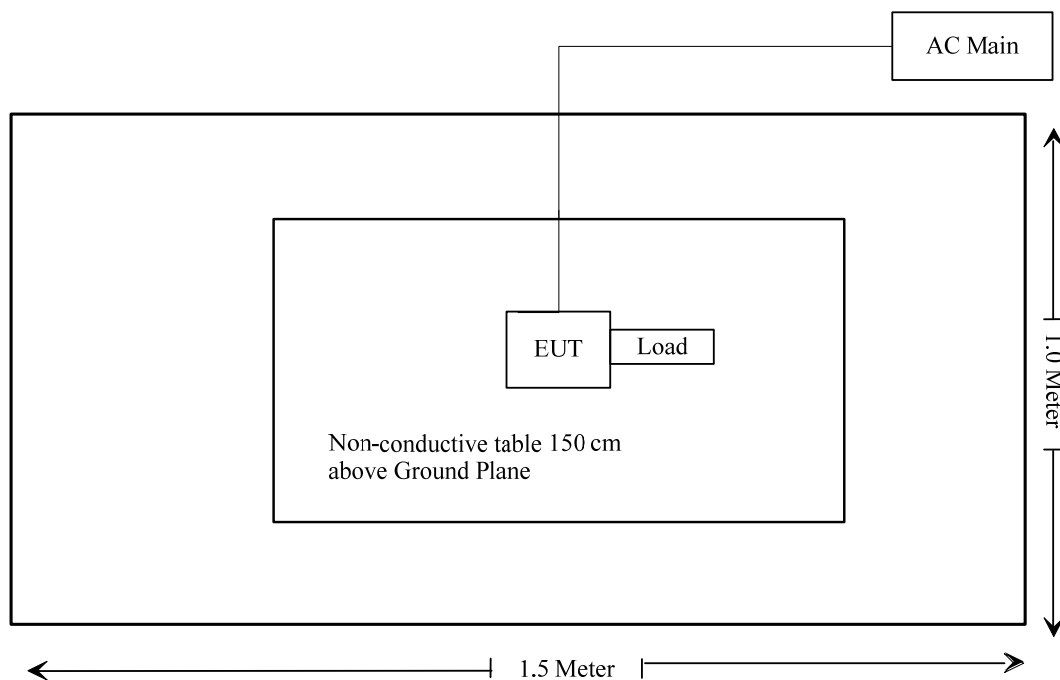

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1310&§2.1091	Maximum Permissible Exposure (MPE)	Compliance
§2.1046; §90.205	RF Output Power	Compliance
§2.1047;§90.207	Modulation Characteristic	Compliance
§2.1049;§90.209; §90.210	Occupied Bandwidth	Compliance
§2.1051; §90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §90.210	Spurious Radiated Emissions	Compliance
§2.1055;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2019-09-05	2020-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2019-08-03	2020-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/05	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201048	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA40-200SN-6	OE01201046	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05201	2019-05-09	2020-05-09
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019-03-26	2020-03-26
UNI-T	Multimeter	UT39A	M130199938	2019-07-23	2020-07-23
LEADER	Millivoltmeter	LMV-181A	601788	2019-08-11	2020-08-10

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Maximum Permissible Exposure (MPE)

Limits for Occupational/Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E , H or S (minutes)
0.3- 3.0	614	1.63	(100)*	6
3.0 - 30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

f = frequency in MHz;

* = Plane-wave equivalent power density;

MPE Calculation

Prediction of power density at the distance of the applicable MPE limit

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

MPE Results

Frequency (MHz)	Antenna Gain		Maximum Average output power including Tune-up Tolerance (mW)	Operation Duty Cycle (%)	Evaluation Distance (cm)	Power Density (mW/cm ²)	Power Density Limit (mW/cm ²)
	(dBi)	(numeric)					
400-470	0	1.0	50000	50	70	0.41	1.33

Note: the maximum power including Tune-up Tolerance is 50 W.

Result: The device meet FCC MPE at 70 cm distance

FCC §2.1046 & §90.205 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

RBW	VBW
100 kHz	300 kHz

Test Data

Environmental Conditions

Temperature:	27.3°C
Relative Humidity:	51%
ATM Pressure:	100.9 kPa
Tester:	Blake Yang
Test Date:	2019-09-30

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

Modulation Mode	Channel Separation	f _c	Reading (W)	
		MHz	High Power Level	Low Power Level
FM	12.5kHz	400.1125	49.12	5.43
		453.2125	46.87	5.38
		469.9875	48.96	5.71
4FSK	12.5kHz	400.1125	49.55	5.50
		453.2125	46.67	5.19
		469.9875	49.55	5.53

Note: The rated high power level is 50W, rated low power level is 5W.

FCC §2.1047 - MODULATION CHARACTERISTIC**Applicable Standard**

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Data**Environmental Conditions**

Temperature:	27.3°C
Relative Humidity:	51%
ATM Pressure:	100.9 kPa
Tester:	Blake Yang
Test Date:	2019-09-30


*Test Mode: Transmitting***Result:** Compliance.

12.5 kHz:

Audio Frequency Response – High Power

Carrier Frequency: 453.2125 MHz


Modulation Frequency (Hz)	Response data (dB)
300	-11.65
400	-8.61
500	-6.48
600	-4.53
700	-3.61
800	-1.59
900	-1.39
1000	0.00
1200	1.61
1400	2.61
1600	4.27
1800	5.25
2000	5.62
2200	6.19
2400	7.23
2600	7.38
2800	8.72
3000	8.65

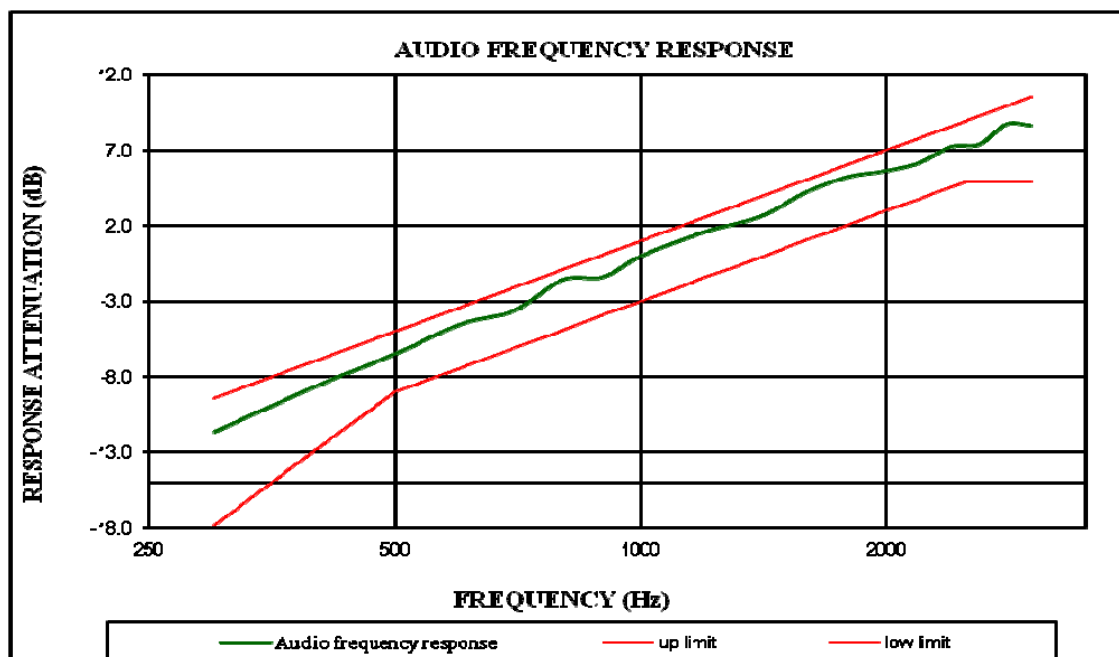

MODULATION LIMITING – High Power

Carrier Frequency: 453.2125 MHz


Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.727	0.382	1.683	0.260	2.5
400	2.074	0.364	1.847	0.286	2.5
500	2.121	0.455	1.929	0.311	2.5
600	2.296	0.495	2.128	0.356	2.5
700	2.415	0.459	2.316	0.407	2.5
800	2.327	0.486	2.281	0.414	2.5
900	2.423	0.518	2.156	0.436	2.5
1000	2.281	0.598	2.145	0.507	2.5
1200	2.204	0.595	2.037	0.426	2.5
1400	2.171	0.558	1.898	0.510	2.5
1600	2.021	0.637	1.935	0.445	2.5
1800	1.959	0.548	1.891	0.468	2.5
2000	1.928	0.616	1.786	0.461	2.5
2200	1.724	0.600	1.627	0.488	2.5
2400	1.620	0.507	1.534	0.432	2.5
2600	1.676	0.547	1.612	0.449	2.5
2800	1.604	0.654	1.328	0.489	2.5
3000	1.227	0.588	1.023	0.515	2.5

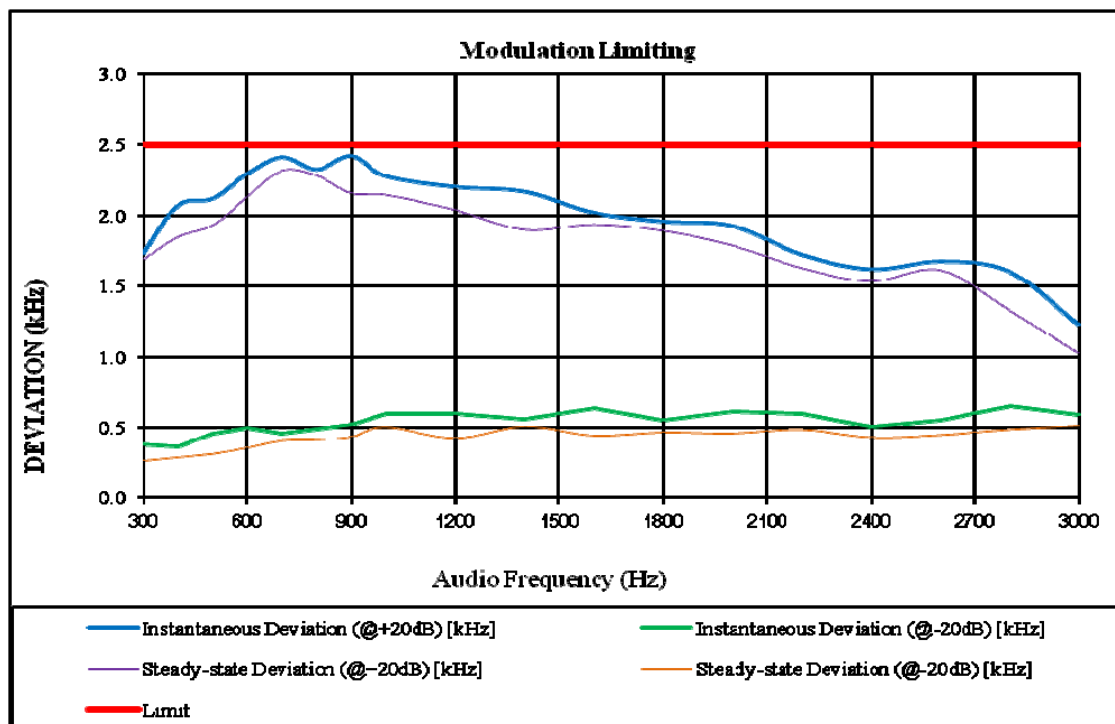

Audio Frequency Low Pass Filter Response – High Power

Carrier Frequency: 453.2125 MHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
3.0	-4.5	0.0
3.5	-10.6	-6.7
4.0	-15.8	-12.5
5.0	-26.4	-22.2
7.0	-40.4	-36.8
10.0	-55.8	-52.3
15.0	-72.4	-69.9
20.0	-85.6	-82.5
30.0	-84.7	-82.5
50.0	-85.3	-82.5
70.0	-84.9	-82.5

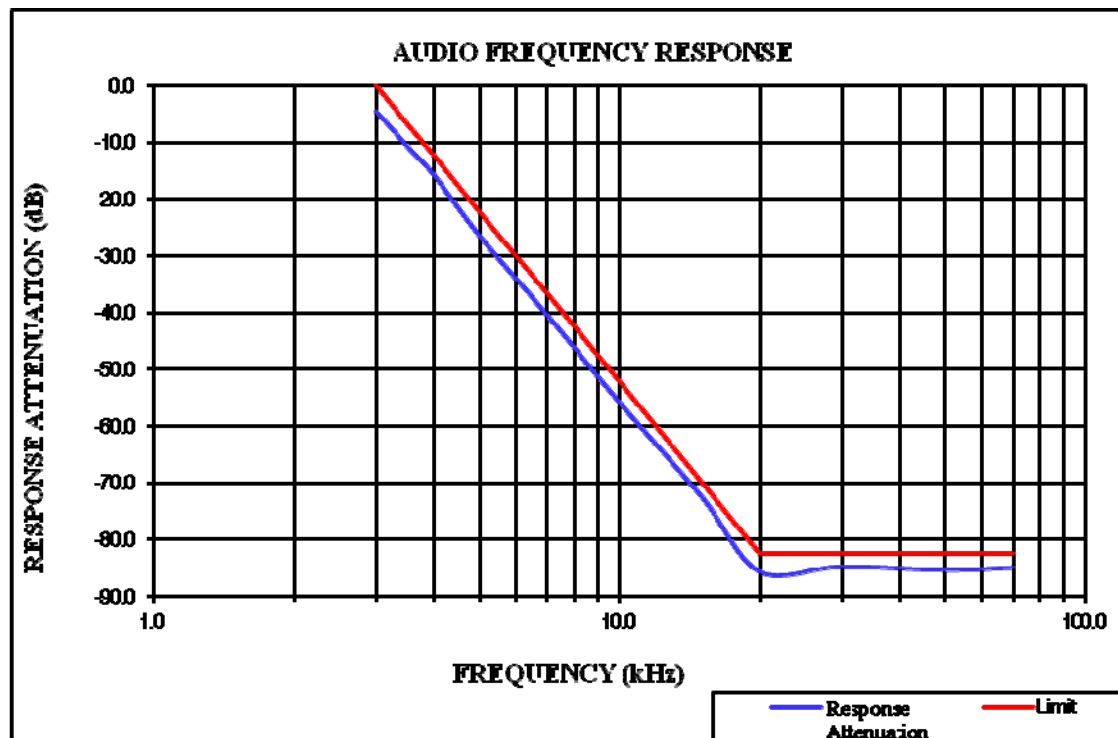

**FCC §2.1049 & §90.209 & §90.210 – OCCUPIED
BANDWIDTH&EMISSION MASK**

Applicable Standard

FCC §2.1049, §90.209 and §90.210

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.

Test Data**Environmental Conditions**

Temperature:	27.3~27.9°C
Relative Humidity:	51~58%
ATM Pressure:	100.8~100.9 kPa
Tester:	Blake Yang
Test Date:	2019-09-29~2019-09-30

Test Mode: Transmitting

Result: Compliance.

Modulation Mode	Channel Separation	f_c	99% Occupied Bandwidth	26 dB Bandwidth	Power Level
		MHz	kHz	kHz	
FM	12.5kHz	453.2125	5.812	6.413	High
			5.812	6.413	Low
4FSK	12.5kHz		8.016	10.020	High
			7.715	10.220	Low

Note: Emission bandwidth was based on calculation method instead of measurement.

$$BW = 2M + 2D$$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

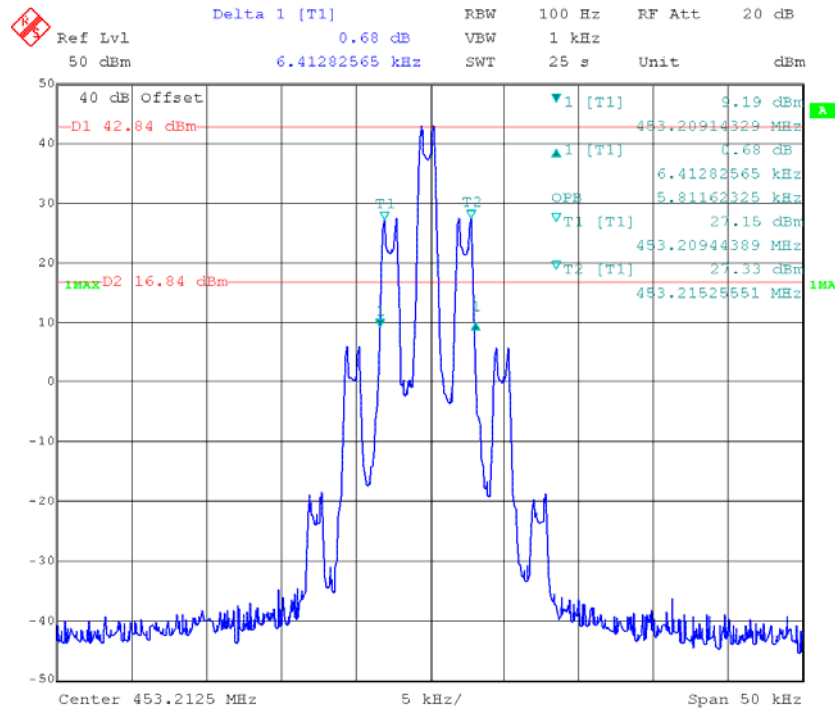
For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1E


The 99% energy rule was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz.

F1D and F1E portion of the designator indicates digital information.



Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.



Part 90:**FM, 12.5 kHz, High Power - Frequency 453.2125 MHz:****99% Occupied & 26 dB Bandwidth**


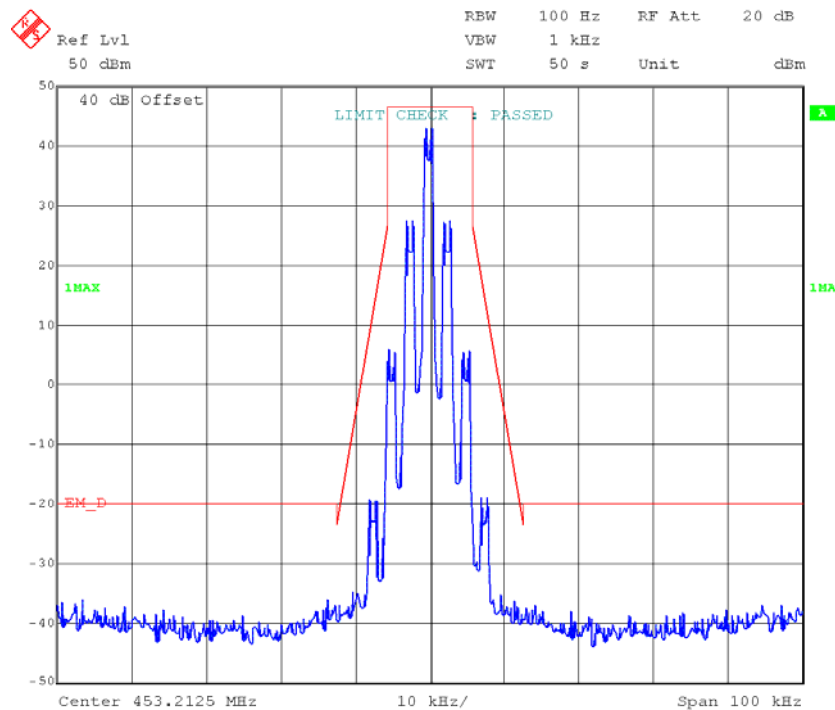
Date: 30.SEP.2019 20:48:56

Emission Mask D

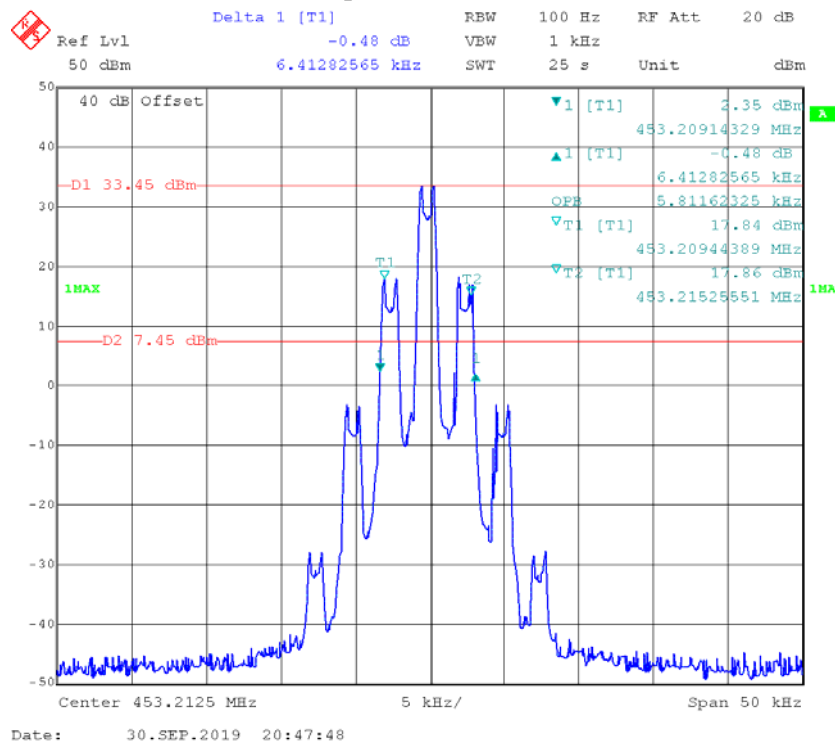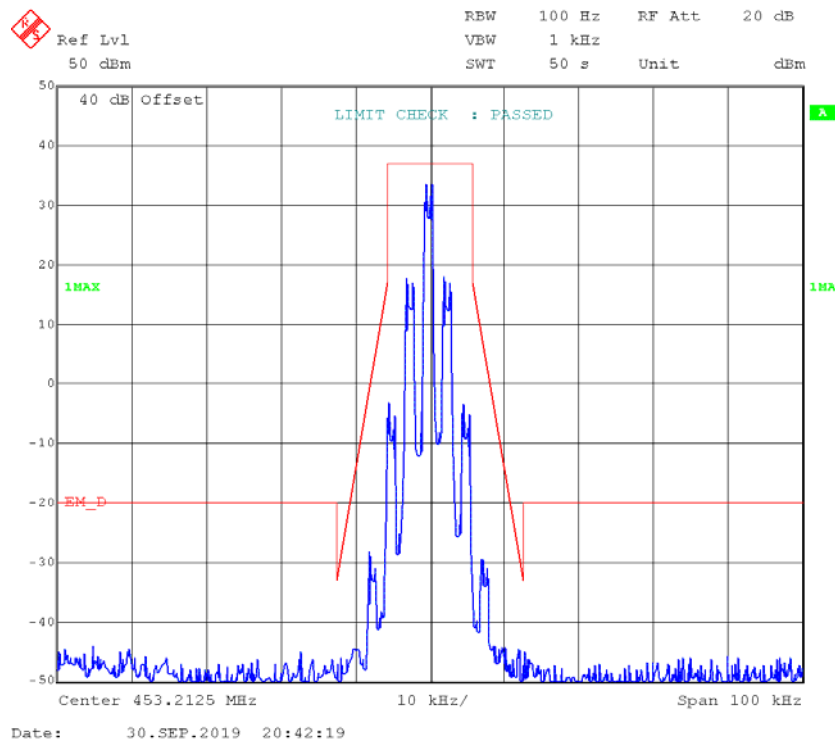Date: 30.SEP.2019 20:39:11

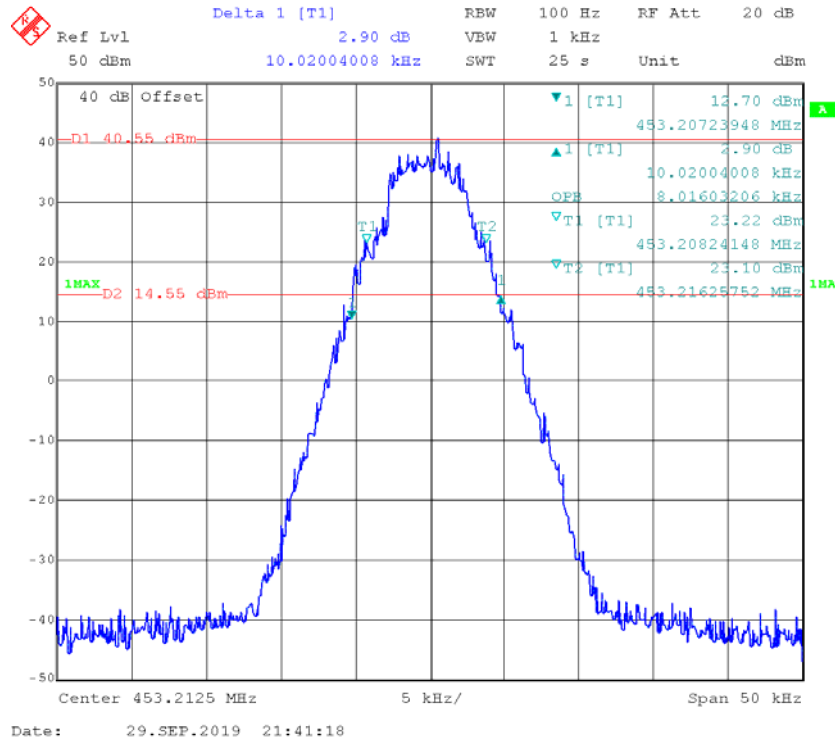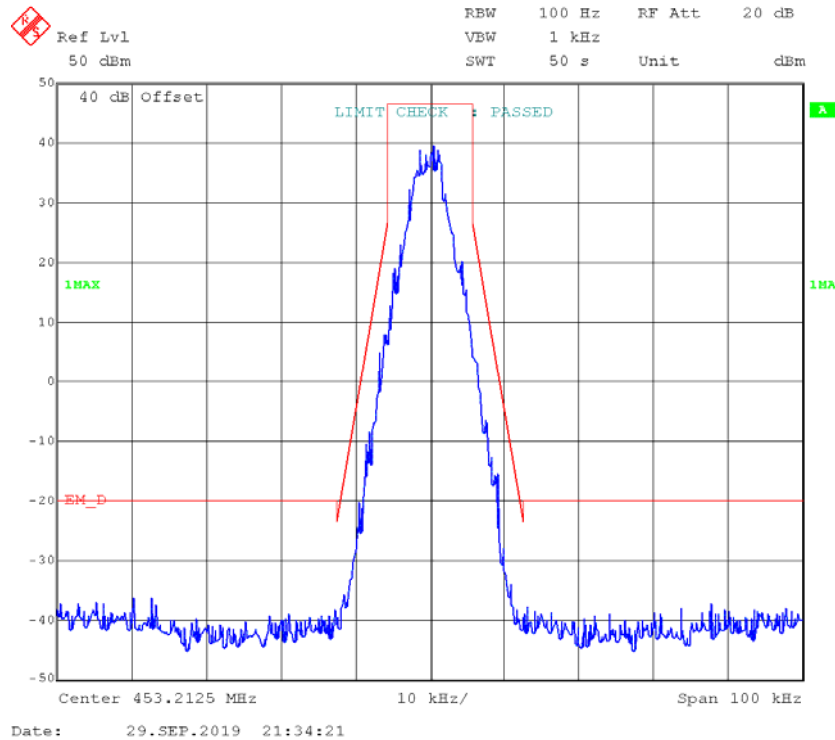FM,12.5kHz, Low Power - Frequency 453.2125 MHz:**99% Occupied & 26 dB Bandwidth****Emission Mask D**

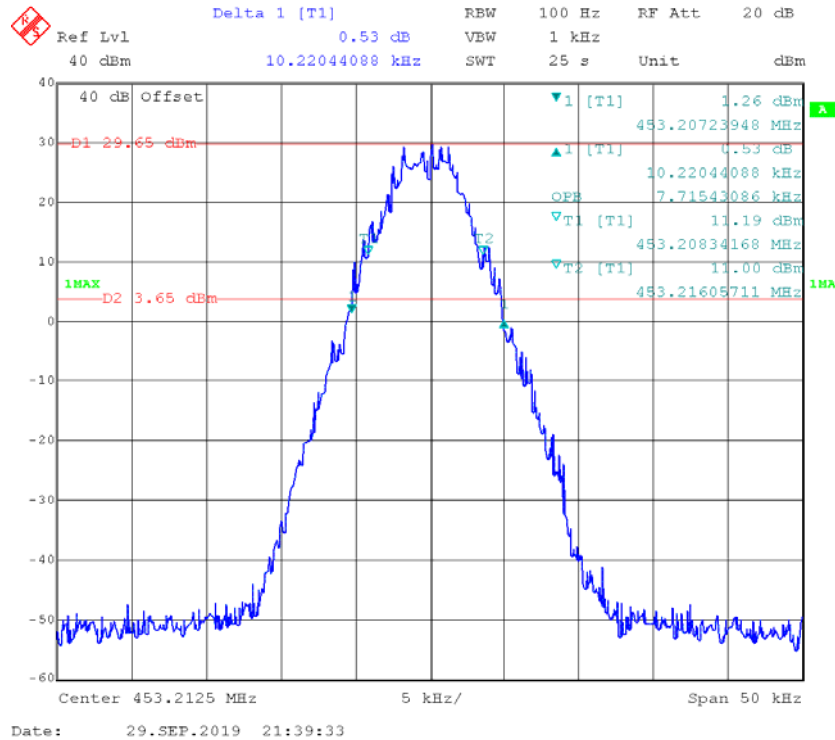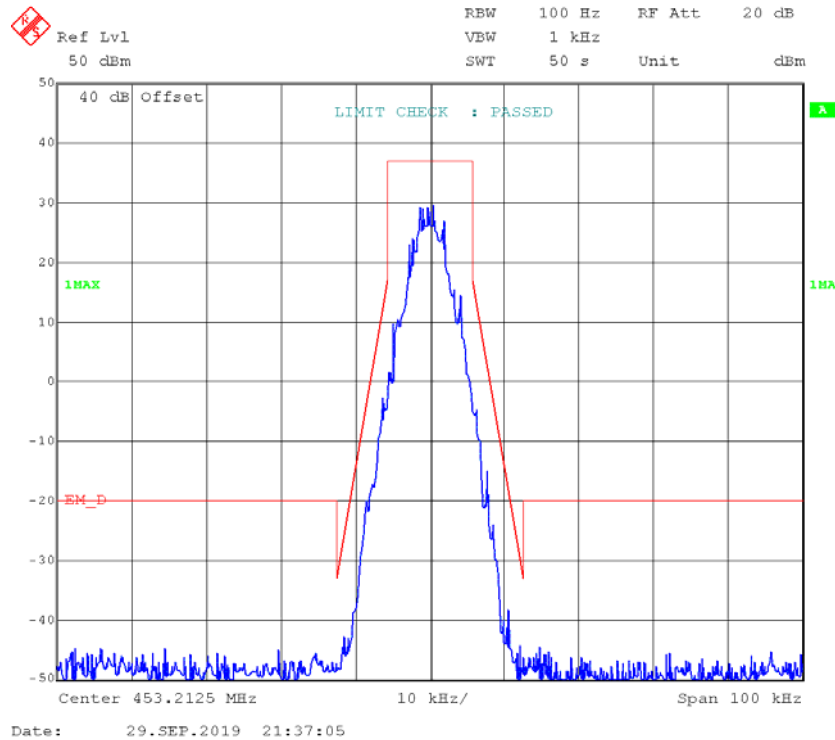4FSK,12.5kHz, High Power - Frequency 453.2125 MHz:**99% Occupied & 26 dB Bandwidth****Emission Mask D**

4FSK,12.5kHz, Low Power - Frequency 453.2125 MHz:**99% Occupied & 26 dB Bandwidth****Emission Mask D**

**FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA
TERMINALS**

Applicable Standard

FCC §2.1051, and §90.210

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.



Test Data**Environmental Conditions**



Temperature:	27.3°C
Relative Humidity:	51%
ATM Pressure:	100.9 kPa
Tester:	Blake Yang
Test Date:	2019-09-30

Test Mode: Transmitting

Part 90

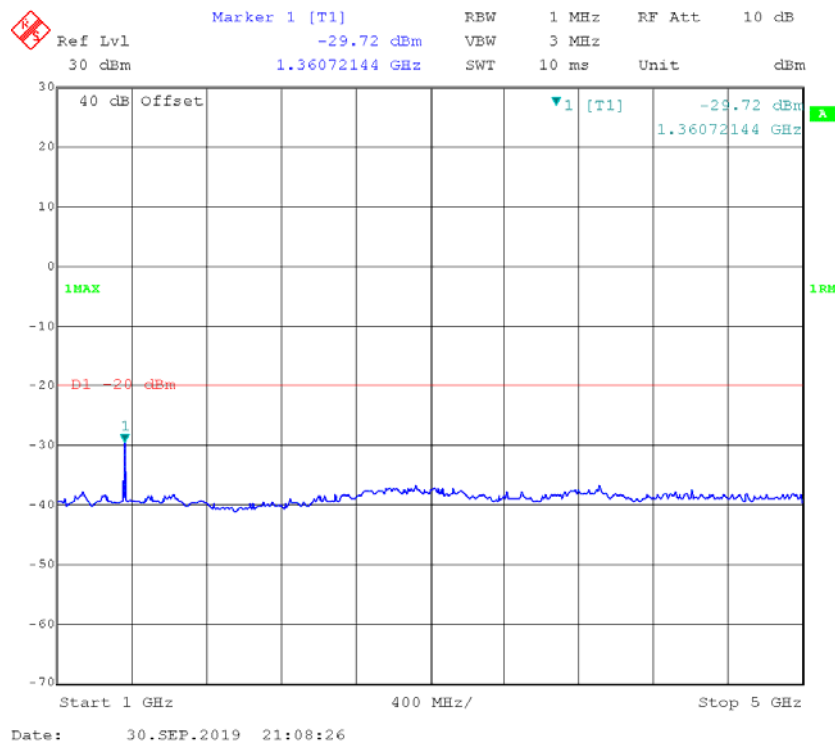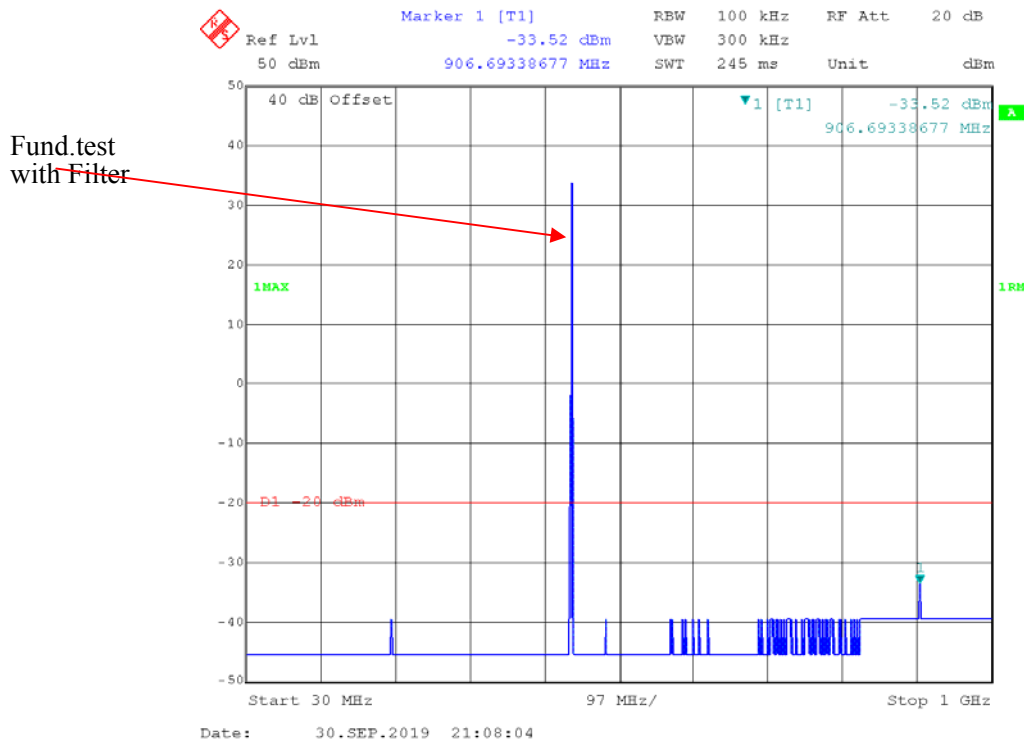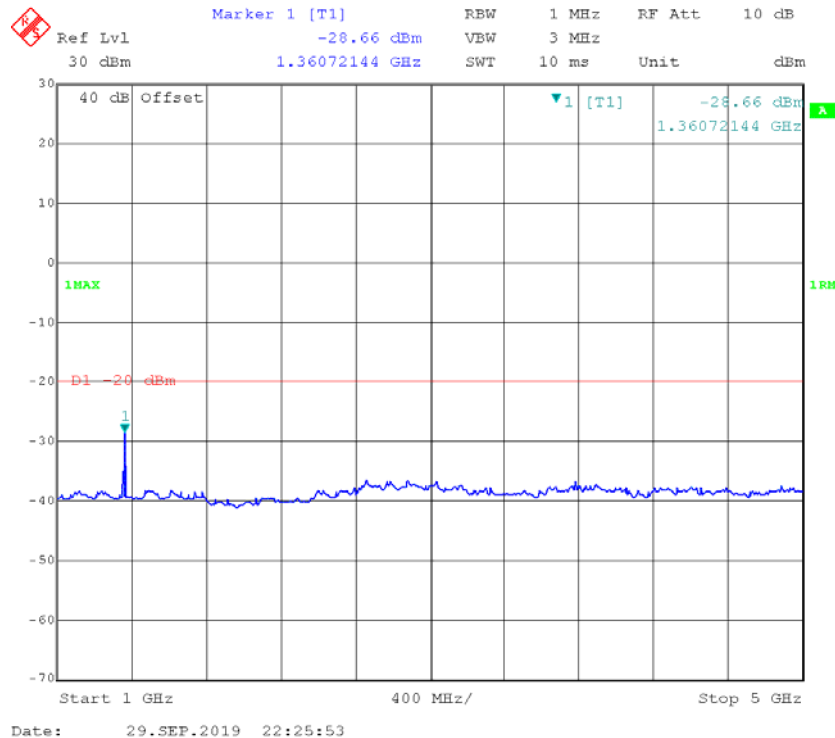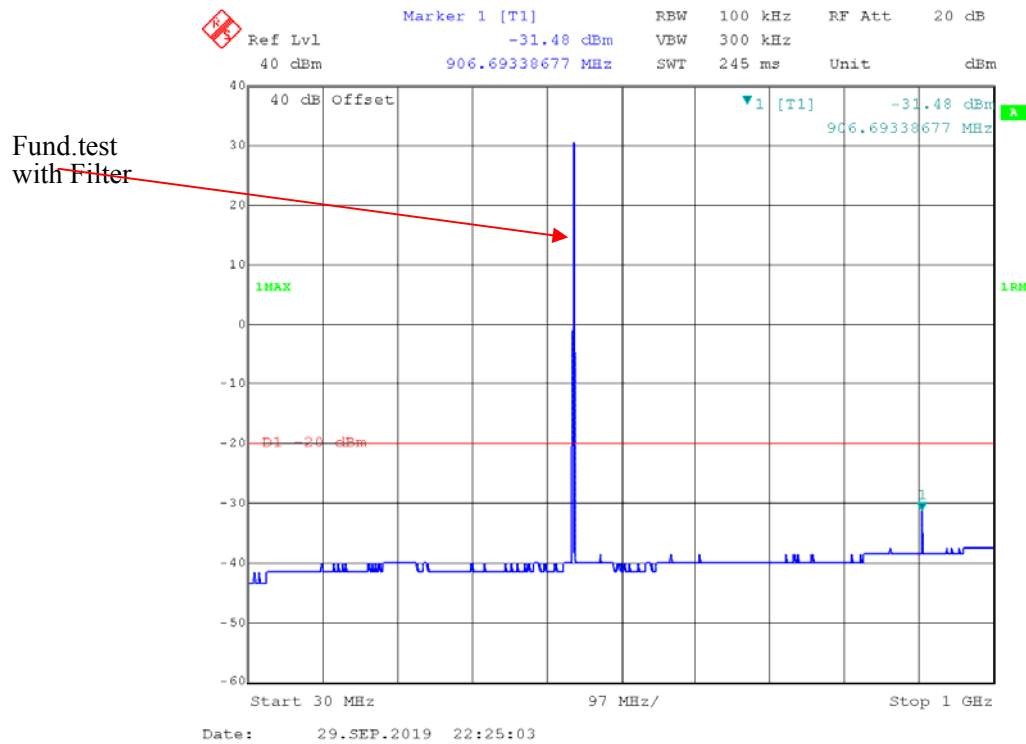453.2125 MHz, 12.5 kHz, FM, High power



453.2125 MHz, 12.5kHz, 4FSK, High power

FCC §2.1053; §90.210 - RADIATED SPURIOUS EMISSIONS**Applicable Standard**

FCC §2.1053, §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Test Data**Environmental Conditions**

Test Item:	Radiated Spurious Emissions Below 1GHz	Radiated Spurious Emissions Above 1GHz
Temperature:	27.1 °C	27 °C
Relative Humidity:	41 %	45 %
ATM Pressure:	100.9 kPa	100.9 kPa
Tester:	Tyler Pan	Tyler Pan
Test Date:	2019-09-30	2019-09-30

Test Mode: Transmitting

30MHz - 5GHz:**Part 90:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM,Frequency: 453.2125MHz-12.5 kHz, High Power								
906.43	H	34.59	-62.28	0.00	1.03	-63.31	-20.00	43.31
906.43	V	38.99	-59.85	0.00	1.03	-60.88	-20.00	40.88
1359.64	H	52.64	-60.72	8.72	1.20	-53.20	-20.00	33.20
1359.64	V	53.74	-60.34	8.72	1.20	-52.82	-20.00	32.82
1812.85	H	50.11	-64.07	11.19	0.72	-53.60	-20.00	33.60
1812.85	V	49.72	-65.02	11.19	0.72	-54.55	-20.00	34.55
2266.06	H	49.86	-62.41	11.06	1.20	-52.55	-20.00	32.55
2266.06	V	48.16	-64.01	11.06	1.20	-54.15	-20.00	34.15
2719.28	H	47.03	-65.25	13.10	1.27	-53.42	-20.00	33.42
2719.28	V	46.87	-65.53	13.10	1.27	-53.70	-20.00	33.70
3172.49	H	48.56	-61.53	13.49	1.64	-49.68	-20.00	29.68
3172.49	V	47.77	-62.37	13.49	1.64	-50.52	-20.00	30.52
3625.70	H	47.22	-62.70	14.07	1.58	-50.21	-20.00	30.21
3625.70	V	49.22	-60.69	14.07	1.58	-48.20	-20.00	28.20
4078.91	H	46.88	-62.11	13.76	1.36	-49.71	-20.00	29.71
4078.91	V	47.34	-61.77	13.76	1.36	-49.37	-20.00	29.37
4532.13	H	47.13	-61.52	14.13	1.64	-49.03	-20.00	29.03
4532.13	V	46.79	-61.79	14.13	1.64	-49.30	-20.00	29.30
4985.34	H	50.44	-57.32	13.99	1.44	-44.77	-20.00	24.77
4985.34	V	48.97	-58.43	13.99	1.44	-45.88	-20.00	25.88

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 453.2125MHz-12.5 kHz, High Power								
906.43	H	36.88	-59.99	0.00	1.03	-61.02	-20.00	41.02
906.43	V	37.96	-60.88	0.00	1.03	-61.91	-20.00	41.91
1359.64	H	55.88	-57.48	8.72	1.20	-49.96	-20.00	29.96
1359.64	V	53.26	-60.82	8.72	1.20	-53.30	-20.00	33.30
1812.85	H	49.73	-64.45	11.19	0.72	-53.98	-20.00	33.98
1812.85	V	49.44	-65.30	11.19	0.72	-54.83	-20.00	34.83
2266.06	H	50.07	-62.20	11.06	1.20	-52.34	-20.00	32.34
2266.06	V	49.73	-62.44	11.06	1.20	-52.58	-20.00	32.58
2719.28	H	47.06	-65.22	13.10	1.27	-53.39	-20.00	33.39
2719.28	V	47.34	-65.06	13.10	1.27	-53.23	-20.00	33.23
3172.49	H	51.87	-58.22	13.49	1.64	-46.37	-20.00	26.37
3172.49	V	47.54	-62.60	13.49	1.64	-50.75	-20.00	30.75
3625.70	H	49.91	-60.01	14.07	1.58	-47.52	-20.00	27.52
3625.70	V	51.23	-58.68	14.07	1.58	-46.19	-20.00	26.19
4078.91	H	46.38	-62.61	13.76	1.36	-50.21	-20.00	30.21
4078.91	V	47.32	-61.79	13.76	1.36	-49.39	-20.00	29.39
4532.13	H	46.69	-61.96	14.13	1.64	-49.47	-20.00	29.47
4532.13	V	46.50	-62.08	14.13	1.64	-49.59	-20.00	29.59
4985.34	H	50.32	-57.44	13.99	1.44	-44.89	-20.00	24.89
4985.34	V	50.16	-57.24	13.99	1.44	-44.69	-20.00	24.69

Note:

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & §90.213 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

Test Data**Environmental Conditions**

Temperature:	27.3°C
Relative Humidity:	51%
ATM Pressure:	100.9 kPa
Tester:	Blake Yang
Test Date:	2019-09-30

Test Mode: Transmitting(the worst is high power level)

FCC Part 90:

FM,12.5kHz, Reference Frequency: 453.2125 MHz, Limit: ± 1.5 ppm			
Temperature (°C)	Voltage Supplied (V_{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	120	453.212543	0.29
-20	120	453.212496	0.12
-10	120	453.212655	0.16
0	120	453.212507	0.08
10	120	453.212599	0.24
20	120	453.212575	0.11
30	120	453.212608	-0.05
40	120	453.212515	0.12
50	120	453.212533	0.19
20	138	453.212658	0.18
20	102	453.212601	0.18

4FSK, 12.5kHz, Reference Frequency: 453.21255 MHz, Limit: ± 1.5 ppm			
Temperature (°C)	Voltage Supplied (V_{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	120	453.212513	0.06
-20	120	453.212671	0.04
-10	120	453.212564	-0.01
0	120	453.212527	0.33
10	120	453.212585	0.17
20	120	453.212599	-0.08
30	120	453.212572	0.00
40	120	453.212647	0.12
50	120	453.212512	-0.06
20	138	453.212567	-0.09
20	102	453.212545	0.12

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

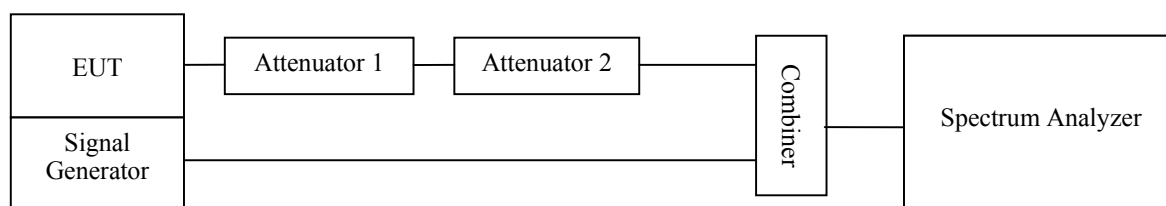
Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Procedure

- Connect the EUT and test equipment as shown on the following block diagram.
- Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.
- Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- Turn off the transmitter.
- Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .



Test Data**Environmental Conditions**


Temperature:	27.3℃
Relative Humidity:	51%
ATM Pressure:	100.9 kPa
Tester:	Blake Yang
Test Date:	2019-09-30

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	<10(t ₁)	±12.5 kHz	Pass
	<25(t ₂)	±6.25 kHz	
	<10(t ₃)	±12.5 kHz	


Please refer to the following plots.

High Power

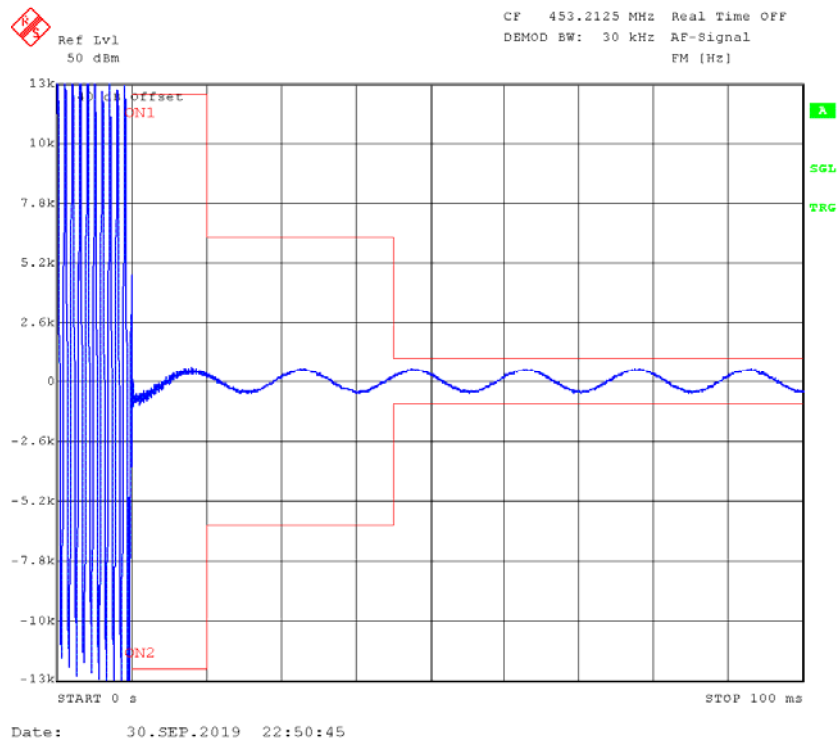Turn on



Turn off

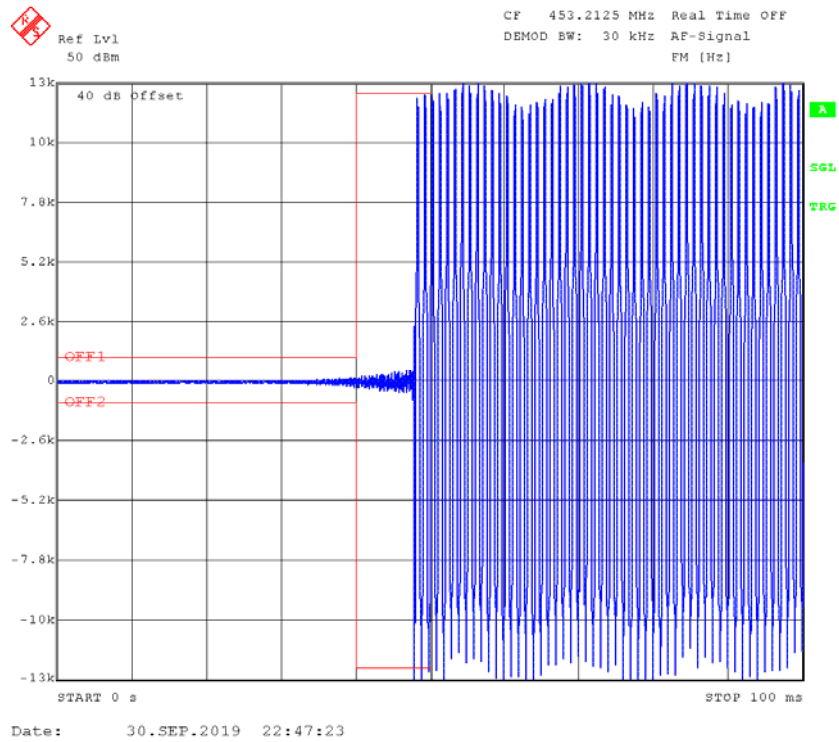

Directions

1. The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This [report](#) cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
7. This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★” .
8. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

******* END OF REPORT *******