

# TEST REPORT

**Product Name** : Hanshow Smart Cart  
**Model Number** : CT10-W0C3  
**FCC ID** : 2AYMH-CT10-W0C3

**Prepared for** : HANSHOW TECHNOLOGY CO., LTD.  
**Address** : The 1st Floor Podium and Floor 4 of Building 1, Floor 7 of Building 5, Jiaxing Photovoltaic Technology Innovation Park, No.1288, Kanghe Road, Xiuzhou District, Jiaxing City, Zhejiang Prov,P.R.China

**Prepared by** : EMTEK (SHENZHEN) CO., LTD.  
**Address** : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

**Report Number** : ENS2410310454W00401R  
**Date(s) of Tests** : November 14, 2024 to December 19, 2024  
**Date of Issue** : December 21, 2024

## TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION .....	4
2 EUT TECHNICAL DESCRIPTION .....	5
3 SUMMARY OF TEST RESULT .....	6
4 TEST METHODOLOGY .....	7
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
4.2 MEASUREMENT EQUIPMENT USED.....	7
4.3 DESCRIPTION OF TEST MODES .....	8
5 FACILITIES AND ACCREDITATIONS.....	9
5.1 FACILITIES.....	9
5.2 EQUIPMENT .....	9
6 TEST SYSTEM UNCERTAINTY .....	10
7 SETUP OF EQUIPMENT UNDER TEST .....	11
7.1 RADIO FREQUENCY TEST SETUP 1 .....	11
7.2 RADIO FREQUENCY TEST SETUP 2 .....	11
7.3 CONDUCTED EMISSION TEST SETUP .....	13
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM .....	14
7.5 SUPPORT EQUIPMENT .....	14
8 FREQUENCY HOPPING SYSTEM REQUIREMENTS .....	15
8.1 STANDARD APPLICABLE.....	15
8.2 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	15
8.3 EQUAL HOPPING FREQUENCY USE .....	16
8.4 FREQUENCY HOPPING SYSTEM .....	16
9 TEST REQUIREMENTS .....	17
9.1 20DB BANDWIDTH .....	17
9.2 CARRIER FREQUENCY SEPARATION.....	23
9.3 NUMBER OF HOPPING FREQUENCIES.....	26
9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME) .....	29
9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER .....	39
9.6 CONDUCTED SUPRIOUS EMISSION.....	45
9.7 RADIATED SPURIOUS EMISSION.....	68
9.8 CONDUCTED EMISSION TEST .....	82
9.9 ANTENNA APPLICATION.....	85

## Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2410310454W00401R	/	Original Report



## 1 TEST RESULT CERTIFICATION

Applicant : HANSHOW TECHNOLOGY CO., LTD.

Address : The 1st Floor Podium and Floor 4 of Building 1, Floor 7 of Building 5, Jiaying  
Photovoltaic Technology Innovation Park, No.1288, Kanghe Road, Xiuzhou  
District, Jiaying City, Zhejiang Prov,P.R.China

Manufacturer : HANSHOW TECHNOLOGY CO., LTD.

Address : The 1st Floor Podium and Floor 4 of Building 1, Floor 7 of Building 5, Jiaying  
Photovoltaic Technology Innovation Park, No.1288, Kanghe Road, Xiuzhou  
District, Jiaying City, Zhejiang Prov,P.R.China

EUT : Hanshow Smart Cart

Model Name : CT10-W0C3

Trademark : N/A


### Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the above table standards requirement.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : November 14, 2024 to December 19, 2024

Prepared by :   
Una Yu/Editor

Reviewer :   
Joe Xia/Supervisor

Approved & Authorized Signer :   
Lisa Wang/Manager

## 2 EUT TECHNICAL DESCRIPTION

<b>Product Name:</b>	Hanshow Smart Cart
<b>Model Number:</b>	CT10-W0C3
<b>Bluetooth Version:</b>	V5.2
<b>Data Rate:</b>	1Mbps for GFSK modulation 2Mbps for pi/4-DQPSK modulation 3Mbps for 8DPSK modulation
<b>Modulation:</b>	GFSK, pi/4-DQPSK, 8DPSK
<b>Operating Frequency Range(s):</b>	2402-2480MHz
<b>Number of Channels:</b>	79 channels
<b>Antenna Type:</b>	Integrated Antenna
<b>Antenna Gain:</b>	1 dBi (Note: The antenna information is provided by the customers, which will have a certain impact on the test results.)
<b>Power Supply:</b>	DC 24V, 5A
<b>Temperature Range:</b>	0°C ~ 45°C

**Note:** for more details, please refer to the user's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	20dB Bandwidth	PASS	
15.247(a)(1)	Carrier Frequency Separation	PASS	
15.247(a)(1)	Number of Hopping Frequencies	PASS	
15.247(a)(1)	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	Maximum Peak Conducted Output Power	PASS	
15.247(c)	Conducted Spurious Emissions	PASS	
15.247(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
15.203	Antenna Application	PASS	
15.247 (a) (1)/g/h	Frequency Hopping System	PASS	
NOTE: The results of this report do not take into account the uncertainty.			

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is filing to comply with the above table standards requirement.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:  
 FCC 47 CFR Part 2, Subpart J  
 FCC 47 CFR Part 15, Subpart C  
 FCC KDB 558074 D01 15.247 Meas Guidance v05r02

### 4.2 MEASUREMENT EQUIPMENT USED

#### For Conducted Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2024/5/11	1Year
AMN	Rohde & Schwarz	ENV216	101161	2024/5/10	1Year

#### For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	Bonn	BLMA 011001N	2213967A	2024/10/18	1Year
EMI Test Receiver	Rohde & Schwarz	ESR7	102551	2024/10/18	1Year
Bilog Antenna	Schwarzbeck	VULB9163	9163142	2024/7/8	2Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1198	2023/6/2	2Year
Pre-Amplifier	Bonn	BLMA 0118-5G	2213967B-01	2024/10/18	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101290	2024/10/18	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2023/5/12	2Year
Pre-Amplifier	Lunar EM	LNA18G26-40	J1012131010001	2024/5/11	1Year
Pre-Amplifier	Lunar EM	LNA26G40-40	J1013131028001	2024/5/11	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2023/5/12	2Year
Wideband Radio Communication Tester	R&S	CMW500	147366	2024/5/10	1Year

#### For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	2024/9/18	1Year
Frequency Extender	R&S	CMW-Z800A	100430	2024/9/18	1Year
Spectrum Analyzer	R&S	FSV3044	101290	2024/10/18	1Year
Analog Signal Generator	R&S	SMB100A	183237	2024/9/18	1Year
Vector Signal Generator	R&S	SMM100A	101808	2024/9/18	1Year
RF Control Unit(Power Meter)	Tonscend	JS0806-2	22C8060567	2024/9/18	1Year
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2024/5/10	1 Year
DC Power Supply	KEYSIGHT	E3642A	MY53030016	2024/9/18	1 Year

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for BT GFSK modulation; 2Mbps for BT pi/4-DQPSK modulation; 3Mbps for BT 8DPSK modulation ) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	...	...
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
...	...	...	...	78	2480
Note: $f_c = 2402\text{MHz} + (k-1) \times 1\text{MHz}$ $k=1$ to $79$					

Test Frequency and channel list:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

Site Description

Name of Firm : EMTEK (SHENZHEN) CO., LTD.

Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%.

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The BT component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

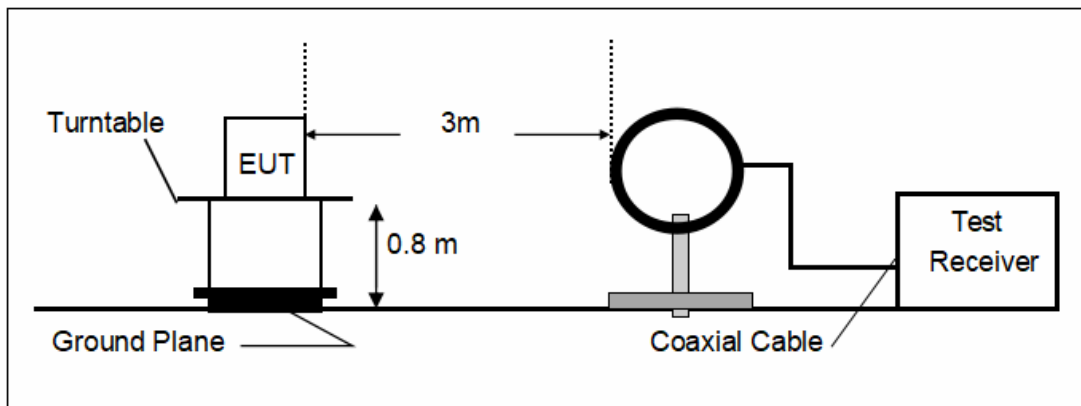

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

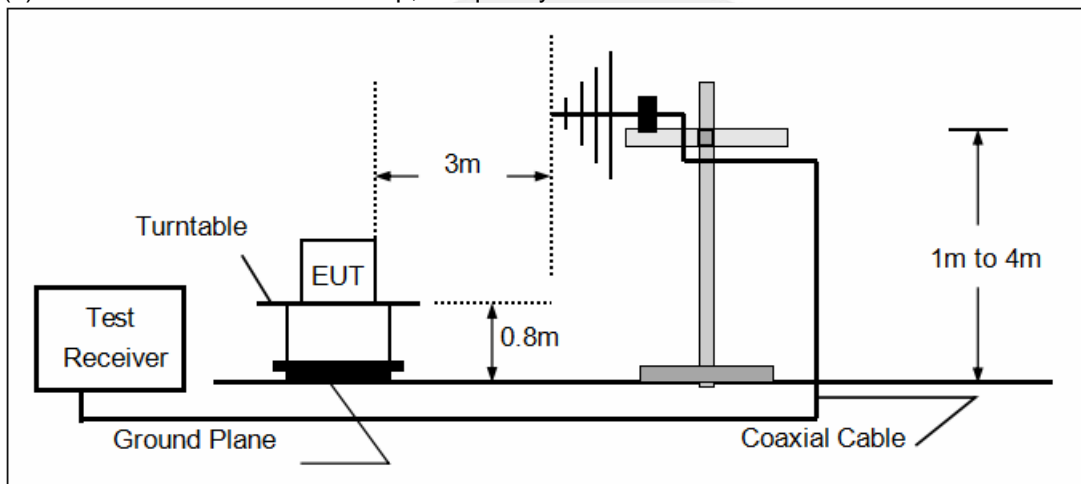

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

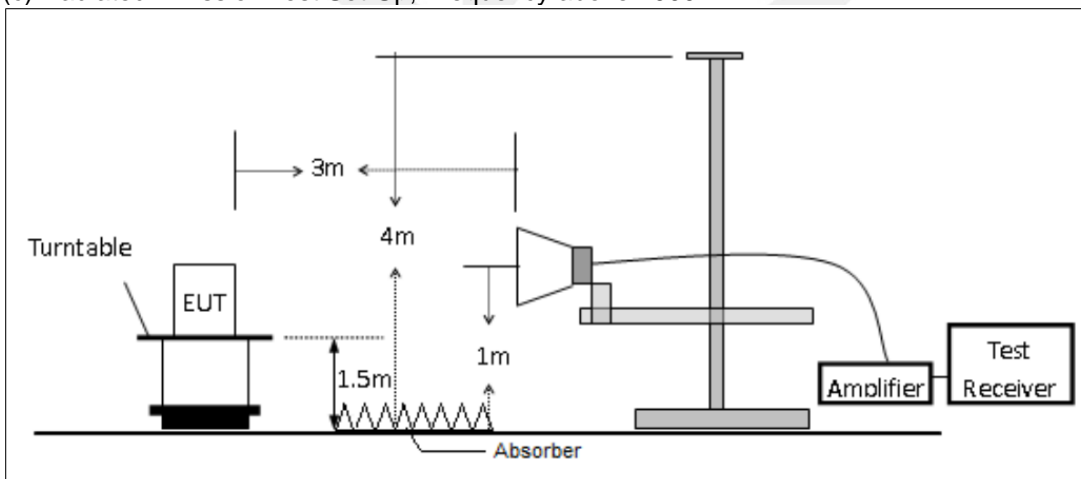


### 7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

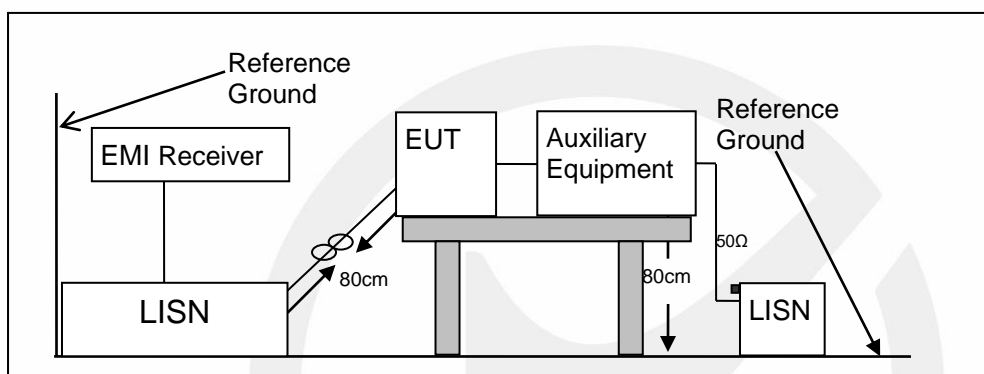

#### 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

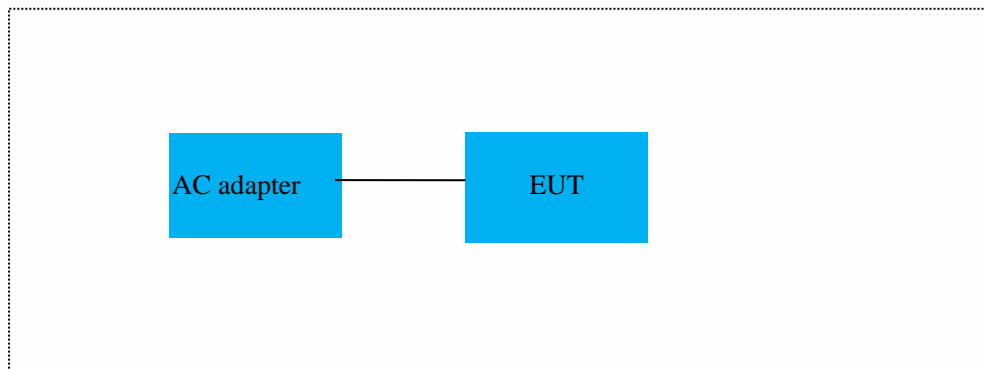

#### 7.5 SUPPORT EQUIPMENT

N/A

Notes:

- 1.All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2.Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

### 8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 8.2 EUT Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels.


The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1600 hops/s.

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.


Number of shift register stages: 9.

Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits.

Longest sequence of zeros: 8 (non-inverted signal).

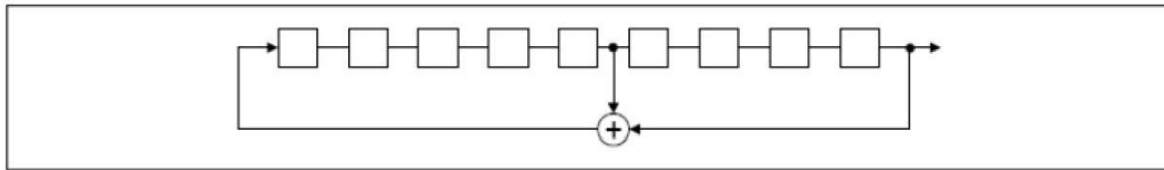

*Linear Feedback Shift Register for Generation of the PRBS sequence*

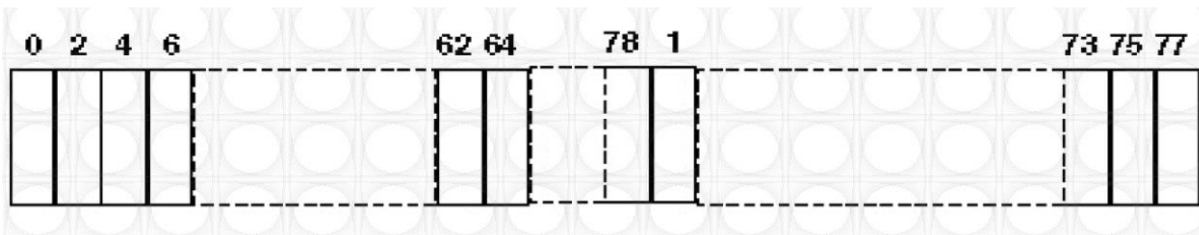

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53.

Each Frequency used equally on the average by each transmitter.

### 8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

## 9 TEST REQUIREMENTS

### 9.1 20DB BANDWIDTH

#### 9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02.

#### 9.1.2 Conformance Limit

No limit requirement.

#### 9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

#### 9.1.4 Test Procedure

The EUT was operating in BT mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

Set RBW = 30 kHz.

Set the video bandwidth (VBW) = 100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth.

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.


If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.


#### Test Results

Temperature : 25°C      ATM Pressure: 1011 mbar  
Humidity : 45 %      Test Engineer: XXH


TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.95	2401.52	2402.47	---	---
DH5	Ant1	2441	0.95	2440.52	2441.47	---	---
DH5	Ant1	2480	0.95	2479.52	2480.47	---	---
2DH5	Ant1	2402	1.33	2401.33	2402.65	---	---
2DH5	Ant1	2441	1.33	2440.33	2441.65	---	---
2DH5	Ant1	2480	1.33	2479.32	2480.65	---	---
3DH5	Ant1	2402	1.31	2401.34	2402.65	---	---
3DH5	Ant1	2441	1.31	2440.34	2441.65	---	---
3DH5	Ant1	2480	1.30	2479.34	2480.64	---	---

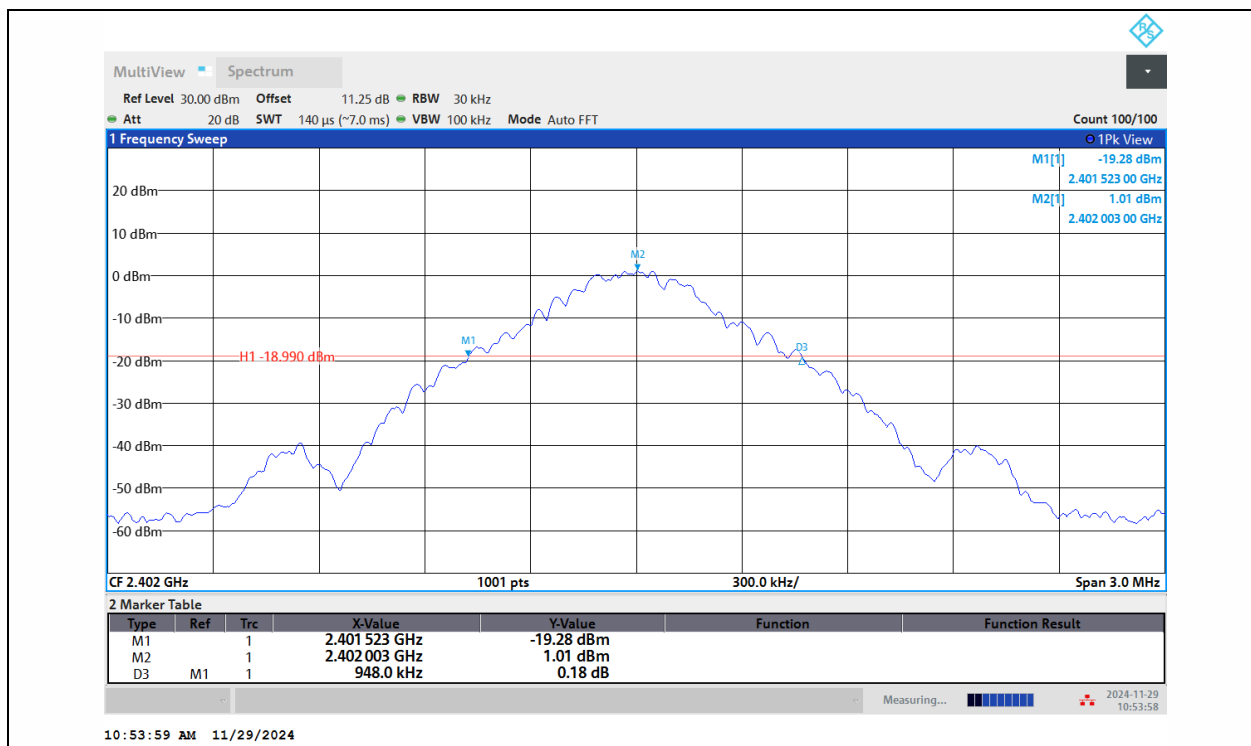


DH5-Ant1-2402

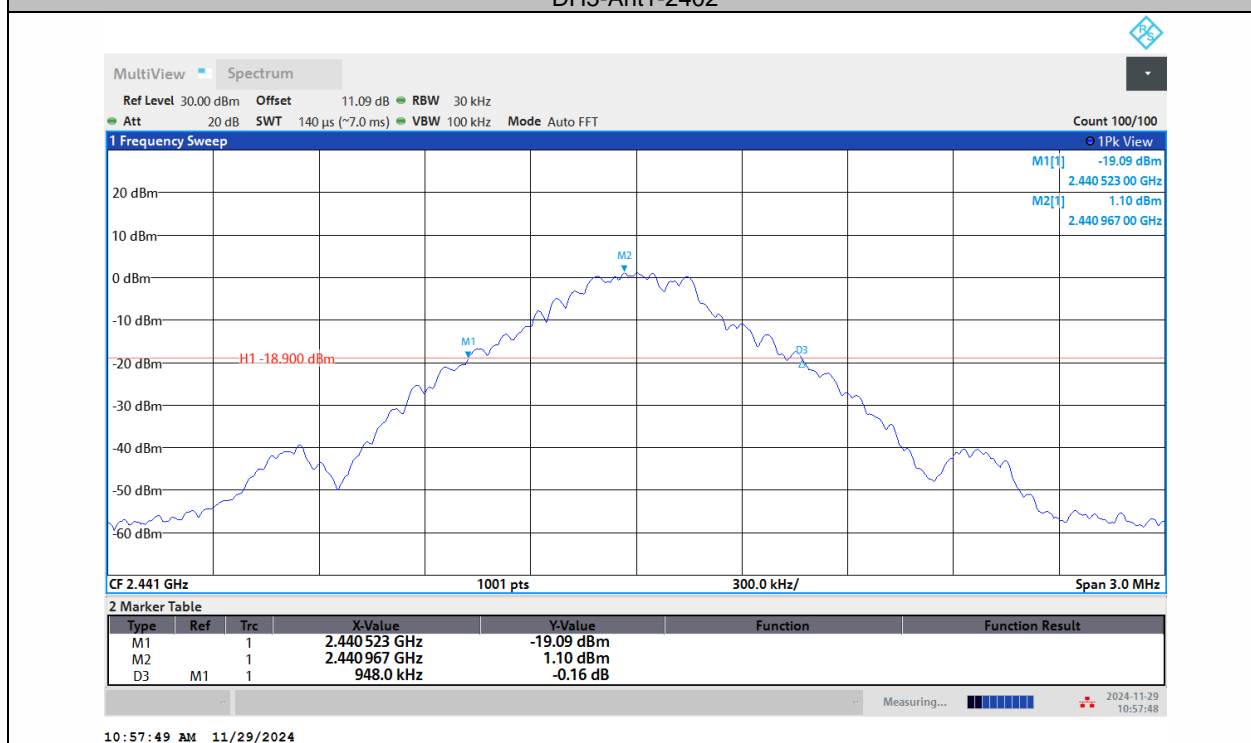


DH5-Ant1-2441

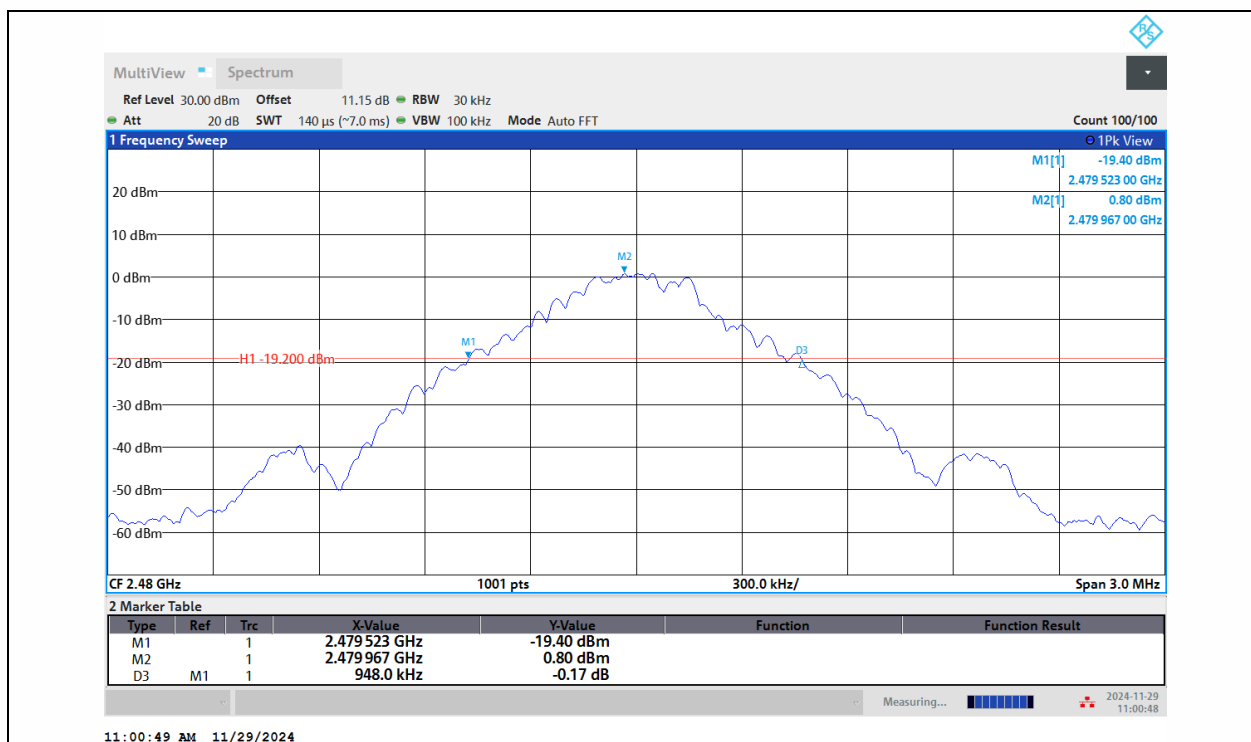


DH5-Ant1-2480

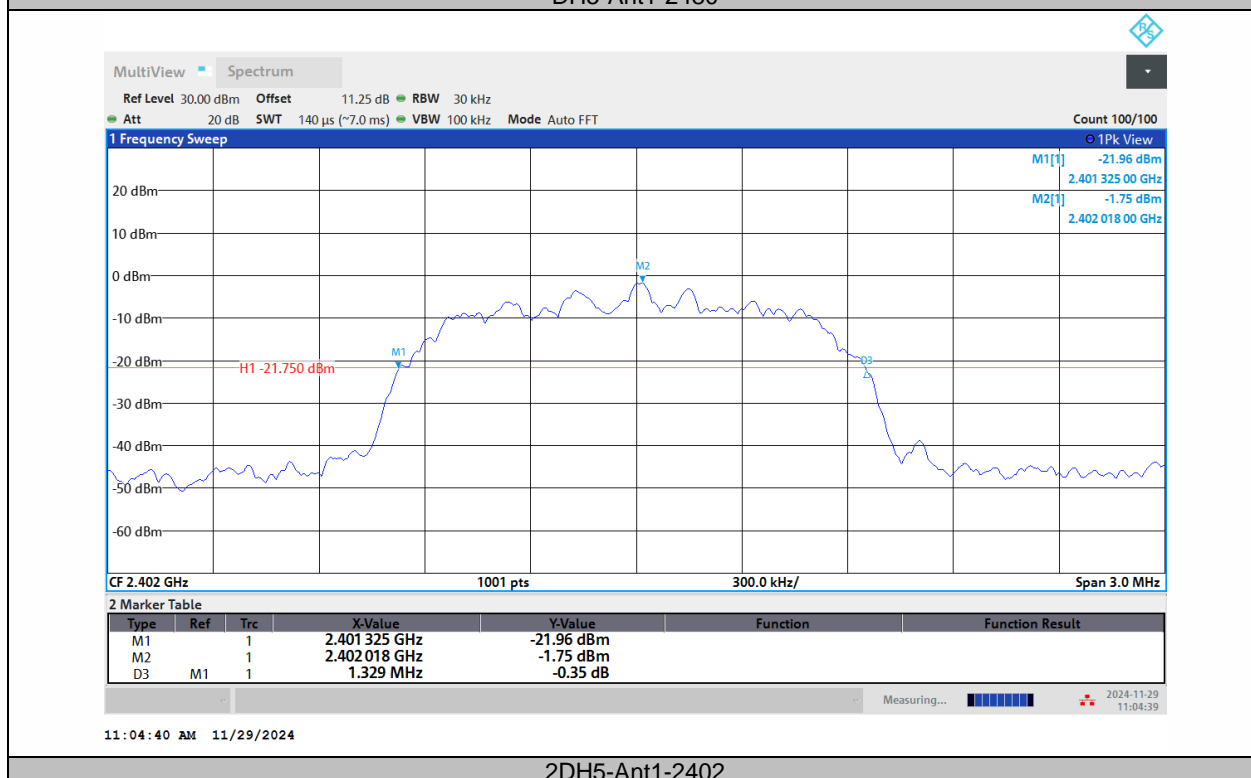


2DH5-Ant1-2402

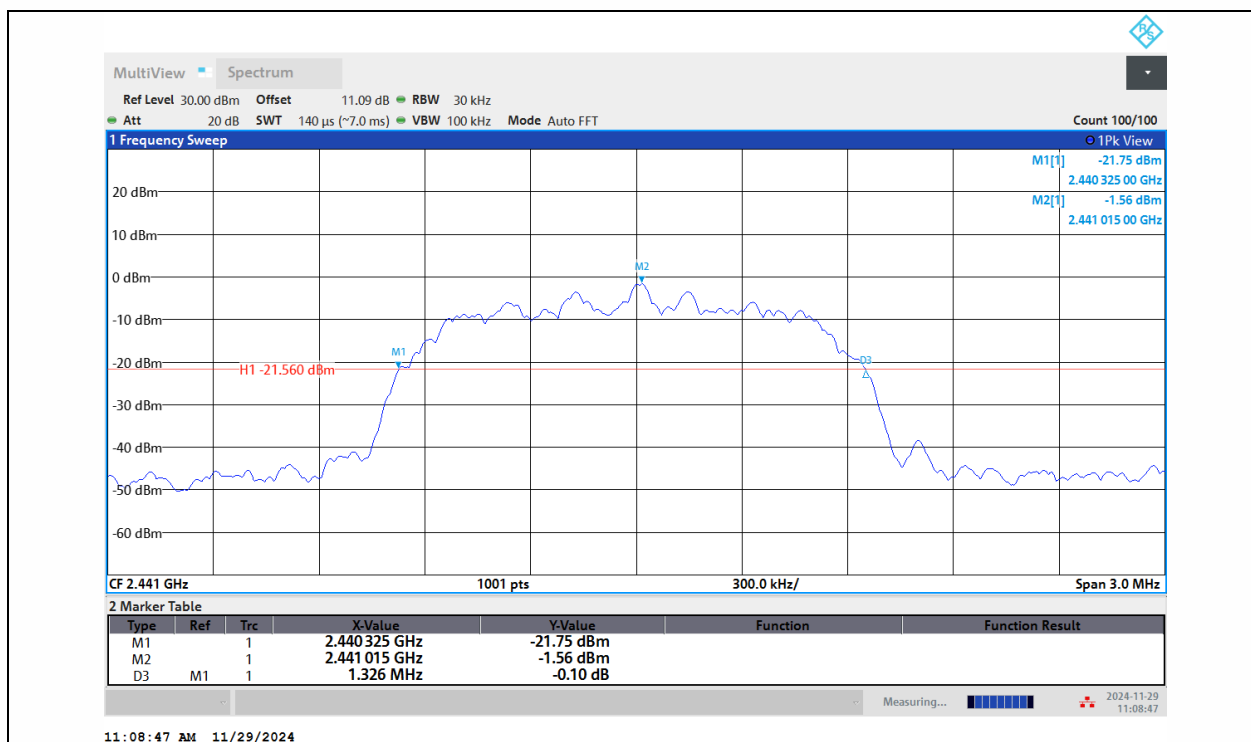


2DH5-Ant1-2441

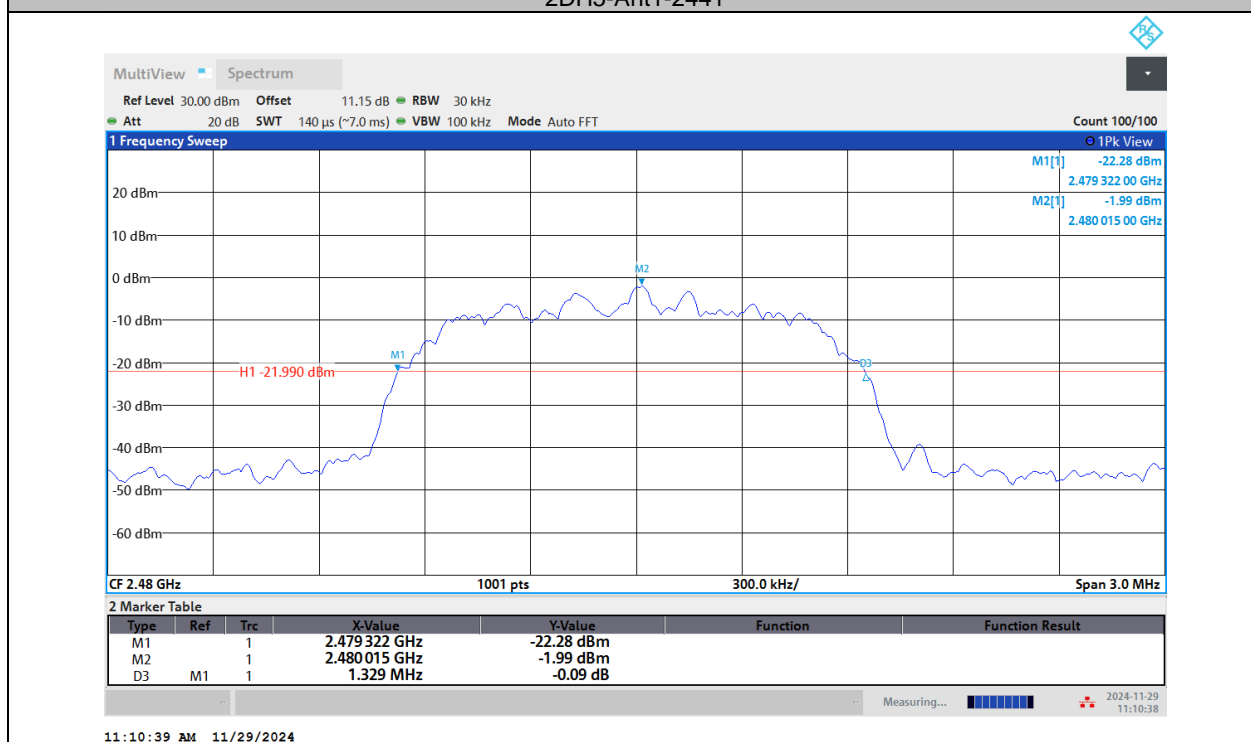


2DH5-Ant1-2480

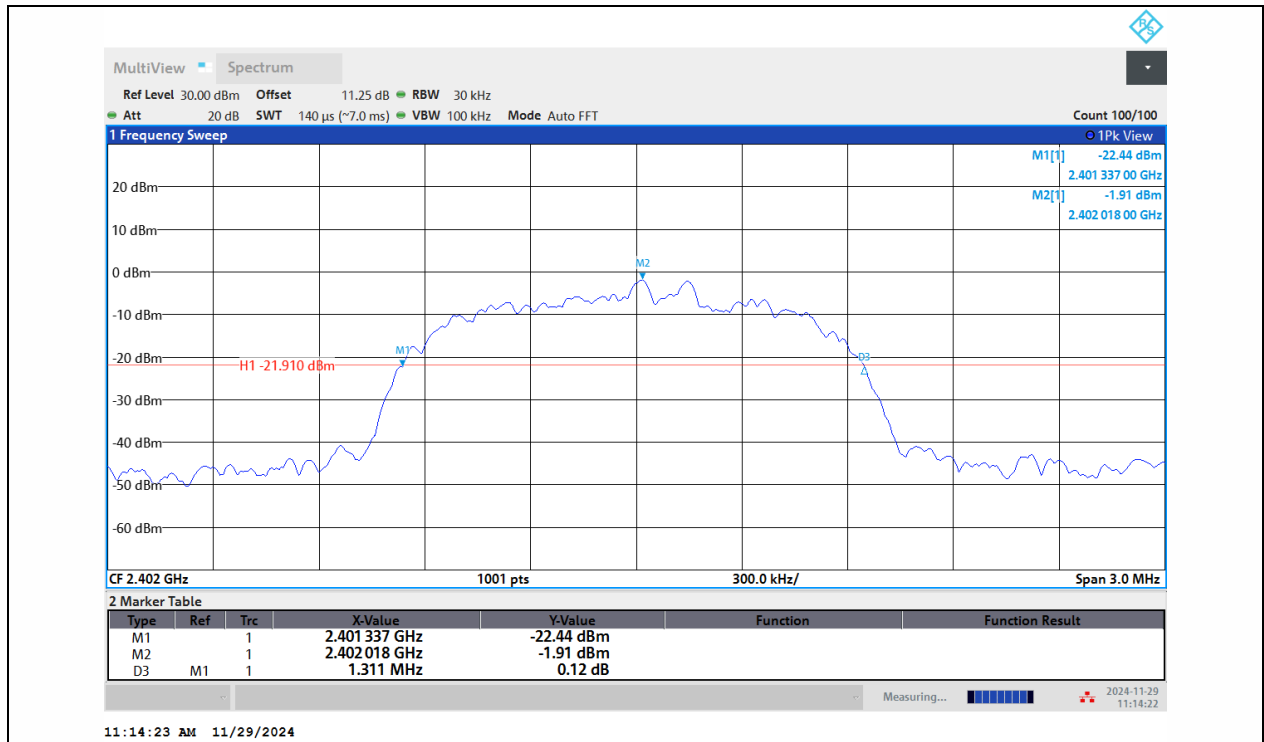

3DH5-Ant1-2402

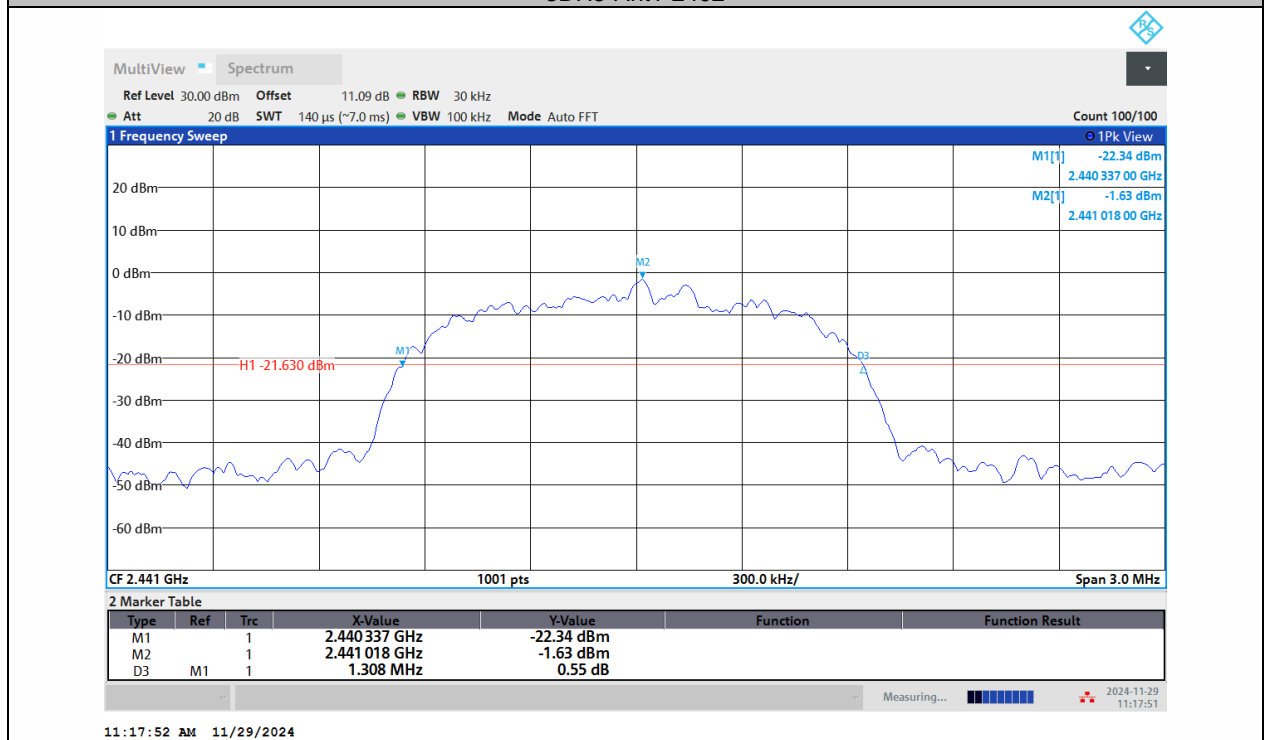

3DH5-Ant1-2441

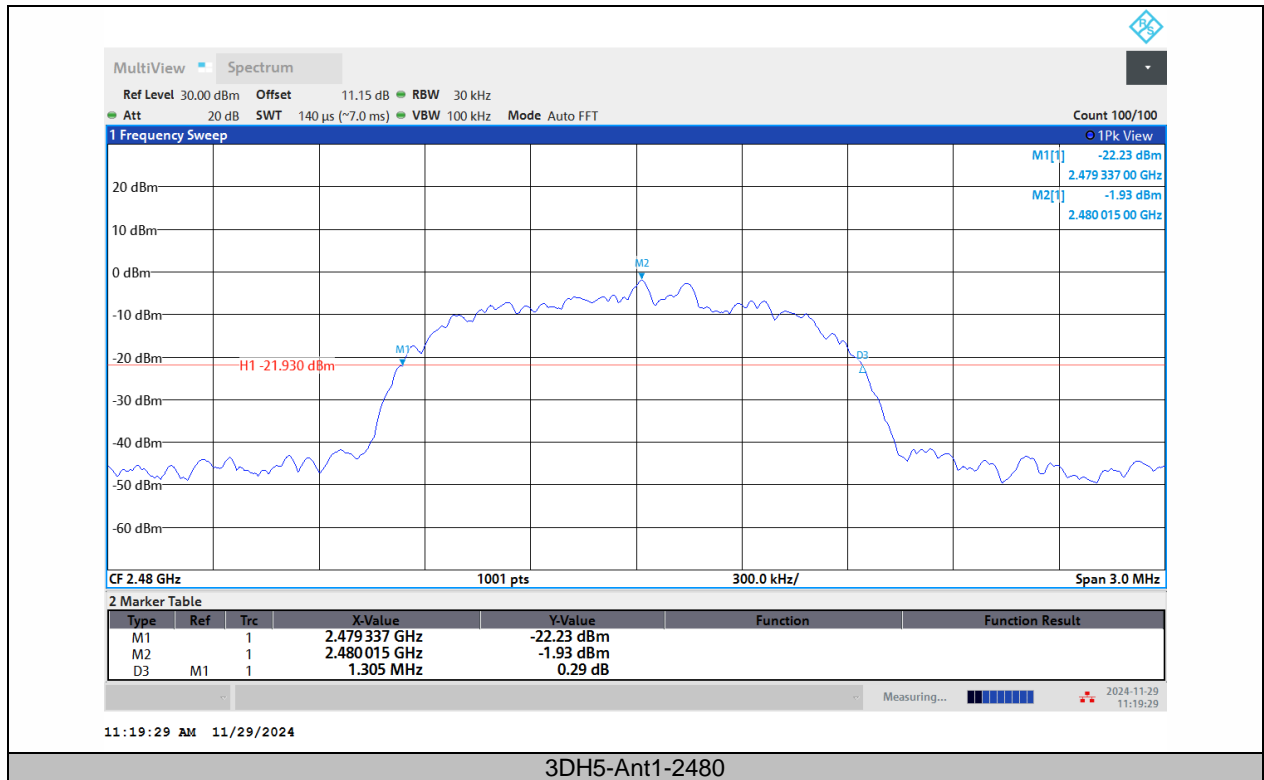

## 9.2 CARRIER FREQUENCY SEPARATION

### 9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02.

### 9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

### 9.2.4 Test Procedure

According to FCC Part 15.247(a)(1).

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW = 100kHz.

Set VBW = 300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

### Test Results


Temperature : 25°C  
Humidity : 45 %

ATM Pressure: 1011 mbar  
Test Engineer: XXH


TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.988	≥0.950	PASS
2DH5	Ant1	Hop	0.964	≥0.887	PASS
3DH5	Ant1	Hop	0.874	≥0.873	PASS

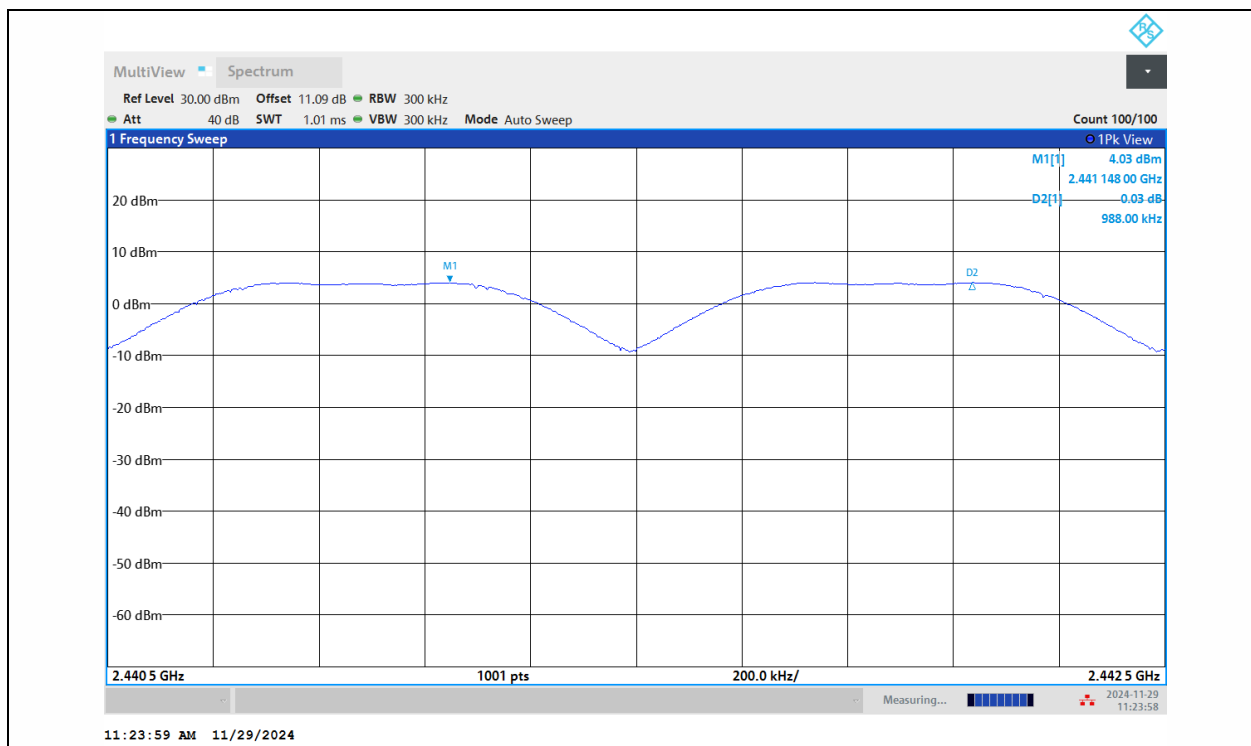

DH5-Ant1-Hop-PASS

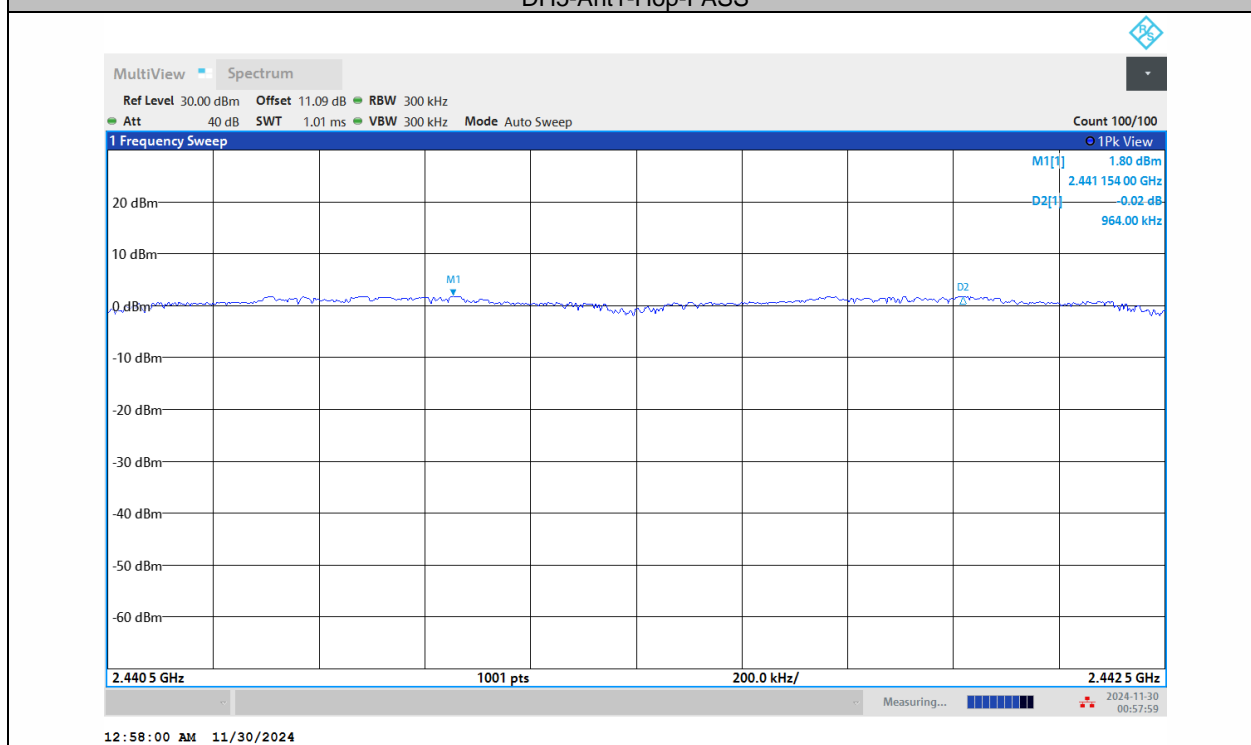

2DH5-Ant1-Hop-PASS

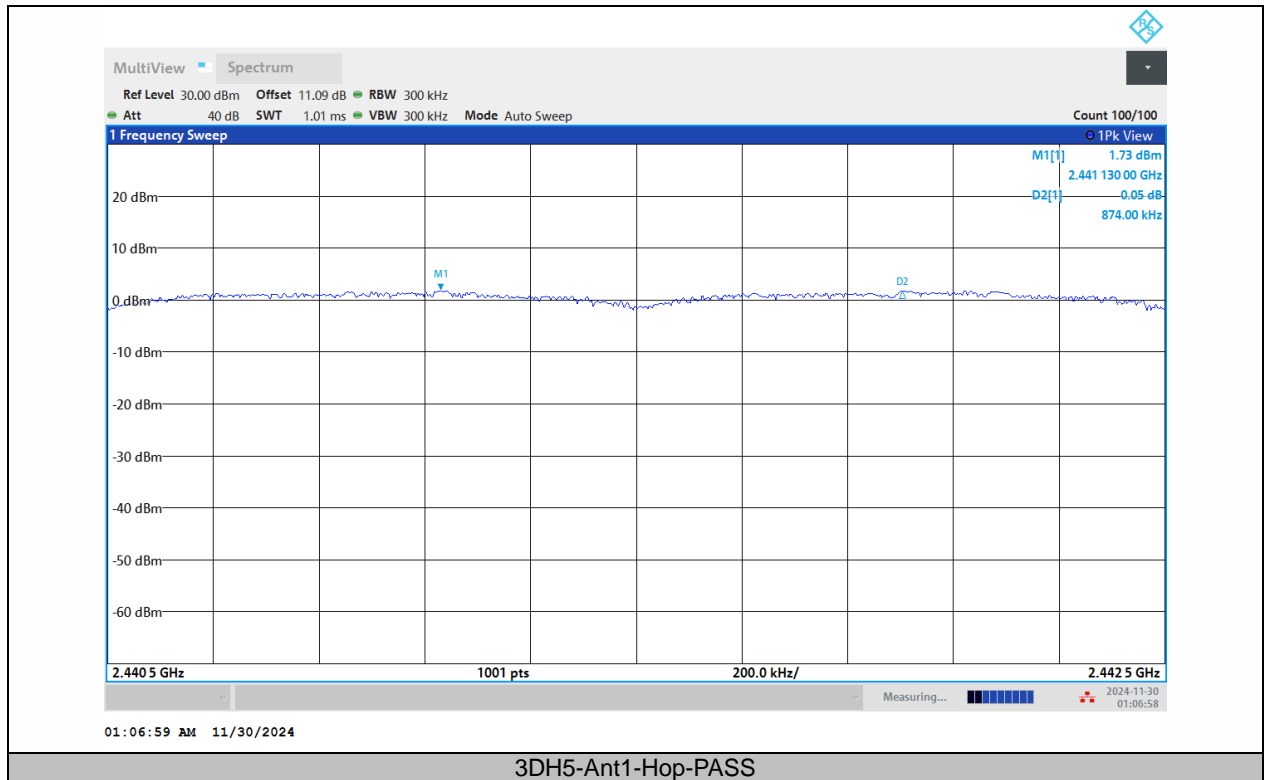

### 9.3 NUMBER OF HOPPING FREQUENCIES

#### 9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02.

#### 9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

#### 9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

#### 9.3.4 Test Procedure

According to FCC Part 15.247(a)(1)(iii).

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (2400-2483.5MHz).

RBW  $\geq$  100KHz.

VBW  $\geq$  RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

#### Test Results


Temperature : 25°C

ATM Pressure: 1011 mbar


Humidity : 45 %

Test Engineer: XXH


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
2DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS

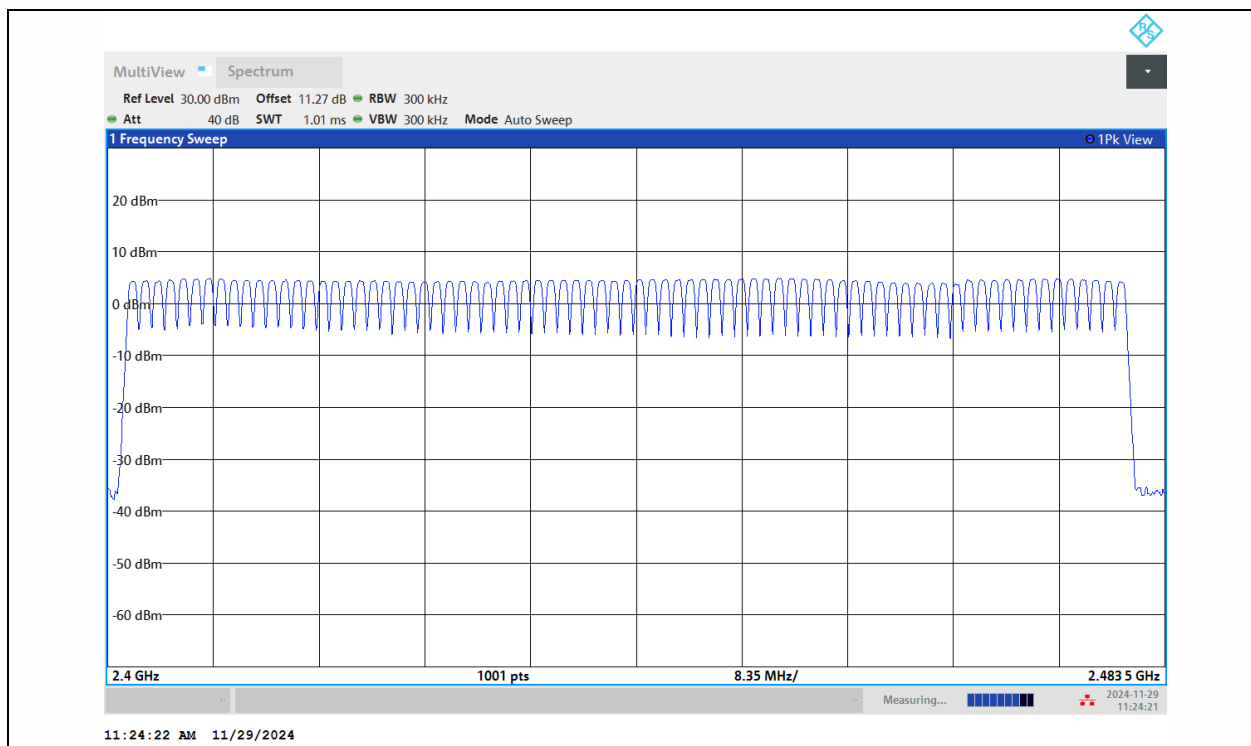

DH5-Ant1-Hop-PASS

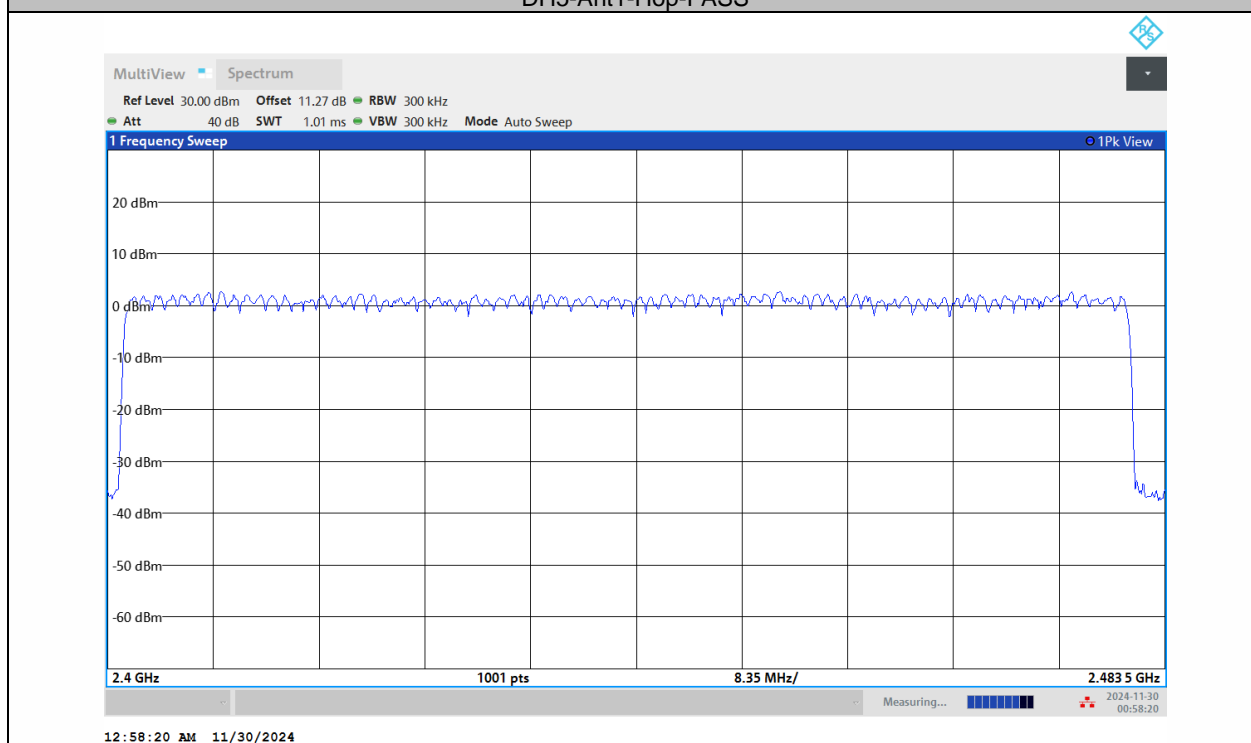

2DH5-Ant1-Hop-PASS

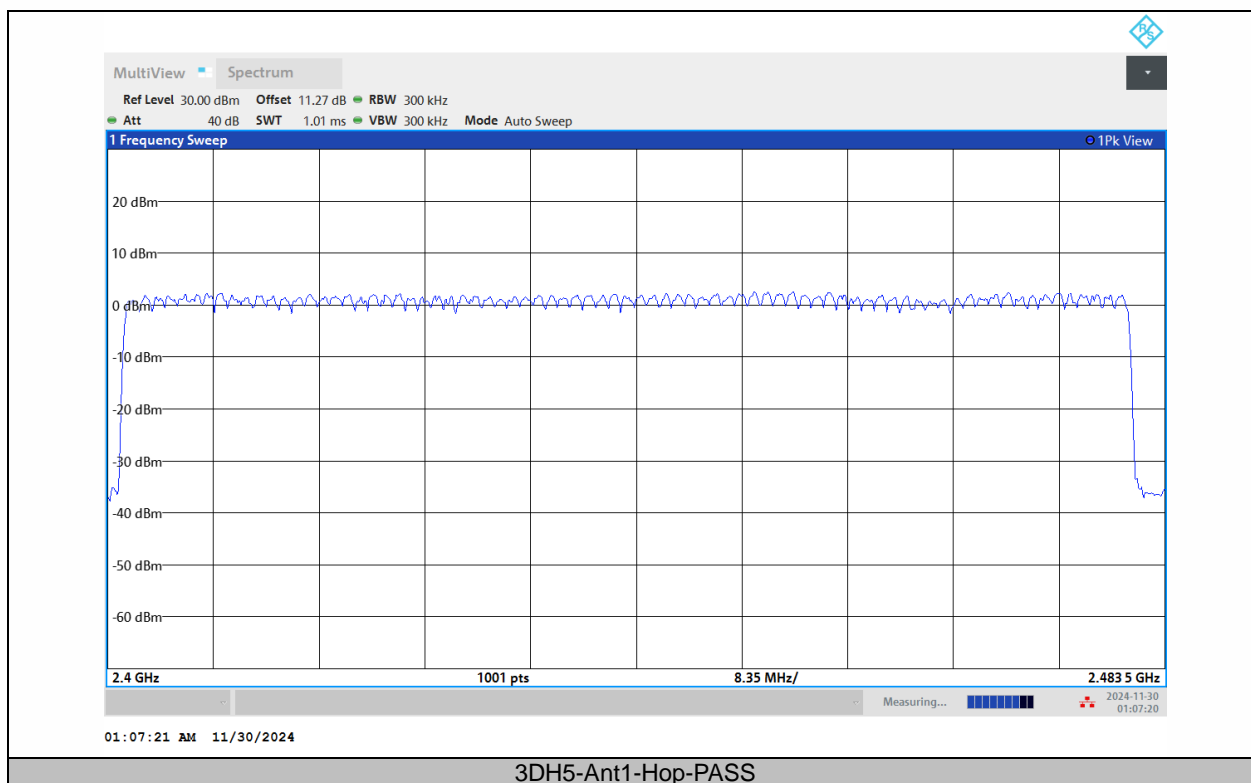

## 9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

### 9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02.

### 9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

### 9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

### 9.4.4 Test Procedure

According to FCC Part 15.247(a)(1)(iii).

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel.

RBW = 1 MHz.

VBW  $\geq$  RBW.

Sweep = as necessary to capture the entire dwell time per hopping channel.

Detector function = peak.

Trace = max hold.

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.

### 9.4.5 Test Results

Temperature : 25°C      ATM Pressure: 1011 mbar  
Humidity : 45 %      Test Engineer: XXH

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK)was report as below:


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.379	320	0.121	$\leq 0.4$	PASS
DH3	Ant1	Hop	1.635	150	0.245	$\leq 0.4$	PASS
DH5	Ant1	Hop	2.883	90	0.259	$\leq 0.4$	PASS
2DH1	Ant1	Hop	0.384	320	0.123	$\leq 0.4$	PASS
2DH3	Ant1	Hop	1.636	150	0.245	$\leq 0.4$	PASS
2DH5	Ant1	Hop	2.885	120	0.346	$\leq 0.4$	PASS
3DH1	Ant1	Hop	0.385	320	0.123	$\leq 0.4$	PASS
3DH3	Ant1	Hop	1.635	180	0.294	$\leq 0.4$	PASS
3DH5	Ant1	Hop	2.887	90	0.26	$\leq 0.4$	PASS

**Note:**


Dwell Time(DH1)=PW\*(1600/2/79)\*31.6


Dwell Time(DH3)=PW\*(1600/4/79)\*31.6

Dwell Time(DH5)=PW\*(1600/6/79)\*31.6

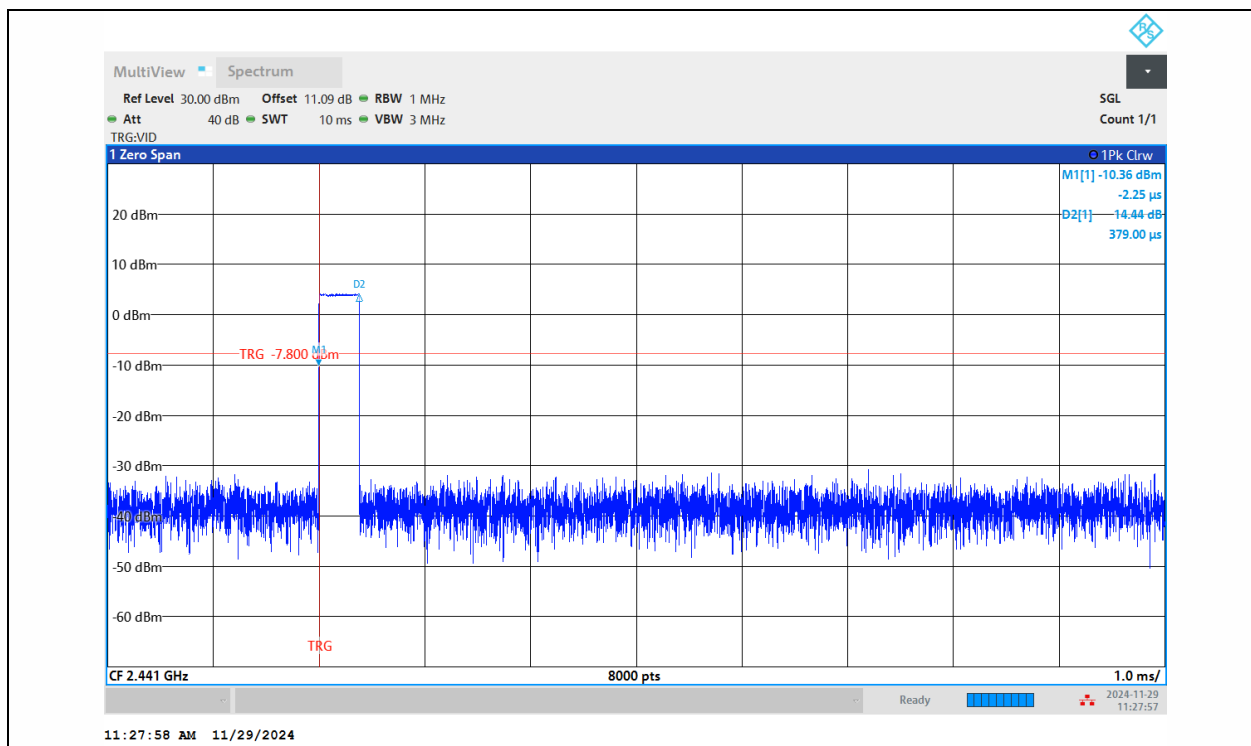



## DH1-Ant1-Hop-PASS

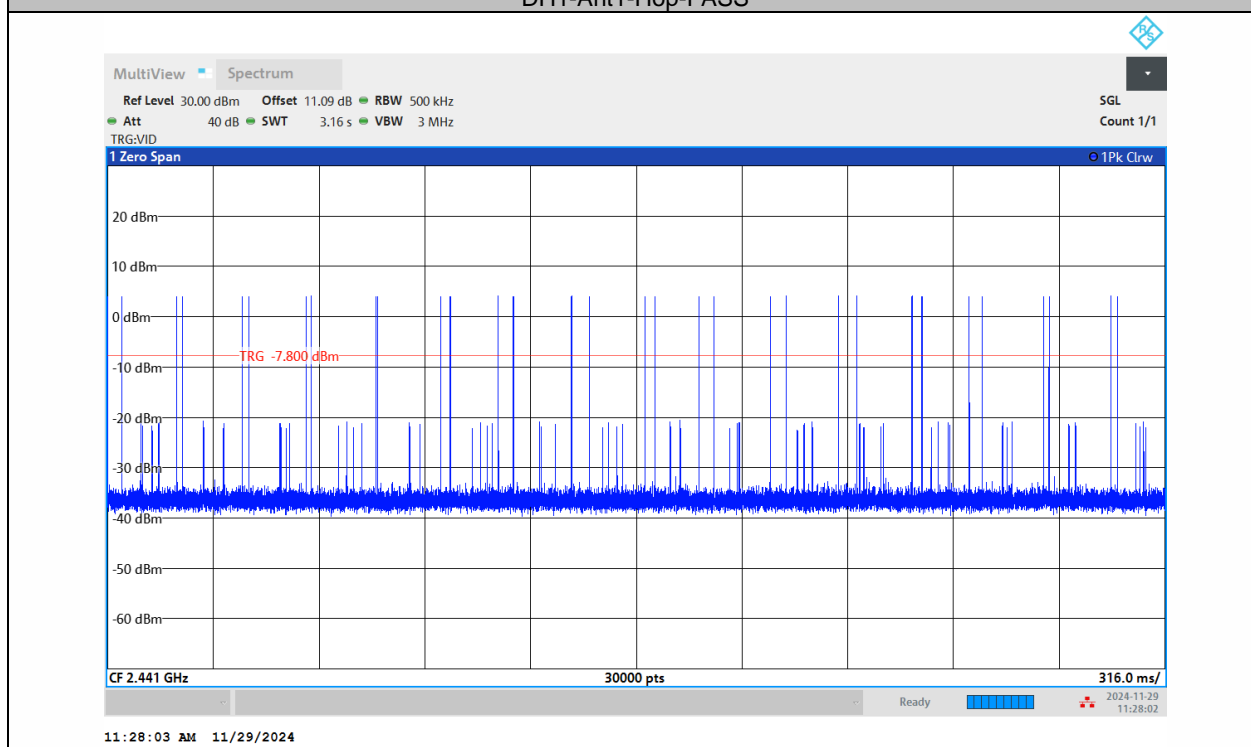

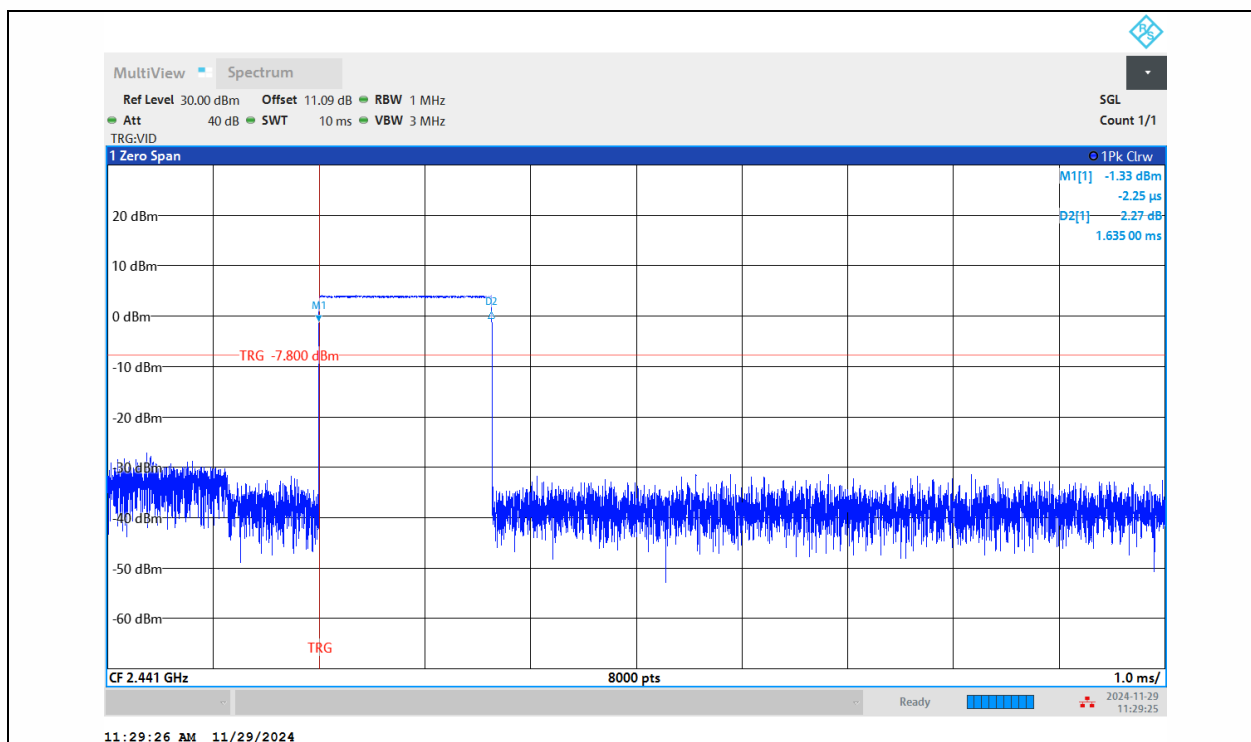



## DH3-Ant1-Hop-PASS

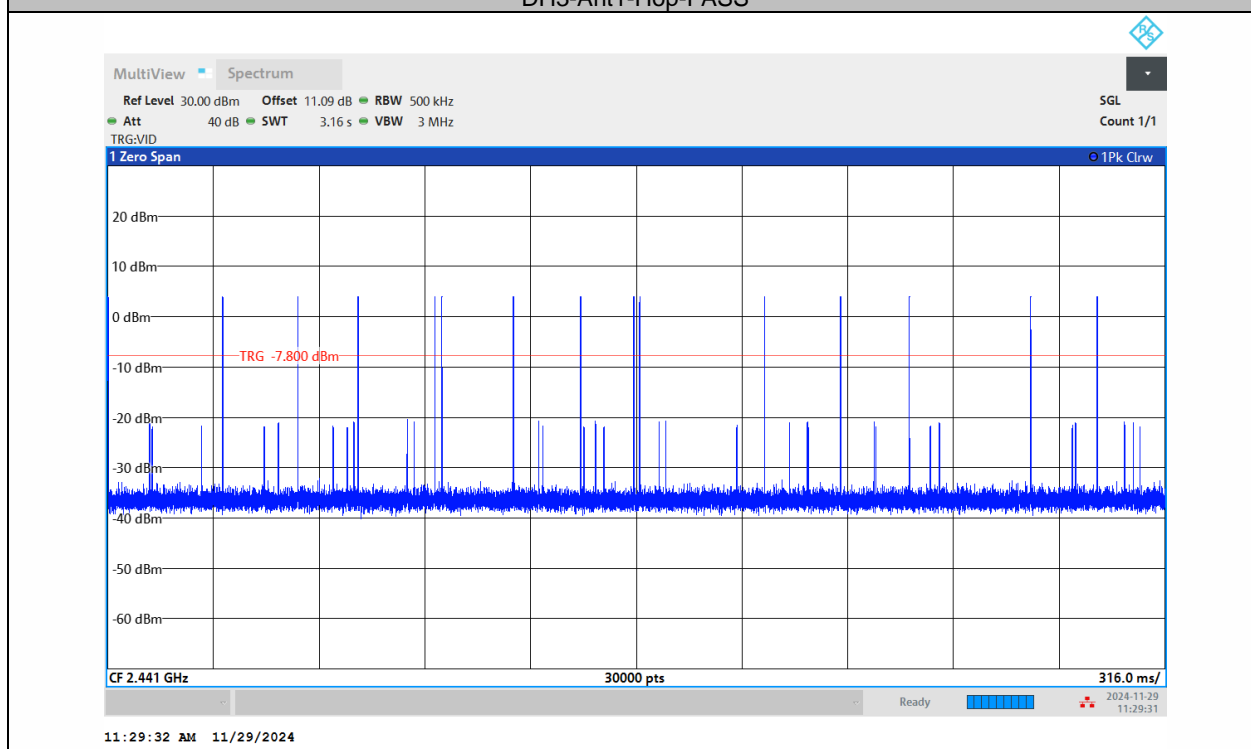

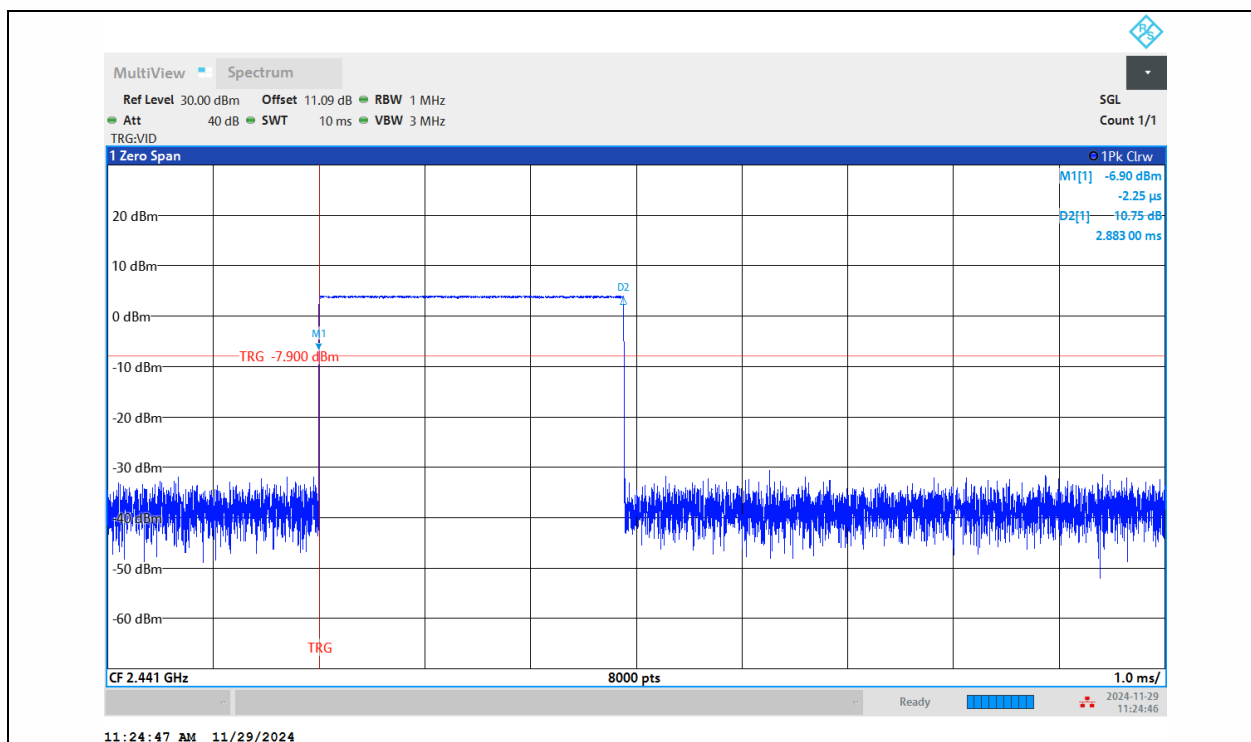



## DH5-Ant1-Hop-PASS

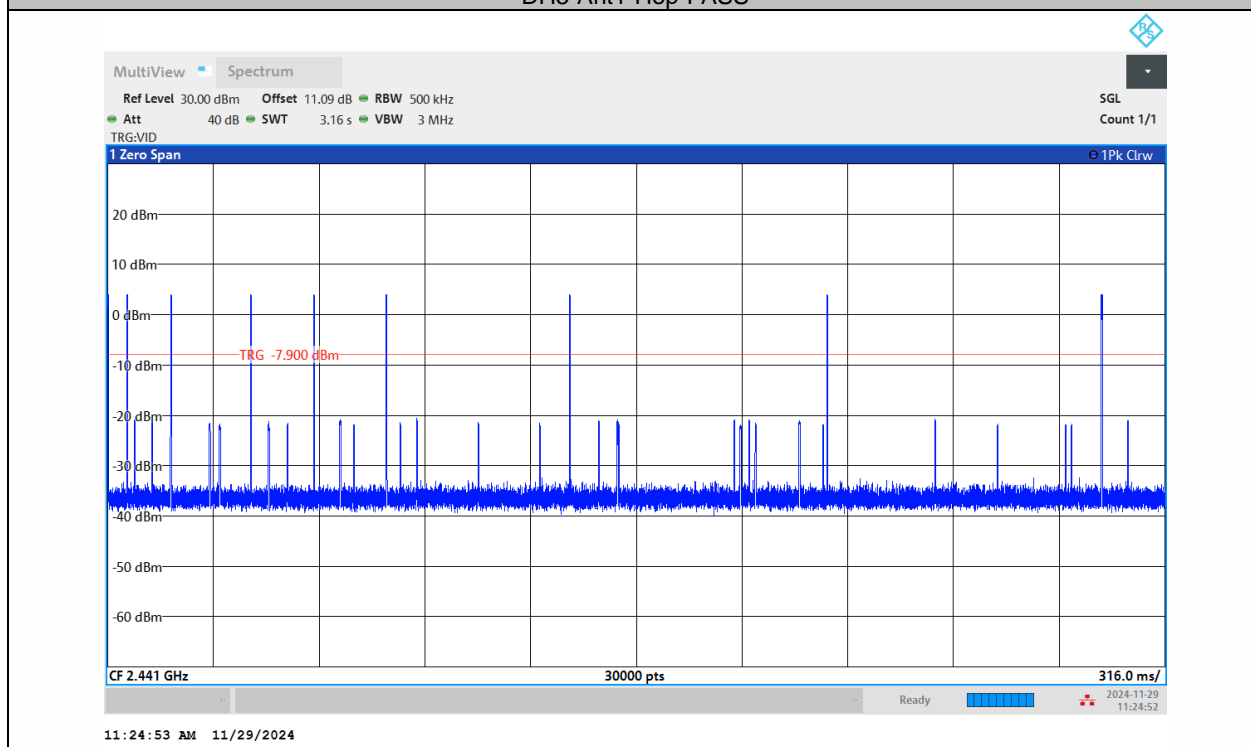

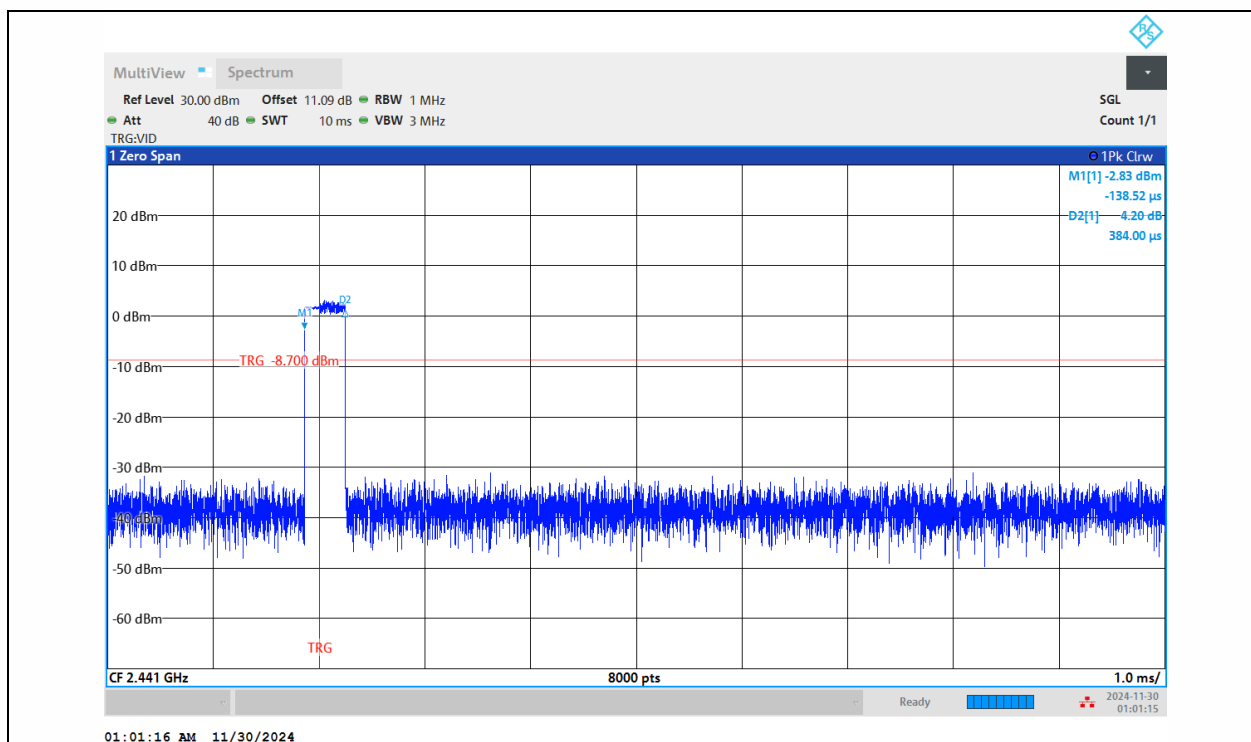



## 2DH1-Ant1-Hop-PASS

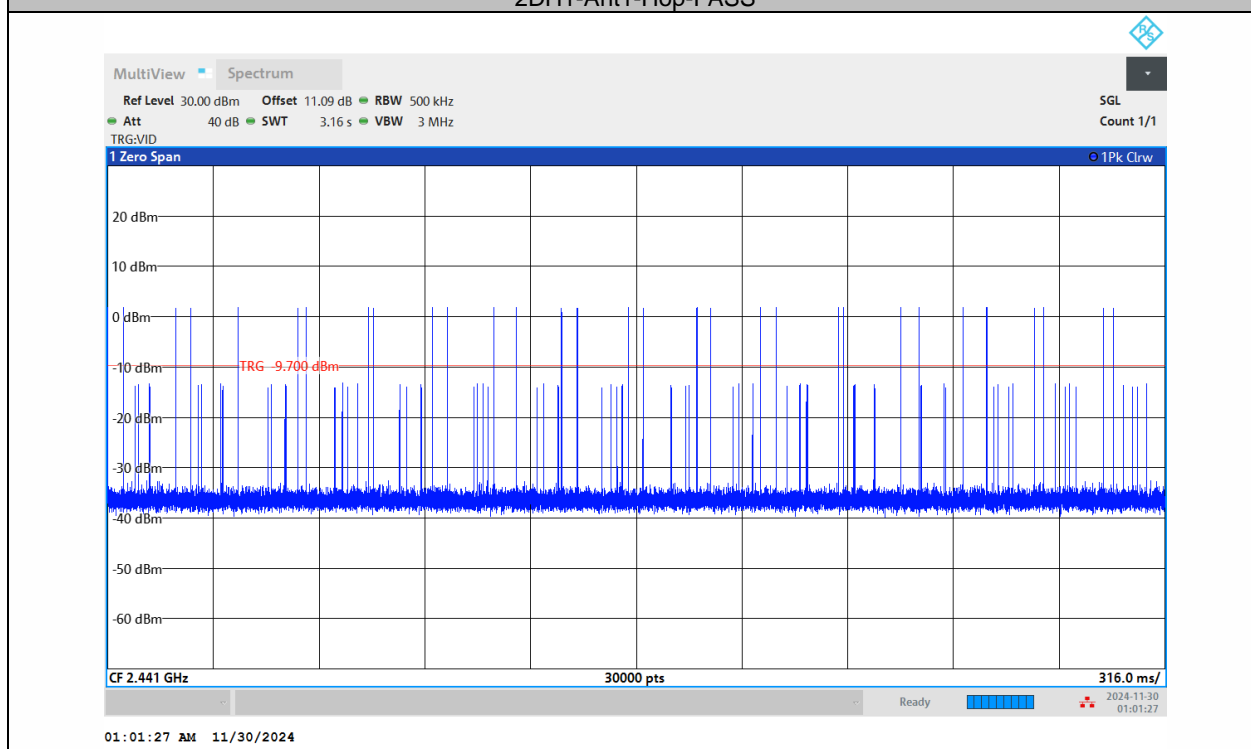

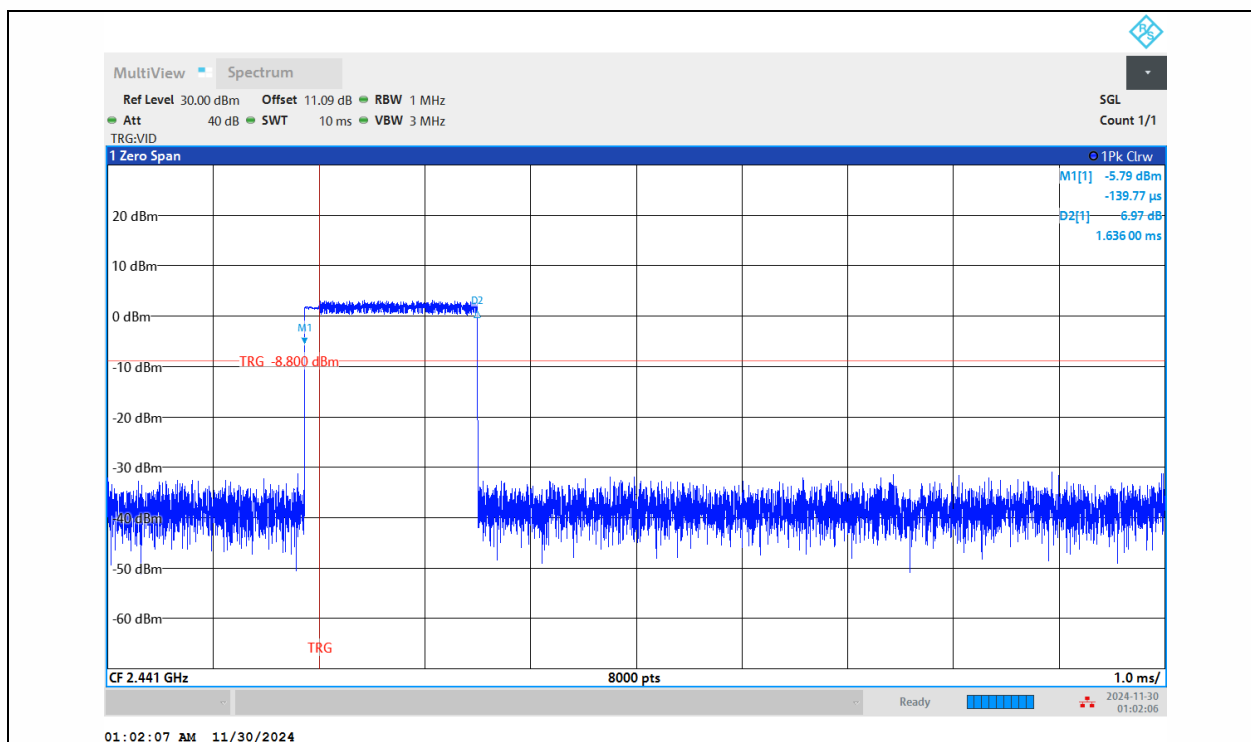



## 2DH3-Ant1-Hop-PASS

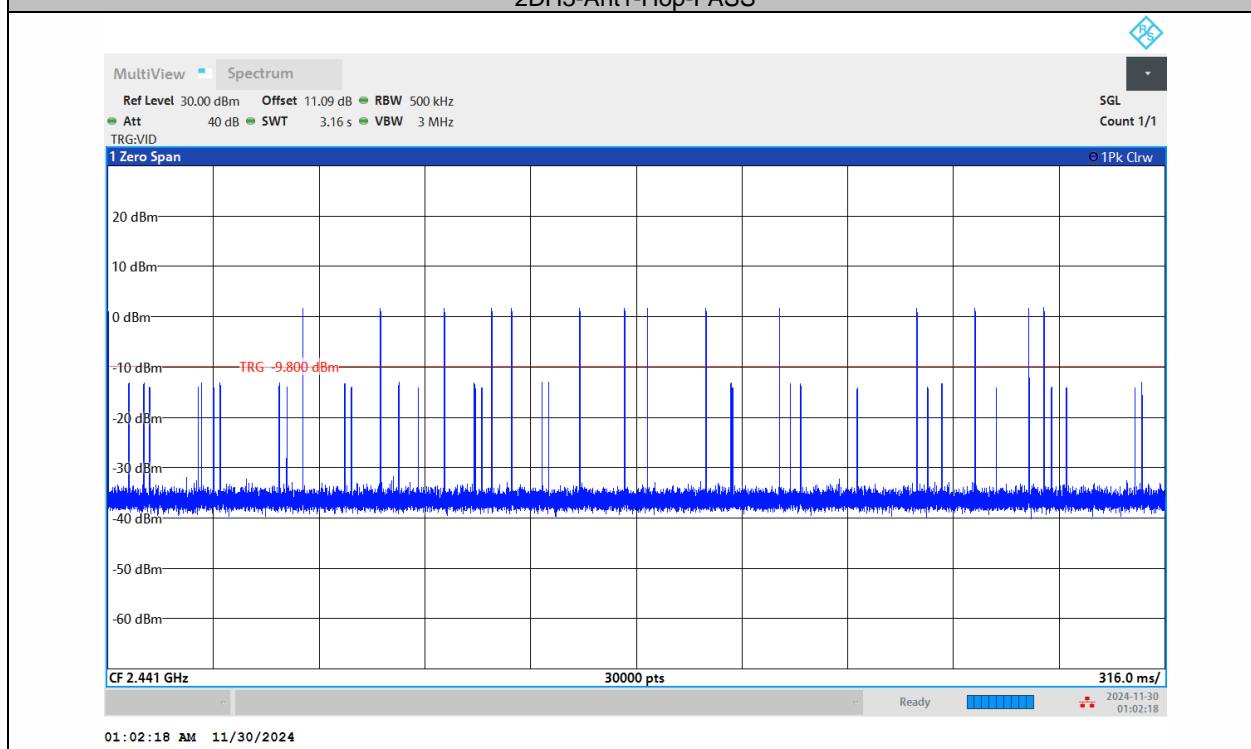

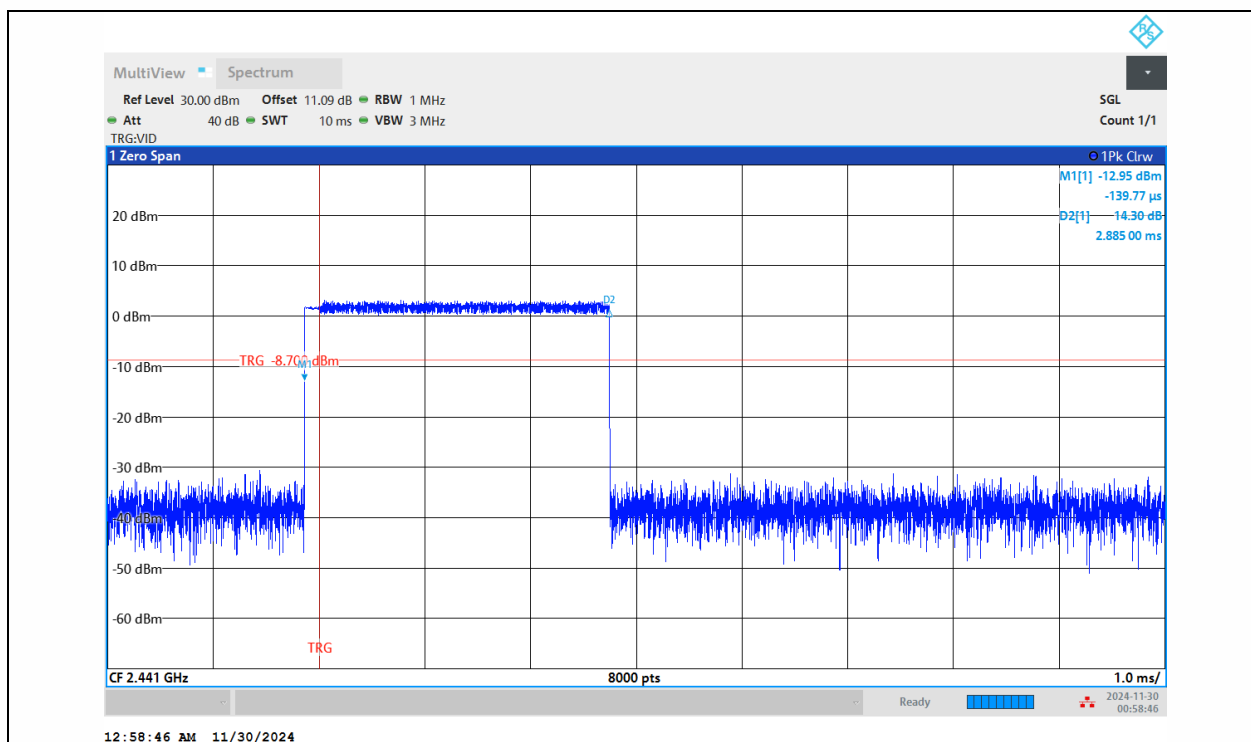



## 2DH5-Ant1-Hop-PASS

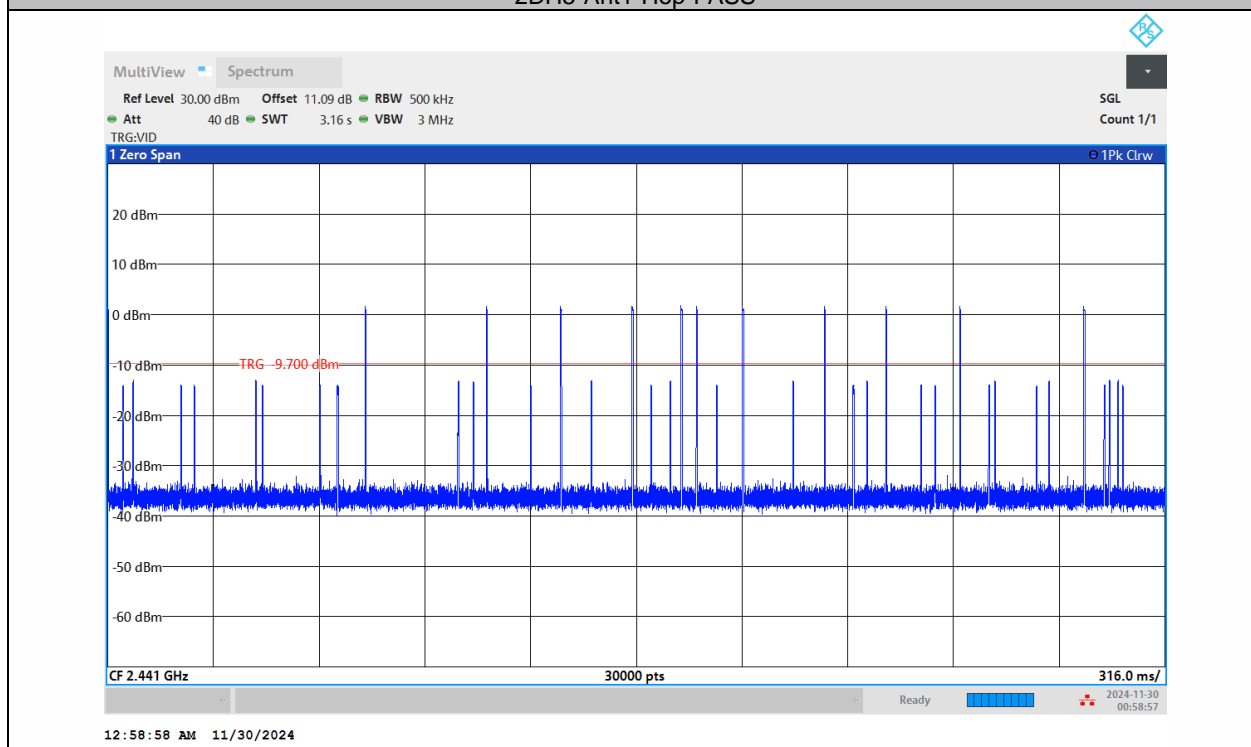

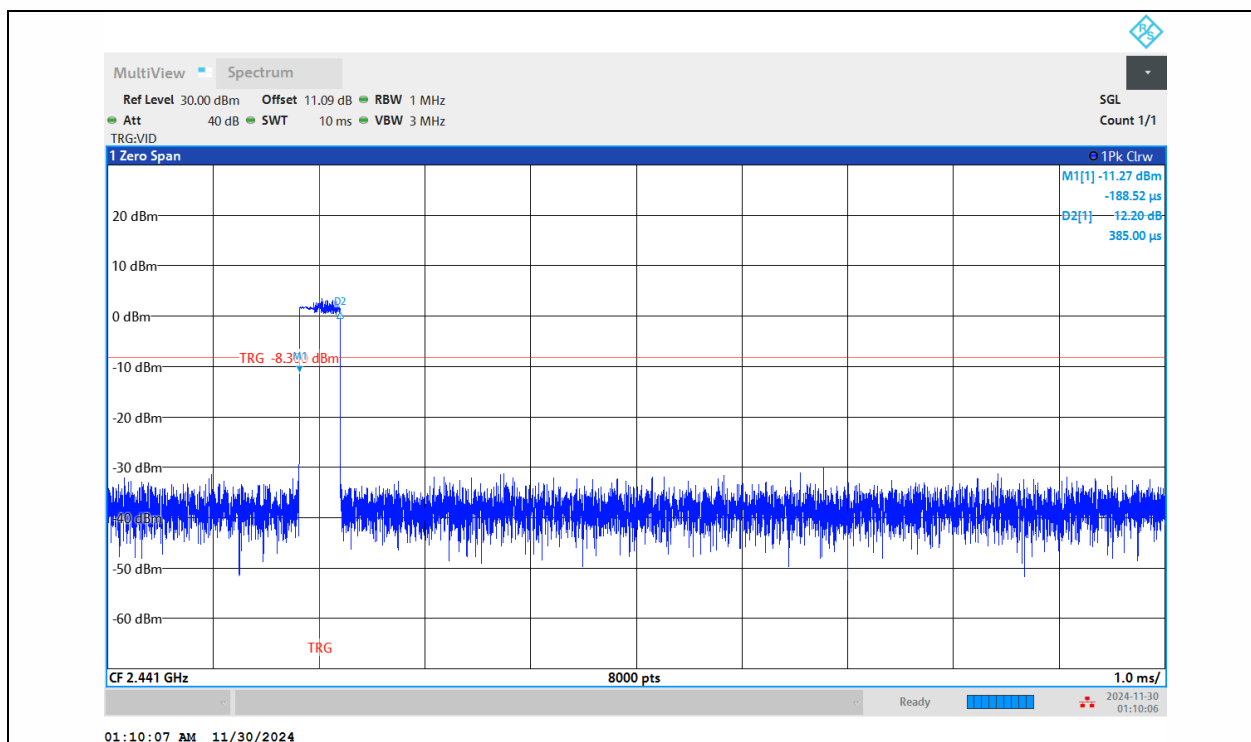




## 3DH1-Ant1-Hop-PASS

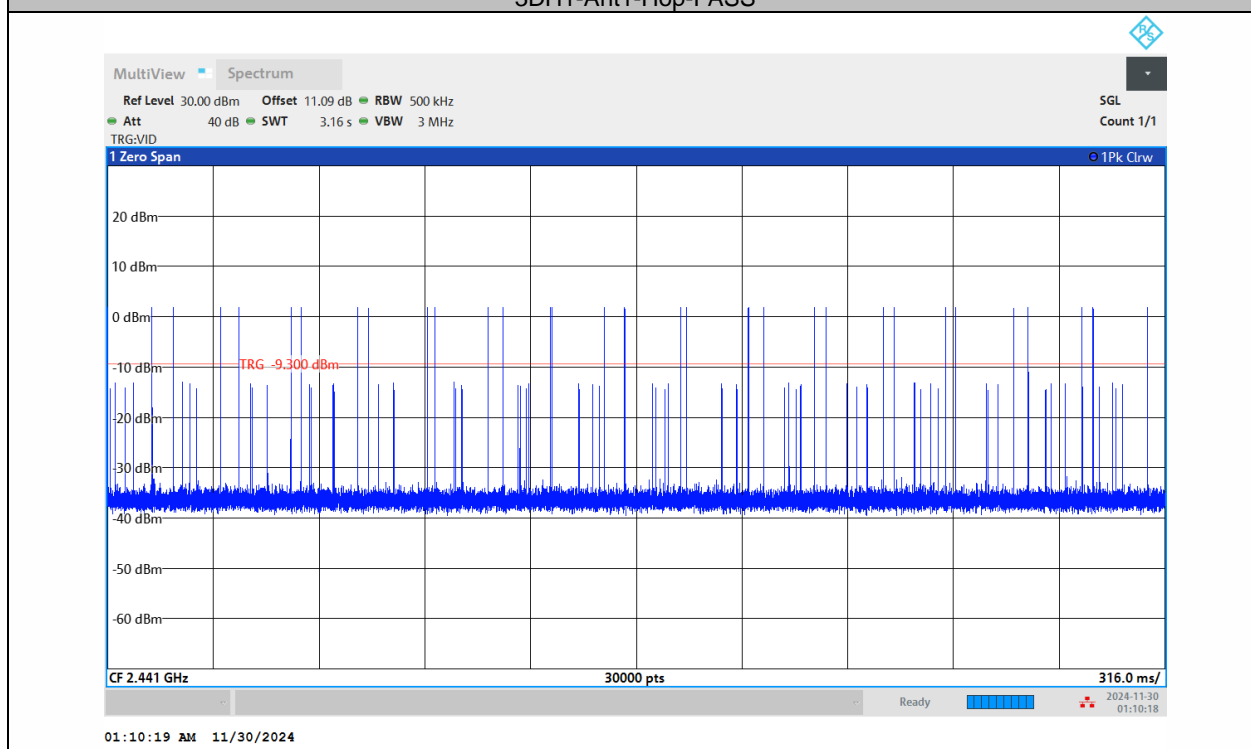

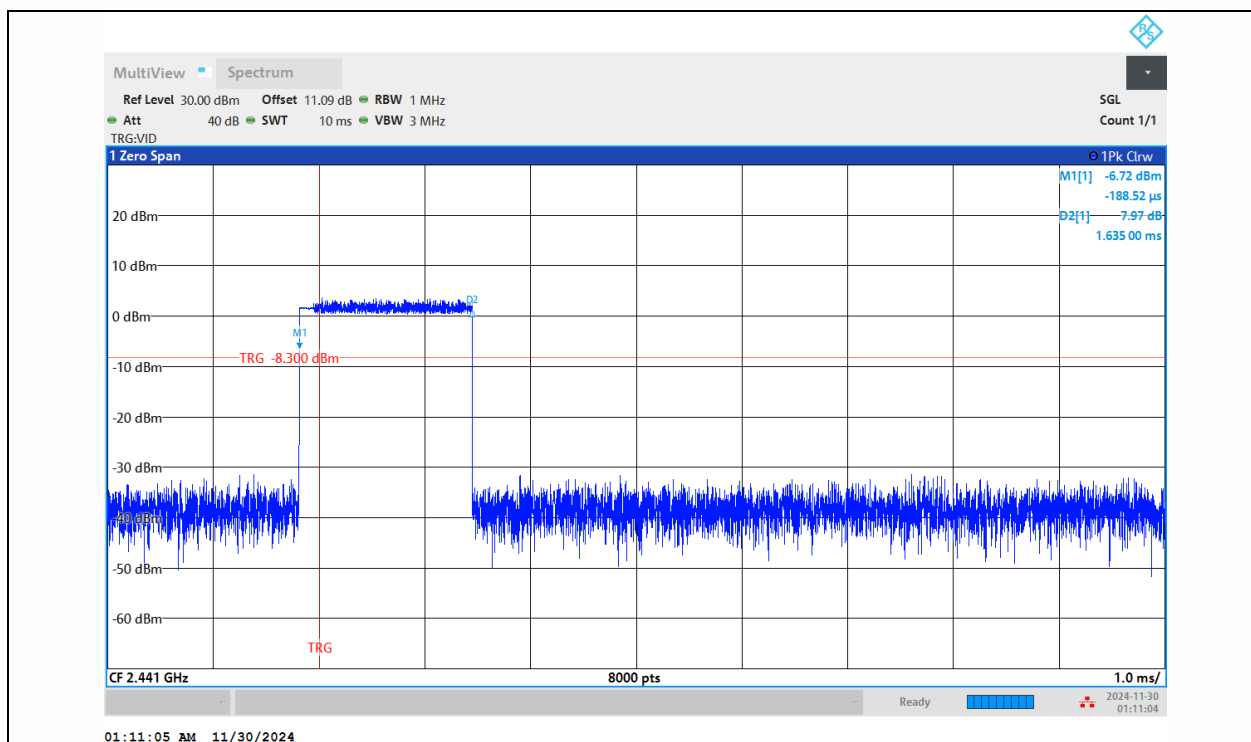

## 3DH3-Ant1-Hop-PASS

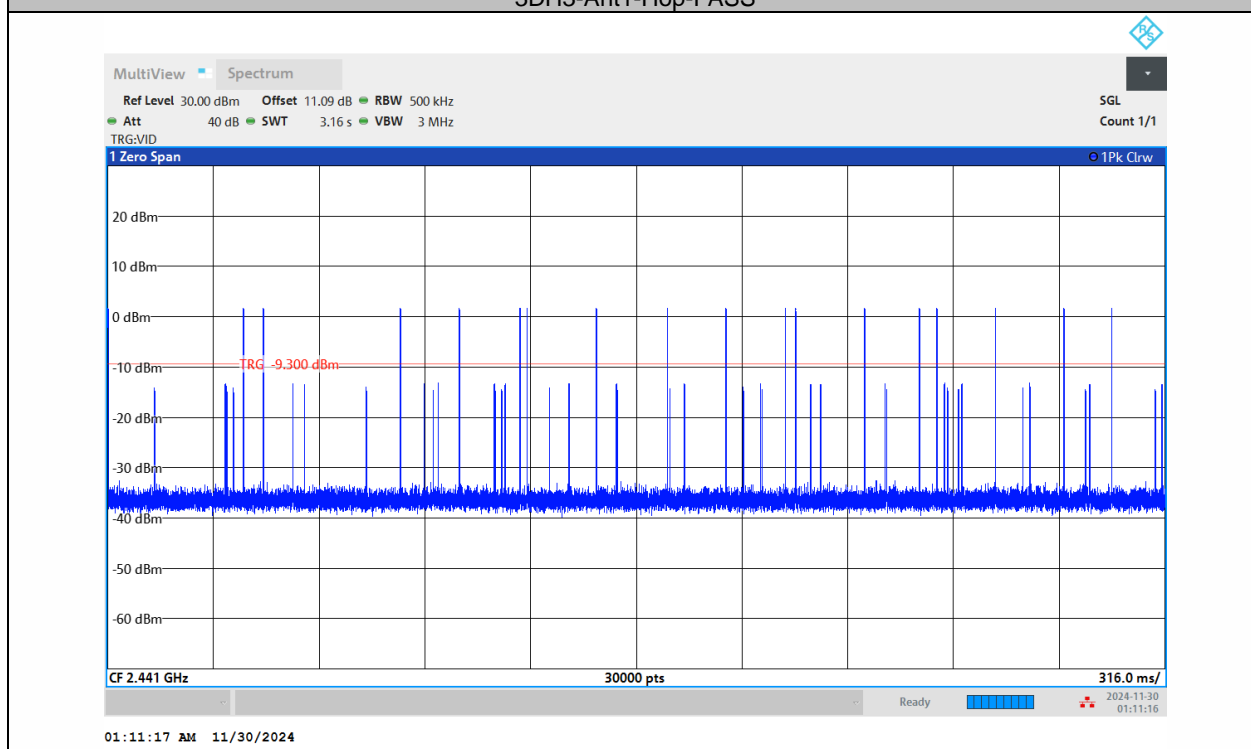

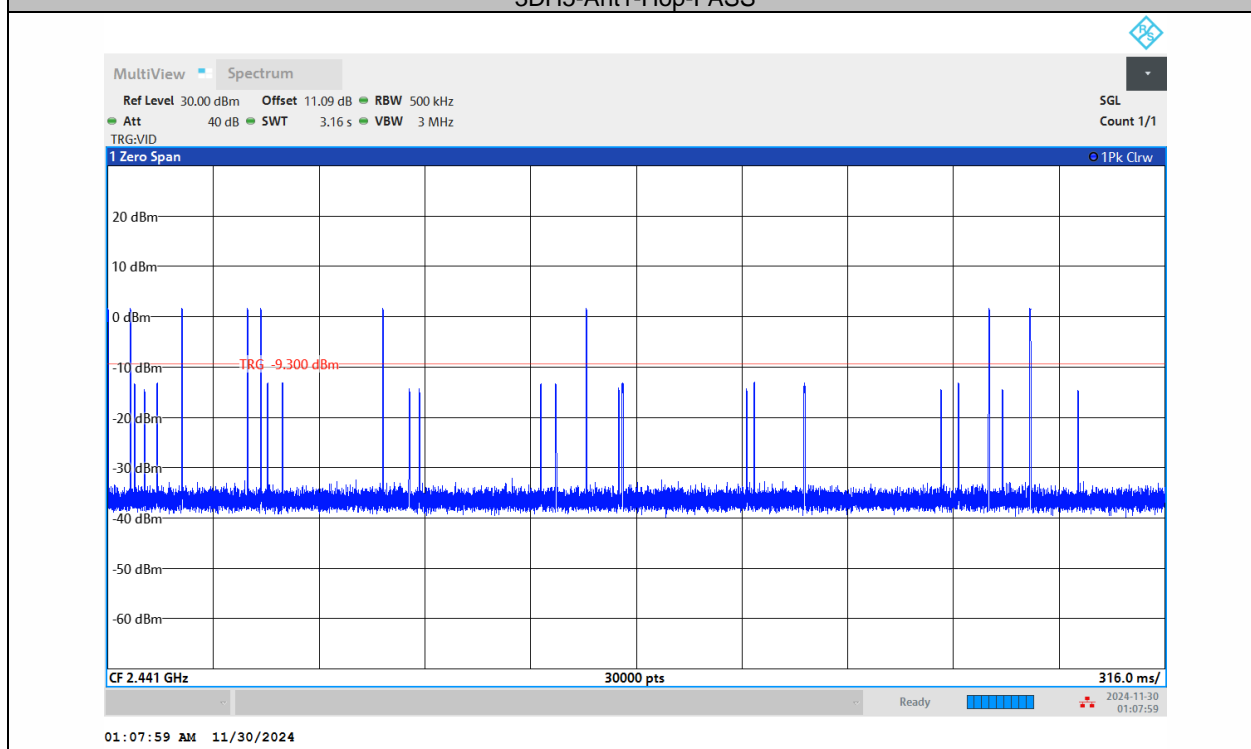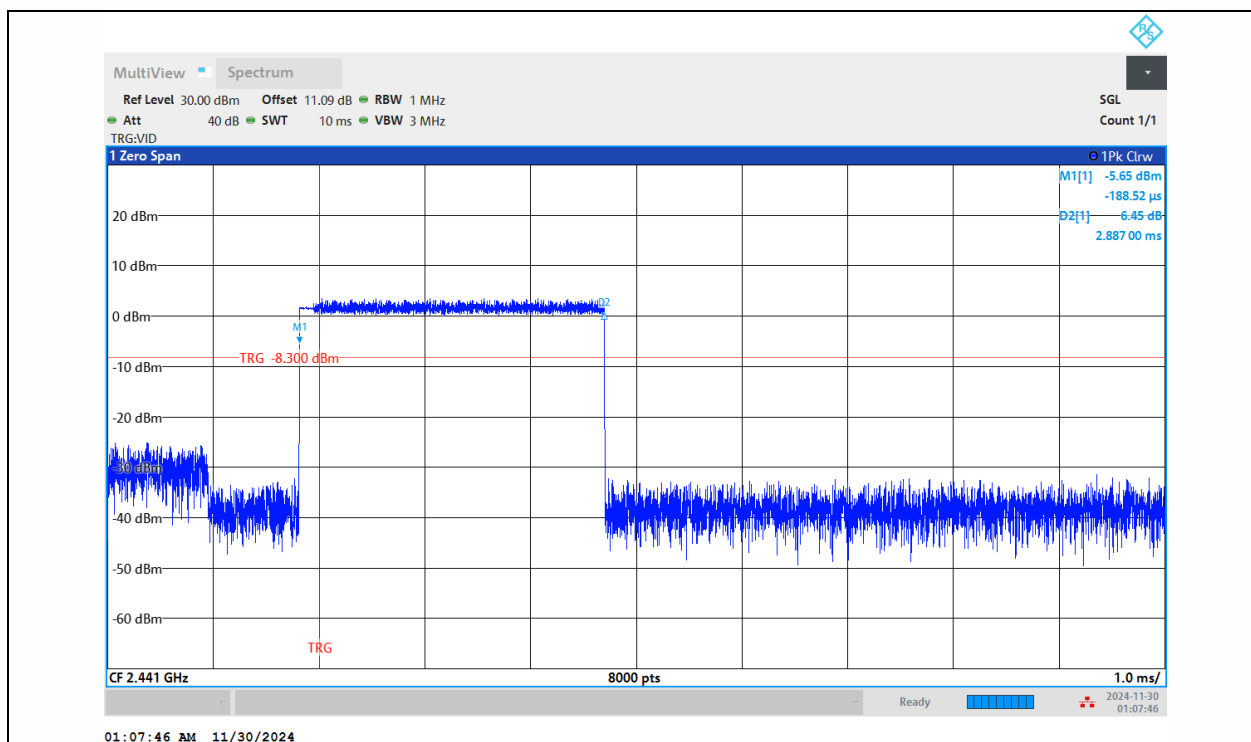

## 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02.

### 9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

### 9.5.4 Test Procedure

According to FCC Part15.247(b)(1).

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW  $\geq$  RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

### Test Results


Temperature : 25℃

ATM Pressure: 1011 mbar


Humidity : 45 %

Test Engineer: XXH


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	4.39	$\leq 20.97$	PASS
DH5	Ant1	2441	4.45	$\leq 20.97$	PASS
DH5	Ant1	2480	4.21	$\leq 20.97$	PASS
2DH5	Ant1	2402	3.69	$\leq 20.97$	PASS
2DH5	Ant1	2441	3.68	$\leq 20.97$	PASS
2DH5	Ant1	2480	3.57	$\leq 20.97$	PASS
3DH5	Ant1	2402	4.12	$\leq 20.97$	PASS
3DH5	Ant1	2441	4.20	$\leq 20.97$	PASS
3DH5	Ant1	2480	4.00	$\leq 20.97$	PASS

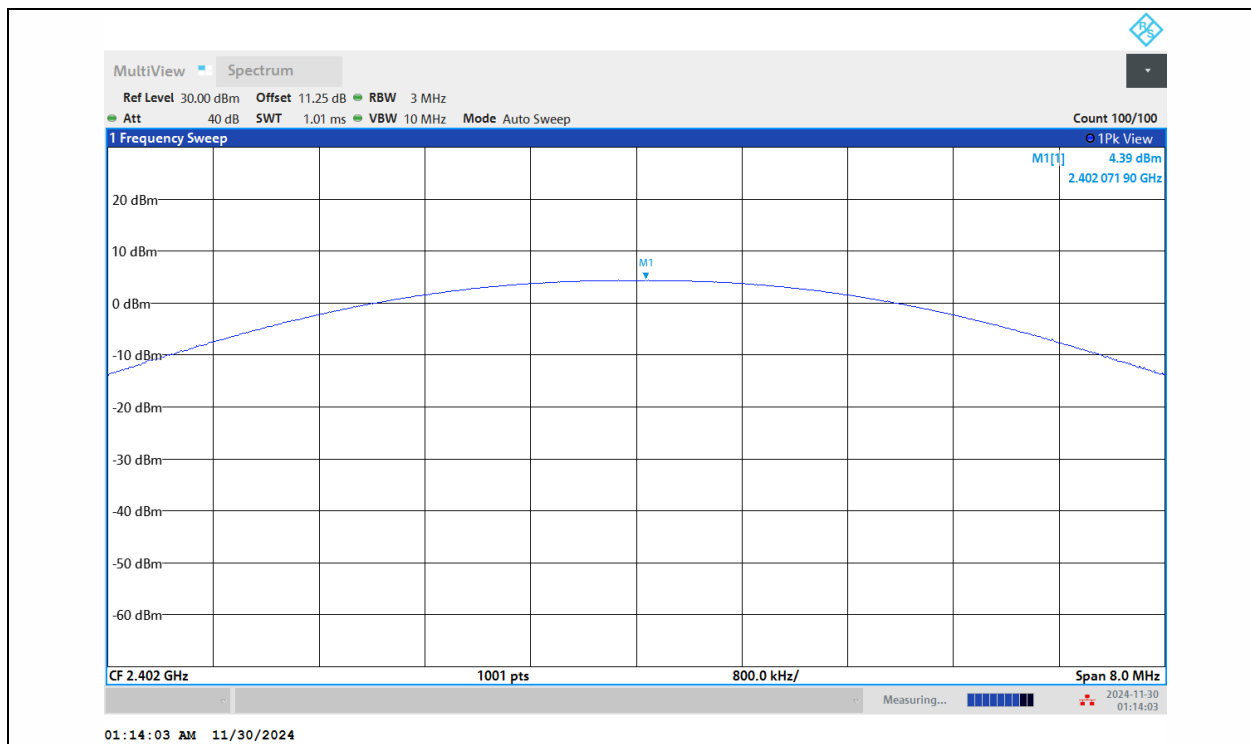


DH5-Ant1-2402-PASS

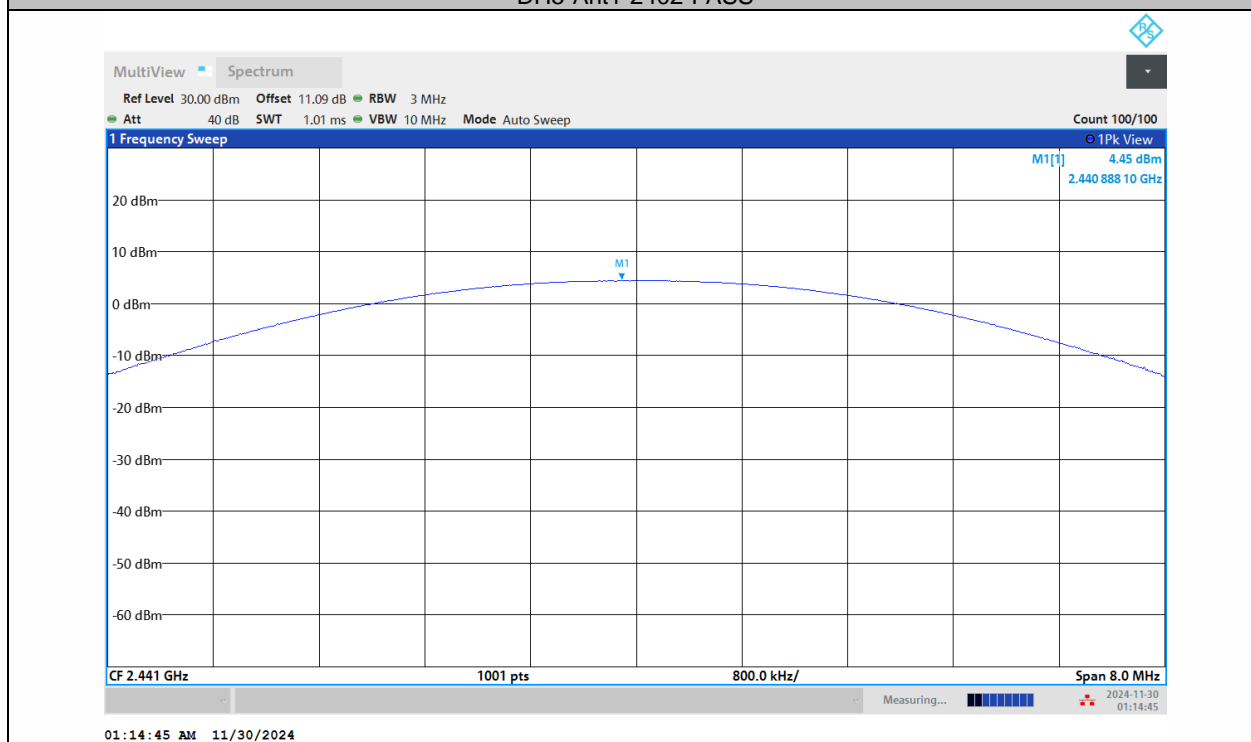


DH5-Ant1-2441-PASS

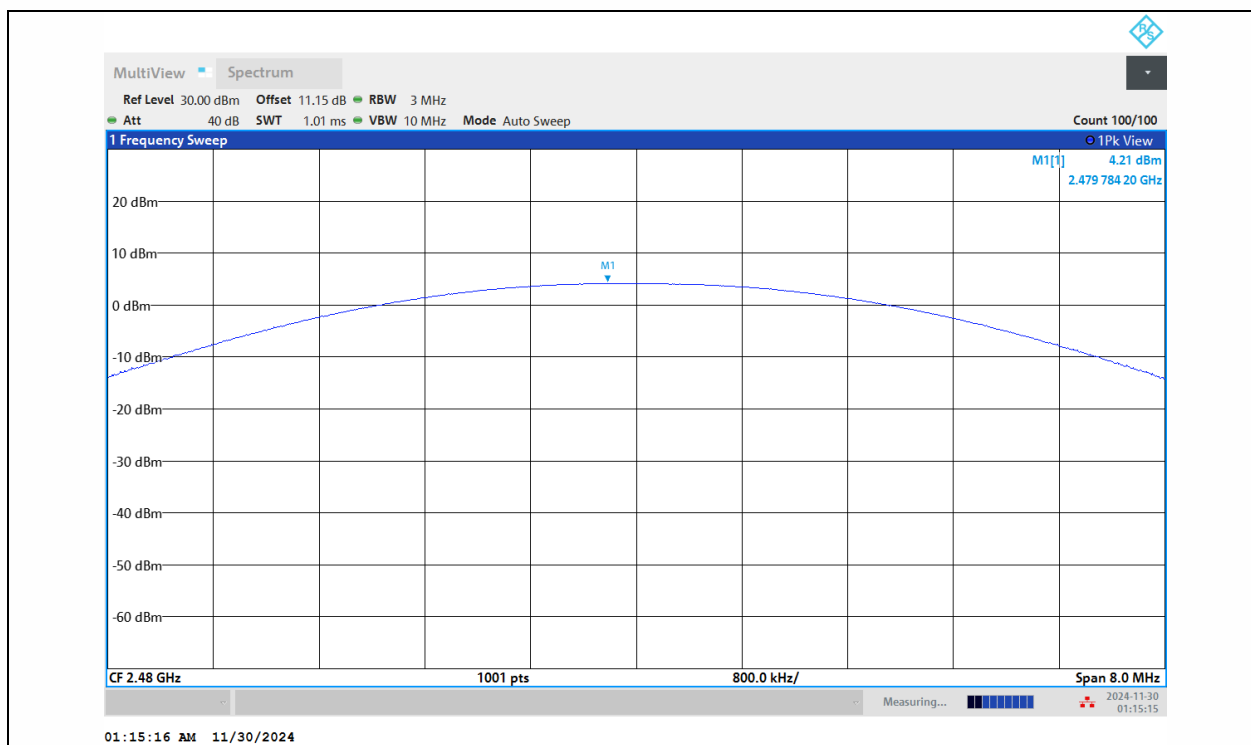


DH5-Ant1-2480-PASS

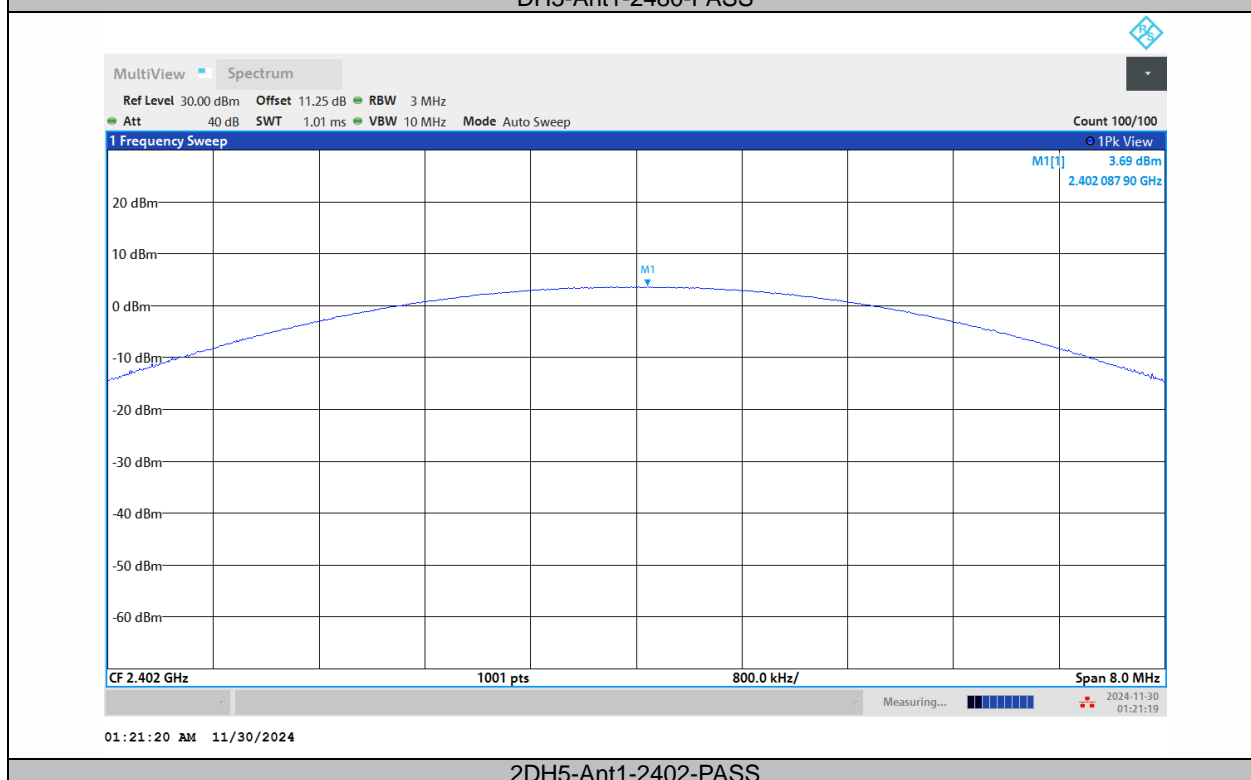


2DH5-Ant1-2402-PASS

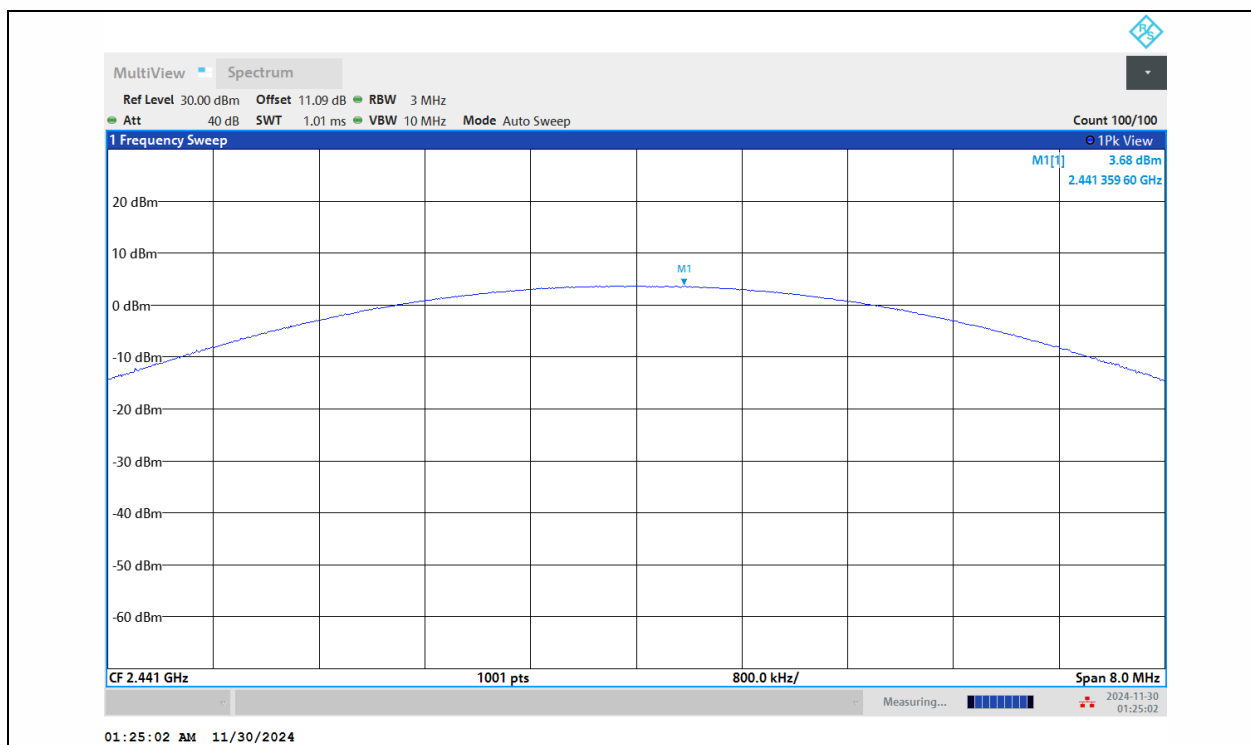


2DH5-Ant1-2441-PASS

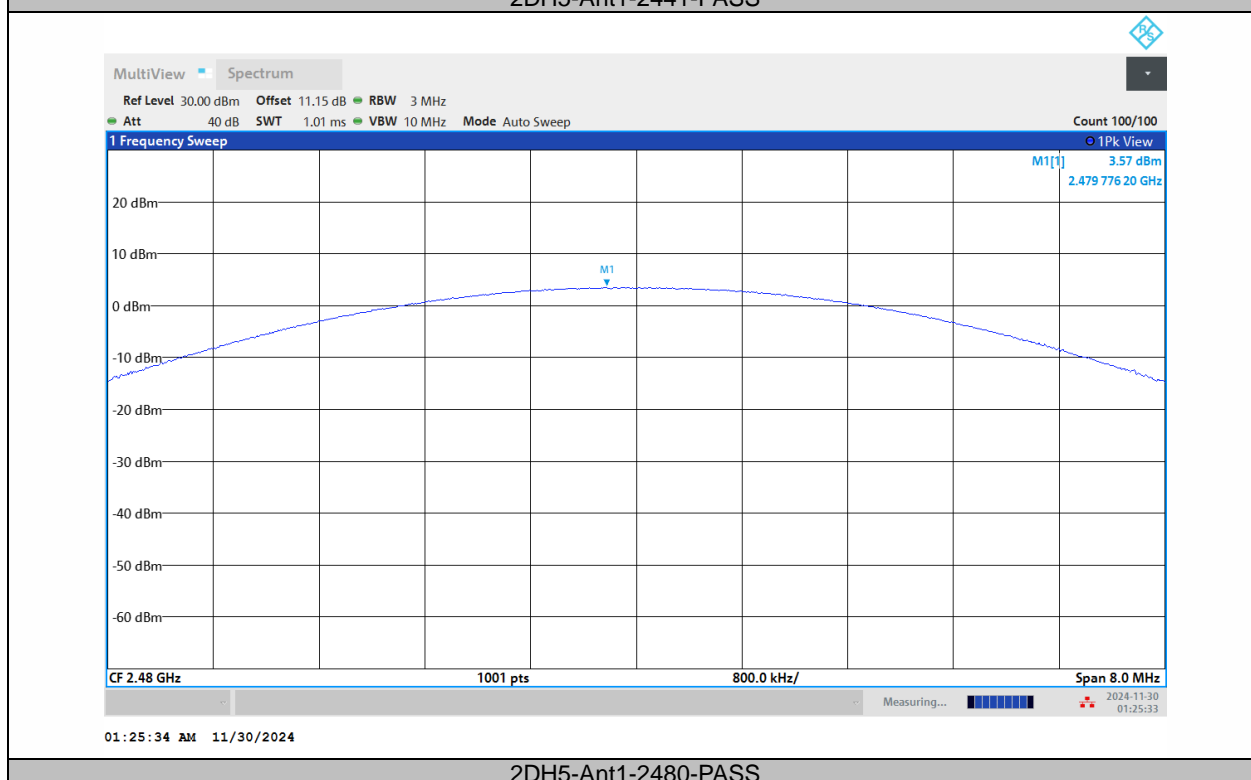


2DH5-Ant1-2480-PASS

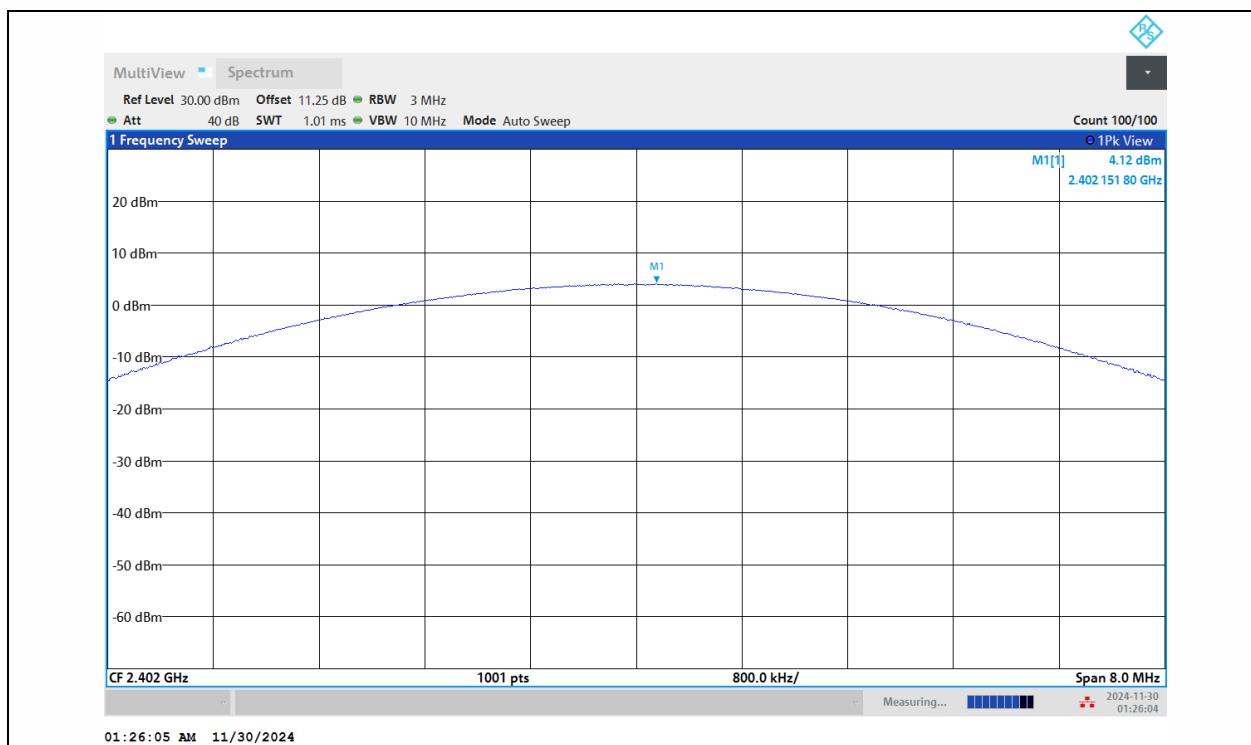

3DH5-Ant1-2402-PASS

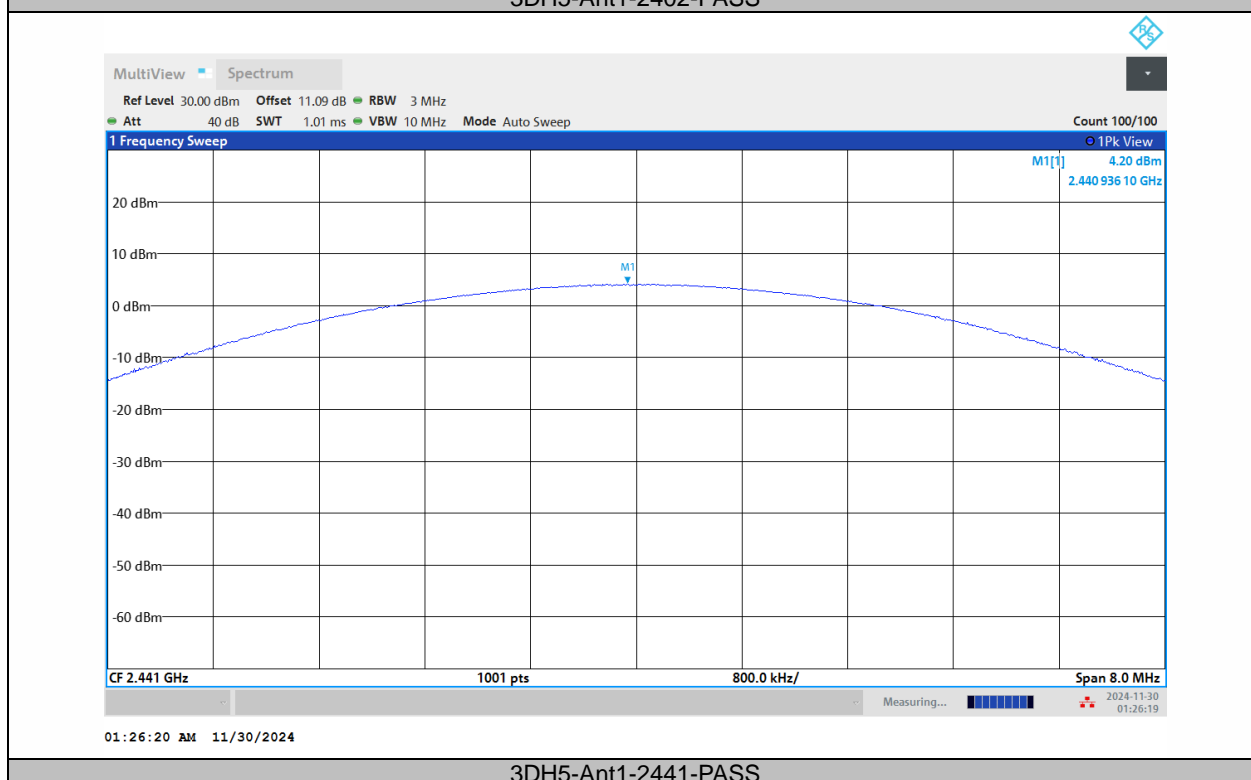

3DH5-Ant1-2441-PASS

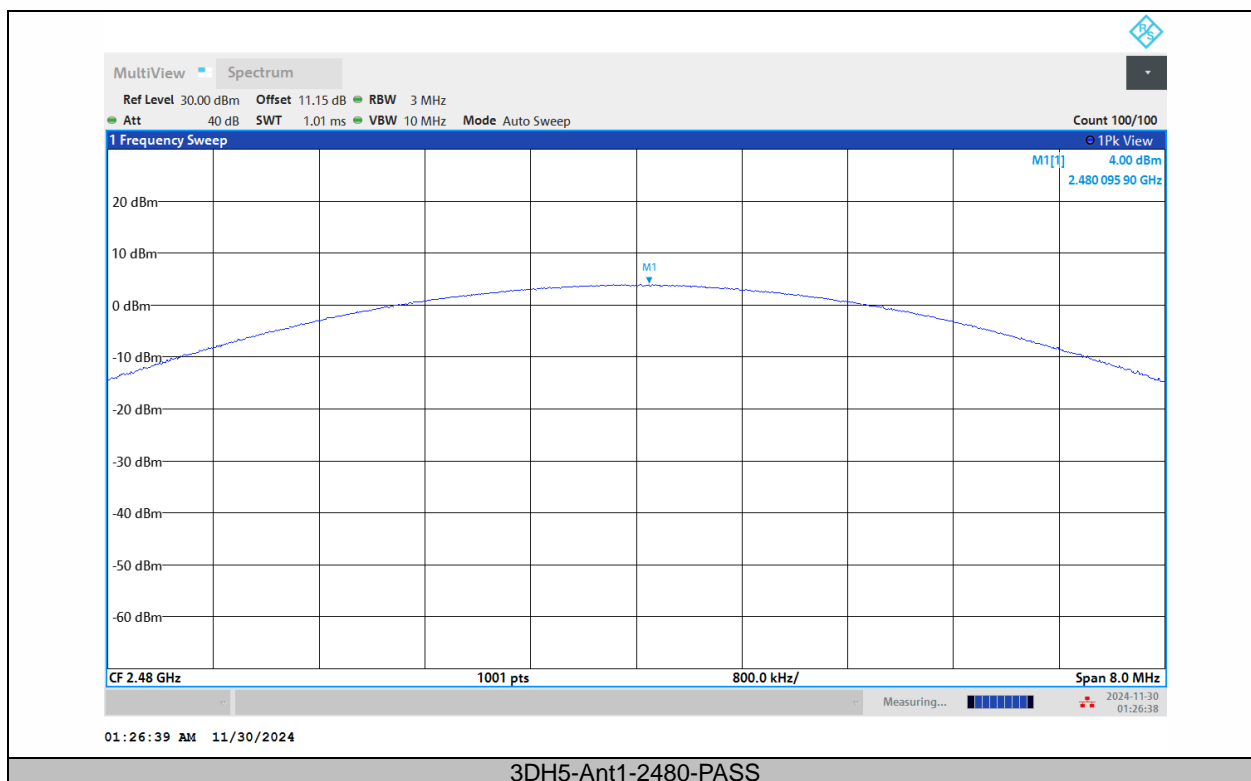

## 9.6 CONDUCTED SUPRIIOUS EMISSION

### 9.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02.

### 9.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

### 9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer.

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

#### ■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq 1\%$  of the span=100kHz.

Set VBW  $\geq$  RBW.

Set Sweep = auto.

Set Detector function = peak

Set Trace = max hold.

Allow the trace to stabilize.

Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT.

Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### ■ Conducted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to

25GHz).  
Set RBW = 100 kHz.  
Set VBW  $\geq$  RBW.  
Set Sweep = auto.  
Set Detector function = peak.  
Set Trace = max hold.  
Allow the trace to stabilize.  
Set the marker on the peak of any spurious emission recorded.  
The level displayed must comply with the limit specified in this Section.

### 9.6.5 Test Results

Temperature : 25°C                      ATM Pressure: 1011 mbar  
Humidity : 45 %                      Test Engineer: XXH

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:


#### Band edge measurements

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	3.82	-57.23	$\leq -16.18$	PASS
DH5	Ant1	High	2480	3.56	-57.59	$\leq -16.44$	PASS
DH5	Ant1	Low	Hop_2402	3.87	-53.68	$\leq -16.13$	PASS
DH5	Ant1	High	Hop_2480	3.61	-54.58	$\leq -16.39$	PASS
2DH5	Ant1	Low	2402	1.37	-57.03	$\leq -18.63$	PASS
2DH5	Ant1	High	2480	1.15	-58.84	$\leq -18.85$	PASS
2DH5	Ant1	Low	Hop_2402	1.64	-55.14	$\leq -18.36$	PASS
2DH5	Ant1	High	Hop_2480	1.54	-56.29	$\leq -18.46$	PASS
3DH5	Ant1	Low	2402	1.47	-57.7	$\leq -18.53$	PASS
3DH5	Ant1	High	2480	1.25	-58.95	$\leq -18.75$	PASS
3DH5	Ant1	Low	Hop_2402	1.30	-55.13	$\leq -18.7$	PASS
3DH5	Ant1	High	Hop_2480	1.90	-56.57	$\leq -18.1$	PASS


**Conducted Spurious Emission**

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	3.90	3.90	---	PASS
DH5	Ant1	2402	30~1000	3.90	-64.51	≤-16.1	PASS
DH5	Ant1	2402	1000~26500	3.90	-57.24	≤-16.1	PASS
DH5	Ant1	2441	0~Reference	3.97	3.97	---	PASS
DH5	Ant1	2441	30~1000	3.97	-63.48	≤-16.03	PASS
DH5	Ant1	2441	1000~26500	3.97	-57.53	≤-16.03	PASS
DH5	Ant1	2480	0~Reference	3.61	3.61	---	PASS
DH5	Ant1	2480	30~1000	3.61	-63.7	≤-16.39	PASS
DH5	Ant1	2480	1000~26500	3.61	-57.58	≤-16.39	PASS
2DH5	Ant1	2402	0~Reference	1.36	1.36	---	PASS
2DH5	Ant1	2402	30~1000	1.36	-64.55	≤-18.64	PASS
2DH5	Ant1	2402	1000~26500	1.36	-56.91	≤-18.64	PASS
2DH5	Ant1	2441	0~Reference	1.44	1.44	---	PASS
2DH5	Ant1	2441	30~1000	1.44	-63.39	≤-18.56	PASS
2DH5	Ant1	2441	1000~26500	1.44	-57.81	≤-18.56	PASS
2DH5	Ant1	2480	0~Reference	1.29	1.29	---	PASS
2DH5	Ant1	2480	30~1000	1.29	-63.77	≤-18.71	PASS
2DH5	Ant1	2480	1000~26500	1.29	-57	≤-18.71	PASS
3DH5	Ant1	2402	0~Reference	1.47	1.47	---	PASS
3DH5	Ant1	2402	30~1000	1.47	-63.76	≤-18.53	PASS
3DH5	Ant1	2402	1000~26500	1.47	-57.62	≤-18.53	PASS
3DH5	Ant1	2441	0~Reference	1.49	1.49	---	PASS
3DH5	Ant1	2441	30~1000	1.49	-63.65	≤-18.51	PASS
3DH5	Ant1	2441	1000~26500	1.49	-57.77	≤-18.51	PASS
3DH5	Ant1	2480	0~Reference	1.28	1.28	---	PASS
3DH5	Ant1	2480	30~1000	1.28	-63.22	≤-18.72	PASS
3DH5	Ant1	2480	1000~26500	1.28	-57.78	≤-18.72	PASS


## Band edge measurements

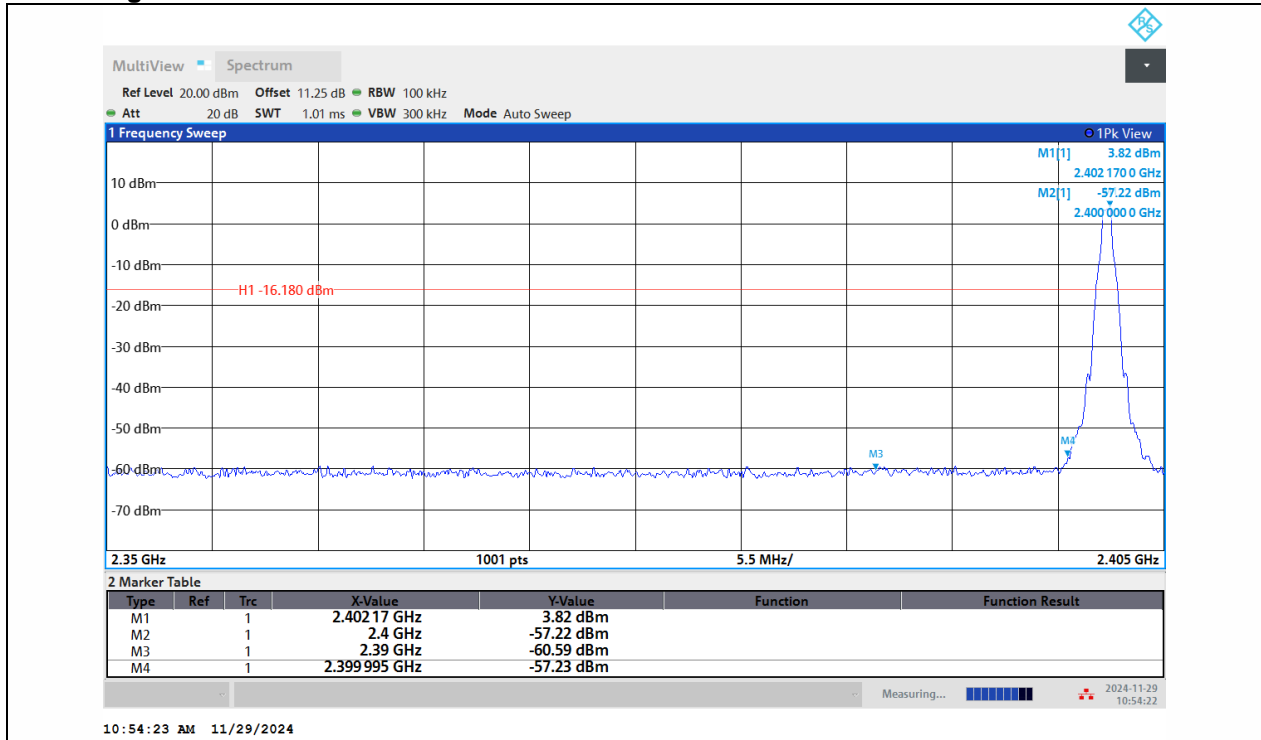


DH5-Ant1-2402-PASS

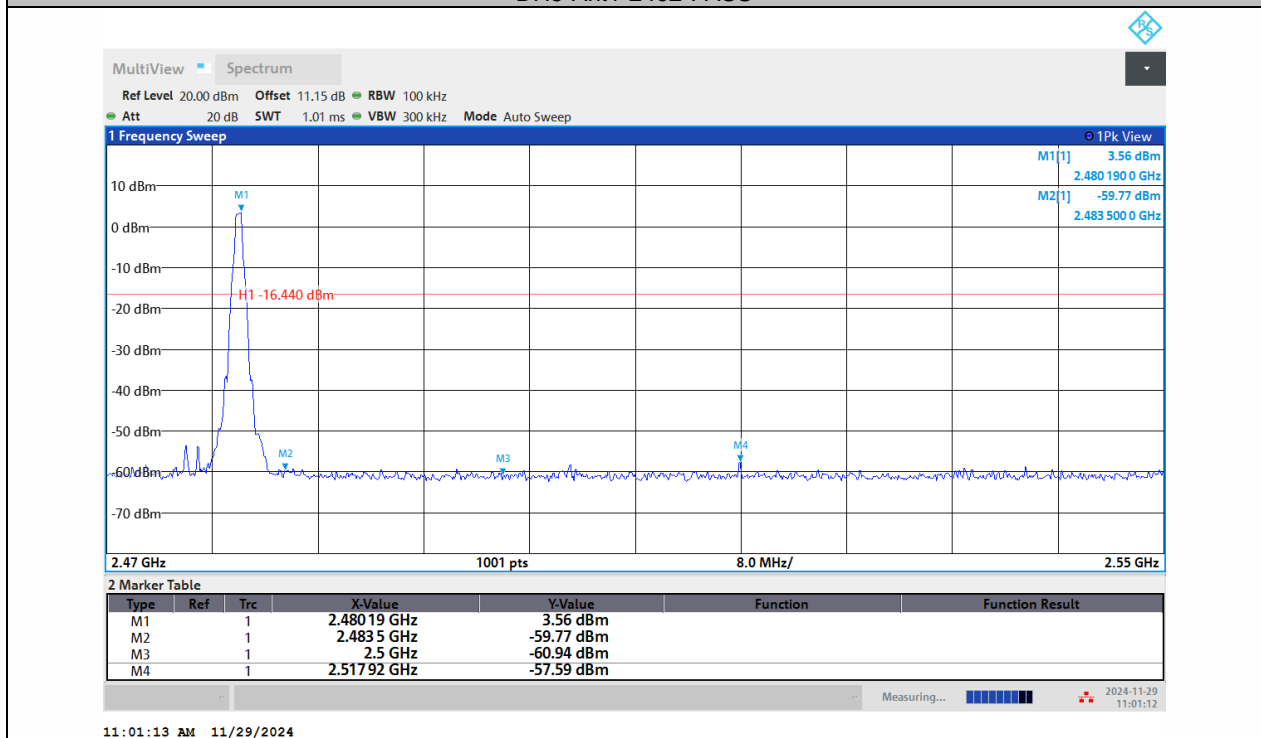


DH5-Ant1-2480-PASS

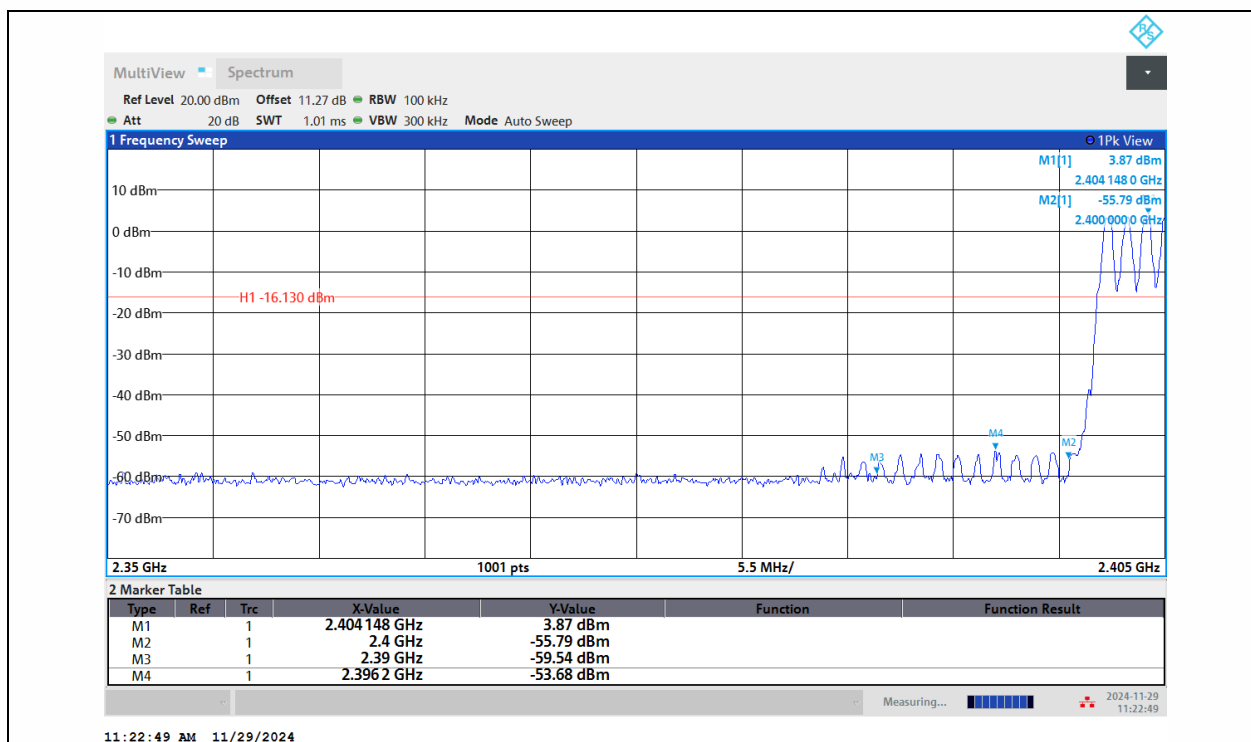


## DH5-Ant1-Hop\_2402-PASS

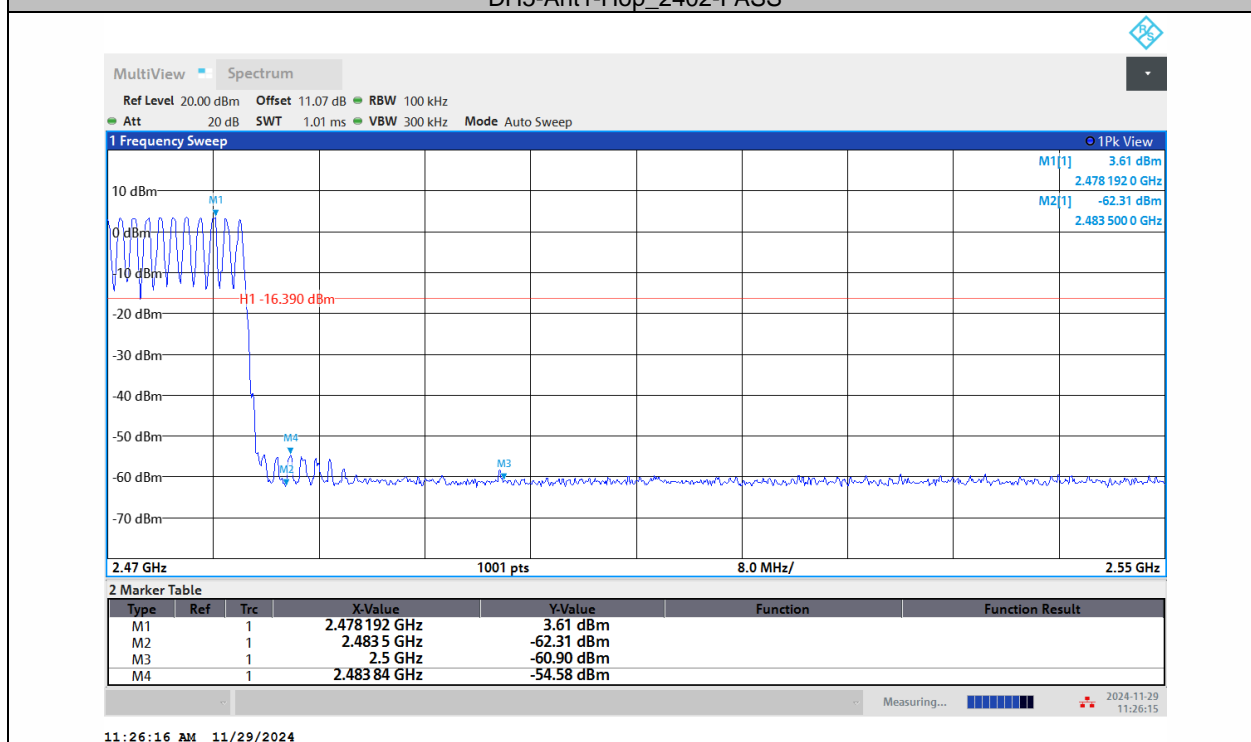


## DH5-Ant1-Hop\_2480-PASS

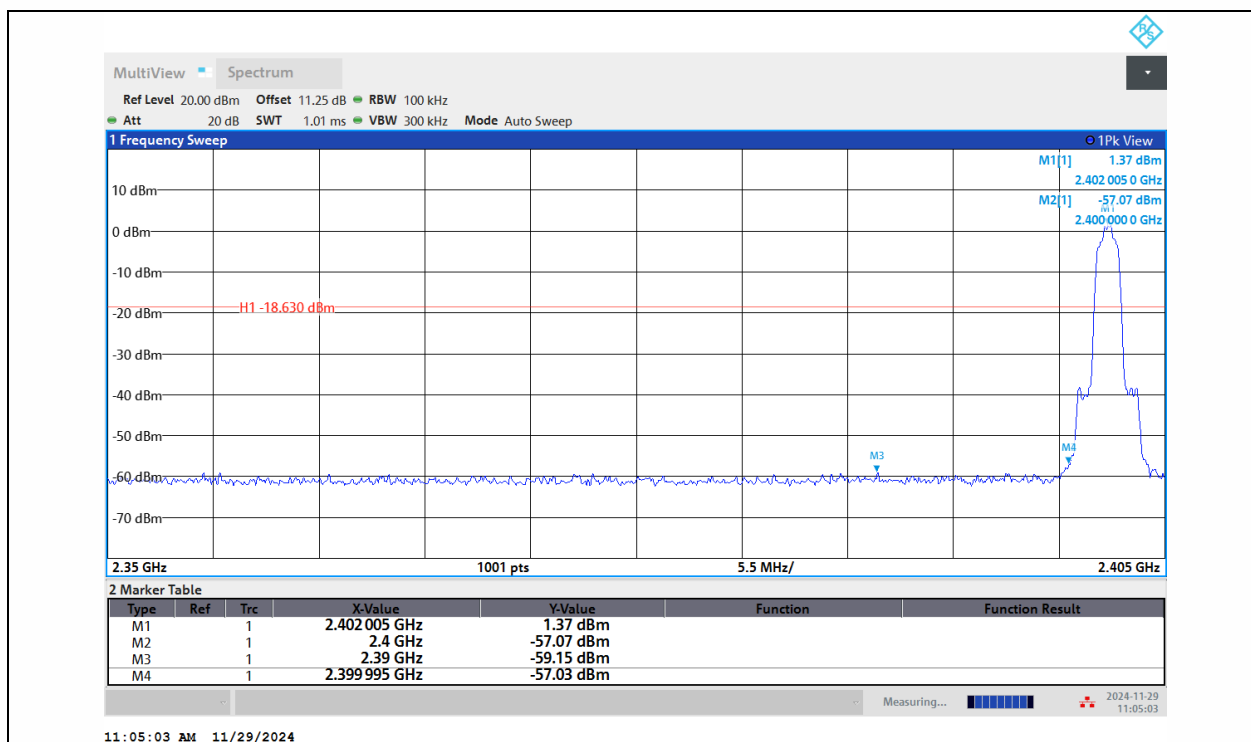


## 2DH5-Ant1-2402-PASS

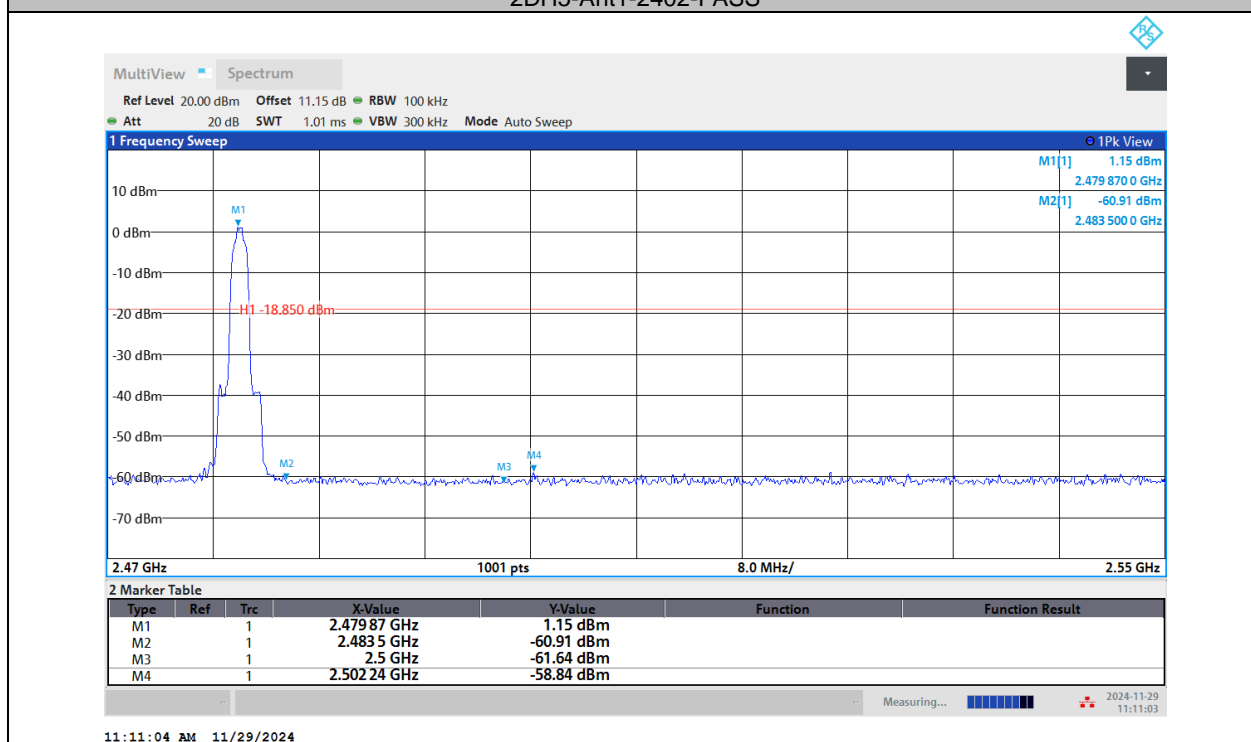


## 2DH5-Ant1-2480-PASS

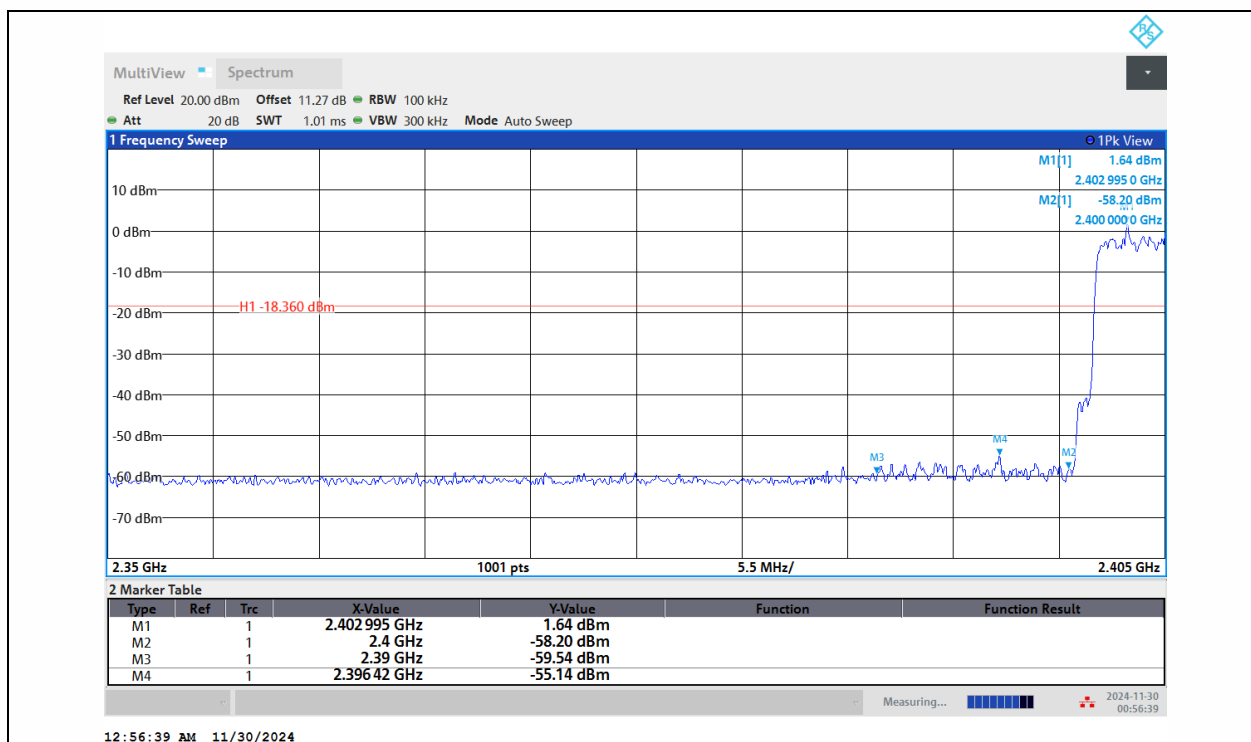


## 2DH5-Ant1-Hop\_2402-PASS

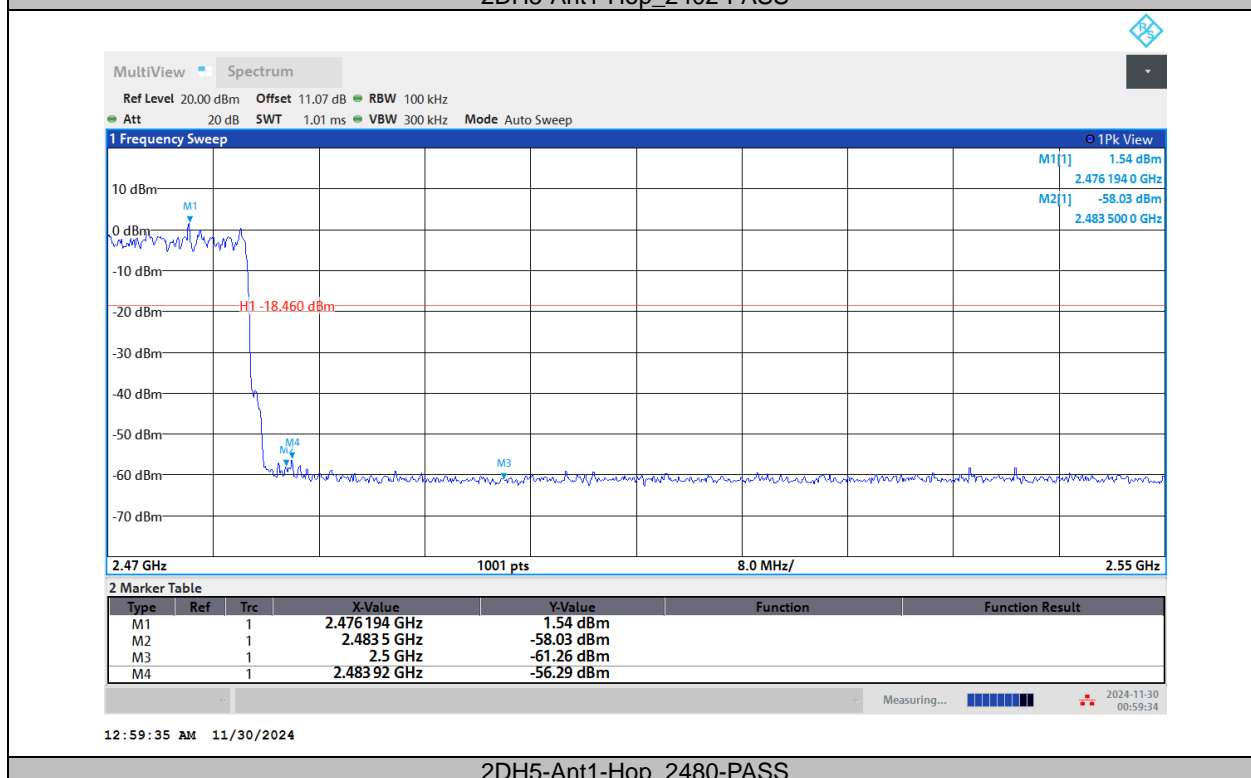


## 2DH5-Ant1-Hop\_2480-PASS

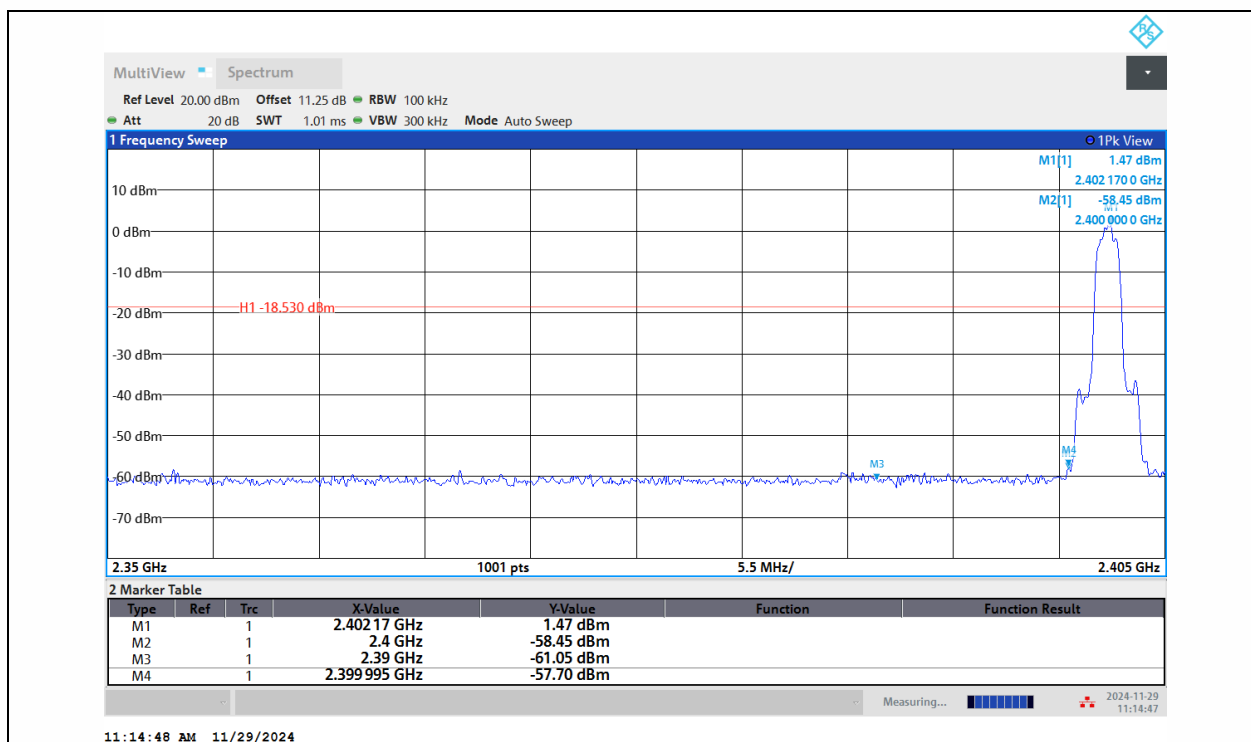


## 3DH5-Ant1-2402-PASS

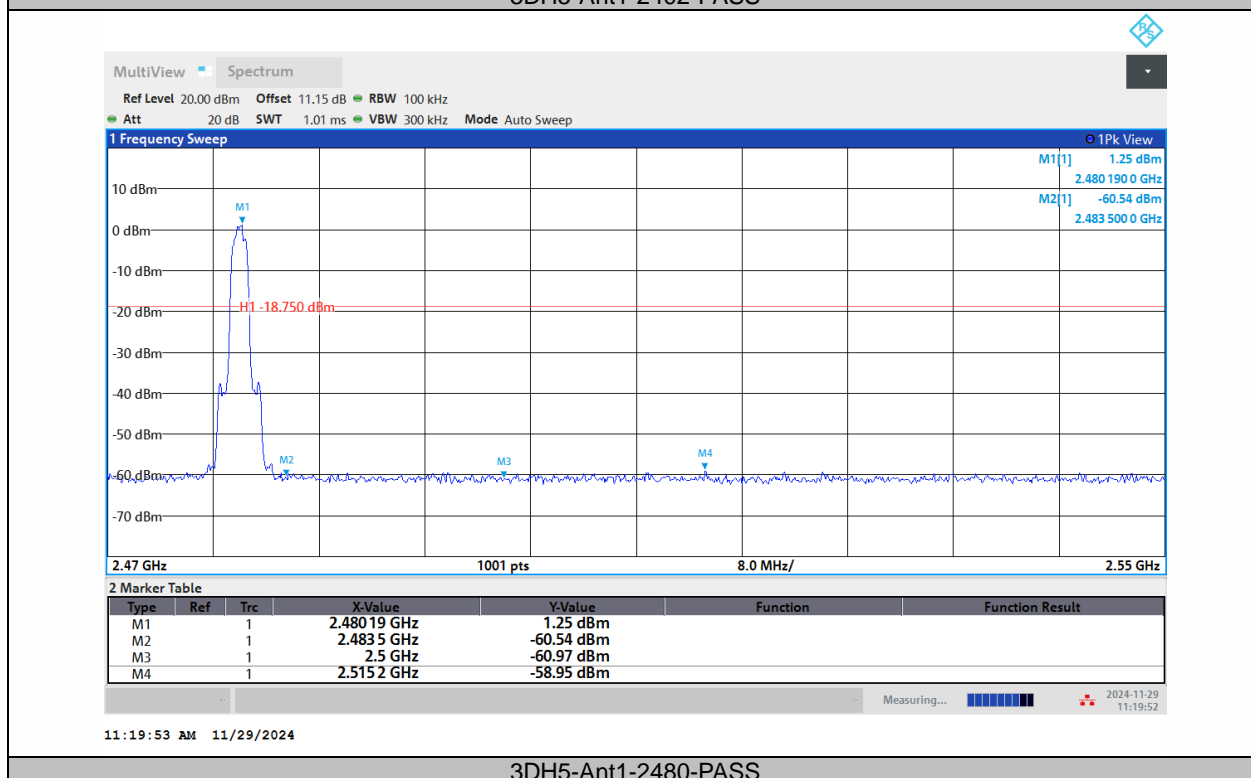

## 3DH5-Ant1-2480-PASS

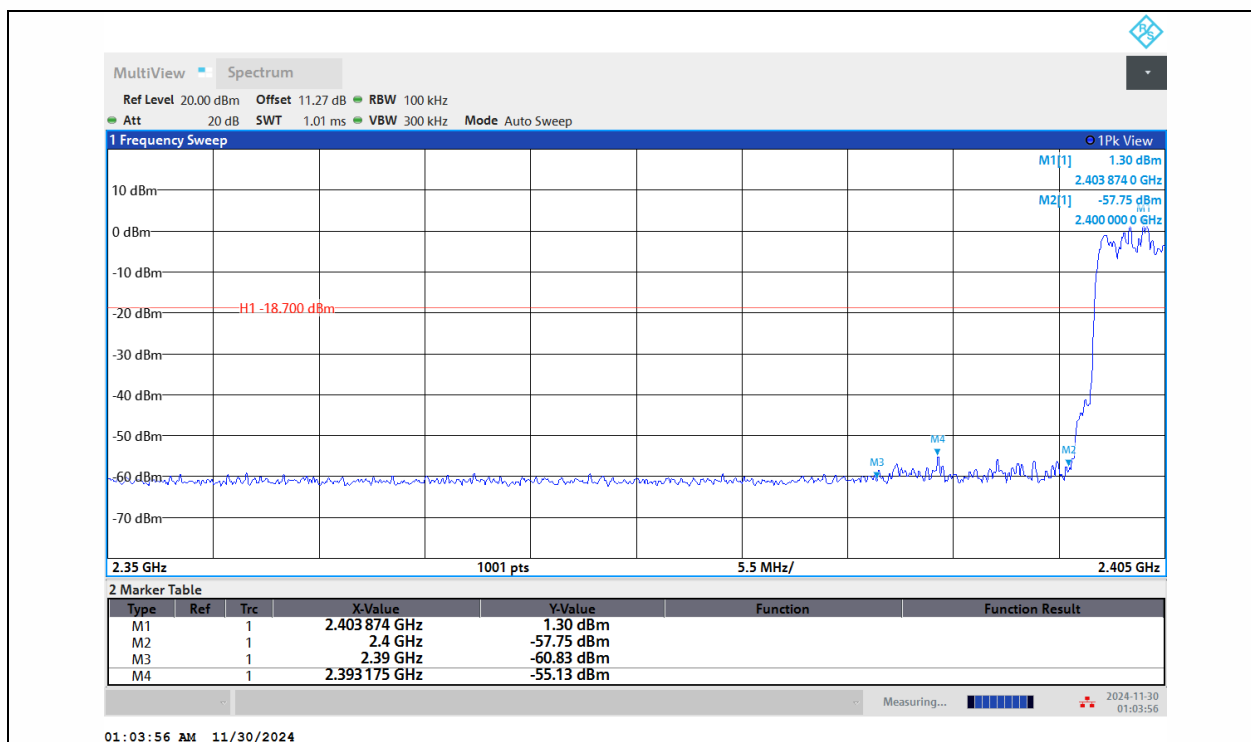


## 3DH5-Ant1-Hop\_2402-PASS

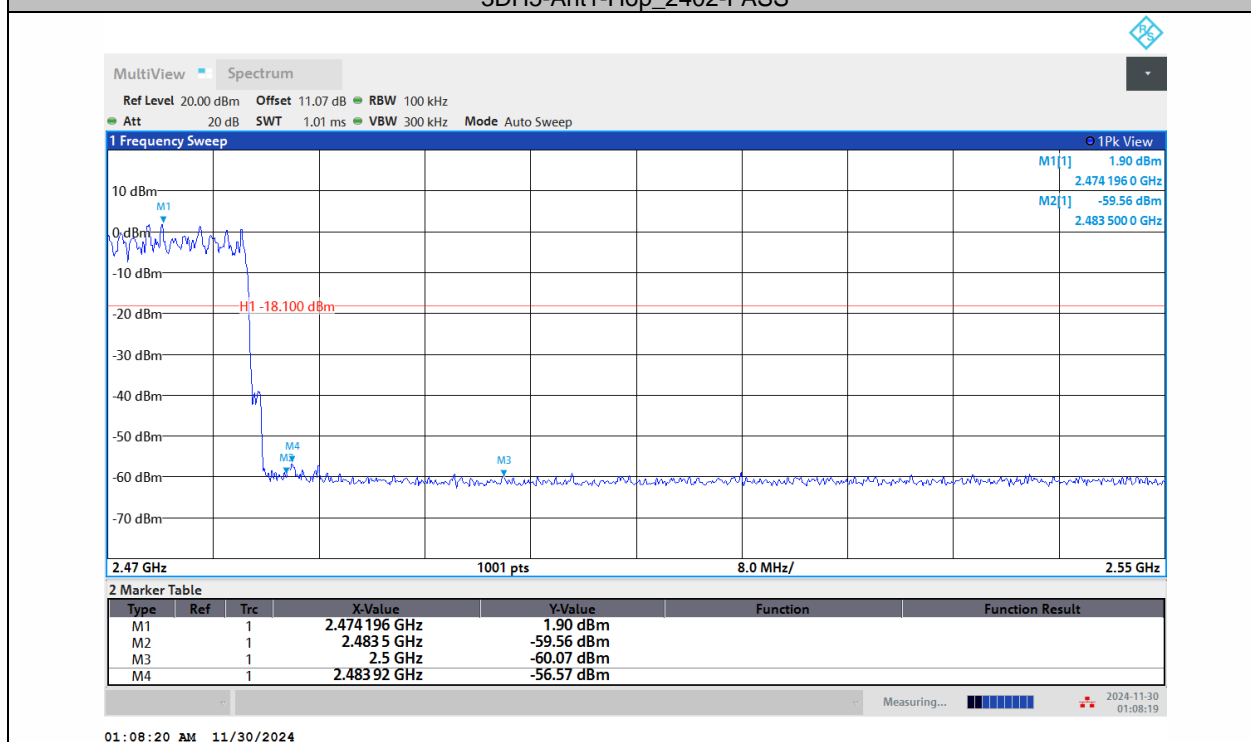


## 3DH5-Ant1-Hop\_2480-PASS


## Conducted Spurious Emission

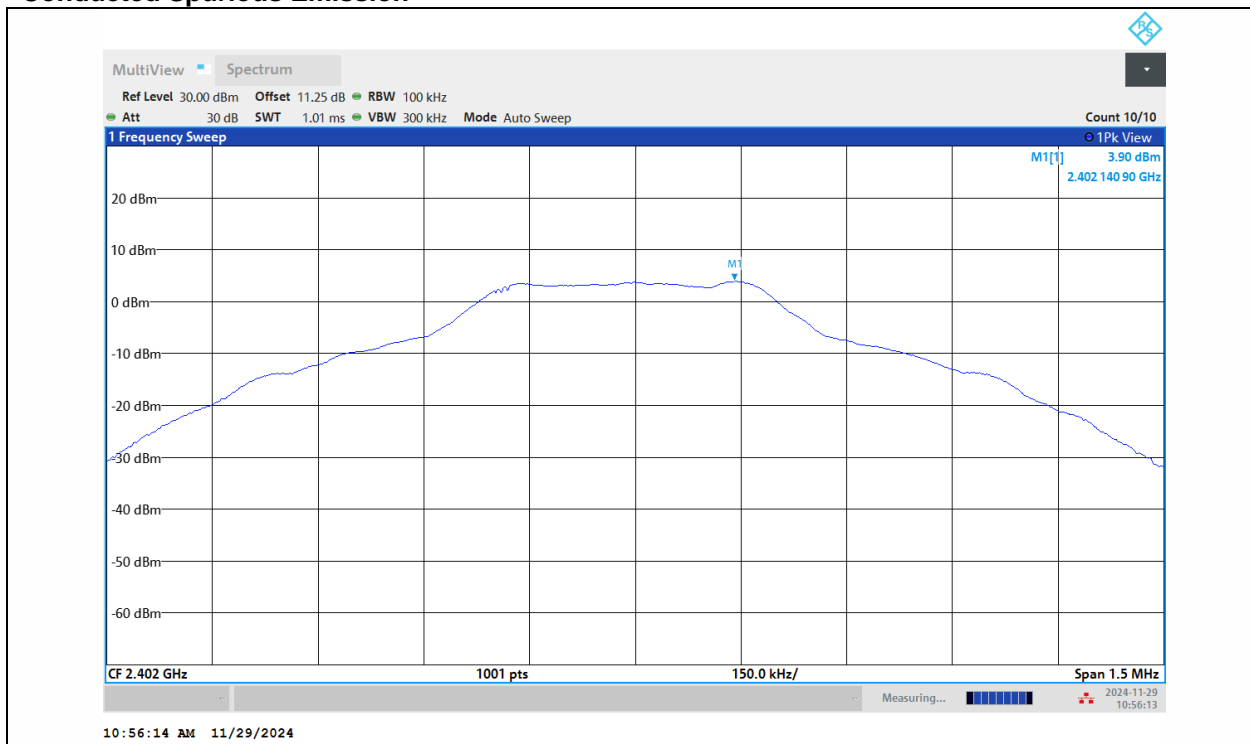


DH5-Ant1-2402-0~Reference-PASS

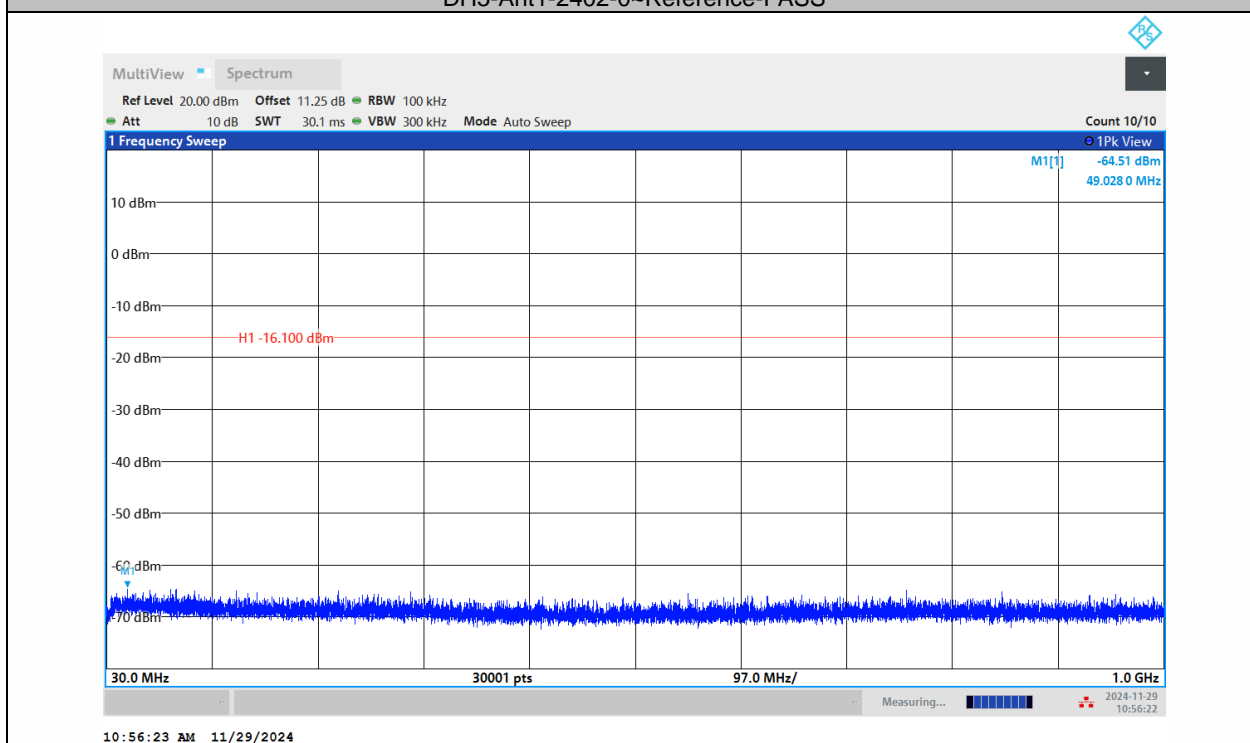


DH5-Ant1-2402-30~1000-PASS

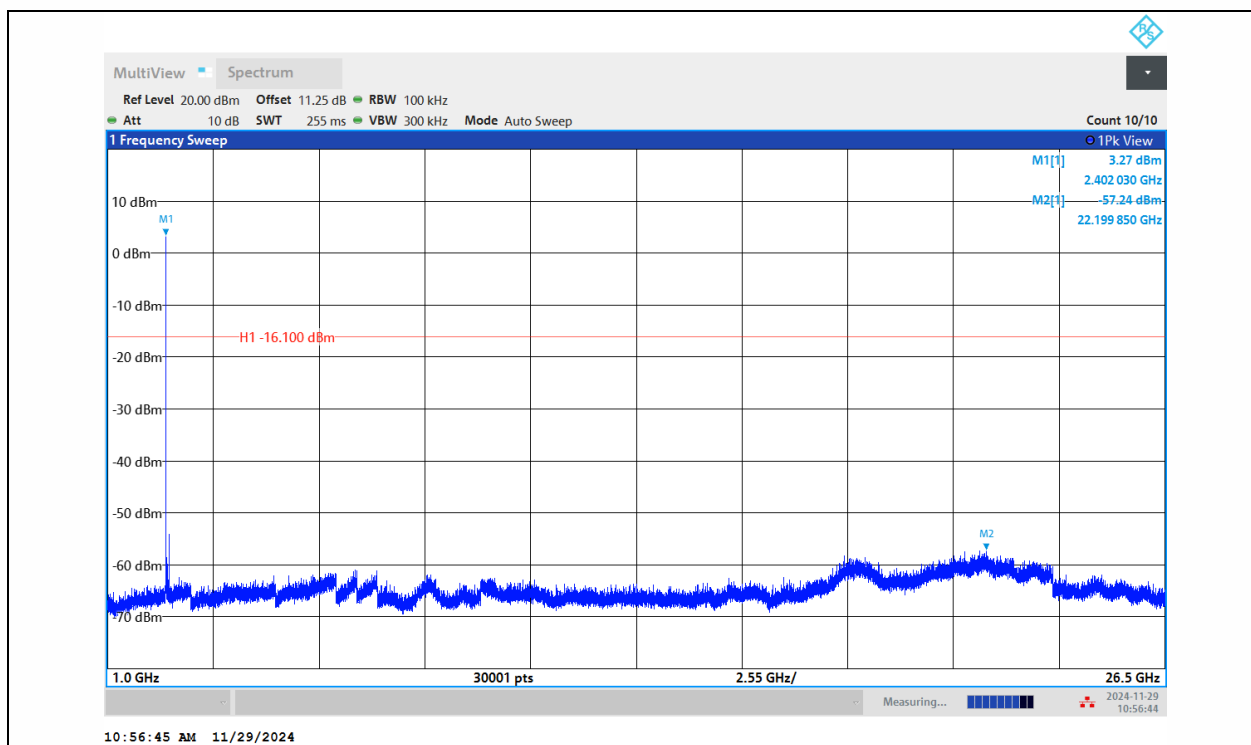


DH5-Ant1-2402-1000~26500-PASS

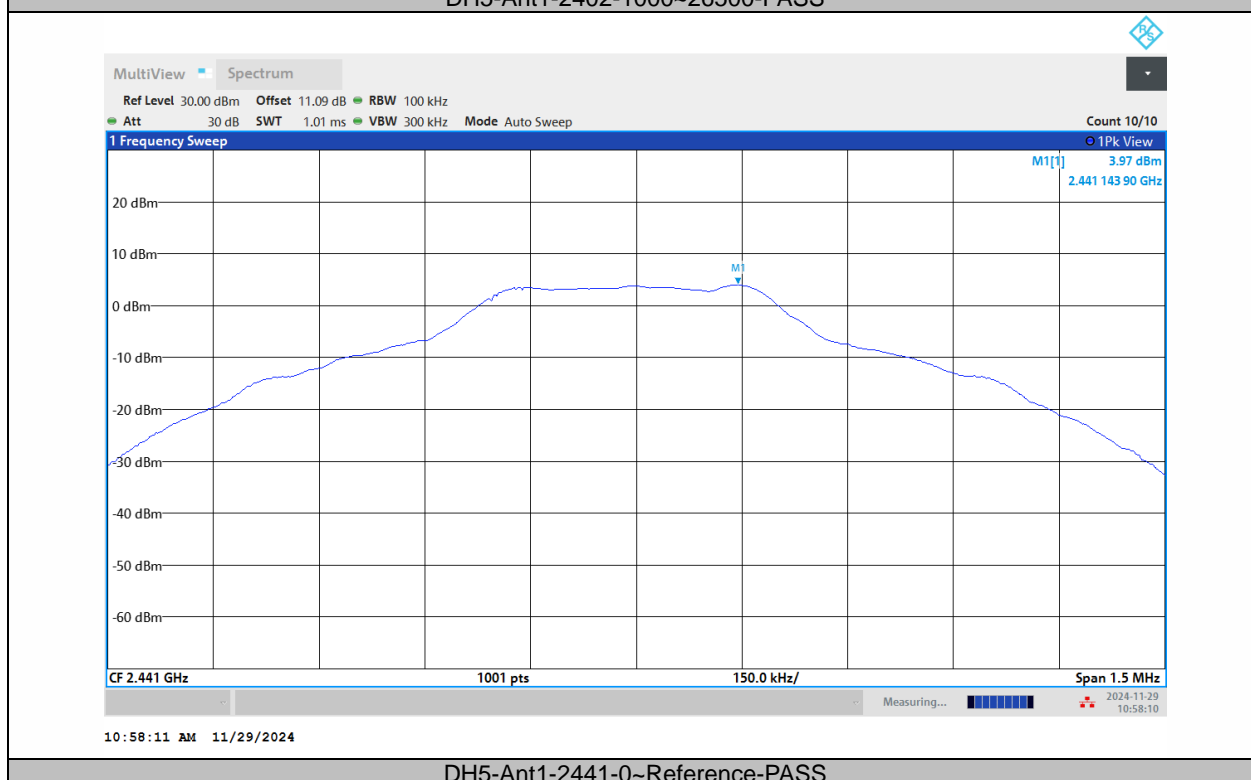


DH5-Ant1-2441-0~Reference-PASS

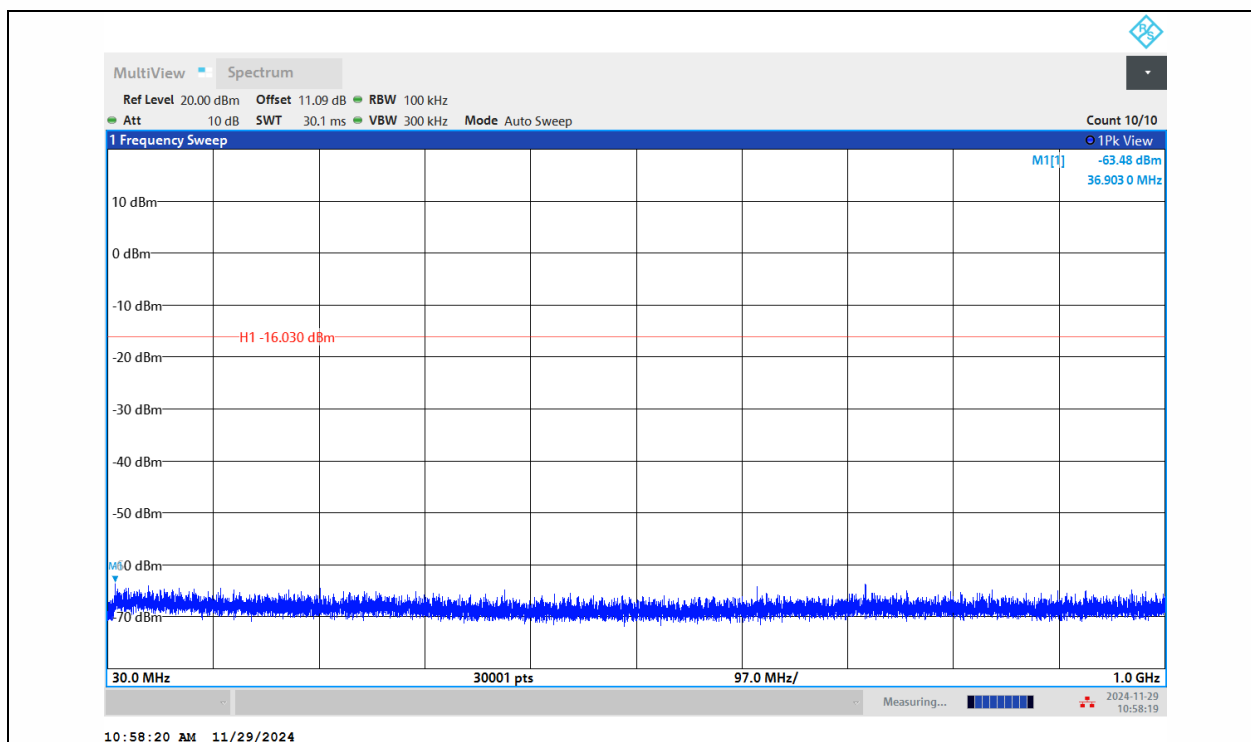


DH5-Ant1-2441-30~1000-PASS

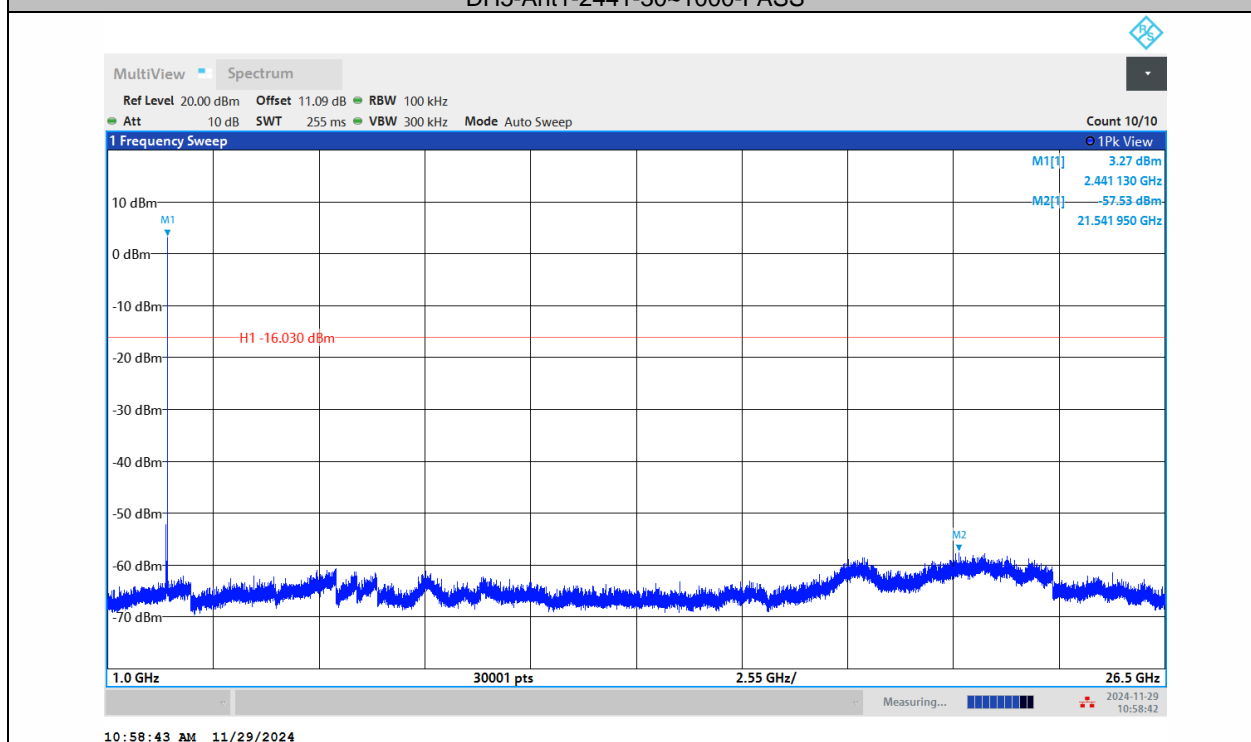


DH5-Ant1-2441-1000~26500-PASS

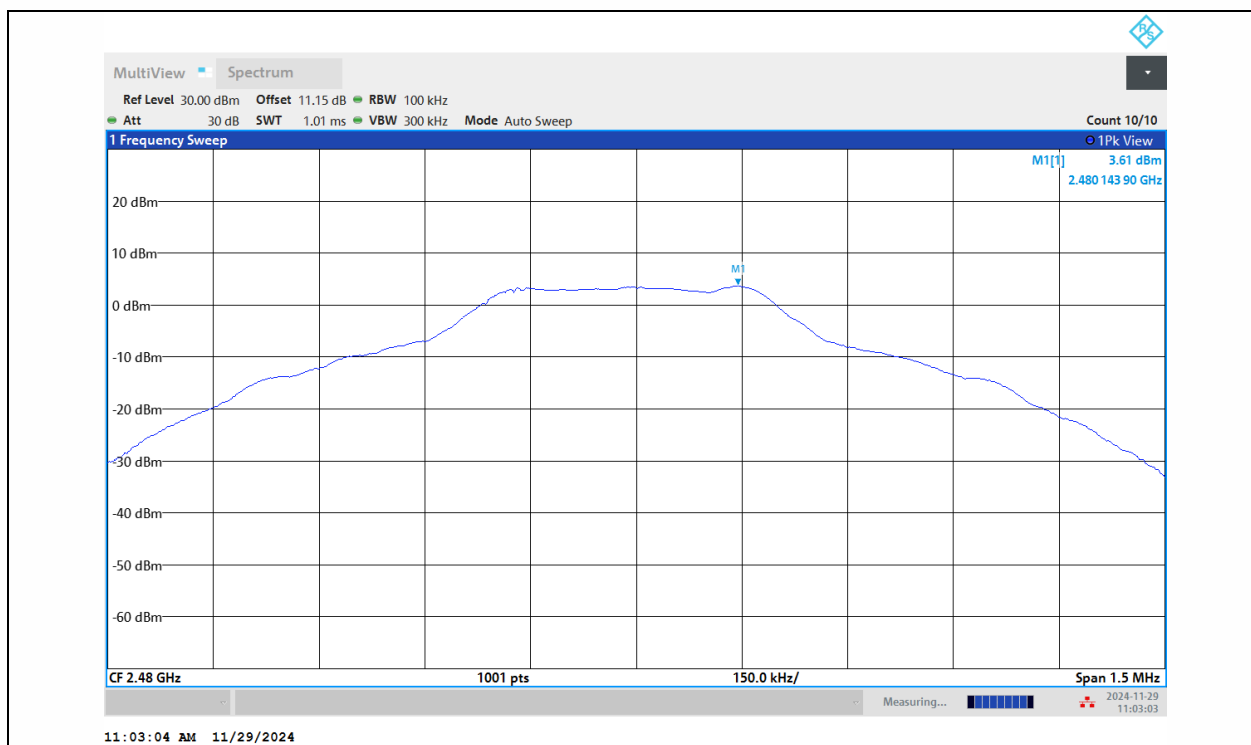


DH5-Ant1-2480-0~Reference-PASS

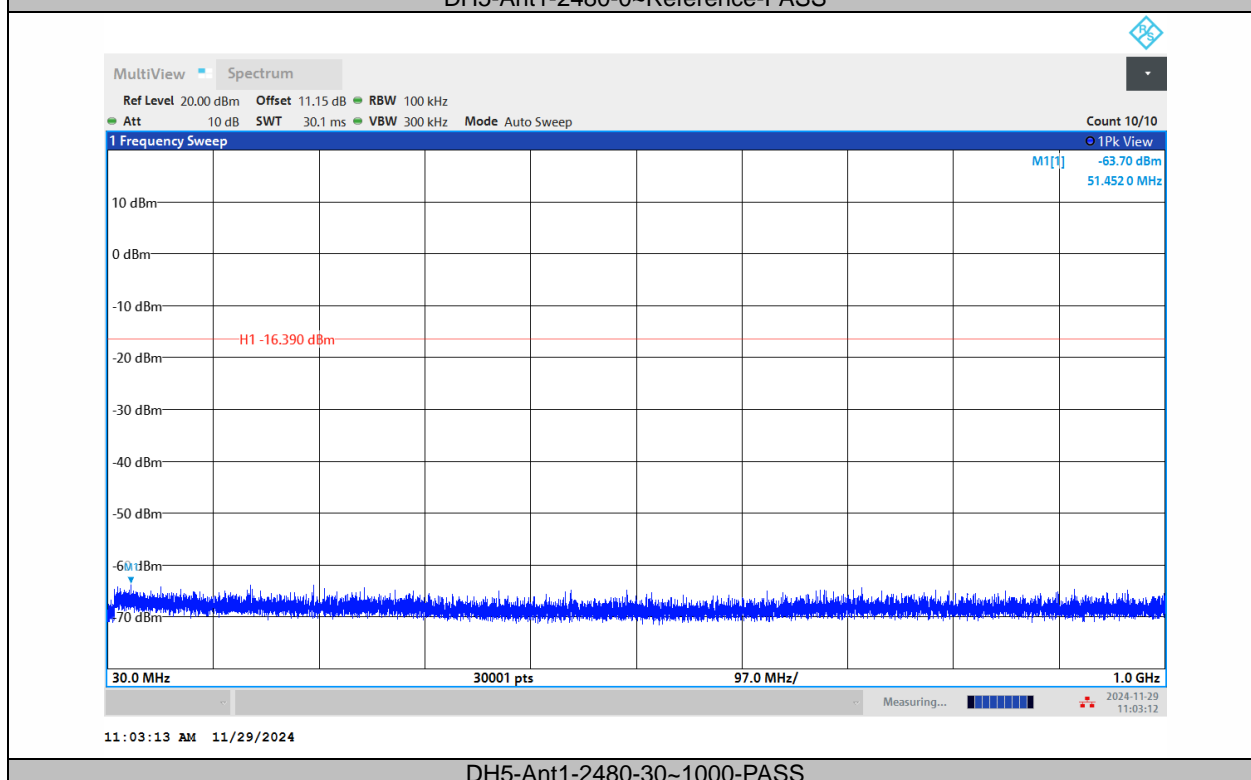


DH5-Ant1-2480-30~1000-PASS

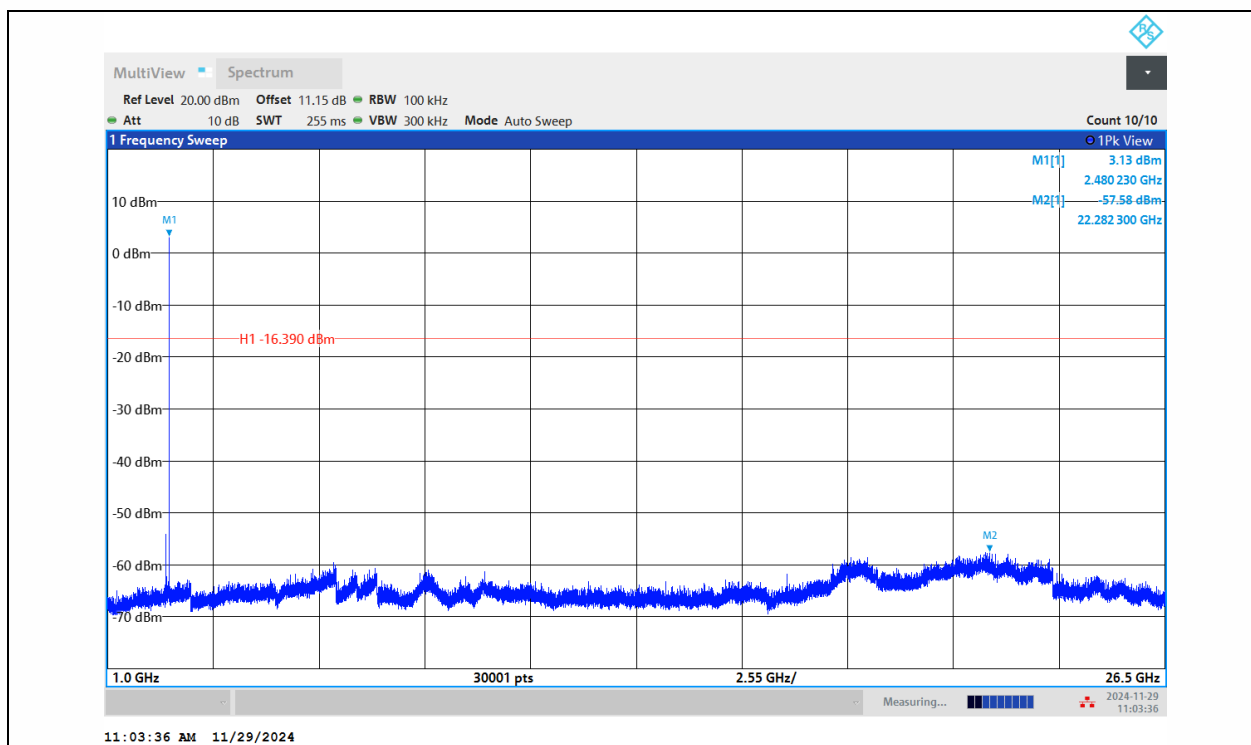


DH5-Ant1-2480-1000~26500-PASS

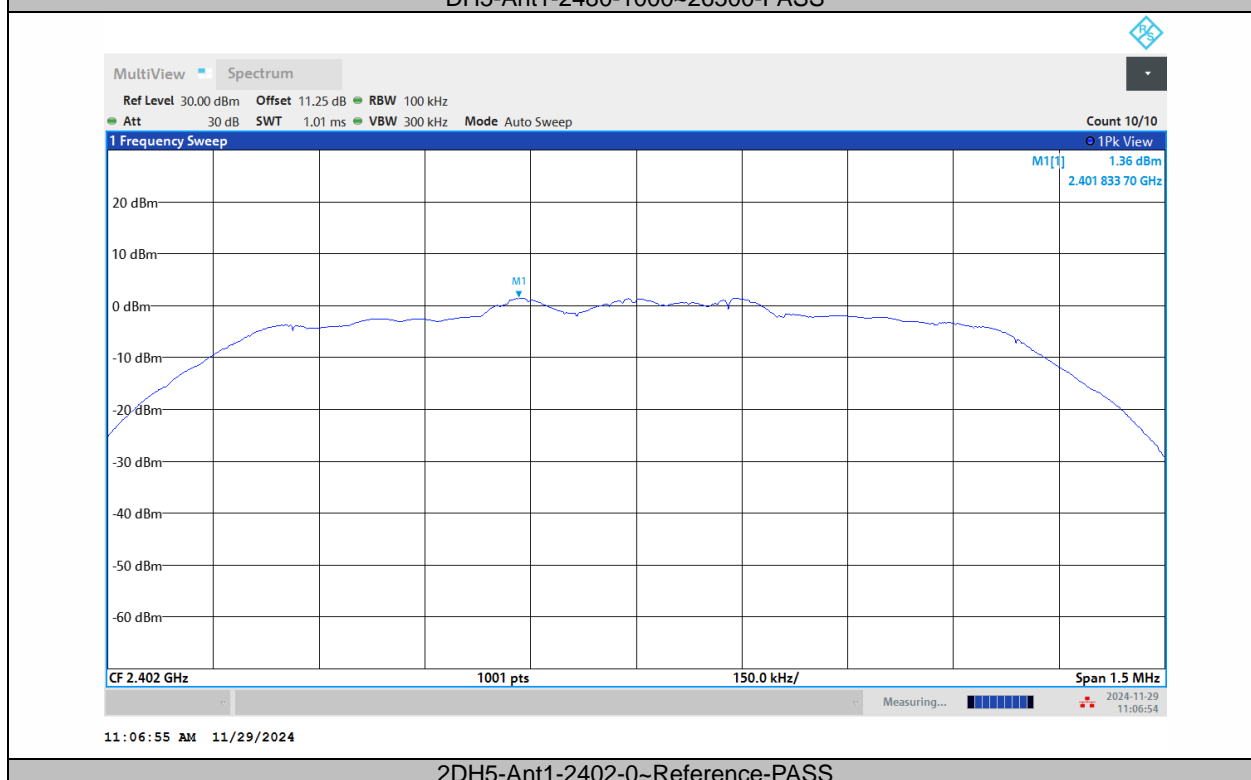


2DH5-Ant1-2402-0~Reference-PASS

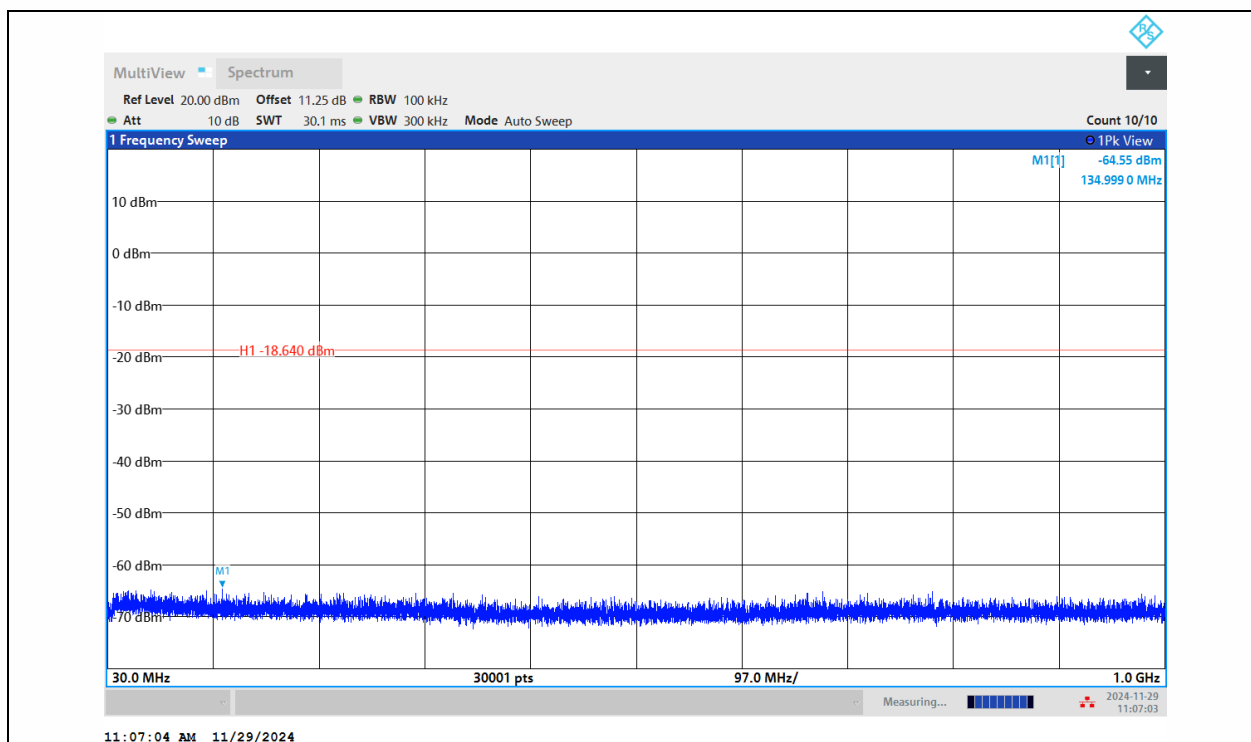


2DH5-Ant1-2402-30~1000-PASS

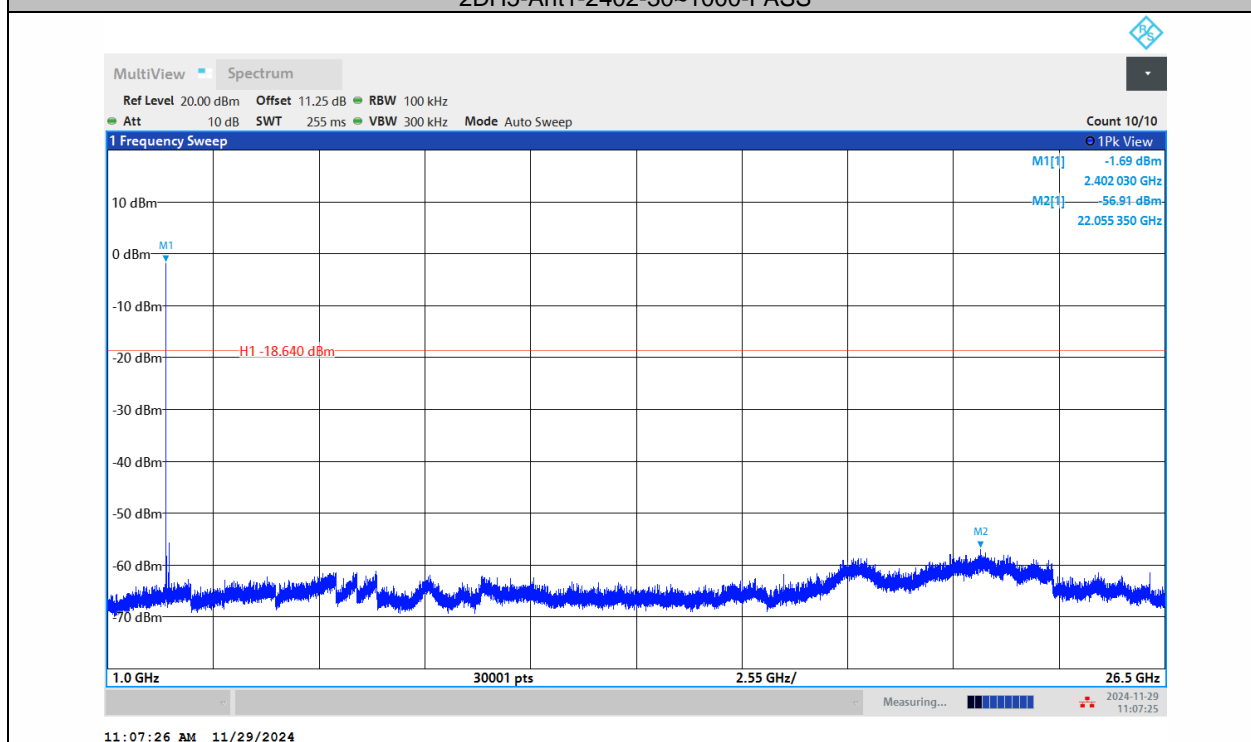


2DH5-Ant1-2402-1000~26500-PASS

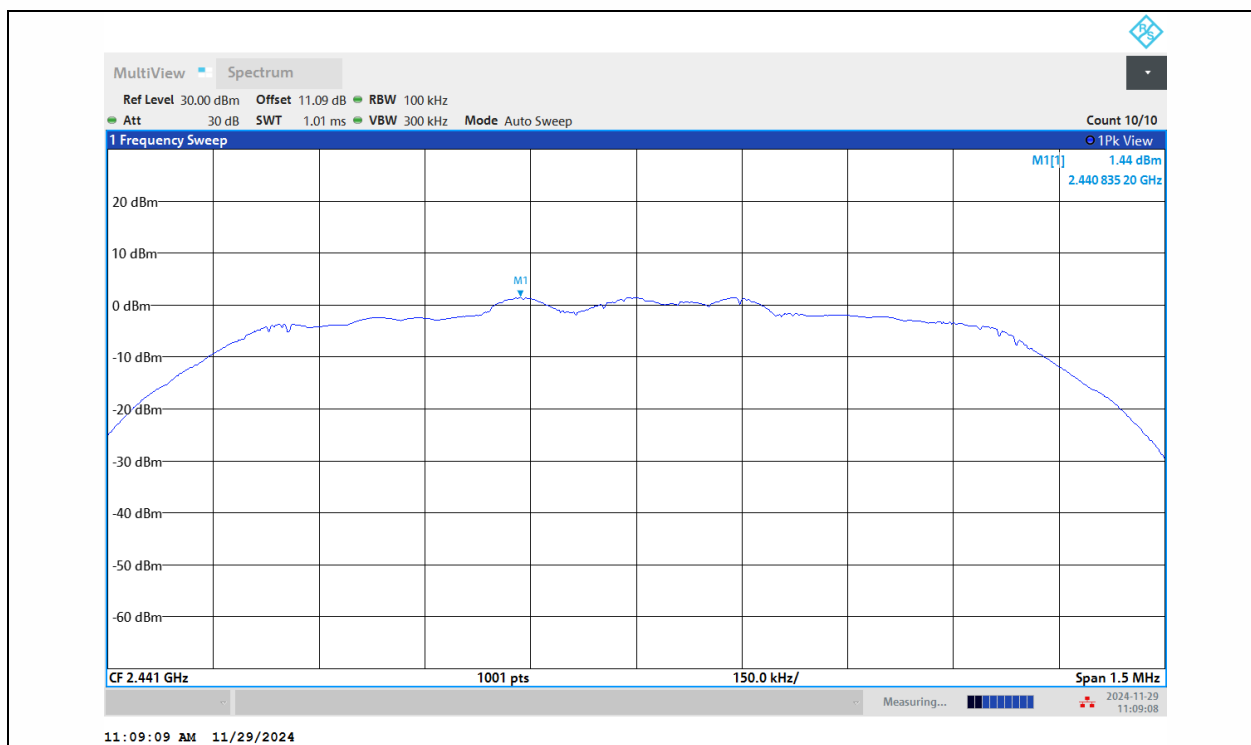


2DH5-Ant1-2441-0~Reference-PASS

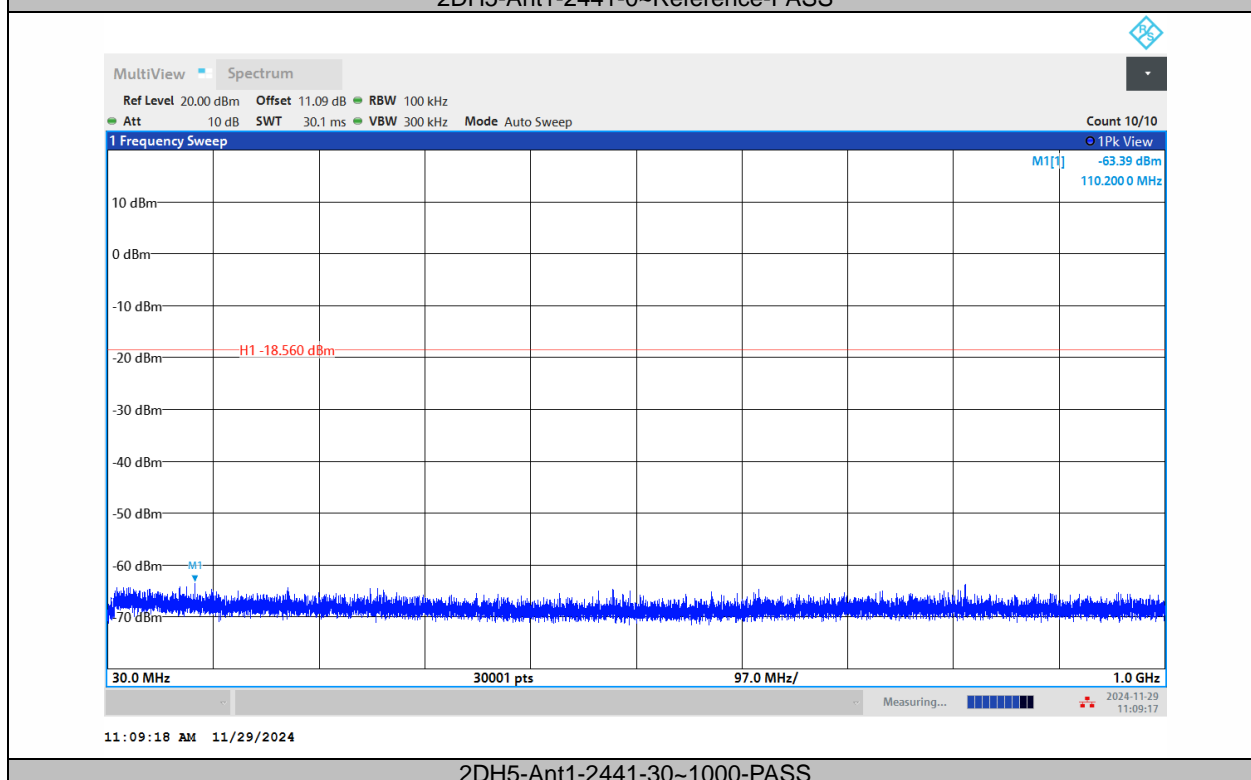


2DH5-Ant1-2441-30~1000-PASS

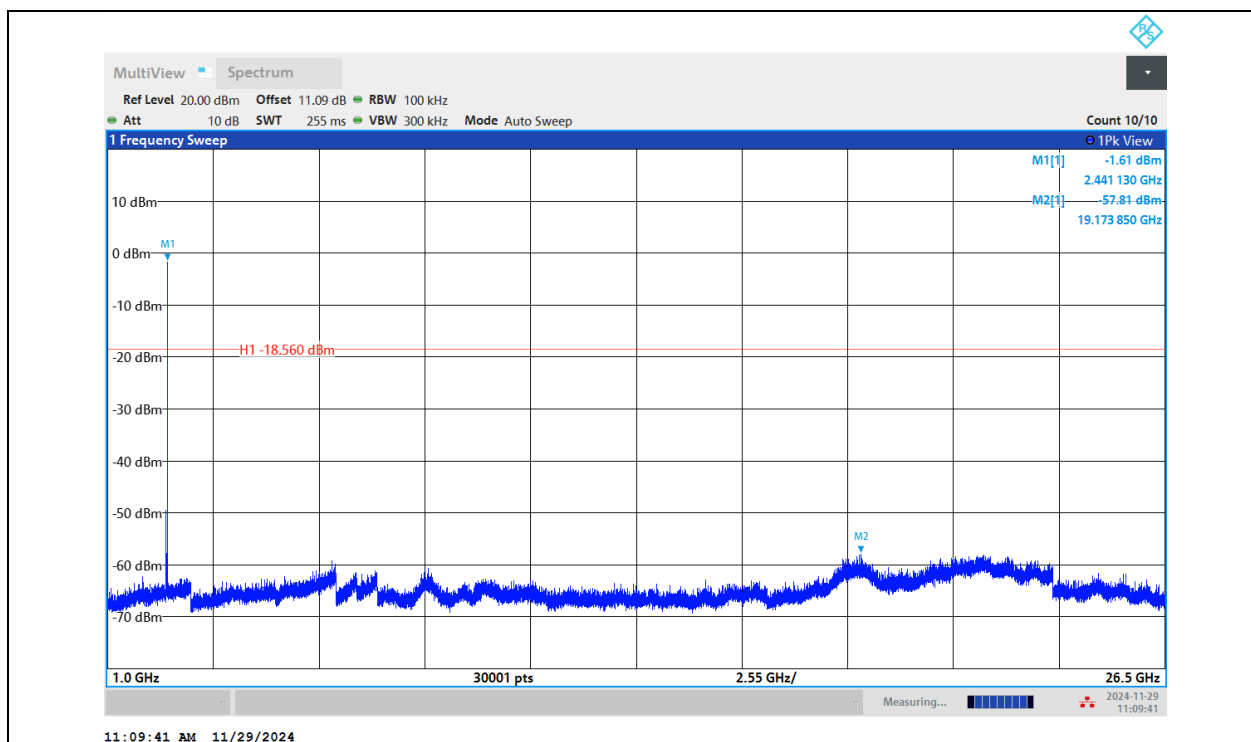


2DH5-Ant1-2441-1000~26500-PASS

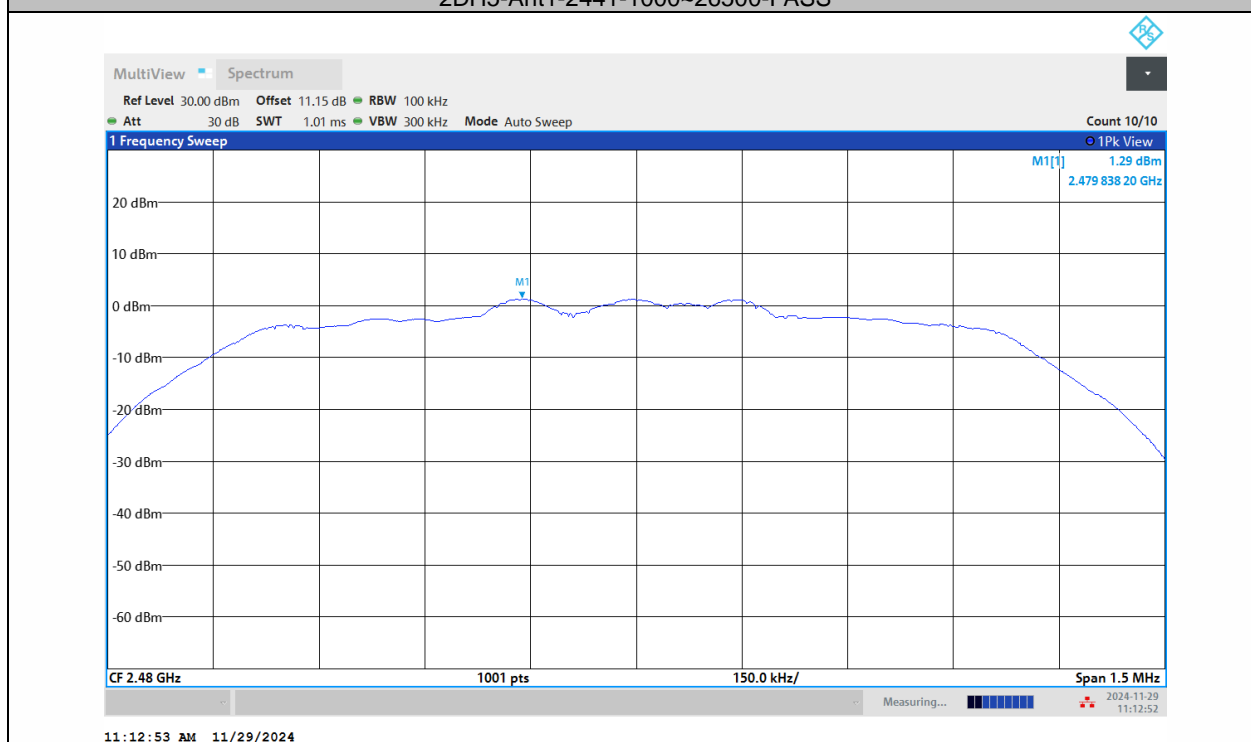


2DH5-Ant1-2480-0-Reference-PASS

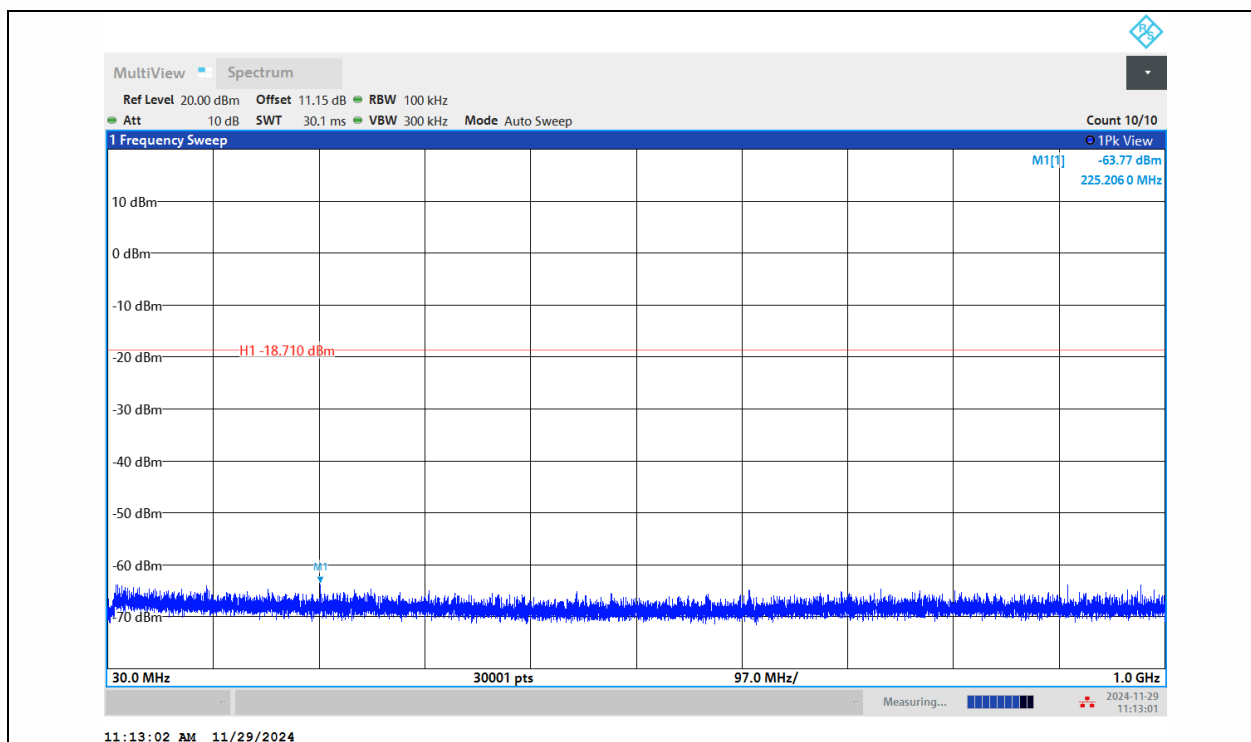


2DH5-Ant1-2480-30~1000-PASS

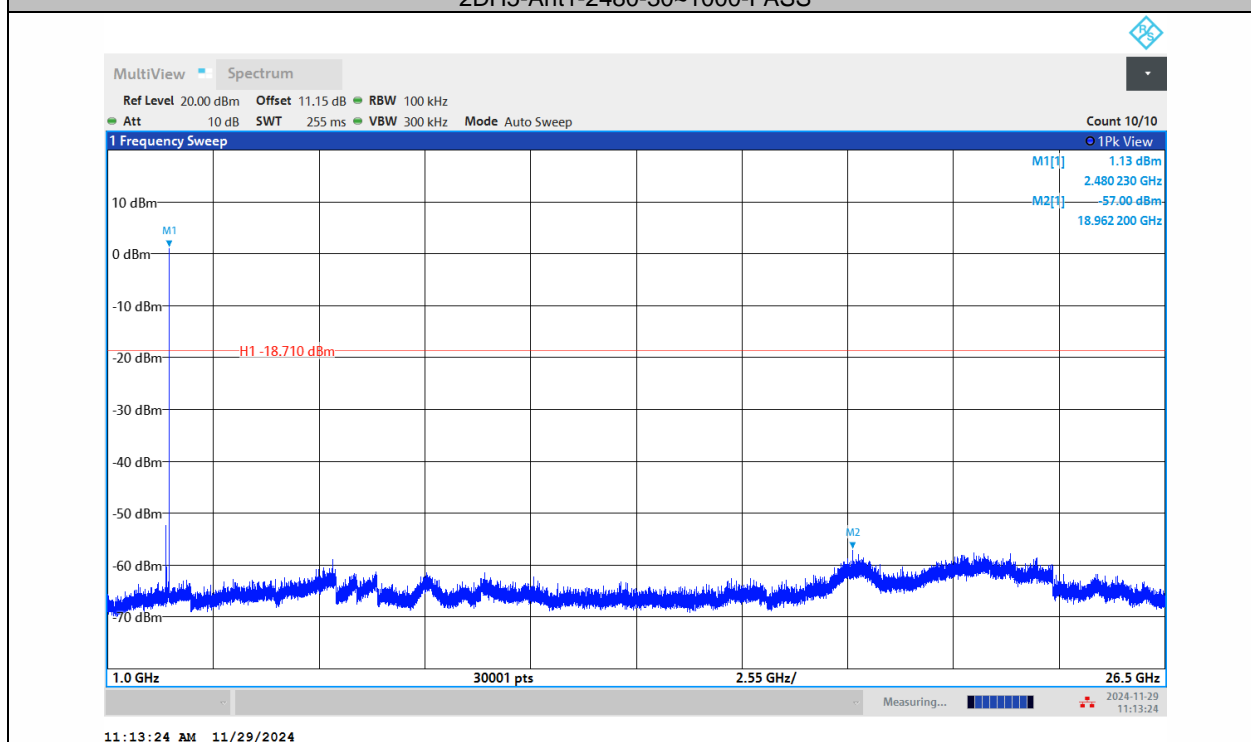


2DH5-Ant1-2480-1000~26500-PASS

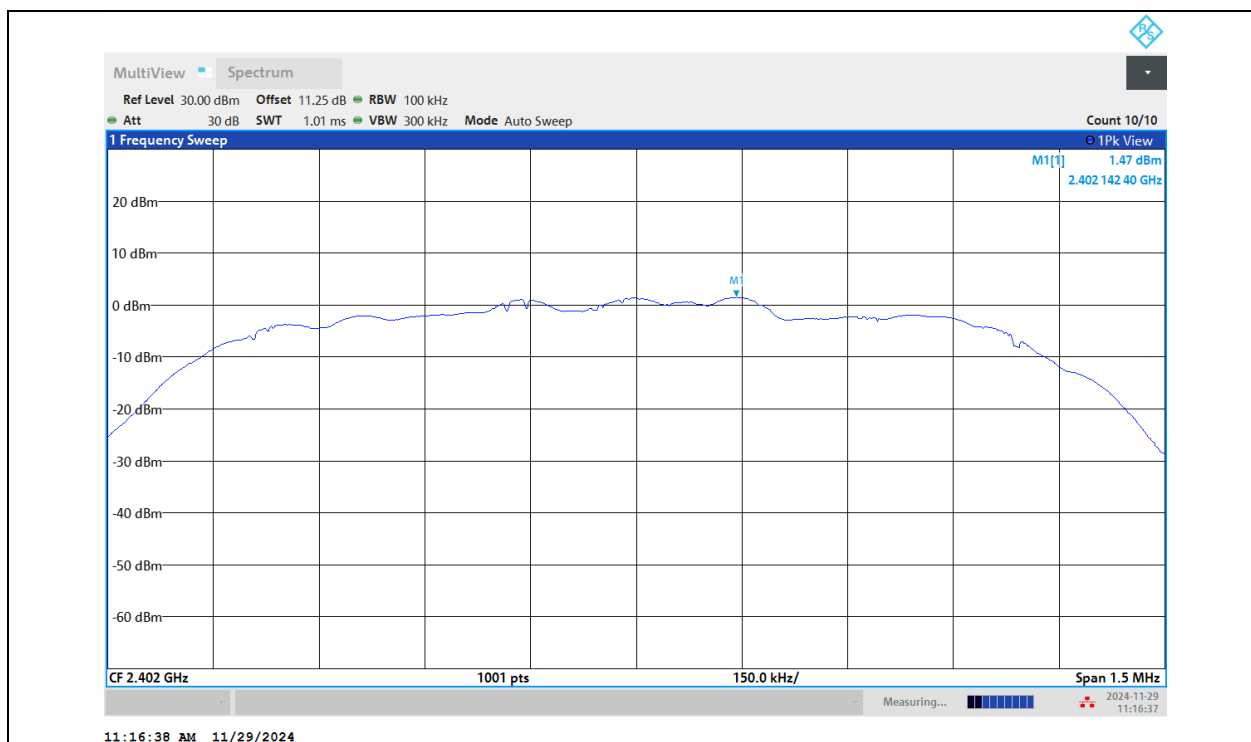


3DH5-Ant1-2402-0~Reference-PASS

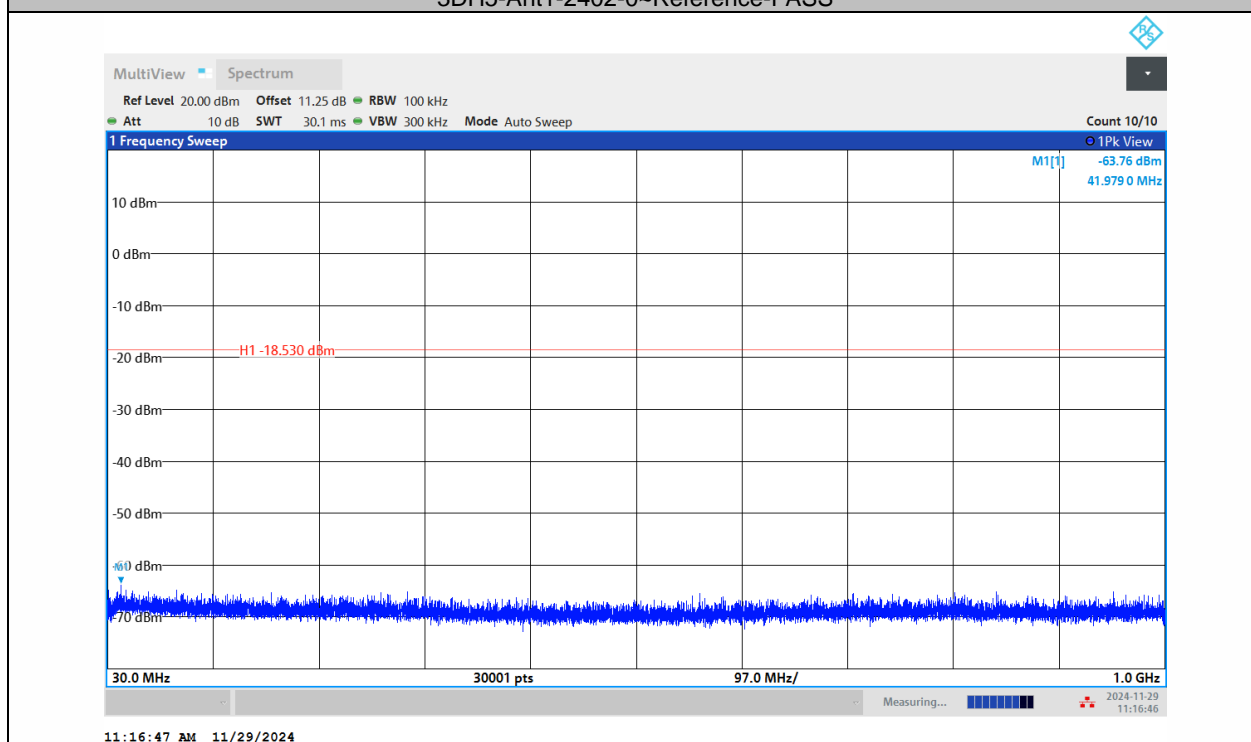


3DH5-Ant1-2402-30~1000-PASS

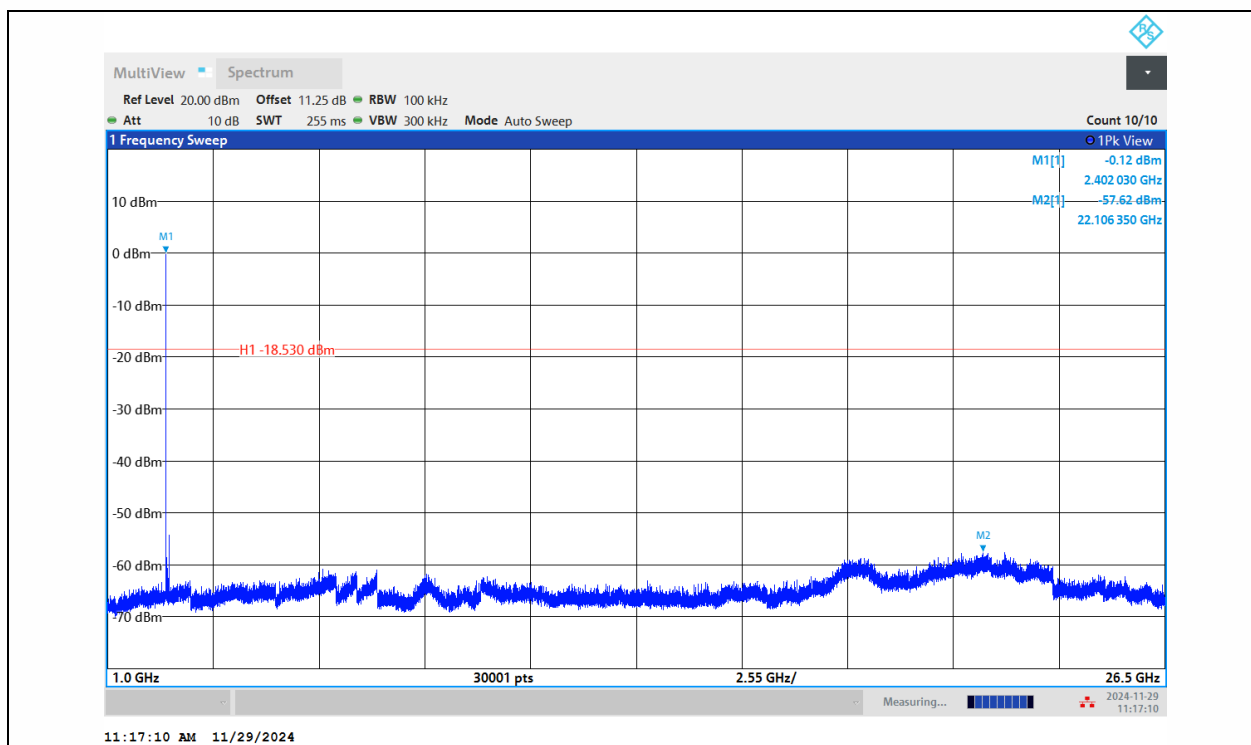


3DH5-Ant1-2402-1000~26500-PASS

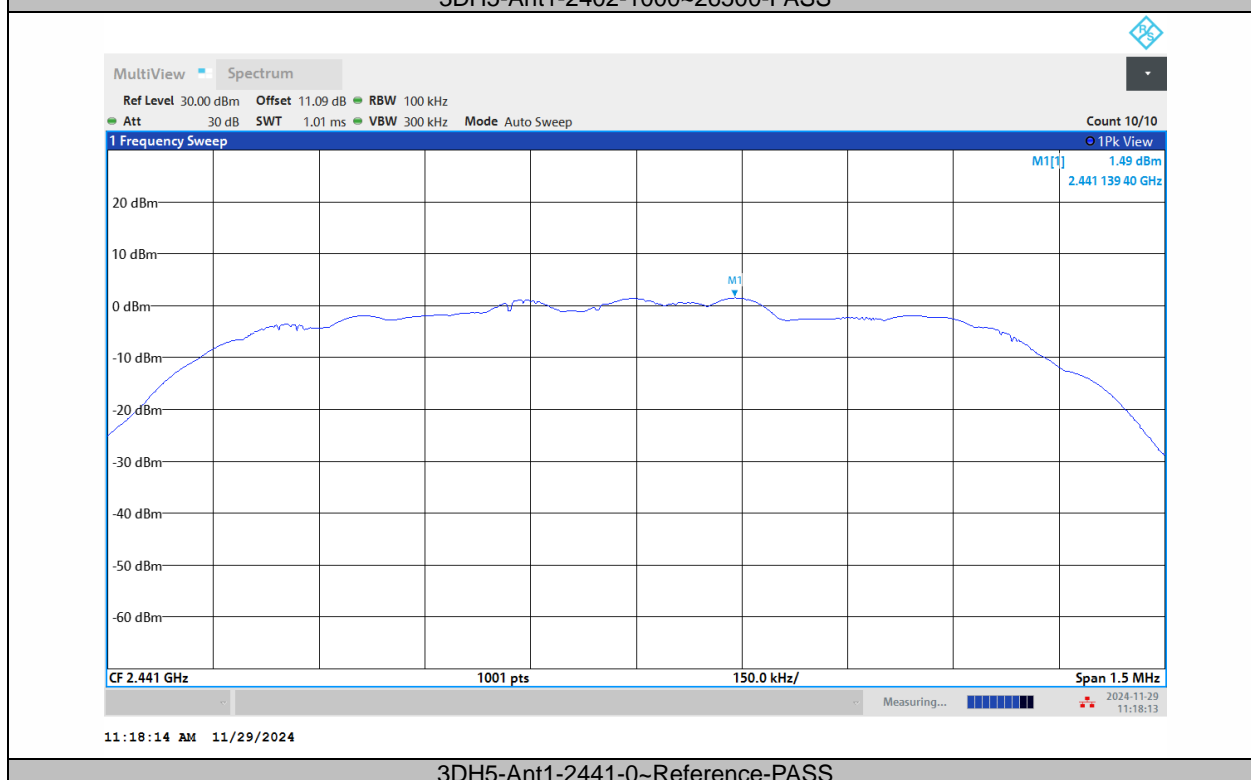


3DH5-Ant1-2441-0~Reference-PASS

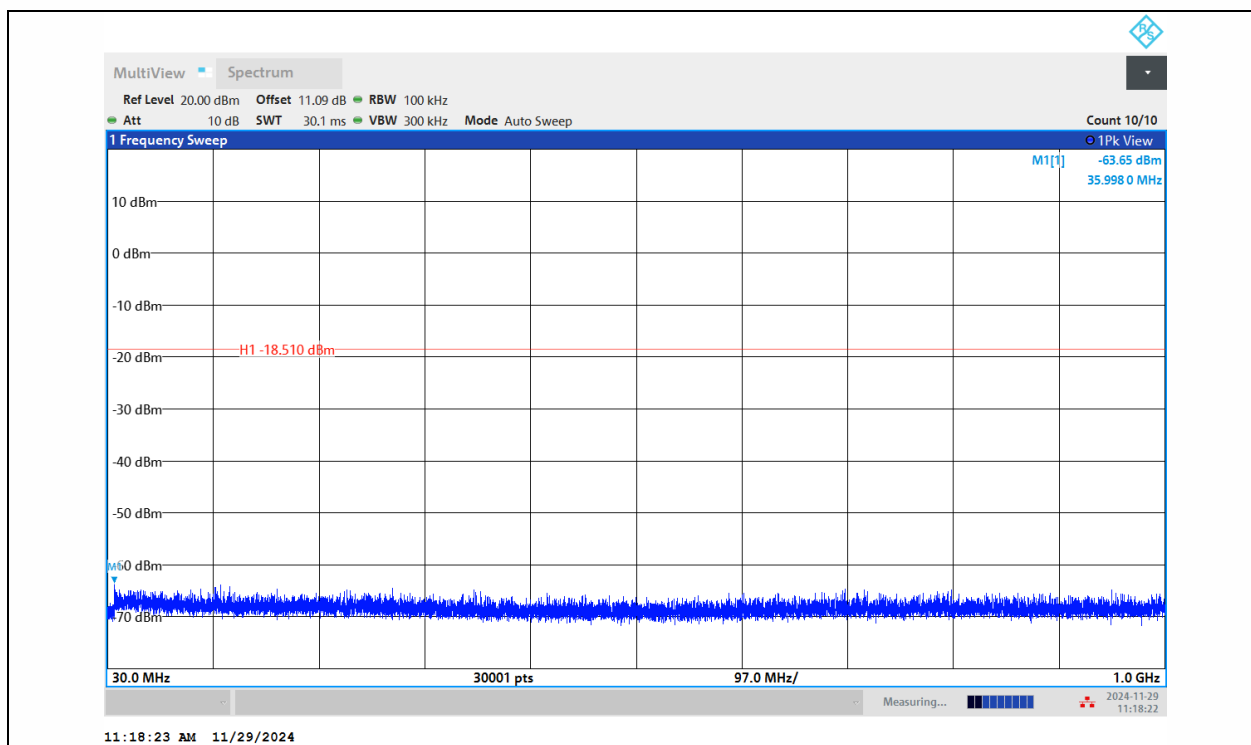


3DH5-Ant1-2441-30~1000-PASS

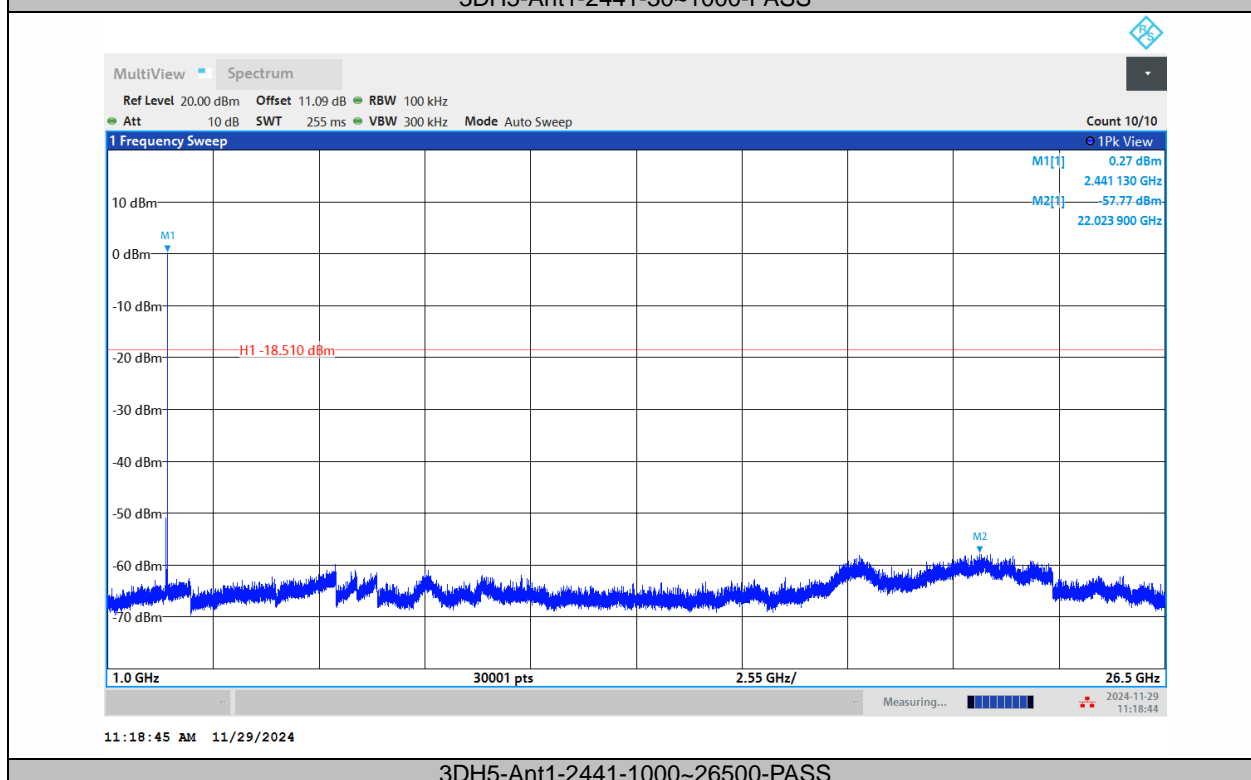


3DH5-Ant1-2441-1000~26500-PASS

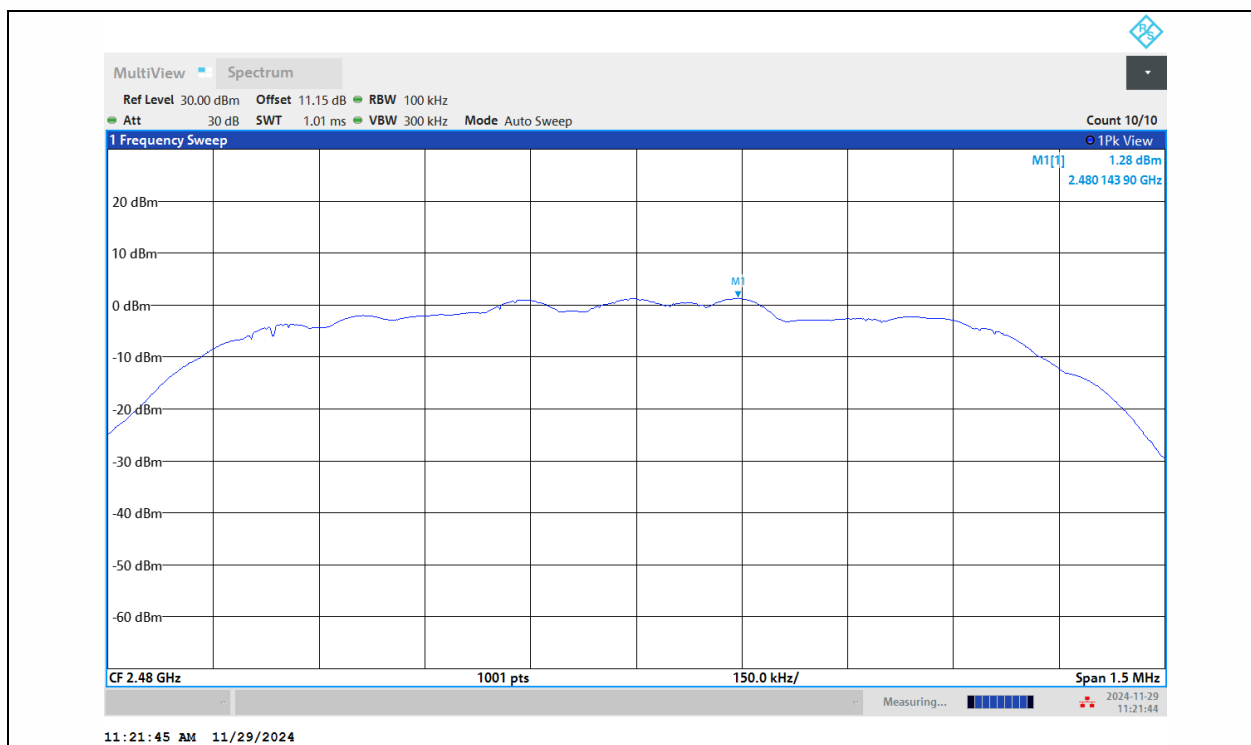

3DH5-Ant1-2480-0~Reference-PASS

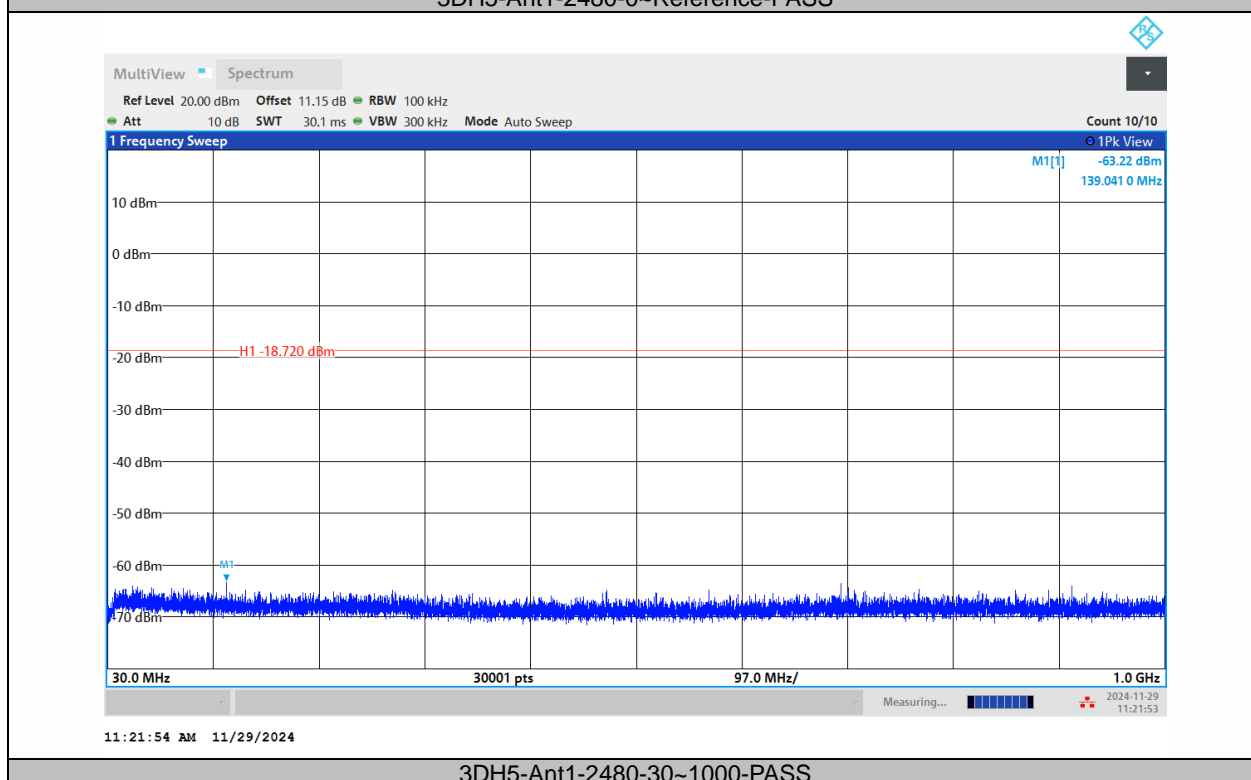

3DH5-Ant1-2480-30~1000-PASS

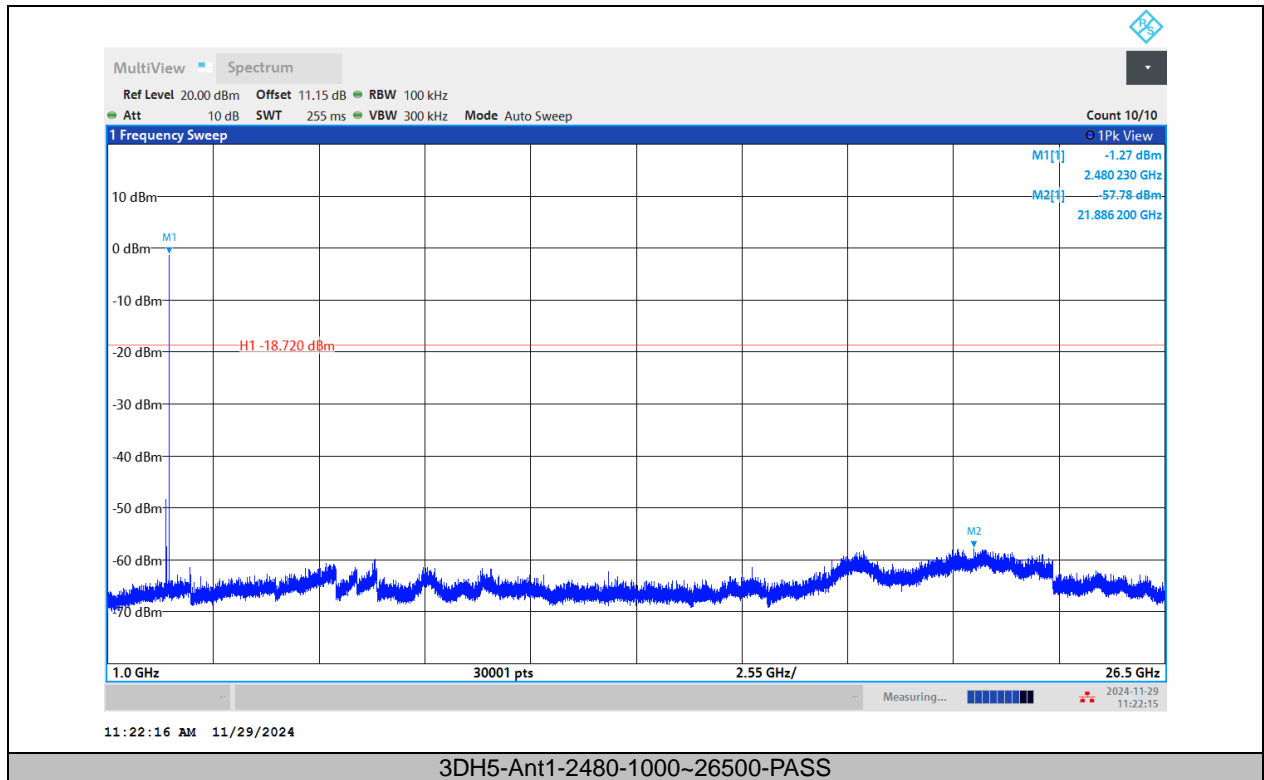

## 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02.

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2.

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

**For Above 1GHz:**

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 1 MHz.

VBW  $\geq$  RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

**For Below 1GHz:**

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 100 kHz.

VBW  $\geq$  RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

**For Below 30MHz:**

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 9kHz.

VBW  $\geq$  RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

**For Below 150KHz:**

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 200Hz.

VBW  $\geq$  RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

## 9.7.5 Test Results

### Pass

Temperature : 25 °C      ATM Pressure: 1011 mbar  
Humidity : 60 %      Test Engineer: CZF

#### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

#### ■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK      Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7110	V	52.77	74.00	21.23	peak
9976.87	V	60.02	74.00	13.98	peak
12686.2	V	60.87	74.00	13.13	peak
7110	V	38.24	54.00	15.76	AVG
9976.87	V	42.56	54.00	11.44	AVG
12686.2	V	44.68	54.00	9.32	AVG
7518.75	H	54.06	74.00	19.94	peak
9918.75	H	59.78	74.00	14.22	peak
12626.2	H	60.65	74.00	13.35	peak
7518.75	H	39.49	54.00	14.51	AVG
9918.75	H	42.61	54.00	11.39	AVG
12626.2	H	44.89	54.00	9.11	AVG

Test mode: GFSK      Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7970.62	V	54.92	74.00	19.08	peak
9926.25	V	60.24	74.00	13.76	peak
12684.3	V	60.31	74.00	13.69	peak
7970.62	V	39.08	54.00	14.92	AVG
9926.25	V	42.86	54.00	11.14	AVG
12684.3	V	44.67	54.00	9.33	AVG
7861.87	H	54.07	74.00	19.93	peak
9905.62	H	59.66	74.00	14.34	peak
12600	H	60.74	74.00	13.26	peak
7861.87	H	39.17	54.00	14.83	AVG
9905.62	H	42.68	54.00	11.32	AVG
12600	H	45.97	54.00	8.03	AVG

Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
8461.87	V	55.10	74.00	18.90	peak
9926.25	V	59.65	74.00	14.35	peak
12626.2	V	60.19	74.00	13.81	peak
8461.87	V	40.54	54.00	13.46	AVG
9926.25	V	42.86	54.00	11.14	AVG
12626.2	V	44.89	54.00	9.11	AVG
7155	H	52.69	74.00	21.31	peak
9900	H	60.13	74.00	13.87	peak
12673.1	H	59.90	74.00	14.10	peak
7155	H	38.33	54.00	15.67	AVG
9900	H	42.91	54.00	11.09	AVG
12673.1	H	44.98	54.00	9.02	AVG

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
(3) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

# ■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2388.31	V	45.00	74.00	29.00	peak
2388.31	V	37.47	54.00	16.53	AVG
2388.26	H	49.56	74.00	24.44	peak
2388.26	H	37.78	54.00	16.22	AVG

Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2483.89	V	45.22	74.00	28.78	peak
2483.89	V	37.87	54.00	16.13	AVG
2483.54	H	48.31	74.00	25.69	peak
2483.54	H	38.28	54.00	15.72	AVG

Test mode: GFSK Frequency: Hopping


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2387.98	V	44.94	54.00	9.06	peak
2485.04	V	44.04	54.00	9.96	AVG
2387.98	V	37.60	54.00	16.40	peak
2485.04	V	37.86	54.00	16.14	AVG
2388.17	H	45.66	54.00	8.34	peak
2484.73	H	47.33	54.00	6.67	AVG
2388.17	H	37.60	54.00	16.40	peak
2484.73	H	38.04	54.00	15.96	AVG

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	BT		
	Channel 0: 2402MHz	GFSK	H
		Test By: CZF	

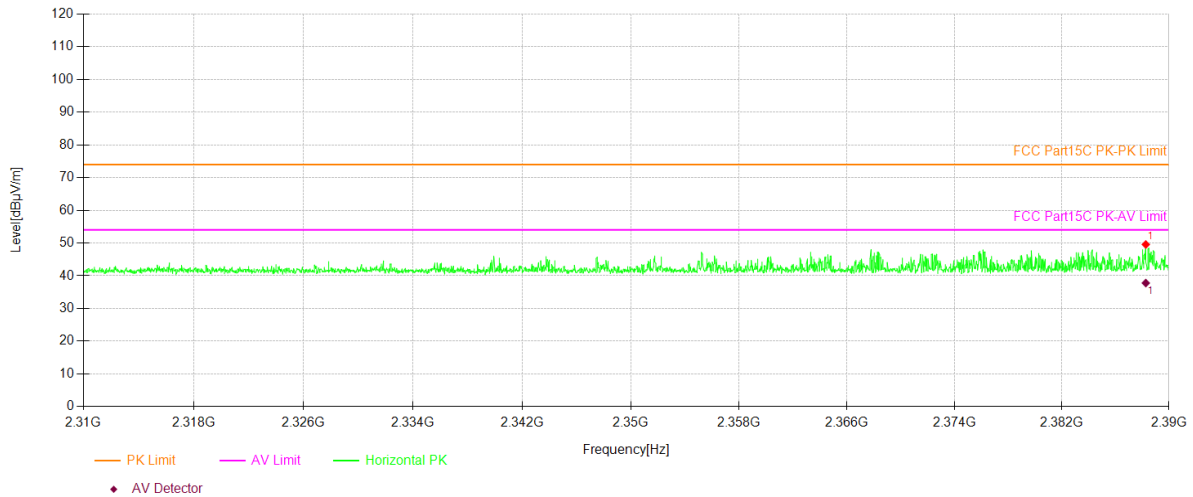


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	BT		
	Channel 0: 2402MHz	GFSK	V
		Test By: CZF	

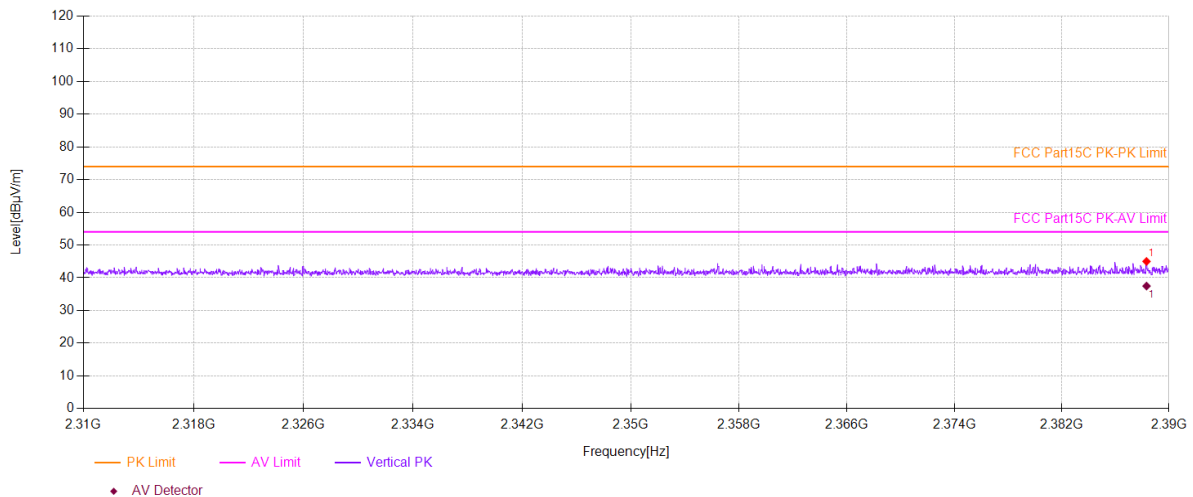


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	BT		
	Channel 78: 2480MHz	GFSK	H
		Test By: CZF	

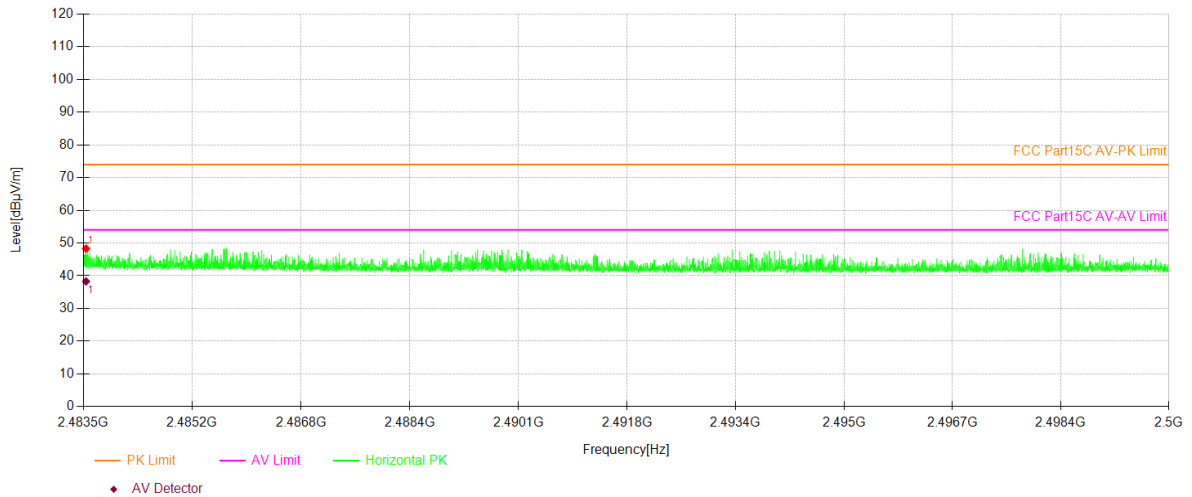


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	BT		
	Channel 78: 2480MHz	GFSK	V
		Test By: CZF	

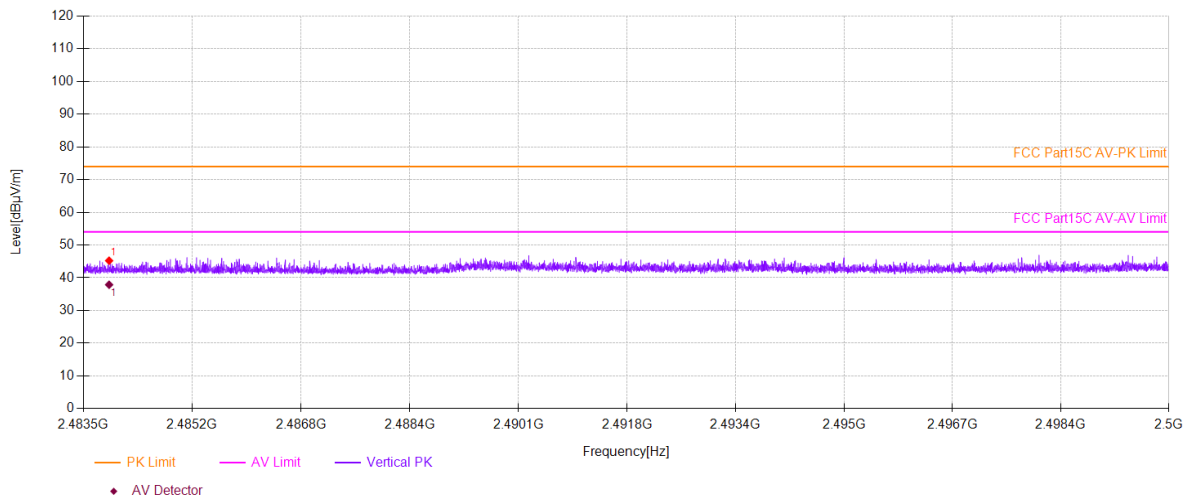

Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz		
	BT Hopping		
	GFSK Test By: CZF		H

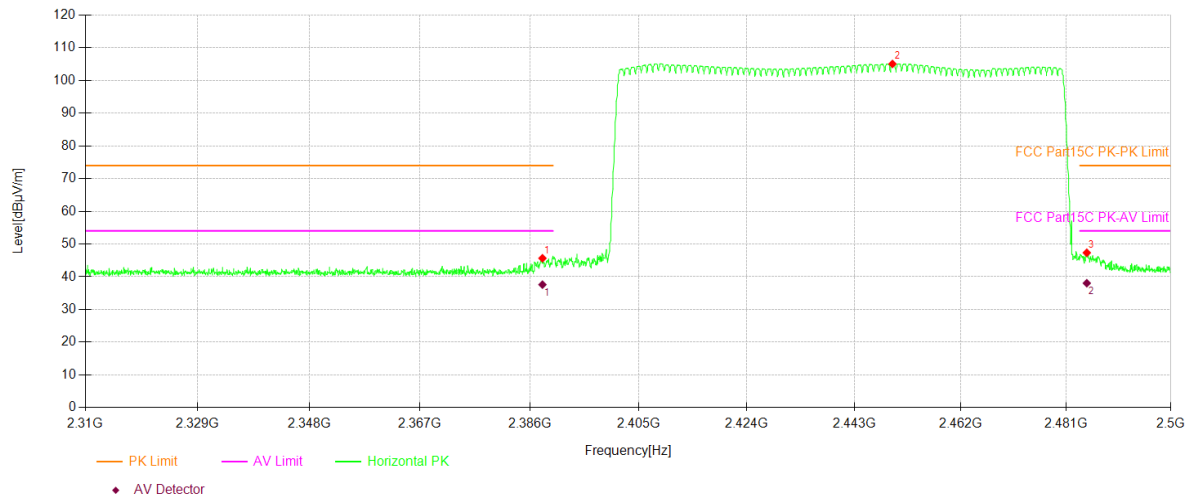


Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz		
	BT Hopping		
	GFSK Test By: CZF		V

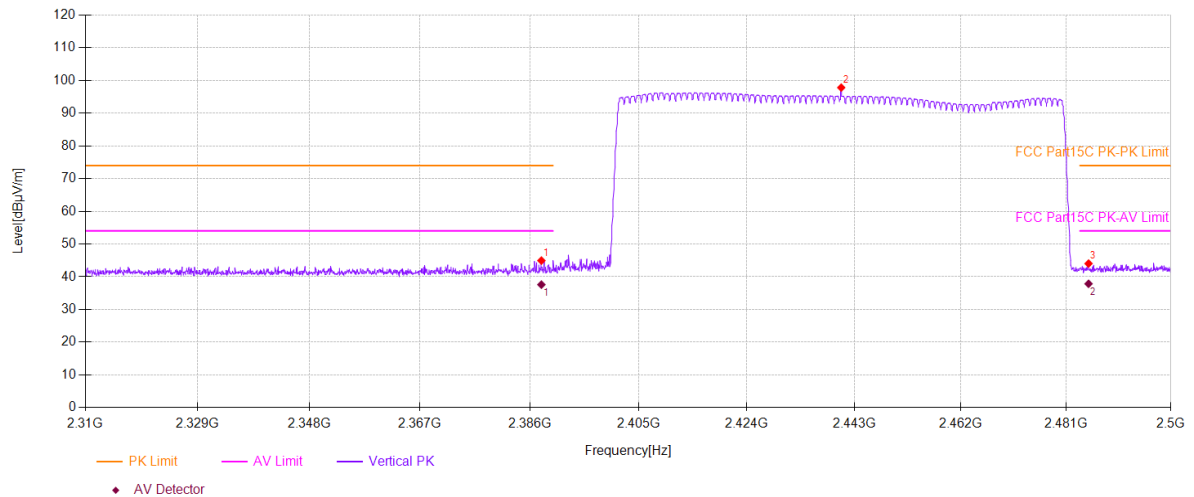

## ■ Spurious Emission below 1GHz (30MHz to 1GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

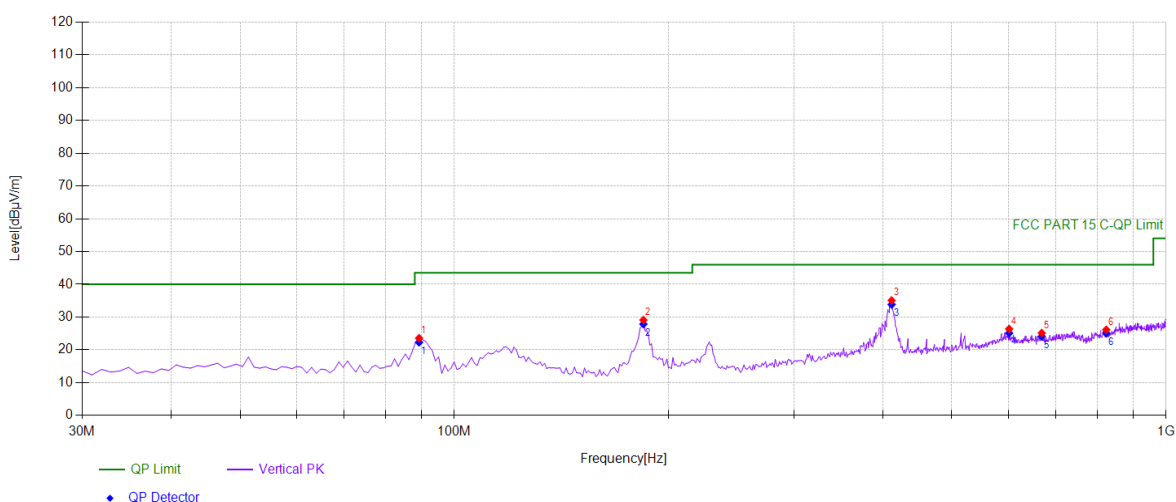


### Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	89.2292	42.52	-18.95	23.57	PK	43.50	19.93	Vertical
2	184.384	47.50	-18.37	29.13	PK	43.50	14.37	Vertical
3	411.591	46.77	-11.67	35.10	PK	46.00	10.90	Vertical
4	601.901	32.88	-6.49	26.39	PK	46.00	19.61	Vertical
5	668.898	32.09	-6.93	25.16	PK	46.00	20.84	Vertical
6	824.254	31.25	-5.10	26.15	PK	46.00	19.85	Vertical

### Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	89.2292	-18.95	22.31	43.50	21.19
2	184.3844	-18.37	27.87	43.50	15.63
3	411.5916	-11.67	33.84	46.00	12.16
4	601.9019	-6.49	25.13	46.00	20.87
5	668.8989	-6.93	24.08	46.00	21.92
6	824.2543	-5.10	25.07	46.00	20.93

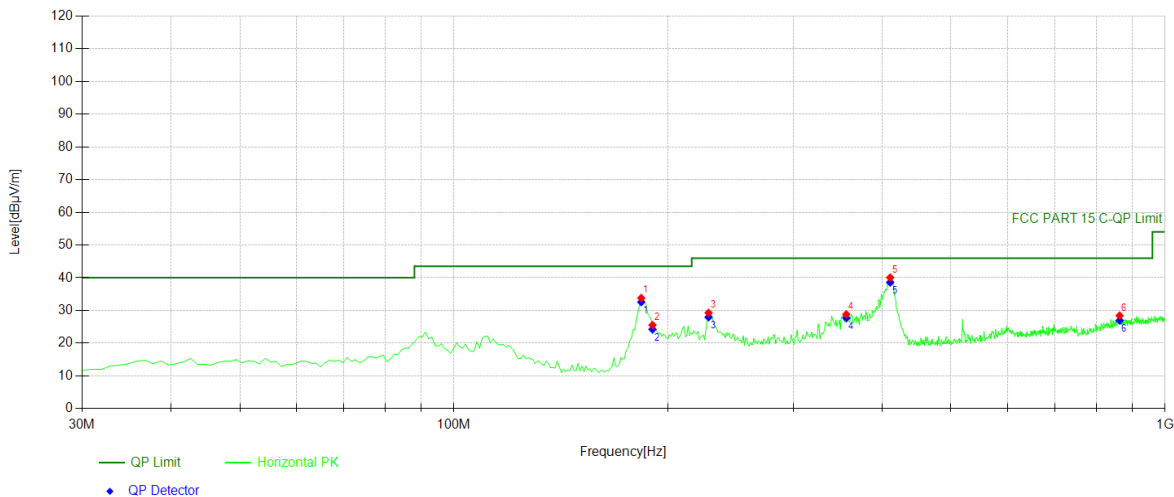


## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	183.413	52.23	-18.42	33.81	PK	43.50	9.69	Horizontal
2	190.210	43.64	-18.08	25.56	PK	43.50	17.94	Horizontal
3	228.078	45.48	-16.20	29.28	PK	46.00	16.72	Horizontal
4	356.246	41.17	-12.35	28.82	PK	46.00	17.18	Horizontal
5	410.620	51.70	-11.65	40.05	PK	46.00	5.95	Horizontal
6	863.093	32.22	-3.79	28.43	PK	46.00	17.57	Horizontal

## Final Data List


NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	183.4134	-18.42	32.57	43.50	10.93
2	190.2102	-18.08	24.24	43.50	19.26
3	228.0781	-16.20	27.96	46.00	18.04
4	356.2462	-12.35	27.68	46.00	18.32
5	410.6206	-11.65	38.59	46.00	7.41
6	863.0931	-3.79	26.97	46.00	19.03

Test mode: GFSK Frequency: Channel 39: 2441MHz

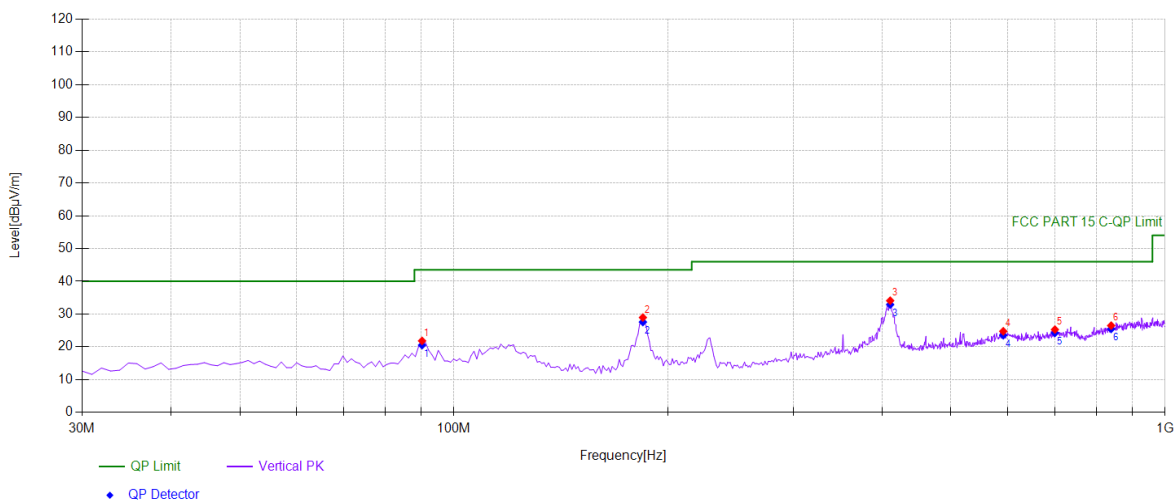

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	90.2002	40.64	-18.80	21.84	PK	43.50	21.66	Vertical
2	184.384	47.34	-18.37	28.97	PK	43.50	14.53	Vertical
3	410.620	45.76	-11.65	34.11	PK	46.00	11.89	Vertical
4	592.192	31.63	-6.86	24.77	PK	46.00	21.23	Vertical
5	699.97	31.48	-6.19	25.29	PK	46.00	20.71	Vertical
6	839.789	31.17	-4.66	26.51	PK	46.00	19.49	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	90.2002	-18.80	20.54	43.50	22.96
2	184.3844	-18.37	27.59	43.50	15.91
3	410.6206	-11.65	32.91	46.00	13.09
4	592.1922	-6.86	23.57	46.00	22.43
5	699.97	-6.19	24.27	46.00	21.73
6	839.7898	-4.66	25.49	46.00	20.51

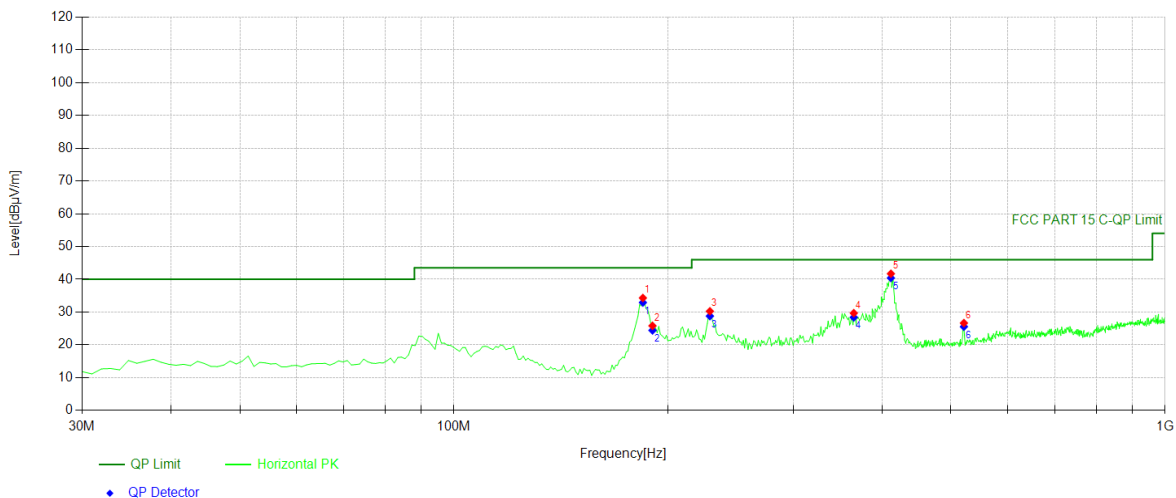


## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	184.384	52.69	-18.37	34.32	PK	43.50	9.18	Horizontal
2	190.210	43.90	-18.08	25.82	PK	43.50	17.68	Horizontal
3	229.049	46.43	-16.16	30.27	PK	46.00	15.73	Horizontal
4	364.985	41.86	-12.16	29.70	PK	46.00	16.30	Horizontal
5	411.591	53.38	-11.67	41.71	PK	46.00	4.29	Horizontal
6	521.311	36.38	-9.72	26.66	PK	46.00	19.34	Horizontal

## Final Data List


NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	184.3844	-18.37	32.93	43.50	10.57
2	190.2102	-18.08	24.43	43.50	19.07
3	229.049	-16.16	28.80	46.00	17.20
4	364.985	-12.16	28.41	46.00	17.59
5	411.5916	-11.67	40.42	46.00	5.58
6	521.3113	-9.72	25.55	46.00	20.45

Test mode: GFSK Frequency: Channel 78: 2480MHz

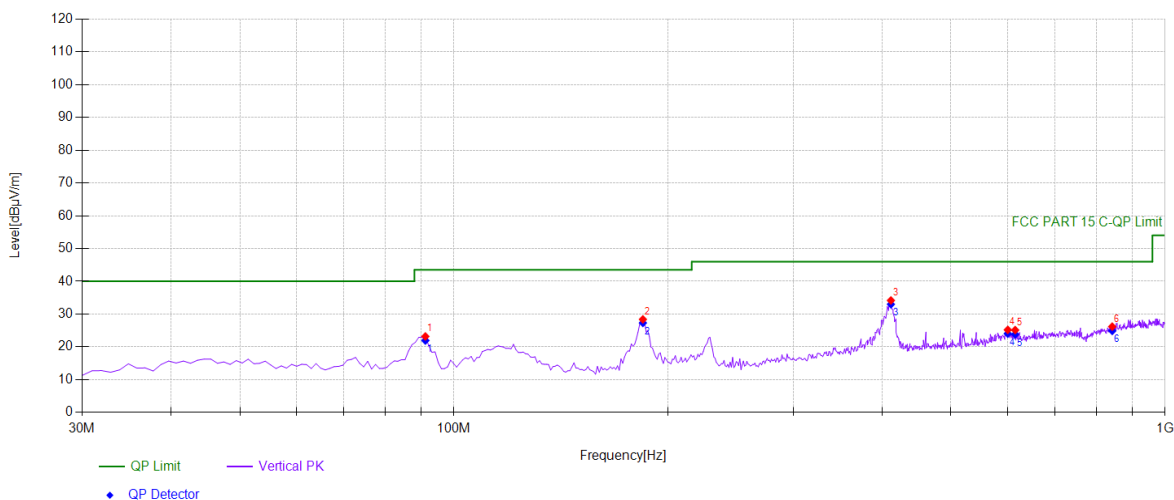

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	91.1712	41.86	-18.65	23.21	PK	43.50	20.29	Vertical
2	184.384	46.77	-18.37	28.40	PK	43.50	15.10	Vertical
3	411.591	45.84	-11.67	34.17	PK	46.00	11.83	Vertical
4	600.930	31.66	-6.46	25.20	PK	46.00	20.80	Vertical
5	615.495	32.29	-7.15	25.14	PK	46.00	20.86	Vertical
6	842.702	30.73	-4.54	26.19	PK	46.00	19.81	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	91.1712	-18.65	21.95	43.50	21.55
2	184.3844	-18.37	27.32	43.50	16.18
3	411.5916	-11.67	33.01	46.00	12.99
4	600.9309	-6.46	24.04	46.00	21.96
5	615.4955	-7.15	23.84	46.00	22.16
6	842.7027	-4.54	24.89	46.00	21.11

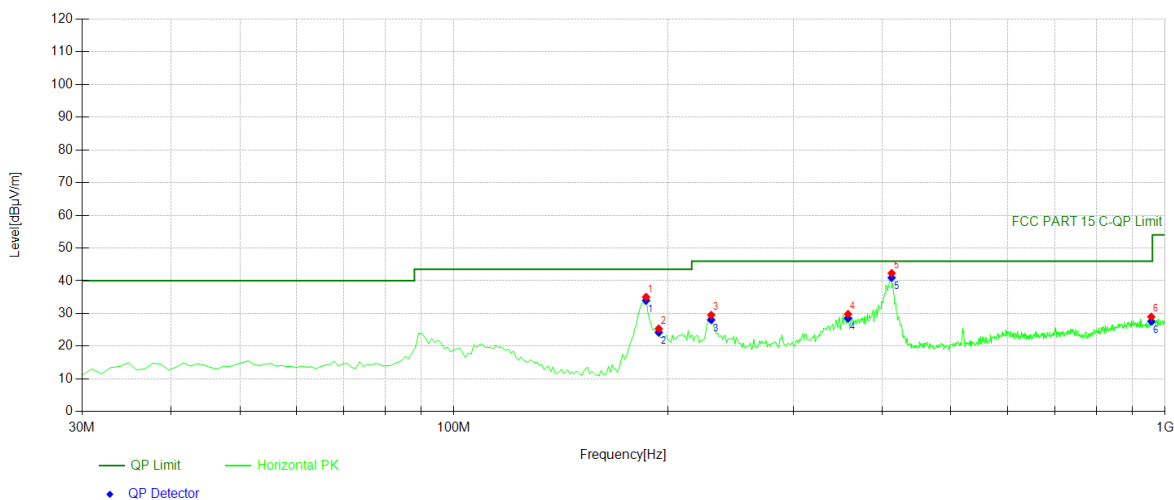

## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	186.326	53.33	-18.28	35.05	PK	43.50	8.45	Horizontal
2	194.094	43.27	-17.90	25.37	PK	43.50	18.13	Horizontal
3	230.02	45.66	-16.13	29.53	PK	46.00	16.47	Horizontal
4	358.188	42.16	-12.35	29.81	PK	46.00	16.19	Horizontal
5	412.562	54.02	-11.70	42.32	PK	46.00	3.68	Horizontal
6	956.306	31.63	-2.64	28.99	PK	46.00	17.01	Horizontal

## Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	186.3263	-18.28	33.97	43.50	9.53
2	194.0941	-17.90	24.21	43.50	19.29
3	230.02	-16.13	28.05	46.00	17.95
4	358.1882	-12.35	28.51	46.00	17.49
5	412.5626	-11.70	40.93	46.00	5.07
6	956.3063	-2.64	27.60	46.00	18.40

## 9.8 CONDUCTED EMISSION TEST

### 9.8.1 Applicable Standard

According to FCC Part 15.207(a).

### 9.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note1: The lower limit shall apply at the transition frequencies.  
 Note2: The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 9.8.3 Test Configuration


Test according to clause 7.3 conducted emission test setup.

### 9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
 Repeat above procedures until all frequency measured were complete.

### 9.8.5 Test Results

PASS.

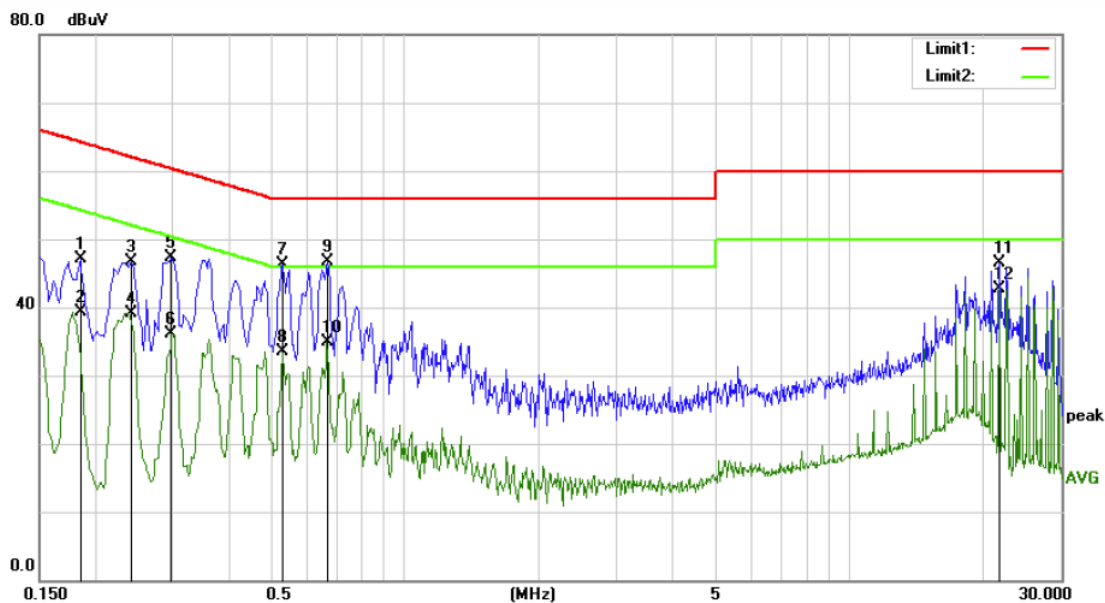

Site Conduction #1

Phase: **N**

Temperature: 24.9

Limit: (CE)FCC PART 15 class B\_QP


Power: AC 120V/60Hz

Humidity: 55 %

Mode: BT mode

Note: 2#

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1860	37.02	10.03	47.05	64.21	-17.16	QP	
2		0.1860	29.29	10.03	39.32	54.21	-14.89	AVG	
3		0.2420	36.74	10.02	46.76	62.03	-15.27	QP	
4		0.2420	29.14	10.02	39.16	52.03	-12.87	AVG	
5		0.2980	37.29	10.05	47.34	60.30	-12.96	QP	
6		0.2980	26.00	10.05	36.05	50.30	-14.25	AVG	
7		0.5300	36.29	9.96	46.25	56.00	-9.75	QP	
8		0.5300	23.54	9.96	33.50	46.00	-12.50	AVG	
9		0.6700	36.79	10.00	46.79	56.00	-9.21	QP	
10		0.6700	24.84	10.00	34.84	46.00	-11.16	AVG	
11		21.7820	35.94	10.49	46.43	60.00	-13.57	QP	
12	*	21.7820	32.24	10.49	42.73	50.00	-7.27	AVG	

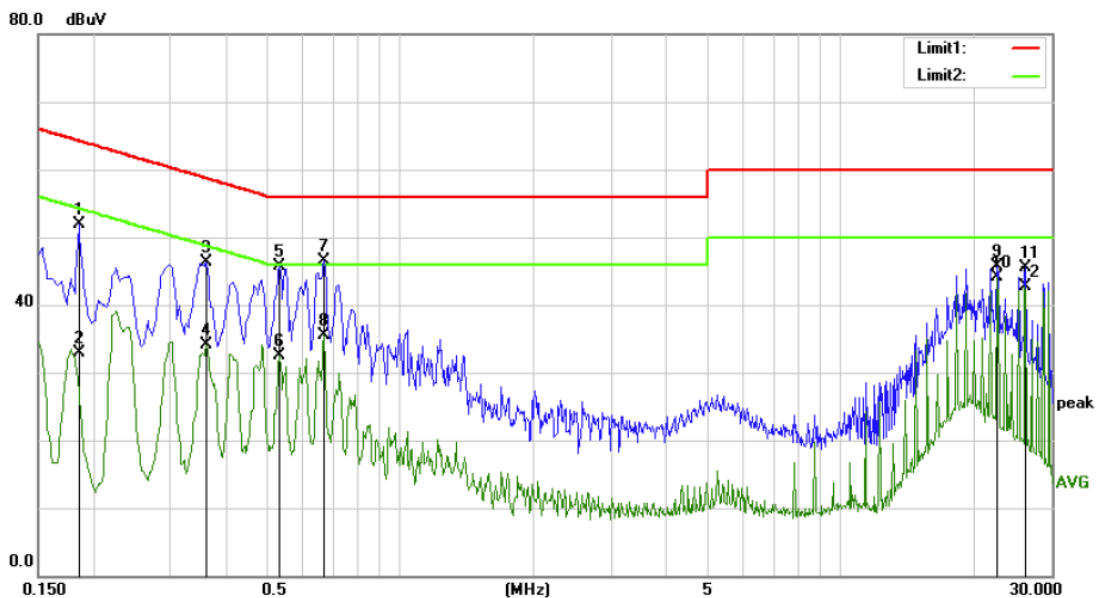

Site Conduction #1

Phase: **L1**

Temperature: 24.9

Limit: (CE)FCC PART 15 class B\_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: BT mode

Note: 2#

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1860	41.93	10.03	51.96	64.21	-12.25	QP	
2		0.1860	22.90	10.03	32.93	54.21	-21.28	AVG	
3		0.3620	36.30	9.98	46.28	58.68	-12.40	QP	
4		0.3620	24.18	9.98	34.16	48.68	-14.52	AVG	
5		0.5300	35.81	9.96	45.77	56.00	-10.23	QP	
6		0.5300	22.58	9.96	32.54	46.00	-13.46	AVG	
7		0.6700	36.57	10.00	46.57	56.00	-9.43	QP	
8		0.6700	25.49	10.00	35.49	46.00	-10.51	AVG	
9		22.6540	35.10	10.51	45.61	60.00	-14.39	QP	
10	*	22.6540	33.59	10.51	44.10	50.00	-5.90	AVG	
11		26.1420	34.84	10.58	45.42	60.00	-14.58	QP	
12		26.1420	32.05	10.58	42.63	50.00	-7.37	AVG	

## 9.9 ANTENNA APPLICATION

### 9.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.9.2 Result

**PASS**

Temperature : 25°C      ATM Pressure: 1011 mbar  
Humidity : 60 %      Test Engineer: XXH

The EUT is integrated antenna, the antenna gain is 3.98 dBi.

- ☒ Antenna use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission:

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---

## 声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。  
1. This report is invalid without the signature of the authorized approver and "special seal for testing".
2. 未经许可本报告不得部分复制。  
2. This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。  
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。  
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。  
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。  
6. Objections shall be raised within 20 days from the date receiving the report.