

RF TEST REPORT

For

Shenzhen Chuangquan Electronics Co., Ltd.

Product Name: Keyboard

Test Model(s): CK620

Report Reference No. : DACE250407028RL002

FCC ID : 2AYFJ-CK620

Applicant's Name : Shenzhen Chuangquan Electronics Co., Ltd.

No. 102, Building 2, Lane 18, Chilingtou Xinyi village Gaofeng

Address : Community, Dalang Street, Longhua District Shenzhen Guangdong, China

Testing Laboratory : Shenzhen DACE Testing Technology Co., Ltd.

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park,

Address : Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Test Specification Standard : 47 CFR Part 15.249

Date of Receipt : April 7, 2025

Date of Test : April 7, 2025 to April 15, 2025

Data of Issue : April 15, 2025

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Apply for company information

Applicant's Name	:	Shenzhen Chuangquan Electronics Co., Ltd.
Address	:	No. 102, Building 2, Lane 18, Chilingtou Xinyi village Gaofeng Community, Dalang Street, Longhua District Shenzhen Guangdong, China
Product Name	:	Keyboard
Test Model(s)	:	CK620
Series Model(s)	:	CK621/CK622/CK625/CK626/CK628/CK629/CK650/CK651/CK652/CK655/CK656/K658/CK659/CK680/CK681/CK682/CK685/CK686/CK688
Test Specification Standard(s)	:	47 CFR Part 15.249

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

Keren Huang

Keren Huang / Test Engineer

April 15, 2025

Supervised by:

Ben Tang

Ben Tang / Project Engineer

April 15, 2025

Approved by:

Machael Mo

Machael Mo / Manager

April 15, 2025

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE250407028RL002	April 15, 2025

CONTENTS

1 TEST SUMMARY	5
1.1 TEST STANDARDS	5
1.2 SUMMARY OF TEST RESULT	5
2 GENERAL INFORMATION	6
2.1 CLIENT INFORMATION	6
2.2 DESCRIPTION OF DEVICE (EUT)	6
2.3 DESCRIPTION OF TEST MODES	7
2.4 DESCRIPTION OF SUPPORT UNITS	7
2.5 EQUIPMENTS USED DURING THE TEST	8
2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	10
2.7 IDENTIFICATION OF TESTING LABORATORY	10
2.8 ANNOUNCEMENT	10
3 EVALUATION RESULTS (EVALUATION)	11
3.1 ANTENNA REQUIREMENT	11
3.1.1 Conclusion:	11
4 RADIO SPECTRUM MATTER TEST RESULTS (RF)	12
4.1 CONDUCTED EMISSION AT AC POWER LINE	12
4.1.1 E.U.T. Operation:	12
4.1.2 Test Setup Diagram:	12
4.1.3 Test Data:	13
4.2 OCCUPIED BANDWIDTH	15
4.2.1 E.U.T. Operation:	15
4.2.2 Test Setup Diagram:	16
4.2.3 Test Data:	16
4.3 FIELD STRENGTH OF FUNDAMENTAL	18
4.3.1 E.U.T. Operation:	18
4.3.2 Test Data:	18
4.4 BAND EDGE EMISSIONS (RADIATED)	19
4.4.1 E.U.T. Operation:	19
4.4.2 Test Setup Diagram:	19
4.4.3 Test Data:	20
4.5 EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz)	24
4.5.1 E.U.T. Operation:	24
4.5.2 Test Data:	25
4.6 EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz)	27
4.6.1 E.U.T. Operation:	27
4.6.2 Test Setup Diagram:	28
4.6.3 Test Data:	28
5 TEST SETUP PHOTOS	34
6 PHOTOS OF THE EUT	36

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz

1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Antenna requirement	47 CFR Part 15.249		47 CFR Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.249	ANSI C63.10-2013 section 6.2	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.249	ANSI C63.10-2013, section 6.9.2	47 CFR 15.215(c)	Pass
Field strength of fundamental	47 CFR Part 15.249	ANSI C63.10-2013 section 6.6	47 CFR 15.249(a) 47 CFR 15.249(b)(1)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.249	ANSI C63.10-2013 section 6.6.4	47 CFR 15.249(d)	Pass
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.249	ANSI C63.10-2013 section 6.5	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass
Emissions in frequency bands (above 1GHz)	47 CFR Part 15.249	ANSI C63.10-2013 section 6.6	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : Shenzhen Chuanguan Electronics Co., Ltd.
Address : No. 102, Building 2, Lane 18, Chilingtou Xinyi village Gaofeng Community, Dalang Street, Longhua District Shenzhen Guangdong, China

Manufacturer : Shenzhen Chuanguan Electronics Co., Ltd.
Address : No. 102, Building 2, Lane 18, Chilingtou Xinyi village Gaofeng Community, Dalang Street, Longhua District Shenzhen Guangdong, China

2.2 Description of Device (EUT)

Product Name:	Keyboard
Model/Type reference:	CK620
Series Model:	CK621/CK622/CK625/CK626/CK628/CK629/CK650/CK651/CK652/CK655/CK656/K658/CK659/CK680/CK681/CK682/CK685/CK686/CK688
Model Difference:	The product has many models, only the model name and color is different, and the other parts such as the circuit principle, pcb and electrical structure are the same.
Trade Mark:	N/A
Power Supply:	DC 5V/1A from adapter Battery:DC3.7V 4100mAh
Operation Frequency:	2402-2480MHz
Number of Channels:	16
Modulation Type:	GFSK
Antenna Type:	PCB
Antenna Gain:	2.34 dBi
Hardware Version:	V1.0
Software Version:	V1.0

(Remark:The Antenna Gain is supplied by the customer.DACE is not responsible for This data and the related calculations associated with it)

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	5	2422 MHz	9	2440 MHz	13	2463 MHz
2	2407 MHz	6	2426 MHz	10	2453 MHz	14	2466 MHz
3	2414 MHz	7	2436 MHz	11	2445 MHz	15	2473 MHz
4	2419 MHz	8	2439 MHz	12	2459 MHz	16	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	SRD
Lowest channel	2402MHz
Middle channel	2440MHz
Highest channel	2480MHz
Remark:Only the data of the worst mode would be recorded in this report.	

2.3 Description of Test Modes

No	Title	Description
TM1	Lowest channel	Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation.
TM2	Middle channel	Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation.
TM3	Highest channel	Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation.

2.4 Description of Support Units

Title	Manufacturer	Model No.	Serial No.
AC-DC adapter	HUAWEI TECHNOLOGY	HW100400C01	

2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Power absorbing clamp	SCHWARZ BECK	MESS-ELEKTRONIK	/	2024-05-20	2025-05-19
Electric Network	SCHWARZ BECK	CAT5 8158	CAT5 8158#207	/	/
Cable	SCHWARZ BECK	/	/	2024-05-20	2025-05-19
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Attenuation	561-G071	2024-12-06	2025-12-05
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	ID:1164.6607K 03-102109-MH	2024-06-12	2025-06-11
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2023-12-12	2025-12-11
L.I.S.N	SCHWARZ BECK	NSLK 8126	05055	2024-06-14	2025-06-13
Pulse Limiter	CYBERTEK	EM5010A	/	2024-09-27	2025-09-26
EMI test software	EZ -EMC	EZ	V1.1.42	/	/

Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	Tachoy Information Technology(she nzheng) Co.,Ltd.	RTS-01	V1.0.0	/	/
Power divider	MIDEWEST	PWD-2533	SMA-79	2023-05-11	2026-05-10
RF Sensor Unit	Tachoy Information Technology(she nzheng) Co.,Ltd.	TR1029-2	000001	/	/
Wideband radio communication tester	R&S	CMW500	113410	2024-06-12	2025-06-11
Vector Signal Generator	Keysight	N5181A	MY50143455	2024-12-06	2025-12-05
Signal Generator	Keysight	N5182A	MY48180415	2024-12-06	2025-12-05
Spectrum Analyzer	Keysight	N9020A	MY53420323	2024-12-06	2025-12-05

**Field strength of fundamental
Band edge emissions (Radiated)
Emissions in frequency bands (below 1GHz)
Emissions in frequency bands (above 1GHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	V1.1.42	/	/
Positioning Controller	MF	MF-7802	/	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2023-05-19	2025-05-18
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2023-05-19	2025-05-18
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2024-06-14	2026-06-13
Cable(LF)#2	Schwarzbeck	/	/	2024-12-19	2025-12-18
Cable(LF)#1	Schwarzbeck	/	/	2024-12-19	2025-12-18
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2024-05-20	2025-05-19
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2024-05-20	2025-05-19
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2024-06-12	2025-06-11
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2024-06-12	2025-06-11
Wideband radio communication tester	R&S	CMW500	113410	2024-06-12	2025-06-11
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2024-06-12	2025-06-11
Test Receiver	R&S	ESCI 3	1166.5950K03-101431-Jq	2024-06-13	2025-06-12
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023-05-13	2025-05-12
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2024-09-28	2026-09-27

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	±3.41dB
Occupied Bandwidth	±3.63%
Radiated Emission (Above 1GHz)	±5.46dB
Radiated Emission (Below 1GHz)	±5.79dB
Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

2.7 Identification of Testing Laboratory

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

Identification of the Responsible Testing Location

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
Designation Number:	CN1342
Test Firm Registration Number:	778666
A2LA Certificate Number:	6270.01

2.8 Announcement


- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by DACE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

3 Evaluation Results (Evaluation)

3.1 Antenna requirement


Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

3.1.1 Conclusion:

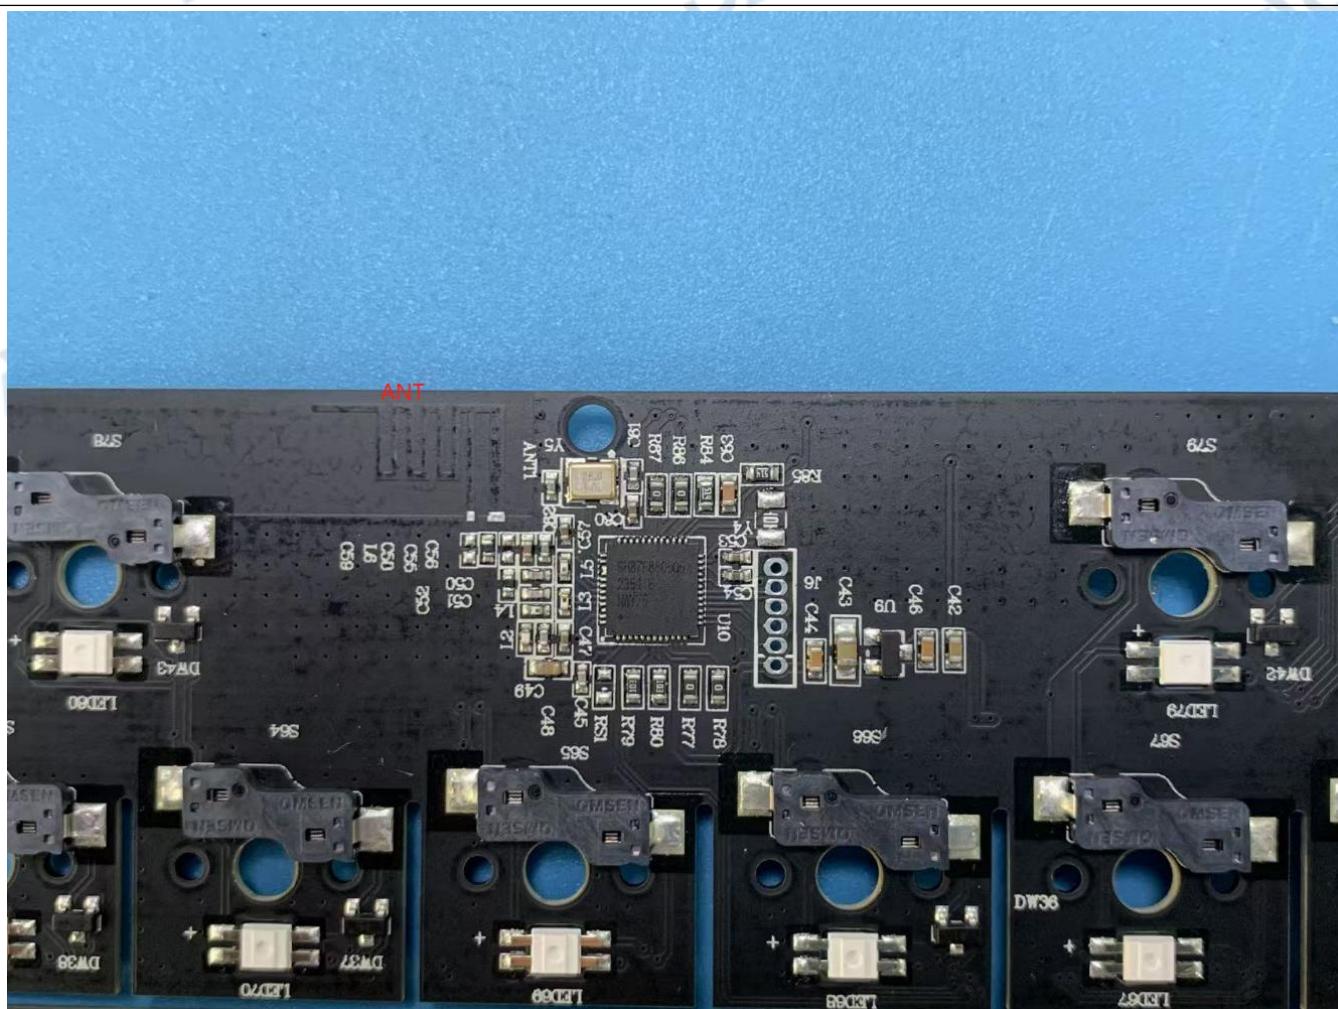


4.1.3 Test Data:

TM1 / Line: Line / Band: 2.4G / BW: 1 / CH: L

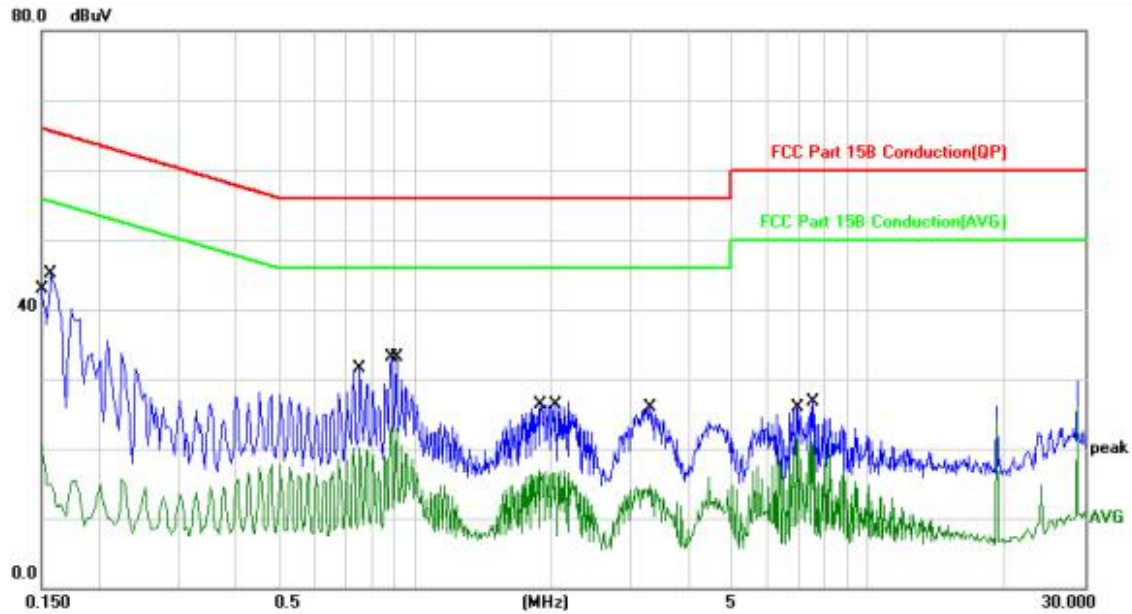

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	10.65	10.10	20.75	55.99	-35.24	AVG	
2	*	0.1580	34.91	10.10	45.01	65.56	-20.55	QP	
3		0.7580	21.36	10.08	31.44	56.00	-24.56	QP	
4		0.7580	10.11	10.08	20.19	46.00	-25.81	AVG	
5		0.8860	13.07	10.08	23.15	46.00	-22.85	AVG	
6		0.9100	23.08	10.08	33.16	56.00	-22.84	QP	
7		1.8700	6.93	10.01	16.94	46.00	-29.06	AVG	
8		2.0460	16.33	10.00	26.33	56.00	-29.67	QP	
9		3.3100	15.81	10.10	25.91	56.00	-30.09	QP	
10		3.3100	4.58	10.10	14.68	46.00	-31.32	AVG	
11		6.9500	11.17	10.23	21.40	50.00	-28.60	AVG	
12		7.5260	16.41	10.25	26.66	60.00	-33.34	QP	

TM1 / Line: Neutral / Band: 2.4G / BW: 1 / CH: L

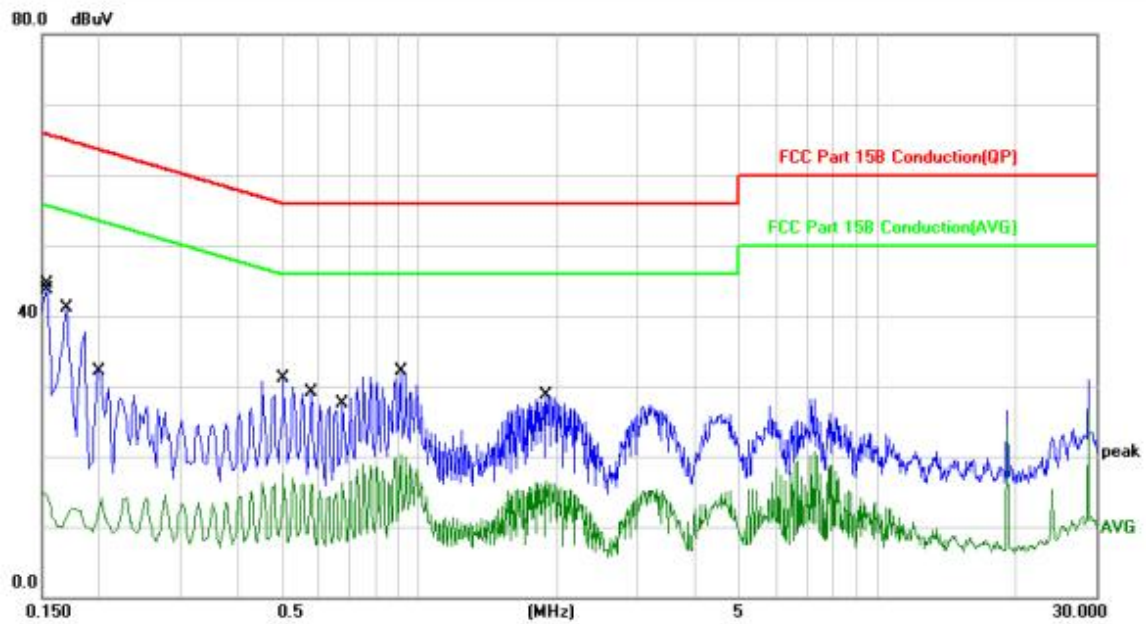

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	4.75	10.10	14.85	55.99	-41.14	AVG	
2	*	0.1539	34.47	10.10	44.57	65.78	-21.21	QP	
3		0.1700	31.00	10.10	41.10	64.96	-23.86	QP	
4		0.2020	4.00	10.10	14.10	53.52	-39.42	AVG	
5		0.5060	21.03	10.08	31.11	56.00	-24.89	QP	
6		0.5060	7.45	10.08	17.53	46.00	-28.47	AVG	
7		0.5820	19.04	10.08	29.12	56.00	-26.88	QP	
8		0.6820	6.22	10.08	16.30	46.00	-29.70	AVG	
9		0.9100	21.96	10.08	32.04	56.00	-23.96	QP	
10		0.9100	10.26	10.08	20.34	46.00	-25.66	AVG	
11		1.8940	18.60	10.00	28.60	56.00	-27.40	QP	
12		1.8940	6.54	10.00	16.54	46.00	-29.46	AVG	

4.2 Occupied Bandwidth


Test Requirement:	47 CFR 15.215(c)
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	ANSI C63.10-2013, section 6.9.2
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.</p> <p>i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).</p> <p>j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.</p> <p>k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p>

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.6 °C	Humidity:	51 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3				


Final test mode: TM1, TM2, TM3

4.2.2 Test Setup Diagram:

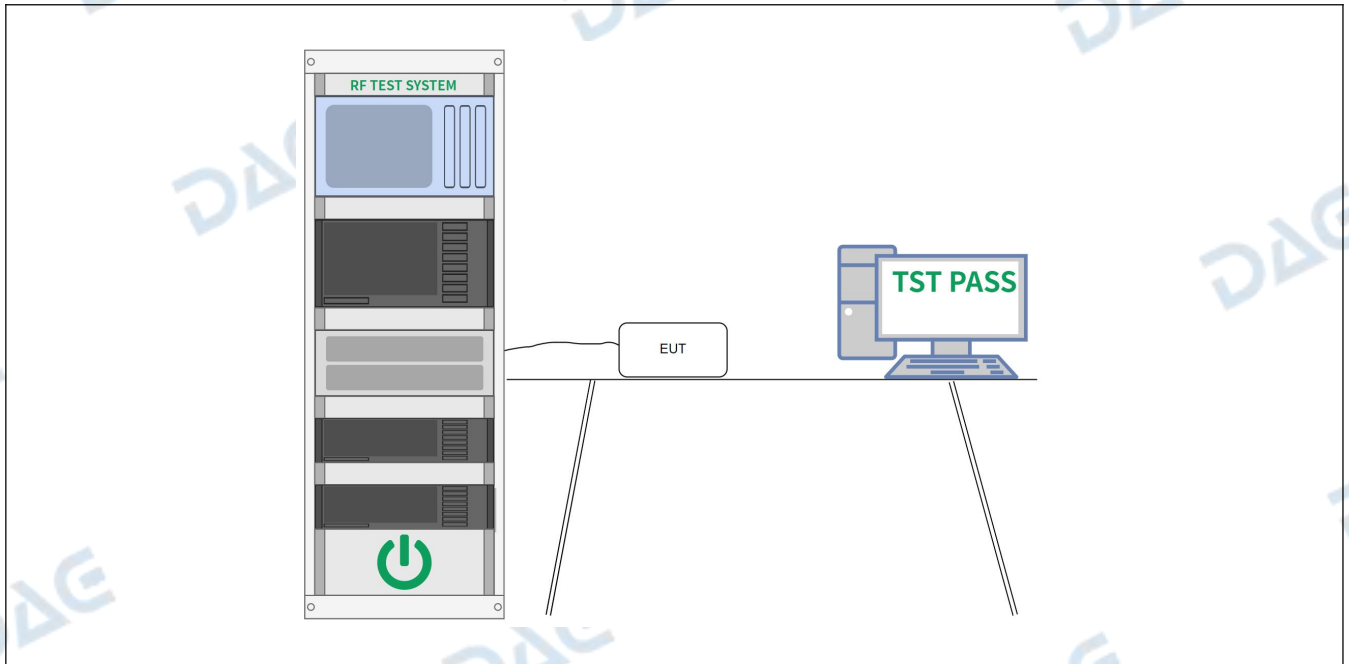

4.2.3 Test Data:


Condition	Antenna	Frequency (MHz)	-20dB BW(kHz)	Result
NVNT	ANT1	2402.00	1237.61	Pass
NVNT	ANT1	2440.00	1238.66	Pass
NVNT	ANT1	2480.00	1242.33	Pass

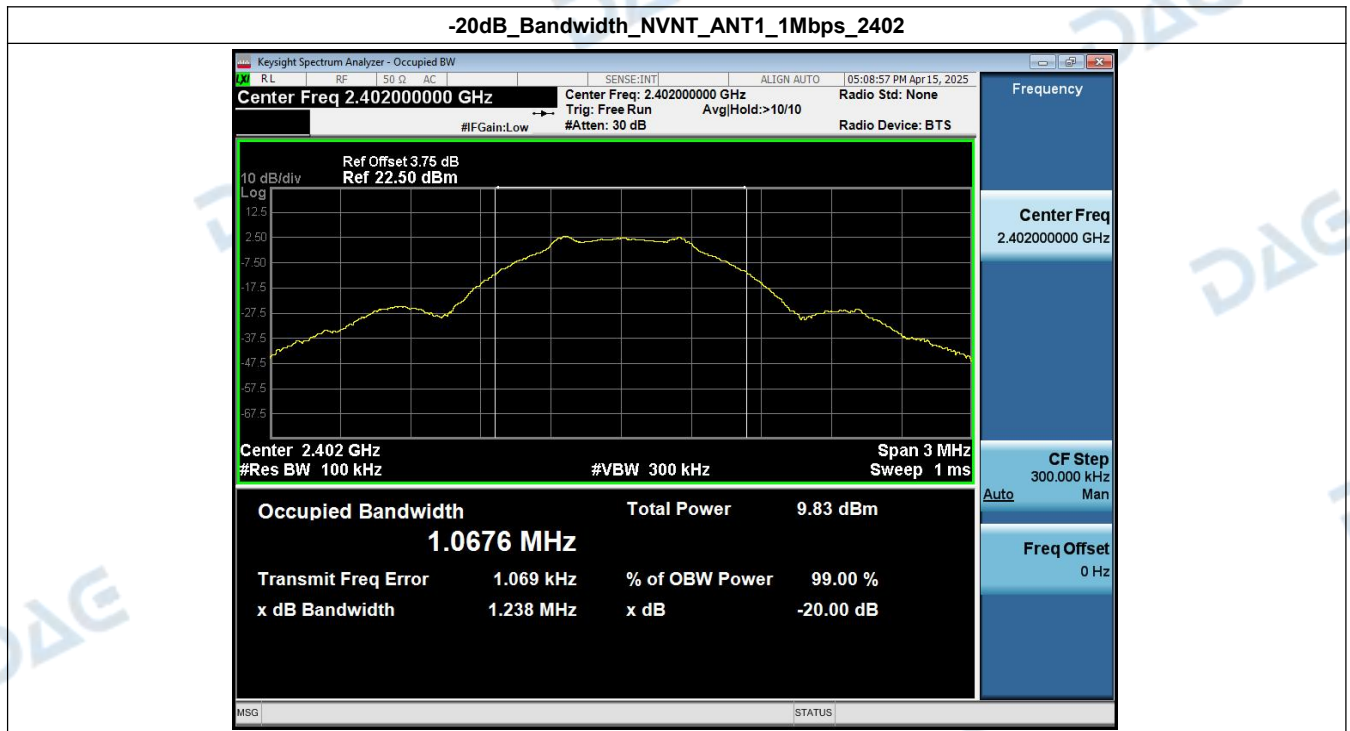

-20dB_Bandwidth_NVNT_ANT1_1Mbps_2440



-20dB_Bandwidth_NVNT_ANT1_1Mbps_2480

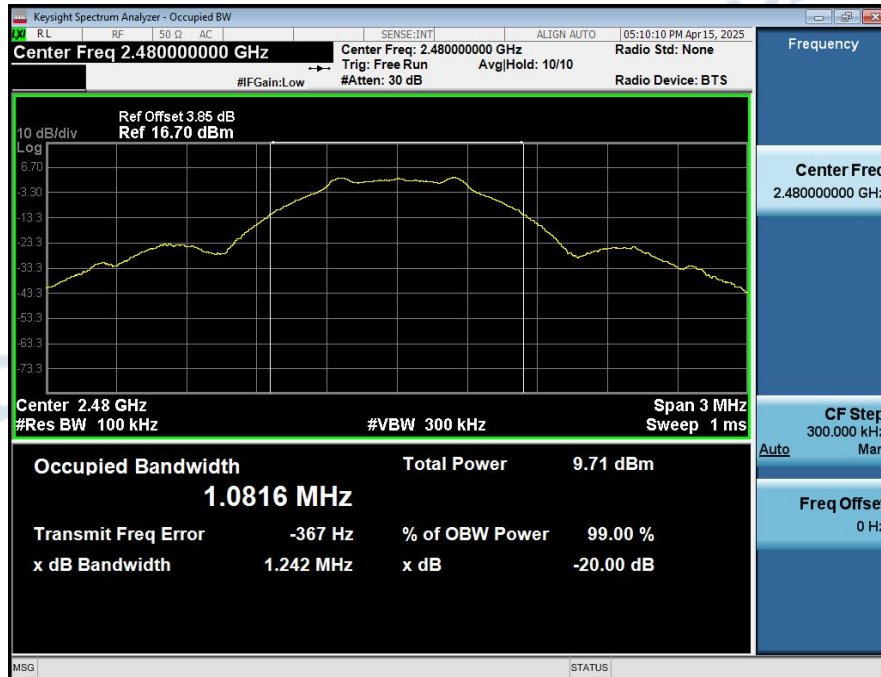

4.3 Field strength of fundamental

Test Requirement:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500
	The field strength of emissions in this band shall not exceed 2500 millivolts/meter.		
Test Method:	ANSI C63.10-2013 section 6.6		
Procedure:	ANSI C63.10-2013 section 6.6		

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.6 °C	Humidity:	51 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM2, TM3				

4.3.2 Test Data:

Frequency	Emission Level	Limits	Margin	Detector	Polarization
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(PK/AV)	(H/V)
2402	100.38	114	-13.62	PK	H
2402	91.57	94	-2.43	AV	H
2402	86.53	114	-27.47	PK	V
2402	80.35	94	-13.65	AV	V

Frequency	Emission Level	Limits	Margin	Detector	Polarization
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(PK/AV)	(H/V)
2440	98.64	114	-15.36	PK	H
2440	89.64	94	-4.36	AV	H
2440	88.64	114	-25.36	PK	V
2440	80.64	94	-13.36	AV	V

Frequency	Emission Level	Limits	Margin	Detector	Polarization
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(PK/AV)	(H/V)
2480	98.94	114	-15.06	PK	H
2480	89.34	94	-4.66	AV	H
2480	89.64	114	-24.36	PK	V
2480	79.64	94	-14.36	AV	V

Note: Margin = Emission Level – Limit; For fundamental frequency, RBW>20dB BW, VBW>=3XRBW


4.4 Band edge emissions (Radiated)

Test Requirement:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
Test Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>		
Test Method:	ANSI C63.10-2013 section 6.6.4		
Procedure:	ANSI C63.10-2013 section 6.6.4		

4.4.1 E.U.T. Operation:


Operating Environment:				
Temperature:	22.6 °C	Humidity:	51 %	Atmospheric Pressure: 102 kPa
Pretest mode:	TM1, TM2, TM3			
Final test mode:	TM1, TM2, TM3			

4.4.2 Test Setup Diagram:

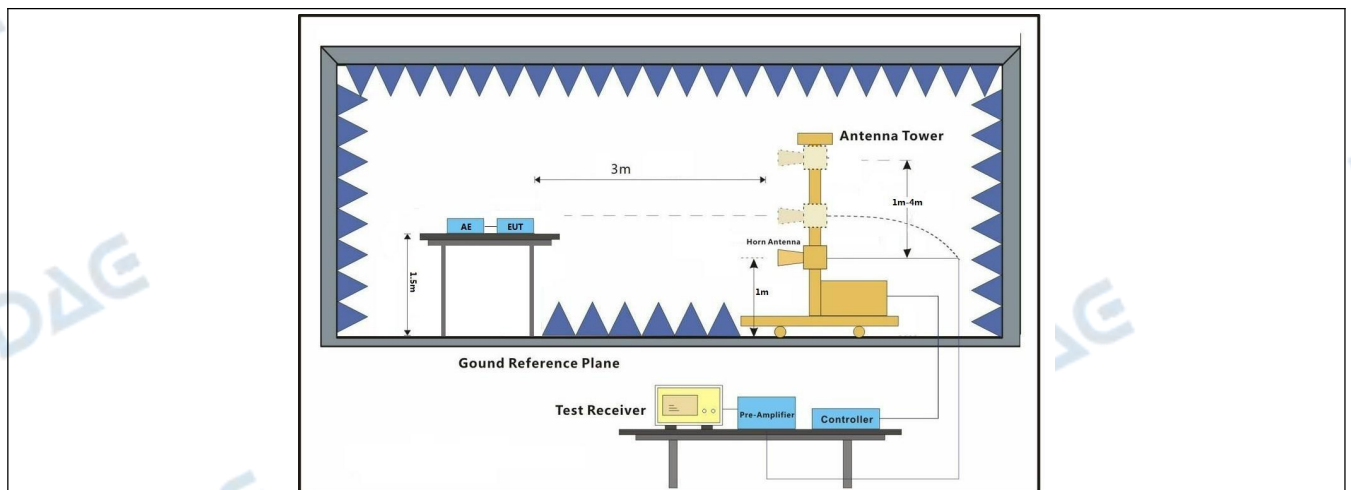


4.4.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: L

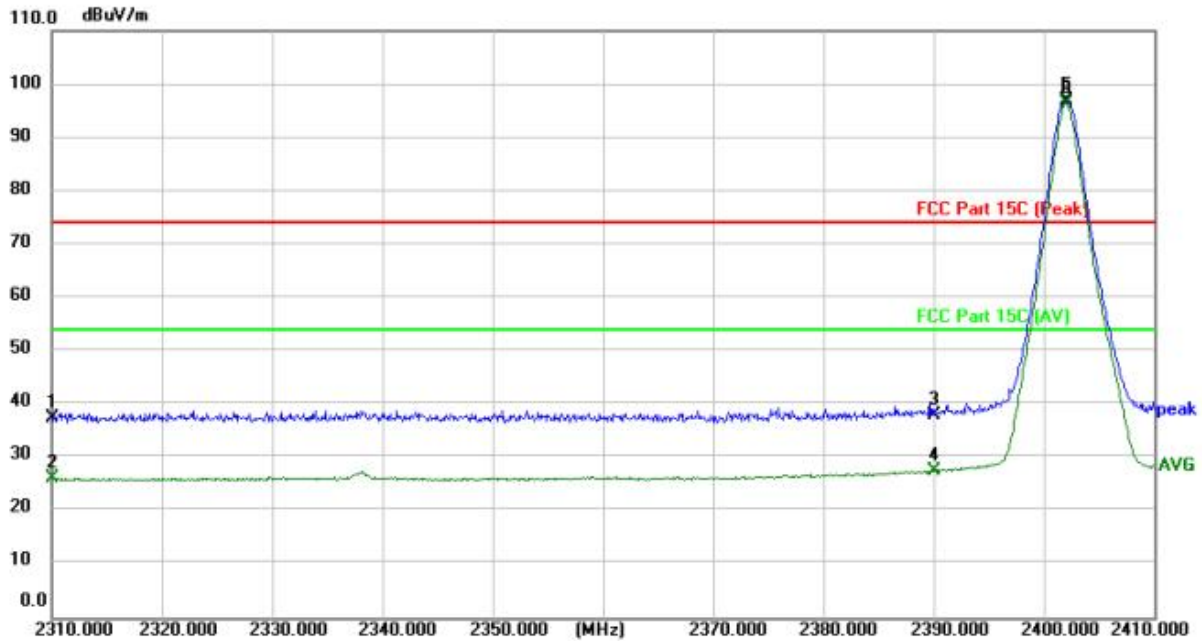


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	41.24	-3.63	37.61	74.00	-36.39	peak			P	
2	2310.000	29.84	-3.63	26.21	54.00	-27.79	AVG			P	
3	2390.000	41.62	-3.42	38.20	74.00	-35.80	peak			P	
4	2390.000	31.05	-3.42	27.63	54.00	-26.37	AVG			P	
5 X	2402.000	100.38	-3.39	96.99	74.00	22.99	peak			F	
6 *	2402.000	99.79	-3.39	96.40	54.00	42.40	AVG			F	

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: L

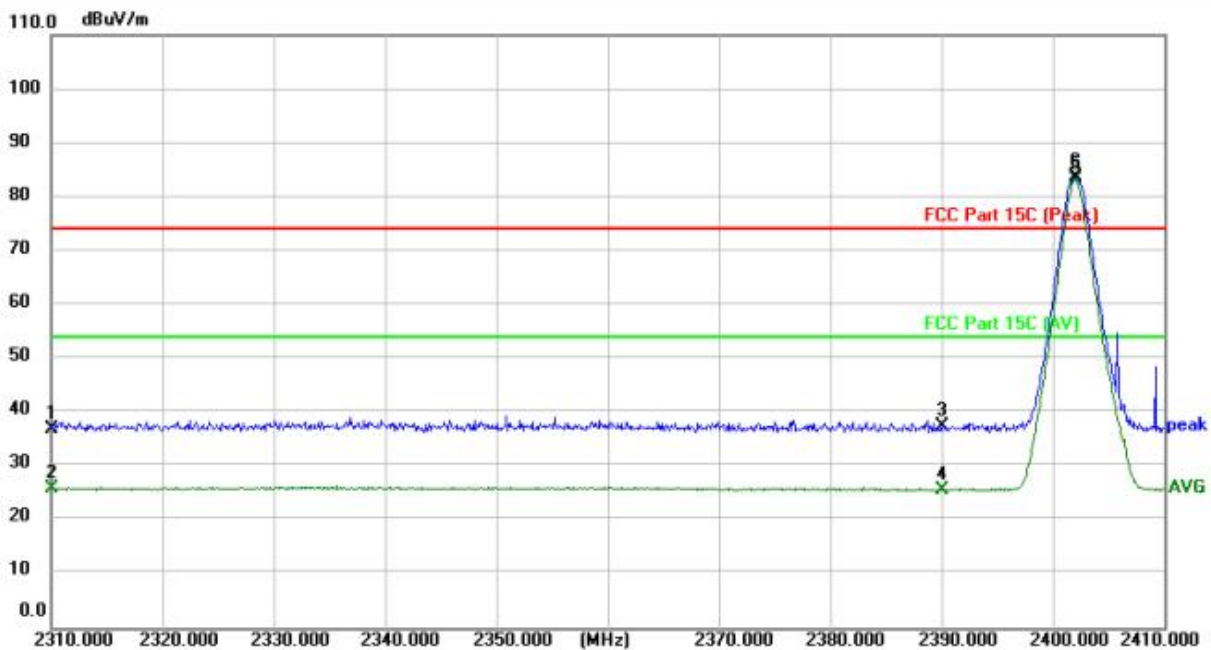


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.64	-3.63	37.01	74.00	-36.99	peak	150		P	
2	2310.000	29.70	-3.63	26.07	54.00	-27.93	AVG	150		P	
3	2390.000	41.05	-3.42	37.63	74.00	-36.37	peak	150		P	
4	2390.000	29.07	-3.42	25.65	54.00	-28.35	AVG	150		P	
5 *	2402.000	86.53	-3.39	83.14	54.00	29.14	AVG	150		F	
6 X	2402.100	87.06	-3.39	83.67	74.00	9.67	peak	150		F	

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: H

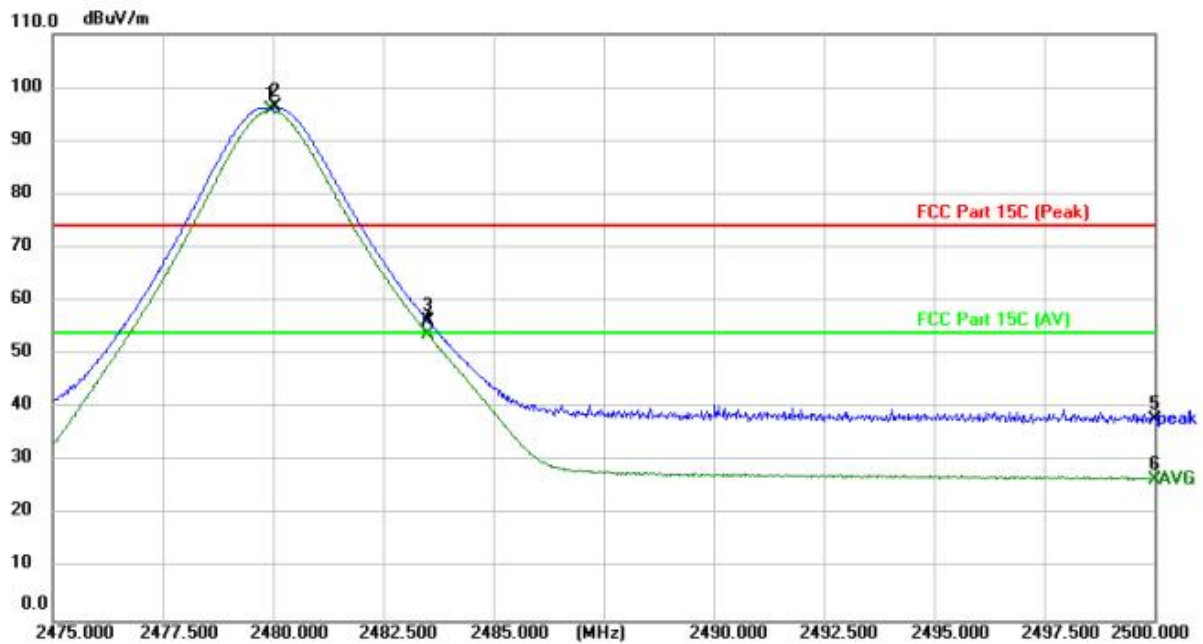

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2479.950	98.94	-3.19	95.75	54.00	41.75	AVG	150		F	
2 X	2480.050	99.47	-3.19	96.28	74.00	22.28	peak	150		F	
3	2483.500	59.44	-3.17	56.27	74.00	-17.73	peak	150		P	
4	2483.500	57.00	-3.17	53.83	54.00	-0.17	AVG	150		P	
5	2500.000	41.03	-3.13	37.90	74.00	-36.10	peak	150		P	
6	2500.000	29.76	-3.13	26.63	54.00	-27.37	AVG	150		P	

TM3 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: H

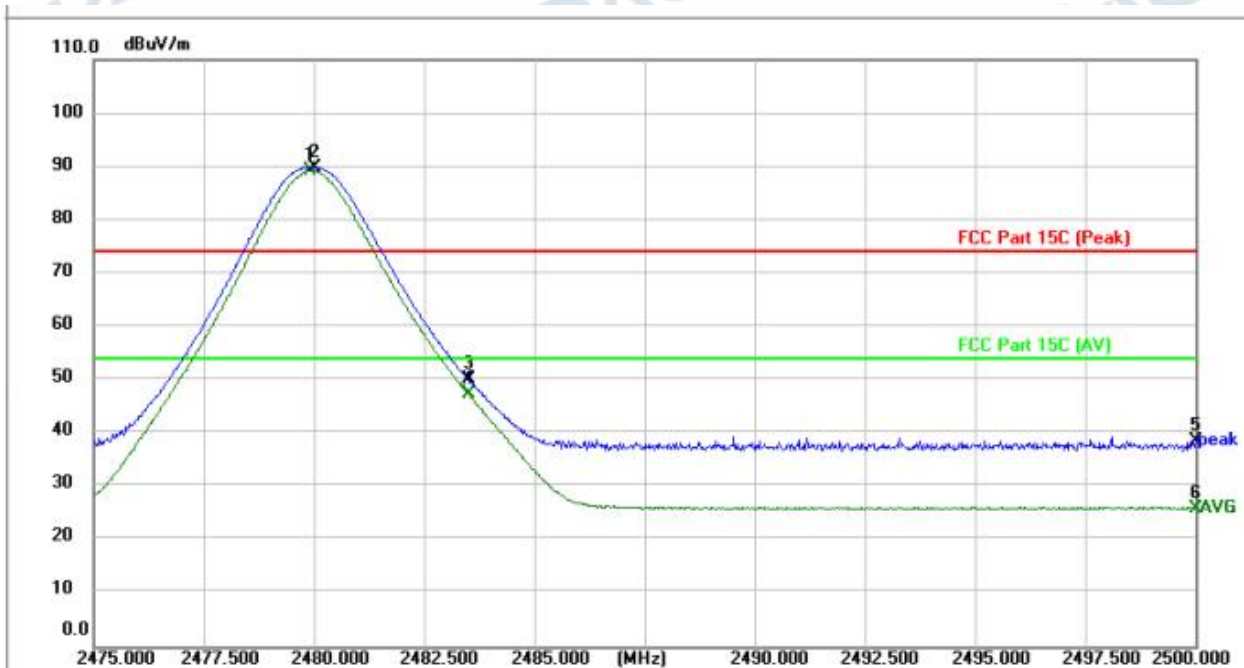

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2479.900	92.43	-3.19	89.24	54.00	35.24	AVG	150		F	
2 X	2480.000	92.98	-3.19	89.79	74.00	15.79	peak	150		F	
3	2483.500	53.46	-3.17	50.29	74.00	-23.71	peak	150		P	
4	2483.500	50.54	-3.17	47.37	54.00	-6.63	AVG	150		P	
5	2500.000	41.75	-3.13	38.62	74.00	-35.38	peak	150		P	
6	2500.000	29.19	-3.13	26.06	54.00	-27.94	AVG	150		P	

4.5 Emissions in frequency bands (below 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)																																								
Test Limit:	<p>Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:</p> <table border="1"> <thead> <tr> <th>Fundamental frequency</th><th>Field strength of fundamental (millivolts/meter)</th><th>Field strength of harmonics (microvolts/meter)</th></tr> </thead> <tbody> <tr> <td>902-928 MHz</td><td>50</td><td>500</td></tr> <tr> <td>2400-2483.5 MHz</td><td>50</td><td>500</td></tr> <tr> <td>5725-5875 MHz</td><td>50</td><td>500</td></tr> <tr> <td>24.0-24.25 GHz</td><td>250</td><td>2500</td></tr> </tbody> </table> <p>Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr> </thead> <tbody> <tr> <td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr> <tr> <td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr> <tr> <td>1.705-30.0</td><td>30</td><td>30</td></tr> <tr> <td>30-88</td><td>100 **</td><td>3</td></tr> <tr> <td>88-216</td><td>150 **</td><td>3</td></tr> <tr> <td>216-960</td><td>200 **</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>3</td></tr> </tbody> </table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.</p>		Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)																																							
902-928 MHz	50	500																																							
2400-2483.5 MHz	50	500																																							
5725-5875 MHz	50	500																																							
24.0-24.25 GHz	250	2500																																							
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																							
0.009-0.490	2400/F(kHz)	300																																							
0.490-1.705	24000/F(kHz)	30																																							
1.705-30.0	30	30																																							
30-88	100 **	3																																							
88-216	150 **	3																																							
216-960	200 **	3																																							
Above 960	500	3																																							
Test Method:	ANSI C63.10-2013 section 6.5																																								
Procedure:	ANSI C63.10-2013 section 6.5																																								


4.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.6 °C	Humidity:	51 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3				

Final test mode: TM1, TM2, TM3


4.5.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: L

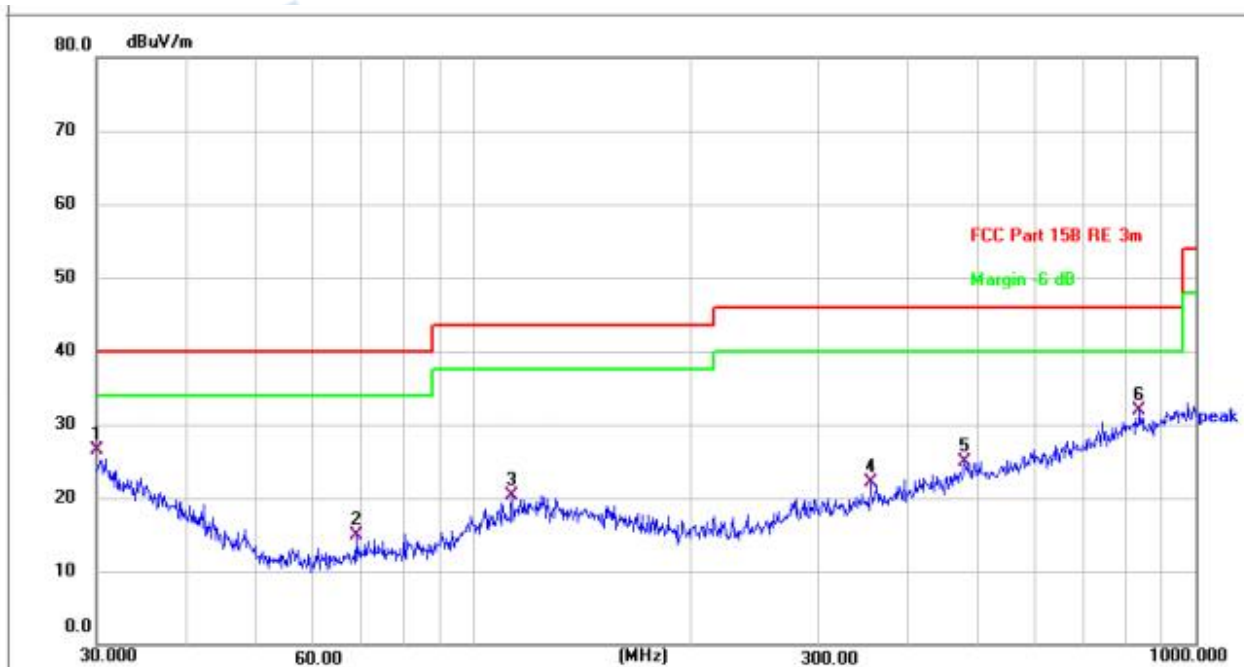

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	30.0000	26.00	0.53	26.53	40.00	-13.47	QP	100		P	
2	68.6310	26.84	-11.94	14.90	40.00	-25.10	QP	100		P	
3	112.9196	26.36	-6.05	20.31	43.50	-23.19	QP	100		P	
4	354.1831	27.03	-4.84	22.19	46.00	-23.81	QP	100		P	
5	478.8455	26.25	-1.34	24.91	46.00	-21.09	QP	100		P	
6	836.2443	27.10	4.75	31.85	46.00	-14.15	QP	100		P	

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: L

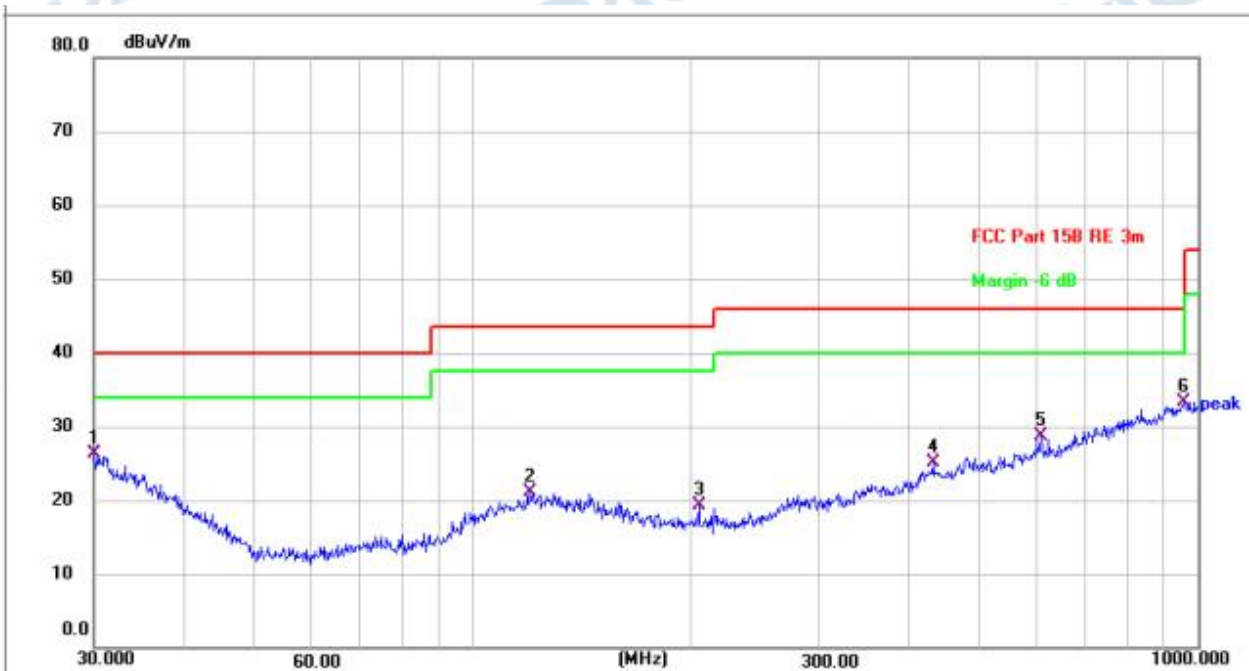

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.1054	25.78	0.46	26.24	40.00	-13.76	QP	100		P	
2	119.8556	26.75	-5.60	21.15	43.50	-22.35	QP	100		P	
3	204.9551	28.02	-8.78	19.24	43.50	-24.26	QP	100		P	
4	431.0316	27.49	-2.40	25.09	46.00	-20.91	QP	100		P	
5	607.7867	28.18	0.49	28.67	46.00	-17.33	QP	100		P	
6 *	955.4381	26.83	6.56	33.39	46.00	-12.61	QP	100		P	

4.6 Emissions in frequency bands (above 1GHz)


Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)																																								
Test Limit:	<p>Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:</p> <table border="1"> <thead> <tr> <th>Fundamental frequency</th><th>Field strength of fundamental (millivolts/meter)</th><th>Field strength of harmonics (microvolts/meter)</th></tr> </thead> <tbody> <tr> <td>902-928 MHz</td><td>50</td><td>500</td></tr> <tr> <td>2400-2483.5 MHz</td><td>50</td><td>500</td></tr> <tr> <td>5725-5875 MHz</td><td>50</td><td>500</td></tr> <tr> <td>24.0-24.25 GHz</td><td>250</td><td>2500</td></tr> </tbody> </table> <p>Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr> </thead> <tbody> <tr> <td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr> <tr> <td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr> <tr> <td>1.705-30.0</td><td>30</td><td>30</td></tr> <tr> <td>30-88</td><td>100 **</td><td>3</td></tr> <tr> <td>88-216</td><td>150 **</td><td>3</td></tr> <tr> <td>216-960</td><td>200 **</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>3</td></tr> </tbody> </table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.</p>		Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)																																							
902-928 MHz	50	500																																							
2400-2483.5 MHz	50	500																																							
5725-5875 MHz	50	500																																							
24.0-24.25 GHz	250	2500																																							
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																							
0.009-0.490	2400/F(kHz)	300																																							
0.490-1.705	24000/F(kHz)	30																																							
1.705-30.0	30	30																																							
30-88	100 **	3																																							
88-216	150 **	3																																							
216-960	200 **	3																																							
Above 960	500	3																																							
Test Method:	ANSI C63.10-2013 section 6.6																																								
Procedure:	ANSI C63.10-2013 section 6.6																																								

4.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.6 °C	Humidity:	51 %	Atmospheric Pressure:	102 kPa


Pretest mode:	TM1, TM2, TM3
Final test mode:	TM1, TM2, TM3

4.6.2 Test Setup Diagram:

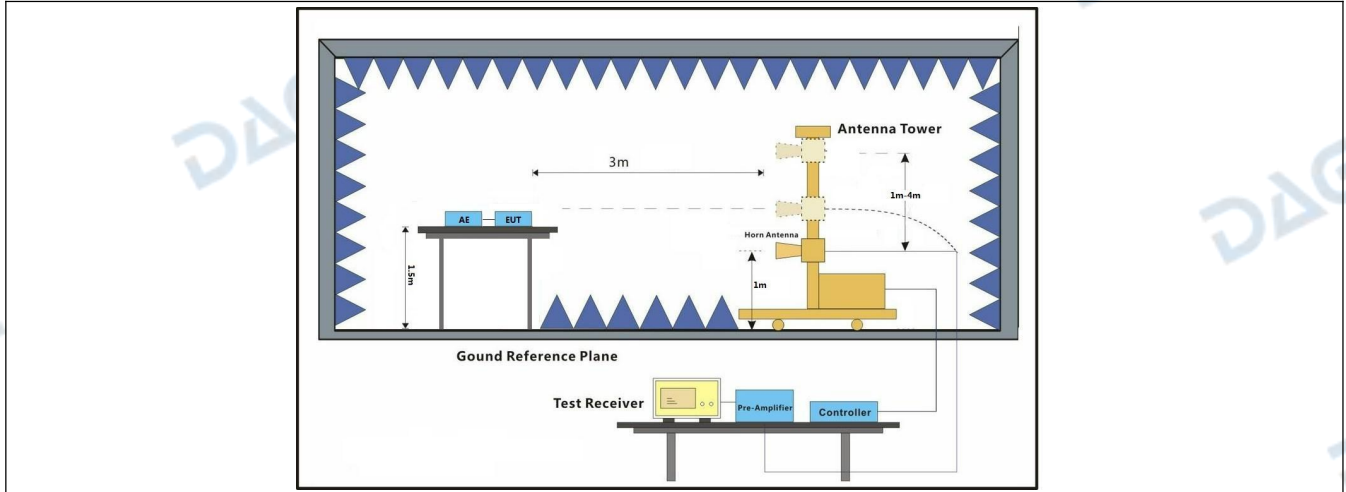


4.6.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: L

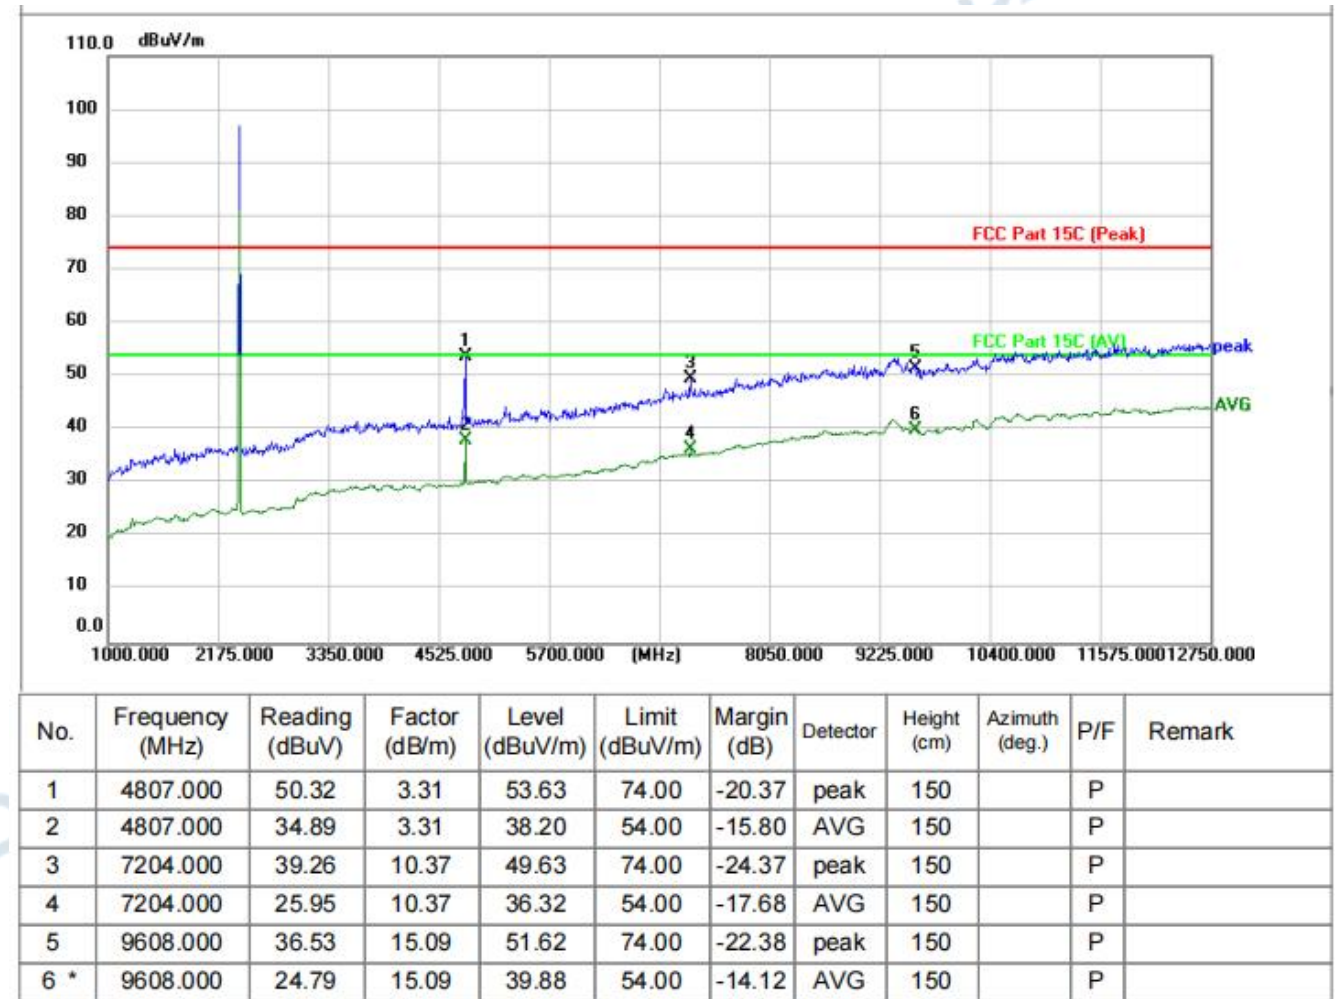

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: L

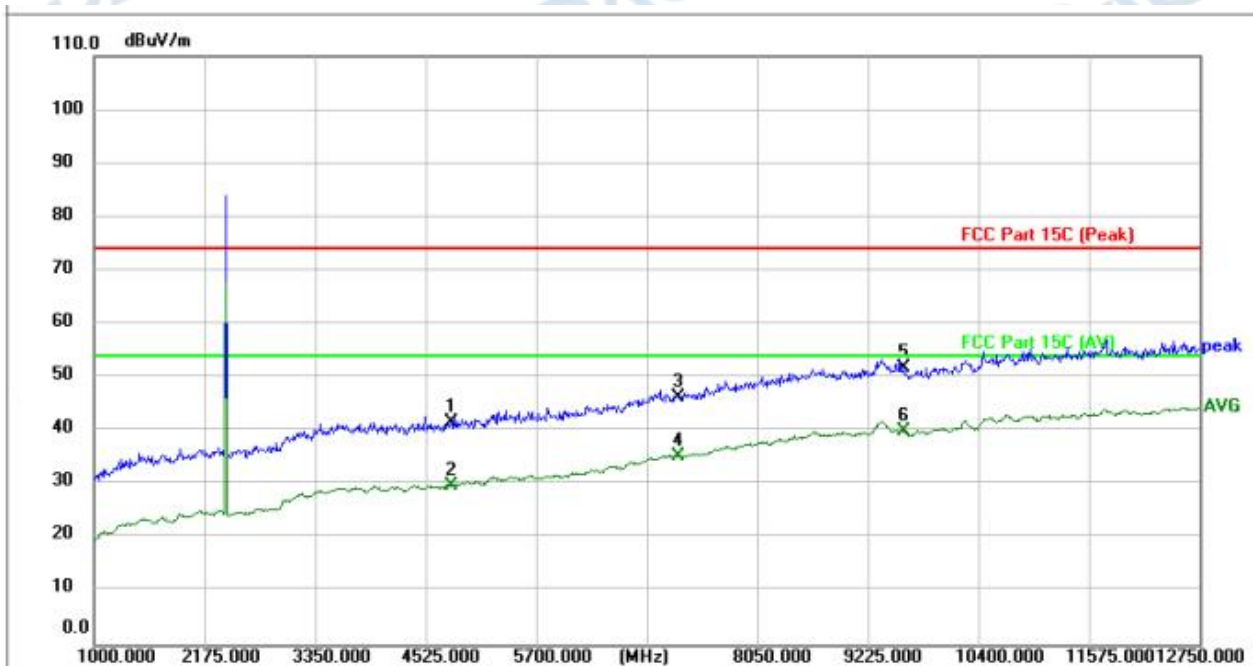


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4804.000	38.24	3.30	41.54	74.00	-32.46	peak	150		P	
2	4804.000	26.55	3.30	29.85	54.00	-24.15	AVG	150		P	
3	7206.000	36.01	10.37	46.38	74.00	-27.62	peak	150		P	
4	7206.000	25.04	10.37	35.41	54.00	-18.59	AVG	150		P	
5	9608.000	36.73	15.09	51.82	74.00	-22.18	peak	150		P	
6 *	9608.000	24.83	15.09	39.92	54.00	-14.08	AVG	150		P	

TM2 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: M




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4880.000	38.42	3.55	41.97	74.00	-32.03	peak	150		P	
2	4880.000	26.52	3.55	30.07	54.00	-23.93	AVG	150		P	
3	7320.000	37.78	10.57	48.35	74.00	-25.65	peak	150		P	
4	7320.000	26.05	10.57	36.62	54.00	-17.38	AVG	150		P	
5	9760.000	35.78	15.09	50.87	74.00	-23.13	peak	150		P	
6 *	9760.000	24.65	15.09	39.74	54.00	-14.26	AVG	150		P	

TM2 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: M

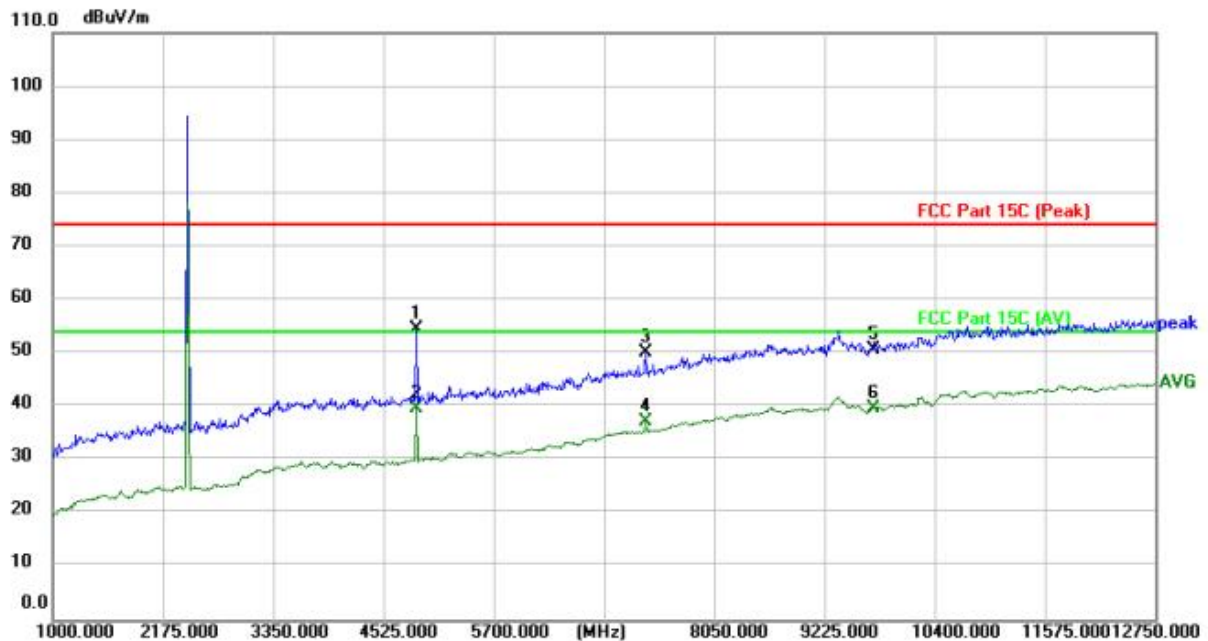


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4877.500	51.00	3.55	54.55	74.00	-19.45	peak	150		P	
2	4877.500	36.07	3.55	39.62	54.00	-14.38	AVG	150		P	
3	7321.500	39.64	10.57	50.21	74.00	-23.79	peak	150		P	
4	7321.500	26.62	10.57	37.19	54.00	-16.81	AVG	150		P	
5	9760.000	35.56	15.09	50.65	74.00	-23.35	peak	150		P	
6 *	9760.000	24.71	15.09	39.80	54.00	-14.20	AVG	150		P	

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: H

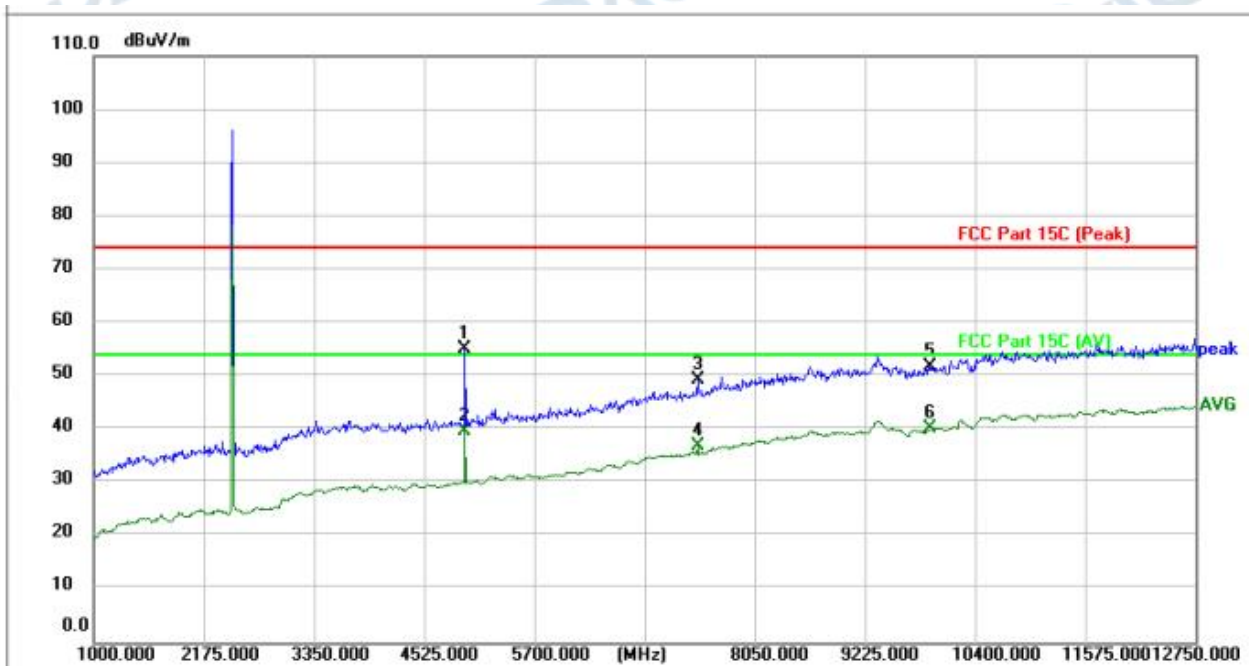

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4959.750	51.20	3.83	55.03	74.00	-18.97	peak	150		P	
2	4959.750	35.94	3.83	39.77	54.00	-14.23	AVG	150		P	
3	7439.000	38.66	10.78	49.44	74.00	-24.56	peak	150		P	
4	7439.000	26.25	10.78	37.03	54.00	-16.97	AVG	150		P	
5	9920.000	36.70	15.08	51.78	74.00	-22.22	peak	150		P	
6 *	9920.000	25.17	15.08	40.25	54.00	-13.75	AVG	150		P	

TM3 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: H

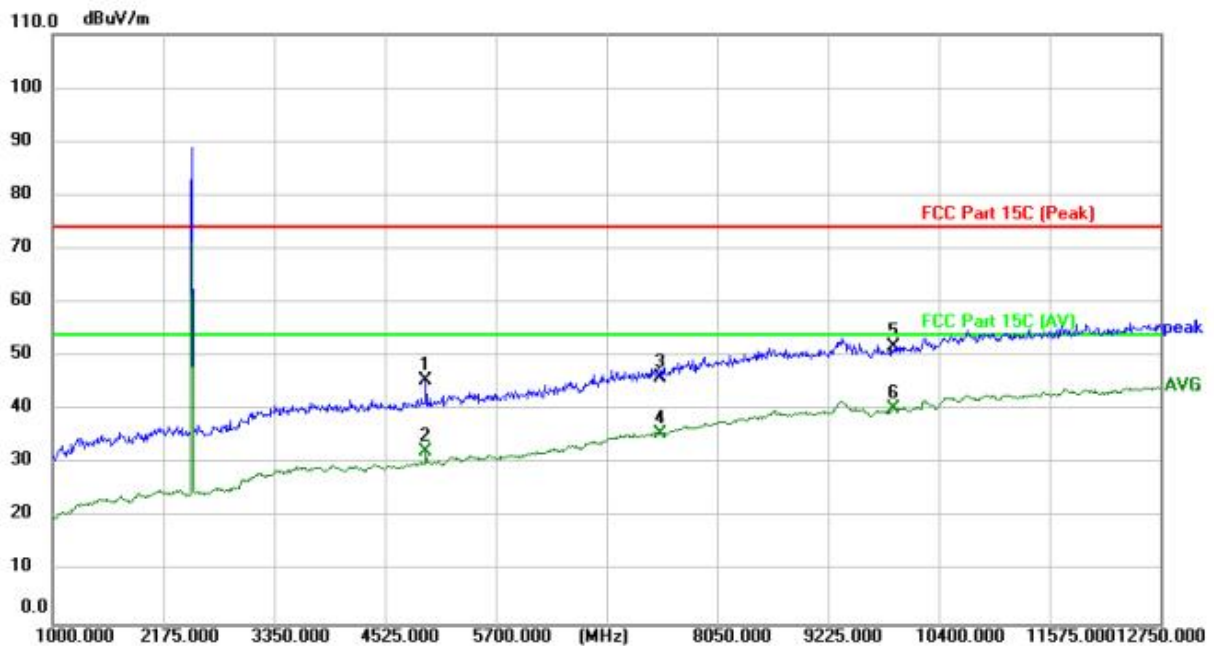


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4959.750	41.66	3.83	45.49	74.00	-28.51	peak	150		P	
2	4959.750	28.62	3.83	32.45	54.00	-21.55	AVG	150		P	
3	7440.000	35.18	10.78	45.96	74.00	-28.04	peak	150		P	
4	7440.000	24.93	10.78	35.71	54.00	-18.29	AVG	150		P	
5	9920.000	36.76	15.08	51.84	74.00	-22.16	peak	150		P	
6 *	9920.000	25.19	15.08	40.27	54.00	-13.73	AVG	150		P	

5 TEST SETUP PHOTOS

Conducted Emission at AC power line



Emissions in frequency bands (below 1GHz)

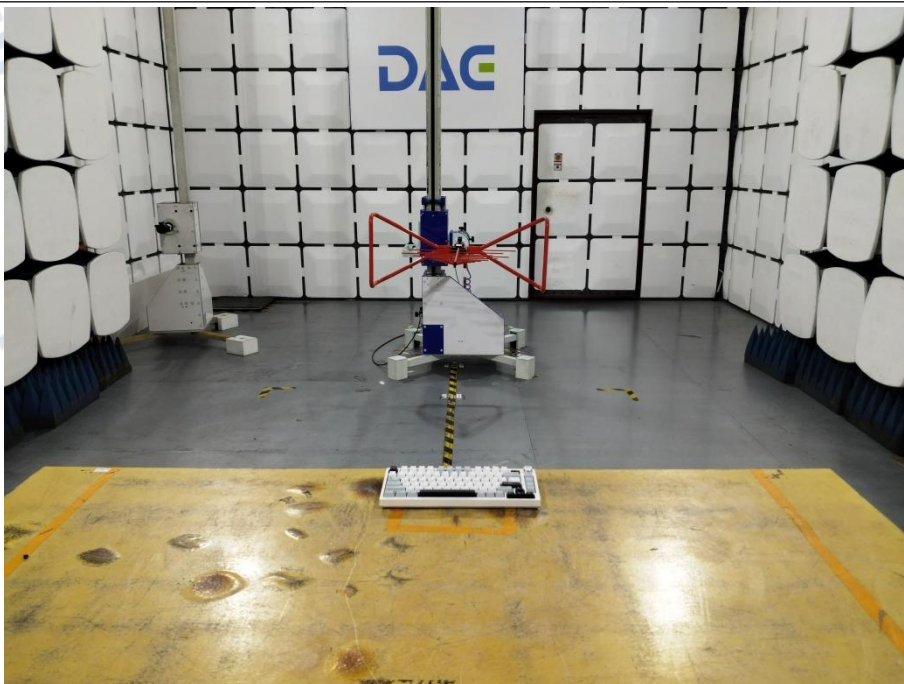


Emissions in frequency bands (above 1GHz)



6 PHOTOS OF THE EUT


External

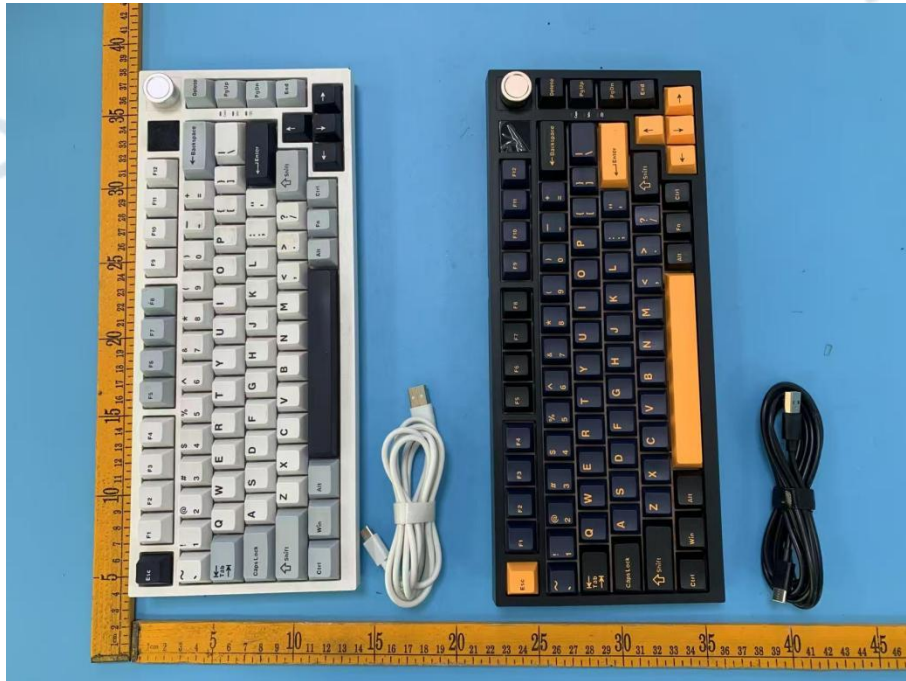












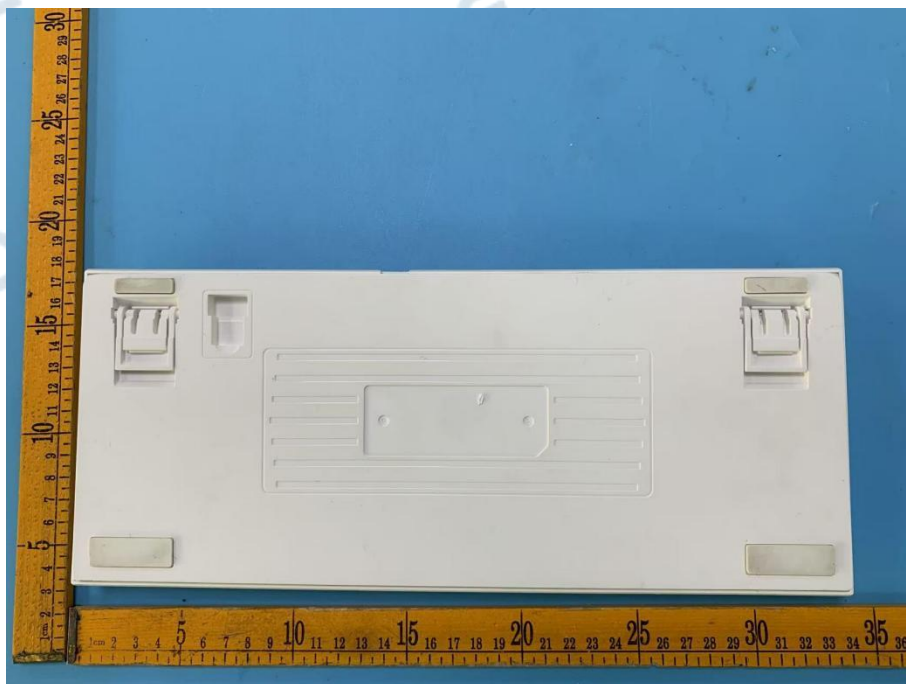




Internal


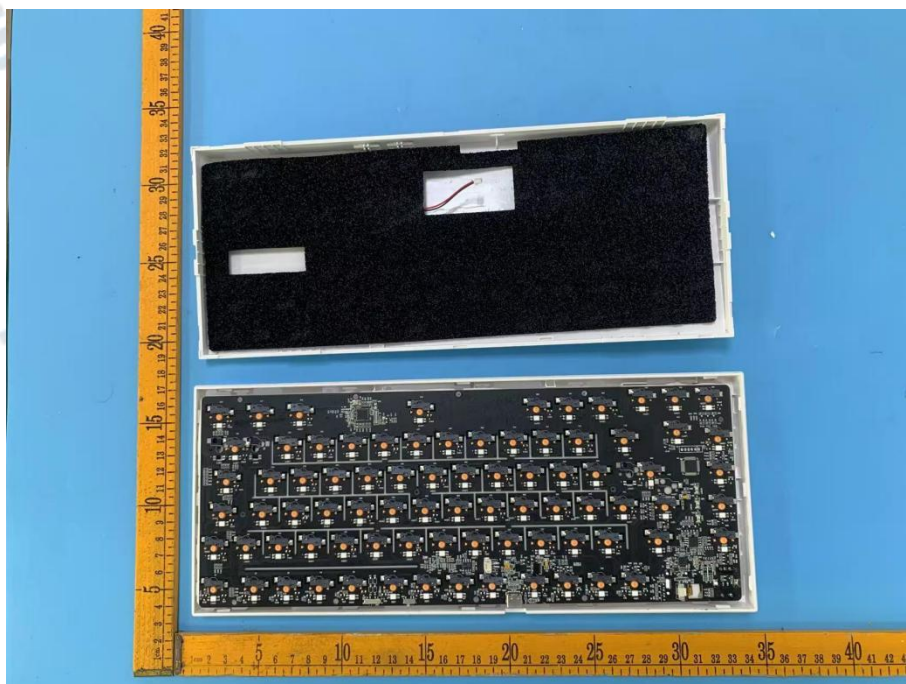


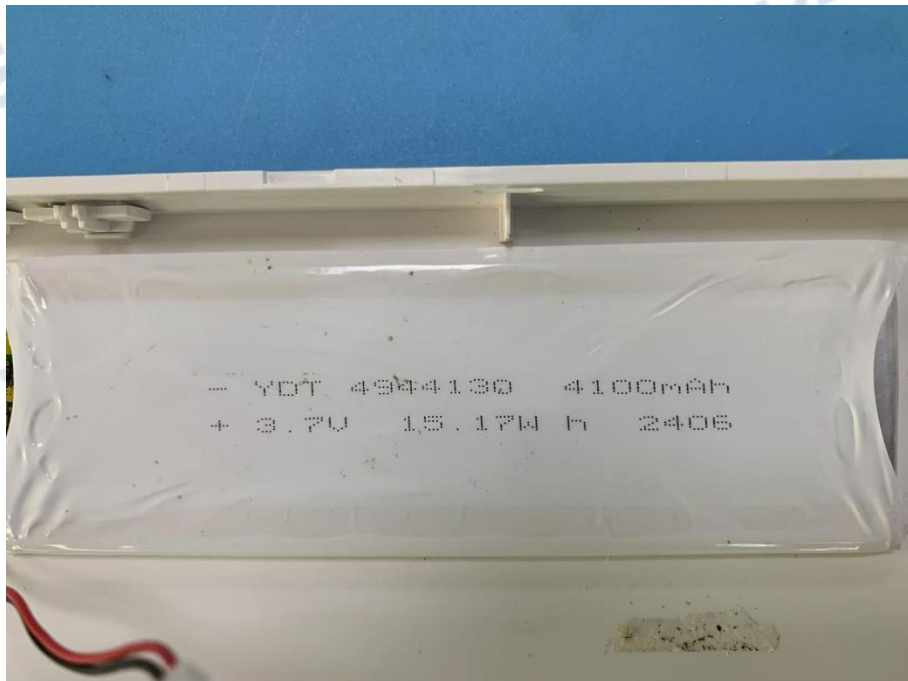
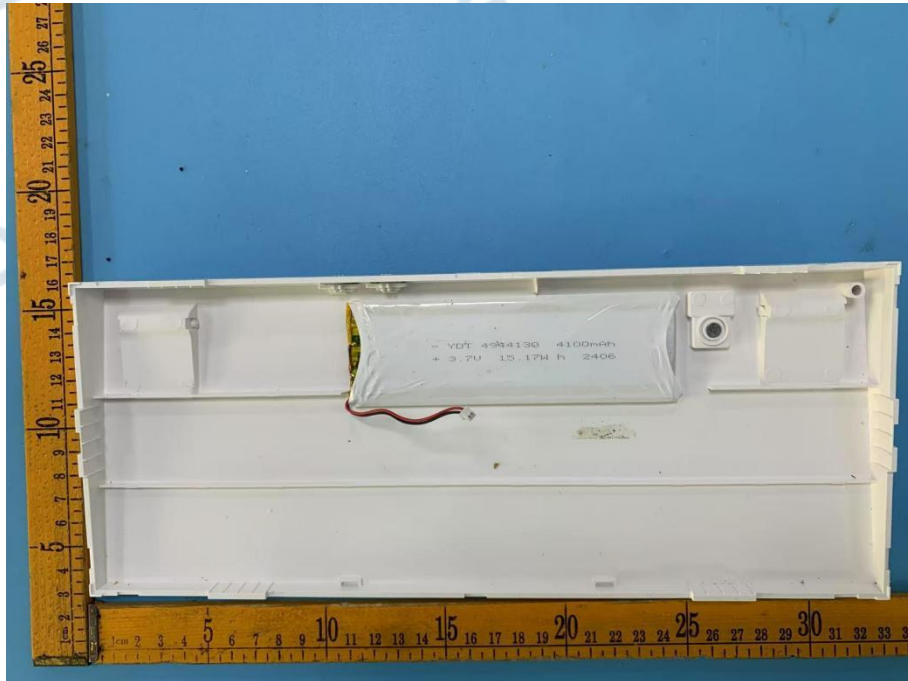


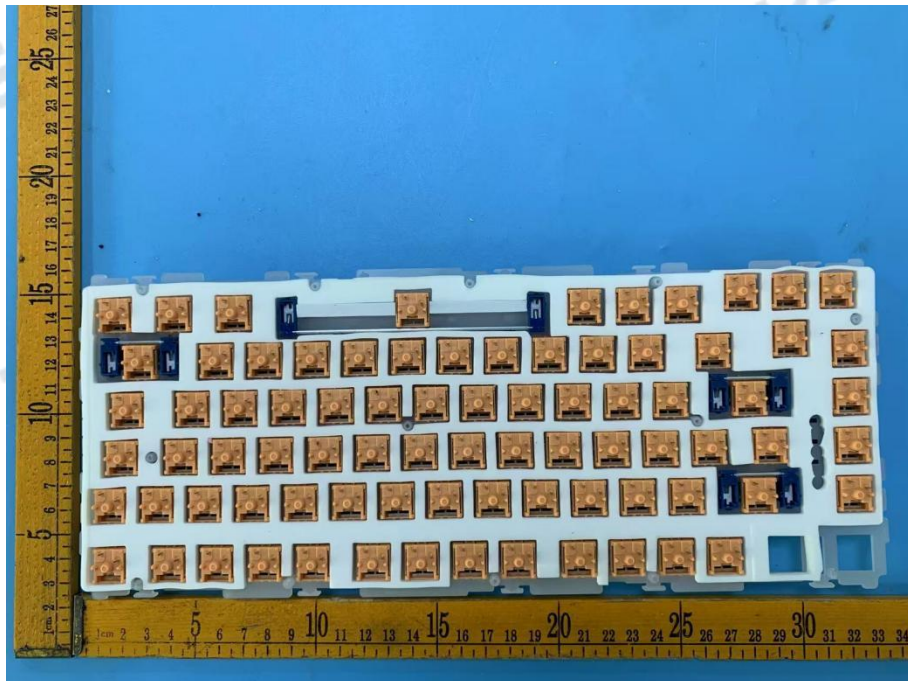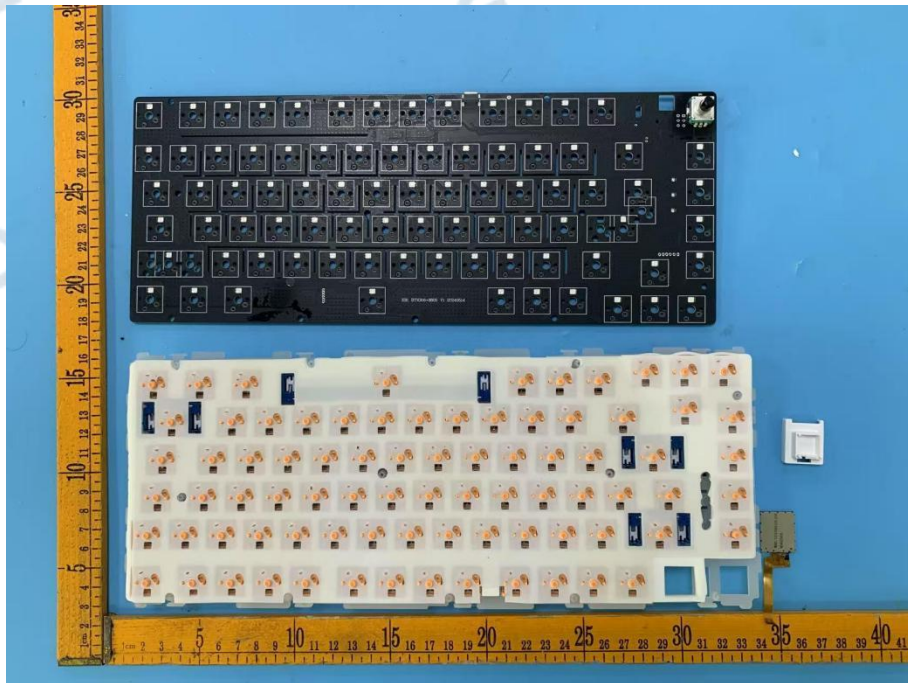

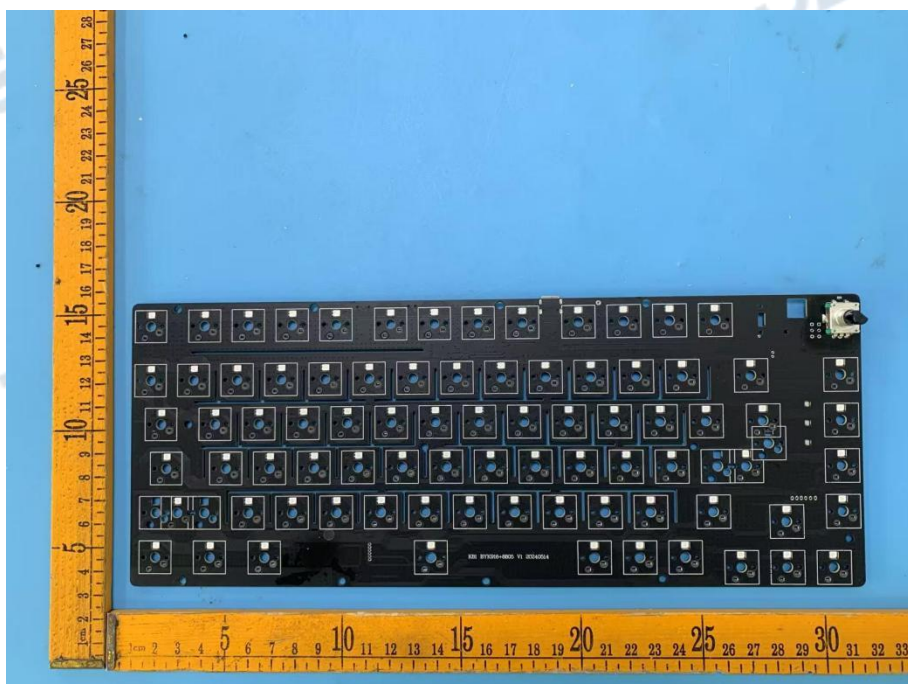

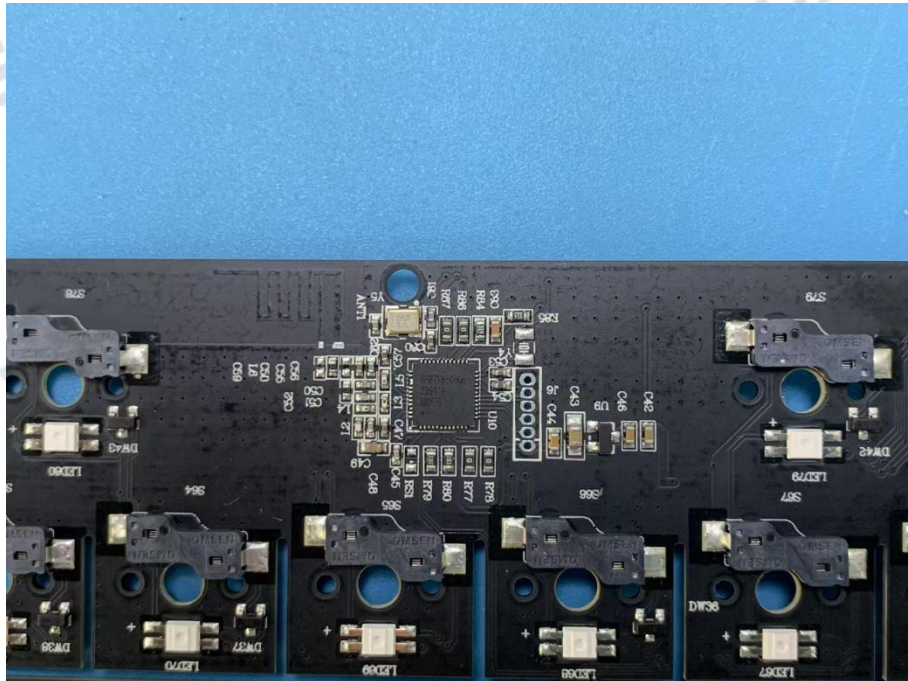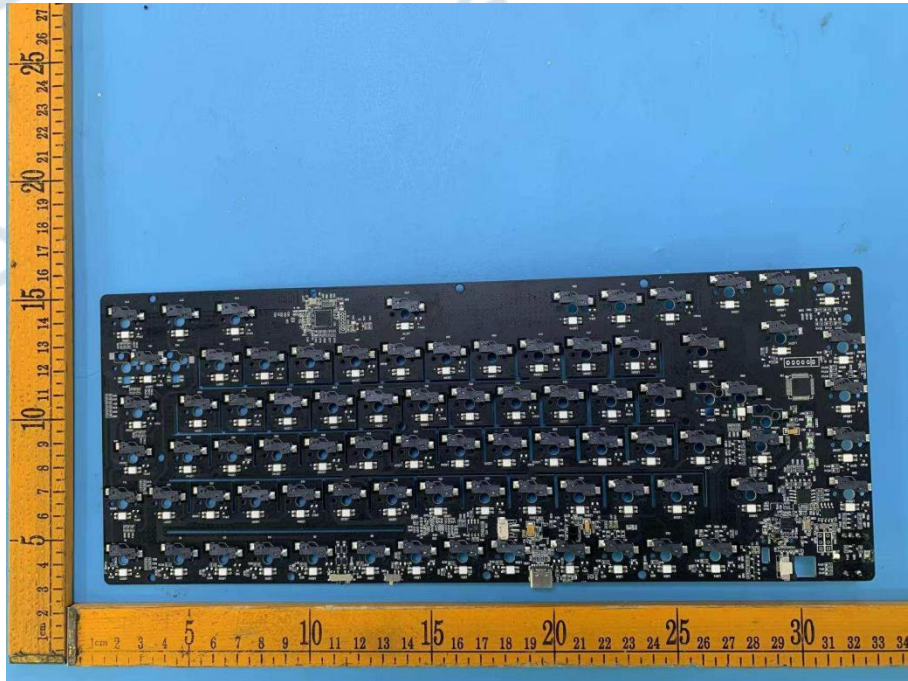

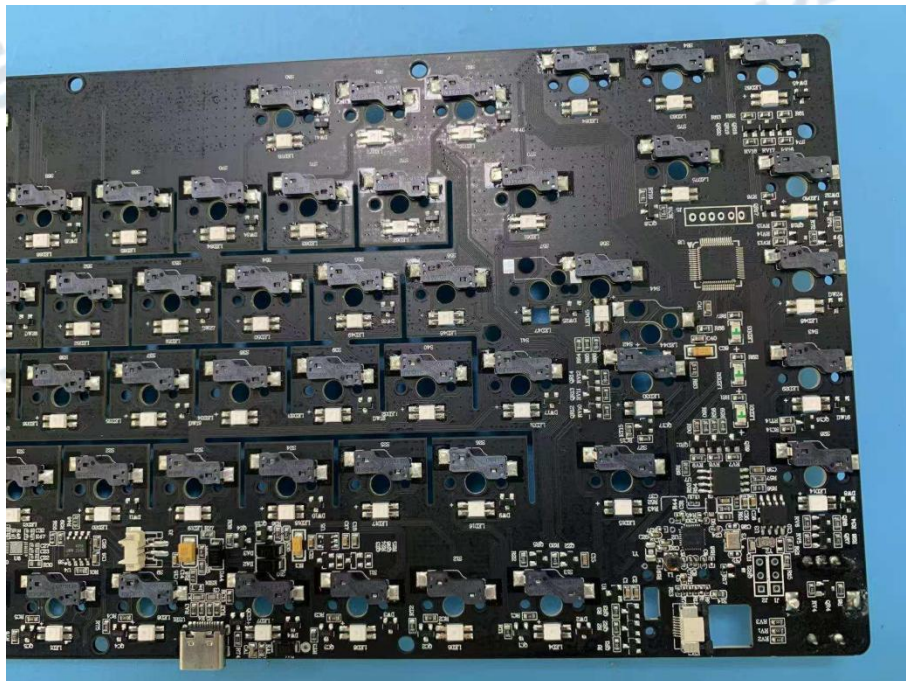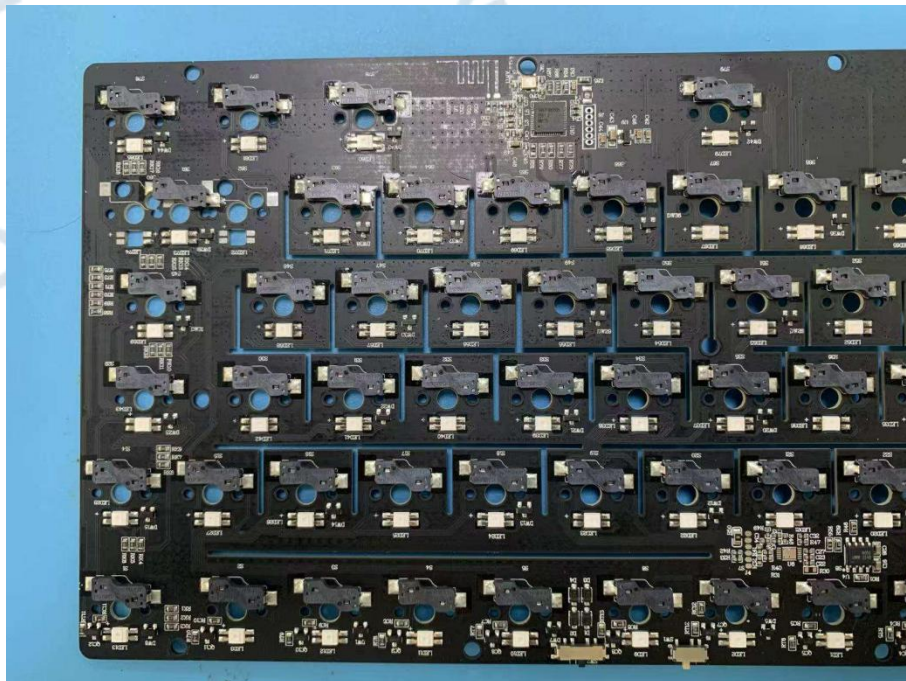

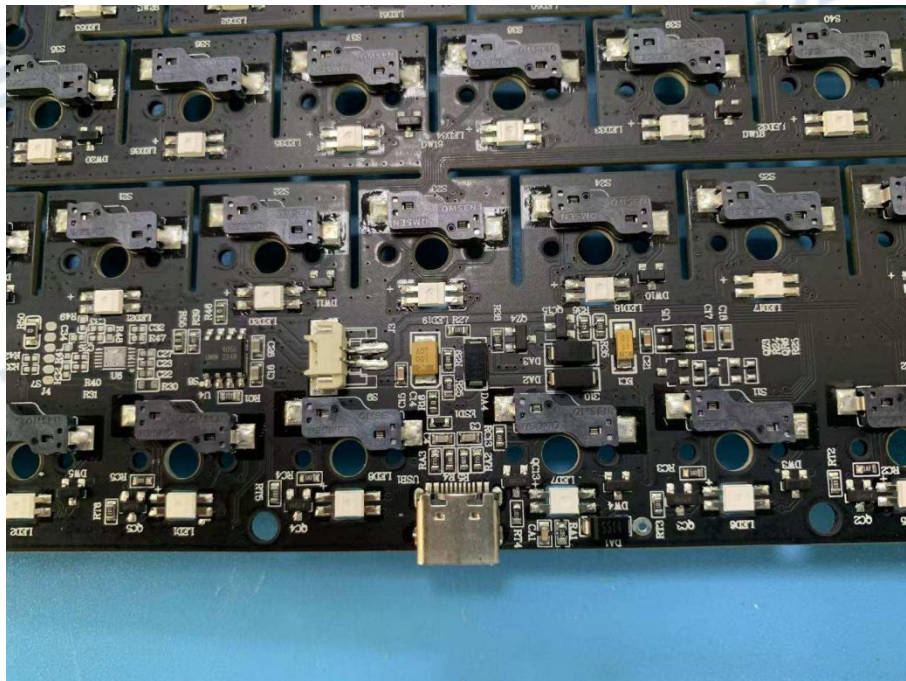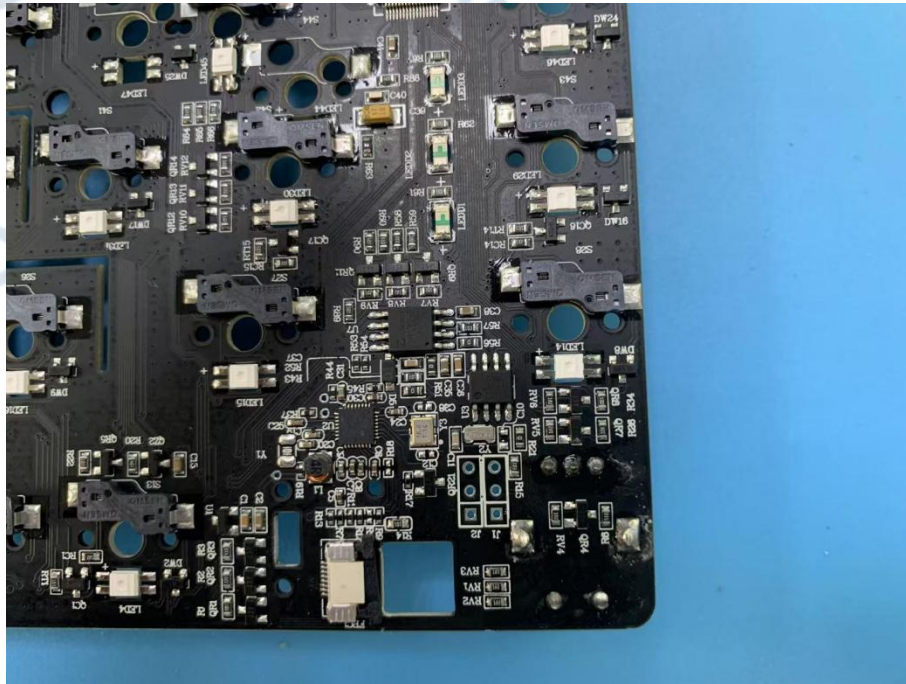

***** End of Report *****