

FCC Test Report

Report No.: AGC01110230762FR02

FCC ID	:	2A0KB-A3133
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	soundcore Motion 100
BRAND NAME	:	soundcore
MODEL NAME	:	A3133
APPLICANT	:	Anker Innovations Limited
DATE OF ISSUE	:	Sep. 19, 2023
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Sep. 19, 2023	Valid	Initial Release	



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	21
8.2 Measurement Procedure	21
8.3 Measurement Setup (Block Diagram of Configuration)	21
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge And Out-of-Band Emissions	



Report No.: AGC01110230762FR02 Page 4 of 70

10.1 Provisions Applicable	34
10.2 Measurement Procedure	34
10.3 Measurement Setup (Block Diagram of Configuration)	34
10.4 Measurement Results	35
11. Radiated Spurious Emission	46
11.1 Measurement Limits	46
11.2 Measurement Procedure	46
11.3 Measurement Setup (Block Diagram of Configuration)	49
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	66
12.1 Measurement Limits	66
12.2 Measurement Setup (Block Diagram of Configuration)	66
12.3 Preliminary Procedure of Line Conducted Emission Test	67
12.4 Final Procedure of Line Conducted Emission Test	67
12.5 Measurement Results	67
Appendix I: Photographs of Test Setup	70
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	Anker Innovations Limited
Address	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Manufacturer	Anker Innovations Limited
Address	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Factory	N/A
Address	N/A
Product Designation	soundcore Motion 100
Brand Name	soundcore
Test Model	A3133
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Aug. 31, 2023
Date of Test	Aug. 31, 2023~Sep. 19, 2023
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Cool chem Prepared By Cool Cheng Sep. 19, 2023 (Project Engineer) **Reviewed By** Calvin Liu Sep. 19, 2023 (Reviewer) Approved By Max Zhang Sep. 19, 2023 Authorized Officer



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.3
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40 Channels
Carrier Frequency of Each Channel	40 Channels (37 hopping + 3 advertising channel)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): 2.017dBm (0.0016 W) Bluetooth LE (2Mbps): 1.704dBm (0.0015 W)
Hardware Version	V1.1
Software Version	V1.0.3
Antenna Designation	PCB Antenna
Antenna Gain	3.03dBi
Power Supply	DC 7.3V 2400mAh by battery of DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: $f = 2402 + 2^{k} MHz$, $k = 0,, 39$ f is the operating frequency (MHz) k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2AOKB-A3133, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.03dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 7.3V

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 List of Equipment Use

RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
\square	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02		
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08		
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024/06/02		



Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Huawei adapter	HW-200325CP0	huawei	Input:100-240V 50/60Hz,1.8A Output: DC 5V2A	2.2m,unshielded
2	Xiaomi phone	Mi 10	Xiaomi	N/A	
3	USB-TTL	N/A	N/A	N/A	

☑ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	USB Cable	N/A	N/A	N/A	0.52m,unshielded



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

	Summary Table of Test Cases			
Test Item	Data Rate / Modulation			
rest item	Bluetooth – LE / GFSK			
Radiated&Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter) Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter) Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered or AC/DC adapter) Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered or AC/DC adapter) Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered or AC/DC adapter)			
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)			
Note:				
 Only the result of the worst case was recorded in the report, if no other cases. The battery is full-charged during the test. 				

- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
 - Software Setting Diagram

CACTIONS BT FCC	Tool V2.24	? ×
SOLUTION ATS283XP -	COM COM2 - 115200 -	BQB Mode
RF Channel 0 🗸	Hopping Mode 📃 Vser	▼ random ▼
Packet Type BLE_2M 🔻	Payload Typ	e PRBS9 🔻
TX Gain Index <mark>6 🗸 🗸</mark>	RX Gain Inde	x 0 🔻
Access Code Ox AbDdE341	AGC Mod	e 📃
1结束ContinueTX测试, 持续118.	cket:DH5 Payload:PRBS9 TxGain:6) 1秒 .cket:BLE_1M Payload:PRBS9 TxGain:6)	Hopping TX



6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	2117	85.00	0.71	0.47
BLE_2Mbps	1066	85.00	0.71	0.94

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

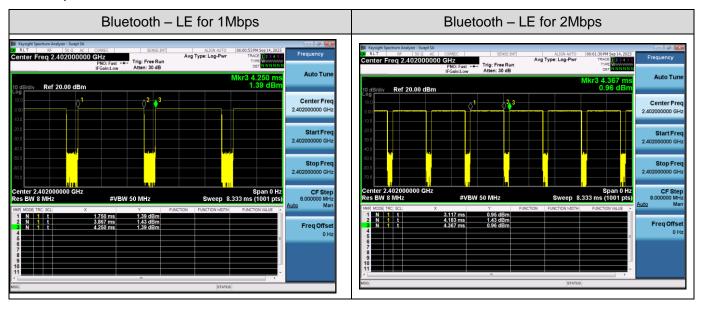

^{1.} Duty Cycle factor = 10 * log (1/ Duty cycle)



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 Method Integrated band power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW≥DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector Function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

⊠For Average power test setup

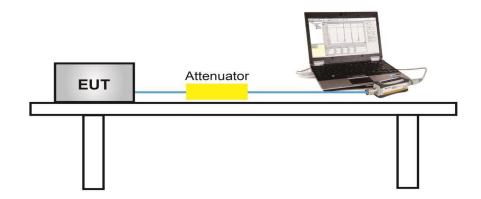



For peak power test setup

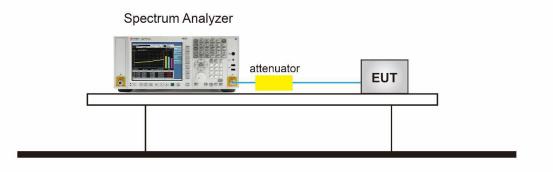


7.4 Measurement Result

Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
GFSK_1Mbps	2402	2.017	≪30	Pass	
	2440	1.517	≪30	Pass	
	2480	1.271	≪30	Pass	
	2402	1.704	≪30	Pass	
GFSK_2Mbps	2440	1.203	≪30	Pass	
	2480	0.945	≤30	Pass	

Test Result of Average Output Power (Reporting Only)


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
GFSK_1Mbps	2402	0.017	≪30	Pass		
	2440	-0.483	≪30	Pass		
	2480	-0.729	≪30	Pass		
	2402	-0.296	≪30	Pass		
GFSK_2Mbps	2440	-0.797	≪30	Pass		
	2480	-1.055	≪30	Pass		



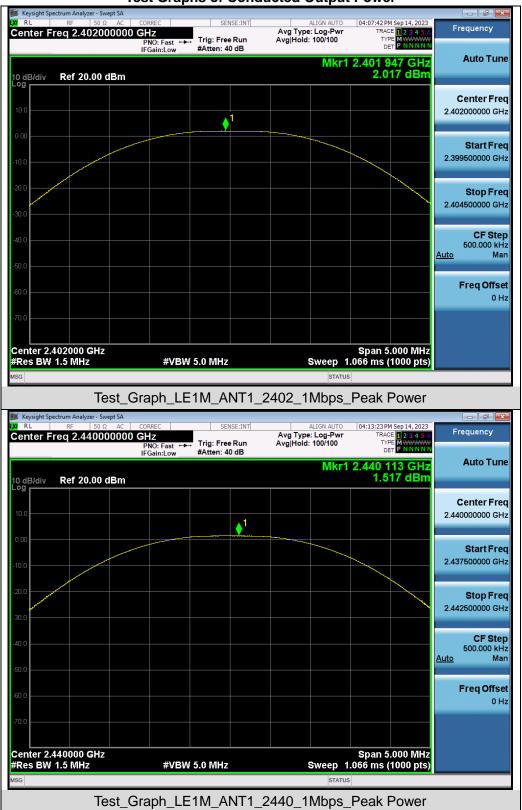


Test Graphs of Conducted Output Power



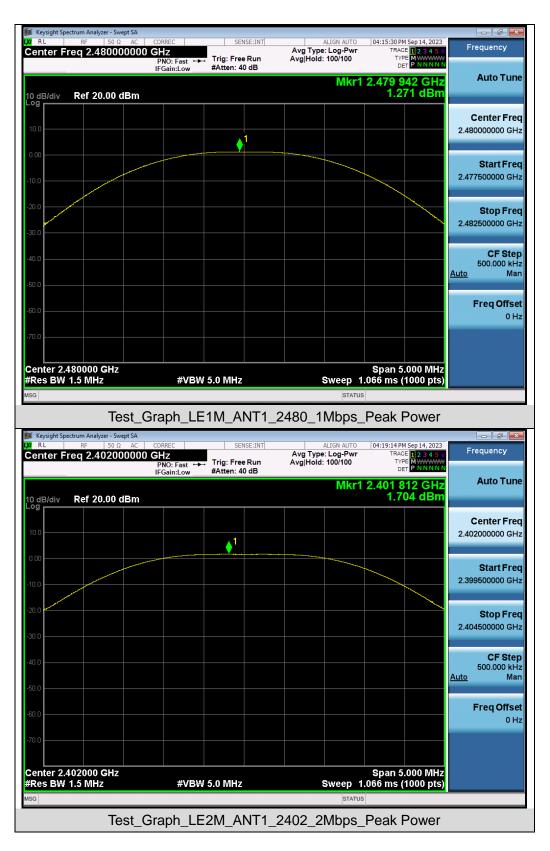



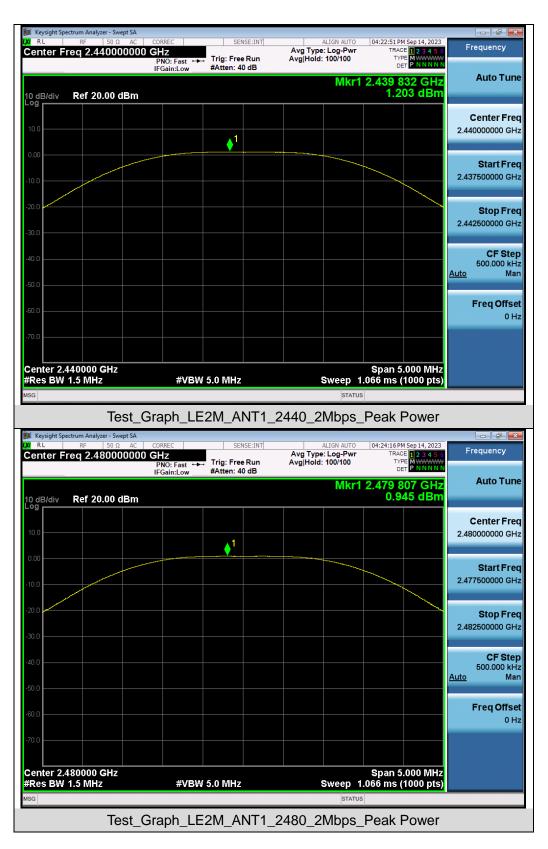



8. 6dB Bandwidth Measurement


8.1 Provisions Applicable

The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 6. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

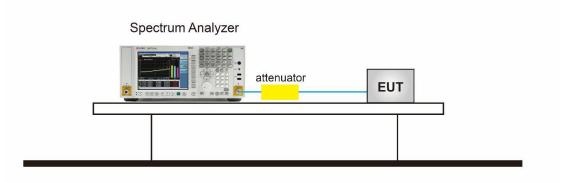




8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail	
	2402	1.060	0.717	≥0.5	Pass	
GFSK_1Mbps	2440	1.059	0.717	≥0.5	Pass	
	2480	1.061	0.724	≥0.5	Pass	
	2402	2.060	1.178	≥0.5	Pass	
GFSK_2Mbps	2440	2.059	1.178	≥0.5	Pass	
	2480	2.060	1.180	≥0.5	Pass	

Test Graphs of Occupied Bandwidth

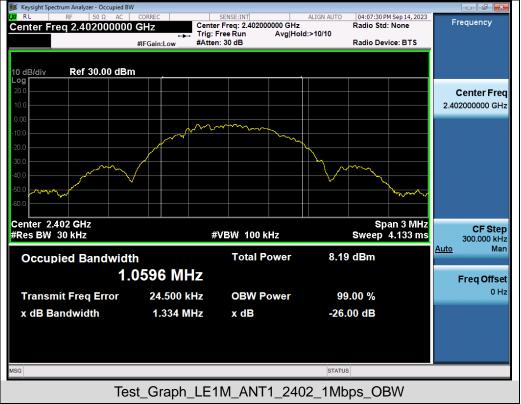












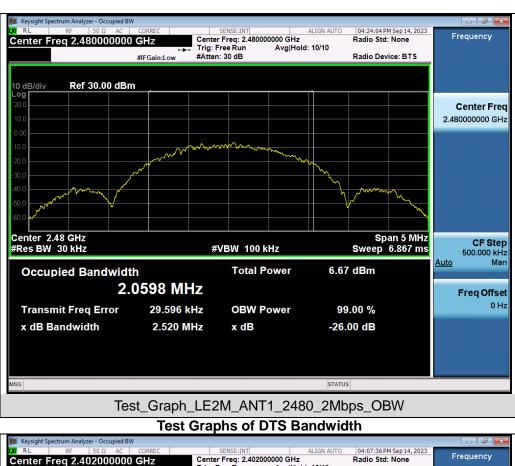














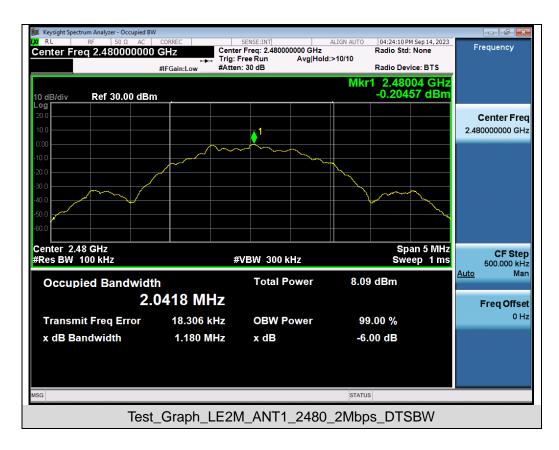



9. Power Spectral Density Measurement


9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

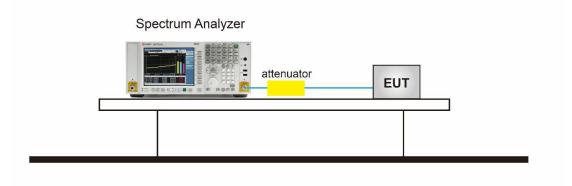




9.4 Measurement Results

	Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
GFSK_1Mbps	2402	-13.835	≪8	Pass		
	2440	-14.212	≪8	Pass		
	2480	-14.366	≪8	Pass		
	2402	-17.115	≪8	Pass		
GFSK_2Mbps	2440	-17.587	≪8	Pass		
	2480	-17.799	≪8	Pass		

Test Graphs of Conducted Output Power Spectral Density





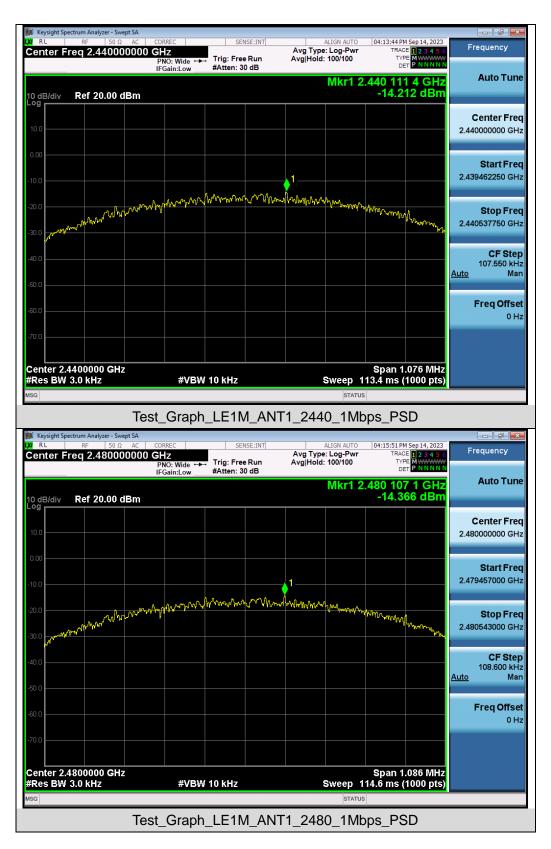







🚺 Keysight Spe	ectrum Analyzer - Swept S RF 50 Ω 4	A C CORREC	SENSE:INT	ALIGN AUTO	04:24:37 PM Sep 14, 2023	
	req 2.480000		Trin Free Day	Avg Type: Log-Pwr Avg Hold: 100/100	TRACE 1 2 3 4 5 6 TYPE MWWWW DET P NNNN	Frequency
10 dB/div	Ref 20.00 dBi			Mkr1 2	.480 057 6 GHz -17.799 dBm	Auto Tune
10.0						Center Fre 2.480000000 GH
10.00						Start Fre 2.479115000 GH
20.0	mahamilandill	Mhdmmmaha	in march down	-halandannannan	Malmal mulon	Stop Fre 2.480885000 GH
-40.0						CF Ste 177.000 kH <u>Auto</u> Ma
60.0						Freq Offso 0 ⊦
	1800000 GHz				Span 1.770 MHz	
#Res BW	3.0 KHZ	#VBV	V 10 kHz	Sweep 1	86.7 ms (1000 pts)	
		Test_Graph	LE2M_AN	Г1_2480_2Mb	ps_PSD	



10. Conducted Band Edge And Out-of-Band Emissions


10.1 Provisions Applicable

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

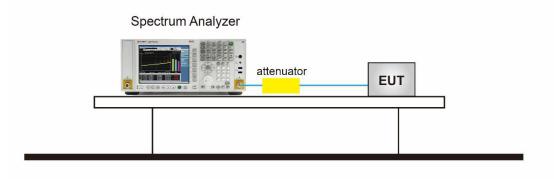




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




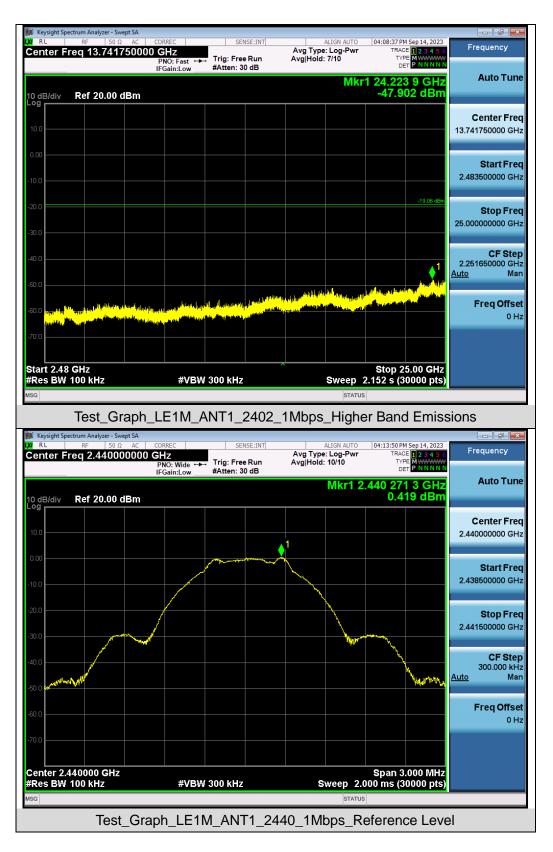




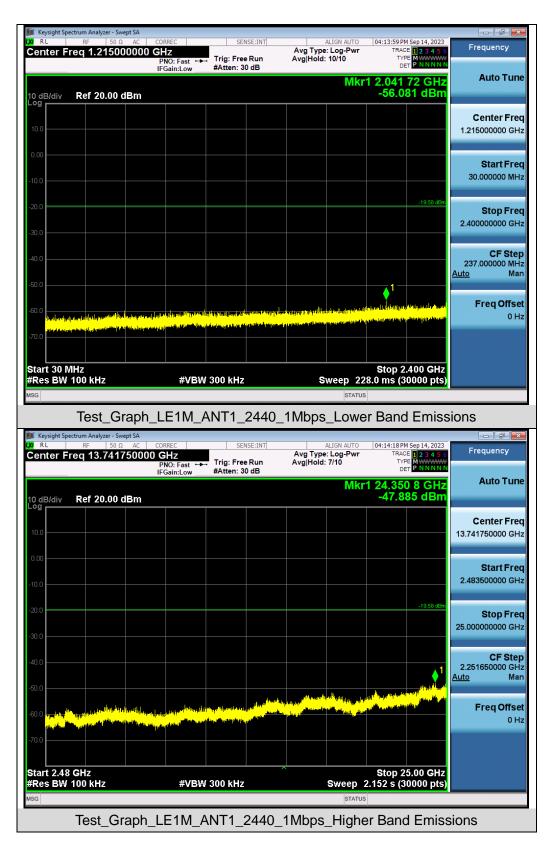




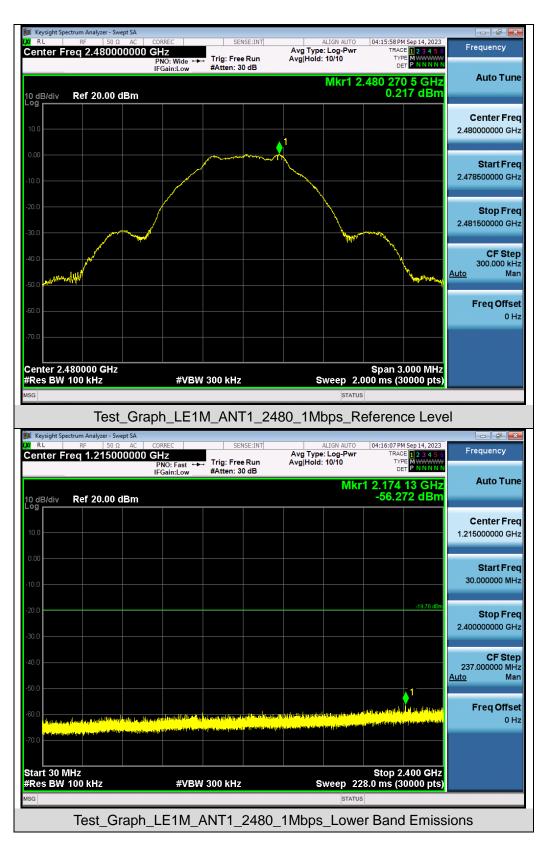



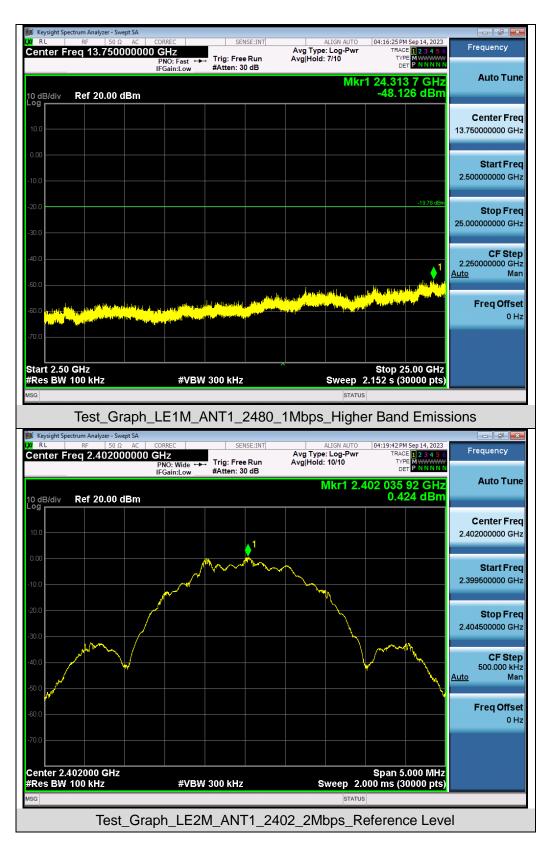




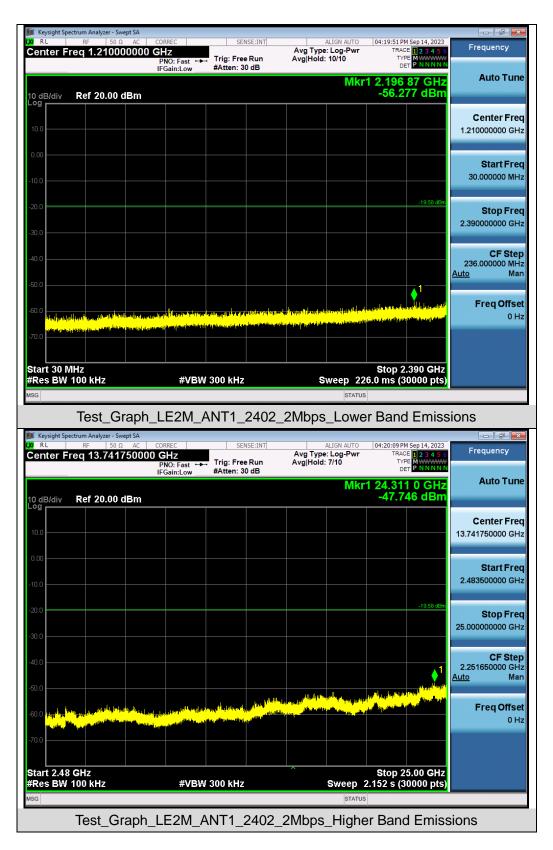









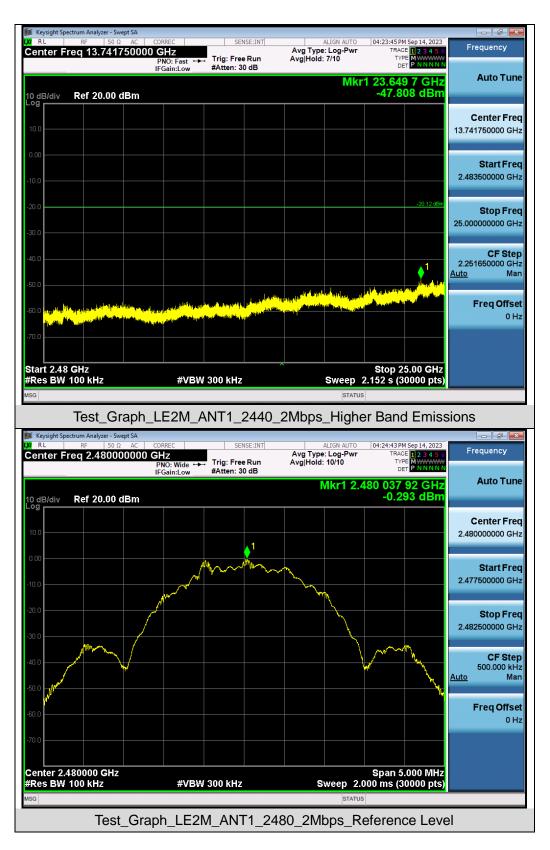



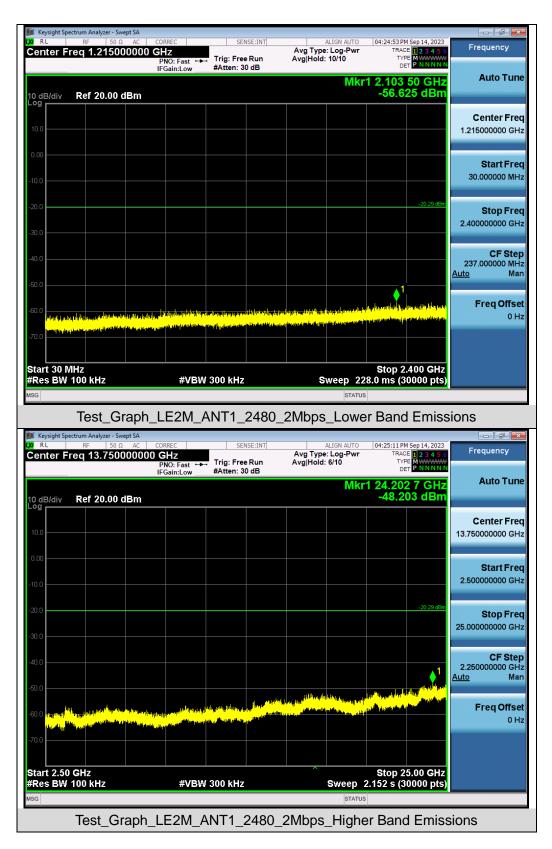



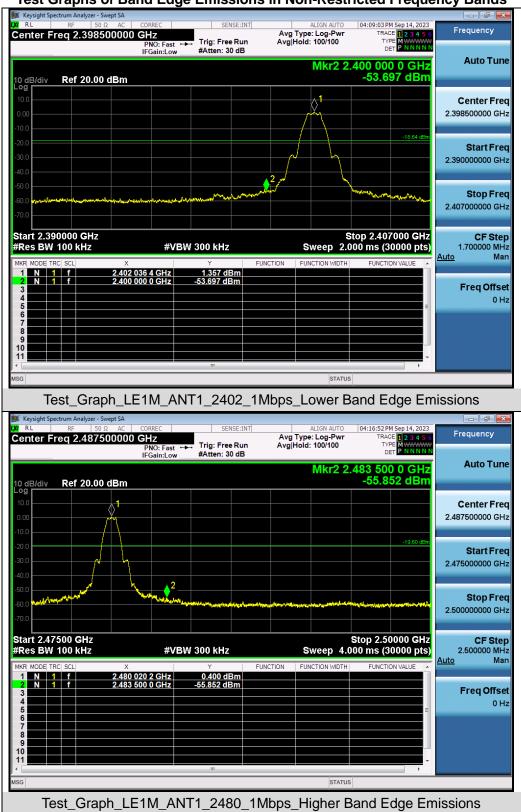

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands







11. Radiated Spurious Emission

11.1 Measurement Limits

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. Any report aving or particulation of the transmitter operates for longer than 0.1 seconds) or in cases where the transmitter operates for longer than 0.1 seconds.

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

10.In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9KHz~150KHz/RB 200Hz for QPStart ~Stop Frequency150KHz~30MHz/RB 9KHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120KHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

• Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \geq 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




11.3 Measurement Setup (Block Diagram of Configuration)

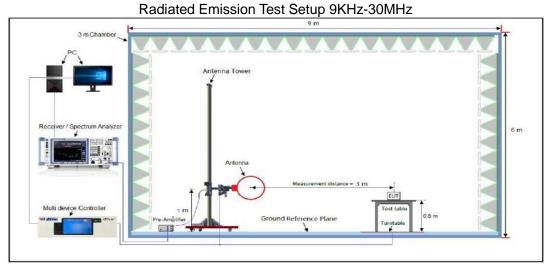

Radiated Emission Test Setup 30MHz-1000MHz

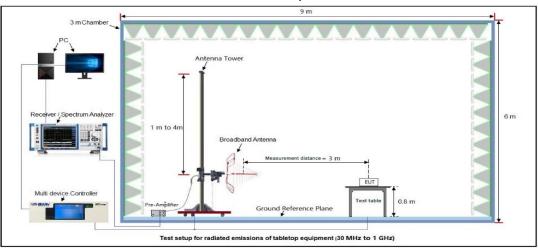

Radiated Emission Test Setup Above 1000MHz

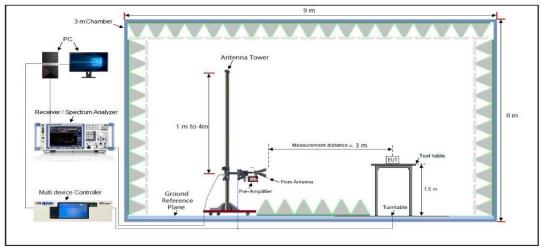

11.4 Measurement Result

Any report having not been signed by authorized approver, **Radiated Emission**, **Below**, **30MHz** ot been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

	Radiated Emission Test Results at 30MHz-1GHz							
EUT Na	me so	oundcore Motion	100		Model Na	me	A3133	
Tempera	ature 28	25.6° C Relative Humidity			59.8%			
Pressur	·e 96	60hPa			Test Volta	age Normal Voltage		
Test Mo	de M	lode 1			Polarity:	Horizontal		
	72.0 dBu¥/	/m			·			
	32 -8 30.000	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	80	(MHz)	300		Limit: Margin:	000
Final Da	ata List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.9942	19.87	13.90	40.00	20.13	100	180	Horizontal
2	107.5101	22.44	16.28	43.50	21.06	100	98	Horizontal
3	383.9318	27.20	18.63	46.00	18.8	100	210	Horizontal
4	440.1963	31.47	25.09	46.00	14.53	100	200	Horizontal
5	524.5541	31.13	24.90	46.00	14.87	100	180	Horizontal
6	900.1474	37.54	31.78	46.00	8.46	100	150	Horizontal



			Radia	ted Emissi	ion Test Res	sults at 30M	Hz-1GHz		
EUT N	ame	sou	Indcore Motion	100		Model N	lame	A3133	
Tempe	erature	25.6° C			Relative	Humidity	59.8%		
Pressu	ure	960)hPa			Test Voltage Normal Voltage			oltage
Test Mo	ode	Mo	de 1			Polarity:	Polarity: Vertical		
	72.0 d	IBu∀/m							
								Limit: — Margin: —	
								F	
								5	
	32		1			3 X	admonth a served	war warmen	
			1	White the mant	when filler buller when	the burner frement allowery	dhudhene -		
	de l'A	yholologia hul		a chur an		NP P			
	-8								
	30.000) 4() 50 60 70	80	(MHz)	300	400 500 6	00 700 1000	000
Final D	Data List								
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.586	68	25.91	16.95	40.00	14.09	100	170	Vertical
2	89.589	99	22.95	15.61	43.50	20.55	100	190	Vertical
3	315.48	08	28.59	19.98	46.00	17.41	100	100	Vertical
4	446.41	41	31.95	25.81	46.00	14.05	100	230	Vertical
5	716.68	20	34.50	28.68	46.00	11.5	100	120	Vertical
6	955.43	81	36.37	30.38	46.00	9.63	100	130	Vertical
							I		

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Measurement.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.



UT Name	soundcore N	Motion 100	Mod	el Name	A3133	A3133	
emperature	25° C		Rela	tive Humidity	55.4%		
ressure	960hPa		Test	Voltage	Norma	Normal Voltage	
est Mode	t Mode 1		Ante	Antenna Polarity		ntal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	52.33	0.08	52.41	74.00	-21.59	peak	
4804.000	41.09	0.08	41.17	54.00	-12.83	AVG	
7206.000	48.74	2.21	50.95	74.00	-23.05	peak	
7206.000	41.22	2.21	43.43	54.00	-10.57	AVG	
Remark:							
	na Factor + Cabl	e Loss – Pre-	amplifier.				
	nna Factor + Cabl	e Loss – Pre-	amplifier.				
	nna Factor + Cabl		·	el Name	A3133		
Factor = Anter			Mod	el Name tive Humidity	A3133 55.4%		
Factor = Anter	soundcore N		Mod Rela		55.4%	I Voltage	
Factor = Anter	soundcore M 25° C		Mod Rela Test	tive Humidity	55.4%	I Voltage	
Factor = Anter	soundcore M 25°C 960hPa Mode 1	Motion 100	Mod Rela Test Ante	tive Humidity Voltage nna Polarity	55.4% Norma Vertica	I Voltage	
Factor = Anter	soundcore N 25°C 960hPa Mode 1 Meter Reading	Motion 100 Factor	Mod Rela Test Ante Emission Level	tive Humidity Voltage nna Polarity Limits	55.4% Norma Vertica	I Voltage	
Factor = Anter	soundcore N 25° C 960hPa Mode 1 Meter Reading (dBµV)	Motion 100 Factor (dB)	Mod Rela Test Ante Emission Level (dBµV/m)	tive Humidity Voltage nna Polarity	55.4% Norma Vertica Margin (dB)	I Voltage I Value Type	
Factor = Anter	soundcore N 25° C 960hPa Mode 1 Meter Reading (dBµV) 50.99	Motion 100 Factor (dB) 0.08	Mod Rela Test Ante Emission Level (dBµV/m) 51.07	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00	55.4% Norma Vertica Margin (dB) -22.93	I Voltage I Value Type peak	
Factor = Anter	soundcore N 25° C 960hPa Mode 1 Meter Reading (dBµV) 50.99 40.74	Factor (dB) 0.08 0.08	Mod Rela Test Ante Emission Level (dBµV/m) 51.07 40.82	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00	55.4% Norma Vertica Margin (dB) -22.93 -13.18	I Voltage I Value Type peak AVG	
Factor = Anter	soundcore N 25° C 960hPa Mode 1 Meter Reading (dBµV) 50.99 40.74 47.96	Factor (dB) 0.08 2.21	Mod Rela Test Ante Emission Level (dBμV/m) 51.07 40.82 50.17	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Norma Vertica Margin (dB) -22.93 -13.18 -23.83	I Voltage I Value Type peak AVG peak	
Factor = Anter	soundcore N 25° C 960hPa Mode 1 Meter Reading (dBµV) 50.99 40.74	Factor (dB) 0.08 0.08	Mod Rela Test Ante Emission Level (dBµV/m) 51.07 40.82	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00	55.4% Norma Vertica Margin (dB) -22.93 -13.18	I Voltage I Value Type peak AVG	
Factor = Anter	soundcore N 25° C 960hPa Mode 1 Meter Reading (dBµV) 50.99 40.74 47.96	Factor (dB) 0.08 2.21	Mod Rela Test Ante Emission Level (dBμV/m) 51.07 40.82 50.17	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Norma Vertica Margin (dB) -22.93 -13.18 -23.83	I Voltage I Value Type peak AVG peak	

RESULT: Pass



UT Name	soundcore N	Notion 100	M	odel Name	A3133	3	
emperature	25° C		R	elative Humidity	55.4%	55.4%	
ressure	960hPa		Те	Test Voltage Normal Voltage		al Voltage	
est Mode	Mode 2		А	ntenna Polarity	Horizo	ontal	
	·		·		·		
Frequency	Meter Reading	Factor	Emission Lev	vel Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4882.000	53.02	0.14	53.16	74.00	-20.84	peak	
4882.000	43.24	0.14	43.38	54.00	-10.62	AVG	
7323.000	49.85	2.36	52.21	74.00	-21.79	peak	
7323.000	40.27	2.36	42.63	54.00	-11.37	AVG	
Deverenter	•	a Factor + Cable Loss – Pre-amplifie					
Remark: Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.				
	nna Factor + Cable soundcore N			odel Name	A3133	3	
Factor = Anter			M	odel Name elative Humidity			
Factor = Anter	soundcore N		M R		55.4%		
Factor = Anter UT Name emperature	soundcore M		M Re Te	elative Humidity	55.4%	al Voltage	
Factor = Anter	soundcore M 25° C 960hPa Mode 2	Notion 100	M Re Te	elative Humidity est Voltage ntenna Polarity	55.4% Norma Vertica	al Voltage al	
Factor = Anter	soundcore M 25° C 960hPa Mode 2 Meter Reading	Notion 100 Factor	M R(Te Au Emission Lev	elative Humidity est Voltage ntenna Polarity	55.4% Norma Vertica Margin	al Voltage	
Factor = Anter	soundcore M 25° C 960hPa Mode 2 Meter Reading (dBµV)	Notion 100 Factor (dB)	M R(Te Emission Le (dBµV/m)	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m)	55.4% Norma Vertica Margin (dB)	al Voltage al	
Factor = Anter	soundcore M 25° C 960hPa Mode 2 Meter Reading	Notion 100 Factor	M R(Te Au Emission Lev	elative Humidity est Voltage ntenna Polarity	55.4% Norma Vertica Margin	al Voltage al Value Type	
Factor = Anter	Soundcore M 25° C 960hPa Mode 2 Meter Reading (dBµV) 51.89	Aotion 100 Factor (dB) 0.14	М Rt Те Етте (dBµV/m) 52.03	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00	55.4% Norma Vertica Margin (dB) -21.97	al Voltage al Value Type peak	
Factor = Anter	soundcore Ν 25° C 960hPa Mode 2 Meter Reading (dBµV) 51.89 42.87	Aotion 100 Factor (dB) 0.14 0.14	М Re Те Етission Lev (dBµV/m) 52.03 43.01	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00 54.00	55.4% Norma Vertica Margin (dB) -21.97 -10.99	al Voltage al Value Type peak AVG	
Factor = Anter	soundcore N 25° C 960hPa Mode 2 Meter Reading (dBµV) 51.89 42.87 48.74	Aotion 100 Factor (dB) 0.14 0.14 2.36	М Re Те Emission Let (dBµV/m) 52.03 43.01 51.10	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00 54.00 74.00	55.4% Norma Vertica Margin (dB) -21.97 -10.99 -22.90	al Voltage al Value Type peak AVG peak	

RESULT: Pass



EUT Name	•	soundcore M	soundcore Motion 100			Model Name		A3133	
Temperatu	ire	25° C			Relati	ve Humidity	55.4%	55.4%	
Pressure		960hPa			Test Voltage		Normal	Normal Voltage	
Test Mode	Node Mode 3			Anten	Antenna Polarity		tal		
Freq	quency	Meter Reading	Factor	Emissio	on Level	Limits	Margin	Value Type	
(N	ЛHz)	(dBµV)	(dB)	(dBµ	ıV/m)	(dBµV/m)	(dB)	value Type	
496	60.000	52.96	0.22	53.	.18	74.00	-20.82	peak	
496	60.000	42.22	0.22	42.	.44	54.00	-11.56	AVG	
744	10.000	48.27	2.64	50.	.91	74.00	-23.09	peak	
744	10.000	39.65	2.64	42.	.29	54.00	-11.71	AVG	
-									
Remai	rk:								
		ina Factor + Cable	e Loss – Pre-	amplifier.					
Factor	r = Anten	na Factor + Cable soundcore M		amplifier.	Model	Name	A3133		
Factor	r = Anten			amplifier.		Name ve Humidity	A3133 55.4%		
Factor EUT Name Temperatu	r = Anten	soundcore M		amplifier.	Relati			Voltage	
Factor EUT Name Temperatu Pressure	r = Anten 9 Ire	soundcore M 25° C		amplifier.	Relati Test V	ve Humidity	55.4%	Voltage	
Factor EUT Name Femperatu Pressure Fest Mode	r = Anten	soundcore M 25°C 960hPa Mode 3	otion 100		Relati Test V Anten	ve Humidity ⁄oltage na Polarity	55.4% Normal Vertical	Voltage	
Factor	r = Anten	soundcore M 25° C 960hPa Mode 3 Meter Reading	otion 100 Factor	Emissio	Relation Test V Anten	ve Humidity oltage na Polarity Limits	55.4% Normal Vertical		
Factor EUT Name Femperatu Pressure Fest Mode	r = Anten ire quency /Hz)	soundcore M 25° C 960hPa Mode 3 Meter Reading (dBµV)	otion 100 Factor (dB)	Emissic (dBµ	Relati Test V Anten	ve Humidity /oltage na Polarity Limits (dBµV/m)	55.4% Normal Vertical Margin (dB)	- Value Type	
Factor EUT Name Femperatu Pressure Fest Mode	r = Anten ire quency //Hz) 50.000	soundcore M 25° C 960hPa Mode 3 Meter Reading (dBµV) 53.01	otion 100 Factor (dB) 0.22	Emissic (dBµ 53.	Relation Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74.00	55.4% Normal Vertical Margin (dB) -20.77	- Value Type peak	
Factor EUT Name Femperatu Pressure Fest Mode	r = Anten ire quency //Hz) 50.000 50.000	soundcore M 25° C 960hPa Mode 3 Meter Reading (dBµV) 53.01 41.11	otion 100 Factor (dB) 0.22 0.22	Emissic (dBµ 53. 41.	Relation Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertical Margin (dB) -20.77 -12.67	Value Type peak AVG	
Factor EUT Name Temperatu Pressure Test Mode Freq (M 496 496 744	r = Anten	soundcore M 25° C 960hPa Mode 3 Meter Reading (dBµV) 53.01 41.11 47.38	otion 100 Factor (dB) 0.22 0.22 2.64	Emissio (dBµ 53. 41. 50.	Relation Test V Anten On Level V/m) .23 .33 .02	ve Humidity foltage na Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -20.77 -12.67 -23.98	Value Type peak AVG peak	
Factor EUT Name Temperatu Pressure Test Mode Freq (M 496 496 744	r = Anten ire quency //Hz) 50.000 50.000	soundcore M 25° C 960hPa Mode 3 Meter Reading (dBµV) 53.01 41.11	otion 100 Factor (dB) 0.22 0.22	Emissio (dBµ 53. 41. 50.	Relation Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertical Margin (dB) -20.77 -12.67	Value Type peak AVG	
Factor EUT Name Temperatu Pressure Test Mode Freq (M 496 496 744	r = Anten	soundcore M 25° C 960hPa Mode 3 Meter Reading (dBµV) 53.01 41.11 47.38	otion 100 Factor (dB) 0.22 0.22 2.64	Emissio (dBµ 53. 41. 50.	Relation Test V Anten Anten V/m) .23 .33 .02	ve Humidity foltage na Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -20.77 -12.67 -23.98	Value Type peak AVG peak	
Factor EUT Name Temperatu Pressure Test Mode Freq (M 496 496 744 744 744	r = Anten ire quency //Hz) 50.000 50.000 10.000 10.000 10.000 10.000 10.000	soundcore M 25° C 960hPa Mode 3 Meter Reading (dBµV) 53.01 41.11 47.38	otion 100 Factor (dB) 0.22 0.22 2.64 2.64	Emissic (dBµ 53. 41. 50. 42.	Relation Test V Anten Anten V/m) .23 .33 .02	ve Humidity foltage na Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -20.77 -12.67 -23.98	Value Type peak AVG peak	

RESULT: Pass



Person Pa Test Voltage Normal Voltage Antenna Polarity Horizontal Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Type 4804.000 52.27 0.08 52.35 74.00 -21.65 peak 4804.000 41.05 0.08 41.13 54.00 -12.87 AVG 7206.000 47.94 2.21 50.15 74.00 -23.85 peak 7206.000 39.63 2.21 41.84 54.00 -12.16 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Pre-amplifier. Pre-amplifier. JT Name soundcore Motion 100 Model Name A3133 Persure 960hPa Test Voltage Normal Voltage st Mode Mode 4 Antenna Polarity Vertical	UT Name	soundcore I	Motion 100	M	odel Name	A3133		
Image: St Mode Mode 4 Antenna Polarity Horizontal Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Type 4804.000 52.27 0.08 52.35 74.00 -21.65 peak 4804.000 41.05 0.08 41.13 54.00 -12.87 AVG 7206.000 47.94 2.21 50.15 74.00 -23.85 peak 7206.000 39.63 2.21 41.84 54.00 -12.16 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.	emperature	25° C		R	elative Humidity	55.4%		
$\begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	ressure	960hPa		Те	est Voltage	Norma		
(M+z) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (dBµV/m) (dB)	est Mode	Mode Mode 4		А	ntenna Polarity	Horizo	ntal	
(M+z) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (dBµV/m) (dB)								
(MHz) (dBµV) (dB) (dBµVm) (dBµVm) (dB) (dBµVm) (dB)	Frequency	Meter Reading	Factor	Emission Lev	vel Limits	Margin		
4804.000 41.05 0.08 41.13 54.00 -12.87 AVG 7206.000 47.94 2.21 50.15 74.00 -23.85 peak 7206.000 39.63 2.21 41.84 54.00 -12.16 AVG 7206.000 39.63 2.21 41.84 54.00 -12.16 AVG Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier.	(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
T206.000 47.94 2.21 50.15 74.00 -23.85 peak 7206.000 39.63 2.21 41.84 54.00 -12.16 AVG Remark: Image: Construct of the second of the s	4804.000	52.27	0.08	52.35	74.00	-21.65	peak	
T206.000 39.63 2.21 41.84 54.00 -12.16 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Image: Comparison of Com	4804.000	41.05	0.08	41.13	54.00	-12.87	AVG	
Interview Interview <t< td=""><td>7206.000</td><td>47.94</td><td>2.21</td><td>50.15</td><td>74.00</td><td>-23.85</td><td>peak</td></t<>	7206.000	47.94	2.21	50.15	74.00	-23.85	peak	
Factor = Antenna Factor + Cable Loss – Pre-amplifier. JT Name soundcore Motion 100 Model Name A3133 emperature 25° C Relative Humidity 55.4% essure 960hPa Test Voltage Normal Voltage est Mode Mode 4 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak <td>7206.000</td> <td>39.63</td> <td>2.21</td> <td>41.84</td> <td>54.00</td> <td>-12.16</td> <td>AVG</td>	7206.000	39.63	2.21	41.84	54.00	-12.16	AVG	
Factor = Antenna Factor + Cable Loss – Pre-amplifier. JT Name soundcore Motion 100 Model Name A3133 emperature 25° C Relative Humidity 55.4% essure 960hPa Test Voltage Normal Voltage est Mode Mode 4 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>								
Factor = Antenna Factor + Cable Loss – Pre-amplifier. JT Name soundcore Motion 100 Model Name A3133 emperature 25° C Relative Humidity 55.4% essure 960hPa Test Voltage Normal Voltage est Mode Mode 4 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak <th>Descel</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th>	Descel							
JT Name soundcore Motion 100 Model Name A3133 emperature 25° C Relative Humidity 55.4% ressure 960hPa Test Voltage Normal Voltage est Mode Mode 4 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak	Remark:							
Emperature 25° C Relative Humidity 55.4% ressure 960hPa Test Voltage Normal Voltage est Mode Mode 4 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak				1.0				
Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak	Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.				
Mode Mode 4 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak	Factor = Anten				odel Name	A3133	,	
Frequency Meter Reading Factor Emission Level Limits Margin Value Type (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Type 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak		soundcore I		M				
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak	UT Name	soundcore M 25° C		R	elative Humidity	55.4%		
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) 4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak	UT Name	soundcore M 25° C 960hPa		M R Te	elative Humidity est Voltage	55.4%	I Voltage	
4804.000 52.66 0.08 52.74 74.00 -21.26 peak 4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak	UT Name emperature Pressure est Mode	soundcore M 25° C 960hPa Mode 4	Motion 100	M R Te A	elative Humidity est Voltage ntenna Polarity	55.4% Norma Vertica	I Voltage	
4804.000 39.74 0.08 39.82 54.00 -14.18 AVG 7206.000 46.85 2.21 49.06 74.00 -24.94 peak	UT Name Temperature Pressure Test Mode	soundcore N 25° C 960hPa Mode 4 Meter Reading	Motion 100 Factor	Ma Re Te Emission Lev	elative Humidity est Voltage ntenna Polarity	55.4% Norma Vertica Margin	I Voltage	
7206.000 46.85 2.21 49.06 74.00 -24.94 peak	UT Name Temperature Pressure Test Mode	soundcore N 25° C 960hPa Mode 4 Meter Reading (dBµV)	Motion 100 Factor (dB)	M R Te Te Emission Lev (dBµV/m)	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m)	55.4% Norma Vertica Margin (dB)	Il Voltage al Value Type	
	UT Name emperature ressure est Mode Frequency (MHz) 4804.000	Soundcore N 25° C 960hPa Mode 4 Meter Reading (dBµV) 52.66	Votion 100 Factor (dB) 0.08	М	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00	55.4% Norma Vertica Margin (dB) -21.26	Il Voltage al Value Type peak	
1200.000 41.27 2.21 43.48 54.00 -10.52 AVG	EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	soundcore N 25° C 960hPa Mode 4 Meter Reading (dBµV) 52.66 39.74	Factor (dB) 0.08 0.08	М R R Те Ан Еттіssion Lev (dBµV/m) 52.74 39.82	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00 54.00	55.4% Norma Vertica Margin (dB) -21.26 -14.18	Il Voltage	
	UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	soundcore I 25° C 960hPa Mode 4 Meter Reading (dBµV) 52.66 39.74 46.85	Factor (dB) 0.08 2.21	М	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00 54.00 74.00	55.4% Norma Vertica Margin (dB) -21.26 -14.18 -24.94	I Voltage	
	UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	soundcore I 25° C 960hPa Mode 4 Meter Reading (dBµV) 52.66 39.74 46.85	Factor (dB) 0.08 2.21	М	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00 54.00 74.00	55.4% Norma Vertica Margin (dB) -21.26 -14.18 -24.94	I Voltage	
Remark:	UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	soundcore I 25° C 960hPa Mode 4 Meter Reading (dBµV) 52.66 39.74 46.85	Factor (dB) 0.08 2.21	М	elative Humidity est Voltage ntenna Polarity vel Limits (dBµV/m) 74.00 54.00 74.00	55.4% Norma Vertica Margin (dB) -21.26 -14.18 -24.94	Il Voltage	

RESULT: Pass



UT Name	soundcore M	lotion 100	Mode	Model Name		A3133	
emperature	25° C		Relat	tive Humidity	55.4%	55.4% Normal Voltage	
ressure	960hPa		Test	Voltage	Norma		
est Mode	Mode Mode 5		Ante	Antenna Polarity		ntal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4882.000	52.74	0.14	52.88	74.00	-21.12	peak	
4882.000	41.52	0.14	41.66	54.00	-12.34	AVG	
7323.000	48.51	2.36	50.87	74.00	-23.13	peak	
7323.000	41.22	2.36	43.58	54.00	-10.42	AVG	
D a ml							
Remark:							
Factor = Antei	nna Factor + Cable	e Loss – Pre-	amplifier.				
Factor = Anter	nna Factor + Cable soundcore M			el Name	A3133	,	
-			Mode	el Name tive Humidity	A3133 55.4%		
UT Name	soundcore M		Mode		55.4%		
UT Name emperature	soundcore M 25° C		Mode Relat Test	tive Humidity	55.4%	I Voltage	
UT Name emperature ressure est Mode	soundcore M 25° C 960hPa Mode 5	Notion 100	Mode Relat Test Ante	tive Humidity Voltage nna Polarity	55.4% Norma Vertica	I Voltage	
UT Name emperature Pressure est Mode	soundcore M 25° C 960hPa Mode 5 Meter Reading	Notion 100 Factor	Mode Relat Test Ante Emission Level	tive Humidity Voltage nna Polarity Limits	55.4% Norma Vertica Margin	I Voltage	
EUT Name Emperature Pressure Eest Mode Frequency (MHz)	soundcore M 25° C 960hPa Mode 5 Meter Reading (dBµV)	fotion 100 Factor (dB)	Mode Relat Test Ante Emission Level (dBµV/m)	Limits (dBµV/m)	55.4% Norma Vertica Margin (dB)	Il Voltage al Value Type	
EUT Name Emperature Pressure Eest Mode Frequency (MHz) 4882.000	soundcore M 25° C 960hPa Mode 5 Meter Reading (dBµV) 50.99	Aotion 100 Factor (dB) 0.14	Mode Relat Test Ante Emission Level (dBµV/m) 51.13	Limits (dBµV/m) 74.00	55.4% Norma Vertica Margin (dB) -22.87	Il Voltage al Value Type peak	
UT Name emperature ressure est Mode Frequency (MHz) 4882.000 4882.000	soundcore M 25° C 960hPa Mode 5 Meter Reading (dBµV) 50.99 40.69	Aotion 100 Factor (dB) 0.14 0.14	Mode Relat Test Ante Emission Level (dBµV/m) 51.13 40.83	Limits (dBµV/m) 74.00 54.00	55.4% Norma Vertica Margin (dB) -22.87 -13.17	Il Voltage al Value Type peak AVG	
UT Name emperature ressure est Mode Frequency (MHz) 4882.000 4882.000 7323.000	soundcore M 25° C 960hPa Mode 5 Meter Reading (dBμV) 50.99 40.69 50.30	Aotion 100 Factor (dB) 0.14 0.14 2.36	Mode Relat Test Ante (dBµV/m) 51.13 40.83 52.66	Limits (dBµV/m) 74.00 74.00 74.00	55.4% Norma Vertica Margin (dB) -22.87 -13.17 -21.34	I Voltage	
UT Name emperature ressure est Mode Frequency (MHz) 4882.000 4882.000	soundcore M 25° C 960hPa Mode 5 Meter Reading (dBµV) 50.99 40.69	Aotion 100 Factor (dB) 0.14 0.14	Mode Relat Test Ante Emission Level (dBµV/m) 51.13 40.83	Limits (dBµV/m) 74.00 54.00	55.4% Norma Vertica Margin (dB) -22.87 -13.17	Il Voltage al Value Type peak AVG	
UT Name emperature ressure est Mode Frequency (MHz) 4882.000 4882.000 7323.000	soundcore M 25° C 960hPa Mode 5 Meter Reading (dBμV) 50.99 40.69 50.30	Aotion 100 Factor (dB) 0.14 0.14 2.36	Mode Relat Test Ante (dBµV/m) 51.13 40.83 52.66	Limits (dBµV/m) 74.00 74.00 74.00	55.4% Norma Vertica Margin (dB) -22.87 -13.17 -21.34	I Voltage	

RESULT: Pass



EUT Name	soundcore Me	otion 100		Model	Name	A3133		
Temperature	25° C			Relative Humidity		55.4%	55.4%	
Pressure	960hPa Test Voltage N		Normal	Normal Voltage				
Test Mode	Mode 6			Anten	na Polarity	Horizon	tal	
						·		
Frequency	Meter Reading	Factor	Emission	n Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV	′/m)	(dBµV/m)	(dB)	value Type	
4960.000	51.74	0.22	51.9	96	74.00	-22.04	peak	
4960.000	40.85	0.22	41.0)7	54.00	-12.93	AVG	
7440.000	47.37	2.64	50.0)1	74.00	-23.99	peak	
7440.000	38.55	2.64	41.1	9	54.00	-12.81	AVG	
	<u>+</u>							
Remark:								
Factor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.					
EUT Name	soundcore M	otion 100		Model	Name	A3133		
Temperature	25° C			Relati	ve Humidity	55.4%		
Pressure	960hPa			Test Voltage		Normal Voltage		
Test Mode	Mode 6			Anten	na Polarity	Vertical		
		Factor	Emissior		Limits	Morgin	1	
Frequency	Motor Pooding				LIIIIIIS	Margin	Value Type	
Frequency	Meter Reading				(dBu)//m)	(dB)	value Type	
(MHz)	(dBµV)	(dB)	(dBµV	′/m)	(dBµV/m)	(dB)		
(MHz) 4960.000	(dBµV) 50.99	(dB) 0.22	(dBµV 51.2	//m) 21	74.00	-22.79	peak	
(MHz) 4960.000 4960.000	(dBµV) 50.99 41.74	(dB) 0.22 0.22	(dBµV 51.2 41.9	//m) 21 96	74.00 54.00	-22.79 -12.04	peak AVG	
(MHz) 4960.000 4960.000 7440.000	(dBµV) 50.99 41.74 48.15	(dB) 0.22 0.22 2.64	(dBµV 51.2 41.9 50.7	7/m) 21 96 79	74.00 54.00 74.00	-22.79 -12.04 -23.21	peak AVG peak	
(MHz) 4960.000 4960.000	(dBµV) 50.99 41.74	(dB) 0.22 0.22	(dBµV 51.2 41.9	7/m) 21 96 79	74.00 54.00	-22.79 -12.04	peak AVG	
(MHz) 4960.000 4960.000 7440.000	(dBµV) 50.99 41.74 48.15	(dB) 0.22 0.22 2.64	(dBµV 51.2 41.9 50.7	7/m) 21 96 79	74.00 54.00 74.00	-22.79 -12.04 -23.21	peak AVG peak	

RESULT: Pass


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

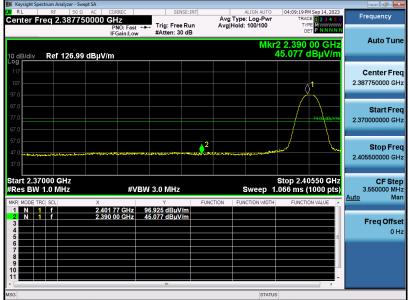

Test Graph for Average Measurement

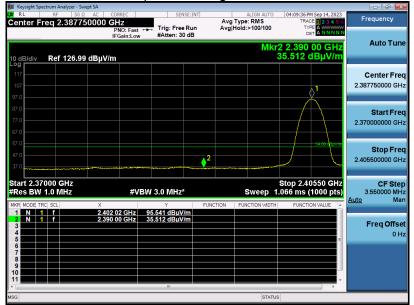


RESULT: Pass




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

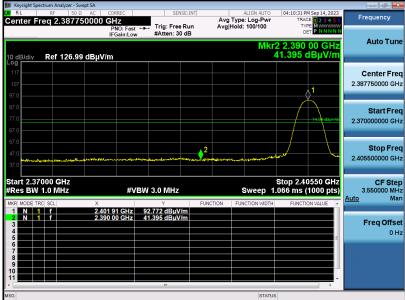

Test Graph for Average Measurement

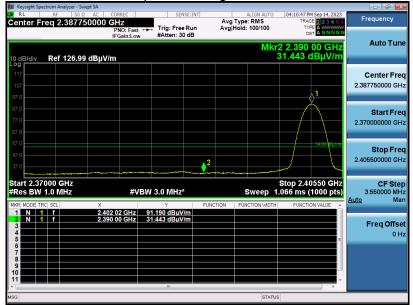


RESULT: Pass




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

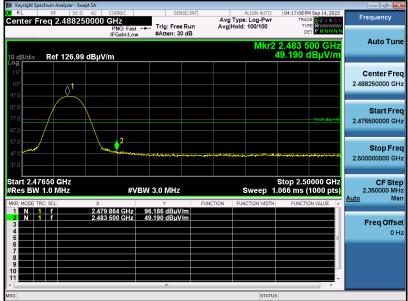

Test Graph for Average Measurement

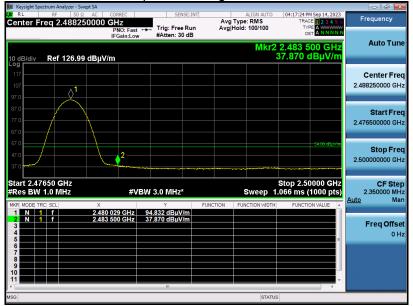


RESULT: Pass




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

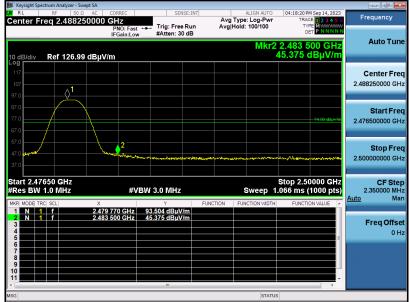

Test Graph for Average Measurement

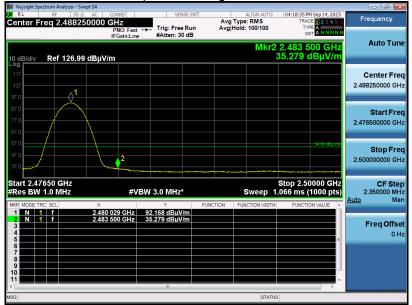


RESULT: Pass




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

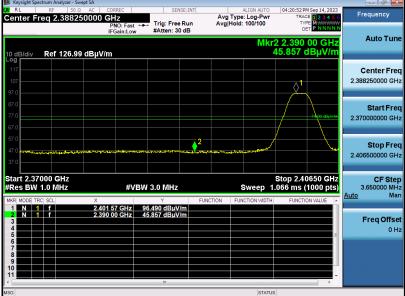

Test Graph for Average Measurement

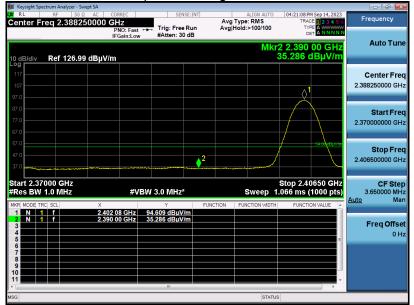


RESULT: Pass




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

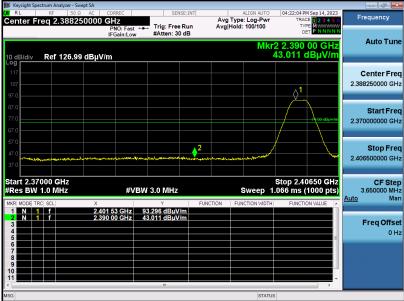

Test Graph for Average Measurement

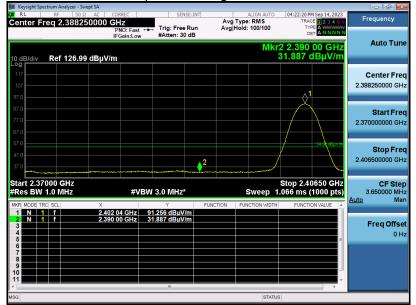


RESULT: Pass




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

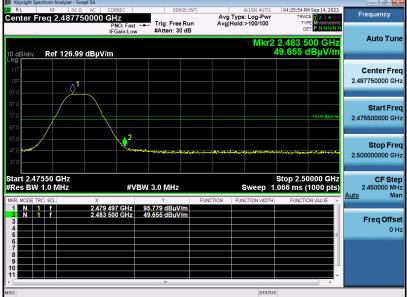

Test Graph for Average Measurement

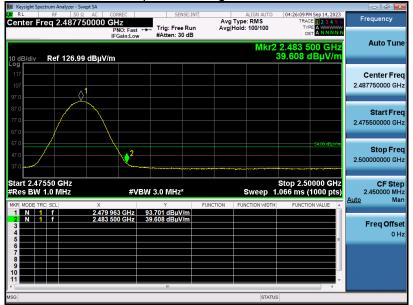


RESULT: Pass




EUT Name	soundcore Motion 100	Model Name	A3133
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

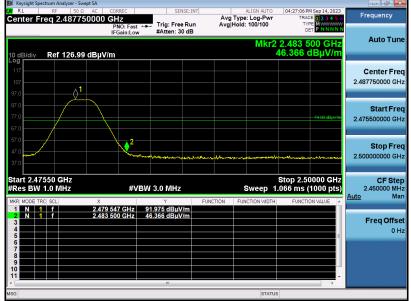

Test Graph for Average Measurement

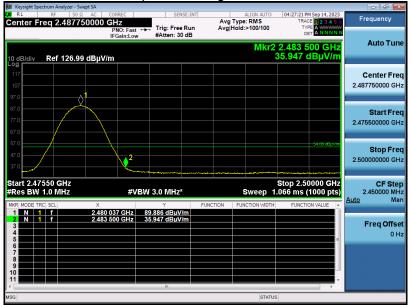

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limits


En anna an	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 Measurement Setup (Block Diagram of Configuration)

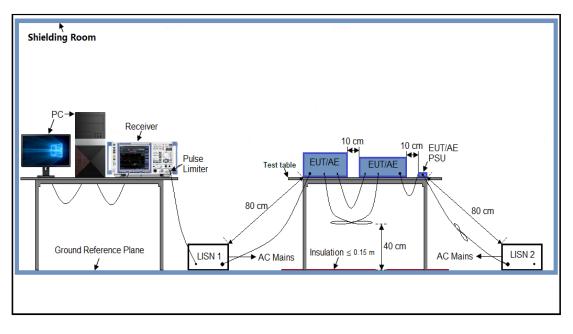



12.3 Preliminary Procedure of Line Conducted Emission Test

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results



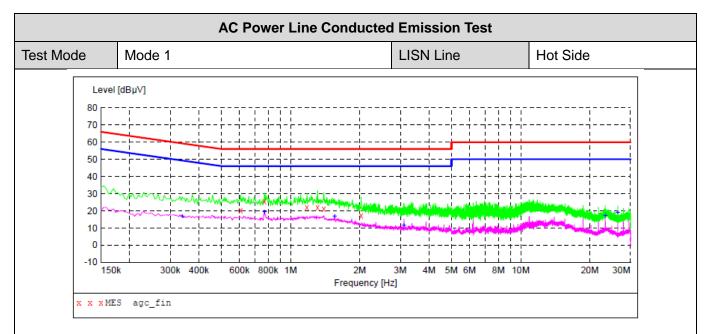

MEASUREMENT RESULT: "agc fin"

2023/9/4 11:04

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.606000 0.770000 1.178000 1.310000 1.394000 2.026000	20.10 25.30 21.90 22.00 21.20 17.30	6.2 6.2 6.2 6.2 6.2 6.2	56 56 56 56 56	30.7 34.1 34.0 34.8	QP QP QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc_fin2"


2023/9/4 11:0 Frequency MHz	4 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.338000	16.90	6.1	49	32.4	AV	L1
0.770000	19.50	6.2	46	26.5	AV	L1
1.554000	16.60	6.2	46	29.4	AV	L1
3.110000	11.50	6.3	46	34.5	AV	L1
23.298000	17.00	7.7	50	33.0	AV	L1
26.406000	19.00	8.1	50	31.0	AV	L1

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



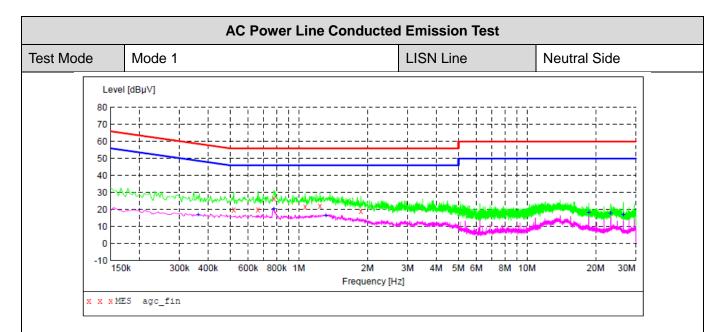

MEASUREMENT RESULT: "agc fin"

2023/9/4 11:07

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.518000	20.10	6.2	56	35.9	QP	Ν
0.662000	20.00	6.2	56	36.0	QP	N
0.778000	26.80	6.2	56	29.2	QP	N
1.066000	21.60	6.2	56	34.4	QP	N
1.238000	22.40	6.2	56	33.6	QP	N
1.870000	19.40	6.2	56	36.6	QP	Ν

MEASUREMENT RESULT: "agc fin2"

2023/9/4 11:0 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000	17.00	6.1	49	31.7	AV	N
0.778000	20.50	6.2	46	25.5	AV	Ν
1.314000	16.50	6.2	46	29.5	AV	N
18.638000	18.30	7.0	50	31.7	AV	N
23.294000	18.00	7.7	50	32.0	AV	N
26.398000	17.20	8.1	50	32.8	AV	N

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



Report No.: AGC01110230762FR02 Page 70 of 70

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110230762AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01110230762AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.