

Measurement results for Set.1:

Result for Traffic:

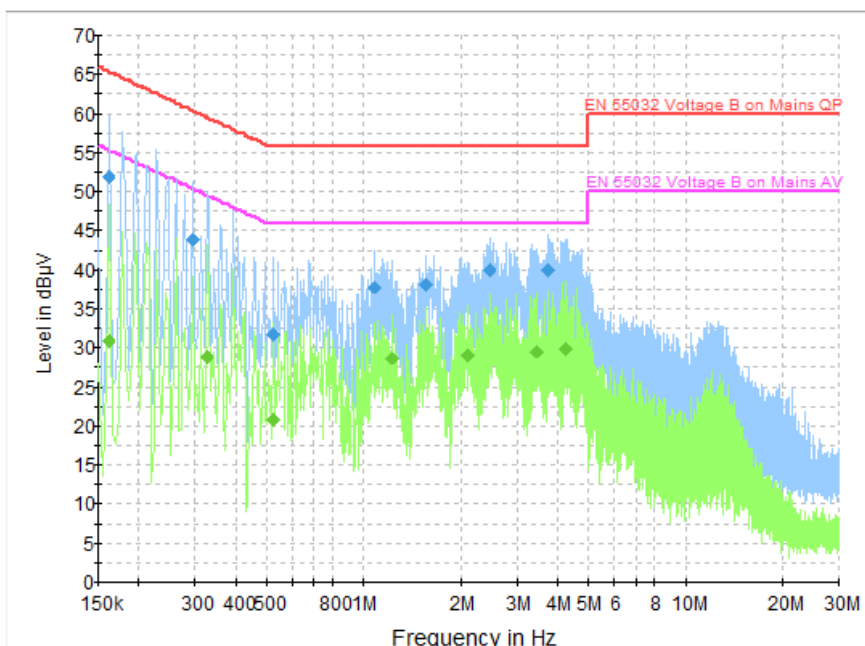


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.162000	51.9	2000.0	9.000	On	L1	20.0	13.4	65.4	
0.294000	43.9	2000.0	9.000	On	L1	20.0	16.6	60.4	
0.526000	31.8	2000.0	9.000	On	N	20.0	24.2	56.0	
1.082000	37.8	2000.0	9.000	On	L1	19.5	18.2	56.0	
1.562000	38.1	2000.0	9.000	On	L1	19.5	17.9	56.0	
2.450000	40.0	2000.0	9.000	On	L1	19.5	16.0	56.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.162000	30.9	2000.0	9.000	On	L1	20.0	24.5	55.4	
0.326000	28.8	2000.0	9.000	On	L1	19.9	20.7	49.6	
0.526000	20.7	2000.0	9.000	On	L1	19.9	25.3	46.0	
1.218000	28.7	2000.0	9.000	On	L1	19.5	17.3	46.0	
2.098000	29.1	2000.0	9.000	On	L1	19.5	17.0	46.0	
3.470000	29.5	2000.0	9.000	On	L1	19.5	16.5	46.0	

Measurement results for Set.1:

Result for Idle:

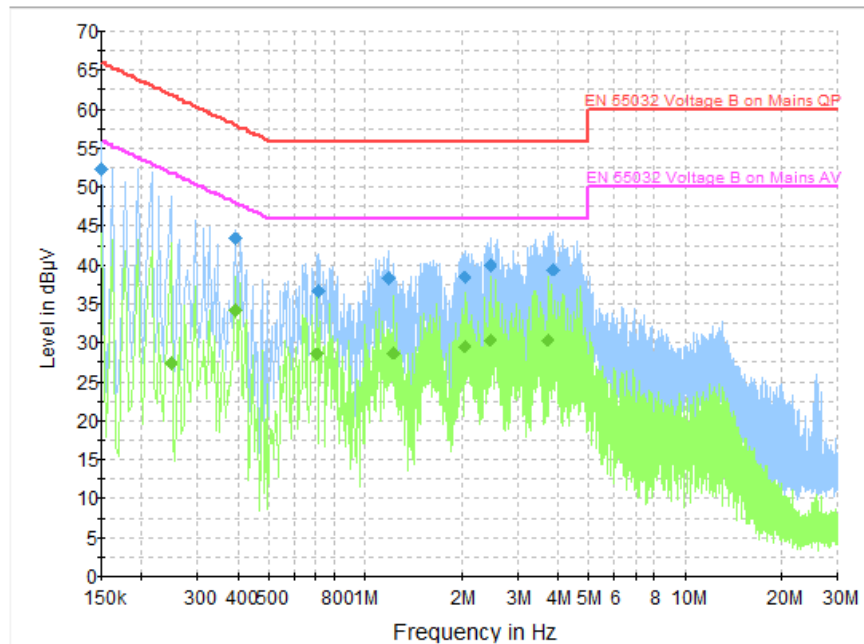


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.150000	52.3	2000.0	9.000	On	L1	20.2	13.7	66.0	
0.394000	43.4	2000.0	9.000	On	N	19.9	14.6	58.0	
0.718000	36.6	2000.0	9.000	On	L1	19.7	19.4	56.0	
1.186000	38.3	2000.0	9.000	On	L1	19.5	17.7	56.0	
2.046000	38.4	2000.0	9.000	On	L1	19.5	17.6	56.0	
2.454000	39.9	2000.0	9.000	On	L1	19.5	16.1	56.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.246000	27.4	2000.0	9.000	On	N	19.8	24.5	51.9	
0.394000	34.2	2000.0	9.000	On	N	19.9	13.8	48.0	
0.706000	28.6	2000.0	9.000	On	L1	19.7	17.4	46.0	
1.218000	28.7	2000.0	9.000	On	L1	19.5	17.3	46.0	
2.046000	29.5	2000.0	9.000	On	L1	19.5	16.5	46.0	
2.454000	30.3	2000.0	9.000	On	L1	19.5	15.7	46.0	

ANNEX B: EUT parameters

Disclaimer: The worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



END OF REPORT