




FCC SAR TEST REPORT

FCC ID : APYHRO00289
Equipment : Smart Phone
Brand Name : SHARP
Applicant : SHARP CORPORATION, Mobile
Communication B.U.
2-13-1, Hachihonmatsu-lida,
Higashi-hiroshima-shi, Hiroshima
739-0192, Japan
Manufacturer : SHARP CORPORATION
1 Takumi-cho, Sakai-ku, Sakai-shi,
Osaka 590-8522, Japan
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jul. 06, 2020 and testing was started from Aug. 14, 2020 and completed on Sep. 04, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	6
4. RF Exposure Limits.....	7
4.1 Uncontrolled Environment.....	7
4.2 Controlled Environment.....	7
5. Specific Absorption Rate (SAR).....	8
5.1 Introduction	8
5.2 SAR Definition.....	8
6. System Description and Setup	9
6.1 Test Side Location.....	9
6.2 E-Field Probe	10
6.3 Data Acquisition Electronics (DAE)	10
6.4 Phantom.....	11
6.5 Device Holder.....	12
7. Measurement Procedures	13
7.1 Spatial Peak SAR Evaluation.....	13
7.2 Power Reference Measurement.....	14
7.3 Area Scan	14
7.4 Zoom Scan.....	15
7.5 Volume Scan Procedures.....	15
7.6 Power Drift Monitoring.....	15
8. Test Equipment List.....	16
9. System Verification	17
9.1 Tissue Simulating Liquids.....	17
9.2 Tissue Verification	18
9.3 System Performance Check Results.....	19
10. RF Exposure Positions	20
10.1 Ear and handset reference point	20
10.2 Definition of the cheek position	21
10.3 Definition of the tilt position	22
10.4 Body Worn Accessory	23
10.5 Wireless Router.....	23
11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm).....	24
12. WiFi/Bluetooth Output Power (Unit: dBm)	37
13. RF Exposure position consideration	41
14. SAR Test Results	42
14.1 Head SAR	44
14.2 Hotspot SAR	47
14.3 Body Worn Accessory SAR.....	49
14.4 Repeated SAR Measurement	50
15. Simultaneous Transmission Analysis.....	51
15.1 Head Exposure Conditions	52
15.2 Hotspot Exposure Conditions.....	53
15.3 Body-Worn Accessory Exposure Conditions	54
16. Uncertainty Assessment	55
17. References.....	55
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA070611	01	Initial issue of report	Sep. 11, 2020

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for SHARP CORPORATION, Mobile Communication B.U., Smart Phone, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	
		1g SAR (W/kg)			
Licensed	GSM850	0.24	0.27	0.44	1.03
	GSM1900	0.11	0.29	0.60	
	WCDMA II	0.13	0.38	1.03	
	WCDMA V	0.28	0.17	0.25	
	LTE Band 2	0.13	0.43	0.98	
	LTE Band 5	0.17	0.17	0.23	
	LTE Band 12 / 17	0.06	0.09	0.12	
DTS	2.4GHz WLAN	0.14	0.03	0.03	1.03
NII	5GHz WLAN	0.20	0.01		0.74
DSS	Bluetooth	0.18			1.03
Date of Testing:		2020/8/14 ~ 2020/9/4			

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.(FCC) This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Ching Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, if the KDB standards were not list within TAF approval, because it is include in the FCC KDB 447498.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Smart Phone
Brand Name	SHARP
FCC ID	APYHRO00289
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.6GHz Band: 5500 MHz ~ 5720 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network..
EUT Stage	Identical Prototype
Remark: 1. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.	

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05												
FCC ID	APYHRO00289											
Equipment Name	SMART PHONE											
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz											
Channel Bandwidth	LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz											
uplink modulations used	QPSK / 16QAM / 64QAM											
LTE Voice / Data requirements	Voice and Data											
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3											
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)				
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz					
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1				
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1				
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2				
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2				
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3				
256 QAM	≥ 1						≤ 5					
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)											
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.											
Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709		23780		709	
M	23790		710		23790		710		23790		710	
H	23825		713.5		23800		711		23800		711	

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

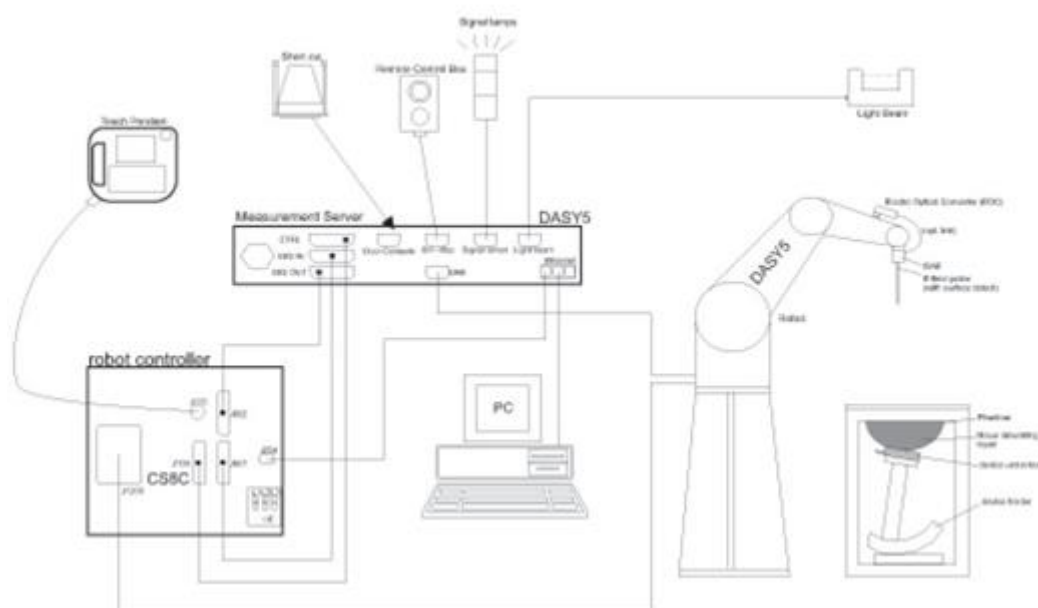

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Side Location


Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Mar. 07, 2019	Mar. 05, 2021
SPEAG	2450MHz System Validation Kit	D2450V2	929	Nov. 21, 2019	Nov. 20, 2020
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1006	Sep. 27, 2018	Sep. 25, 2020
SPEAG	Data Acquisition Electronics	DAE4	376	Dec. 06, 2019	Dec. 05, 2020
SPEAG	Data Acquisition Electronics	DAE4	916	Dec. 17, 2019	Dec. 16, 2020
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 18, 2020	Feb. 17, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 25, 2019	Sep. 24, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 25, 2019	Sep. 24, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7515	Oct. 22, 2019	Oct. 21, 2020
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
R&S	BT Base Station	CBT	100815	Feb. 15, 2020	Feb. 14, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 18, 2019	Nov. 17, 2020
Anritsu	Power Meter	ML2495A	0932001	Oct. 03, 2019	Oct. 02, 2020
Anritsu	Power Sensor	MA2411B	0846202	Oct. 03, 2019	Oct. 02, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 06, 2020	Aug. 05, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

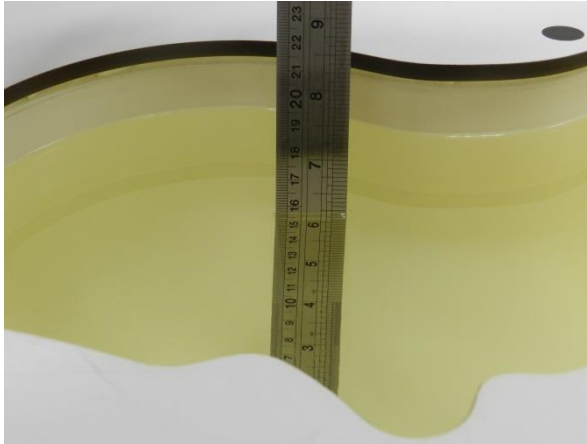


Fig 10.1 Photo of Liquid Height for Head SAR

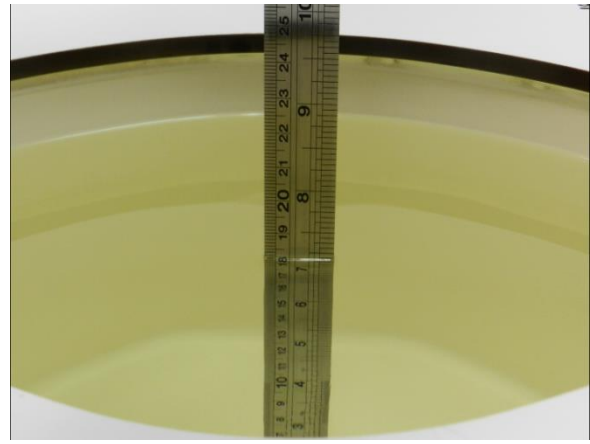


Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.2	0.915	41.998	0.89	41.90	2.81	0.23	±5	2020/8/15
835	22.2	0.938	41.825	0.90	41.50	4.22	0.78	±5	2020/8/14
835	22.2	0.926	41.578	0.90	41.50	2.89	0.19	±5	2020/8/17
1900	22.9	1.426	39.641	1.40	40.00	1.86	-0.90	±5	2020/8/16
1900	22.9	1.402	38.826	1.40	40.00	0.14	-2.94	±5	2020/8/17
2450	22.6	1.813	40.026	1.80	39.20	0.72	2.11	±5	2020/8/22
2450	22.3	1.827	40.037	1.80	39.20	1.50	2.14	±5	2020/9/4
5250	22.2	4.661	37.620	4.71	35.95	-1.04	4.65	±5	2020/8/22
5600	22.2	5.018	37.141	5.07	35.50	-1.03	4.62	±5	2020/8/22

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/8/15	750	250	D750V3-1107	ES3DV3 - SN3184	DAE4 Sn916	2.18	8.32	8.72	4.81
2020/8/14	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn916	2.30	9.55	9.2	-3.66
2020/8/17	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn916	2.27	9.55	9.08	-4.92
2020/8/16	1900	250	D1900V2-5d185	ES3DV3 - SN3184	DAE4 Sn916	9.68	39.40	38.72	-1.73
2020/8/17	1900	250	D1900V2-5d185	ES3DV3 - SN3184	DAE4 Sn916	9.51	39.40	38.04	-3.45
2020/8/22	2450	250	D2450V2-929	ES3DV3 - SN3184	DAE4 Sn916	12.70	53.10	50.8	-4.33
2020/9/4	2450	250	D2450V2-929	ES3DV3 - SN3270	DAE4 Sn1399	14.10	53.10	56.4	6.21
2020/8/22	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7515	DAE4 Sn376	7.76	80.70	77.6	-3.84
2020/8/22	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7515	DAE4 Sn376	8.69	83.30	86.9	4.32

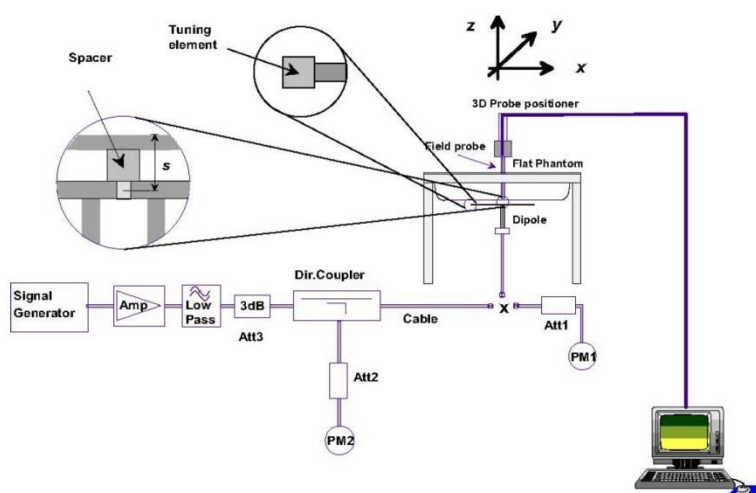


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

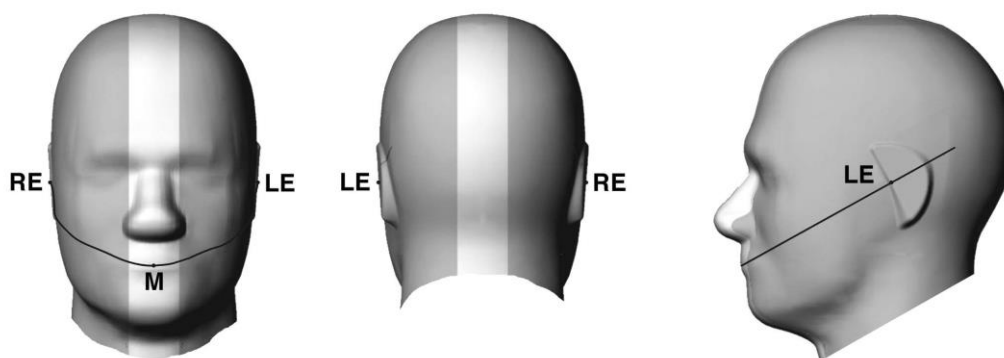


Fig 9.1.1 Front, back, and side views of SAM twin phantom

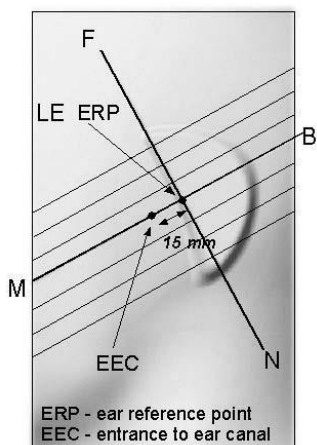


Fig 9.1.2 Close-up side view of phantom showing the ear region.

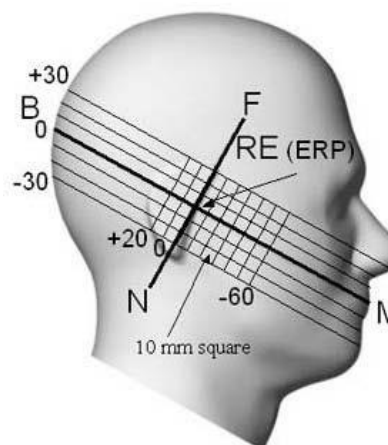


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

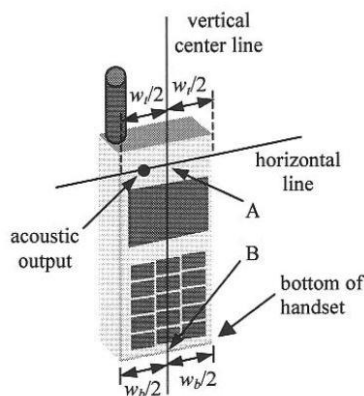


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

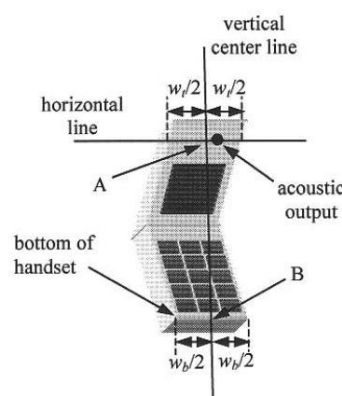


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

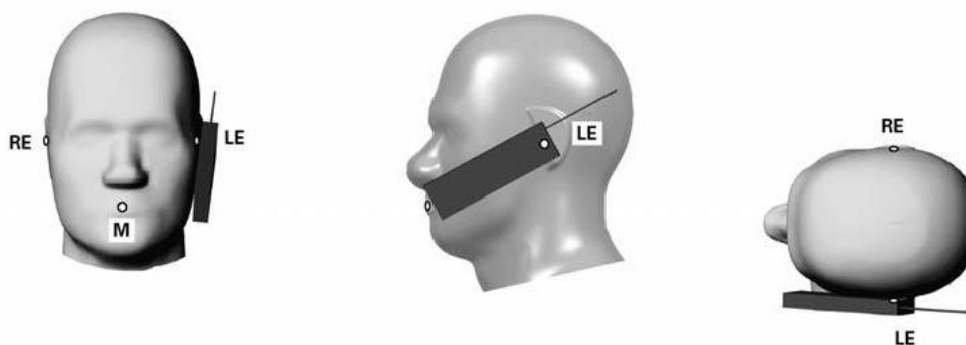


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

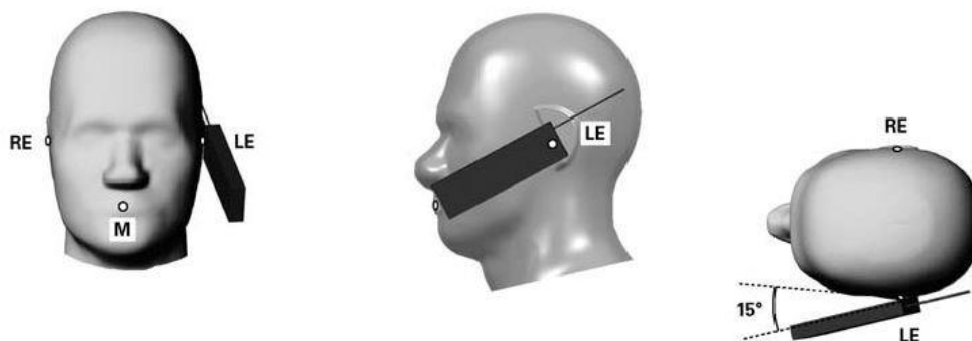


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

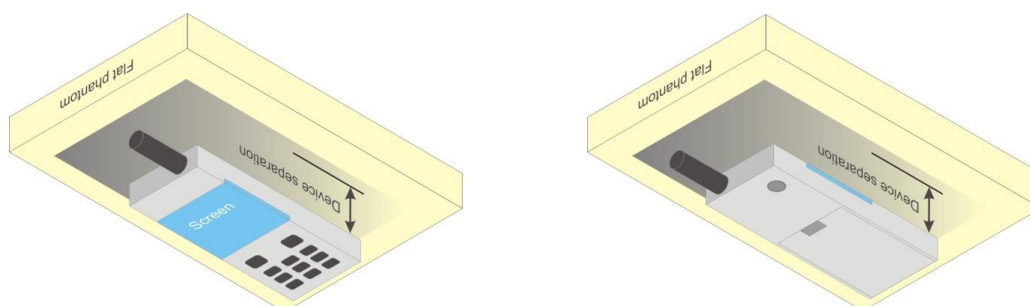


Fig 9.4 Body Worn Position

10.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.40	32.55	32.53	33.50	23.40	23.55	23.53	24.50
GPRS 1 Tx slot	32.46	32.56	32.55	33.50	23.46	23.56	23.55	24.50
GPRS 2 Tx slots	30.31	30.27	30.20	31.30	24.31	24.27	24.20	25.30
GPRS 3 Tx slots	28.17	28.22	28.20	29.30	23.91	23.96	23.94	25.04
GPRS 4 Tx slots	26.82	26.84	26.60	27.80	23.82	23.84	23.60	24.80

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.51	29.22	29.48	30.50	20.51	20.22	20.48	21.50
GPRS 1 Tx slot	29.52	29.27	29.50	30.50	20.52	20.27	20.50	21.50
GPRS 2 Tx slots	26.97	27.00	26.85	28.00	20.97	21.00	20.85	22.00
GPRS 3 Tx slots	25.17	25.07	25.06	26.20	20.91	20.81	20.80	21.94
GPRS 4 Tx slots	23.78	23.76	23.63	25.00	20.78	20.76	20.63	22.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

Full Main Mode

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.50	22.48	22.44	23.50	23.80	23.77	23.78	24.50
3GPP Rel 99	RMC 12.2Kbps	22.54	22.46	22.43	23.50	23.81	23.78	23.78	24.50
3GPP Rel 6	HSDPA Subtest-1	21.67	21.58	21.52	22.50	22.92	22.85	22.88	24.50
3GPP Rel 6	HSDPA Subtest-2	21.70	21.62	21.54	22.50	22.96	22.87	22.86	24.50
3GPP Rel 6	HSDPA Subtest-3	21.16	21.13	21.13	22.00	22.50	22.53	22.52	24.50
3GPP Rel 6	HSDPA Subtest-4	21.13	21.12	21.13	22.00	22.50	22.51	22.50	24.50
3GPP Rel 6	HSUPA Subtest-1	21.64	21.60	21.56	22.50	22.95	22.89	22.90	23.50
3GPP Rel 6	HSUPA Subtest-2	19.63	19.58	19.65	20.50	20.90	20.83	20.86	21.50
3GPP Rel 6	HSUPA Subtest-3	20.66	20.61	20.55	21.50	21.96	21.90	21.88	22.50
3GPP Rel 6	HSUPA Subtest-4	19.65	19.60	19.64	20.50	20.93	20.89	20.90	21.50
3GPP Rel 6	HSUPA Subtest-5	21.70	21.60	21.60	22.50	23.00	22.90	23.00	23.50

Full Sub Mode

Band		WCDMA V			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	17.65	17.62	17.55	18.50
3GPP Rel 99	RMC 12.2Kbps	17.72	17.64	17.57	18.50
3GPP Rel 6	HSDPA Subtest-1	16.69	16.61	16.51	17.50
3GPP Rel 6	HSDPA Subtest-2	16.64	16.60	16.53	17.50
3GPP Rel 6	HSDPA Subtest-3	16.22	16.10	16.07	17.00
3GPP Rel 6	HSDPA Subtest-4	16.16	16.13	16.01	17.00
3GPP Rel 6	HSUPA Subtest-1	16.68	16.62	16.56	17.50
3GPP Rel 6	HSUPA Subtest-2	14.72	14.61	14.49	15.50
3GPP Rel 6	HSUPA Subtest-3	15.63	15.62	15.55	16.50
3GPP Rel 6	HSUPA Subtest-4	14.68	14.56	14.51	15.50
3GPP Rel 6	HSUPA Subtest-5	16.71	16.58	16.53	17.50

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 12 SAR test was covered by Band 17; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM



16QAM

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.17	22.15	22.13	23.5	0
20	QPSK	1	49	22.16	22.16	22.01		
20	QPSK	1	99	22.10	22.19	22.11		
20	QPSK	50	0	21.22	21.19	21.22	22.5	1
20	QPSK	50	24	21.24	21.22	21.13		
20	QPSK	50	50	21.15	21.24	21.13		
20	QPSK	100	0	21.13	21.19	21.20	22.5	1
20	16QAM	1	0	21.49	21.51	21.38		
20	16QAM	1	49	21.39	21.55	21.28		
20	16QAM	1	99	21.46	21.46	21.40	21.5	2
20	16QAM	50	0	20.30	20.31	20.28		
20	16QAM	50	24	20.31	20.33	20.18		
20	16QAM	50	50	20.23	20.32	20.21	21.5	2
20	16QAM	100	0	20.17	20.27	20.25		
20	64QAM	1	0	20.44	20.48	20.39	21.5	2
20	64QAM	1	49	20.39	20.44	20.23		
20	64QAM	1	99	20.42	20.43	20.35		
20	64QAM	50	0	19.33	19.31	19.29	20.5	3
20	64QAM	50	24	19.35	19.32	19.20		
20	64QAM	50	50	19.26	19.32	19.24		
20	64QAM	100	0	19.24	19.31	19.29		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.11	22.11	21.99	23.5	0
15	QPSK	1	37	22.09	22.12	22.00		
15	QPSK	1	74	22.13	22.15	22.08		
15	QPSK	36	0	21.15	21.14	21.02	22.5	1
15	QPSK	36	20	21.16	21.16	21.07		
15	QPSK	36	39	21.15	21.15	21.07		
15	QPSK	75	0	21.14	21.16	21.07	22.5	1
15	16QAM	1	0	21.42	21.50	21.22		
15	16QAM	1	37	21.34	21.47	22.10		
15	16QAM	1	74	21.40	21.45	21.37	21.5	2
15	16QAM	36	0	20.22	20.25	20.10		
15	16QAM	36	20	20.23	20.29	20.16		
15	16QAM	36	39	20.22	20.24	20.18	21.5	2
15	16QAM	75	0	20.21	20.27	20.15		
15	64QAM	1	0	20.40	20.16	20.24		
15	64QAM	1	37	20.33	20.42	20.29	21.5	2
15	64QAM	1	74	20.38	20.43	20.36		
15	64QAM	36	0	19.28	19.29	19.18		
15	64QAM	36	20	19.31	19.35	19.20	20.5	3
15	64QAM	36	39	19.29	19.31	19.19		
15	64QAM	75	0	19.23	19.28	19.17		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.15	22.14	22.04	23.5	0
10	QPSK	1	25	22.12	22.15	22.06		
10	QPSK	1	49	22.14	22.17	22.10		
10	QPSK	25	0	21.16	21.15	21.08	22.5	1
10	QPSK	25	12	21.17	21.18	21.10		



FCC SAR TEST REPORT

Report No. : FA070611

10	QPSK	25	25	21.17	21.17	21.10		
10	QPSK	50	0	21.17	21.16	21.08		
10	16QAM	1	0	21.42	21.50	21.31		
10	16QAM	1	25	21.35	21.50	21.40	22.5	1
10	16QAM	1	49	21.35	21.50	21.37		
10	16QAM	25	0	20.21	20.27	20.15		
10	16QAM	25	12	20.26	20.28	20.17	21.5	2
10	16QAM	25	25	20.22	20.26	20.18		
10	16QAM	50	0	20.23	20.26	20.18		
10	64QAM	1	0	20.37	20.45	20.25	21.5	2
10	64QAM	1	25	20.31	20.44	20.34		
10	64QAM	1	49	20.36	20.44	20.34		
10	64QAM	25	0	19.22	19.28	19.20	20.5	3
10	64QAM	25	12	19.27	19.30	19.21		
10	64QAM	25	25	19.25	19.28	19.20		
10	64QAM	50	0	19.26	19.28	19.20		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.11	22.05	21.98	23.5	0
5	QPSK	1	12	22.11	22.12	22.06		
5	QPSK	1	24	22.06	22.11	22.00		
5	QPSK	12	0	21.13	21.14	21.05	22.5	1
5	QPSK	12	7	21.11	21.08	21.05		
5	QPSK	12	13	21.07	21.13	21.06		
5	QPSK	25	0	21.10	21.15	21.00	22.5	1
5	16QAM	1	0	21.32	21.44	21.30		
5	16QAM	1	12	21.33	21.47	21.38		
5	16QAM	1	24	21.35	21.41	21.29	21.5	2
5	16QAM	12	0	20.11	20.27	20.13		
5	16QAM	12	7	20.20	20.25	20.16		
5	16QAM	12	13	20.21	20.17	20.13	21.5	2
5	16QAM	25	0	20.18	20.18	20.16		
5	64QAM	1	0	20.37	20.41	20.20		
5	64QAM	1	12	20.29	20.39	20.30	21.5	2
5	64QAM	1	24	20.26	20.38	20.33		
5	64QAM	12	0	19.14	19.18	19.10		
5	64QAM	12	7	19.20	19.20	19.15	20.5	3
5	64QAM	12	13	19.22	19.22	19.10		
5	64QAM	25	0	19.16	19.22	19.20		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.13	22.12	22.00	23.5	0
3	QPSK	1	8	22.04	22.06	22.04		
3	QPSK	1	14	22.05	22.14	22.00		
3	QPSK	8	0	21.14	21.14	20.99	22.5	1
3	QPSK	8	4	21.09	21.16	21.10		
3	QPSK	8	7	21.15	21.08	21.04		
3	QPSK	15	0	21.09	21.09	21.03	22.5	1
3	16QAM	1	0	21.37	21.41	21.24		
3	16QAM	1	8	21.26	21.47	21.34		
3	16QAM	1	14	21.34	21.42	21.28	21.5	2
3	16QAM	8	0	20.18	20.19	20.13		
3	16QAM	8	4	20.25	20.22	20.08		
3	16QAM	8	7	20.21	20.18	20.12	21.5	2
3	16QAM	15	0	20.13	20.23	20.11		
3	64QAM	1	0	20.30	20.40	20.17	21.5	2



FCC SAR TEST REPORT

Report No. : FA070611

3	64QAM	1	8	20.26	20.44	20.25		
3	64QAM	1	14	20.26	20.41	20.29		
3	64QAM	8	0	19.12	19.20	19.12		
3	64QAM	8	4	19.21	19.23	19.11	20.5	3
3	64QAM	8	7	19.23	19.24	19.10		
3	64QAM	15	0	19.21	19.21	19.13		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.01	22.04	21.95	23.5	0
1.4	QPSK	1	3	22.09	22.09	22.05		
1.4	QPSK	1	5	21.99	22.01	21.97		
1.4	QPSK	3	0	22.03	22.06	22.01		
1.4	QPSK	3	1	22.10	22.10	22.03		
1.4	QPSK	3	3	22.03	22.04	22.01	22.5	1
1.4	QPSK	6	0	21.04	21.08	21.01		
1.4	16QAM	1	0	21.30	21.38	21.25	22.5	1
1.4	16QAM	1	3	21.36	21.45	21.30		
1.4	16QAM	1	5	21.27	21.37	21.20		
1.4	16QAM	3	0	21.10	21.15	21.06		
1.4	16QAM	3	1	21.14	21.22	21.10		
1.4	16QAM	3	3	21.06	21.14	21.06	21.5	2
1.4	16QAM	6	0	20.18	20.22	20.14		
1.4	64QAM	1	0	20.25	20.32	20.22	21.5	2
1.4	64QAM	1	3	20.31	20.39	20.24		
1.4	64QAM	1	5	20.22	20.30	20.17		
1.4	64QAM	3	0	20.27	20.33	20.18		
1.4	64QAM	3	1	20.29	20.36	20.23		
1.4	64QAM	3	3	20.22	20.31	20.21	20.5	3
1.4	64QAM	6	0	19.10	19.17	19.08		

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.88	22.91	22.95	24	0
10	QPSK	1	25	22.98	23.01	23.02		
10	QPSK	1	49	23.07	23.02	23.02		
10	QPSK	25	0	22.03	22.04	21.97	23	1
10	QPSK	25	12	22.05	22.08	22.10		
10	QPSK	25	25	22.09	22.08	22.10		
10	QPSK	50	0	22.01	22.05	21.97	23	1
10	16QAM	1	0	22.20	22.26	22.29		
10	16QAM	1	25	22.29	22.33	22.32		
10	16QAM	1	49	22.40	22.31	22.33	22	2
10	16QAM	25	0	21.11	21.12	21.04		
10	16QAM	25	12	21.12	21.16	21.18		
10	16QAM	25	25	21.19	21.13	21.13	22	2
10	16QAM	50	0	21.11	21.13	21.07		
10	64QAM	1	0	21.13	21.16	21.18		
10	64QAM	1	25	21.19	21.23	21.23	22	2
10	64QAM	1	49	21.31	21.23	21.25		
10	64QAM	25	0	20.10	20.15	20.08		
10	64QAM	25	12	20.12	20.15	20.18	21	3
10	64QAM	25	25	20.19	20.13	20.18		
10	64QAM	50	0	20.10	20.17	20.08		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.86	22.88	22.89	24	0
5	QPSK	1	12	22.98	23.01	22.92		
5	QPSK	1	24	22.97	23.02	23.00		
5	QPSK	12	0	22.00	22.03	21.90	23	1
5	QPSK	12	7	22.02	22.07	22.02		
5	QPSK	12	13	22.01	22.01	22.02		
5	QPSK	25	0	21.99	22.01	21.94	23	1
5	16QAM	1	0	22.15	22.26	22.20		
5	16QAM	1	12	22.26	22.26	22.25		
5	16QAM	1	24	22.32	22.28	22.30	22	2
5	16QAM	12	0	21.11	21.09	21.03		
5	16QAM	12	7	21.07	21.11	21.08		
5	16QAM	12	13	21.12	21.13	21.08	22	2
5	16QAM	25	0	21.11	21.06	21.04		
5	64QAM	1	0	21.12	21.14	21.10		
5	64QAM	1	12	21.09	21.20	21.20	22	2
5	64QAM	1	24	21.28	21.18	21.24		
5	64QAM	12	0	20.10	20.14	20.06		
5	64QAM	12	7	20.02	20.09	20.08	21	3
5	64QAM	12	13	20.13	20.09	20.11		
5	64QAM	25	0	20.07	20.15	19.98		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.78	22.87	22.88	24	0
3	QPSK	1	8	22.91	22.91	22.95		
3	QPSK	1	14	23.06	23.00	22.97		
3	QPSK	8	0	21.96	22.02	21.94	23	1
3	QPSK	8	4	21.99	22.07	22.10		



FCC SAR TEST REPORT

Report No. : FA070611

3	QPSK	8	7	22.04	21.98	22.02		
3	QPSK	15	0	21.96	21.98	21.95		
3	16QAM	1	0	22.17	22.26	22.25		
3	16QAM	1	8	22.29	22.32	22.27	23	1
3	16QAM	1	14	22.35	22.30	22.32		
3	16QAM	8	0	21.10	21.12	20.98		
3	16QAM	8	4	21.07	21.07	21.13	22	2
3	16QAM	8	7	21.11	21.10	21.07		
3	16QAM	15	0	21.04	21.13	21.07		
3	64QAM	1	0	21.10	21.13	21.10	22	2
3	64QAM	1	8	21.14	21.18	21.19		
3	64QAM	1	14	21.26	21.16	21.21		
3	64QAM	8	0	20.04	20.12	20.07	21	3
3	64QAM	8	4	20.06	20.13	20.14		
3	64QAM	8	7	20.11	20.08	20.08		
3	64QAM	15	0	20.00	20.08	20.04		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.78	22.88	22.86	24	0
1.4	QPSK	1	3	22.87	22.96	22.97		
1.4	QPSK	1	5	22.76	22.90	22.85		
1.4	QPSK	3	0	22.79	22.92	22.92		
1.4	QPSK	3	1	22.84	22.96	22.94		
1.4	QPSK	3	3	22.82	22.94	22.91		
1.4	QPSK	6	0	21.82	21.93	21.93	23	1
1.4	16QAM	1	0	22.08	22.22	22.18	23	1
1.4	16QAM	1	3	22.13	22.26	22.23		
1.4	16QAM	1	5	22.09	22.17	22.14		
1.4	16QAM	3	0	21.90	21.99	21.98		
1.4	16QAM	3	1	21.91	22.05	21.98		
1.4	16QAM	3	3	21.91	22.02	21.96		
1.4	16QAM	6	0	20.96	21.06	21.07	22	2
1.4	64QAM	1	0	21.04	21.14	21.09	22	2
1.4	64QAM	1	3	21.12	21.19	21.18		
1.4	64QAM	1	5	21.03	21.11	21.10		
1.4	64QAM	3	0	21.00	21.11	21.12		
1.4	64QAM	3	1	21.06	21.18	21.12		
1.4	64QAM	3	3	21.00	21.15	21.11		
1.4	64QAM	6	0	19.88	19.99	20.00	21	3

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	24	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.02	22.97	22.97		
10	QPSK	1	25	23.02	23.01	23.06	23	1
10	QPSK	1	49	23.05	23.13	23.21		
10	QPSK	25	0	22.08	22.04	22.00		
10	QPSK	25	12	22.10	22.08	22.03	23	1
10	QPSK	25	25	22.10	22.12	22.12		
10	QPSK	50	0	22.09	22.03	22.02		
10	16QAM	1	0	22.31	22.31	22.29	23	1
10	16QAM	1	25	22.34	22.32	22.37		
10	16QAM	1	49	22.40	22.40	22.52		
10	16QAM	25	0	21.13	21.10	21.10	22	2
10	16QAM	25	12	21.17	21.12	21.09		
10	16QAM	25	25	21.16	21.13	21.19		
10	16QAM	50	0	21.17	21.12	21.09	22	2
10	64QAM	1	0	21.25	21.23	21.23		
10	64QAM	1	25	21.28	21.29	21.31		
10	64QAM	1	49	21.32	21.37	21.46	21	3
10	64QAM	25	0	20.15	20.14	20.08		
10	64QAM	25	12	20.19	20.13	20.14		
10	64QAM	25	25	20.19	20.12	20.21	21	3
10	64QAM	50	0	20.16	20.13	20.12		
Channel				23035	23095	23155	24	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.93	22.94	22.96		
5	QPSK	1	12	22.99	23.00	22.96	23	1
5	QPSK	1	24	23.03	23.10	23.14		
5	QPSK	12	0	22.00	21.98	21.95		
5	QPSK	12	7	22.07	22.07	21.94	23	1
5	QPSK	12	13	22.06	21.98	22.09		
5	QPSK	25	0	22.01	21.96	21.94		
5	16QAM	1	0	22.24	22.29	22.23	23	1
5	16QAM	1	12	22.25	22.26	22.37		
5	16QAM	1	24	22.31	22.37	22.43		
5	16QAM	12	0	21.03	21.06	21.01	22	2
5	16QAM	12	7	21.15	21.04	21.05		
5	16QAM	12	13	21.15	21.12	21.13		
5	16QAM	25	0	21.11	21.12	21.07	22	2
5	64QAM	1	0	21.17	21.16	21.16		
5	64QAM	1	12	21.20	21.20	21.24		
5	64QAM	1	24	21.27	21.32	21.39	21	3
5	64QAM	12	0	20.05	20.07	19.98		
5	64QAM	12	7	20.19	20.13	20.07		
5	64QAM	12	13	20.09	20.09	20.18	21	3
5	64QAM	25	0	20.15	20.09	20.06		
Channel				23025	23095	23165	24	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.98	22.97	22.93		
3	QPSK	1	8	22.94	22.99	23.00	24	0
3	QPSK	1	14	22.95	23.08	23.20		
3	QPSK	8	0	22.00	21.94	21.93	23	1
3	QPSK	8	4	22.03	21.99	22.00		



FCC SAR TEST REPORT

Report No. : FA070611

3	QPSK	8	7	22.09	21.98	22.12		
3	QPSK	15	0	22.04	22.00	21.96		
3	16QAM	1	0	22.26	22.29	22.28		
3	16QAM	1	8	22.26	22.25	22.33	23	1
3	16QAM	1	14	22.33	22.34	22.42		
3	16QAM	8	0	21.03	21.10	21.07		
3	16QAM	8	4	21.13	21.04	21.01	22	2
3	16QAM	8	7	21.08	21.12	21.16		
3	16QAM	15	0	21.08	21.04	21.08		
3	64QAM	1	0	21.17	21.17	21.18	22	2
3	64QAM	1	8	21.21	21.27	21.31		
3	64QAM	1	14	21.22	21.33	21.44		
3	64QAM	8	0	20.13	20.09	20.06	21	3
3	64QAM	8	4	20.11	20.06	20.05		
3	64QAM	8	7	20.13	20.06	20.15		
3	64QAM	15	0	20.14	20.09	20.07		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.95	22.87	23.00	24	0
1.4	QPSK	1	3	23.02	22.92	23.11		
1.4	QPSK	1	5	22.93	22.86	23.01		
1.4	QPSK	3	0	22.98	22.92	23.05		
1.4	QPSK	3	1	23.04	22.94	23.11		
1.4	QPSK	3	3	23.00	22.91	23.07		
1.4	QPSK	6	0	22.00	21.91	22.08	23	1
1.4	16QAM	1	0	22.22	22.18	22.33	23	1
1.4	16QAM	1	3	22.28	22.24	22.39		
1.4	16QAM	1	5	22.22	22.08	22.33		
1.4	16QAM	3	0	22.04	21.98	22.11		
1.4	16QAM	3	1	22.09	22.01	22.14		
1.4	16QAM	3	3	22.02	21.98	22.08		
1.4	16QAM	6	0	21.15	21.07	21.22	22	2
1.4	64QAM	1	0	21.17	21.13	21.27	22	2
1.4	64QAM	1	3	21.24	21.18	21.34		
1.4	64QAM	1	5	21.19	21.11	21.25		
1.4	64QAM	3	0	21.12	21.10	21.27		
1.4	64QAM	3	1	21.23	21.18	21.29		
1.4	64QAM	3	3	21.15	21.14	21.27		
1.4	64QAM	6	0	20.09	20.00	20.16	21	3

<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.97	22.96	23.06	24	0
10	QPSK	1	25	23.07	23.06	23.04		
10	QPSK	1	49	23.10	23.11	23.10		
10	QPSK	25	0	22.11	22.10	22.09	23	1
10	QPSK	25	12	22.14	22.13	22.04		
10	QPSK	25	25	22.14	22.14	22.14		
10	QPSK	50	0	22.14	22.13	22.11	23	1
10	16QAM	1	0	22.28	22.26	22.37		
10	16QAM	1	25	22.38	22.35	22.33		
10	16QAM	1	49	22.40	22.38	22.38	22	2
10	16QAM	25	0	21.19	21.19	21.19		
10	16QAM	25	12	21.23	21.20	21.17		
10	16QAM	25	25	21.19	21.18	21.18	22	2
10	16QAM	50	0	21.19	21.18	21.21		
10	64QAM	1	0	21.22	21.20	21.31		
10	64QAM	1	25	21.30	21.28	21.29	22	2
10	64QAM	1	49	21.34	21.34	21.35		
10	64QAM	25	0	20.19	20.16	20.17		
10	64QAM	25	12	20.22	20.21	20.19	21	3
10	64QAM	25	25	20.21	20.20	20.22		
10	64QAM	50	0	20.24	20.23	20.22		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.95	22.89	23.03	24	0
5	QPSK	1	12	23.04	22.97	23.00		
5	QPSK	1	24	23.09	23.04	23.00		
5	QPSK	12	0	22.09	22.07	22.09	23	1
5	QPSK	12	7	22.12	22.11	22.00		
5	QPSK	12	13	22.10	22.04	22.08		
5	QPSK	25	0	22.10	22.08	22.10	23	1
5	16QAM	1	0	22.25	22.21	22.29		
5	16QAM	1	12	22.29	22.31	22.33		
5	16QAM	1	24	22.35	22.35	22.33	22	2
5	16QAM	12	0	21.10	21.12	21.16		
5	16QAM	12	7	21.18	21.13	21.16		
5	16QAM	12	13	21.13	21.15	21.18	22	2
5	16QAM	25	0	21.11	21.17	21.18		
5	64QAM	1	0	21.14	21.15	21.23		
5	64QAM	1	12	21.24	21.28	21.21	22	2
5	64QAM	1	24	21.34	21.33	21.35		
5	64QAM	12	0	20.19	20.07	20.12		
5	64QAM	12	7	20.19	20.14	20.14	21	3
5	64QAM	12	13	20.16	20.16	20.17		
5	64QAM	25	0	20.20	20.22	20.13		

12. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	13.90	14.00	99.30
		6	2437	13.80	14.00	
		11	2462	13.70	14.00	
	802.11g 6Mbps	1	2412	11.90	12.00	98.25
		6	2437	11.60	12.00	
		11	2462	11.70	12.00	
	802.11n-HT20 MCS0	1	2412	11.80	12.00	98.12
		6	2437	11.90	12.00	
		11	2462	11.90	12.00	

<5GHz WLAN >

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	10.55	11.00	98.25
		40	5200	10.63	11.00	
		44	5220	10.77	11.00	
		48	5240	10.70	11.00	
	802.11n-HT20 MCS0	36	5180	10.88	11.00	98.12
		40	5200	10.91	11.00	
		44	5220	10.68	11.00	
		48	5240	10.62	11.00	
	802.11n-HT40 MCS0	38	5190	10.97	11.00	96.24
		46	5230	10.24	11.00	
	802.11ac-VHT20 MCS0	36	5180	10.82	11.00	98.13
		40	5200	10.90	11.00	
		44	5220	10.66	11.00	
		48	5240	10.58	11.00	
	802.11ac-VHT40 MCS0	38	5190	10.96	11.00	96.27
		46	5230	10.05	11.00	
	802.11ac-VHT80 MCS0	42	5210	10.92	11.00	92.24

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	10.76	11.00	98.25
		56	5280	10.78	11.00	
		60	5300	10.92	11.00	
		64	5320	10.99	11.00	
	802.11n-HT20 MCS0	52	5260	10.62	11.00	98.12
		56	5280	10.70	11.00	
		60	5300	10.86	11.00	
		64	5320	10.92	11.00	
	802.11n-HT40 MCS0	54	5270	10.07	11.00	96.24
		62	5310	10.24	11.00	
	802.11ac-VHT20 MCS0	52	5260	10.60	11.00	98.13
		56	5280	10.71	11.00	
		60	5300	10.85	11.00	
		64	5320	10.91	11.00	
	802.11ac-VHT40 MCS0	54	5270	10.06	11.00	96.27
		62	5310	10.20	11.00	
	802.11ac-VHT80 MCS0	58	5290	10.15	11.00	92.24

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	11.95	12.00	98.25
		116	5580	11.97	12.00	
		132	5660	11.98	12.00	
		144	5720	11.95	12.00	
	802.11n-HT20 MCS0	100	5500	11.85	12.00	98.12
		116	5580	11.84	12.00	
		132	5660	11.82	12.00	
		144	5720	11.95	12.00	
	802.11n-HT40 MCS0	102	5510	11.90	12.00	96.24
		110	5550	11.85	12.00	
		134	5670	11.92	12.00	
		142	5710	11.88	12.00	
	802.11ac-VHT20 MCS0	100	5500	11.80	12.00	98.13
		116	5580	11.82	12.00	
		132	5660	11.84	12.00	
		144	5720	11.93	12.00	
	802.11ac-VHT40 MCS0	102	5510	11.87	12.00	96.27
		110	5550	11.84	12.00	
		134	5670	11.91	12.00	
		142	5710	11.85	12.00	
	802.11ac-VHT80 MCS0	106	5530	11.77	12.00	92.24
		138	5690	11.63	12.00	


<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	10.30	8.20	8.20
	CH 39	2441	10.20	7.70	7.70
	CH 78	2480	9.80	7.70	7.70
Tune-up Limit			11.50	11.50	11.50

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	5.50	5.50
	CH 19	2440	4.90	4.90
	CH 39	2480	5.00	5.00
Tune-up Limit			6.50	6.50

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.63% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

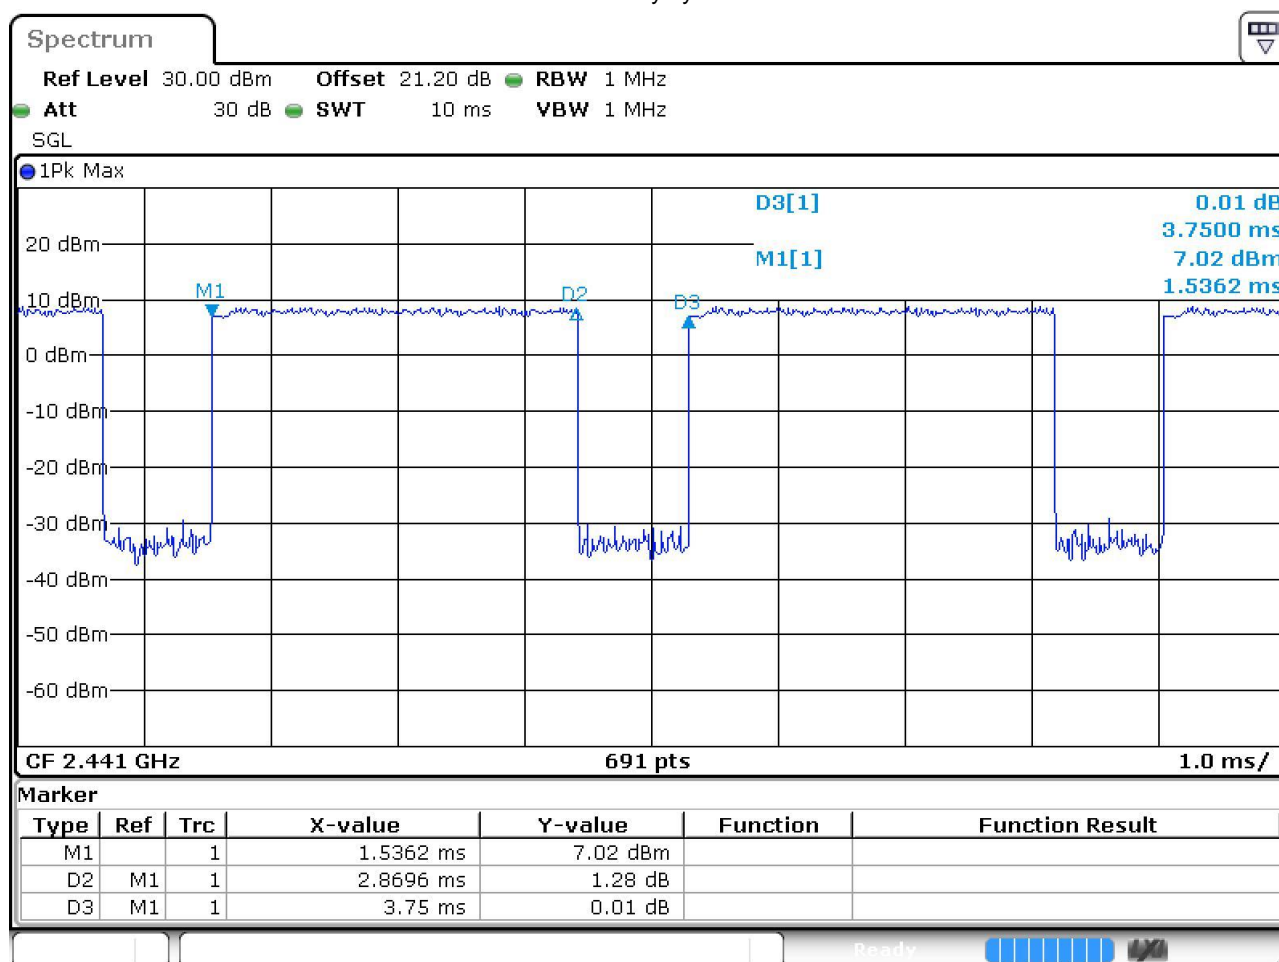BT Duty cycle


Date: 19.AUG.2020 23:07:31

<Bluetooth Body SAR Exclusions Applied>
Note:

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
11.5	10	2.48	2.23

Note:

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.52 which is ≤ 3 , SAR testing is not required.

13. RF Exposure position consideration

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	$\leq 25\text{mm}$	$\leq 25\text{mm}$	$>25\text{mm}$	$\leq 25\text{mm}$	$\leq 25\text{mm}$	$\leq 25\text{mm}$
WWAN Sub	$\leq 25\text{mm}$	$\leq 25\text{mm}$	$\leq 25\text{mm}$	$>25\text{mm}$	$\leq 25\text{mm}$	$\leq 25\text{mm}$
BT&WLAN	$\leq 25\text{mm}$	$\leq 25\text{mm}$	$\leq 25\text{mm}$	$>25\text{mm}$	$>25\text{mm}$	$\leq 25\text{mm}$

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
WWAN Sub	Yes	Yes	Yes	No	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 12 SAR test was covered by Band 17; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850_Main	GPRS (2 Tx slots)	Right Cheek	0mm	128	824.2	30.31	31.30	1.256	-0.06	0.191	0.240
	GSM850_Main	GPRS (2 Tx slots)	Right Tilted	0mm	128	824.2	30.31	31.30	1.256	0.02	0.092	0.116
	GSM850_Main	GPRS (2 Tx slots)	Left Cheek	0mm	128	824.2	30.31	31.30	1.256	-0.04	0.181	0.227
	GSM850_Main	GPRS (2 Tx slots)	Left Tilted	0mm	128	824.2	30.31	31.30	1.256	-0.05	0.100	0.126
02	GSM1900_Main	GPRS (4 Tx slots)	Right Cheek	0mm	512	1850.2	23.78	25.00	1.324	-0.14	0.082	0.109
	GSM1900_Main	GPRS (4 Tx slots)	Right Tilted	0mm	512	1850.2	23.78	25.00	1.324	0.04	0.044	0.058
	GSM1900_Main	GPRS (4 Tx slots)	Left Cheek	0mm	512	1850.2	23.78	25.00	1.324	-0.16	0.057	0.075
	GSM1900_Main	GPRS (4 Tx slots)	Left Tilted	0mm	512	1850.2	23.78	25.00	1.324	-0.07	0.047	0.062

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II_Main	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	22.54	23.50	1.247	0.13	0.100	0.125
	WCDMA II_Main	RMC 12.2Kbps	Right Tilted	0mm	9262	1852.4	22.54	23.50	1.247	-0.06	0.048	0.060
	WCDMA II_Main	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	22.54	23.50	1.247	0.01	0.080	0.100
	WCDMA II_Main	RMC 12.2Kbps	Left Tilted	0mm	9262	1852.4	22.54	23.50	1.247	-0.12	0.056	0.070
04	WCDMA V_Sub	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	17.72	18.50	1.197	-0.18	0.235	0.281
	WCDMA V_Sub	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	17.72	18.50	1.197	-0.14	0.181	0.217
	WCDMA V_Sub	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	17.72	18.50	1.197	-0.13	0.205	0.245
	WCDMA V_Sub	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	17.72	18.50	1.197	-0.13	0.157	0.188
	WCDMA V_Main	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	23.81	24.50	1.172	-0.05	0.114	0.134
	WCDMA V_Main	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	23.81	24.50	1.172	0.09	0.058	0.068
	WCDMA V_Main	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	23.81	24.50	1.172	-0.07	0.115	0.135
	WCDMA V_Main	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	23.81	24.50	1.172	0.04	0.054	0.063



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	LTE Band 2_Main	20M	QPSK	1	99	Right Cheek	0mm	18900	1880	22.19	23.50	1.352	0.1	0.098	0.133
	LTE Band 2_Main	20M	QPSK	50	50	Right Cheek	0mm	18900	1880	21.24	22.50	1.337	0.16	0.077	0.103
	LTE Band 2_Main	20M	QPSK	1	99	Right Tilted	0mm	18900	1880	22.19	23.50	1.352	0.19	0.046	0.062
	LTE Band 2_Main	20M	QPSK	50	50	Right Tilted	0mm	18900	1880	21.24	22.50	1.337	0.16	0.035	0.047
	LTE Band 2_Main	20M	QPSK	1	99	Left Cheek	0mm	18900	1880	22.19	23.50	1.352	-0.04	0.067	0.091
	LTE Band 2_Main	20M	QPSK	50	50	Left Cheek	0mm	18900	1880	21.24	22.50	1.337	0.18	0.054	0.072
	LTE Band 2_Main	20M	QPSK	1	99	Left Tilted	0mm	18900	1880	22.19	23.50	1.352	0.19	0.038	0.051
	LTE Band 2_Main	20M	QPSK	50	50	Left Tilted	0mm	18900	1880	21.24	22.50	1.337	0.12	0.029	0.039
06	LTE Band 5_Main	10M	QPSK	1	49	Right Cheek	0mm	20525	836.5	23.02	24.00	1.253	-0.03	0.134	0.168
	LTE Band 5_Main	10M	QPSK	25	25	Right Cheek	0mm	20525	836.5	22.08	23.00	1.236	-0.07	0.105	0.130
	LTE Band 5_Main	10M	QPSK	1	49	Right Tilted	0mm	20525	836.5	23.02	24.00	1.253	0.08	0.067	0.084
	LTE Band 5_Main	10M	QPSK	25	25	Right Tilted	0mm	20525	836.5	22.08	23.00	1.236	0.03	0.052	0.064
	LTE Band 5_Main	10M	QPSK	1	49	Left Cheek	0mm	20525	836.5	23.02	24.00	1.253	-0.08	0.101	0.127
	LTE Band 5_Main	10M	QPSK	25	25	Left Cheek	0mm	20525	836.5	22.08	23.00	1.236	-0.08	0.078	0.096
	LTE Band 5_Main	10M	QPSK	1	49	Left Tilted	0mm	20525	836.5	23.02	24.00	1.253	0.02	0.052	0.065
	LTE Band 5_Main	10M	QPSK	25	25	Left Tilted	0mm	20525	836.5	22.08	23.00	1.236	-0.03	0.040	0.049
07	LTE Band 12_Main	10M	QPSK	1	49	Right Cheek	0mm	23095	707.5	23.13	24.00	1.222	-0.1	0.051	0.062
	LTE Band 12_Main	10M	QPSK	25	25	Right Cheek	0mm	23095	707.5	22.12	23.00	1.225	0.09	0.039	0.048
	LTE Band 12_Main	10M	QPSK	1	49	Right Tilted	0mm	23095	707.5	23.13	24.00	1.222	0.1	0.032	0.039
	LTE Band 12_Main	10M	QPSK	25	25	Right Tilted	0mm	23095	707.5	22.12	23.00	1.225	0.18	0.025	0.031
	LTE Band 12_Main	10M	QPSK	1	49	Left Cheek	0mm	23095	707.5	23.13	24.00	1.222	-0.09	0.050	0.061
	LTE Band 12_Main	10M	QPSK	25	25	Left Cheek	0mm	23095	707.5	22.12	23.00	1.225	0.03	0.039	0.048
	LTE Band 12_Main	10M	QPSK	1	49	Left Tilted	0mm	23095	707.5	23.13	24.00	1.222	0.13	0.032	0.039
	LTE Band 12_Main	10M	QPSK	25	25	Left Tilted	0mm	23095	707.5	22.12	23.00	1.225	0.1	0.025	0.031

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
08	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	1	2412	13.90	14.00	1.023	99.3	1.007	-0.17	0.137	0.141
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	1	2412	13.90	14.00	1.023	99.3	1.007	-0.14	0.122	0.126
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	1	2412	13.90	14.00	1.023	99.3	1.007	0.07	0.056	0.058
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	1	2412	13.90	14.00	1.023	99.3	1.007	-0.1	0.073	0.075
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	58	5290	10.15	11.00	1.216	92.24	1.084	0	0.036	0.047
09	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	58	5290	10.15	11.00	1.216	92.24	1.084	-0.08	0.046	0.061
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	58	5290	10.15	11.00	1.216	92.24	1.084	0.14	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	58	5290	10.15	11.00	1.216	92.24	1.084	-0.05	0.018	0.024
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	106	5530	11.77	12.00	1.054	92.24	1.084	-0.05	0.136	0.155
10	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	106	5530	11.77	12.00	1.054	92.24	1.084	0.09	0.171	0.195
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	106	5530	11.77	12.00	1.054	92.24	1.084	-0.04	0.071	0.081
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	106	5530	11.77	12.00	1.054	92.24	1.084	0.02	0.099	0.113

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	0	2402	10.30	11.50	1.318	76.63	1.305	0.18	0.090	0.155
11	Bluetooth	1Mbps	Right Tilted	0mm	0	2402	10.30	11.50	1.318	76.63	1.305	0.04	0.106	0.182
	Bluetooth	1Mbps	Left Cheek	0mm	0	2402	10.30	11.50	1.318	76.63	1.305	0.08	0.034	0.058
	Bluetooth	1Mbps	Left Tilted	0mm	0	2402	10.30	11.50	1.318	76.63	1.305	0.06	0.043	0.074

14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Main	GPRS (2 Tx slots)	Front	10mm	128	824.2	30.31	31.30	1.256	-0.14	0.218	0.274
	GSM850_Main	GPRS (2 Tx slots)	Back	10mm	128	824.2	30.31	31.30	1.256	-0.17	0.217	0.273
	GSM850_Main	GPRS (2 Tx slots)	Left Side	10mm	128	824.2	30.31	31.30	1.256	-0.08	0.201	0.252
12	GSM850_Main	GPRS (2 Tx slots)	Right Side	10mm	128	824.2	30.31	31.30	1.256	-0.08	0.348	0.437
	GSM850_Main	GPRS (2 Tx slots)	Bottom Side	10mm	128	824.2	30.31	31.30	1.256	-0.1	0.103	0.129
	GSM1900_Main	GPRS (4 Tx slots)	Front	10mm	512	1850.2	23.78	25.00	1.324	-0.04	0.217	0.287
	GSM1900_Main	GPRS (4 Tx slots)	Back	10mm	512	1850.2	23.78	25.00	1.324	-0.09	0.151	0.200
	GSM1900_Main	GPRS (4 Tx slots)	Left Side	10mm	512	1850.2	23.78	25.00	1.324	-0.15	0.108	0.143
	GSM1900_Main	GPRS (4 Tx slots)	Right Side	10mm	512	1850.2	23.78	25.00	1.324	-0.14	0.046	0.061
13	GSM1900_Main	GPRS (4 Tx slots)	Bottom Side	10mm	512	1850.2	23.78	25.00	1.324	-0.13	0.451	0.597

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Main	RMC 12.2Kbps	Front	10mm	9262	1852.4	22.54	23.50	1.247	-0.03	0.306	0.382
	WCDMA II_Main	RMC 12.2Kbps	Back	10mm	9262	1852.4	22.54	23.50	1.247	-0.1	0.203	0.253
	WCDMA II_Main	RMC 12.2Kbps	Left Side	10mm	9262	1852.4	22.54	23.50	1.247	-0.09	0.133	0.166
	WCDMA II_Main	RMC 12.2Kbps	Right Side	10mm	9262	1852.4	22.54	23.50	1.247	-0.08	0.069	0.086
	WCDMA II_Main	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	22.54	23.50	1.247	-0.12	0.698	0.871
	WCDMA II_Main	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	22.46	23.50	1.271	-0.13	0.776	0.986
14	WCDMA II_Main	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	22.43	23.50	1.279	-0.13	0.801	1.025
	WCDMA V_Sub	RMC 12.2Kbps	Front	10mm	4132	826.4	17.72	18.50	1.197	-0.11	0.040	0.048
	WCDMA V_Sub	RMC 12.2Kbps	Back	10mm	4132	826.4	17.72	18.50	1.197	-0.16	0.040	0.048
	WCDMA V_Sub	RMC 12.2Kbps	Left Side	10mm	4132	826.4	17.72	18.50	1.197	-0.04	0.052	0.062
	WCDMA V_Sub	RMC 12.2Kbps	Right Side	10mm	4132	826.4	17.72	18.50	1.197	0.02	0.021	0.025
	WCDMA V_Sub	RMC 12.2Kbps	Top Side	10mm	4132	826.4	17.72	18.50	1.197	0.15	0.041	0.049
	WCDMA V_Main	RMC 12.2Kbps	Front	10mm	4132	826.4	23.81	24.50	1.172	-0.11	0.144	0.169
	WCDMA V_Main	RMC 12.2Kbps	Back	10mm	4132	826.4	23.81	24.50	1.172	-0.06	0.139	0.163
	WCDMA V_Main	RMC 12.2Kbps	Left Side	10mm	4132	826.4	23.81	24.50	1.172	-0.08	0.126	0.148
15	WCDMA V_Main	RMC 12.2Kbps	Right Side	10mm	4132	826.4	23.81	24.50	1.172	-0.13	0.211	0.247
	WCDMA V_Main	RMC 12.2Kbps	Bottom Side	10mm	4132	826.4	23.81	24.50	1.172	0.06	0.074	0.087

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Main	20M	QPSK	1	99	Front	10mm	18900	1880	22.19	23.50	1.352	0.01	0.314	0.425
	LTE Band 2_Main	20M	QPSK	50	50	Front	10mm	18900	1880	21.24	22.50	1.337	0.01	0.248	0.331
	LTE Band 2_Main	20M	QPSK	1	99	Back	10mm	18900	1880	22.19	23.50	1.352	-0.16	0.189	0.256
	LTE Band 2_Main	20M	QPSK	50	50	Back	10mm	18900	1880	21.24	22.50	1.337	-0.11	0.148	0.198
	LTE Band 2_Main	20M	QPSK	1	99	Left Side	10mm	18900	1880	22.19	23.50	1.352	0.13	0.136	0.184
	LTE Band 2_Main	20M	QPSK	50	50	Left Side	10mm	18900	1880	21.24	22.50	1.337	0.11	0.108	0.144
	LTE Band 2_Main	20M	QPSK	1	99	Right Side	10mm	18900	1880	22.19	23.50	1.352	-0.02	0.061	0.082
	LTE Band 2_Main	20M	QPSK	50	50	Right Side	10mm	18900	1880	21.24	22.50	1.337	-0.11	0.050	0.067
	LTE Band 2_Main	20M	QPSK	1	99	Bottom Side	10mm	18900	1880	22.19	23.50	1.352	-0.11	0.694	0.938
	LTE Band 2_Main	20M	QPSK	1	0	Bottom Side	10mm	18700	1860	22.17	23.50	1.358	-0.16	0.617	0.838
16	LTE Band 2_Main	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	22.13	23.50	1.371	-0.18	0.718	0.984
	LTE Band 2_Main	20M	QPSK	50	50	Bottom Side	10mm	18900	1880	21.24	22.50	1.337	-0.16	0.554	0.740
	LTE Band 2_Main	20M	QPSK	100	0	Bottom Side	10mm	19100	1900	21.20	22.50	1.349	-0.17	0.579	0.781
	LTE Band 5_Main	10M	QPSK	1	49	Front	10mm	20525	836.5	23.02	24.00	1.253	-0.1	0.135	0.169
	LTE Band 5_Main	10M	QPSK	25	25	Front	10mm	20525	836.5	22.08	23.00	1.236	-0.09	0.105	0.130
	LTE Band 5_Main	10M	QPSK	1	49	Back	10mm	20525	836.5	23.02	24.00	1.253	0.01	0.133	0.167
	LTE Band 5_Main	10M	QPSK	25	25	Back	10mm	20525	836.5	22.08	23.00	1.236	-0.07	0.102	0.126
	LTE Band 5_Main	10M	QPSK	1	49	Left Side	10mm	20525	836.5	23.02	24.00	1.253	-0.11	0.120	0.150
	LTE Band 5_Main	10M	QPSK	25	25	Left Side	10mm	20525	836.5	22.08	23.00	1.236	-0.11	0.094	0.116
17	LTE Band 5_Main	10M	QPSK	1	49	Right Side	10mm	20525	836.5	23.02	24.00	1.253	-0.12	0.185	0.232
	LTE Band 5_Main	10M	QPSK	25	25	Right Side	10mm	20525	836.5	22.08	23.00	1.236	-0.13	0.147	0.182
	LTE Band 5_Main	10M	QPSK	1	49	Bottom Side	10mm	20525	836.5	23.02	24.00	1.253	0.06	0.081	0.102
	LTE Band 5_Main	10M	QPSK	25	25	Bottom Side	10mm	20525	836.5	22.08	23.00	1.236	0.05	0.063	0.078
	LTE Band 12_Main	10M	QPSK	1	49	Front	10mm	23095	707.5	23.13	24.00	1.222	-0.09	0.076	0.093
	LTE Band 12_Main	10M	QPSK	25	25	Front	10mm	23095	707.5	22.12	23.00	1.225	-0.04	0.059	0.072
	LTE Band 12_Main	10M	QPSK	1	49	Back	10mm	23095	707.5	23.13	24.00	1.222	-0.07	0.060	0.073
	LTE Band 12_Main	10M	QPSK	25	25	Back	10mm	23095	707.5	22.12	23.00	1.225	0.03	0.046	0.056
	LTE Band 12_Main	10M	QPSK	1	49	Left Side	10mm	23095	707.5	23.13	24.00	1.222	-0.09	0.051	0.062
	LTE Band 12_Main	10M	QPSK	25	25	Left Side	10mm	23095	707.5	22.12	23.00	1.225	-0.05	0.040	0.049
18	LTE Band 12_Main	10M	QPSK	1	49	Right Side	10mm	23095	707.5	23.13	24.00	1.222	-0.15	0.094	0.115
	LTE Band 12_Main	10M	QPSK	25	25	Right Side	10mm	23095	707.5	22.12	23.00	1.225	-0.11	0.074	0.091
	LTE Band 12_Main	10M	QPSK	1	49	Bottom Side	10mm	23095	707.5	23.13	24.00	1.222	-0.12	0.030	0.037
	LTE Band 12_Main	10M	QPSK	25	25	Bottom Side	10mm	23095	707.5	22.12	23.00	1.225	0.12	0.023	0.028

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	13.90	14.00	1.023	99.3	1.007	-0.05	0.013	0.013
19	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	13.90	14.00	1.023	99.3	1.007	-0.11	0.032	0.033
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	1	2412	13.90	14.00	1.023	99.3	1.007	0.02	0.019	0.020
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	1	2412	13.90	14.00	1.023	99.3	1.007	0.08	0.022	0.023

14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
20	GSM850_Main	GPRS (2 Tx slots)	Front	10mm	128	824.2	30.31	31.30	1.256	-0.14	0.218	0.274
	GSM850_Main	GPRS (2 Tx slots)	Back	10mm	128	824.2	30.31	31.30	1.256	-0.17	0.217	0.273
21	GSM1900_Main	GPRS (4 Tx slots)	Front	10mm	512	1850.2	23.78	25.00	1.324	-0.04	0.217	0.287
	GSM1900_Main	GPRS (4 Tx slots)	Back	10mm	512	1850.2	23.78	25.00	1.324	-0.09	0.151	0.200

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
22	WCDMA II_Main	RMC 12.2Kbps	Front	10mm	9262	1852.4	22.54	23.50	1.247	-0.03	0.306	0.382
	WCDMA II_Main	RMC 12.2Kbps	Back	10mm	9262	1852.4	22.54	23.50	1.247	-0.1	0.203	0.253
	WCDMA V_Sub	RMC 12.2Kbps	Front	10mm	4132	826.4	17.72	18.50	1.197	-0.11	0.040	0.048
	WCDMA V_Sub	RMC 12.2Kbps	Back	10mm	4132	826.4	17.72	18.50	1.197	-0.16	0.040	0.048
23	WCDMA V_Main	RMC 12.2Kbps	Front	10mm	4132	826.4	23.81	24.50	1.172	-0.11	0.144	0.169
	WCDMA V_Main	RMC 12.2Kbps	Back	10mm	4132	826.4	23.81	24.50	1.172	-0.06	0.139	0.163

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
24	LTE Band 2_Main	20M	QPSK	1	99	Front	10mm	18900	1880	22.19	23.50	1.352	0.01	0.314	0.425
	LTE Band 2_Main	20M	QPSK	50	50	Front	10mm	18900	1880	21.24	22.50	1.337	0.01	0.248	0.331
	LTE Band 2_Main	20M	QPSK	1	99	Back	10mm	18900	1880	22.19	23.50	1.352	-0.16	0.189	0.256
	LTE Band 2_Main	20M	QPSK	50	50	Back	10mm	18900	1880	21.24	22.50	1.337	-0.11	0.148	0.198
25	LTE Band 5_Main	10M	QPSK	1	49	Front	10mm	20525	836.5	23.02	24.00	1.253	-0.1	0.135	0.169
	LTE Band 5_Main	10M	QPSK	25	25	Front	10mm	20525	836.5	22.08	23.00	1.236	-0.09	0.105	0.130
	LTE Band 5_Main	10M	QPSK	1	49	Back	10mm	20525	836.5	23.02	24.00	1.253	0.01	0.133	0.167
	LTE Band 5_Main	10M	QPSK	25	25	Back	10mm	20525	836.5	22.08	23.00	1.236	-0.07	0.102	0.126
26	LTE Band 12_Main	10M	QPSK	1	49	Front	10mm	23095	707.5	23.13	24.00	1.222	-0.09	0.076	0.093
	LTE Band 12_Main	10M	QPSK	25	25	Front	10mm	23095	707.5	22.12	23.00	1.225	-0.04	0.059	0.072
	LTE Band 12_Main	10M	QPSK	1	49	Back	10mm	23095	707.5	23.13	24.00	1.222	-0.07	0.060	0.073
	LTE Band 12_Main	10M	QPSK	25	25	Back	10mm	23095	707.5	22.12	23.00	1.225	0.03	0.046	0.056

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	13.90	14.00	1.023	99.3	1.007	-0.05	0.013	0.013
27	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	13.90	14.00	1.023	99.3	1.007	-0.11	0.032	0.033
28	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	58	5290	10.15	11.00	1.216	92.24	1.084	0	< 0.001	< 0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	58	5290	10.15	11.00	1.216	92.24	1.084	0	< 0.001	< 0.001
29	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	106	5530	11.77	12.00	1.054	92.24	1.084	0.01	0.011	0.013
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	106	5530	11.77	12.00	1.054	92.24	1.084	-0.01	0.011	0.013

14.4 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II_Main	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	22.43	23.50	1.279	-0.13	0.801	-	1.025
2nd	WCDMA II_Main	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	22.43	23.50	1.279	0.06	0.792	1.01	1.013

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	No
3.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	No

General Note:

- This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
- 2.4GHz WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - $(\max. \text{ power of channel, including tune-up tolerance, mW}) / (\min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Hotspot / Body worn
	Test separation	10 mm
11.5 dBm	Estimated SAR (W/kg)	0.297 W/kg

15.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850_Main	Right Cheek	0.240	0.141	0.155	0.155	0.381	0.550
	Right Tilted	0.116	0.126	0.195	0.182	0.242	0.493
	Left Cheek	0.227	0.058	0.081	0.058	0.285	0.366
	Left Tilted	0.126	0.075	0.113	0.074	0.201	0.313
GSM1900_Main	Right Cheek	0.109	0.141	0.155	0.155	0.250	0.419
	Right Tilted	0.058	0.126	0.195	0.182	0.184	0.435
	Left Cheek	0.075	0.058	0.081	0.058	0.133	0.214
	Left Tilted	0.062	0.075	0.113	0.074	0.137	0.249
WCDMA II_Main	Right Cheek	0.125	0.141	0.155	0.155	0.266	0.435
	Right Tilted	0.060	0.126	0.195	0.182	0.186	0.437
	Left Cheek	0.100	0.058	0.081	0.058	0.158	0.239
	Left Tilted	0.070	0.075	0.113	0.074	0.145	0.257
WCDMA V_Sub	Right Cheek	0.281	0.141	0.155	0.155	0.422	0.591
	Right Tilted	0.217	0.126	0.195	0.182	0.343	0.594
	Left Cheek	0.245	0.058	0.081	0.058	0.303	0.384
	Left Tilted	0.188	0.075	0.113	0.074	0.263	0.375
WCDMA V_Main	Right Cheek	0.134	0.141	0.155	0.155	0.275	0.444
	Right Tilted	0.068	0.126	0.195	0.182	0.194	0.445
	Left Cheek	0.135	0.058	0.081	0.058	0.193	0.274
	Left Tilted	0.063	0.075	0.113	0.074	0.138	0.250
LTE Band 2_Main	Right Cheek	0.133	0.141	0.155	0.155	0.274	0.443
	Right Tilted	0.062	0.126	0.195	0.182	0.188	0.439
	Left Cheek	0.091	0.058	0.081	0.058	0.149	0.230
	Left Tilted	0.051	0.075	0.113	0.074	0.126	0.238
LTE Band 5_Main	Right Cheek	0.168	0.141	0.155	0.155	0.309	0.478
	Right Tilted	0.084	0.126	0.195	0.182	0.210	0.461
	Left Cheek	0.127	0.058	0.081	0.058	0.185	0.266
	Left Tilted	0.065	0.075	0.113	0.074	0.140	0.252
LTE Band 12_Main	Right Cheek	0.062	0.141	0.155	0.155	0.203	0.372
	Right Tilted	0.039	0.126	0.195	0.182	0.165	0.416
	Left Cheek	0.061	0.058	0.081	0.058	0.119	0.200
	Left Tilted	0.039	0.075	0.113	0.074	0.114	0.226

15.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	4	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)		
GSM850_Main	Front	0.274	0.013	0.297	0.287	0.571
	Back	0.273	0.033	0.297	0.306	0.570
	Left side	0.252	0.020	0.297	0.272	0.549
	Right side	0.437			0.437	0.437
	Top side		0.023	0.297	0.023	0.297
	Bottom side	0.129			0.129	0.129
GSM1900_Main	Front	0.287	0.013	0.297	0.300	0.584
	Back	0.200	0.033	0.297	0.233	0.497
	Left side	0.143	0.020	0.297	0.163	0.440
	Right side	0.061			0.061	0.061
	Top side		0.023	0.297	0.023	0.297
	Bottom side	0.597			0.597	0.597
WCDMA II_Main	Front	0.382	0.013	0.297	0.395	0.679
	Back	0.253	0.033	0.297	0.286	0.550
	Left side	0.166	0.020	0.297	0.186	0.463
	Right side	0.086			0.086	0.086
	Top side		0.023	0.297	0.023	0.297
	Bottom side	1.025			1.025	1.025
WCDMA V_Sub	Front	0.048	0.013	0.297	0.061	0.345
	Back	0.048	0.033	0.297	0.081	0.345
	Left side	0.062	0.020	0.297	0.082	0.359
	Right side	0.025			0.025	0.025
	Top side	0.049	0.023	0.297	0.072	0.346
WCDMA V_Main	Front	0.169	0.013	0.297	0.182	0.466
	Back	0.163	0.033	0.297	0.196	0.460
	Left side	0.148	0.020	0.297	0.168	0.445
	Right side	0.247			0.247	0.247
	Top side		0.023	0.297	0.023	0.297
	Bottom side	0.087			0.087	0.087
LTE Band 2_Main	Front	0.425	0.013	0.297	0.438	0.722
	Back	0.256	0.033	0.297	0.289	0.553
	Left side	0.184	0.020	0.297	0.204	0.481
	Right side	0.082			0.082	0.082
	Top side		0.023	0.297	0.023	0.297
	Bottom side	0.984			0.984	0.984
LTE Band 5_Main	Front	0.169	0.013	0.297	0.182	0.466
	Back	0.167	0.033	0.297	0.200	0.464
	Left side	0.150	0.020	0.297	0.170	0.447
	Right side	0.232			0.232	0.232
	Top side		0.023	0.297	0.023	0.297
	Bottom side	0.102			0.102	0.102
LTE Band 12_Main	Front	0.093	0.013	0.297	0.106	0.390
	Back	0.073	0.033	0.297	0.106	0.370
	Left side	0.062	0.020	0.297	0.082	0.359
	Right side	0.115			0.115	0.115
	Top side		0.023	0.297	0.023	0.297
	Bottom side	0.037			0.037	0.037

15.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)		
GSM850_Main	Front	0.274	0.013	0.013	0.297	0.287	0.584
	Back	0.273	0.033	0.013	0.297	0.306	0.583
GSM1900_Main	Front	0.287	0.013	0.013	0.297	0.300	0.597
	Back	0.200	0.033	0.013	0.297	0.233	0.510
WCDMA II_Main	Front	0.382	0.013	0.013	0.297	0.395	0.692
	Back	0.253	0.033	0.013	0.297	0.286	0.563
WCDMA V_Sub	Front	0.048	0.013	0.013	0.297	0.061	0.358
	Back	0.048	0.033	0.013	0.297	0.081	0.358
WCDMA V_Main	Front	0.169	0.013	0.013	0.297	0.182	0.479
	Back	0.163	0.033	0.013	0.297	0.196	0.473
LTE Band 2_Main	Front	0.425	0.013	0.013	0.297	0.438	0.735
	Back	0.256	0.033	0.013	0.297	0.289	0.566
LTE Band 5_Main	Front	0.169	0.013	0.013	0.297	0.182	0.479
	Back	0.167	0.033	0.013	0.297	0.200	0.477
LTE Band 12_Main	Front	0.093	0.013	0.013	0.297	0.106	0.403
	Back	0.073	0.033	0.013	0.297	0.106	0.383

Test Engineer : Ginger Chiang, Tommy Chen, Charles Shen, Ray Sun, York Lu, White Huang, Jordar Jhuang and Jeff Tsao

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.