

FCC Test Report

Applicant : Shenzhen Doke Communication Co.,Ltd

Address : 1301-1302,13th Floor, Block B, WeiDongLong
Business Building, Meilong Road 2113,
Longhua District, ShenZhen, China

Product Name : Portable Power Station

Report Date : Nov. 25, 2024

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	7
1.4. Description of Test Modes	7
1.5. Test Equipment List	7
1.6. Measurement Uncertainty	7
1.7. Description of Test Facility	8
1.8. Disclaimer	8
2. Measurement and Result	9
2.1. Requirements	9
2.2. Test Setup	10
2.3. Test Procedure	11
2.4. Test Result	11
APPENDIX I -- TEST SETUP PHOTOGRAPH	13
APPENDIX II -- EXTERNAL PHOTOGRAPH	13
APPENDIX III -- INTERNAL PHOTOGRAPH	13



TEST REPORT

Applicant : Shenzhen Doke Communication Co.,Ltd
Manufacturer : Shenzhen Doke Communication Co.,Ltd
Product Name : Portable Power Station
Model No. : PowerMax 2400, PowerMax 2400 Pro, PowerMax 2400 Plus, PM 2400, BP2400Pro
Trade Mark : OSCAL, Blackview
Rating(s) : Please refer to page 6

Test Standard(s) : FCC Part 1.1310, 1.1307(b)
Test Method(s) : KDB 680106 D01 Wireless Power Transfer v04

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & KDB680106 D01 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt Aug. 30, 2024

Date of Test Sept. 02, 2024 to Nov. 14, 2024

Prepared By

Nian xiu Chen

(Nianxiu Chen)

Approved & Authorized Signer

KingKong Jin

(KingKong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Nov. 25, 2024



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Doke Communication Co.,Ltd
Address	:	1301-1302,13th Floor, Block B, WeiDongLong Business Building, Meilong Road 2113, Longhua District, ShenZhen, China
Manufacturer	:	Shenzhen Doke Communication Co.,Ltd
Address	:	1301-1302,13th Floor, Block B, WeiDongLong Business Building, Meilong Road 2113, Longhua District, ShenZhen, China
Factory	:	Shenzhen Everplus Technology Co., Ltd
Address	:	AC501 of NCBC Industrial Zone, No.3 Baolong Road 6, Baolong Community, Baolong Street, Longgang District, Shenzhen City, China

1.2. Description of Device (EUT)

Product Name	:	Portable Power Station
Model No.	:	PowerMax 2400, PowerMax 2400 Pro, PowerMax 2400 Plus, PM 2400, BP2400Pro (Note: All samples are the same except the model name, so we prepare "PowerMax 2400" for test only.)
Trade Mark	:	OSCAL, Blackview
Test Power Supply	:	DC 41.6V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	111-205kHz
Modulation Type	:	FSK
Antenna Type	:	Inductive loop coil Antenna
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



Rating(s):

OSCAL










Portable Power Station

Model: PowerMax 2400

Total Output Power: 2400W
AC Output*4: 120V~50Hz/60Hz,Total 2400W
Wireless Output*2: 15W Max
USB-A Output*1: 5V~2.4A,12W
USB-A QC3.0 Output*3: 5V~3A,9V~2A,12V~1.5A,Total 54W
Type-C PD3.0 Output*2: 5/9/12/15V~3A,20V~5A,Total 200W
DC5521 Output*2: 12V~6A Max,Total 72W
Car Charge Output: 12V/24V~10A Max,240W Max
Anderson Output interface: 12V/24V~10A Max,240W Max
Battery Capacity: 41.6V~45Ah,1872Wh
AC Input: 100-120V~15A Max 50Hz/60Hz
DC7909 Input: 10-60V~10A Max,300W Max
Solar Input: 10-60V~20A Max,800W Max
Working Temperature: -10°C~45°C
Charging Temperature Of Cells: 0°C~45°C
FCC ID: 2A98M-POWERMAX2400
Made in China
Shenzhen Dake Communication Co., Ltd

Warnings
1. Please keep the Portable Power Station and accessories dry and away from fire.
2. Do not disassemble or collide the product, or operate the product port to its instructions.
3. Do not get caught in the rain or water. If it happens, stop using the product immediately.
4. Please recycle and dispose the product subject to local laws and regulations.
5. Children and special group of people may use the product under the supervision of guardian.
6. Do not cover or block the radiator when using the product.

S/N





1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Wireless load*2	BAECOAR	15W Smart wireless charger fixture wireless charging Power: 5W/7.5W/10W/15W	/

1.4. Description of Test Modes

Pretest Modes	Descriptions
TM1	WPT1+WPT2 Mode (15W+15W Load)
TM2	WPT1+WPT2 Mode (10W+10W Load)
TM3	WPT1+WPT2 Mode (7.5W+7.5W Load)
TM4	WPT1+WPT2 Mode (5W+5W Load)
TM5	WPT1 Mode (15W Load)
TM6	WPT1 Mode (10W Load)
TM7	WPT1 Mode (7.5W Load)
TM8	WPT1 Mode (5W Load)
TM9	WPT2 Mode (15WLoad)
TM10	WPT2 Mode (10W Load)
TM11	WPT2 Mode (7.5W Load)
TM12	WPT2 Mode (5W Load)
TM13	Standby Mode

Note: All test modes were pre-tested, only the data of the worst case record in this report.

1.5. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Electric and Magnetic field Analyzer	NARDA	EHP-200A	180ZX10202	Oct. 15, 2024	1 Year

1.6. Measurement Uncertainty

Magnetic Field Reading(A/m)	:	+/-0.04282(A/m)
Electric Field Reading(V/m)	:	+/-0.03679(V/m)
<p>The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.</p>		



1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China

1.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Measurement and Result

2.1. Requirements

According to the item 5.2 Part 18 Wireless Power Transfer up to One-Meter Distance of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) The power transfer frequency is below 1 MHz.
- (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
- (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
- (4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).
- (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
- (6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.




Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

2.2. Test Setup

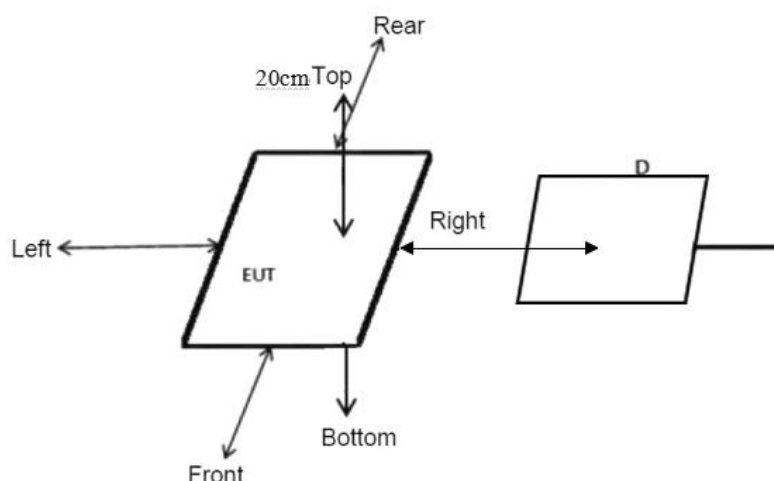

Note: Measurements should be made at 20 cm surrounding the EUT and 20cm above the top surface of the EUT.



2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points
(A, B, C, D, E) were completed.(A is the right, B is the back, C is the left, D is the front, and E is the top.)
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

Remark; The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

2.4. Test Result

2.4.1. Equipment Approval Considerations item 5.2 Part 18 Wireless Power Transfer up to One-Meter Distance of KDB 680106 D01 v04.

- (1) The power transfer frequency is below 1 MHz.
 - The device operate in the frequency range 111-205kHz.
- (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
 - The maximum output power of the primary coil is 15W.
- (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
 - The surfaces of the transmitter and client device enclosures is in physical contact.
- (4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).
 - The EUT is a Mobile exposure conditions
- (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
 - Conducted the measurement with the required distance and the test results please refer to the section 2.4.



(6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.

-The EUT is a two-coil radiation structure. It conditions specified in (5) be meets when the system is fully loaded.

2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	23.1 °C	Humidity:	47 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

E-Field Strength at 20 cm surrounding the EUT and 20cm above the top surface of the EUT

Test Mode	Frequency Range (kHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
TM1	111-205	0.287	0.377	0.327	0.337	0.457	307	614
TM5	111-205	1.458	1.898	1.388	1.518	1.688	307	614
TM9	111-205	2.393	2.793	2.403	2.353	2.813	307	614
TM13	111-205	0.456	0.606	0.446	0.436	0.576	307	614

H-Field Strength at 20 cm surrounding the EUT and 20cm above the top surface of the EUT

Test Mode	Frequency Range (kHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
TM1	111-205	0.033	0.055	0.061	0.045	0.055	0.815	1.63
TM5	111-205	0.330	0.420	0.320	0.320	0.490	0.815	1.63
TM9	111-205	0.534	0.714	0.604	0.424	0.414	0.815	1.63
TM13	111-205	0.485	0.305	0.405	0.525	0.385	0.815	1.63

Note: All test modes were pre-tested, only the data of the worst case record in this report.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_MPE

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

