

TEST REPORT

Product : Portable PC
Trade mark : CHUWI
Model/Type reference : GemiBook
Serial Number : N/A
Report Number : EED32M00298801
FCC ID : 2AHLZ-GEMIBOOK
Date of Issue: : Nov. 09, 2020
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED
2 Floor Building 3 LiJinCheng Industrial park
the east of Gongye road LongHua, Shenzhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Sunlight Sun

Reviewed by:

Jok Yang

Jok Yang

Approved by:

Aaron Ma

Aaron Ma

Date:

Nov. 09, 2020



Check No: 4762111346

2 Version

Version No.	Date	Description
00	Nov. 09, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, $k=2$)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): 20dB Occupied Bandwidth	16
Appendix B): Carrier Frequency Separation	21
Appendix C): Dwell Time	26
Appendix D): Hopping Channel Number	31
Appendix E): Conducted Peak Output Power	34
Appendix F): Band-edge for RF Conducted Emissions	39
Appendix G): RF Conducted Spurious Emissions	45
Appendix H) Pseudorandom Frequency Hopping Sequence	56
Appendix I) Antenna Requirement	57
Appendix J) AC Power Line Conducted Emission	58
Appendix K) Restricted bands around fundamental frequency (Radiated)	61
Appendix L) Radiated Spurious Emissions	78
PHOTOGRAPHS OF TEST SETUP	83
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	86

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

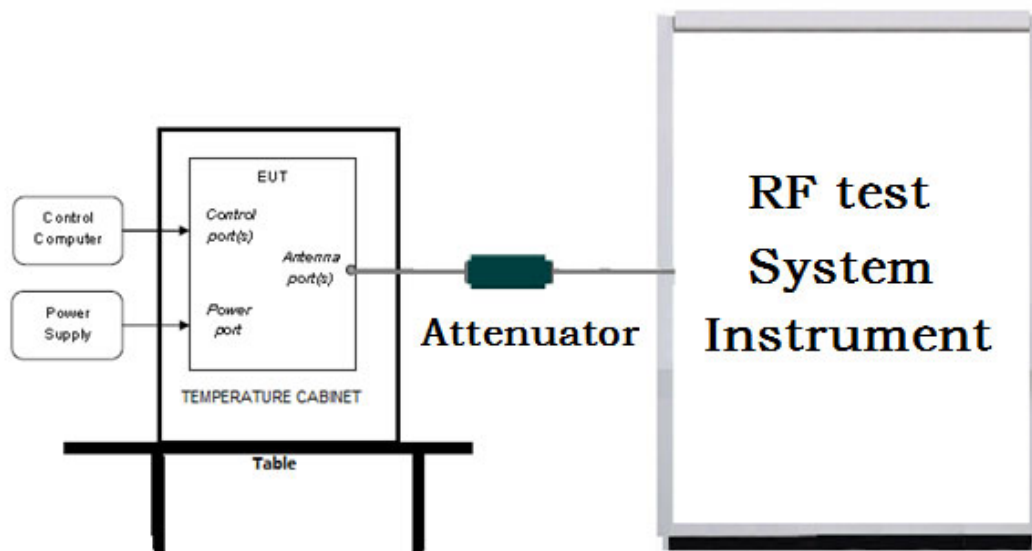

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

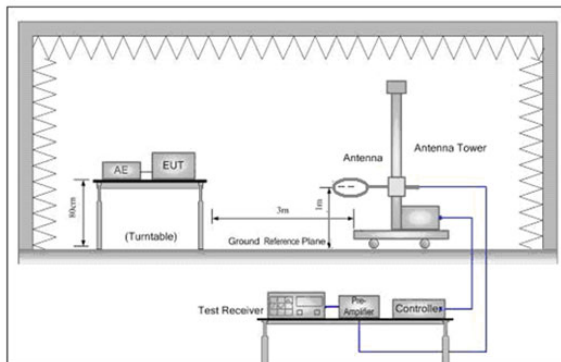


Figure 1. Below 30MHz

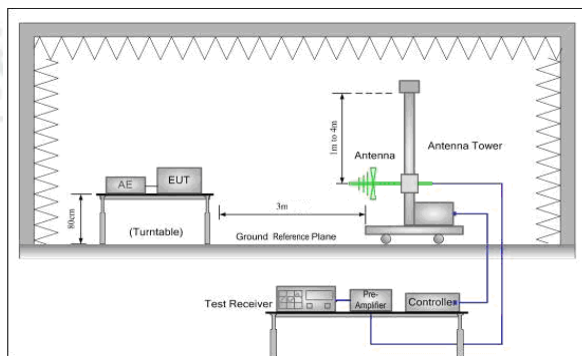


Figure 2. 30MHz to 1GHz


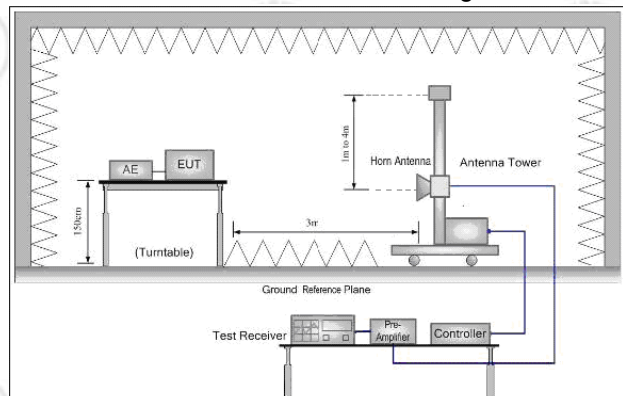


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

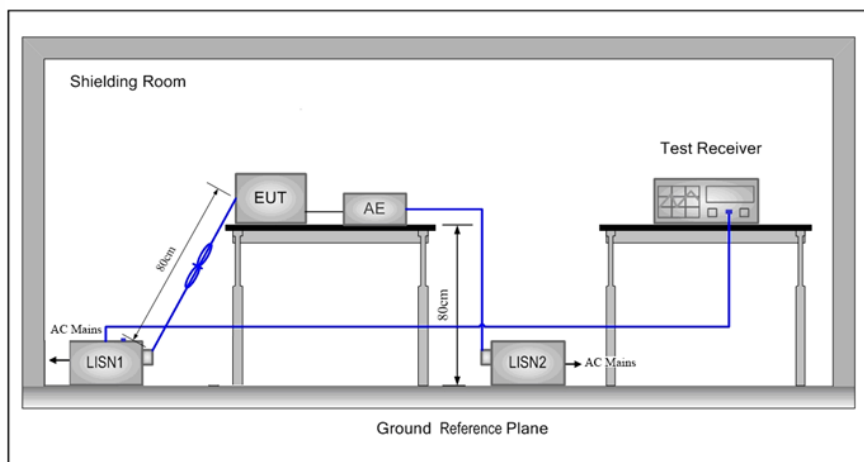

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 0	Channel 39	Channel 78
		2402MHz	2441MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED
Address of Applicant:	2 Floor Building 3 LiJinCheng Industrial park the east of Gongye road LongHua, Shenzhen, China
Manufacturer:	CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED
Address of Manufacturer:	2 Floor Building 3 LiJinCheng Industrial park the east of Gongye road LongHua, Shenzhen, China
Factory:	JIANGSU LUCKYSTAR INTELLIGENT & TECHNOLOGY CO., LTD
Address of Factory:	Intelligent Terminal Pioneer Park (D) ,Yanlong Street Office, Yandu District, Yancheng City, Jiangsu Province

6.2 General Description of EUT

Product Name:	Portable PC	
Model No.(EUT):	GemiBook	
Tark mark:	CHUWI	
Frequency Range of Operation:	2400MHz to 2483.5MHz	
Power Supply:	Adapter	Model:A241-1202000D Input:100-240V~ 50/60Hz 0.8A Output:12.0V---2.0A 24.0W
	Battery	Model:5059B4-2S-1 2ICP5/59/115 Norminal Voltage:7.6Vd.c. Rated Capacity:5000mAh 38Wh
Sample Received Date:	Sep. 21, 2020	
Sample tested Date:	Sep. 21, 2020 to Oct.22, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Power Grade:	Default
Test Software of EUT:	DRTU
Antenna Type:	FPC antenna
Antenna Gain:	1.15 dBi
Test Voltage:	Battery 7.6V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019 10-16-2020	10-20-2020 10-15-2021
Multi device Controller	maturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification


Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Duty Cycle

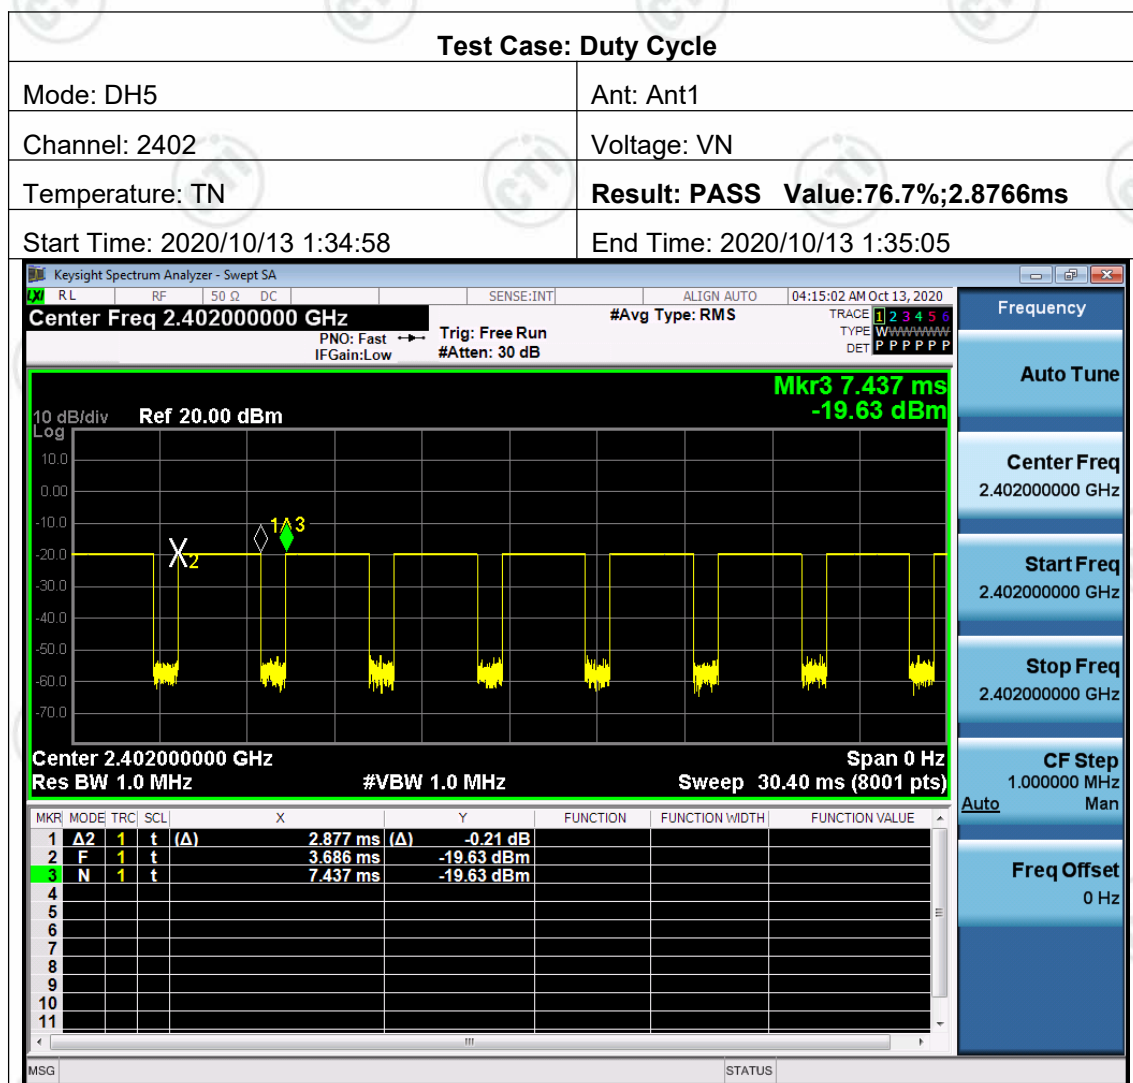

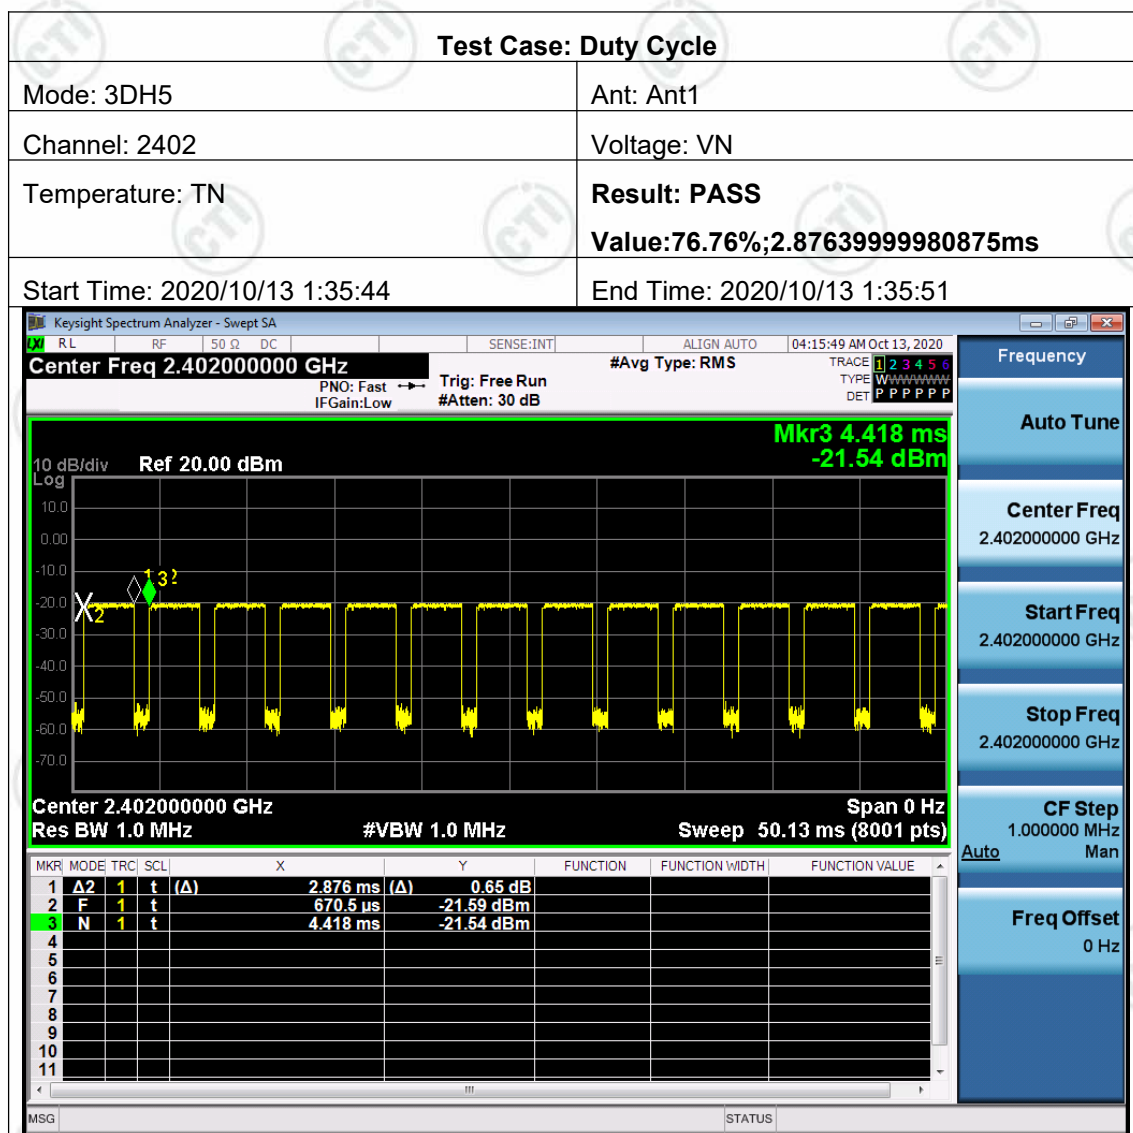

Appendix A): 20dB Occupied Bandwidth

Test Limit

According to §15.247(a) (1),

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.
- 6.

Test Setup









Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	1.019	0.87218	PASS
GFSK	MCH	0.9604	0.86354	PASS
GFSK	HCH	0.9618	0.86266	PASS
$\pi/4$ DQPSK	LCH	1.442	1.3522	PASS
$\pi/4$ DQPSK	MCH	1.485	1.3495	PASS
$\pi/4$ DQPSK	HCH	1.485	1.3470	PASS
8DPSK	LCH	1.484	1.3476	PASS
8DPSK	MCH	1.488	1.3536	PASS
8DPSK	HCH	1.485	1.3515	PASS

Test Graph

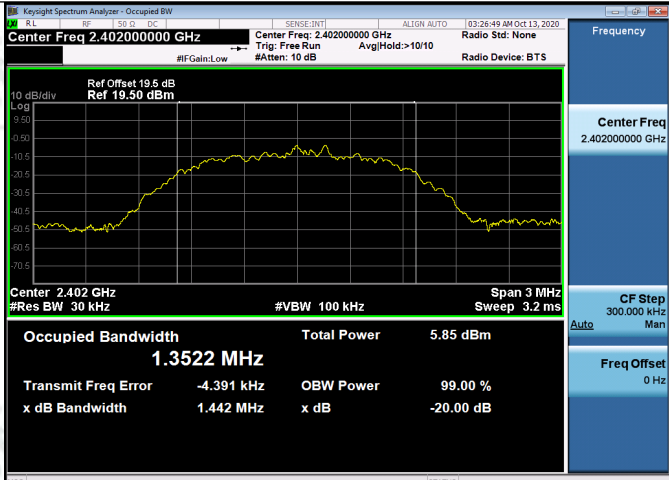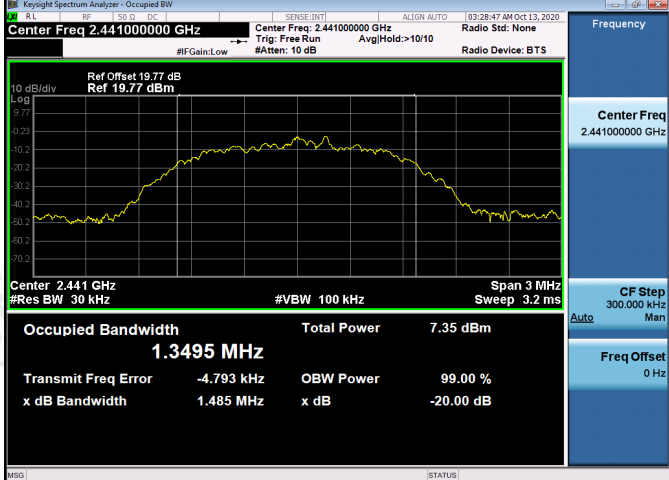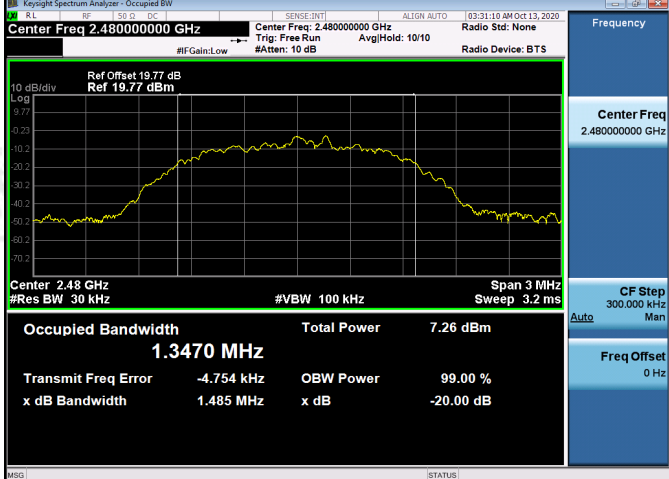

π/4DQPSK/LCH	
π/4DQPSK/MCH	
π/4DQPSK/HCH	

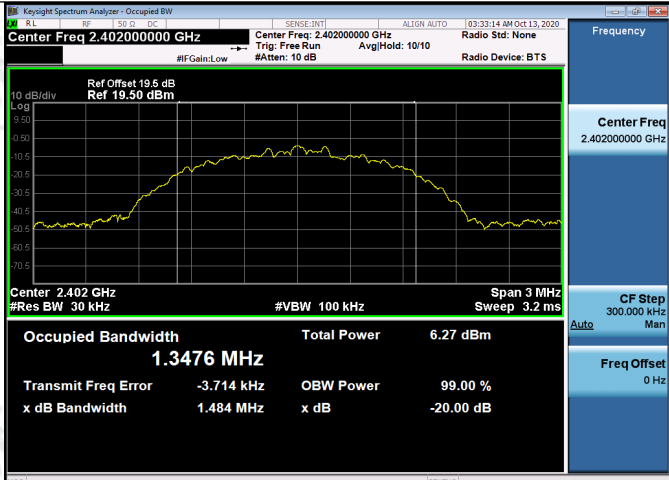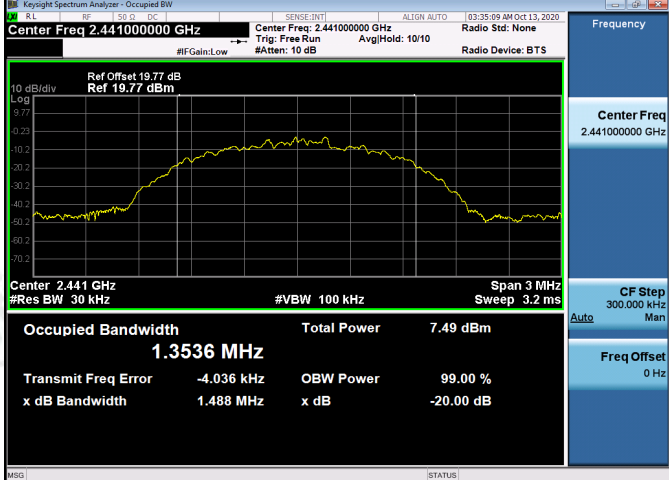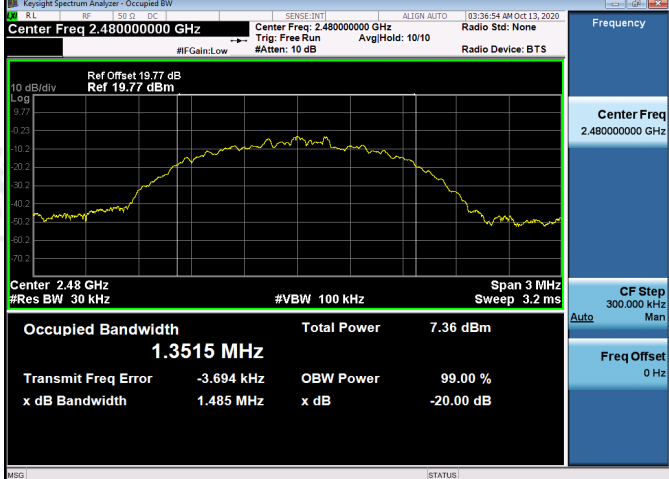8DPSK/LCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.3476 MHz Total Power: 6.27 dBm Transmit Freq Error: -3.714 kHz OBW Power: 99.00 % x dB Bandwidth: 1.484 MHz x dB: -20.00 dB
8DPSK/MCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.3536 MHz Total Power: 7.49 dBm Transmit Freq Error: -4.036 kHz OBW Power: 99.00 % x dB Bandwidth: 1.488 MHz x dB: -20.00 dB
8DPSK/HCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.3515 MHz Total Power: 7.36 dBm Transmit Freq Error: -3.694 kHz OBW Power: 99.00 % x dB Bandwidth: 1.485 MHz x dB: -20.00 dB

Appendix B): Carrier Frequency Separation

Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

Test Setup









Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.000	PASS
GFSK	MCH	0.992	PASS
GFSK	HCH	1.046	PASS
$\pi/4$ DQPSK	LCH	1.146	PASS
$\pi/4$ DQPSK	MCH	1.174	PASS
$\pi/4$ DQPSK	HCH	1.008	PASS
8DPSK	LCH	1.138	PASS
8DPSK	MCH	1.134	PASS
8DPSK	HCH	1.112	PASS

Test Graph

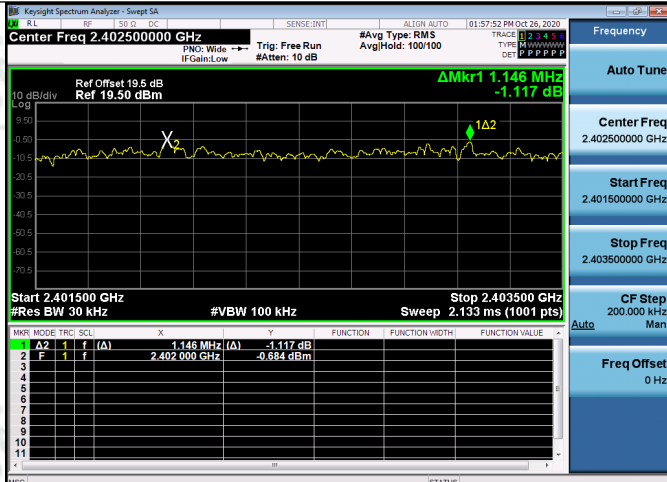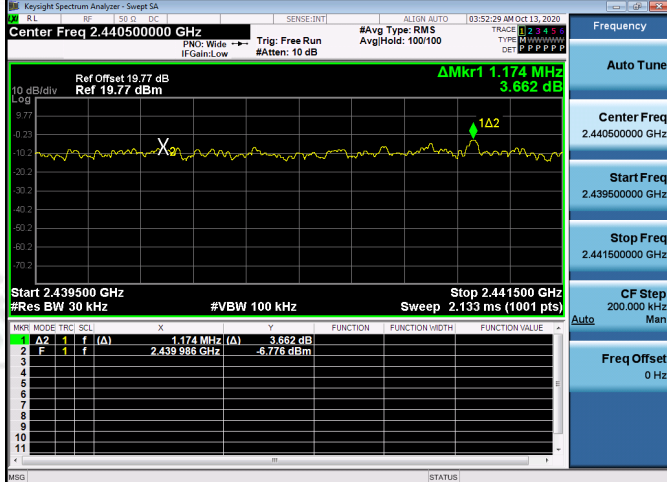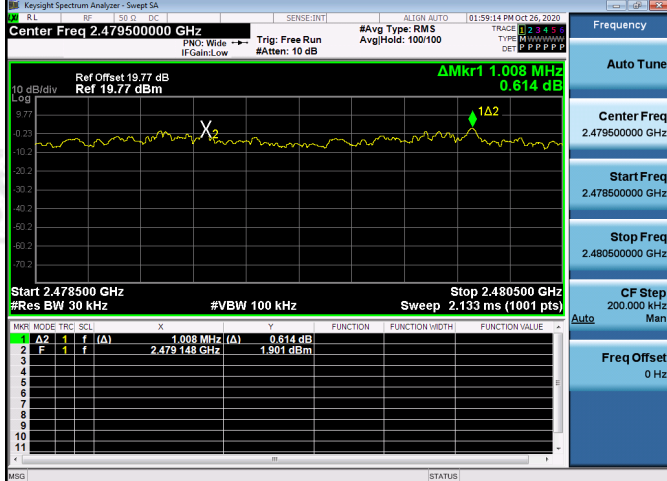

$\pi/4$ DQPSK/LCH	 <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.146 MHz</td><td>(Δ)</td><td>-1.117 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 000 GHz</td><td></td><td>-9.694 dBm</td><td></td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.146 MHz	(Δ)	-1.117 dB		2	F	1	f		2.402 000 GHz		-9.694 dBm	
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.146 MHz	(Δ)	-1.117 dB																					
2	F	1	f		2.402 000 GHz		-9.694 dBm																					
$\pi/4$ DQPSK/MCH	 <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.174 MHz</td><td>(Δ)</td><td>3.662 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.440 000 GHz</td><td></td><td>-6.776 dBm</td><td></td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.174 MHz	(Δ)	3.662 dB		2	F	1	f		2.440 000 GHz		-6.776 dBm	
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.174 MHz	(Δ)	3.662 dB																					
2	F	1	f		2.440 000 GHz		-6.776 dBm																					
$\pi/4$ DQPSK/HCH	 <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.008 MHz</td><td>(Δ)</td><td>0.614 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.479 148 GHz</td><td></td><td>1.901 dBm</td><td></td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.008 MHz	(Δ)	0.614 dB		2	F	1	f		2.479 148 GHz		1.901 dBm	
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.008 MHz	(Δ)	0.614 dB																					
2	F	1	f		2.479 148 GHz		1.901 dBm																					

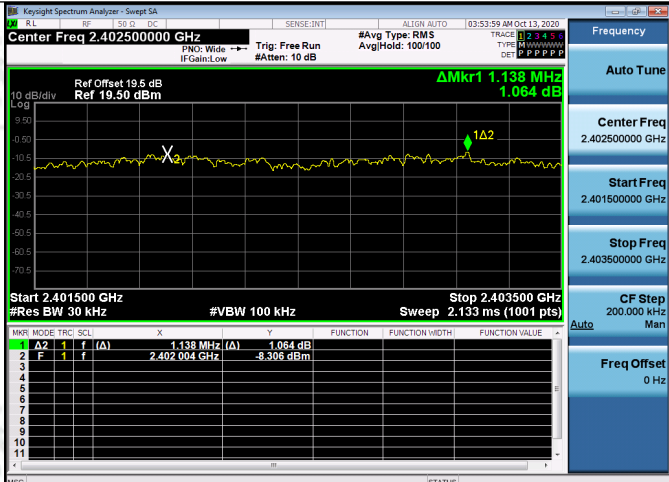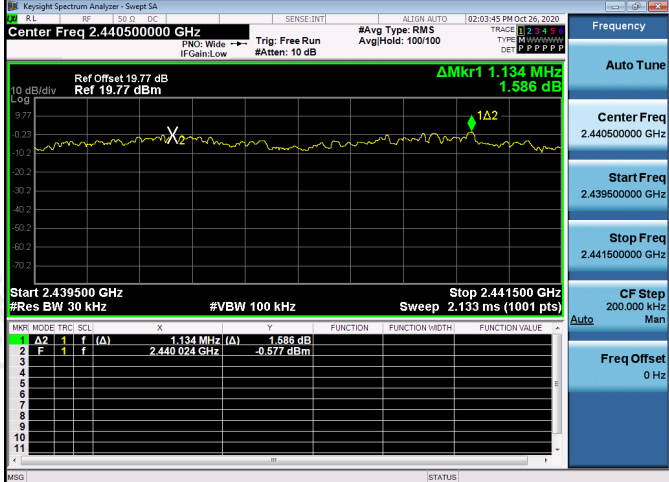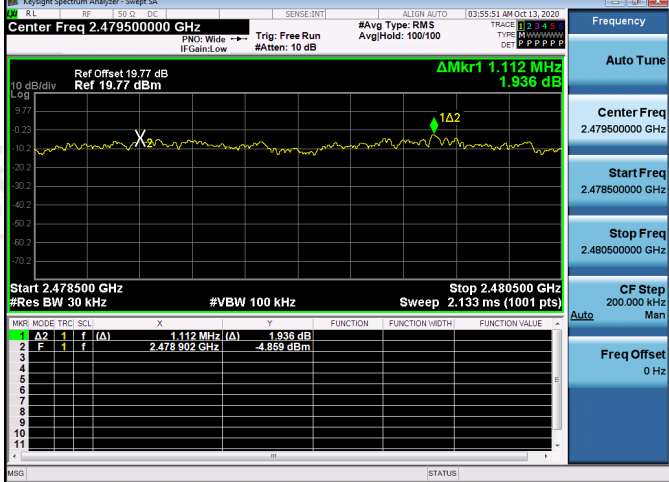8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	

Appendix C): Dwell Time

Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep = auto


Test Setup

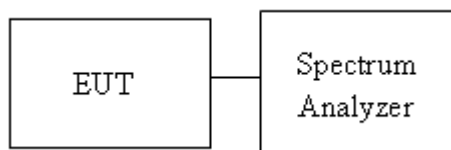


Result Table

Mode	Packet	Chann	Burst Width	Total	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.38	320	0.122	0.30	PASS
GFSK	DH1	MCH	0.378733	320	0.121	0.30	PASS
GFSK	DH1	HCH	0.378737	320	0.121	0.30	PASS
GFSK	DH3	LCH	1.635263	160	0.262	0.65	PASS
GFSK	DH3	MCH	1.63527	160	0.262	0.65	PASS
GFSK	DH3	HCH	1.634	160	0.261	0.65	PASS
GFSK	DH5	LCH	2.88294	106.7	0.308	0.77	PASS
GFSK	DH5	MCH	2.88293	106.7	0.308	0.77	PASS
GFSK	DH5	HCH	2.88293	106.7	0.308	0.77	PASS

Test Graph

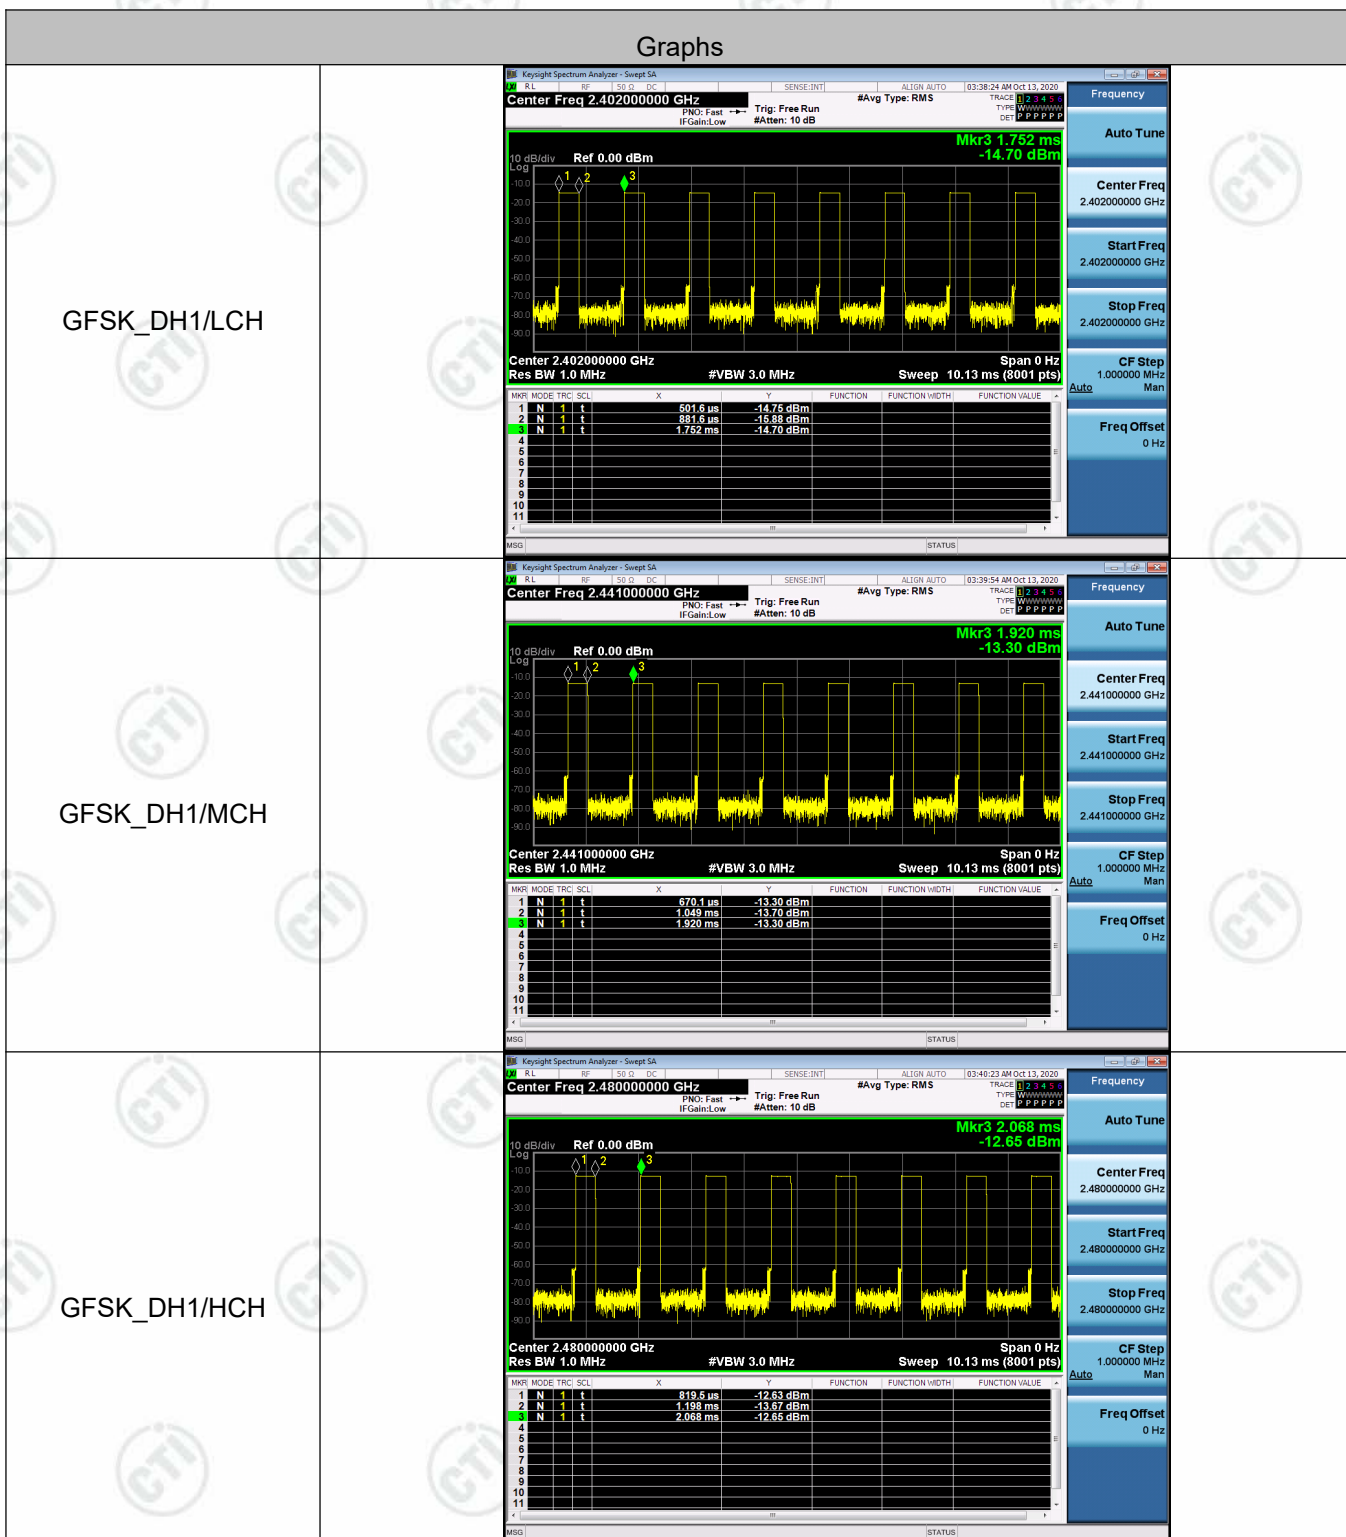

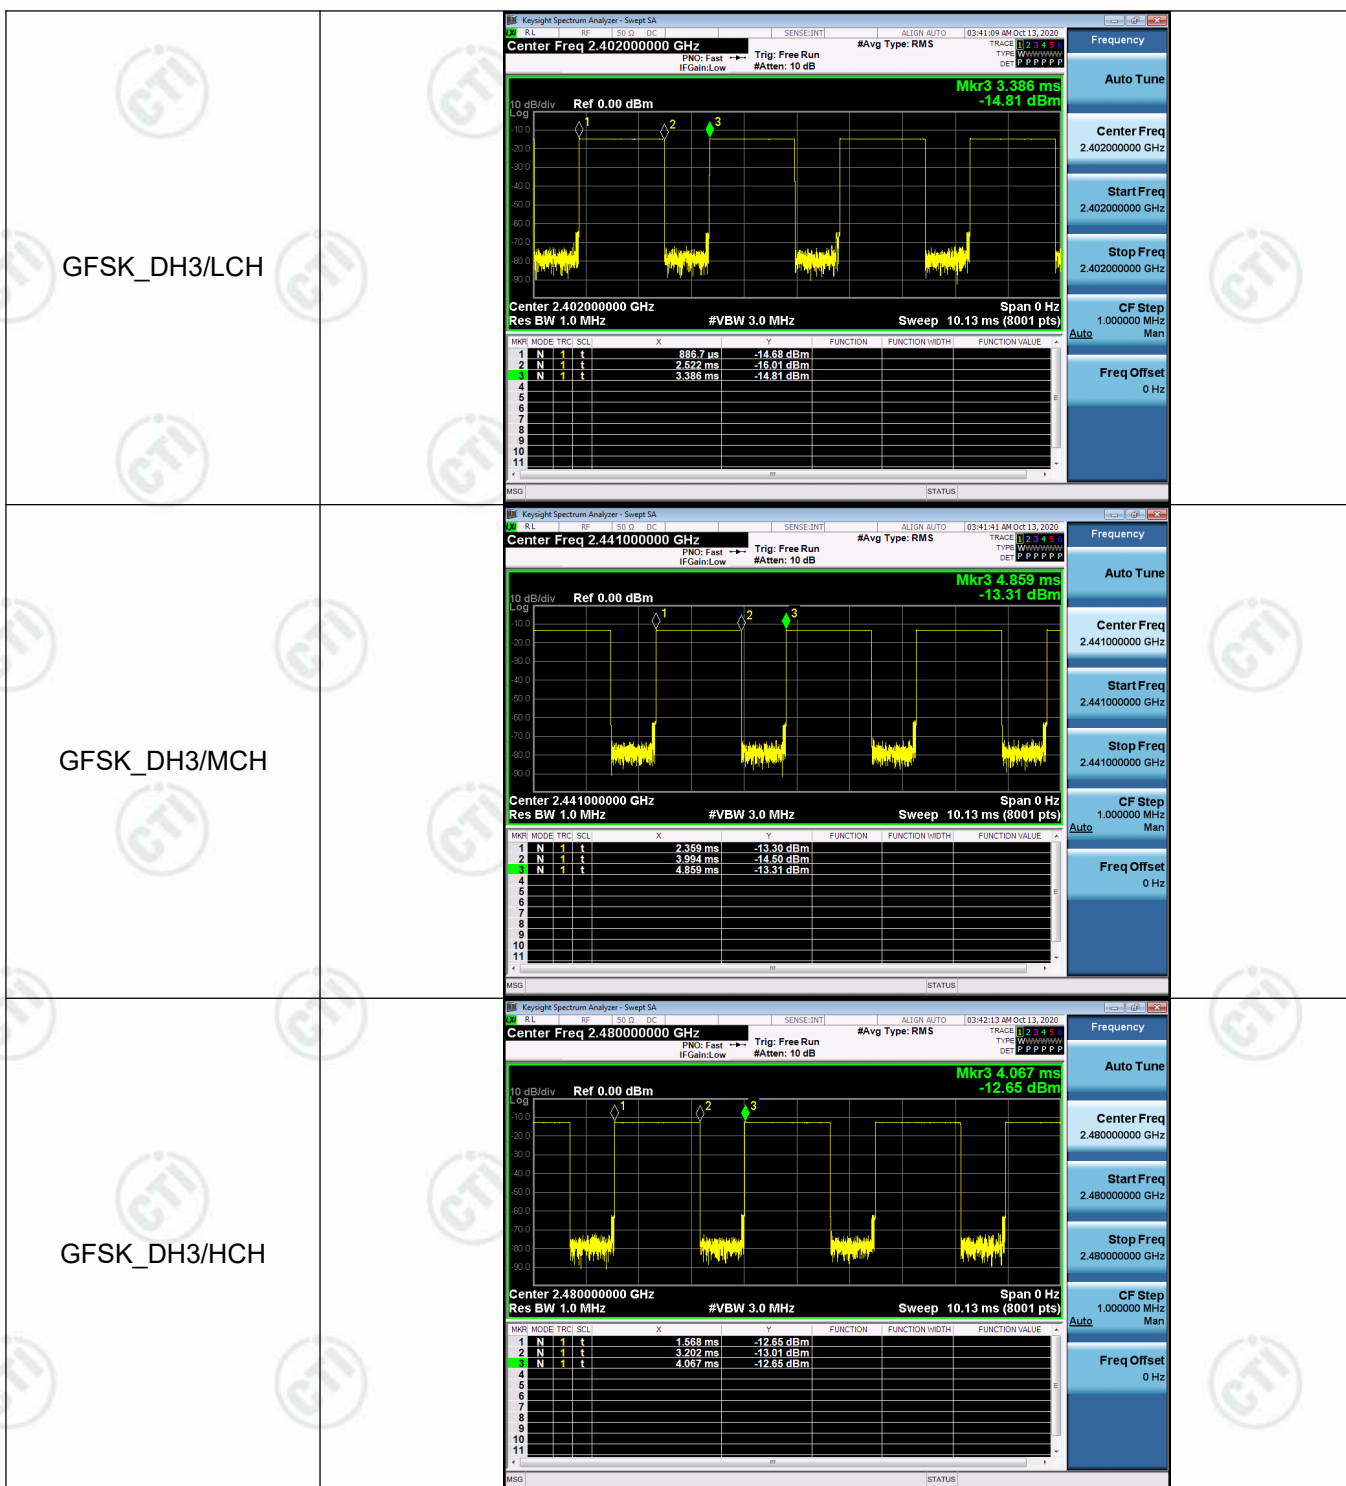

GFSK_DH5/LCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 5.839 ms -18.07 dBm Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) MRK MODE TRIG SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE <table><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.089 ms</td><td>-18.05 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.972 ms</td><td>-18.59 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>5.839 ms</td><td>-18.07 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	1	N	1	t	2.089 ms	-18.05 dBm				2	N	1	t	4.972 ms	-18.59 dBm				3	N	1	t	5.839 ms	-18.07 dBm				4									5									6									7									8									9									10									11								
1	N	1	t	2.089 ms	-18.05 dBm																																																																																															
2	N	1	t	4.972 ms	-18.59 dBm																																																																																															
3	N	1	t	5.839 ms	-18.07 dBm																																																																																															
4																																																																																																				
5																																																																																																				
6																																																																																																				
7																																																																																																				
8																																																																																																				
9																																																																																																				
10																																																																																																				
11																																																																																																				
GFSK_DH5/MCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref 0.00 dBm Mkr3 6.502 ms -18.70 dBm Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) MRK MODE TRIG SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE <table><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.752 ms</td><td>-18.53 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>5.635 ms</td><td>-19.31 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>6.502 ms</td><td>-18.70 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	1	N	1	t	2.752 ms	-18.53 dBm				2	N	1	t	5.635 ms	-19.31 dBm				3	N	1	t	6.502 ms	-18.70 dBm				4									5									6									7									8									9									10									11								
1	N	1	t	2.752 ms	-18.53 dBm																																																																																															
2	N	1	t	5.635 ms	-19.31 dBm																																																																																															
3	N	1	t	6.502 ms	-18.70 dBm																																																																																															
4																																																																																																				
5																																																																																																				
6																																																																																																				
7																																																																																																				
8																																																																																																				
9																																																																																																				
10																																																																																																				
11																																																																																																				
GFSK_DH5/HCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref 0.00 dBm Mkr3 3.962 ms -18.80 dBm Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) MRK MODE TRIG SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE <table><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>212.8 ms</td><td>-18.74 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.096 ms</td><td>-20.14 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.962 ms</td><td>-18.80 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	1	N	1	t	212.8 ms	-18.74 dBm				2	N	1	t	3.096 ms	-20.14 dBm				3	N	1	t	3.962 ms	-18.80 dBm				4									5									6									7									8									9									10									11								
1	N	1	t	212.8 ms	-18.74 dBm																																																																																															
2	N	1	t	3.096 ms	-20.14 dBm																																																																																															
3	N	1	t	3.962 ms	-18.80 dBm																																																																																															
4																																																																																																				
5																																																																																																				
6																																																																																																				
7																																																																																																				
8																																																																																																				
9																																																																																																				
10																																																																																																				
11																																																																																																				

Appendix D): Hopping Channel Number Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz,
RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


Test Setup



Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

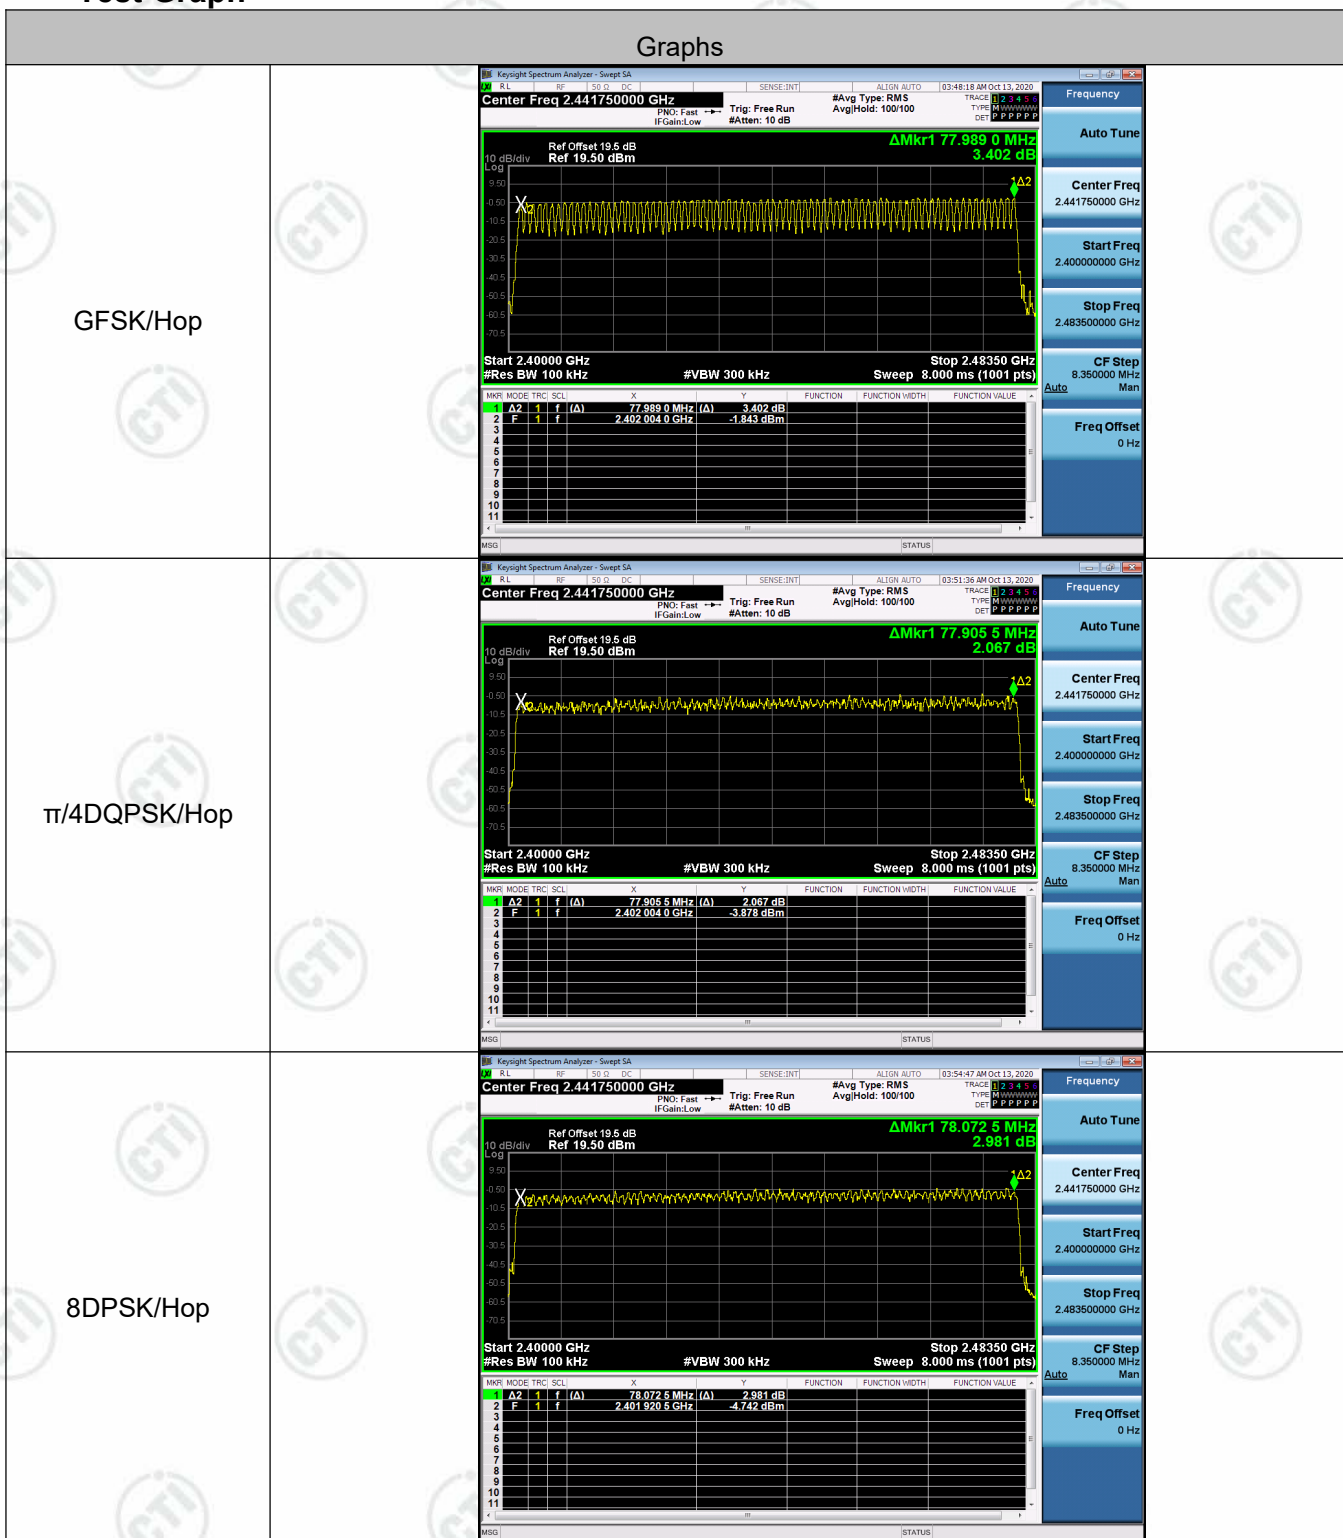

Appendix E): Conducted Peak Output Power Test Limit

According to §15.247(b)(1).

Peak output power :

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	☒ Antenna not exceed 6 dBi : 21dBm ☐ Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.


Test Setup


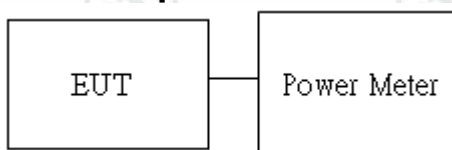



Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	1.543	PASS
GFSK	MCH	1.294	PASS
GFSK	HCH	1.168	PASS
$\pi/4$ DQPSK	LCH	0.229	PASS
$\pi/4$ DQPSK	MCH	1.588	PASS
$\pi/4$ DQPSK	HCH	1.433	PASS
8DPSK	LCH	0.459	PASS
8DPSK	MCH	1.829	PASS
8DPSK	HCH	1.662	PASS

Test Graph

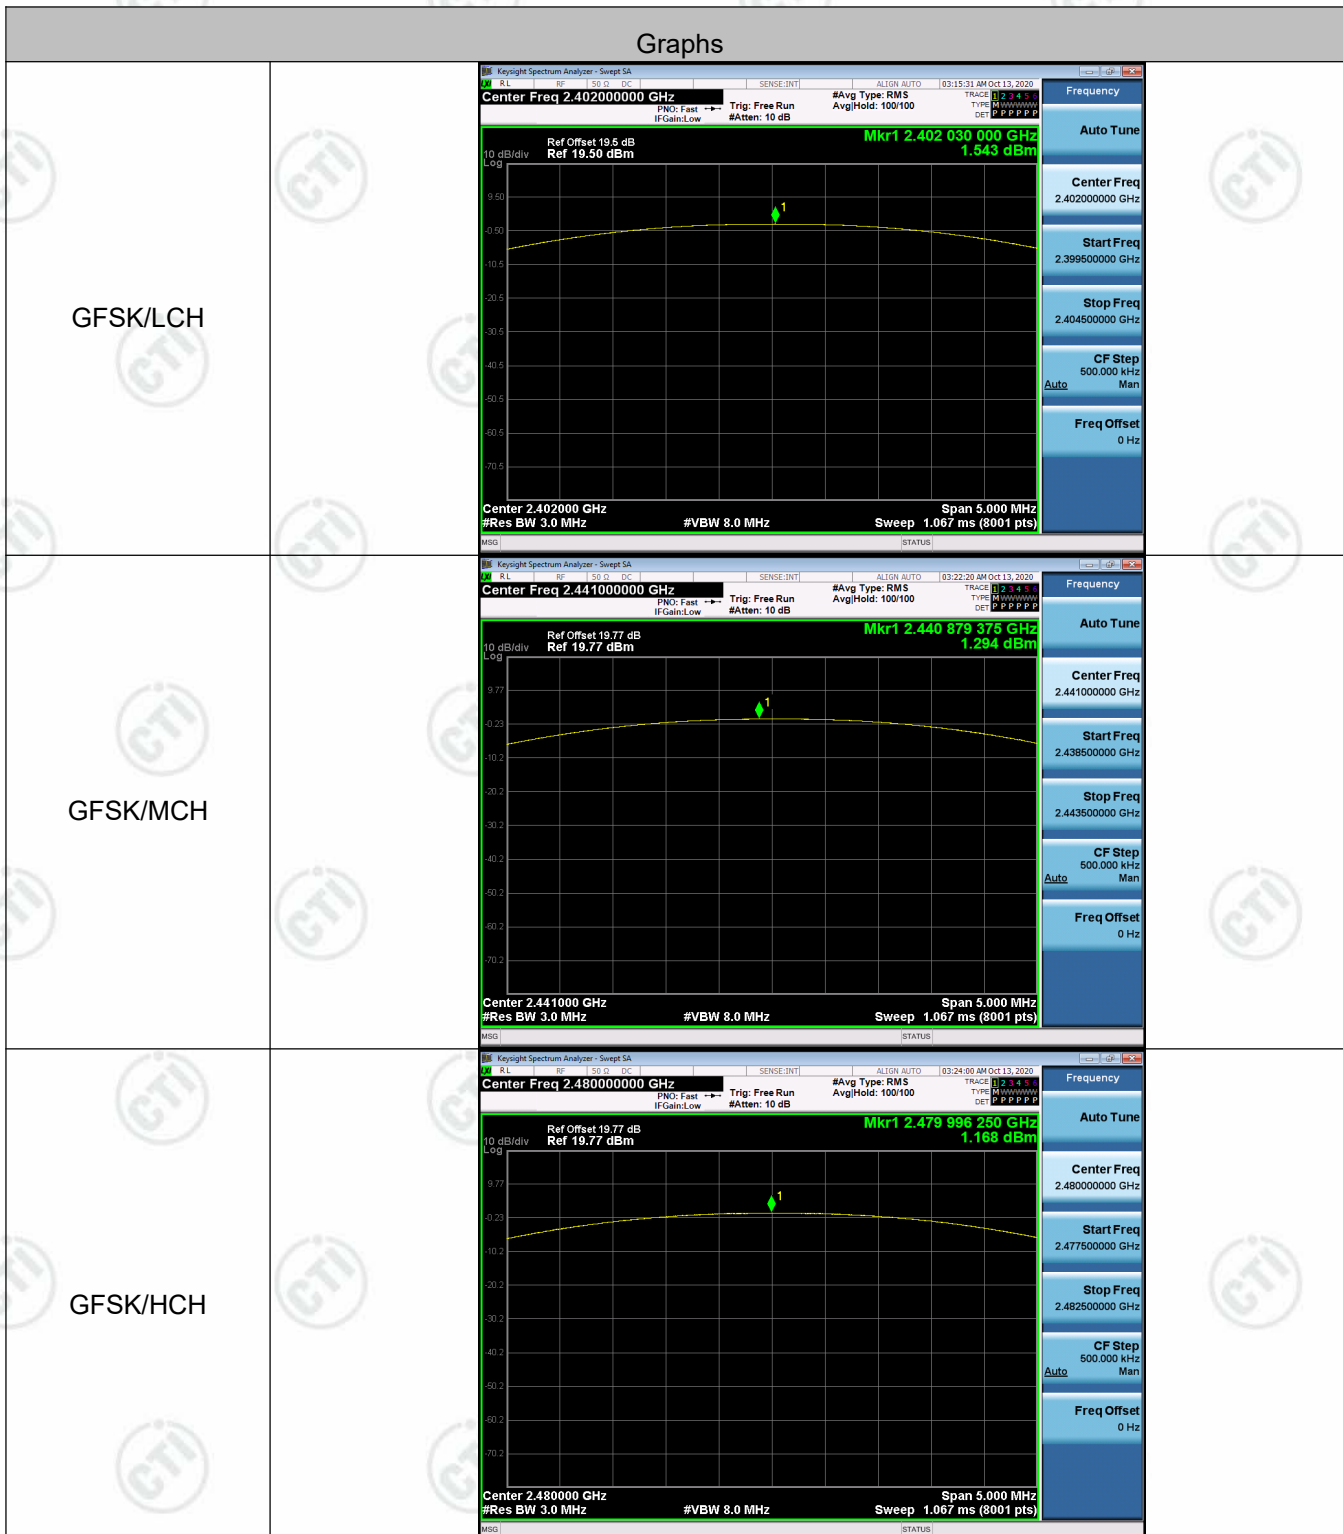

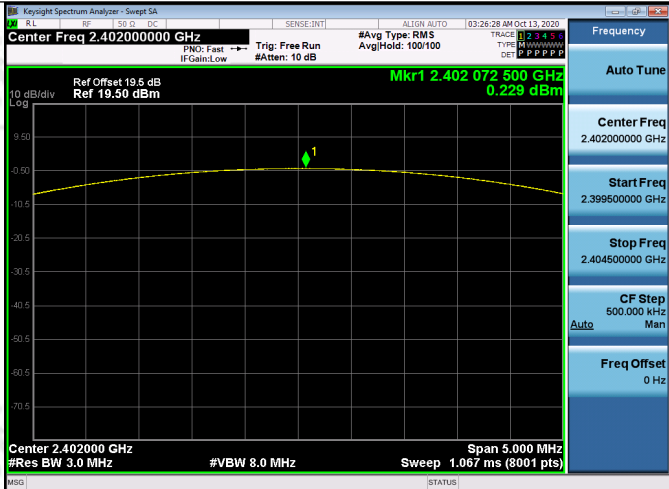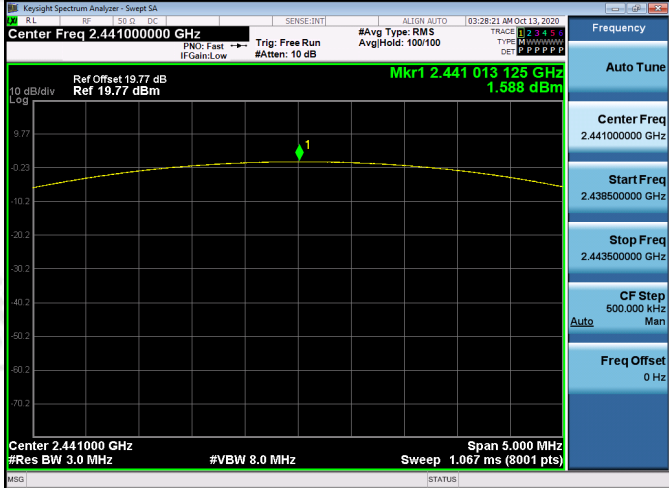$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

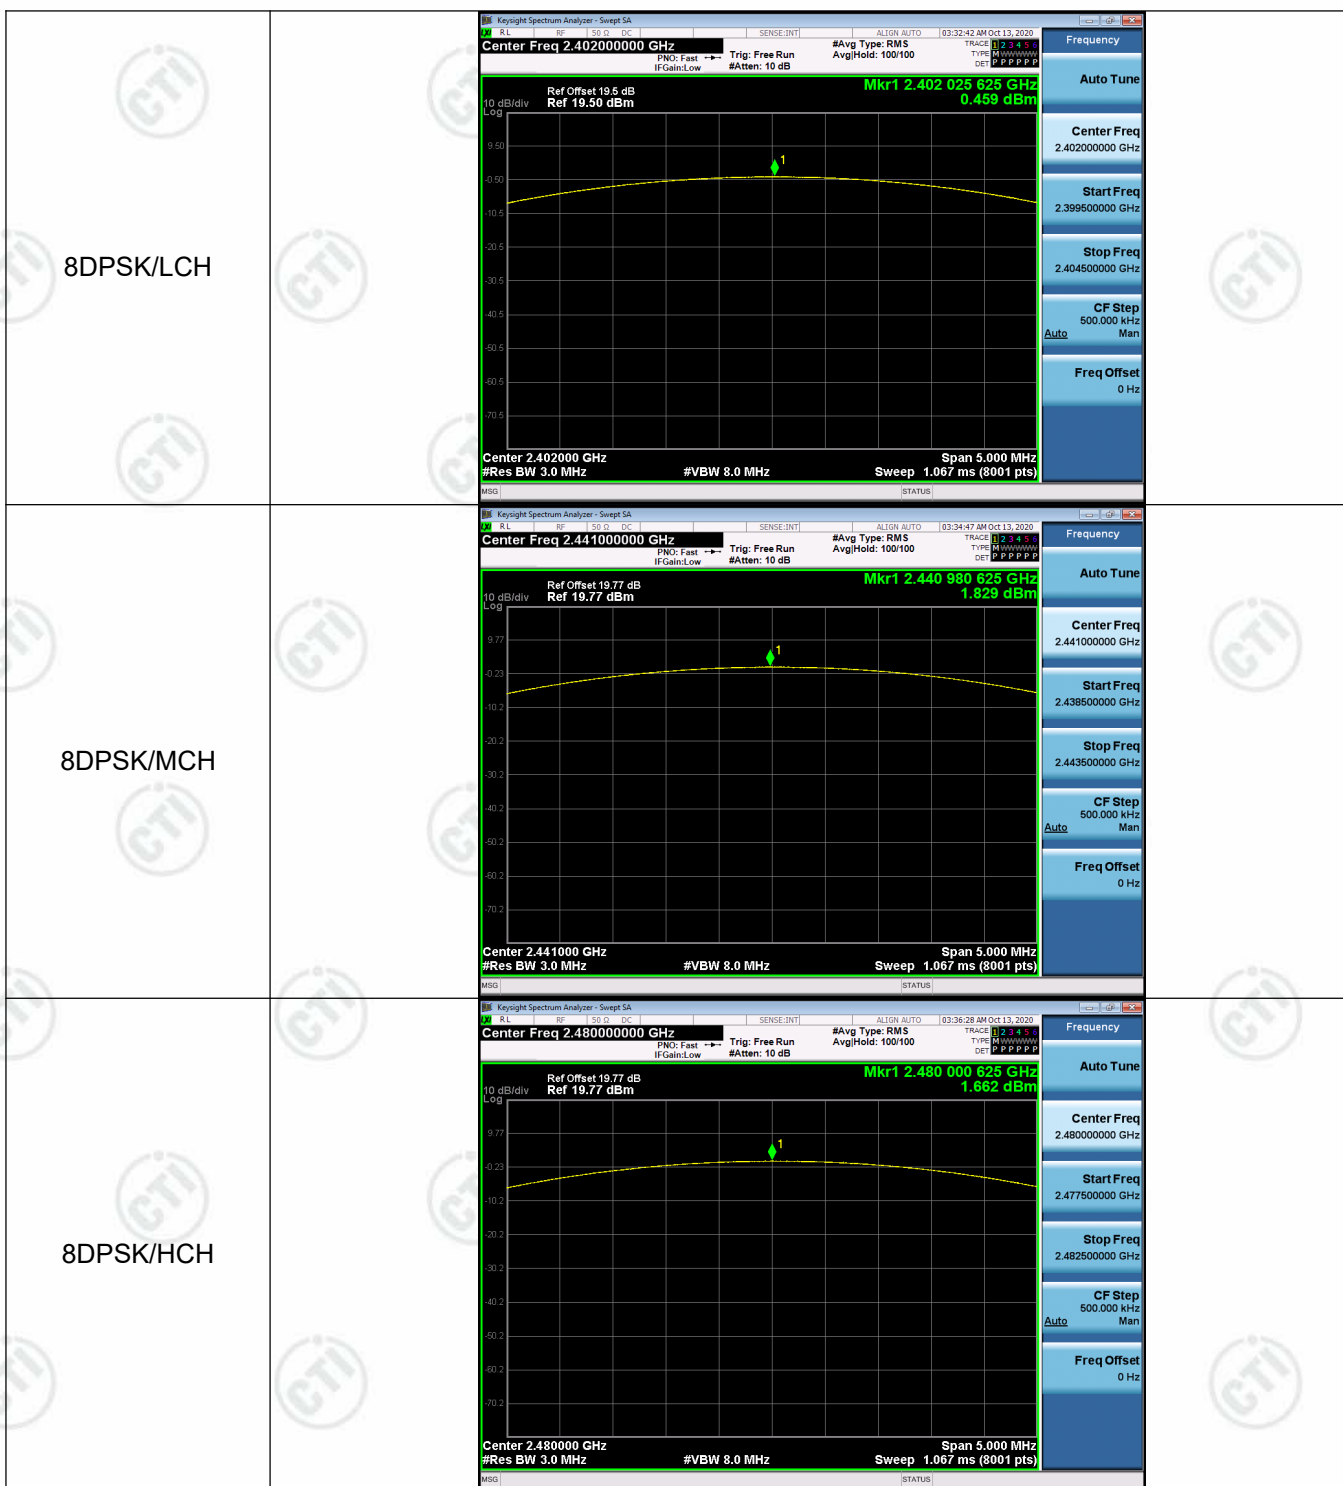

Appendix F): Band-edge for RF Conducted Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


Test Setup



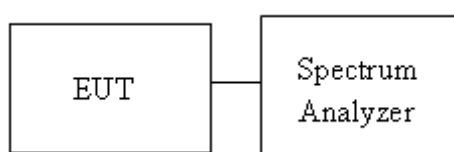





Result Table




Mode	Channel	Carrier	Carrier	Frequenc	Max	Limit	Verdict
GFSK	LCH	2402	1.373	Off	-59.932	-18.63	PASS
			-0.207	On	-53.471	-20.21	PASS
GFSK	HCH	2480	1.046	Off	-43.689	-18.95	PASS
			2.293	On	-52.747	-17.71	PASS
$\pi/4$ DQPSK	LCH	2402	-2.079	Off	-59.525	-22.08	PASS
			-2.950	On	-56.047	-22.95	PASS
$\pi/4$ DQPSK	HCH	2480	-0.880	Off	-44.827	-20.88	PASS
			-1.386	On	-44.389	-21.39	PASS
8DPSK	LCH	2402	-2.196	Off	-59.479	-22.2	PASS
			-2.775	On	-55.189	-22.78	PASS
8DPSK	HCH	2480	-0.801	Off	-43.705	-20.8	PASS
			0.421	On	-44.670	-19.58	PASS

Test Graph

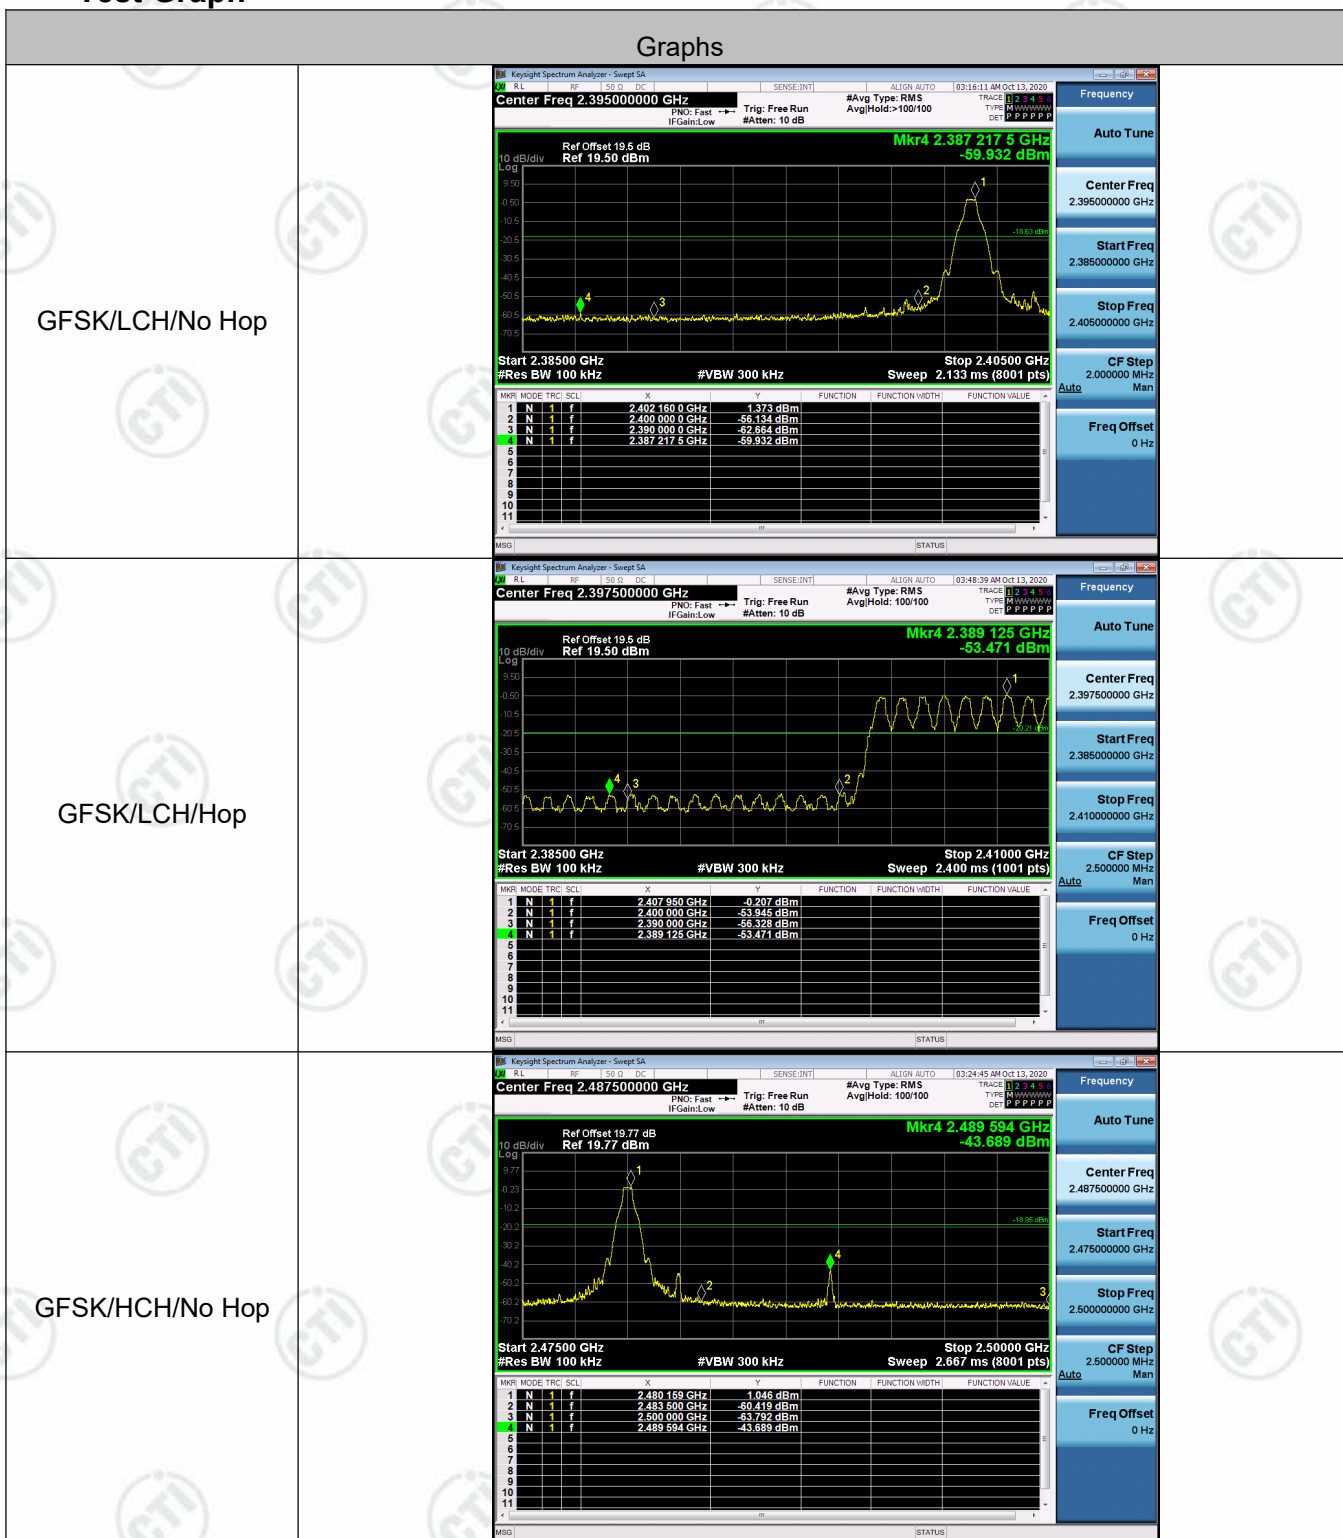

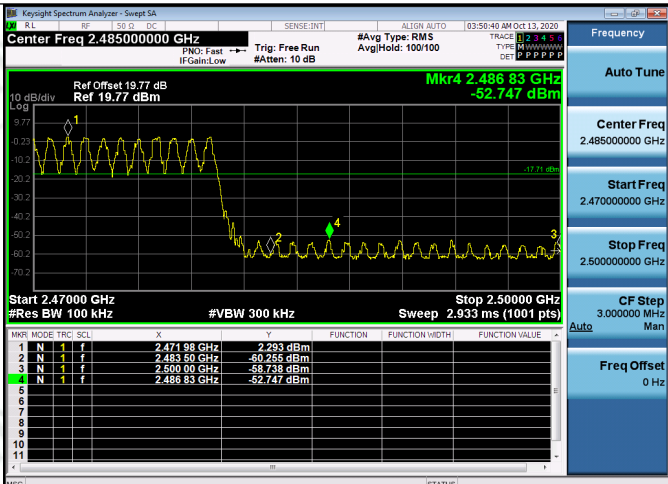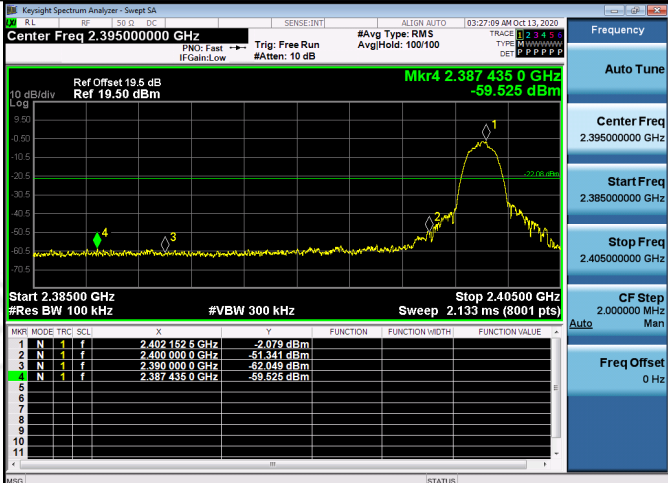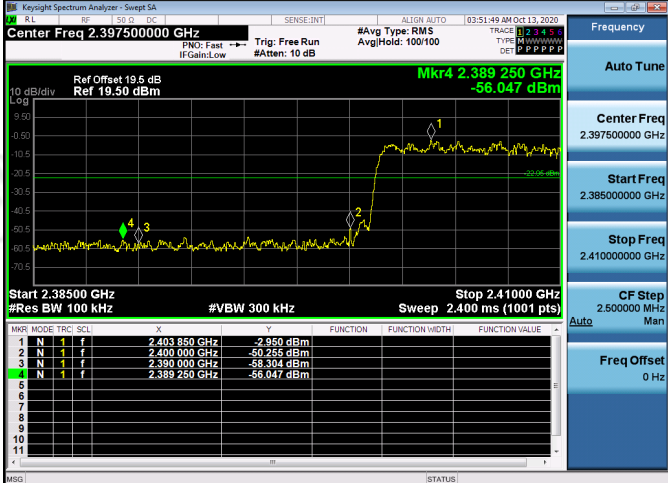GFSK/HCH/Hop	 Center Freq 2.485000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr4 2.486 83 GHz -52.747 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.471 98 GHz</td><td>-2.293 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-50.255 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-58.738 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.486 83 GHz</td><td>-52.747 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.471 98 GHz	-2.293 dBm				2	N	1	f	2.483 50 GHz	-50.255 dBm				3	N	1	f	2.500 00 GHz	-58.738 dBm				4	N	1	f	2.486 83 GHz	-52.747 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.471 98 GHz	-2.293 dBm																																									
2	N	1	f	2.483 50 GHz	-50.255 dBm																																									
3	N	1	f	2.500 00 GHz	-58.738 dBm																																									
4	N	1	f	2.486 83 GHz	-52.747 dBm																																									
$\pi/4$ DQPSK/LCH/No Hop	 Center Freq 2.395000000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr4 2.387 435 0 GHz -59.525 dBm Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 152 5 GHz</td><td>-2.079 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td>-51.341 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 0 GHz</td><td>-52.049 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.387 435 0 GHz</td><td>-59.525 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 152 5 GHz	-2.079 dBm				2	N	1	f	2.400 000 0 GHz	-51.341 dBm				3	N	1	f	2.390 000 0 GHz	-52.049 dBm				4	N	1	f	2.387 435 0 GHz	-59.525 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 152 5 GHz	-2.079 dBm																																									
2	N	1	f	2.400 000 0 GHz	-51.341 dBm																																									
3	N	1	f	2.390 000 0 GHz	-52.049 dBm																																									
4	N	1	f	2.387 435 0 GHz	-59.525 dBm																																									
$\pi/4$ DQPSK/LCH/Hop	 Center Freq 2.397500000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr4 2.389 250 GHz -56.047 dBm Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.400 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.403 850 GHz</td><td>-2.950 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-50.255 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-58.304 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389 250 GHz</td><td>-56.047 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.403 850 GHz	-2.950 dBm				2	N	1	f	2.400 000 GHz	-50.255 dBm				3	N	1	f	2.390 000 GHz	-58.304 dBm				4	N	1	f	2.389 250 GHz	-56.047 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.403 850 GHz	-2.950 dBm																																									
2	N	1	f	2.400 000 GHz	-50.255 dBm																																									
3	N	1	f	2.390 000 GHz	-58.304 dBm																																									
4	N	1	f	2.389 250 GHz	-56.047 dBm																																									

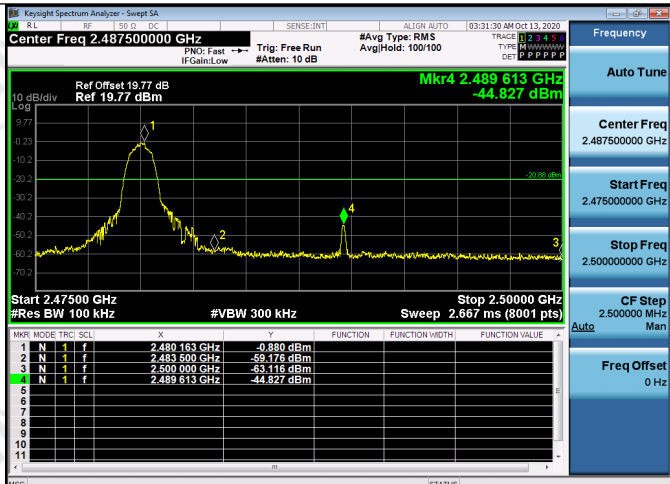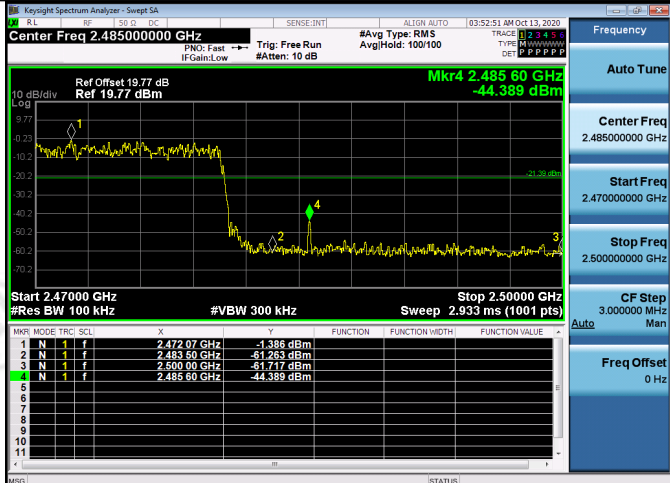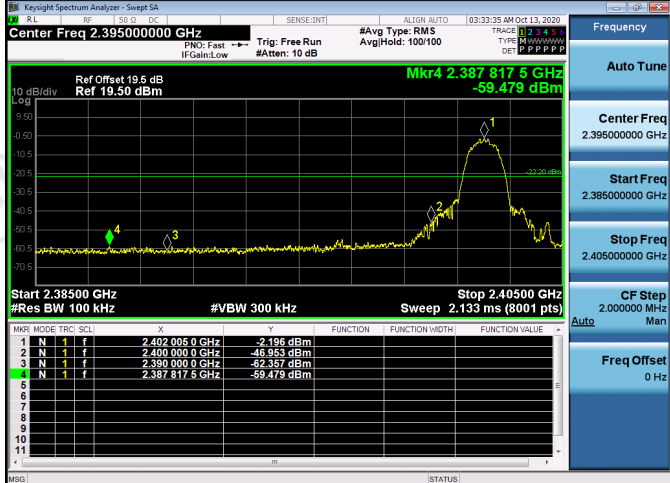$\pi/4$ DQPSK/HCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480163 GHz</td><td>-50.880 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483500 GHz</td><td>-59.176 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-63.116 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.489613 GHz</td><td>-44.827 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480163 GHz	-50.880 dBm				2	N	1	f	2.483500 GHz	-59.176 dBm				3	N	1	f	2.500000 GHz	-63.116 dBm				4	N	1	f	2.489613 GHz	-44.827 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480163 GHz	-50.880 dBm																																									
2	N	1	f	2.483500 GHz	-59.176 dBm																																									
3	N	1	f	2.500000 GHz	-63.116 dBm																																									
4	N	1	f	2.489613 GHz	-44.827 dBm																																									
$\pi/4$ DQPSK/HCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.47207 GHz</td><td>-53.886 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-51.263 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-61.717 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.48560 GHz</td><td>-44.389 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.47207 GHz	-53.886 dBm				2	N	1	f	2.48350 GHz	-51.263 dBm				3	N	1	f	2.50000 GHz	-61.717 dBm				4	N	1	f	2.48560 GHz	-44.389 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.47207 GHz	-53.886 dBm																																									
2	N	1	f	2.48350 GHz	-51.263 dBm																																									
3	N	1	f	2.50000 GHz	-61.717 dBm																																									
4	N	1	f	2.48560 GHz	-44.389 dBm																																									
8DPSK/LCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4020050 GHz</td><td>-2.196 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000000 GHz</td><td>-46.953 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.3900000 GHz</td><td>-52.357 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.3878175 GHz</td><td>-59.479 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4020050 GHz	-2.196 dBm				2	N	1	f	2.4000000 GHz	-46.953 dBm				3	N	1	f	2.3900000 GHz	-52.357 dBm				4	N	1	f	2.3878175 GHz	-59.479 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4020050 GHz	-2.196 dBm																																									
2	N	1	f	2.4000000 GHz	-46.953 dBm																																									
3	N	1	f	2.3900000 GHz	-52.357 dBm																																									
4	N	1	f	2.3878175 GHz	-59.479 dBm																																									

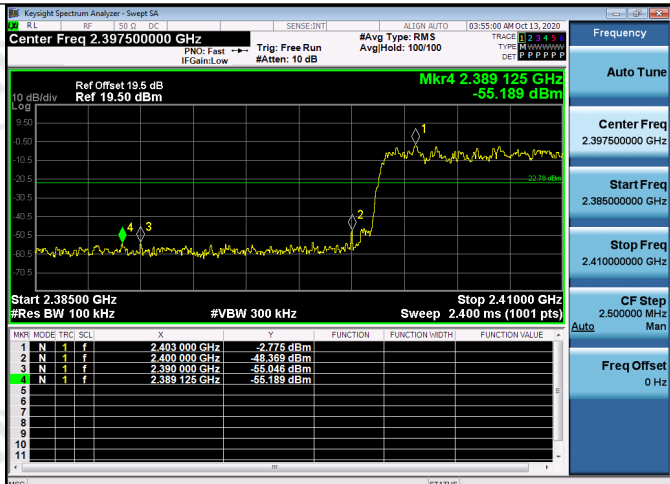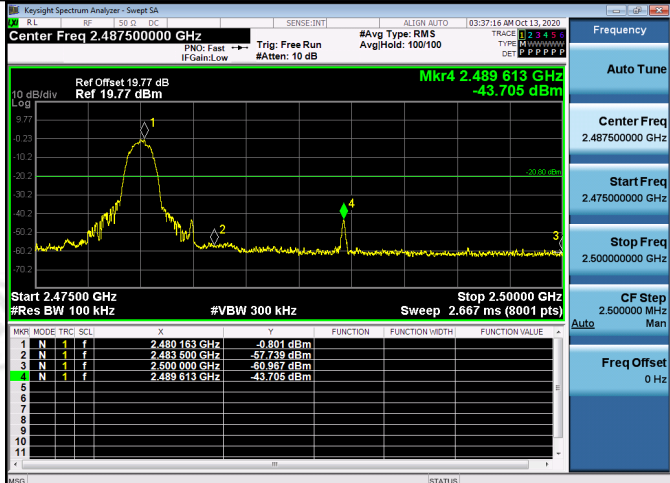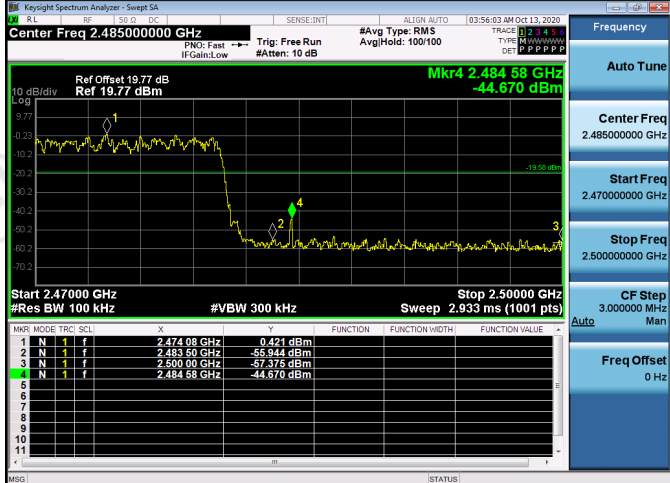8DPSK/LCH/Hop	 Center Freq 2.397500000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr4 2.389125 GHz -55.189 dBm Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 2.400 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.403000 GHz</td><td>-52.775 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-48.369 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-55.046 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389125 GHz</td><td>-55.189 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.403000 GHz	-52.775 dBm				2	N	1	f	2.400000 GHz	-48.369 dBm				3	N	1	f	2.390000 GHz	-55.046 dBm				4	N	1	f	2.389125 GHz	-55.189 dBm			
Mkr	Mode	Trc	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.403000 GHz	-52.775 dBm																																									
2	N	1	f	2.400000 GHz	-48.369 dBm																																									
3	N	1	f	2.390000 GHz	-55.046 dBm																																									
4	N	1	f	2.389125 GHz	-55.189 dBm																																									
8DPSK/HCH/No Hop	 Center Freq 2.487500000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr4 2.489613 GHz -43.705 dBm Start 2.47500 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (8001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480183 GHz</td><td>-49.881 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483500 GHz</td><td>-57.739 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-60.967 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.489613 GHz</td><td>-43.705 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480183 GHz	-49.881 dBm				2	N	1	f	2.483500 GHz	-57.739 dBm				3	N	1	f	2.500000 GHz	-60.967 dBm				4	N	1	f	2.489613 GHz	-43.705 dBm			
Mkr	Mode	Trc	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480183 GHz	-49.881 dBm																																									
2	N	1	f	2.483500 GHz	-57.739 dBm																																									
3	N	1	f	2.500000 GHz	-60.967 dBm																																									
4	N	1	f	2.489613 GHz	-43.705 dBm																																									
8DPSK/HCH/Hop	 Center Freq 2.485000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr4 2.48458 GHz -44.670 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.933 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.47408 GHz</td><td>0.421 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-55.944 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-57.375 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.48458 GHz</td><td>-44.670 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.47408 GHz	0.421 dBm				2	N	1	f	2.48350 GHz	-55.944 dBm				3	N	1	f	2.50000 GHz	-57.375 dBm				4	N	1	f	2.48458 GHz	-44.670 dBm			
Mkr	Mode	Trc	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.47408 GHz	0.421 dBm																																									
2	N	1	f	2.48350 GHz	-55.944 dBm																																									
3	N	1	f	2.50000 GHz	-57.375 dBm																																									
4	N	1	f	2.48458 GHz	-44.670 dBm																																									

Appendix G): RF Conducted Spurious Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.

Test Setup

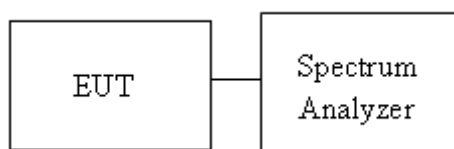


Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	1.356	<Limit	PASS
GFSK	MCH	1.19	<Limit	PASS
GFSK	HCH	0.931	<Limit	PASS
$\pi/4$ DQPSK	LCH	-2.227	<Limit	PASS
$\pi/4$ DQPSK	MCH	-0.738	<Limit	PASS
$\pi/4$ DQPSK	HCH	-1.032	<Limit	PASS
8DPSK	LCH	-2.167	<Limit	PASS
8DPSK	MCH	-0.841	<Limit	PASS
8DPSK	HCH	-1.102	<Limit	PASS


Test Graph




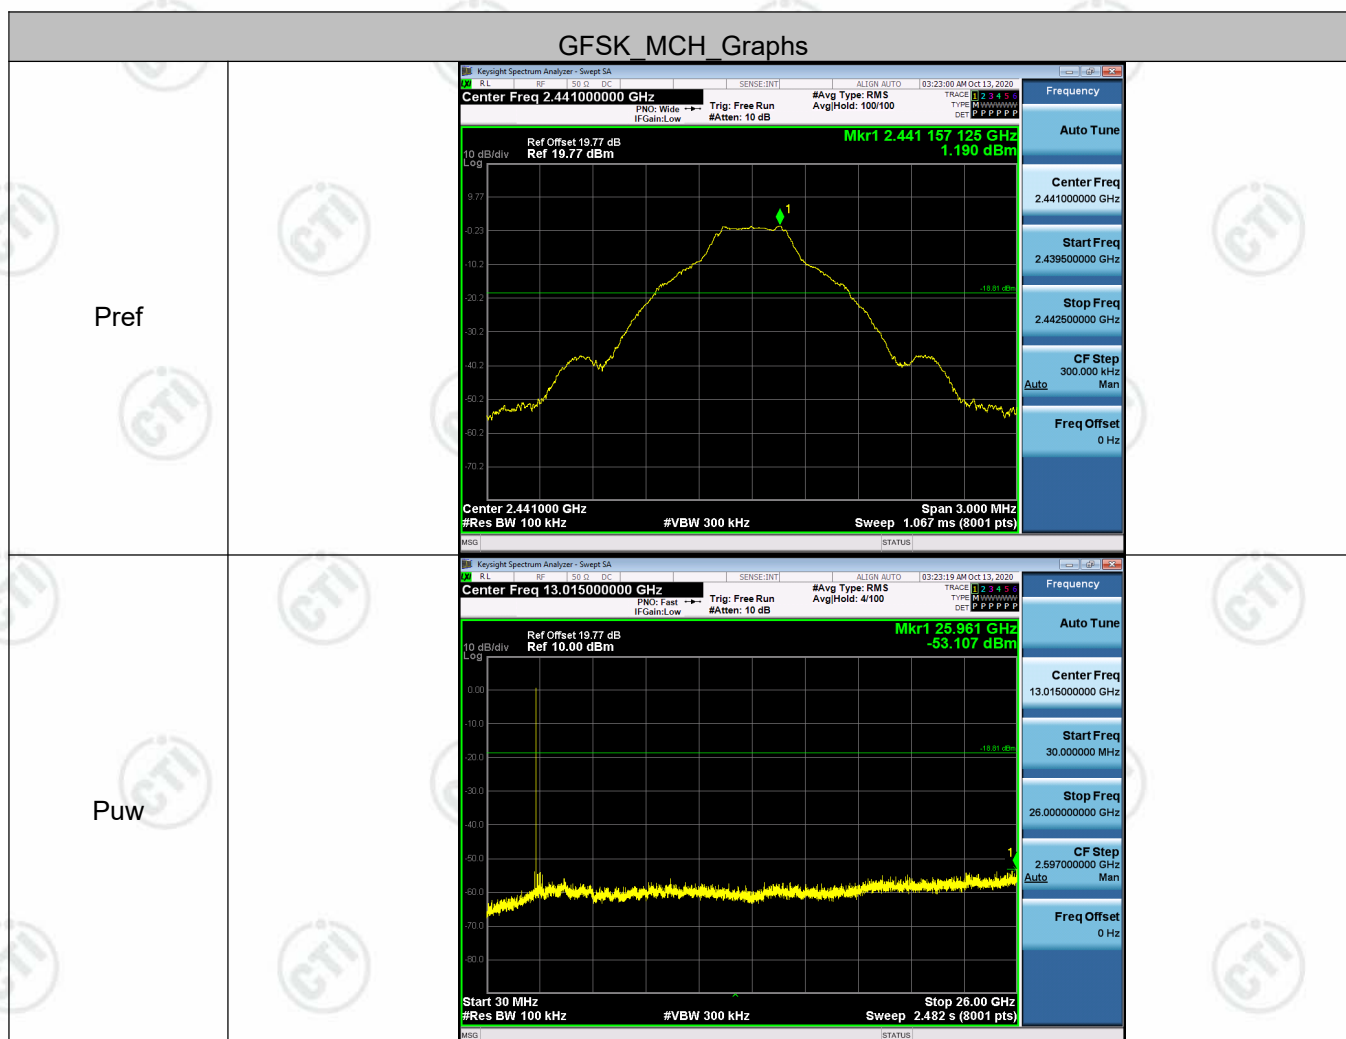





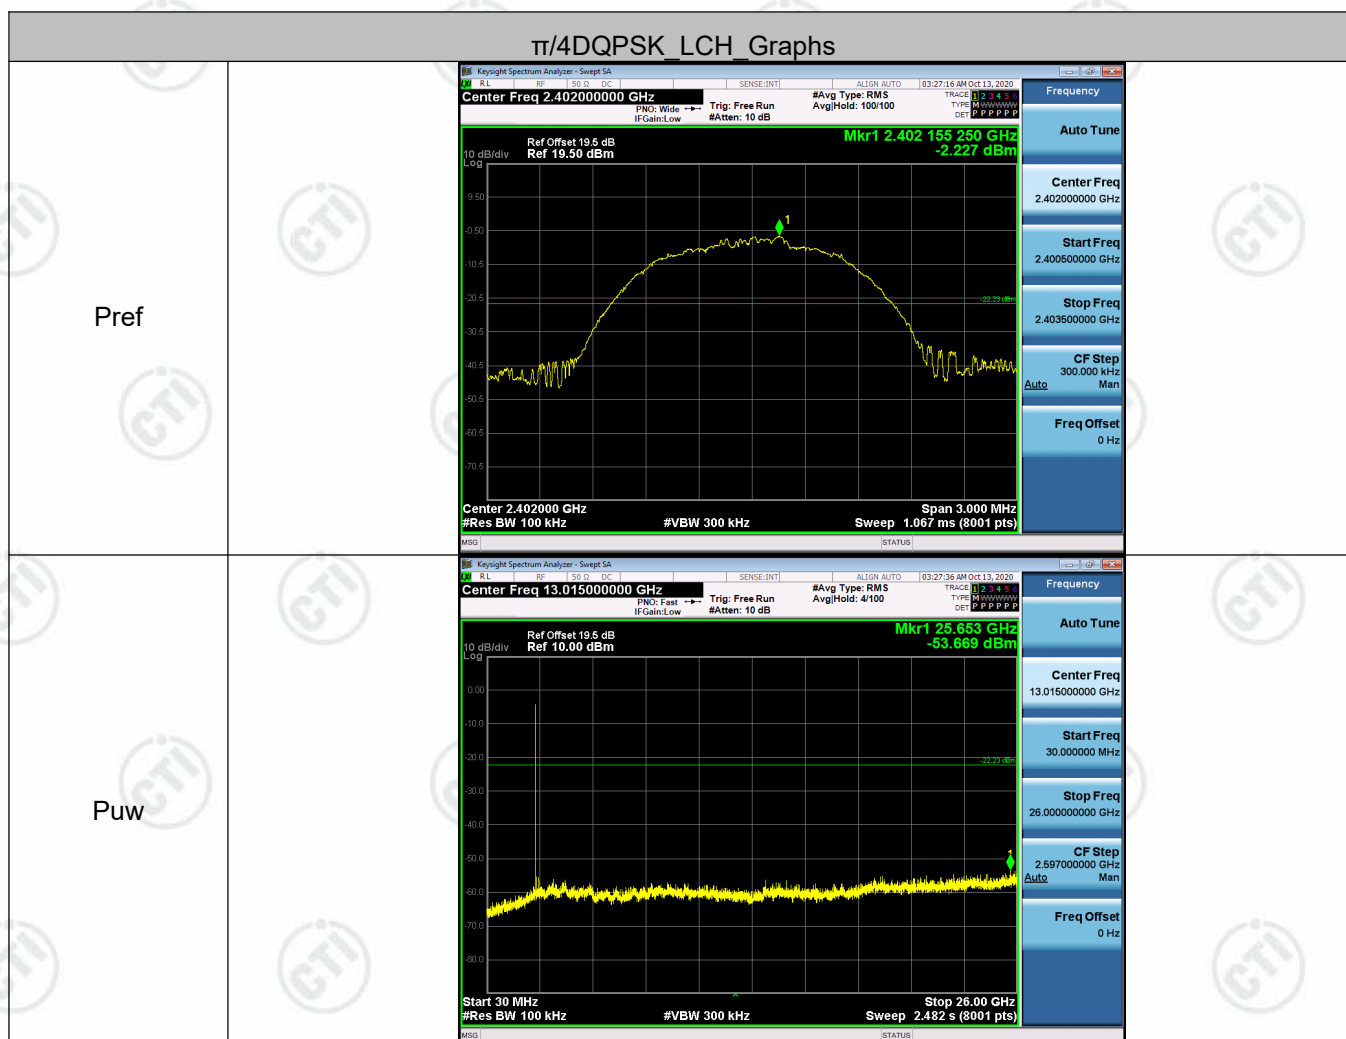


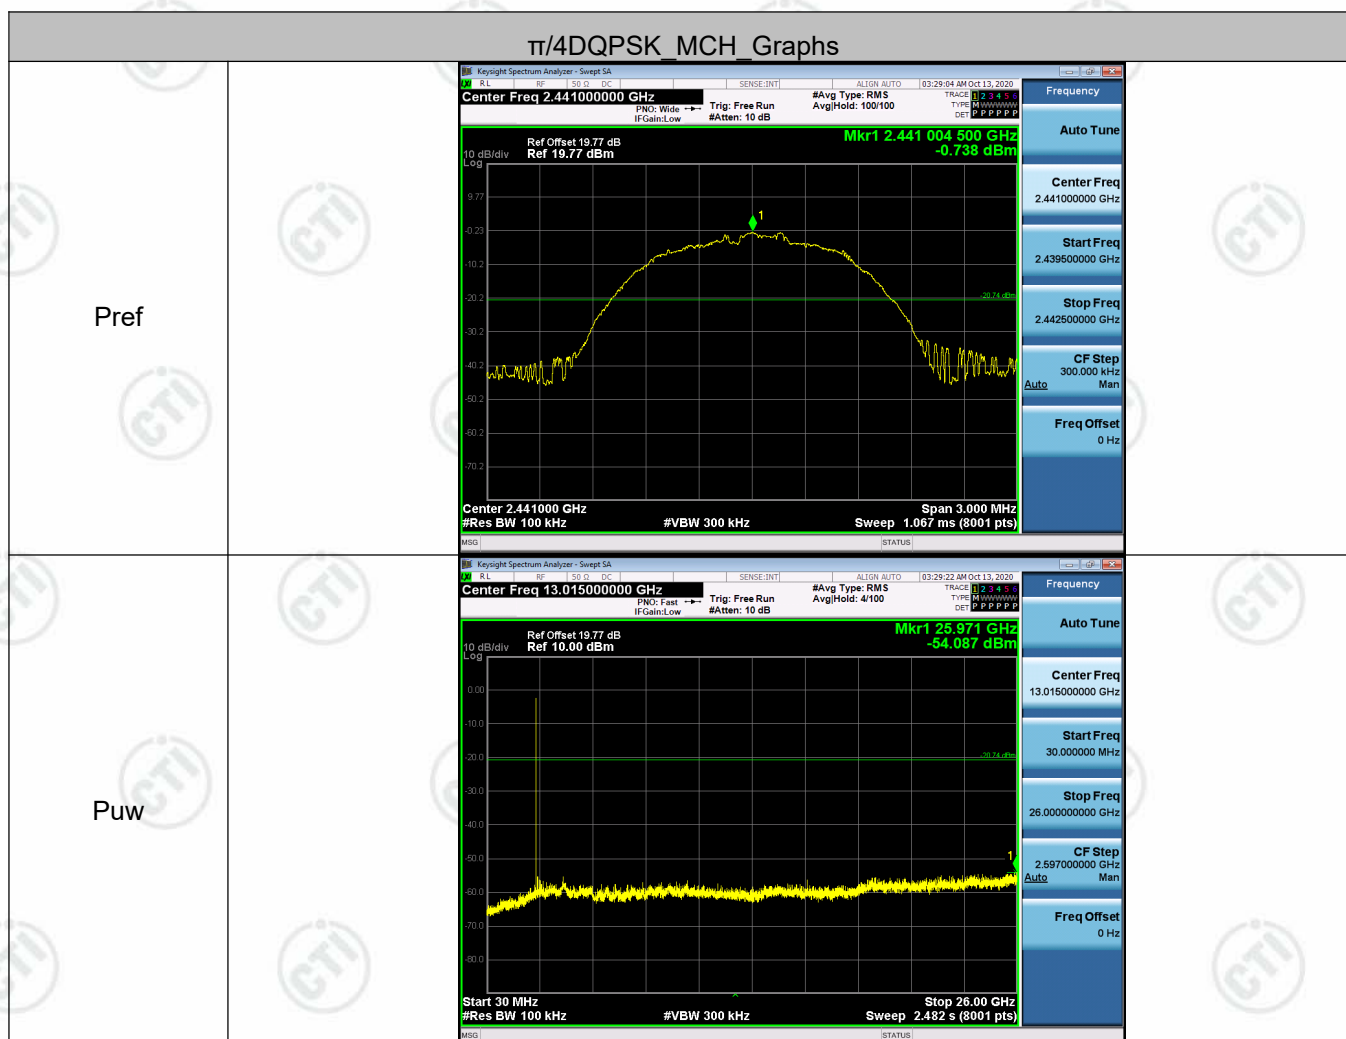

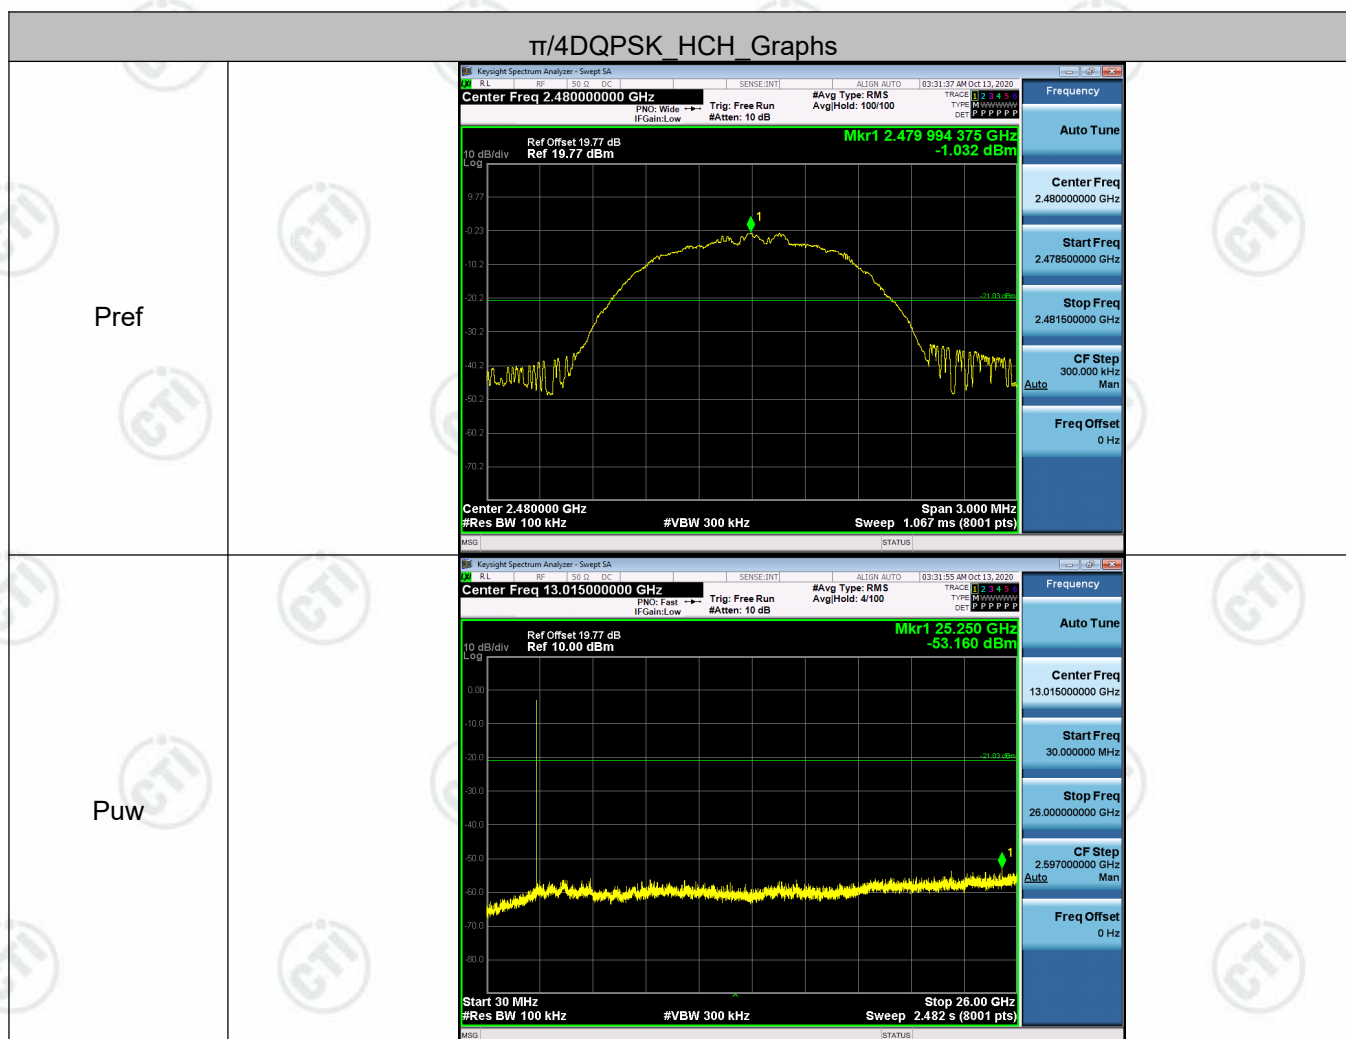

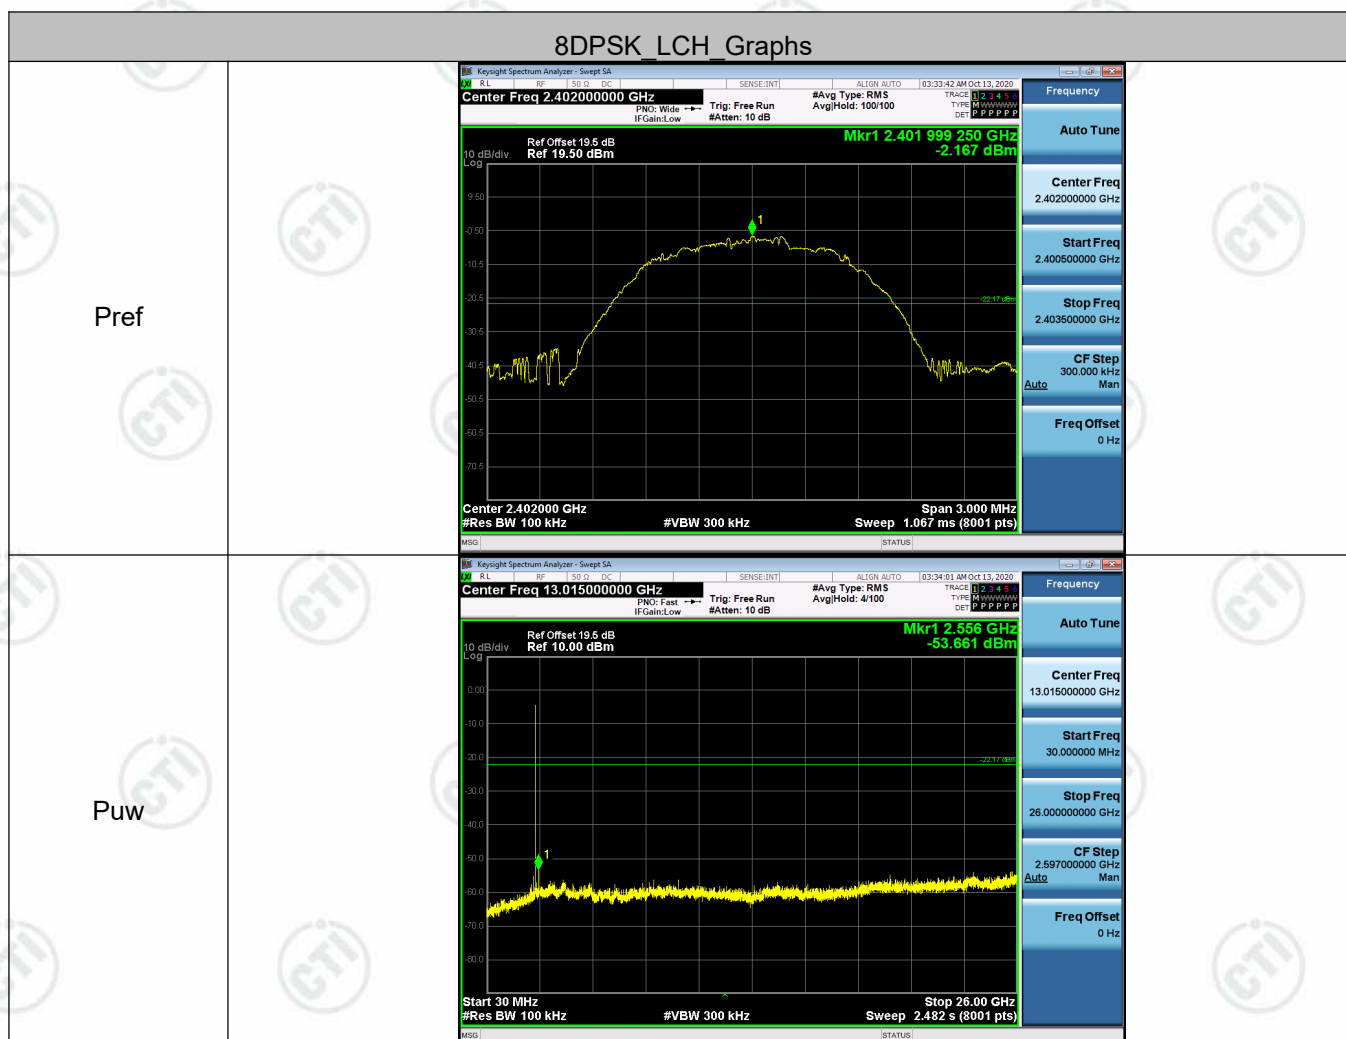

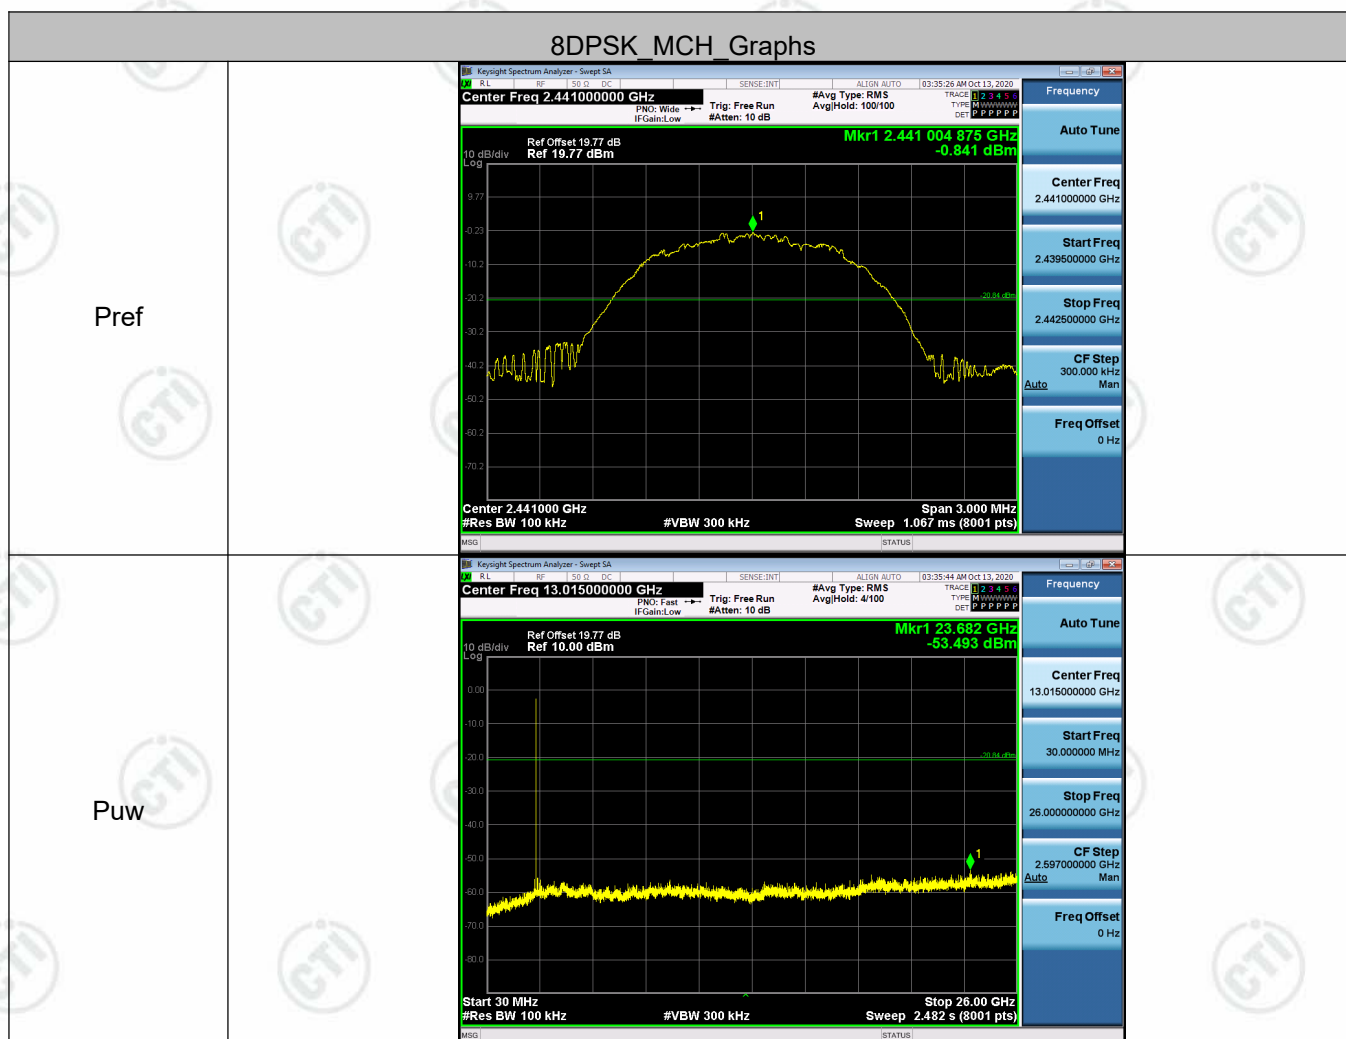

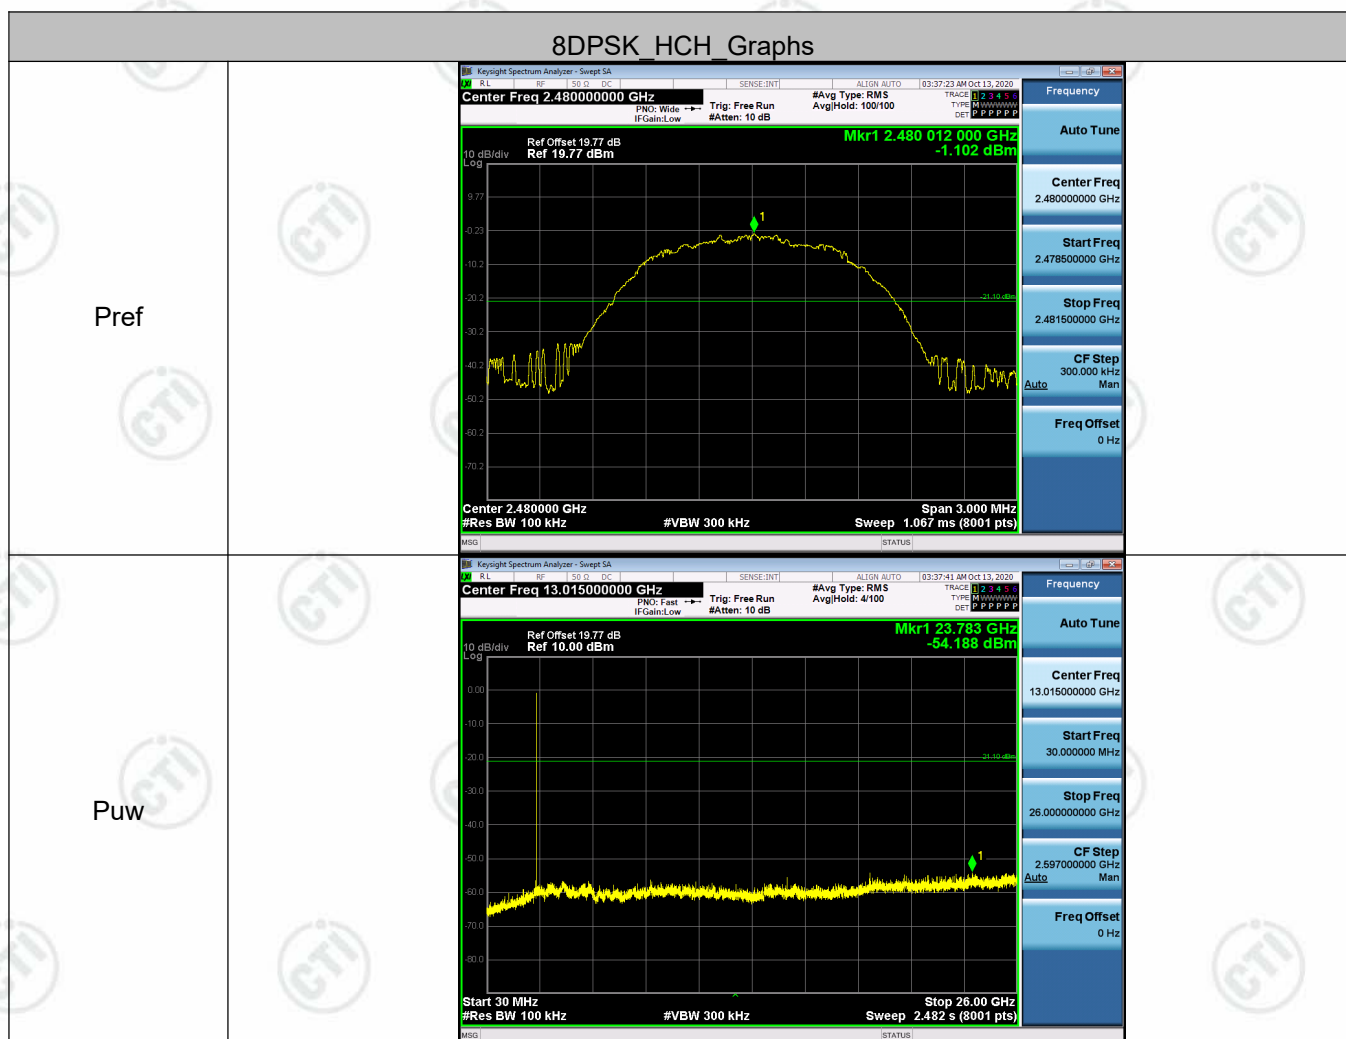

Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.	

Appendix I) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is FPC antenna. The best case gain of the antenna is 1.15dBi.

Appendix J) AC Power Line Conducted Emission


Test Procedure:	Test frequency range :150KHz-30MHz 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

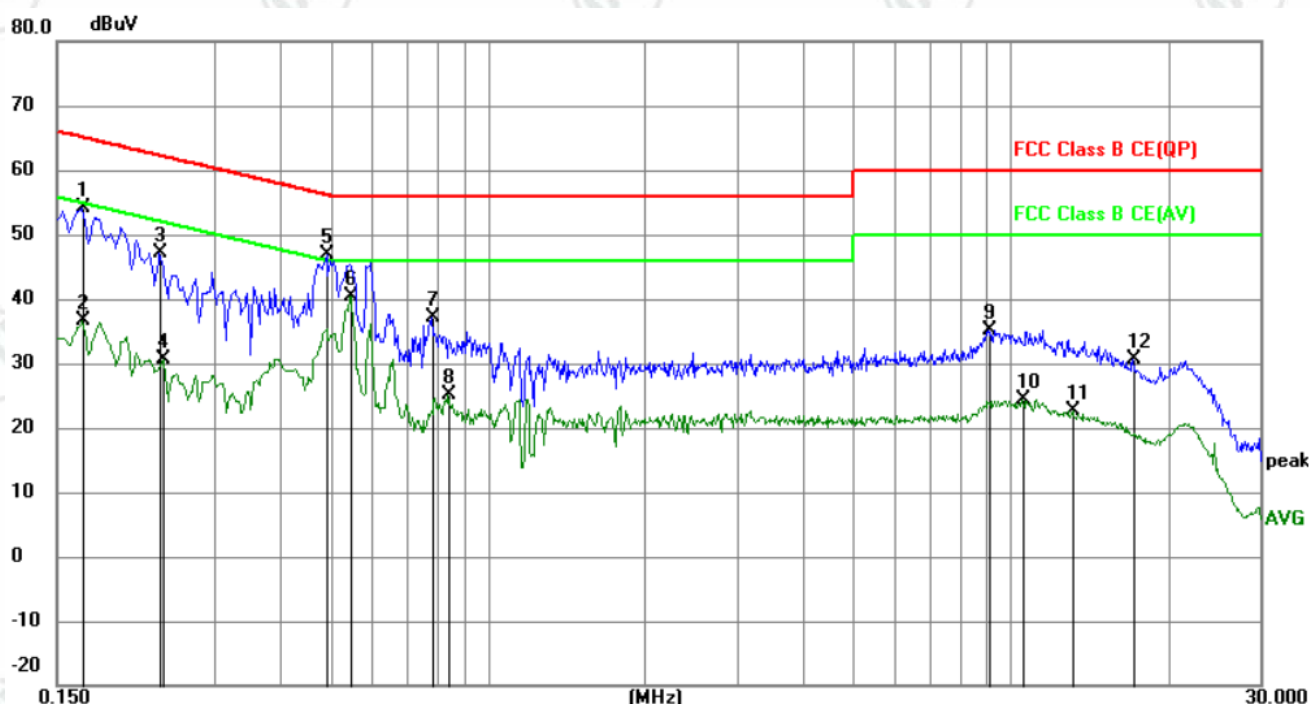

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	44.27	9.87	54.14	65.06	-10.92	QP	
2		0.1680	26.68	9.87	36.55	55.06	-18.51	AVG	
3		0.2355	37.24	9.94	47.18	62.25	-15.07	QP	
4		0.2400	20.73	9.95	30.68	52.10	-21.42	AVG	
5		0.4920	36.87	9.95	46.82	56.13	-9.31	QP	
6	*	0.5460	30.27	10.01	40.28	46.00	-5.72	AVG	
7		0.7799	27.28	9.86	37.14	56.00	-18.86	QP	
8		0.8430	15.34	9.85	25.19	46.00	-20.81	AVG	
9		9.1005	25.37	9.78	35.15	60.00	-24.85	QP	
10		10.5540	14.47	9.80	24.27	50.00	-25.73	AVG	
11		13.1370	12.70	9.87	22.57	50.00	-27.43	AVG	
12		17.1645	20.60	9.95	30.55	60.00	-29.45	QP	

Neutral line:

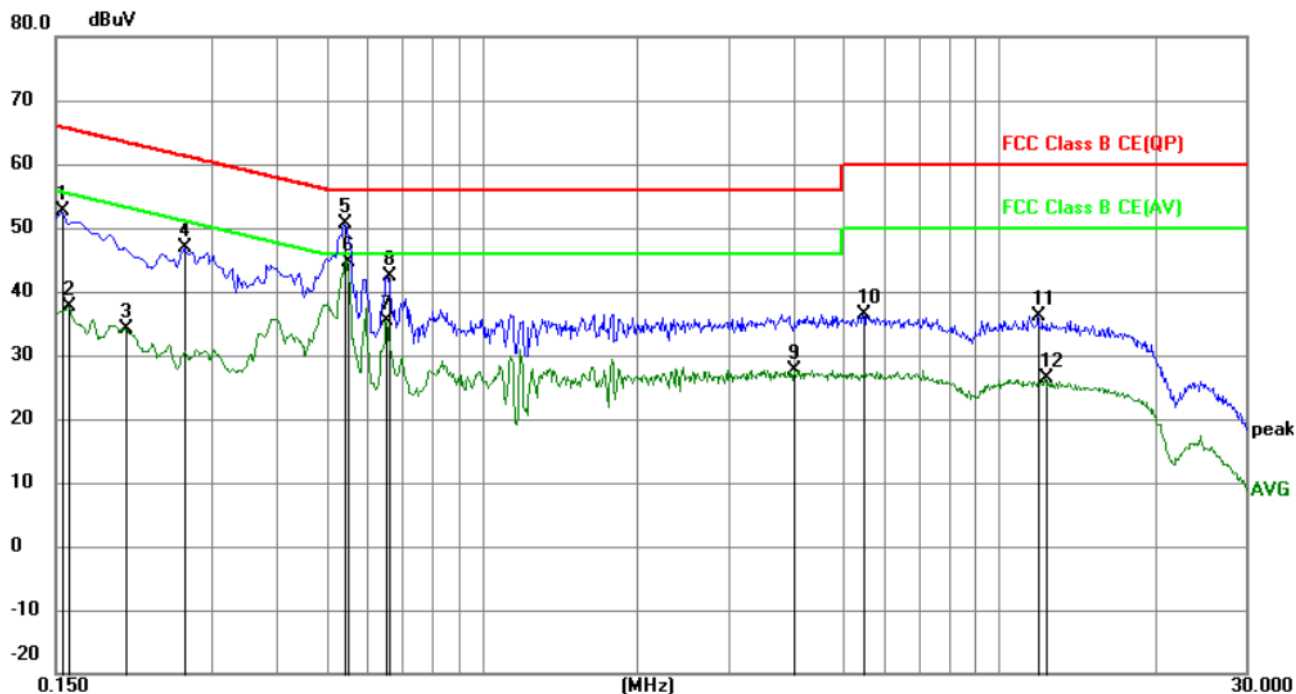

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1545	42.64	9.87	52.51	65.75	-13.24	QP	
2		0.1590	27.74	9.87	37.61	55.52	-17.91	AVG	
3		0.2040	24.33	9.88	34.21	53.45	-19.24	AVG	
4		0.2670	36.90	10.00	46.90	61.21	-14.31	QP	
5		0.5415	40.67	10.00	50.67	56.00	-5.33	QP	
6	*	0.5505	34.69	10.01	44.70	46.00	-1.30	AVG	
7		0.6540	25.33	9.97	35.30	46.00	-10.70	AVG	
8		0.6585	32.45	9.96	42.41	56.00	-13.59	QP	
9		4.0245	17.96	9.78	27.74	46.00	-18.26	AVG	
10		5.4510	26.54	9.78	36.32	60.00	-23.68	QP	
11		11.9220	26.37	9.84	36.21	60.00	-23.79	QP	
12		12.2729	16.50	9.85	26.35	50.00	-23.65	AVG	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). b. Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

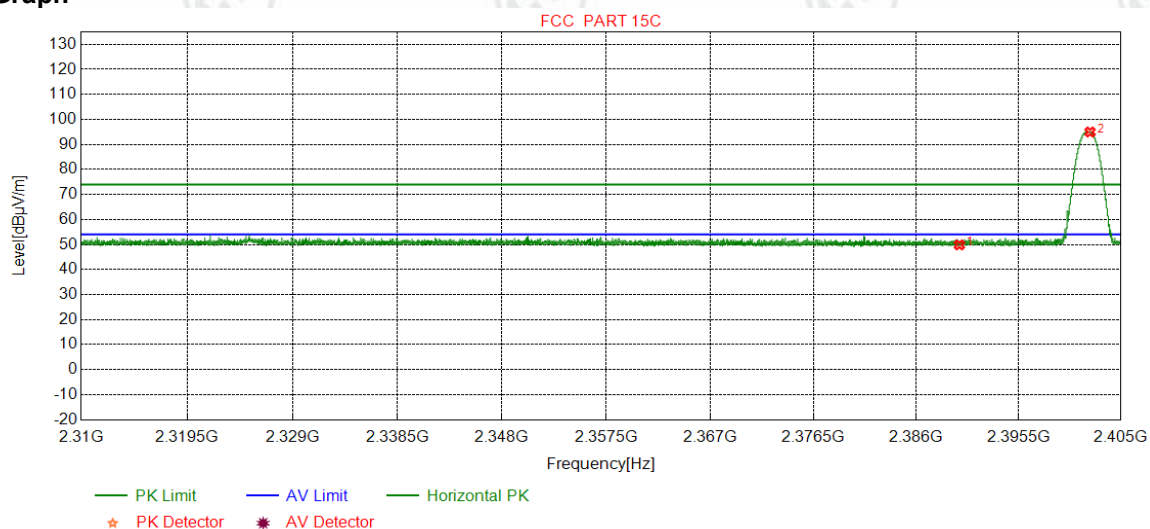

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.34	49.84	74.00	24.16	Pass	Horizontal
2	2402.1435	32.26	13.31	-43.12	92.52	94.97	74.00	-20.97	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

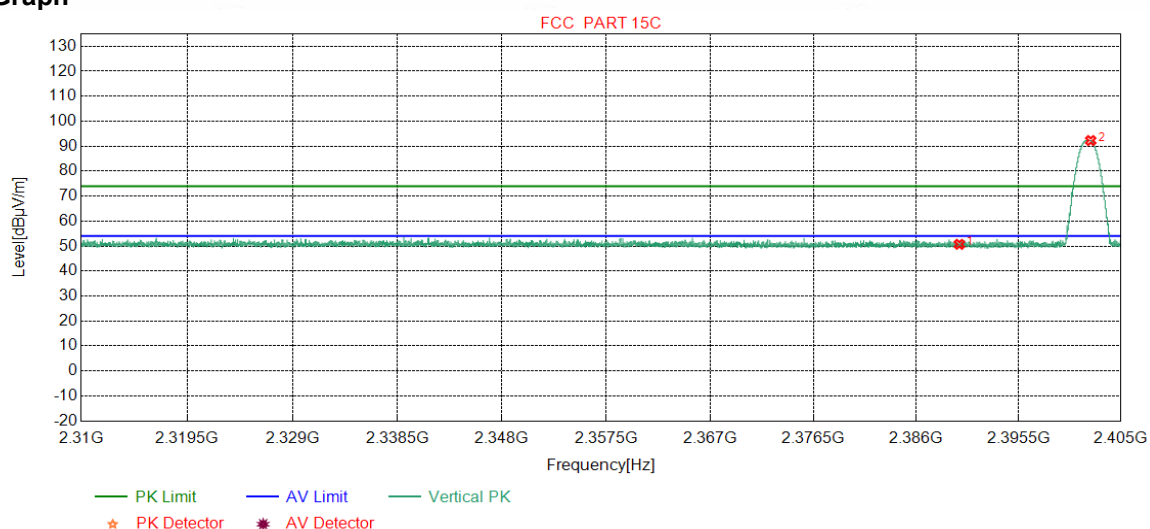

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.20	50.70	74.00	23.30	Pass	Vertical
2	2402.005	32.26	13.31	-43.12	89.81	92.26	74.00	-18.26	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

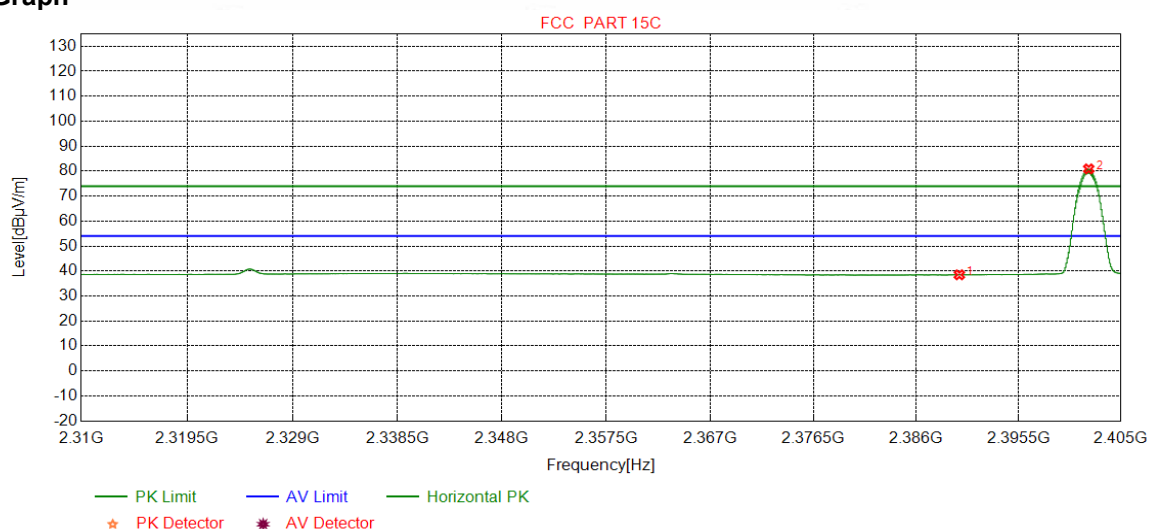

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	35.99	38.49	54.00	15.51	Pass	Horizontal
2	2402.0168	32.26	13.31	-43.12	78.45	80.90	54.00	-26.90	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

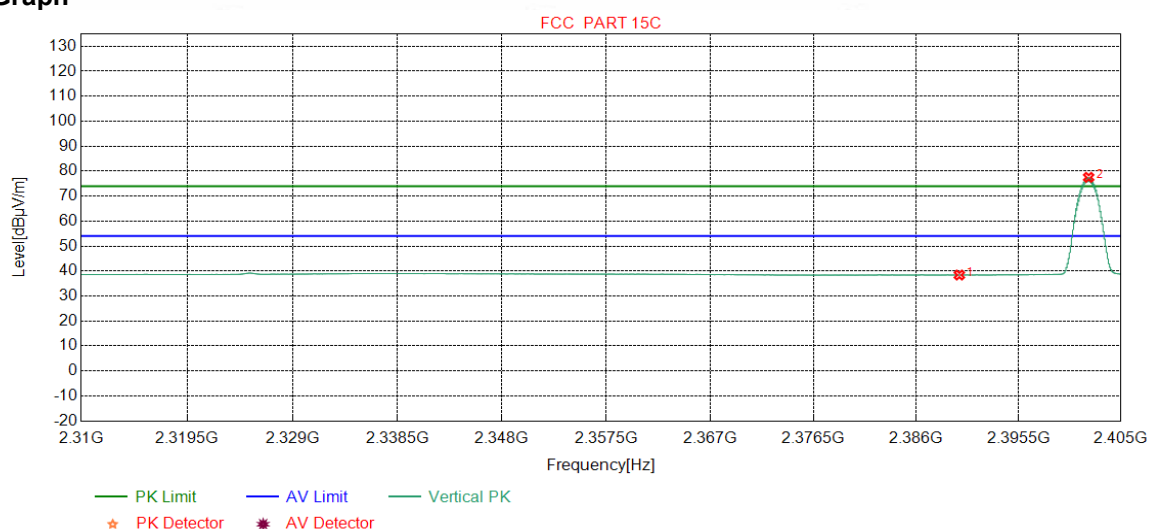

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	35.90	38.40	54.00	15.60	Pass	Vertical
2	2402.0105	32.26	13.31	-43.12	75.07	77.52	54.00	-23.52	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

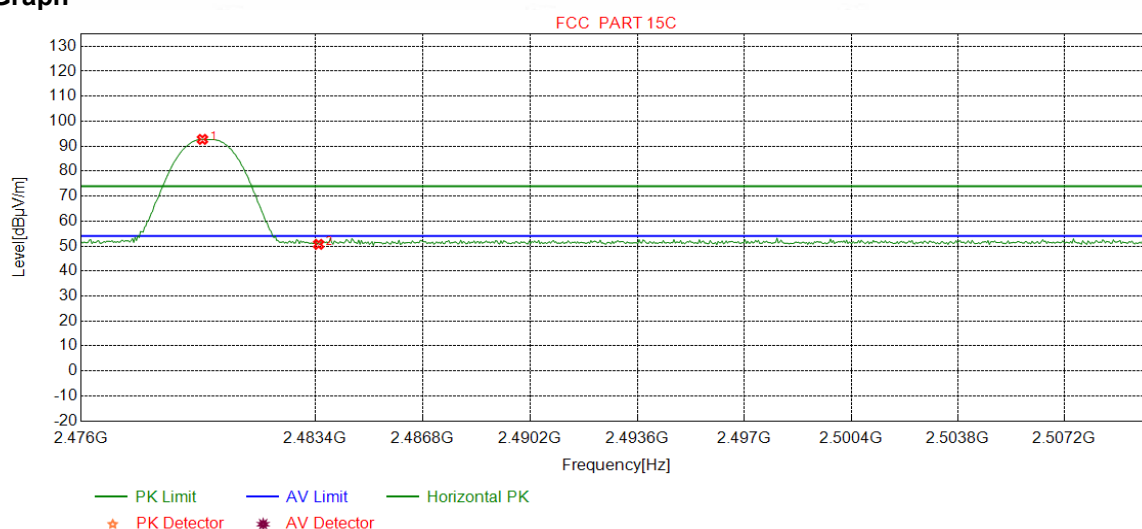

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8298	32.37	13.39	-43.10	90.05	92.71	74.00	-18.71	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	48.04	50.69	74.00	23.31	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

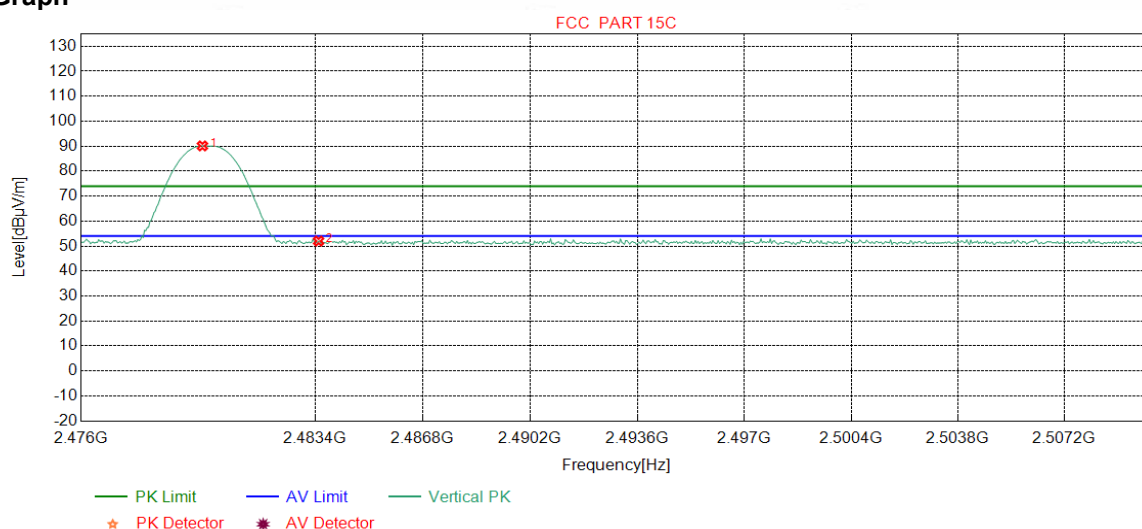

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8298	32.37	13.39	-43.10	87.44	90.10	74.00	-16.10	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.35	52.00	74.00	22.00	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

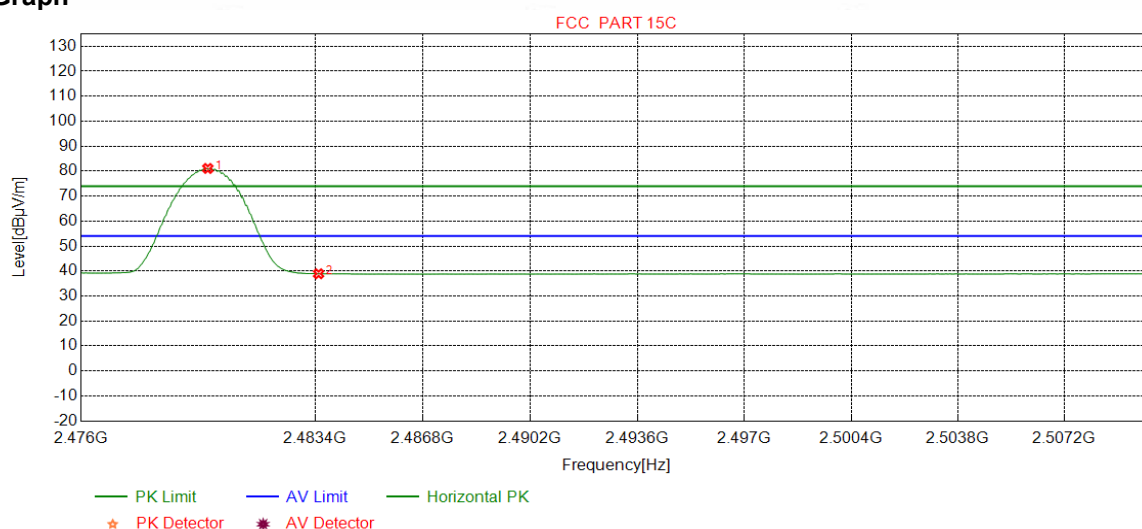

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	78.42	81.08	54.00	-27.08	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	36.26	38.91	54.00	15.09	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

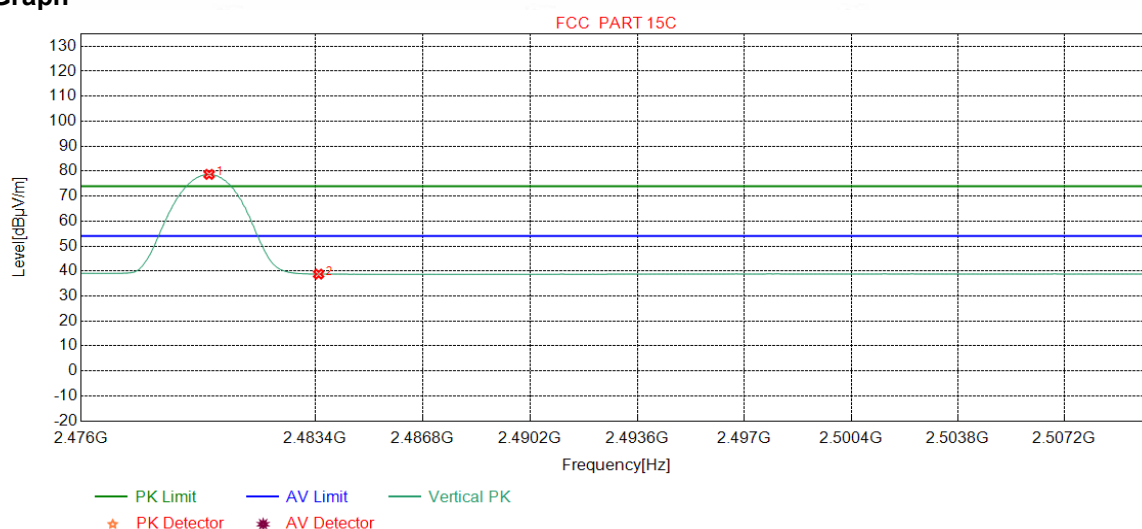

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	76.05	78.71	54.00	-24.71	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	36.12	38.77	54.00	15.23	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

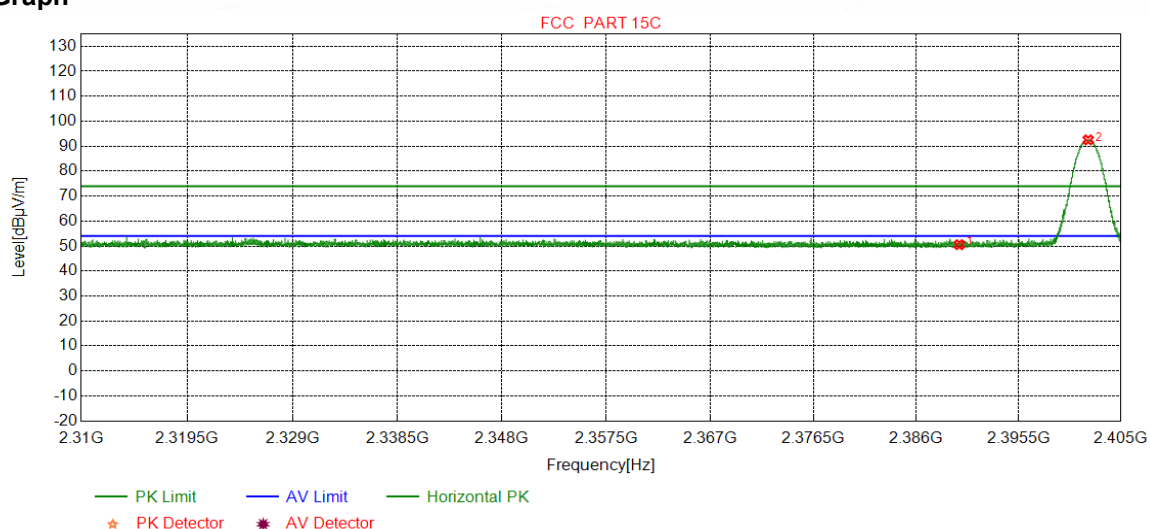

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.06	50.56	74.00	23.44	Pass	Horizontal
2	2401.9661	32.26	13.31	-43.12	90.07	92.52	74.00	-18.52	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

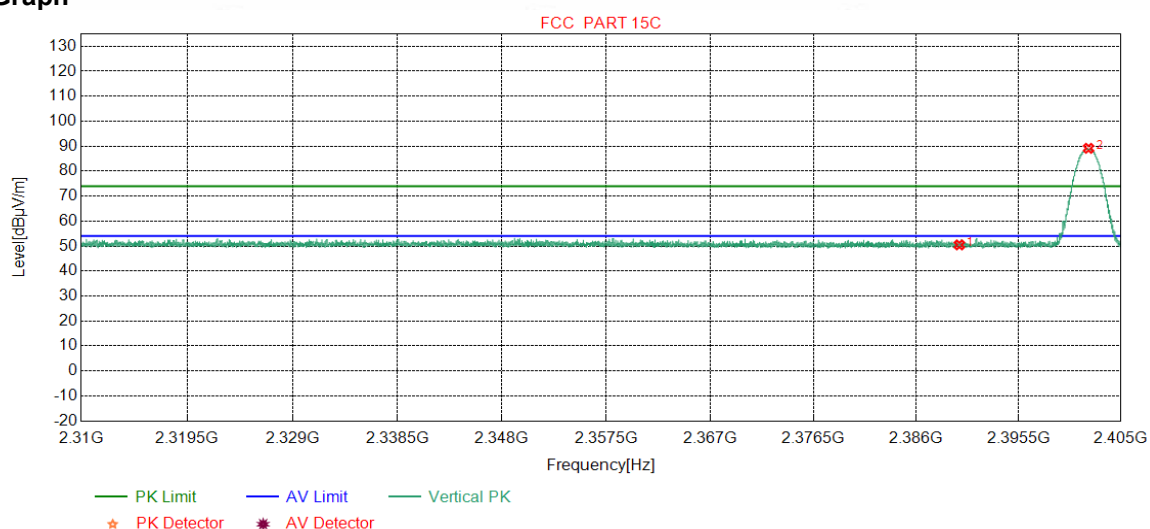

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.97	50.47	74.00	23.53	Pass	Vertical
2	2401.9978	32.26	13.31	-43.12	86.69	89.14	74.00	-15.14	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

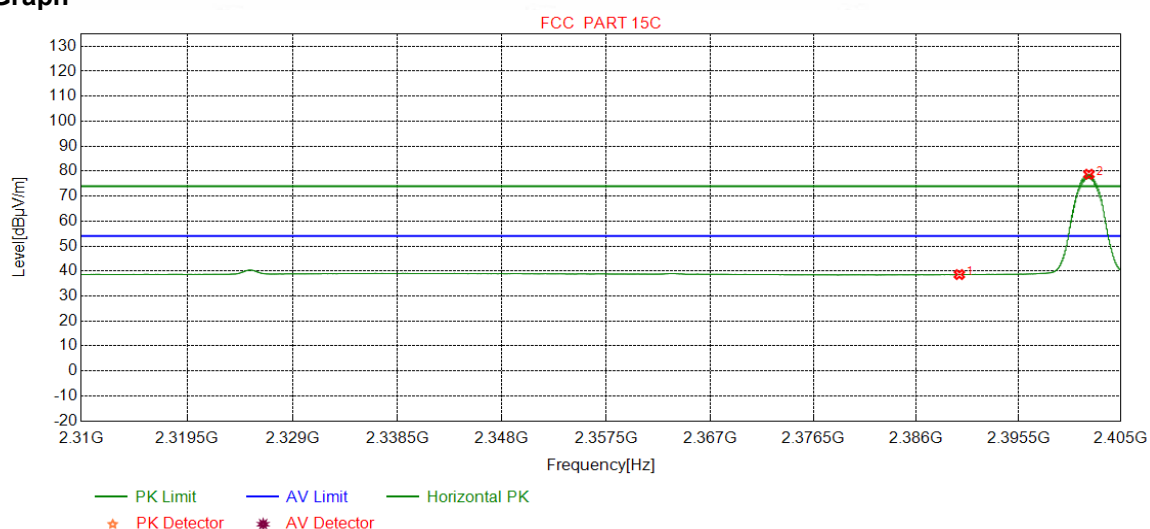

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.09	38.59	54.00	15.41	Pass	Horizontal
2	2402.0358	32.26	13.31	-43.12	76.30	78.75	54.00	-24.75	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

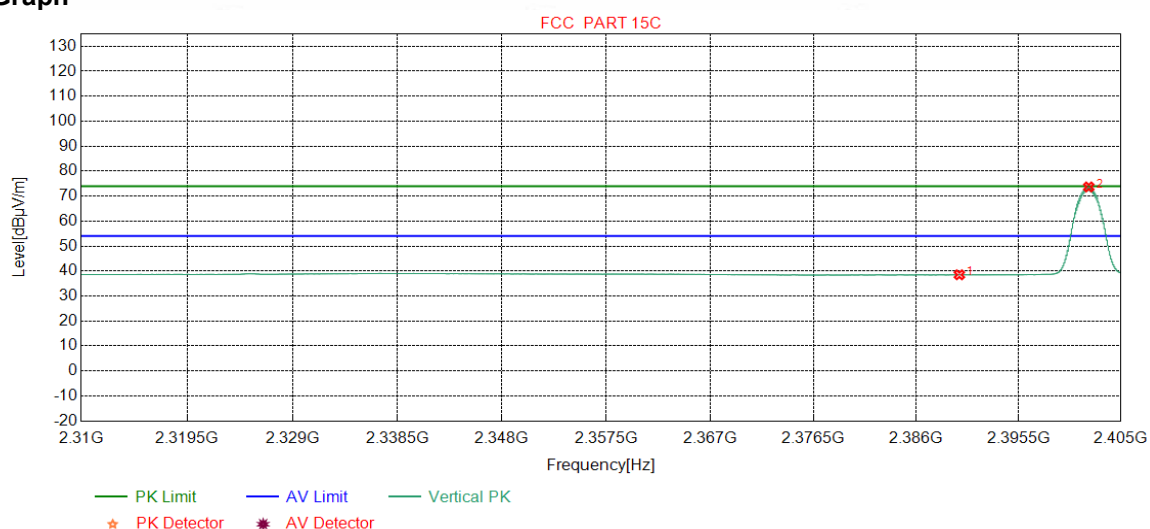

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.00	38.50	54.00	15.50	Pass	Vertical
2	2402.0168	32.26	13.31	-43.12	71.23	73.68	54.00	-19.68	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

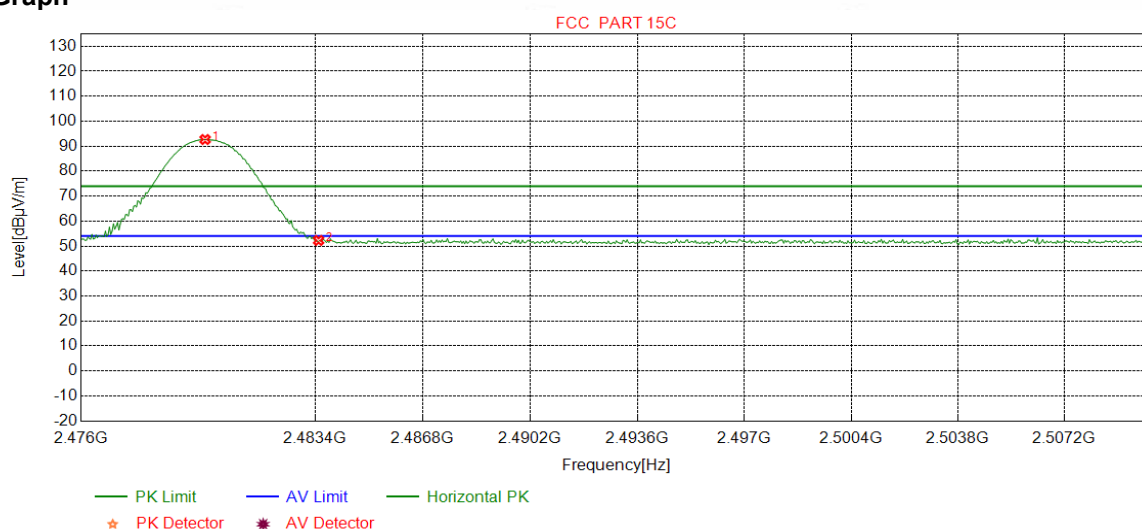

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9149	32.37	13.39	-43.10	90.01	92.67	74.00	-18.67	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	49.60	52.25	74.00	21.75	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

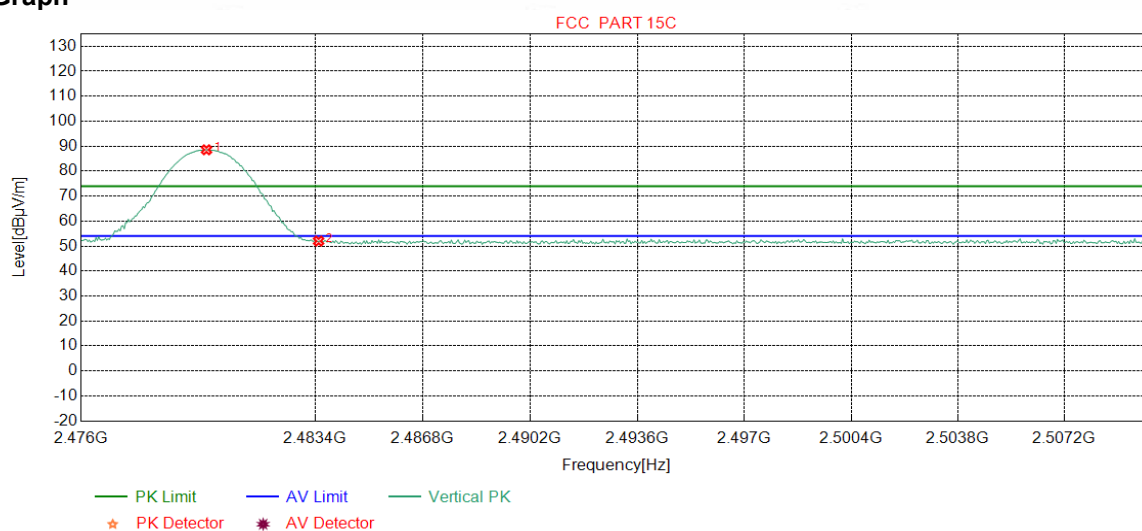

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	85.89	88.55	74.00	-14.55	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.34	51.99	74.00	22.01	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

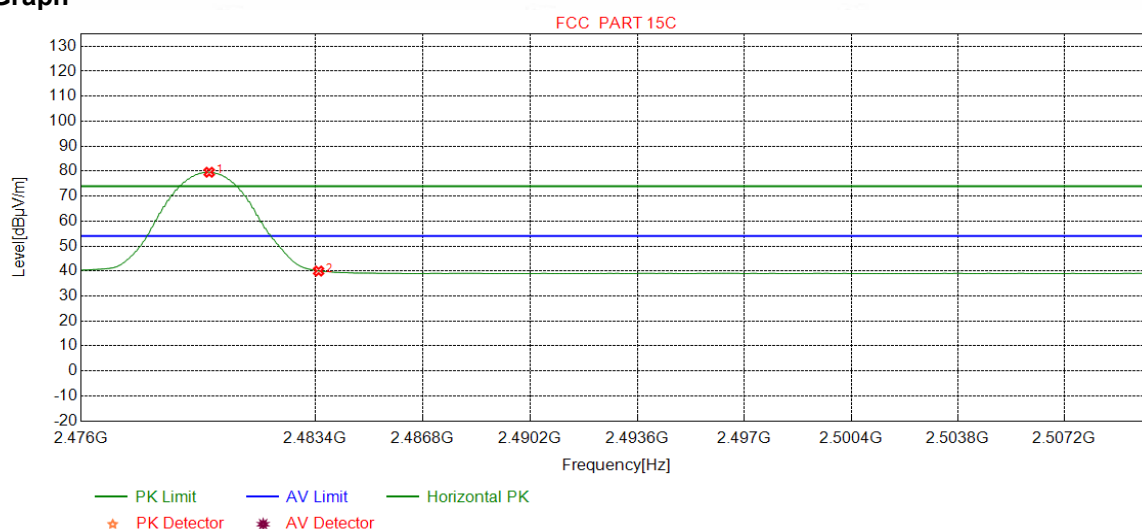

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	76.90	79.56	54.00	-25.56	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	37.34	39.99	54.00	14.01	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

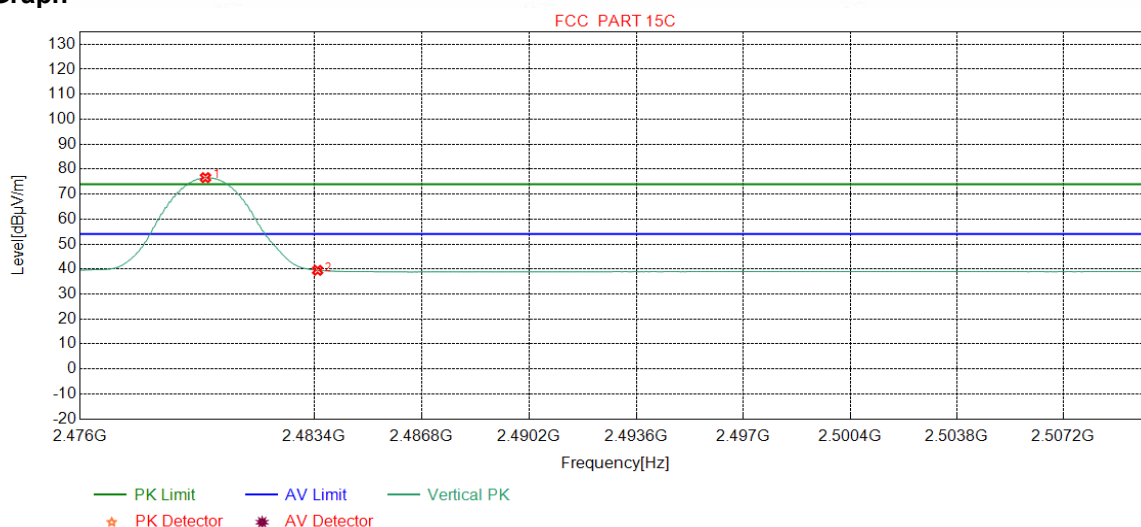

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	73.95	76.61	54.00	-22.61	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	36.81	39.46	54.00	14.54	Pass	Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix L) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz-30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Test Procedure:		Peak	1MHz	10Hz	Average
	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). - Test the EUT in the lowest channel ,the middle channel ,the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Radiated Spurious Emissions test Data:

During the test, the Radiated Spurious Emissions from 30MHz to 1GHz was performed in all modes with all channels, GFSK, Channel 2441MHz was selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiated Emission below 1GHz

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	46.2006	13.20	0.76	-31.81	38.71	20.86	40.00	19.14	Pass	H	PK
2	148.0608	7.48	1.44	-32.01	42.87	19.78	43.50	23.72	Pass	H	PK
3	240.0260	11.94	1.84	-31.90	42.30	24.18	46.00	21.82	Pass	H	PK
4	462.8573	16.41	2.57	-31.85	39.77	26.90	46.00	19.10	Pass	H	PK
5	600.0290	19.00	2.96	-31.50	43.94	34.40	46.00	11.60	Pass	H	PK
6	909.9750	22.16	3.60	-31.48	37.55	31.83	46.00	14.17	Pass	H	PK
7	54.8345	12.43	0.84	-31.97	39.90	21.20	40.00	18.80	Pass	V	PK
8	84.4224	8.12	1.06	-31.99	43.85	21.04	40.00	18.96	Pass	V	PK
9	150.0010	7.55	1.45	-32.01	44.46	21.45	43.50	22.05	Pass	V	PK
10	240.0260	11.94	1.84	-31.90	44.77	26.65	46.00	19.35	Pass	V	PK
11	600.0290	19.00	2.96	-31.50	44.55	35.01	46.00	10.99	Pass	V	PK
12	909.9750	22.16	3.60	-31.48	37.61	31.89	46.00	14.11	Pass	V	PK

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1143.0143	28.04	2.67	-42.94	56.25	44.02	74.00	29.98	Pass	H	PK
2	2971.9972	33.16	4.47	-43.11	50.38	44.90	74.00	29.10	Pass	H	PK
3	4804.0000	34.50	4.55	-42.80	48.51	44.76	74.00	29.24	Pass	H	PK
4	7206.0000	36.31	5.81	-42.16	45.35	45.31	74.00	28.69	Pass	H	PK
5	9608.0000	37.64	6.63	-42.10	46.72	48.89	74.00	25.11	Pass	H	PK
6	12010.000	39.31	7.60	-41.90	46.67	51.68	74.00	22.32	Pass	H	PK
7	1343.2343	28.24	2.81	-42.74	51.92	40.23	74.00	33.77	Pass	V	PK
8	3030.0020	33.21	4.87	-43.10	50.02	45.00	74.00	29.00	Pass	V	PK
9	4804.0000	34.50	4.55	-42.80	47.52	43.77	74.00	30.23	Pass	V	PK
10	7206.0000	36.31	5.81	-42.16	46.83	46.79	74.00	27.21	Pass	V	PK
11	9608.0000	37.64	6.63	-42.10	47.49	49.66	74.00	24.34	Pass	V	PK
12	12010.000	39.31	7.60	-41.90	46.61	51.62	74.00	22.38	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1174.0174	28.07	2.68	-42.92	54.50	42.33	74.00	31.67	Pass	H	PK
2	2947.1947	33.12	4.40	-43.11	51.06	45.47	74.00	28.53	Pass	H	PK
3	4882.0000	34.50	4.81	-42.80	46.12	42.63	74.00	31.37	Pass	H	PK
4	7323.0000	36.42	5.85	-42.13	46.20	46.34	74.00	27.66	Pass	H	PK
5	9764.0000	37.71	6.71	-42.10	47.08	49.40	74.00	24.60	Pass	H	PK
6	12205.000	39.42	7.67	-41.89	47.09	52.29	74.00	21.71	Pass	H	PK
7	1171.2171	28.07	2.68	-42.92	52.16	39.99	74.00	34.01	Pass	V	PK
8	3020.0013	33.21	4.89	-43.10	49.70	44.70	74.00	29.30	Pass	V	PK
9	4882.0000	34.50	4.81	-42.80	46.86	43.37	74.00	30.63	Pass	V	PK
10	7323.0000	36.42	5.85	-42.13	48.96	49.10	74.00	24.90	Pass	V	PK
11	9764.0000	37.71	6.71	-42.10	46.86	49.18	74.00	24.82	Pass	V	PK
12	12205.000	39.42	7.67	-41.89	45.72	50.92	74.00	23.08	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1169.0169	28.07	2.68	-42.92	54.85	42.68	74.00	31.32	Pass	H	PK
2	3213.0142	33.29	4.60	-43.11	50.95	45.73	74.00	28.27	Pass	H	PK
3	4960.0000	34.50	4.82	-42.80	46.41	42.93	74.00	31.07	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	46.46	46.74	74.00	27.26	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	45.49	47.95	74.00	26.05	Pass	H	PK
6	12400.000	39.54	7.86	-41.90	46.76	52.26	74.00	21.74	Pass	H	PK
7	1362.6363	28.26	2.84	-42.72	51.30	39.68	74.00	34.32	Pass	V	PK
8	2860.1860	32.98	4.26	-43.10	50.56	44.70	74.00	29.30	Pass	V	PK
9	4960.0000	34.50	4.82	-42.80	47.32	43.84	74.00	30.16	Pass	V	PK
10	7440.0000	36.54	5.85	-42.11	49.83	50.11	74.00	23.89	Pass	V	PK
11	9920.0000	37.77	6.79	-42.10	45.97	48.43	74.00	25.57	Pass	V	PK
12	12400.000	39.54	7.86	-41.90	46.52	52.02	74.00	21.98	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1174.6175	28.07	2.68	-42.92	56.13	43.96	74.00	30.04	Pass	H	PK
2	3055.0037	33.22	4.82	-43.10	50.85	45.79	74.00	28.21	Pass	H	PK
3	4804.0000	34.50	4.55	-42.80	47.65	43.90	74.00	30.10	Pass	H	PK
4	7206.0000	36.31	5.81	-42.16	46.26	46.22	74.00	27.78	Pass	H	PK
5	9608.0000	37.64	6.63	-42.10	47.07	49.24	74.00	24.76	Pass	H	PK
6	12010.000	39.31	7.60	-41.90	47.77	52.78	74.00	21.22	Pass	H	PK
7	1672.4672	29.54	3.17	-42.73	51.52	41.50	74.00	32.50	Pass	V	PK
8	2936.3936	33.10	4.39	-43.10	50.63	45.02	74.00	28.98	Pass	V	PK
9	4804.0000	34.50	4.55	-42.80	47.08	43.33	74.00	30.67	Pass	V	PK
10	7206.0000	36.31	5.81	-42.16	45.99	45.95	74.00	28.05	Pass	V	PK
11	9608.0000	37.64	6.63	-42.10	46.51	48.68	74.00	25.32	Pass	V	PK
12	12010.000	39.31	7.60	-41.90	45.97	50.98	74.00	23.02	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1386.8387	28.29	2.88	-42.70	51.26	39.73	74.00	34.27	Pass	H	PK
2	3075.0050	33.23	4.77	-43.10	50.75	45.65	74.00	28.35	Pass	H	PK
3	4882.0000	34.50	4.81	-42.80	47.63	44.14	74.00	29.86	Pass	H	PK
4	7323.0000	36.42	5.85	-42.13	47.72	47.86	74.00	26.14	Pass	H	PK
5	9764.0000	37.71	6.71	-42.10	46.16	48.48	74.00	25.52	Pass	H	PK
6	12205.000	39.42	7.67	-41.89	46.58	51.78	74.00	22.22	Pass	H	PK
7	1672.8673	29.54	3.17	-42.73	50.80	40.78	74.00	33.22	Pass	H	AV
8	3410.0273	33.36	4.53	-43.09	50.41	45.21	74.00	28.79	Pass	V	PK
9	4882.0000	34.50	4.81	-42.80	48.26	44.77	74.00	29.23	Pass	V	PK
10	7323.0000	36.42	5.85	-42.13	48.85	48.99	74.00	25.01	Pass	V	PK
11	9764.0000	37.71	6.71	-42.10	46.39	48.71	74.00	25.29	Pass	V	PK
12	12205.000	39.42	7.67	-41.89	45.76	50.96	74.00	23.04	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2480	
N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1363.2363	28.26	2.84	-42.71	51.79	40.18	74.00	33.82	Pass	H	PK
2	3168.0112	33.27	4.60	-43.10	50.40	45.17	74.00	28.83	Pass	H	PK
3	4960.0000	34.50	4.82	-42.80	47.50	44.02	74.00	29.98	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	47.15	47.43	74.00	26.57	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	46.52	48.98	74.00	25.02	Pass	H	PK
6	12400.0000	39.54	7.86	-41.90	46.47	51.97	74.00	22.03	Pass	H	PK
7	2028.3028	31.74	3.52	-43.19	51.09	43.16	74.00	30.84	Pass	V	PK
8	3082.0055	33.23	4.76	-43.10	50.45	45.34	74.00	28.66	Pass	V	PK
9	4960.0000	34.50	4.82	-42.80	48.25	44.77	74.00	29.23	Pass	V	PK
10	7440.0000	36.54	5.85	-42.11	46.98	47.26	74.00	26.74	Pass	V	PK
11	9920.0000	37.77	6.79	-42.10	46.88	49.34	74.00	24.66	Pass	V	PK
12	12400.0000	39.54	7.86	-41.90	46.40	51.90	74.00	22.10	Pass	V	PK

Note:

- 1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading - Correct Factor
 Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.