

FCC TEST REPORT

REPORT NO.: RF930607L08J

MODEL NO.: WL-660GS, BWIFI-PCI54SG

RECEIVED: Nov. 03, 2006

TESTED: Nov. 03 to 04, 2006

APPLICANT: SparkLAN Communications, Inc.

ADDRESS: 3F, No. 246, Sec.1, Neihu Road, Neihu Chiu,
Taipei, Taiwan, R.O.C. 114

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 76 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST SETUP	11
4.1.4	EUT OPERATING CONDITIONS	12
4.1.5	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	15
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2	TEST INSTRUMENTS	16
4.2.3	TEST PROCEDURES	17
4.2.4	TEST SETUP	18
4.2.5	EUT OPERATING CONDITIONS	18
4.2.6	TEST RESULTS	19
4.2.7	TEST RESULTS –DSSS	20
4.2.8	TEST RESULTS - OFDM	26
4.3	6dB BANDWIDTH MEASUREMENT	34
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	34
4.3.2	TEST INSTRUMENTS	34
4.3.3	TEST PROCEDURE	35
4.3.4	TEST SETUP	35
4.3.5	EUT OPERATING CONDITIONS	35
4.3.6	TEST RESULTS-DSSS	36
4.3.7	TEST RESULTS-OFDM	40
4.4	MAXIMUM PEAK OUTPUT POWER	45
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	45
4.4.2	TEST INSTRUMENTS	45



4.4.3	TEST PROCEDURES	46
4.4.4	TEST SETUP	46
4.4.5	EUT OPERATING CONDITIONS	46
4.4.6	TEST RESULTS- DSSS	47
4.4.7	TEST RESULTS- OFDM	48
4.5	POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	49
4.5.2	TEST INSTRUMENTS.....	49
4.5.3	TEST PROCEDURE.....	50
4.5.4	TEST SETUP	50
4.5.5	EUT OPERATING CONDITIONS	50
4.5.6	TEST RESULTS-DSSS	51
4.5.7	TEST RESULTS-OFDM	55
4.6	BAND EDGES MEASUREMENT	60
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	60
4.6.2	TEST INSTRUMENTS.....	60
4.6.3	TEST PROCEDURE.....	60
4.6.4	EUT OPERATING CONDITION.....	60
4.6.5	TEST RESULTS –DSSS	61
4.6.6	TEST RESULTS- OFDM (Normal).....	65
4.6.7	TEST RESULTS- OFDM (Turbo).....	69
4.7	ANTENNA REQUIREMENT	73
4.7.1	STANDARD APPLICABLE	73
4.7.2	ANTENNA CONNECTED CONSTRUCTION	73
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	74
6	INFORMATION ON THE TESTING LABORATORIES	76

1 CERTIFICATION

PRODUCT : Wireless Super-G PCI Adapter
BRAND NAME : sparklan, BeWAN
MODEL NO. : WL-660GS, BWIFI-PCI54SG
TESTED: Nov. 03 to 04, 2006
APPLICANT : SparkLAN Communications, Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WL-660GS) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Nov. 27, 2006
(Midoli Peng)

TECHNICAL ACCEPTANCE :  , **DATE:** Nov. 27, 2006
Responsible for RF (Hank Chung)

APPROVED BY :  , **DATE:** Nov. 27, 2006
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -20.43 dB at 0.181 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.8 dB at 2390.0MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Super-G PCI Adapter
MODEL NO.	WL-660GS, BWIFI-PCI54SG
POWER SUPPLY	5Vdc from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	IEEE 802.11b: 11/5.5/2/1Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode at channel 6: up to 108Mbps)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	125.893mW
ANTENNA TYPE	Dipole antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT has two model names which are identical to each other in all aspects except for the followings:

Brand	Model Name	Difference
sparklan	WL-660GS	For marketing
BeWAN	BWIFI-PCI54SG	

From the above models, model: **WL-660GS** was selected as representative model for the test and its data was recorded in this report.

2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		
6 (Turbo)	2437 MHz		

NOTE:

1. For conducted emission measurement, the channel 1, 6, 11 and Turbo 6 were pre-tested, The channel 11, worst case one, was chosen for final test.
2. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
3. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
4. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.
5. "Turbo Mode" allows data rates of up to 108Mbps. At data rates higher than 12Mbps the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power for turbo mode (12Mbps).

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless Super-G PCI Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	DELL	4600	00043-517-542-487	DoC
2	MONITOR	ADI	CM100	026058T10200628 A	DoC
3	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
4	MODEM	ACEEX	1414	0206026776	IFAXDM1414
5	KEYBOARD	BTC	KB-5200T	N23305028	E5XKB5122WTH0110
6	PS/2 MOUSE	BTC	M851	G00347024432	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.9m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.0 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.4 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.
6	1.4 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.

NOTE: All power cords of the above support units are non-shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

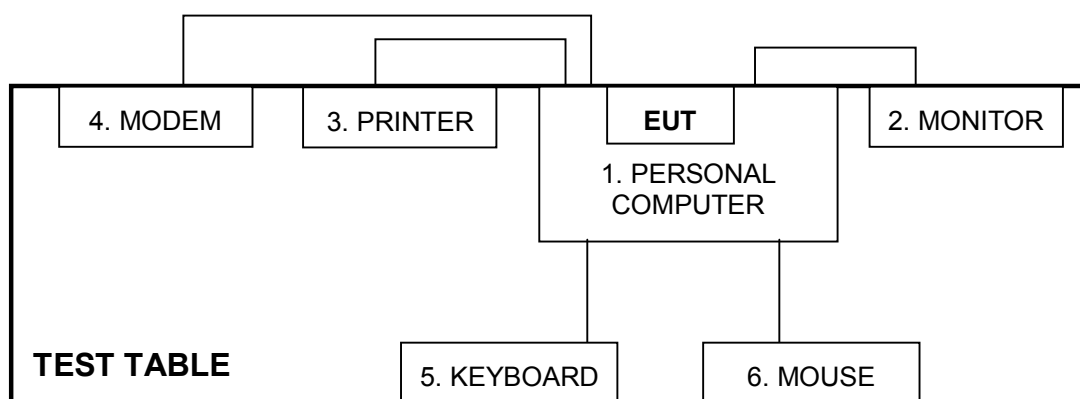

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Feb. 20, 2007
Line-Impedance Stabilization Network(for EUT)	ESH3-Z5	848773/004	Oct. 26, 2007
Line-Impedance Stabilization Network(for Peripheral)	ENV-216	100072	Oct. 26, 2007
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 19, 2007
Terminator	50	1	Oct. 30, 2007
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

4. TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 TEST SETUP

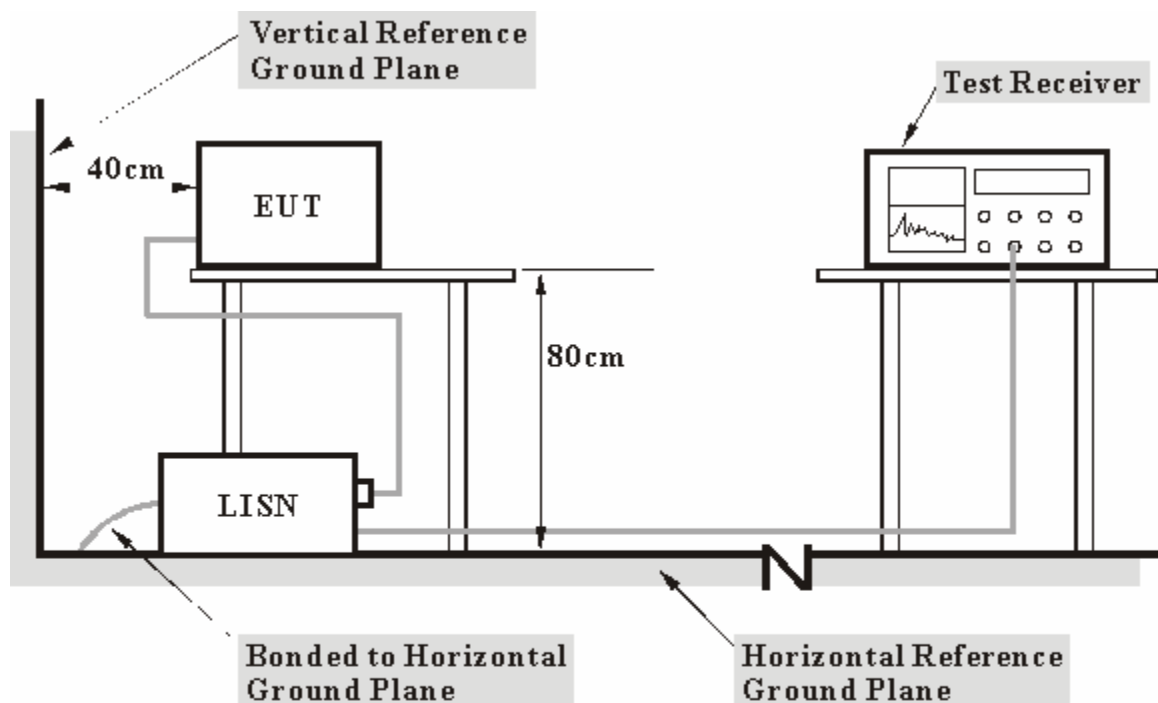

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.4 EUT OPERATING CONDITIONS


- a. Plug the EUT into the support unit 1 (Personal computer) which placed on a testing table.
- b. The support unit 1 (Personal computer) ran a test program "Art 51 b 8" to enable EUT under transmission condition continuously at specific channel frequency.
- c. Personal computer sends "H" messages to modem.
- d. Personal computer sends "H" messages to printer, and the printer prints them on paper.

4.1.5 TEST RESULTS

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 58%RH, 970 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.26	43.74	-	44.00	-	64.43	54.43	-20.43	-
2	0.361	0.22	32.86	-	33.08	-	58.71	48.71	-25.63	-
3	1.502	0.30	26.62	-	26.92	-	56.00	46.00	-29.08	-
4	8.367	0.69	28.07	-	28.76	-	60.00	50.00	-31.24	-
5	12.250	0.98	24.32	-	25.30	-	60.00	50.00	-34.70	-
6	22.570	1.40	28.61	-	30.01	-	60.00	50.00	-29.99	-


- NOTES:** (1) "-": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

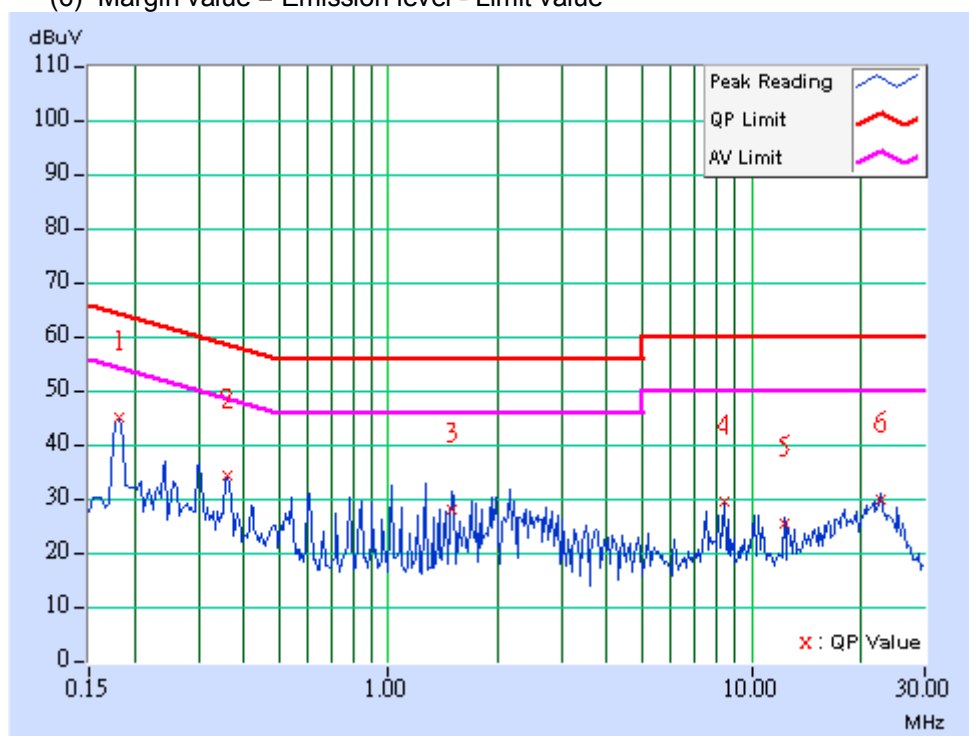

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 58%RH, 970 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.26	36.54	-	36.80	-	64.43	54.43	-27.63	-
2	0.361	0.22	28.94	-	29.16	-	58.71	48.71	-29.55	-
3	1.021	0.30	28.62	-	28.92	-	56.00	46.00	-27.08	-
4	2.224	0.31	28.41	-	28.72	-	56.00	46.00	-27.28	-
5	8.068	0.60	25.74	-	26.34	-	60.00	50.00	-33.66	-
6	21.293	1.20	23.30	-	24.50	-	60.00	50.00	-35.50	-

- NOTES:** (1) "": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

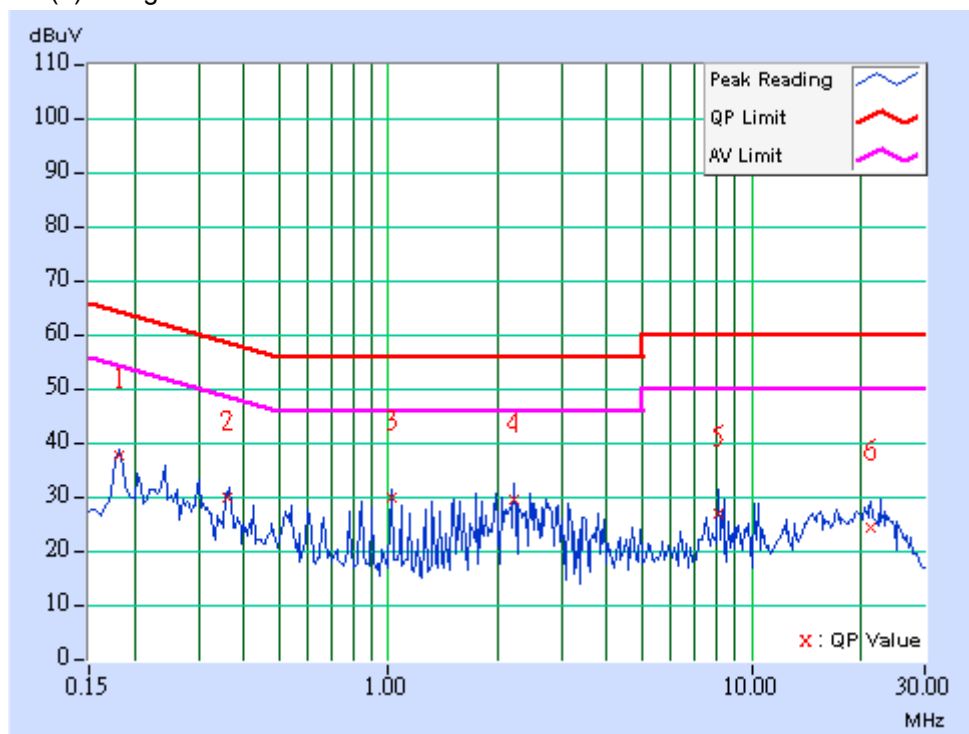

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 03, 2007
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB9168	138	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 27, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
R&S Loop Antenna	HFH2-Z2	881058/15	Nov. 29, 2007
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 14, 2007
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Jul. 15, 2007
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~40GHz)	1.88 dB


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

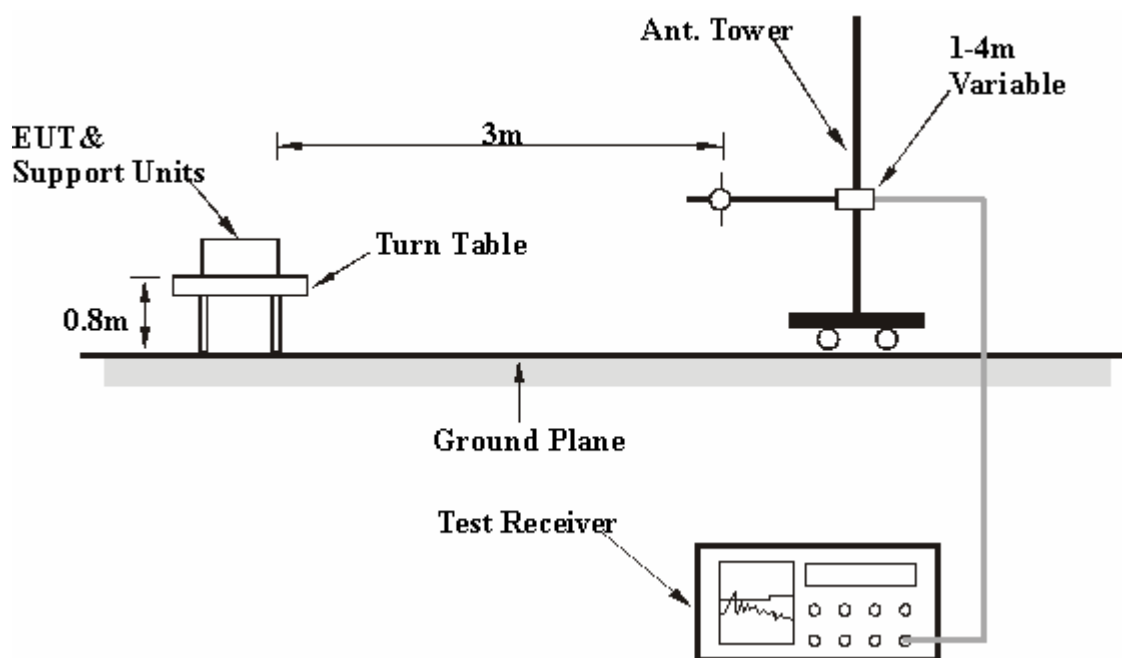

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.02	16.30 QP	43.50	-27.20	1.11 H	161	3.00	13.30
2	288.03	26.30 QP	46.00	-19.70	1.11 H	115	11.50	14.80
3	336.04	38.90 QP	46.00	-7.10	1.00 H	110	22.60	16.30
4	528.06	27.60 QP	46.00	-18.40	1.39 H	23	6.20	21.40
5	576.07	23.50 QP	46.00	-22.50	1.42 H	331	1.10	22.40
6	816.10	36.60 QP	46.00	-9.40	1.40 H	98	10.20	26.50
7	864.10	38.90 QP	46.00	-7.10	1.32 H	104	11.70	27.20
8	912.11	32.60 QP	46.00	-13.40	1.40 H	135	4.60	28.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.02	25.80 QP	43.50	-17.70	1.20 V	139	12.50	13.30
2	200.00	22.70 QP	43.50	-20.80	1.00 V	301	11.50	11.20
3	336.04	34.50 QP	46.00	-11.50	1.37 V	311	18.20	16.30
4	400.00	22.80 QP	46.00	-23.20	1.12 V	3	4.70	18.10
5	528.06	32.50 QP	46.00	-13.50	1.11 V	163	11.10	21.40
6	816.10	37.50 QP	46.00	-8.50	1.22 V	22	11.00	26.50
7	864.10	36.70 QP	46.00	-9.30	1.09 V	12	9.50	27.20
8	912.11	34.40 QP	46.00	-11.60	1.12 V	22	6.50	28.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS –DSSS

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 68%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	40.90 PK	74.00	-33.10	1.41 H	67	9.60	31.30
1	2320.00	33.30 AV	54.00	-20.70	1.41 H	67	2.00	31.30
2	2360.00	43.60 PK	74.00	-30.40	1.42 H	36	12.10	31.50
2	2360.00	32.90 AV	54.00	-21.10	1.42 H	36	1.40	31.50
3	2390.00	52.90 PK	74.00	-21.10	1.08 H	109	21.30	31.70
3	2390.00	40.10 AV	54.00	-13.90	1.08 H	109	8.40	31.70
4	*2412.00	107.70 PK			1.10 H	27	75.90	31.80
4	*2412.00	101.10 AV			1.10 H	27	69.30	31.80
5	3216.00	39.10 PK	74.00	-34.90	1.11 H	316	5.40	33.70
5	3216.00	28.90 AV	54.00	-25.10	1.11 H	316	-4.80	33.70
6	4824.00	41.50 PK	74.00	-32.50	1.36 H	257	4.00	37.50
6	4824.00	31.30 AV	54.00	-22.70	1.36 H	257	-6.20	37.50
7	7236.00	47.70 PK	74.00	-26.30	1.28 H	178	3.50	44.20
7	7236.00	37.40 AV	54.00	-16.60	1.28 H	178	-6.80	44.20
8	9648.00	49.50 PK	74.00	-24.50	1.08 H	109	1.80	47.70
8	9648.00	38.60 AV	54.00	-15.40	1.08 H	109	-9.10	47.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	51.30 PK	74.00	-22.70	1.00 V	52	20.00	31.30
1	2320.00	45.80 AV	54.00	-8.20	1.00 V	52	14.50	31.30
2	2360.00	54.50 PK	74.00	-19.50	1.00 V	46	23.00	31.50
2	2360.00	44.60 AV	54.00	-9.40	1.00 V	46	13.10	31.50
3	2390.00	61.40 PK	74.00	-12.60	1.15 V	0	29.80	31.70
3	2390.00	48.30 AV	54.00	-5.70	1.15 V	0	16.60	31.70
4	*2412.00	116.20 PK			1.15 V	0	84.40	31.80
4	*2412.00	109.30 AV			1.15 V	0	77.50	31.80
5	3216.00	42.90 PK	74.00	-31.10	1.05 V	16	9.20	33.70
5	3216.00	37.70 AV	54.00	-16.30	1.05 V	16	4.00	33.70
6	4824.00	42.10 PK	74.00	-31.90	1.02 V	354	4.60	37.50
6	4824.00	31.20 AV	54.00	-22.80	1.02 V	354	-6.30	37.50
7	7236.00	49.50 PK	74.00	-24.50	1.72 V	12	5.30	44.20
7	7236.00	39.10 AV	54.00	-14.90	1.72 V	12	-5.10	44.20
8	9648.00	50.40 PK	74.00	-23.60	1.08 V	179	2.70	47.70
8	9648.00	39.10 AV	54.00	-14.90	1.08 V	179	-8.60	47.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	41.50 PK	74.00	-32.50	1.09 H	13	11.10	30.40
1	2320.00	35.40 AV	54.00	-18.60	1.09 H	13	5.00	30.40
2	2360.00	45.80 PK	74.00	-28.20	1.00 H	19	15.20	30.60
2	2360.00	34.70 AV	54.00	-19.30	1.00 H	19	4.00	30.60
3	*2437.00	108.20 PK			1.28 H	17	78.20	30.00
3	*2437.00	100.80 AV			1.28 H	17	70.80	30.00
4	3250.00	39.60 PK	74.00	-34.40	1.29 H	270	7.30	32.30
4	3250.00	27.90 AV	54.00	-26.10	1.29 H	270	-4.40	32.30
5	4874.00	42.10 PK	74.00	-31.90	1.21 H	166	5.70	36.50
5	4874.00	31.30 AV	54.00	-22.70	1.21 H	166	-5.10	36.50
6	7311.00	48.50 PK	74.00	-25.50	1.12 H	103	6.80	41.80
6	7311.00	37.40 AV	54.00	-16.60	1.12 H	103	-4.30	41.80
7	9748.00	49.30 PK	74.00	-24.70	1.00 H	67	4.70	44.60
7	9748.00	38.50 AV	54.00	-15.50	1.00 H	67	-6.10	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	50.80 PK	74.00	-23.20	1.21 V	31	20.40	30.40
1	2320.00	45.50 AV	54.00	-8.50	1.21 V	31	15.10	30.40
2	2360.00	53.60 PK	74.00	-20.40	1.21 V	29	23.00	30.60
2	2360.00	44.10 AV	54.00	-9.90	1.21 V	29	13.50	30.60
3	*2437.00	117.60 PK			1.19 V	31	87.70	30.00
3	*2437.00	110.80 AV			1.19 V	31	80.80	30.00
4	3250.00	42.40 PK	74.00	-31.60	1.24 V	32	10.10	32.30
4	3250.00	33.70 AV	54.00	-20.30	1.24 V	32	1.40	32.30
5	4874.00	42.10 PK	74.00	-31.90	1.08 V	64	5.60	36.50
5	4874.00	31.10 AV	54.00	-22.90	1.08 V	64	-5.40	36.50
6	7311.00	49.20 PK	74.00	-24.80	1.60 V	17	7.40	41.80
6	7311.00	37.90 AV	54.00	-16.10	1.60 V	17	-3.90	41.80
7	9748.00	49.90 PK	74.00	-24.10	1.25 V	79	5.30	44.60
7	9748.00	39.60 AV	54.00	-14.40	1.25 V	79	-5.00	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	41.00 PK	74.00	-33.00	1.09 H	11	9.70	31.30
1	2320.00	33.80 AV	54.00	-20.20	1.09 H	11	2.50	31.30
2	2360.00	45.00 PK	74.00	-29.00	1.09 H	16	13.50	31.50
2	2360.00	34.90 AV	54.00	-19.10	1.09 H	16	3.40	31.50
3	*2462.00	109.80 PK			1.05 H	29	77.80	32.00
3	*2462.00	102.90 AV			1.05 H	29	70.90	32.00
4	2483.50	58.80 PK	74.00	-15.20	1.05 H	29	26.70	32.10
4	2483.50	43.20 AV	54.00	-10.80	1.05 H	29	11.10	32.10
5	3282.00	39.40 PK	74.00	-34.60	1.13 H	12	5.60	33.80
5	3282.00	28.70 AV	54.00	-25.30	1.13 H	12	-5.10	33.80
6	4924.00	43.20 PK	74.00	-30.80	1.26 H	95	5.50	37.70
6	4924.00	31.60 AV	54.00	-22.40	1.26 H	95	-6.10	37.70
7	7386.00	48.60 PK	74.00	-25.40	1.12 H	155	3.80	44.80
7	7386.00	37.70 AV	54.00	-16.30	1.12 H	155	-7.10	44.80
8	9848.00	50.80 PK	74.00	-23.20	1.00 H	244	2.90	47.90
8	9848.00	39.40 AV	54.00	-14.60	1.00 H	244	-8.50	47.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	51.10 PK	74.00	-22.90	1.21 V	28	19.80	31.30
1	2320.00	44.90 AV	54.00	-9.10	1.21 V	28	13.60	31.30
2	2360.00	54.20 PK	74.00	-19.80	1.18 V	30	22.70	31.50
2	2360.00	44.00 AV	54.00	-10.00	1.18 V	30	12.50	31.50
3	*2462.00	114.90 PK			1.11 V	0	82.90	32.00
3	*2462.00	108.00 AV			1.11 V	0	76.00	32.00
4	2483.50	63.90 PK	74.00	-10.10	1.11 V	0	31.80	32.10
4	2483.50	48.30 AV	54.00	-5.70	1.11 V	0	16.20	32.10
5	3282.00	41.20 PK	74.00	-32.80	1.40 V	16	7.40	33.80
5	3282.00	31.70 AV	54.00	-22.30	1.40 V	16	-2.10	33.80
6	4924.00	42.60 PK	74.00	-31.40	1.15 V	312	4.90	37.70
6	4924.00	31.30 AV	54.00	-22.70	1.15 V	312	-6.40	37.70
7	7386.00	49.70 PK	74.00	-24.30	1.16 V	9	4.90	44.80
7	7386.00	39.30 AV	54.00	-14.70	1.16 V	9	-5.50	44.80
8	9848.00	50.20 PK	74.00	-23.80	1.09 V	43	2.30	47.90
8	9848.00	39.40 AV	54.00	-14.60	1.09 V	43	-8.50	47.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.2.8 TEST RESULTS - OFDM

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	42.80 PK	74.00	-31.20	1.00 H	310	11.50	31.30
1	2320.00	34.50 AV	54.00	-19.50	1.00 H	310	3.20	31.30
2	2360.00	46.20 PK	74.00	-27.80	1.11 H	38	14.70	31.50
2	2360.00	35.60 AV	54.00	-18.40	1.11 H	38	4.10	31.50
3	2390.00	58.70 PK	74.00	-15.30	1.13 H	38	27.00	31.70
3	2390.00	45.40 AV	54.00	-8.60	1.13 H	38	13.70	31.70
4	*2412.00	103.50 PK			1.13 H	38	71.70	31.80
4	*2412.00	95.00 AV			1.13 H	38	63.20	31.80
5	3216.00	40.90 PK	74.00	-33.10	1.00 H	266	7.20	33.70
5	3216.00	32.40 AV	54.00	-21.60	1.00 H	266	-1.30	33.70
6	4824.00	41.80 PK	74.00	-32.20	1.38 H	116	4.30	37.50
6	4824.00	31.50 AV	54.00	-22.50	1.38 H	116	-6.00	37.50
7	7236.00	48.10 PK	74.00	-25.90	1.23 H	238	3.90	44.20
7	7236.00	37.30 AV	54.00	-16.70	1.23 H	238	-6.90	44.20
8	9648.00	50.10 PK	74.00	-23.90	1.08 H	312	2.40	47.70
8	9648.00	39.00 AV	54.00	-15.00	1.08 H	312	-8.70	47.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	53.50 PK	74.00	-20.50	1.24 V	23	22.20	31.30
1	2320.00	47.80 AV	54.00	-6.20	1.24 V	23	16.50	31.30
2	2360.00	56.70 PK	74.00	-17.30	1.20 V	29	25.20	31.50
2	2360.00	47.00 AV	54.00	-7.00	1.20 V	29	15.50	31.50
3	2390.00	65.10 PK	74.00	-8.90	1.42 V	214	33.40	31.70
3	2390.00	53.20 AV	54.00	-0.80	1.42 V	214	21.50	31.70
4	*2412.00	109.90 PK			1.42 V	214	78.10	31.80
4	*2412.00	102.80 AV			1.42 V	214	71.00	31.80
5	3216.00	46.00 PK	74.00	-28.00	1.05 V	19	12.30	33.70
5	3216.00	42.40 AV	54.00	-11.60	1.05 V	19	8.70	33.70
6	4824.00	42.50 PK	74.00	-31.50	1.00 V	22	5.00	37.50
6	4824.00	31.40 AV	54.00	-22.60	1.00 V	22	-6.10	37.50
7	7236.00	45.20 PK	74.00	-28.80	1.00 V	314	1.00	44.20
7	7236.00	35.20 AV	54.00	-18.80	1.00 V	314	-9.00	44.20
8	9648.00	50.00 PK	74.00	-24.00	1.09 V	86	2.30	47.70
8	9648.00	39.00 AV	54.00	-15.00	1.09 V	86	-8.70	47.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	42.70 PK	74.00	-31.30	1.70 H	52	12.30	30.40
1	2320.00	34.60 AV	54.00	-19.40	1.70 H	52	4.20	30.40
2	2370.00	45.60 PK	74.00	-28.40	1.69 H	54	15.00	30.70
2	2370.00	34.20 AV	54.00	-19.80	1.69 H	54	3.60	30.70
3	*2437.00	107.80 PK			1.09 H	25	77.80	30.00
3	*2437.00	99.50 AV			1.09 H	25	69.50	30.00
4	3606.00	47.10 PK	74.00	-26.90	1.83 H	143	13.90	33.20
4	3606.00	42.70 AV	54.00	-11.30	1.83 H	143	9.50	33.20
5	4874.00	42.90 PK	74.00	-31.10	1.42 H	268	6.50	36.50
5	4874.00	32.80 AV	54.00	-21.20	1.42 H	268	-3.70	36.50
6	7311.00	49.40 PK	74.00	-24.60	1.27 H	239	7.60	41.80
6	7311.00	42.70 AV	54.00	-11.30	1.27 H	239	1.00	41.80
7	9748.00	49.50 PK	74.00	-24.50	1.02 H	163	4.90	44.60
7	9748.00	38.70 AV	54.00	-15.30	1.02 H	163	-5.90	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	50.00 PK	74.00	-24.00	1.17 V	3	19.60	30.40
1	2320.00	44.10 AV	54.00	-9.90	1.17 V	3	13.70	30.40
2	2370.00	53.60 PK	74.00	-20.40	1.18 V	21	22.90	30.70
2	2370.00	41.80 AV	54.00	-12.20	1.18 V	21	11.10	30.70
3	*2437.00	115.20 PK			1.16 V	336	85.20	30.00
3	*2437.00	106.60 AV			1.16 V	336	76.70	30.00
4	3606.00	45.60 PK	74.00	-28.40	1.30 V	203	12.40	33.20
4	3606.00	40.90 AV	54.00	-13.10	1.30 V	203	7.60	33.20
5	4874.00	41.90 PK	74.00	-32.10	1.02 V	228	5.40	36.50
5	4874.00	31.20 AV	54.00	-22.80	1.02 V	228	-5.30	36.50
6	7311.00	48.40 PK	74.00	-25.60	1.10 V	337	6.70	41.80
6	7311.00	36.00 AV	54.00	-18.00	1.10 V	337	-5.80	41.80
7	9748.00	50.10 PK	74.00	-23.90	1.02 V	249	5.50	44.60
7	9748.00	39.10 AV	54.00	-14.90	1.02 V	249	-5.50	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	24 deg. C, 69%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	42.20 PK	74.00	-31.80	1.11 H	14	10.90	31.30
1	2320.00	36.60 AV	54.00	-17.40	1.11 H	14	5.30	31.30
2	2360.00	44.20 PK	74.00	-29.80	1.49 H	40	12.70	31.50
2	2360.00	34.30 AV	54.00	-19.70	1.49 H	40	2.80	31.50
3	*2462.00	101.80 PK			1.25 H	18	69.80	32.00
3	*2462.00	94.80 AV			1.25 H	18	62.80	32.00
4	2483.50	59.10 PK	74.00	-14.90	1.25 H	18	26.90	32.10
4	2483.50	46.50 AV	54.00	-7.50	1.25 H	18	14.40	32.10
5	3283.00	40.30 PK	74.00	-33.70	1.00 H	121	6.50	33.80
5	3283.00	30.90 AV	54.00	-23.10	1.00 H	121	-2.90	33.80
6	4924.00	43.00 PK	74.00	-31.00	1.29 H	73	5.30	37.70
6	4924.00	31.40 AV	54.00	-22.60	1.29 H	73	-6.30	37.70
7	7386.00	48.40 PK	74.00	-25.60	1.10 H	197	3.60	44.80
7	7386.00	37.70 AV	54.00	-16.30	1.10 H	197	-7.10	44.80
8	9848.00	50.20 PK	74.00	-23.80	1.01 H	257	2.30	47.90
8	9848.00	39.40 AV	54.00	-14.60	1.01 H	257	-8.50	47.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	49.80 PK	74.00	-24.20	1.16 V	5	18.50	31.30
1	2320.00	43.60 AV	54.00	-10.40	1.16 V	5	12.30	31.30
2	2360.00	54.00 PK	74.00	-20.00	1.15 V	3	22.50	31.50
2	2360.00	44.00 AV	54.00	-10.00	1.15 V	3	12.50	31.50
3	*2462.00	109.40 PK			1.13 V	0	77.40	32.00
3	*2462.00	101.30 AV			1.13 V	0	69.30	32.00
4	2483.50	66.70 PK	74.00	-7.30	1.13 V	0	34.60	32.10
4	2483.50	53.00 AV	54.00	-1.00	1.13 V	0	20.90	32.10
5	3283.00	42.90 PK	74.00	-31.10	1.39 V	15	9.10	33.80
5	3283.00	35.80 AV	54.00	-18.20	1.39 V	15	2.00	33.80
6	4924.00	42.60 PK	74.00	-31.40	1.10 V	14	4.90	37.70
6	4924.00	31.40 AV	54.00	-22.60	1.10 V	14	-6.30	37.70
7	7386.00	47.90 PK	74.00	-26.10	1.02 V	275	3.10	44.80
7	7386.00	36.80 AV	54.00	-17.20	1.02 V	275	-8.00	44.80
8	9848.00	51.20 PK	74.00	-22.80	1.12 V	186	3.30	47.90
8	9848.00	39.50 AV	54.00	-14.50	1.12 V	186	-8.40	47.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	Wireless Super-G PCI Adapter	MODEL	WL-660GS
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 68%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2025.00	40.70 PK	74.00	-33.30	1.12 H	258	10.80	29.90
1	2025.00	35.50 AV	54.00	-18.50	1.12 H	258	5.60	29.90
2	2390.00	56.90 PK	74.00	-17.10	1.28 H	30	25.20	31.70
2	2390.00	46.70 AV	54.00	-7.30	1.28 H	30	15.00	31.70
3	*2437.00	104.30 PK			1.28 H	30	72.40	31.90
3	*2437.00	96.10 AV			1.28 H	30	64.20	31.90
4	2483.50	57.70 PK	74.00	-16.30	1.28 H	30	25.60	32.10
4	2483.50	45.80 AV	54.00	-8.20	1.28 H	30	13.70	32.10
5	4874.00	43.30 PK	74.00	-30.70	1.15 H	1	5.70	37.60
5	4874.00	31.90 AV	54.00	-22.10	1.15 H	1	-5.70	37.60
6	7311.00	49.30 PK	74.00	-24.70	1.27 H	142	4.80	44.50
6	7311.00	38.10 AV	54.00	-15.90	1.27 H	142	-6.40	44.50
7	9748.00	50.80 PK	74.00	-23.20	1.22 H	0	3.00	47.80
7	9748.00	39.60 AV	54.00	-14.40	1.22 H	0	-8.20	47.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2025.00	47.40 PK	74.00	-26.60	1.12 V	0	17.50	29.90
1	2025.00	45.00 AV	54.00	-9.00	1.12 V	0	15.10	29.90
2	2390.00	63.70 PK	74.00	-10.30	1.11 V	10	32.00	31.70
2	2390.00	53.20 AV	54.00	-0.80	1.11 V	10	21.50	31.70
3	*2437.00	111.10 PK			1.11 V	10	79.20	31.90
3	*2437.00	102.60 AV			1.11 V	10	70.70	31.90
4	2483.69	64.50 PK	74.00	-9.50	1.11 V	10	32.40	32.10
4	2483.69	52.30 AV	54.00	-1.70	1.11 V	10	20.20	32.10
5	4874.00	42.90 PK	74.00	-31.10	1.17 V	334	5.30	37.60
5	4874.00	32.20 AV	54.00	-21.80	1.17 V	334	-5.40	37.60
6	7311.00	49.00 PK	74.00	-25.00	1.34 V	78	4.50	44.50
6	7311.00	38.00 AV	54.00	-16.00	1.34 V	78	-6.50	44.50
7	9748.00	50.30 PK	74.00	-23.70	1.10 V	13	2.50	47.80
7	9748.00	39.70 AV	54.00	-14.30	1.10 V	13	-8.10	47.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS-DSSS


EUT	Wireless Super-G PCI Adapter		
MODEL	WL-660GS	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.83	0.5	PASS
6	2437	12.04	0.5	PASS
11	2462	12.18	0.5	PASS


CH1

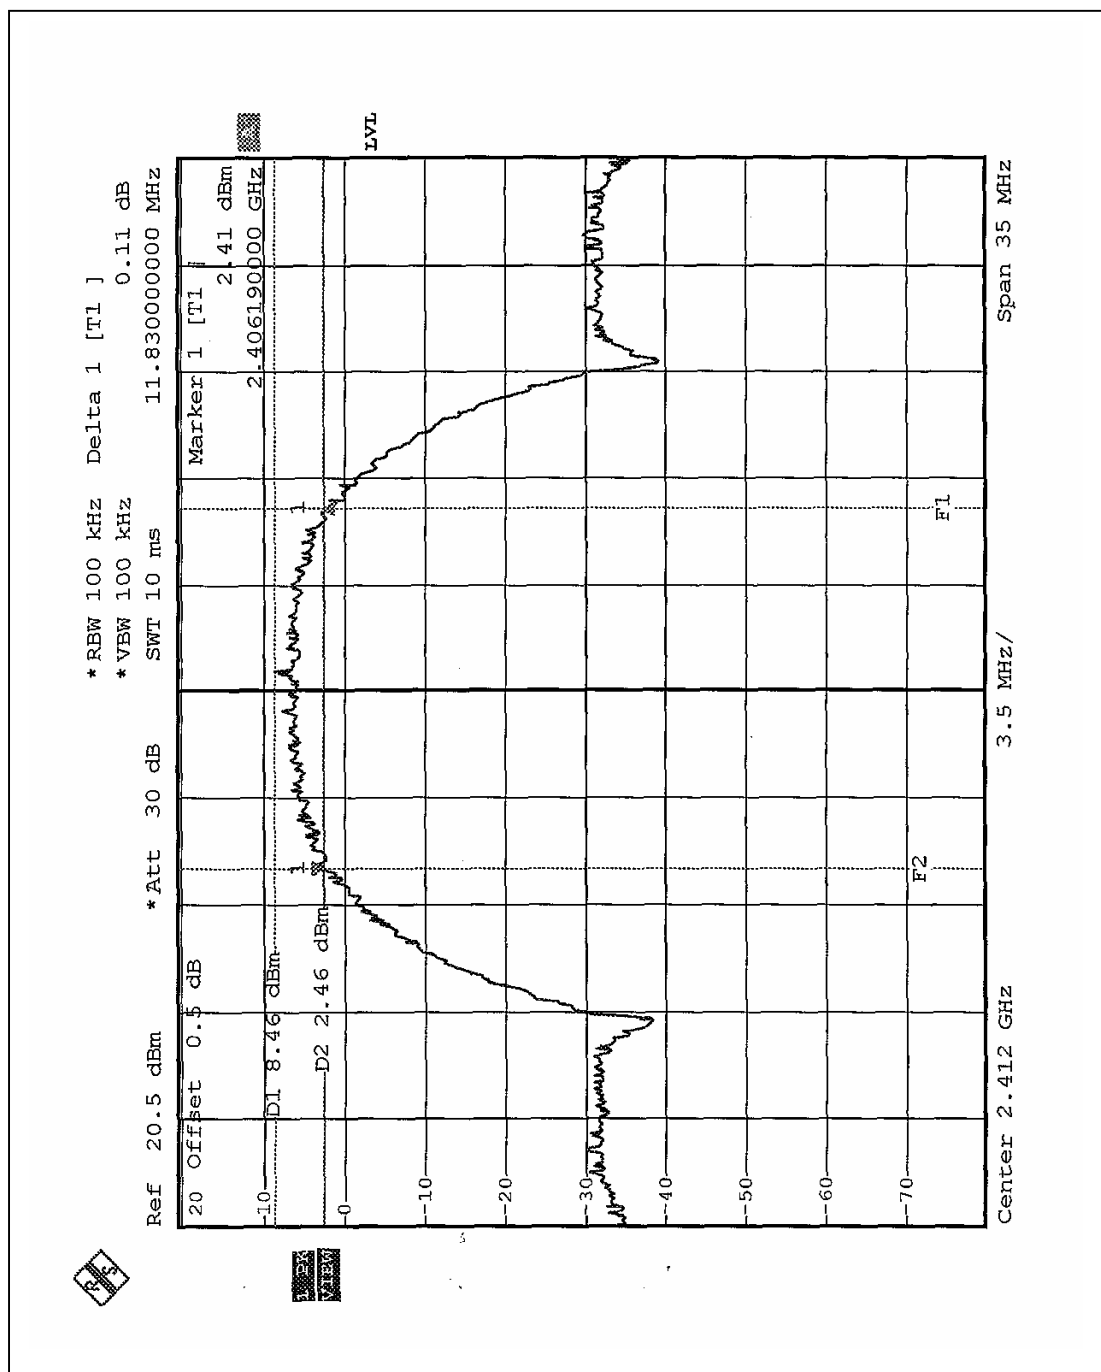

CH6

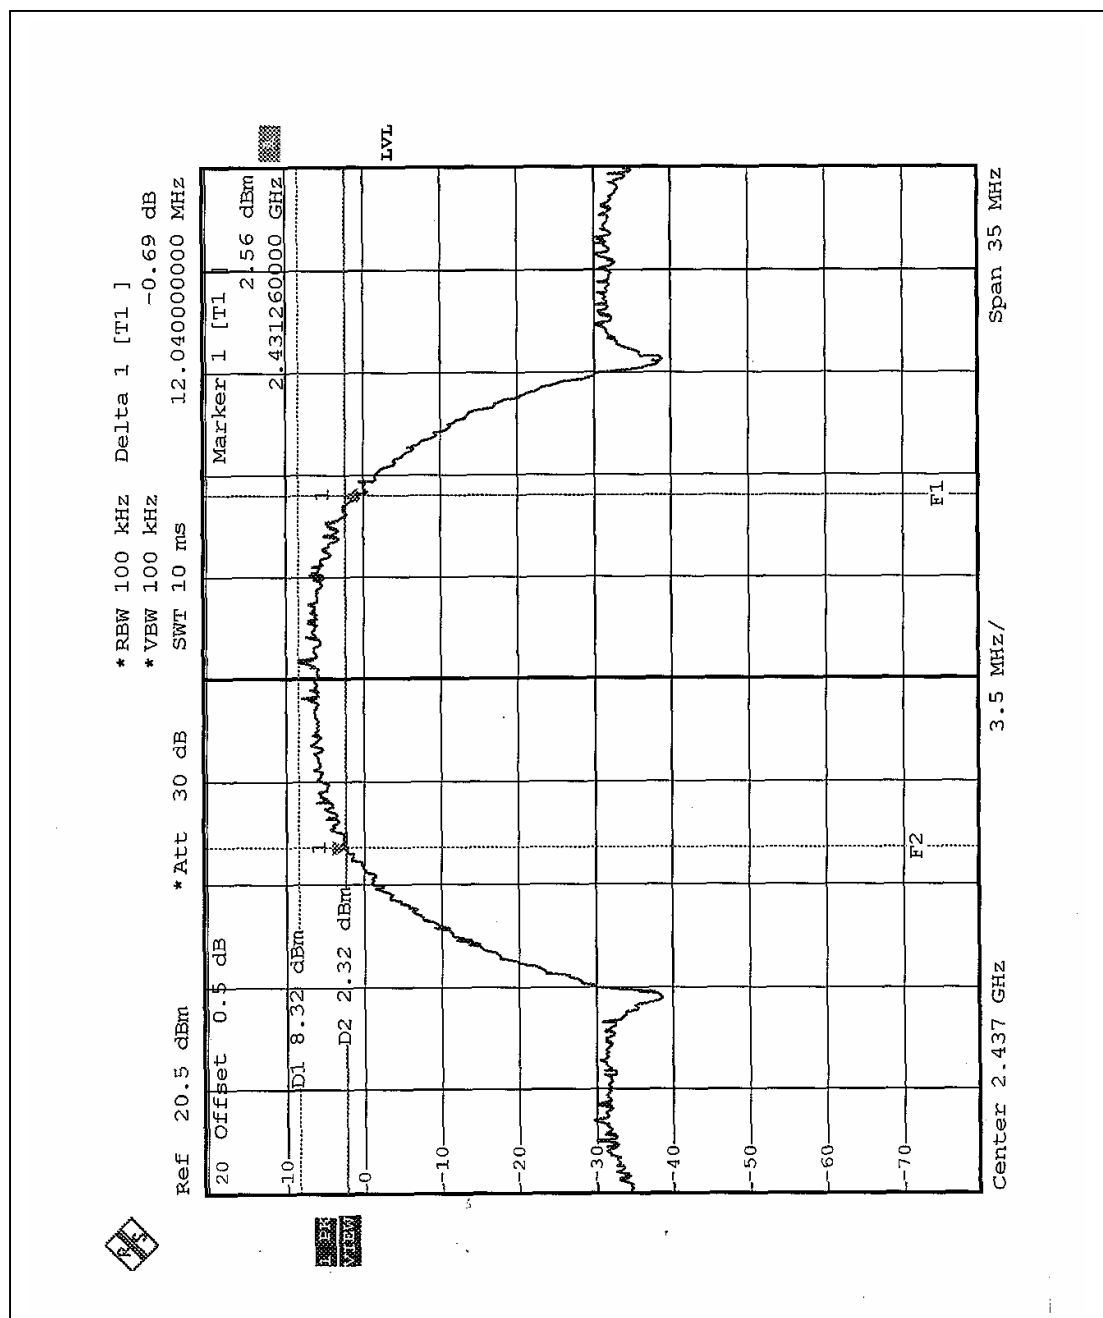

CH11

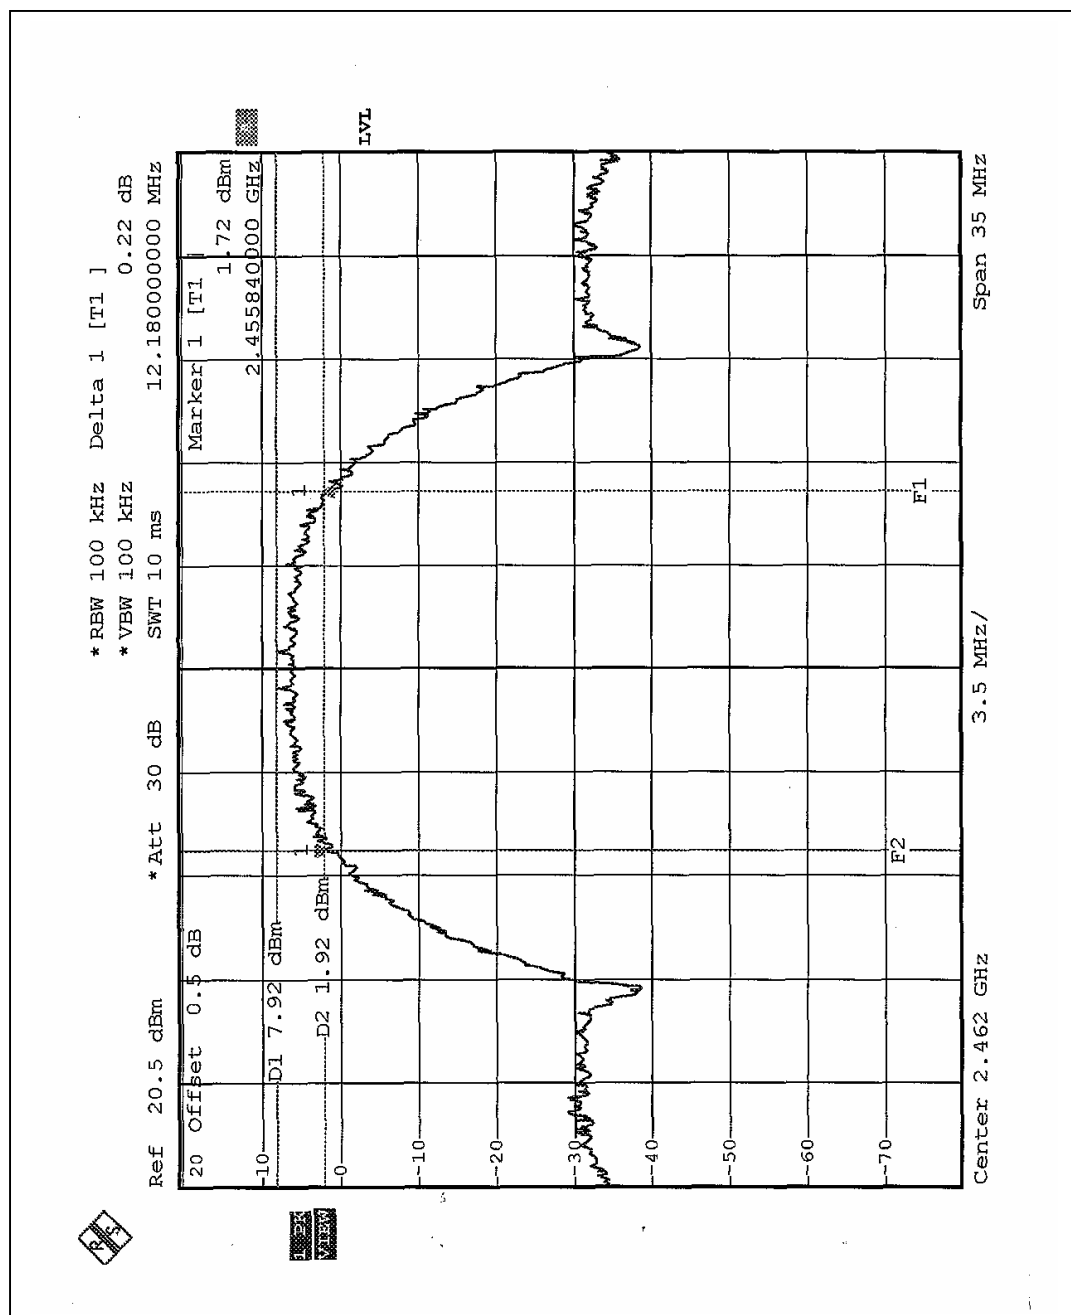

4.3.7 TEST RESULTS-OFDM


EUT	Wireless Super-G PCI Adapter		
MODEL	WL-660GS	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.45	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.38	0.5	PASS
Turbo 6	2437	31.32	0.5	PASS


*RBW 100 kHz Delta 1 [T1]
 *VBW 100 kHz -1.14 dB
 Ref 20.5 dBm *Att 30 dB 16.450000000 MHz
 20 Offset 0.5 dB
 D1 1.66 dBm
 D2 4.34 dBm
 F1
 F2
 Center 2.412 GHz 3.5 MHz/
 Span 35 MHz

*RBW 100 kHz Delta 1 [T1]
 *VBW 100 kHz -1.01 dB
 *Att 30 dB
 *SWT 10 ms
 Ref 20.5 dBm
 20 Offset 0.5 dB
 D1 4.93 dBm
 D2 -1.07 dBm
 Marker 1 [T1]
 0.14 dBm
 2.42880000 GHz
 LVL
 F1
 F2
 Center 2.437 GHz
 Span 35 MHz

CH11

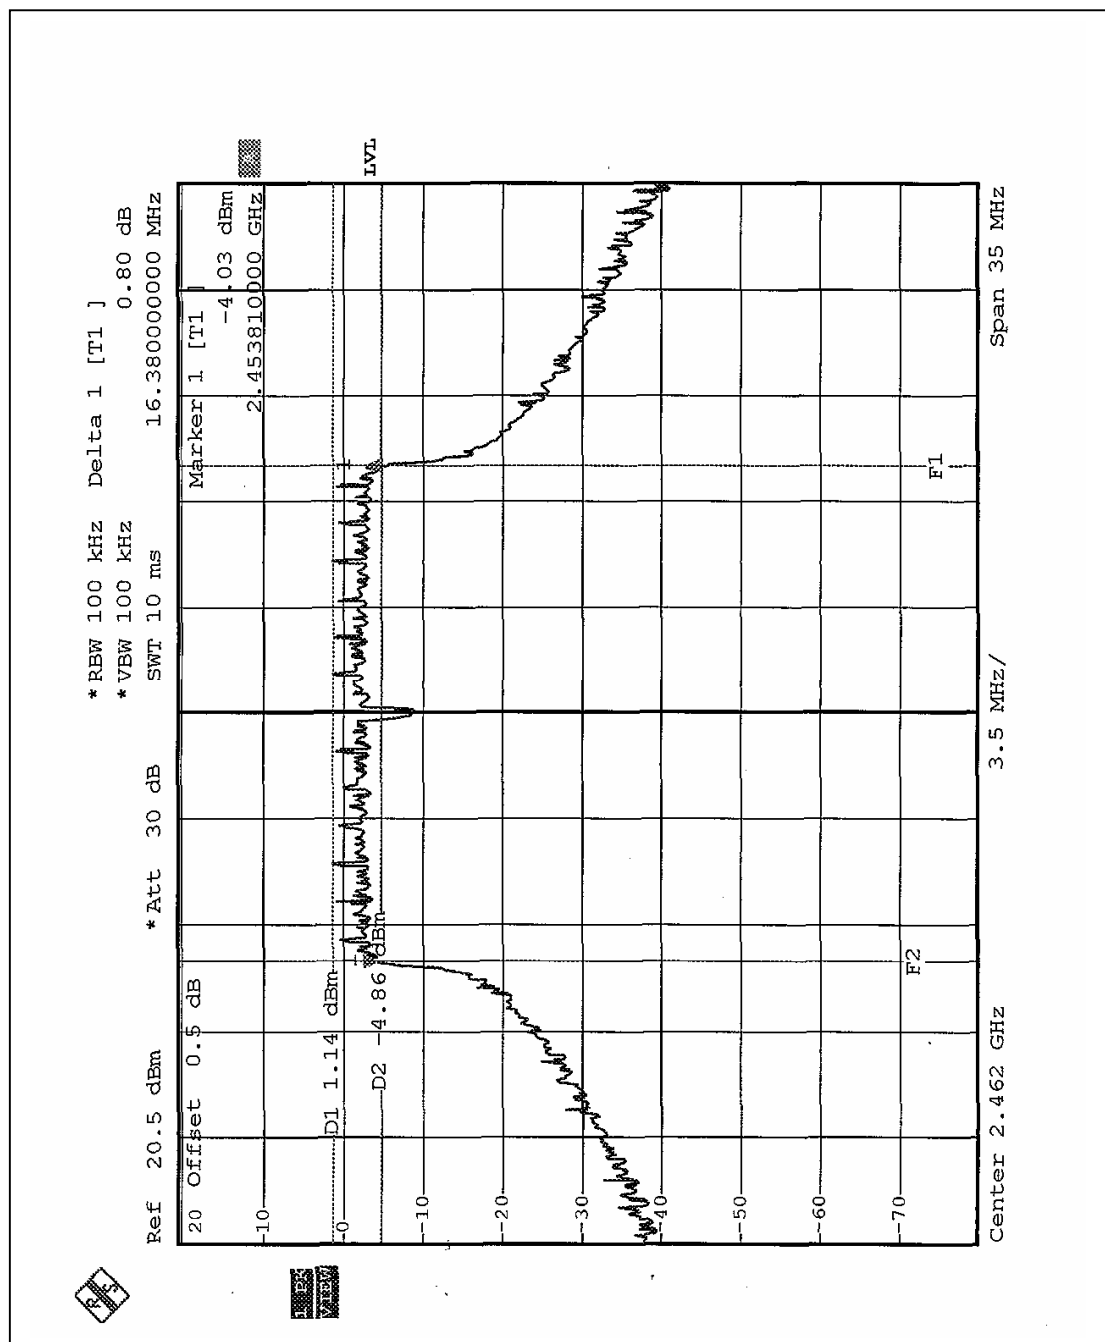

Turbo CH6

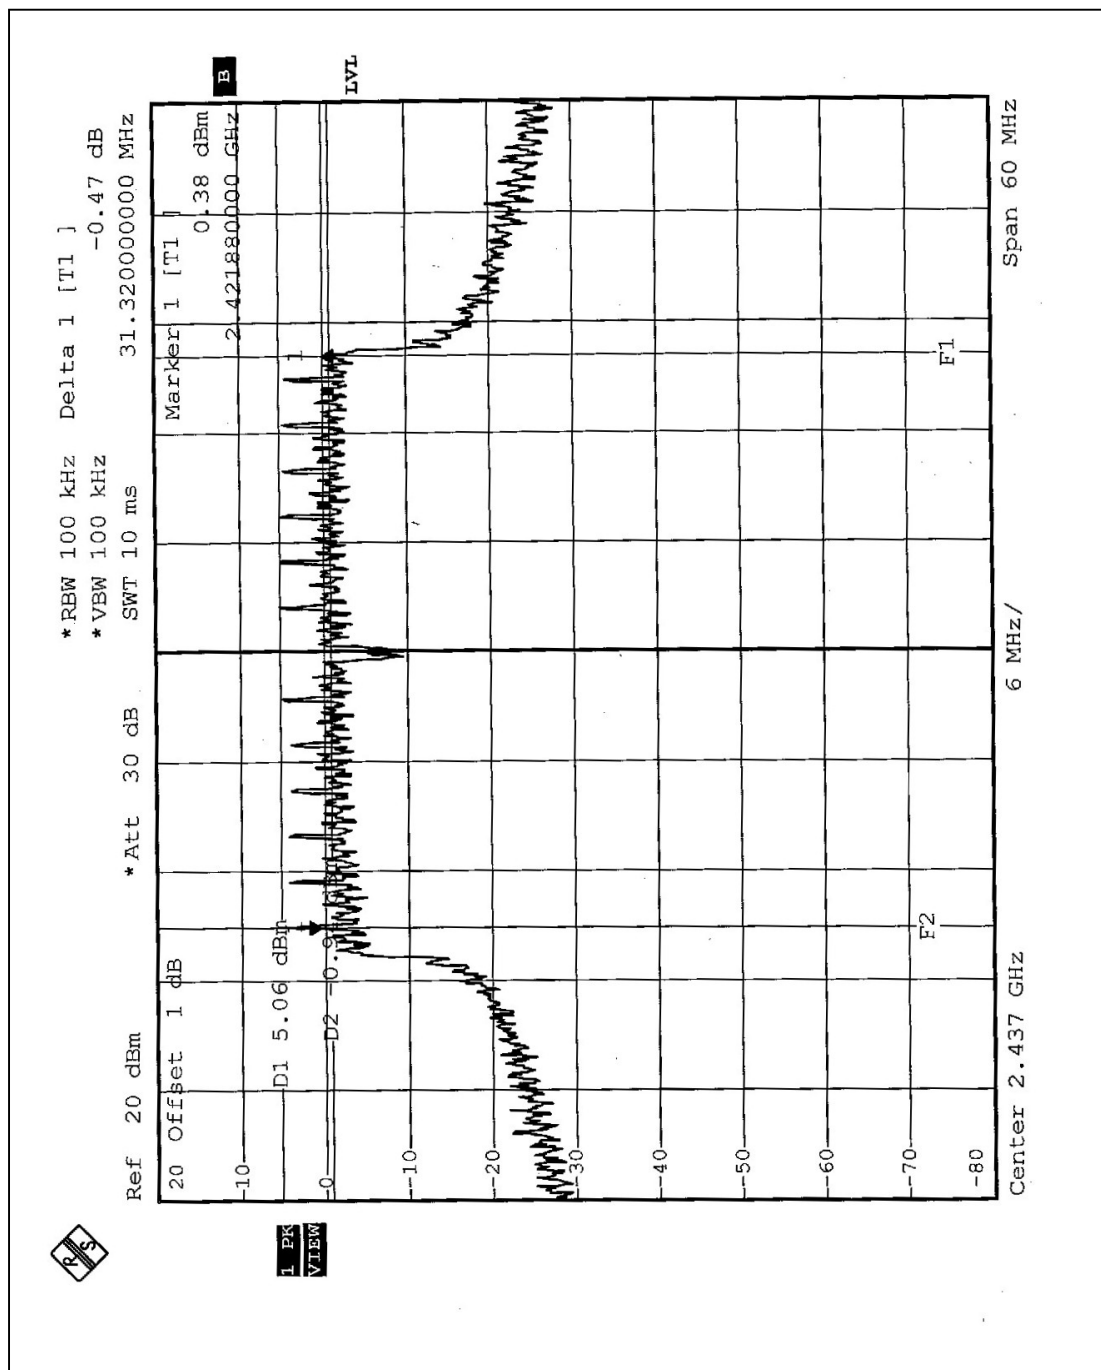

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 16, 2006
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 08, 2006
TEKTRONIX OSCILLOSCOPE	TDS 220	B027241	Aug. 14, 2007
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS- DSSS

EUT	Wireless Super-G PCI Adapter		
MODEL	WL-660GS	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	79.433	19.0	30	PASS
6	2437	77.625	18.9	30	PASS
11	2462	75.858	18.8	30	PASS

4.4.7 TEST RESULTS- OFDM

EUT	Wireless Super-G PCI Adapter		
MODEL	WL-660GS	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	69.183	18.4	30	PASS
6	2437	125.893	21.0	30	PASS
11	2462	64.565	18.1	30	PASS
Turbo 6	2437	100	20.0	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

4.5.6 TEST RESULTS-DSSS


EUT	Wireless Super-G PCI Adapter		
MODEL	WL-660GS	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-1.68	8	PASS
6	2437	-2.97	8	PASS
11	2462	-2.81	8	PASS


CH1

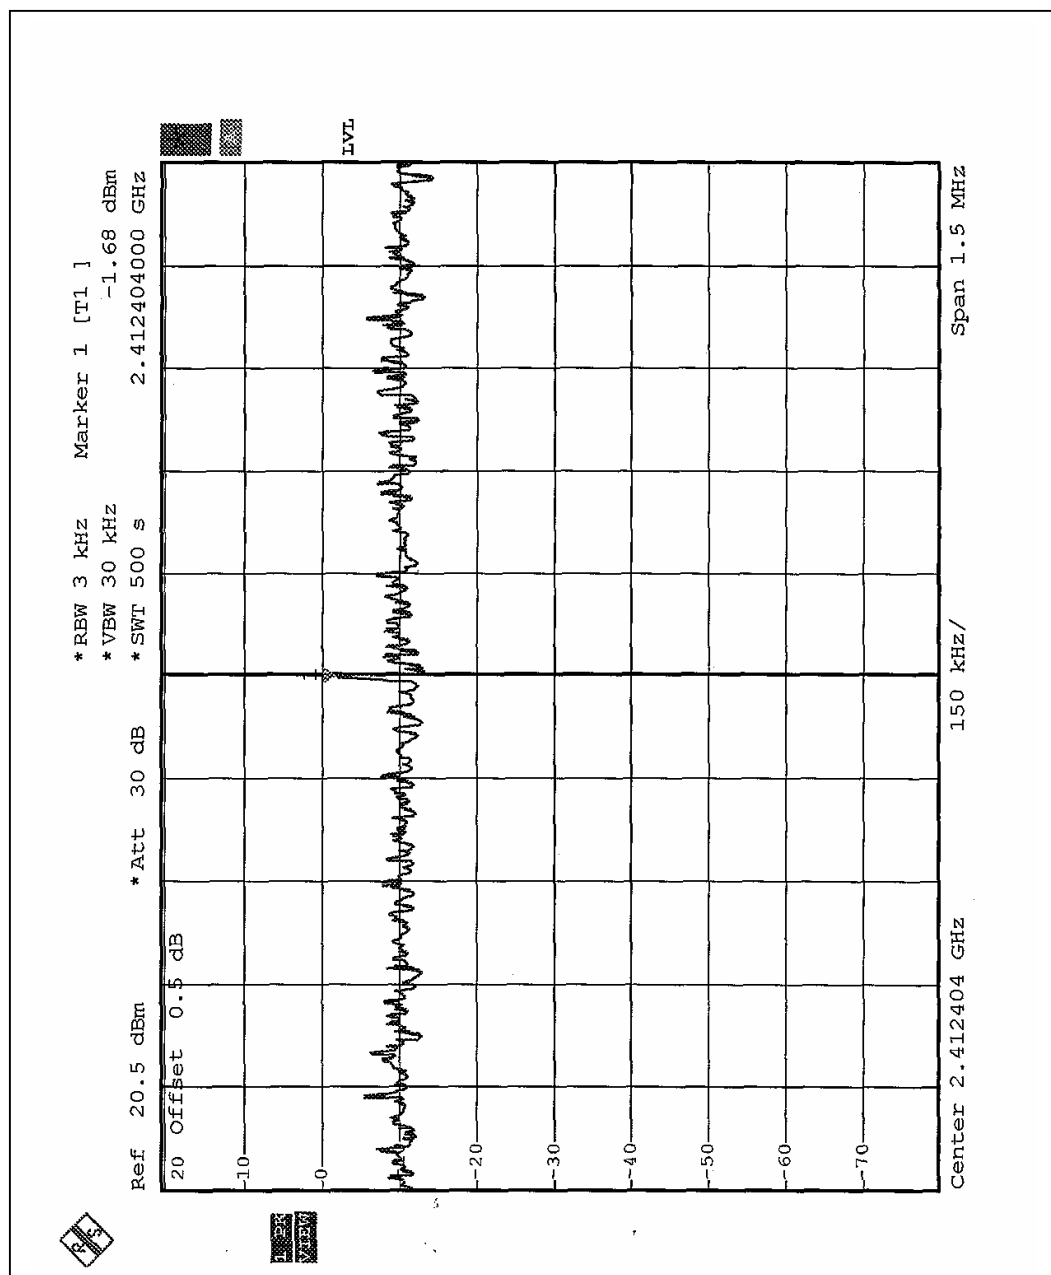

CH6

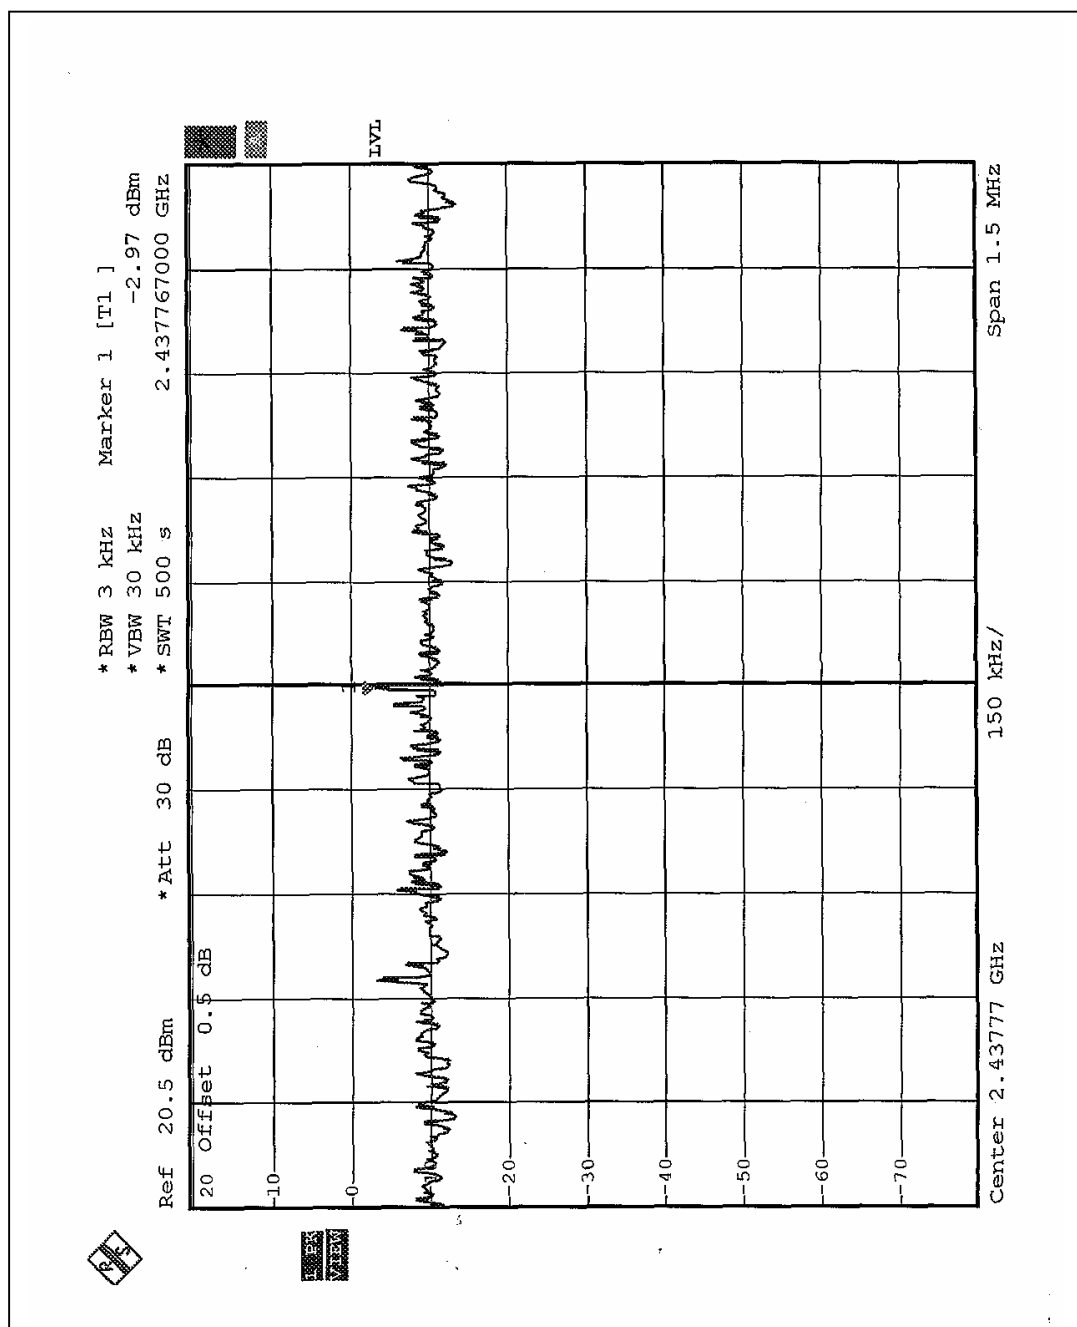

CH11

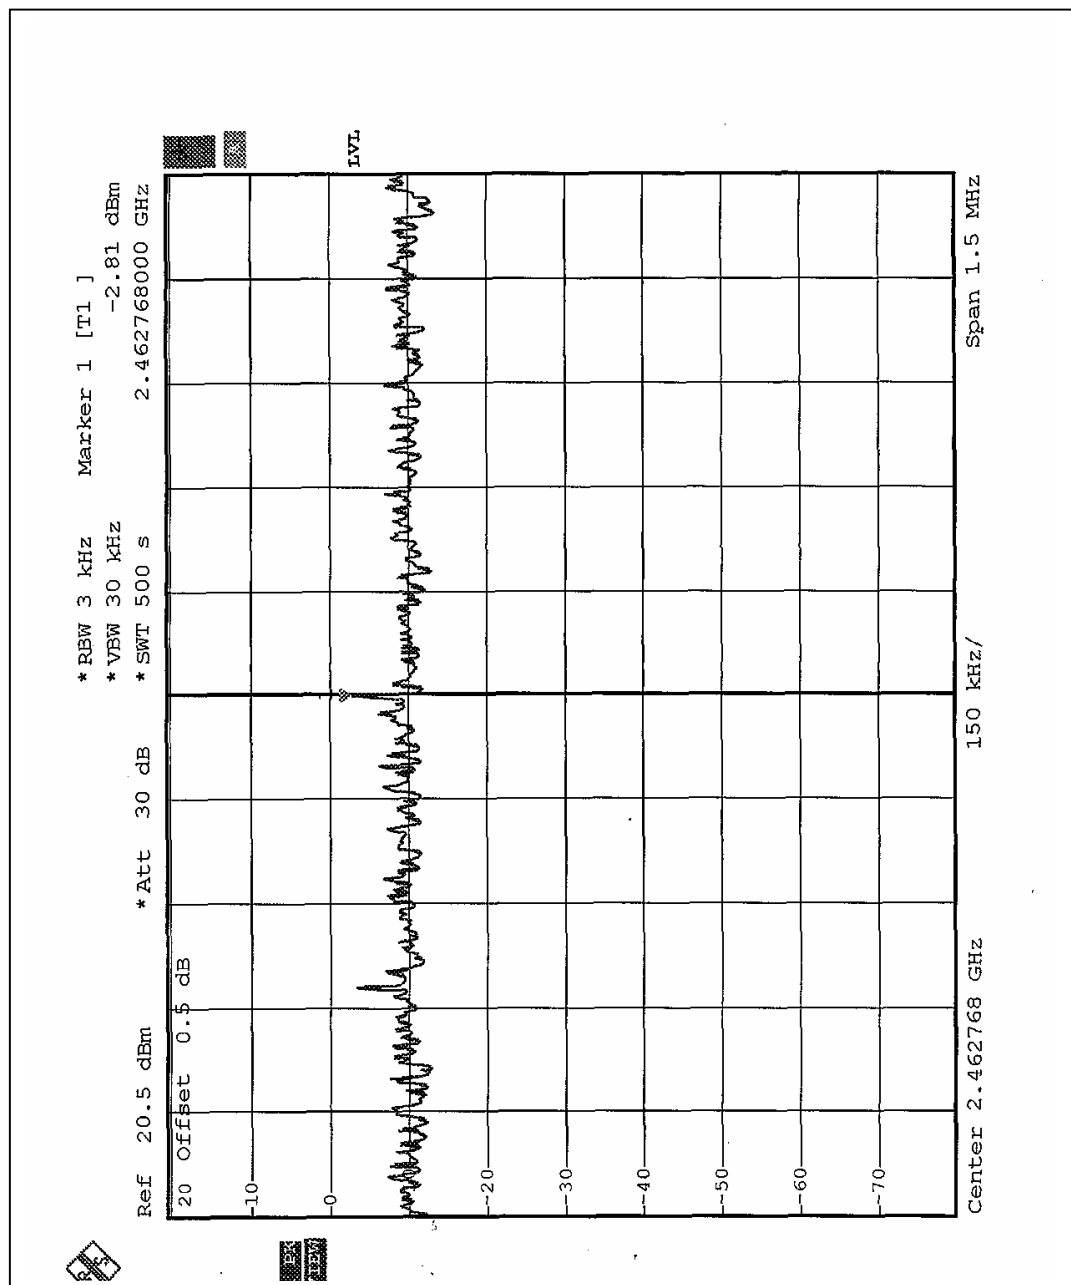


4.5.7 TEST RESULTS-OFDM


EUT	Wireless Super-G PCI Adapter		
MODEL	WL-660GS	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.31	8	PASS
6	2437	-8.87	8	PASS
11	2462	-11.83	8	PASS
Turbo 6	2437	-11.46	8	PASS


CH1

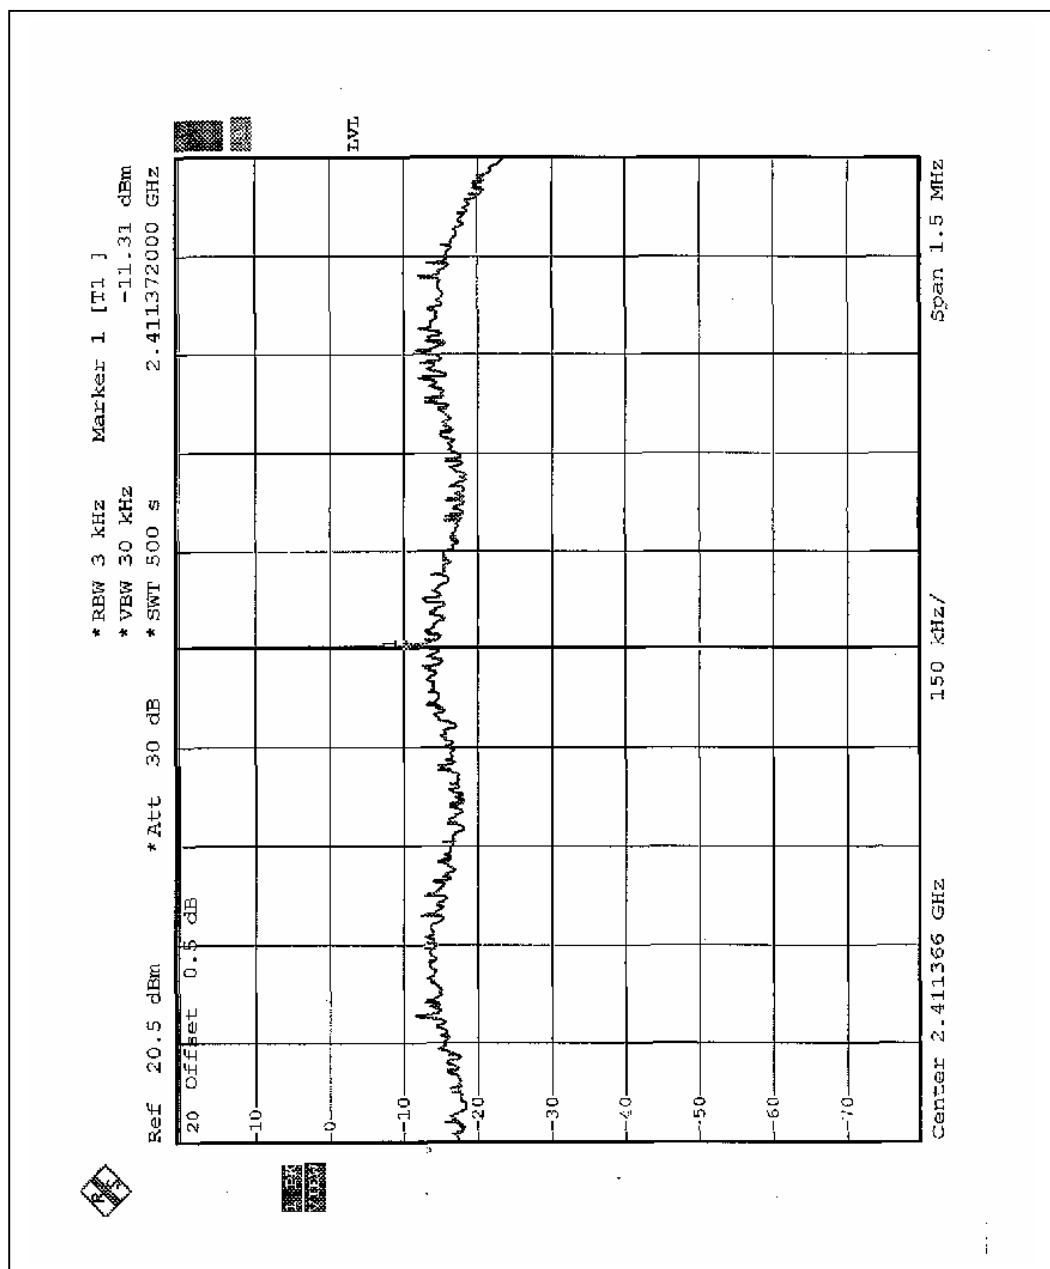


CH6

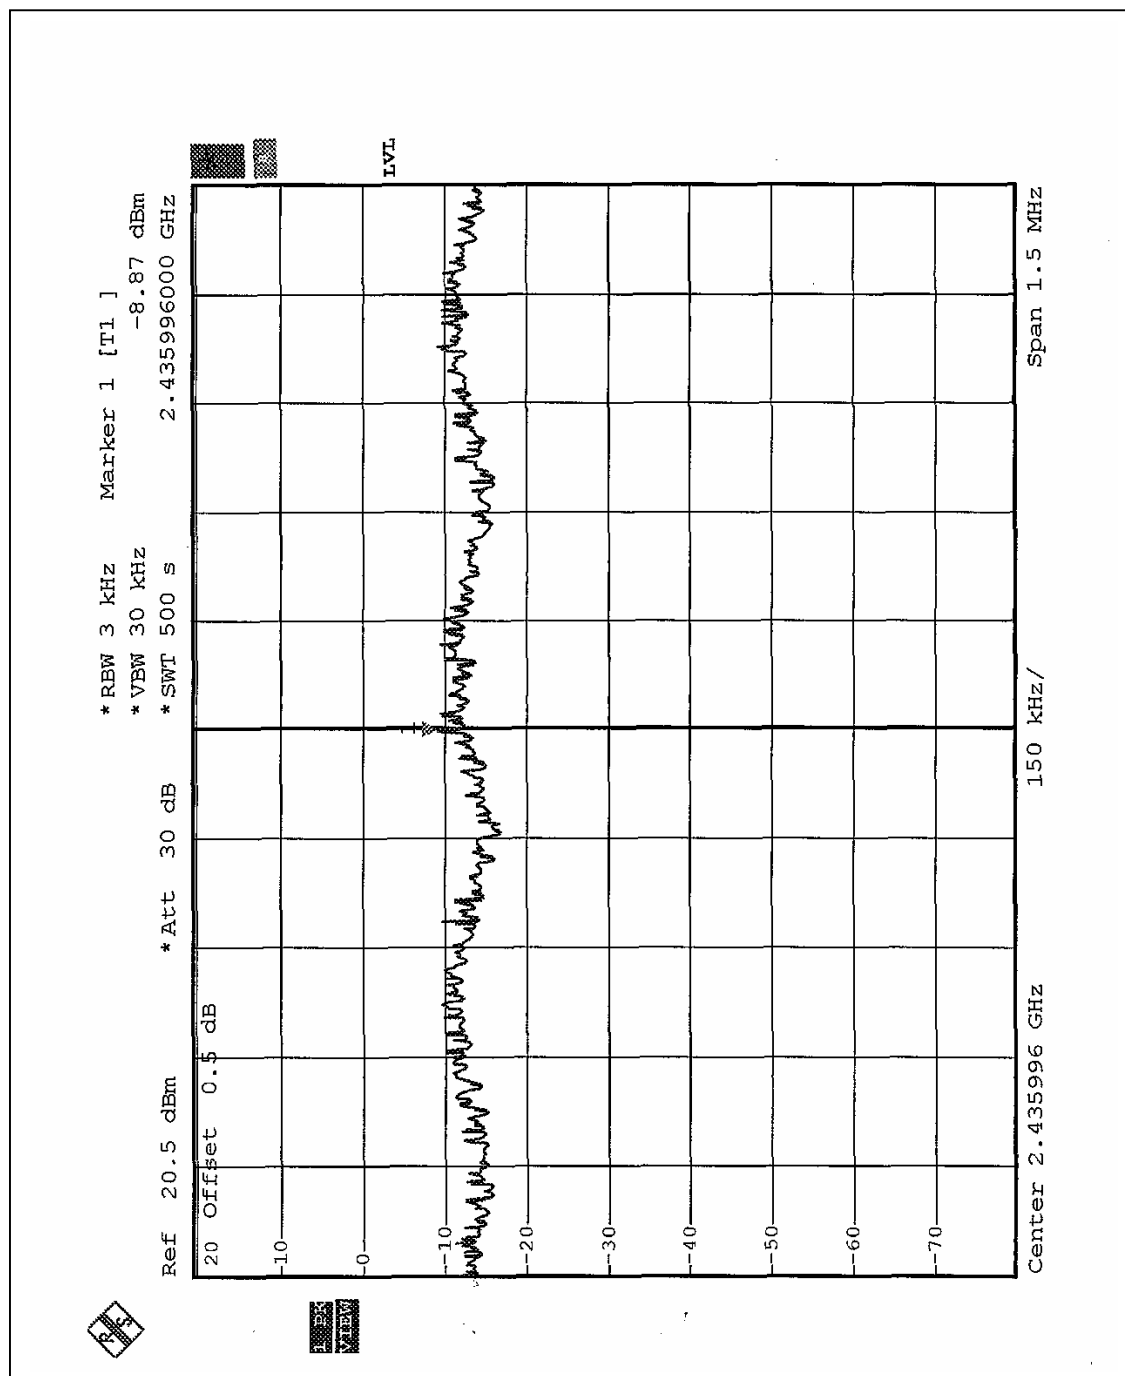

CH11

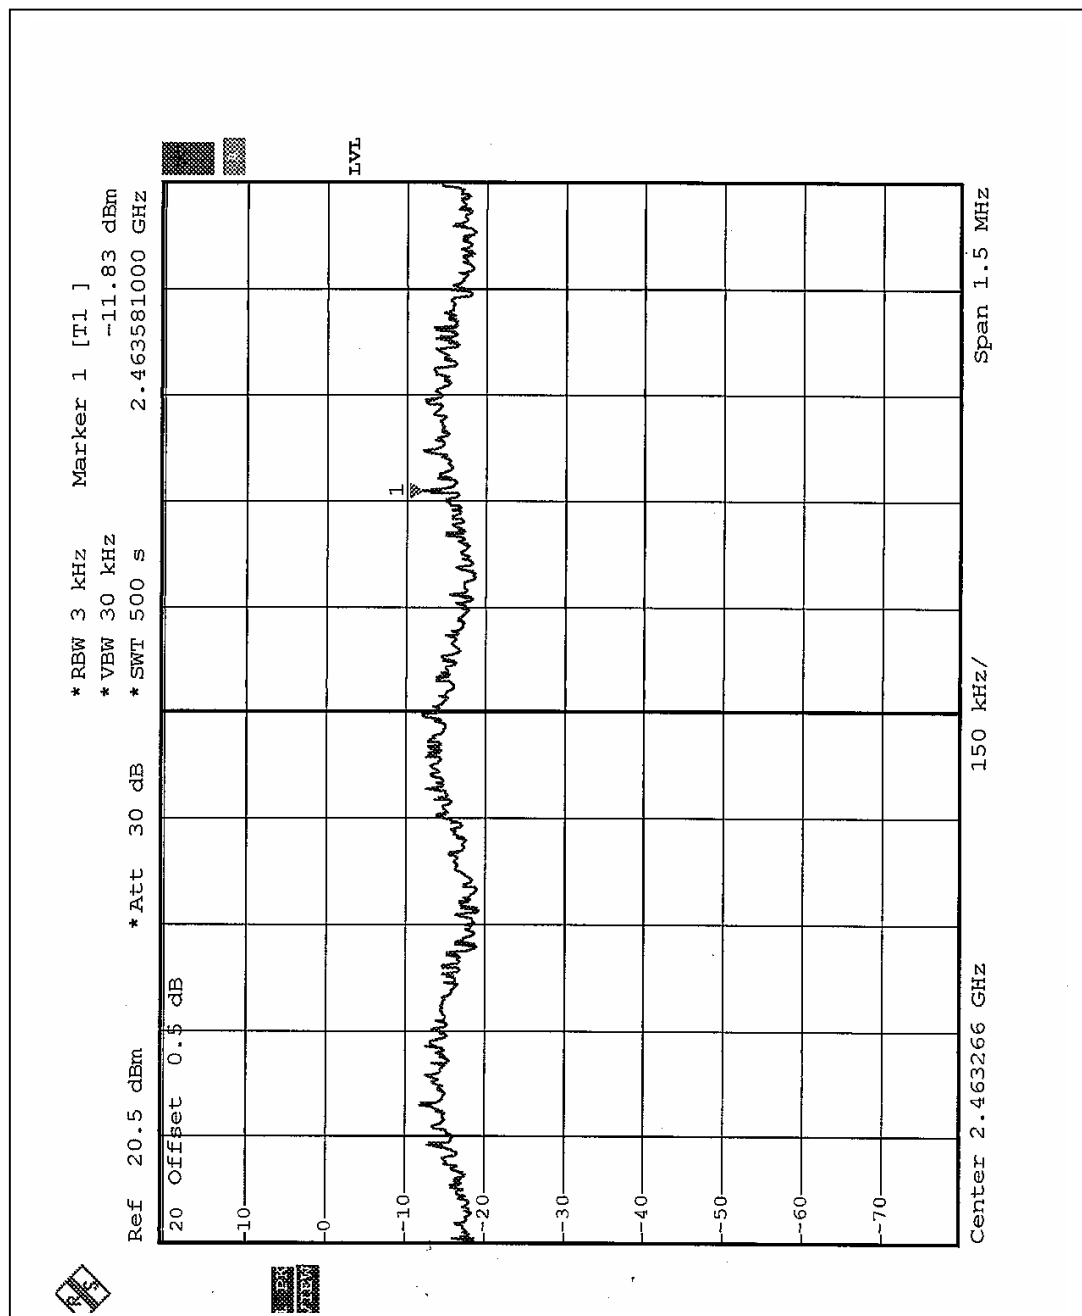

Turbo CH 6

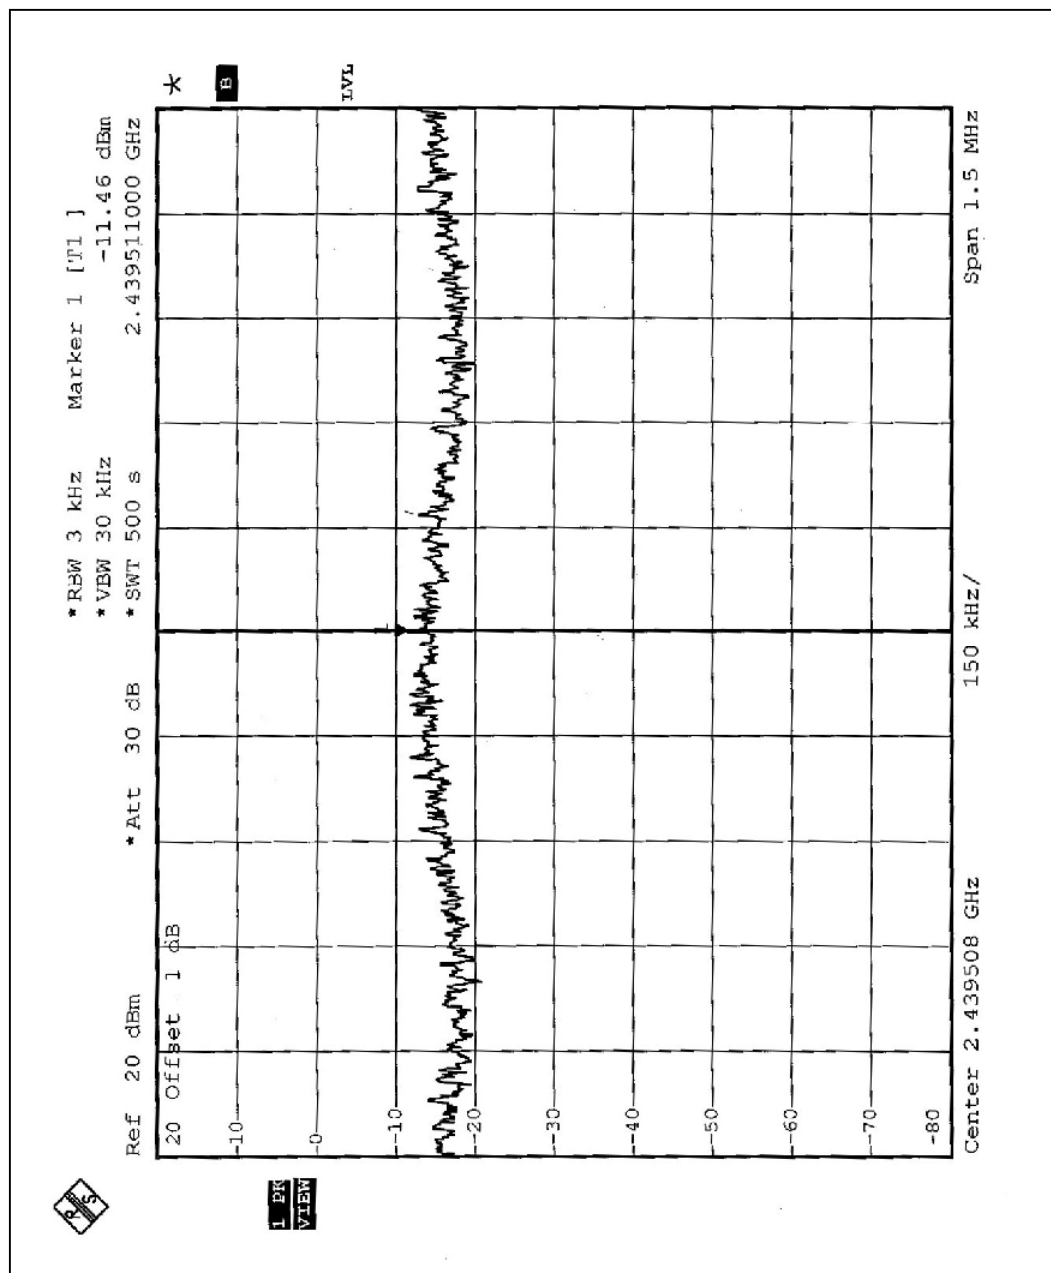

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5



4.6.5 TEST RESULTS –DSSS

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of DSSS technique on the following first page show 54.77dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 116.2dBuV/m, so the maximum field strength in restrict band is $116.2 - 54.77 = 61.43$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 51.52dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 114.9dBuV/m, so the maximum field strength in restrict band is $114.9 - 51.52 = 63.38$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 60.97dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 109.3dBuV/m, so the maximum field strength in restrict band is $109.3 - 60.97 = 48.33$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 59.66dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 108.0dBuV/m, so the maximum field strength in restrict band is $108.0 - 59.66 = 48.34$ dBuV/m which is under 54 dBuV/m limit.


CH1

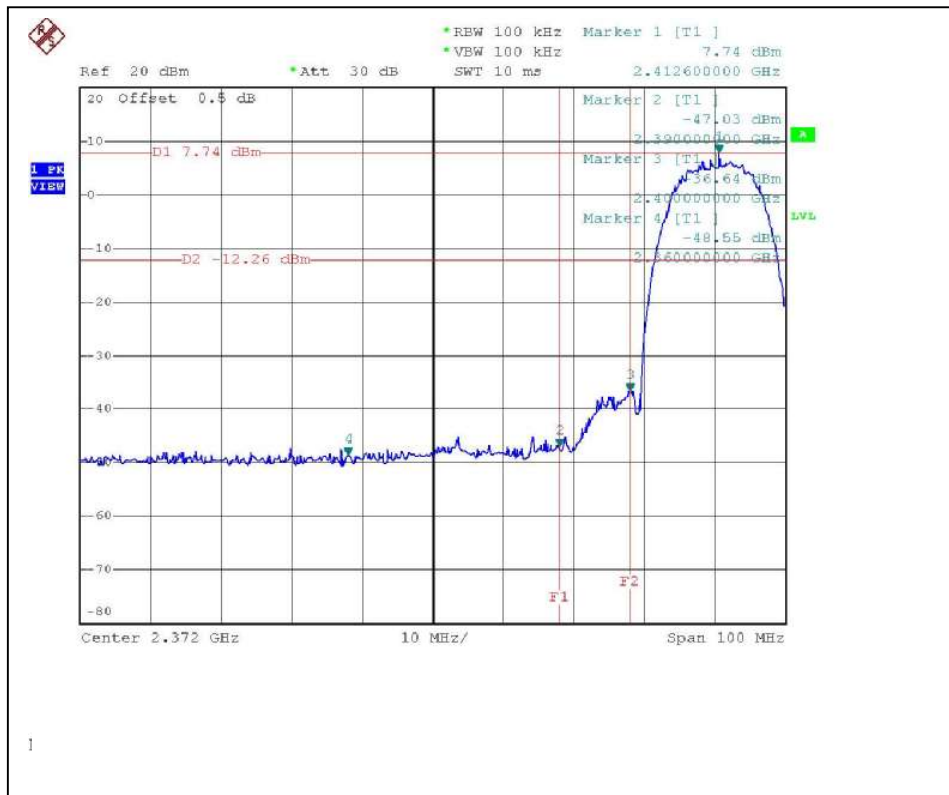


CH11

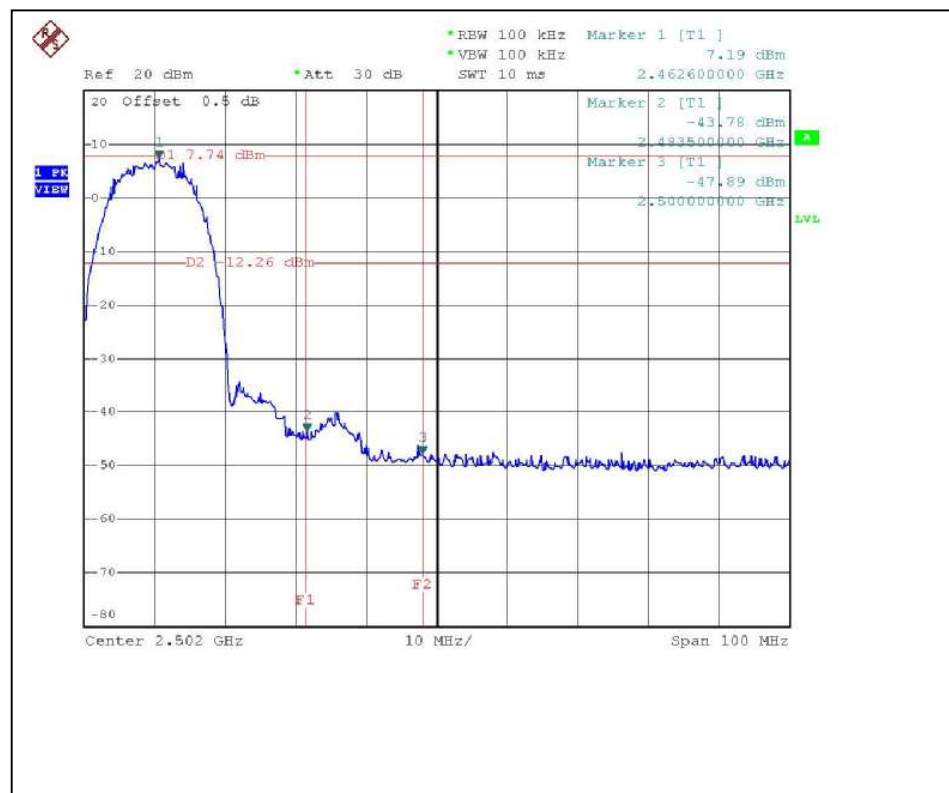


CH1

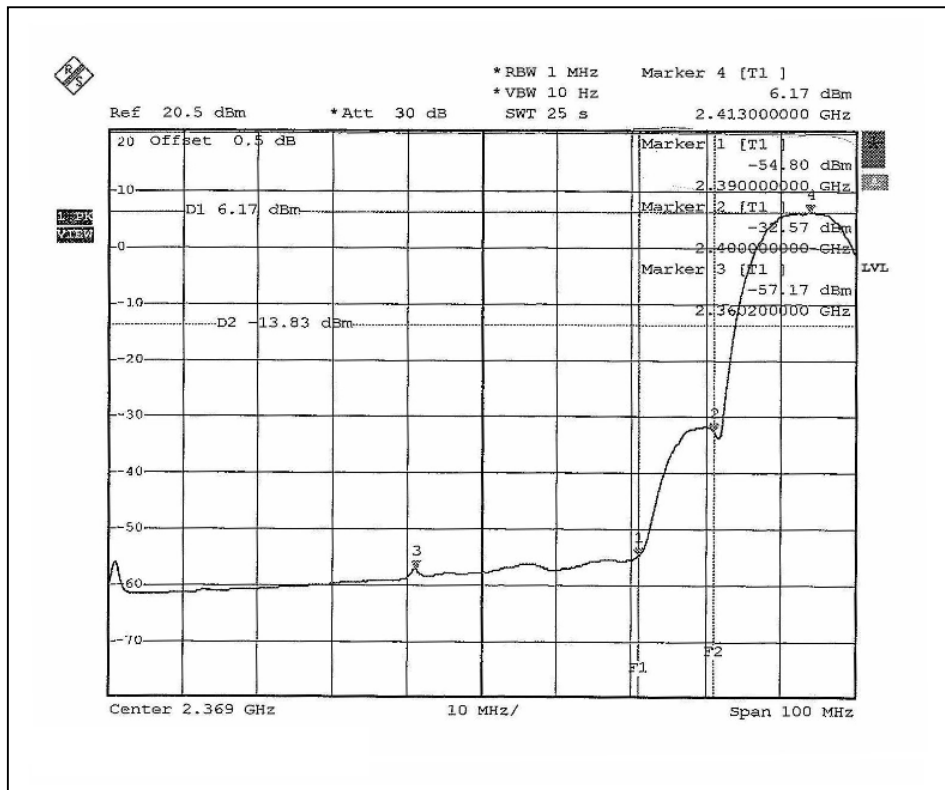


CH11

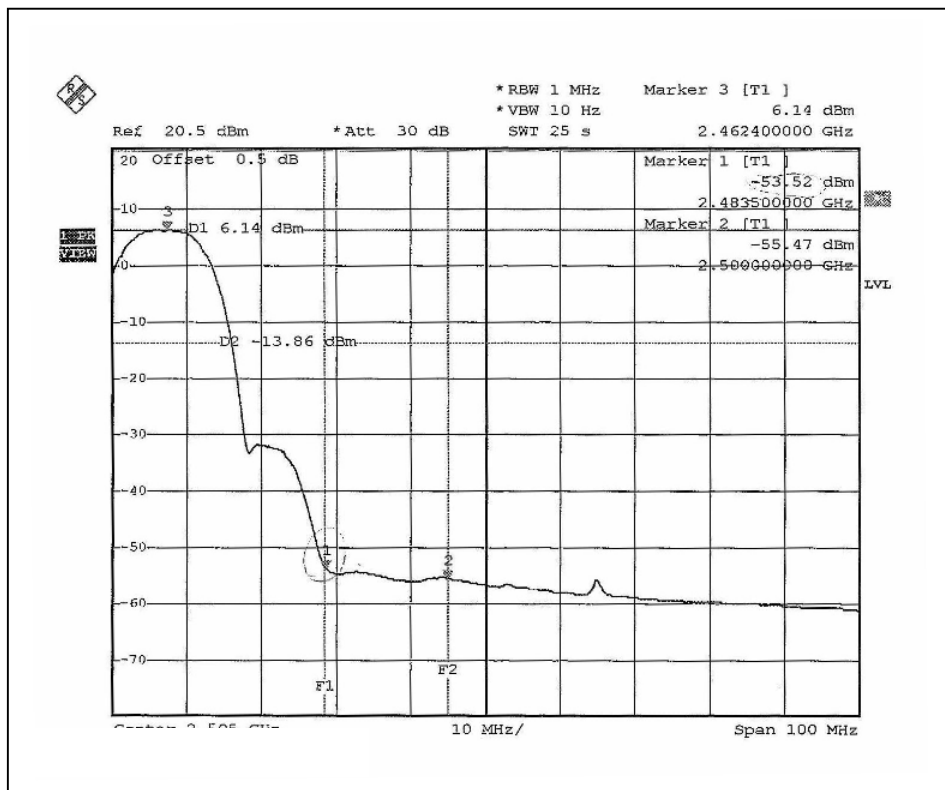

CH1

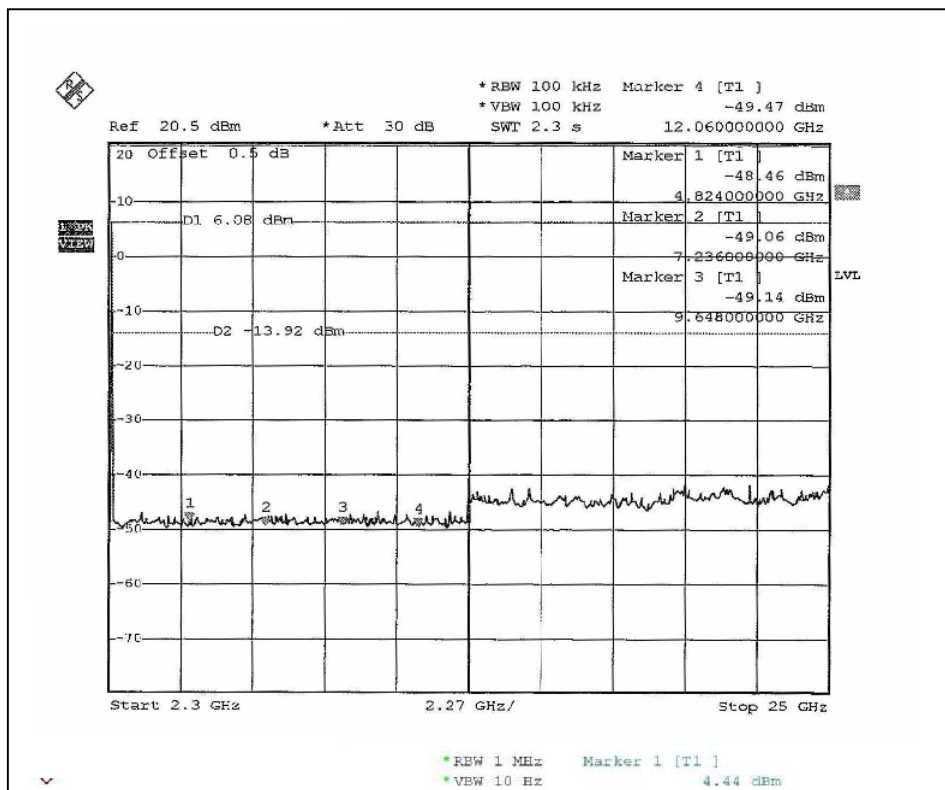

CH11

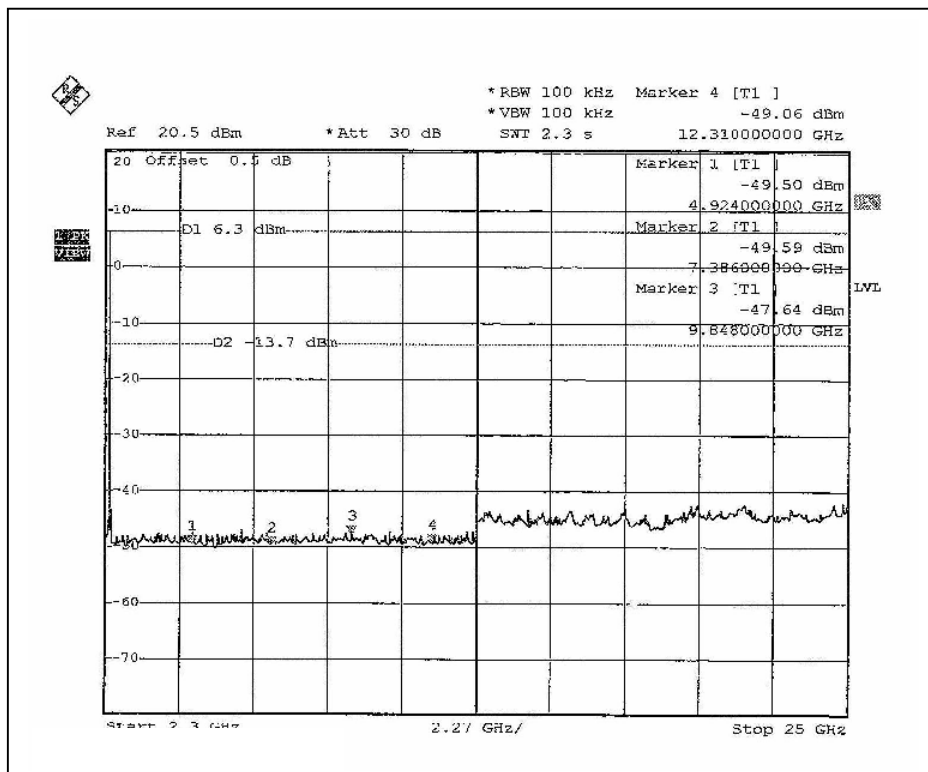



4.6.6 TEST RESULTS- OFDM (Normal)

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 44.89dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 109.9dBuV/m, so the maximum field strength in restrict band is $109.9 - 44.89 = 65.01$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 42.74dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 109.4dBuV/m, so the maximum field strength in restrict band is $109.4 - 42.74 = 66.66$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 49.61dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 102.8dBuV/m, so the maximum field strength in restrict band is $102.8 - 49.61 = 53.19$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 48.27dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 101.3dBuV/m, so the maximum field strength in restrict band is $101.3 - 48.27 = 53.03$ dBuV/m which is under 54 dBuV/m limit.


CH1

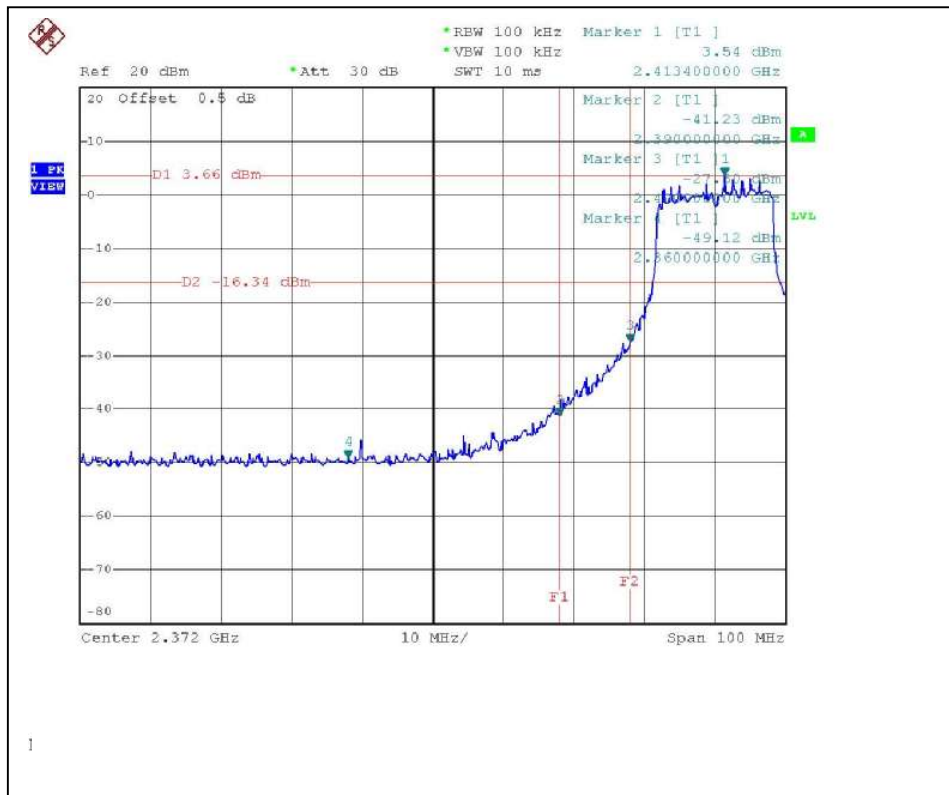


CH11

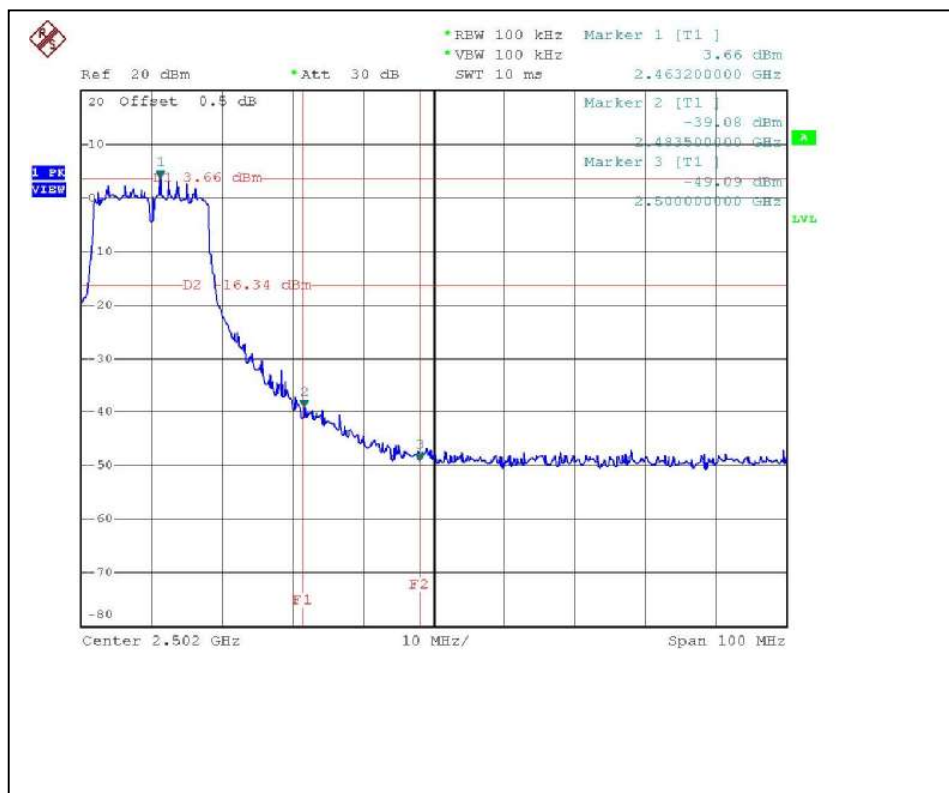


CH1

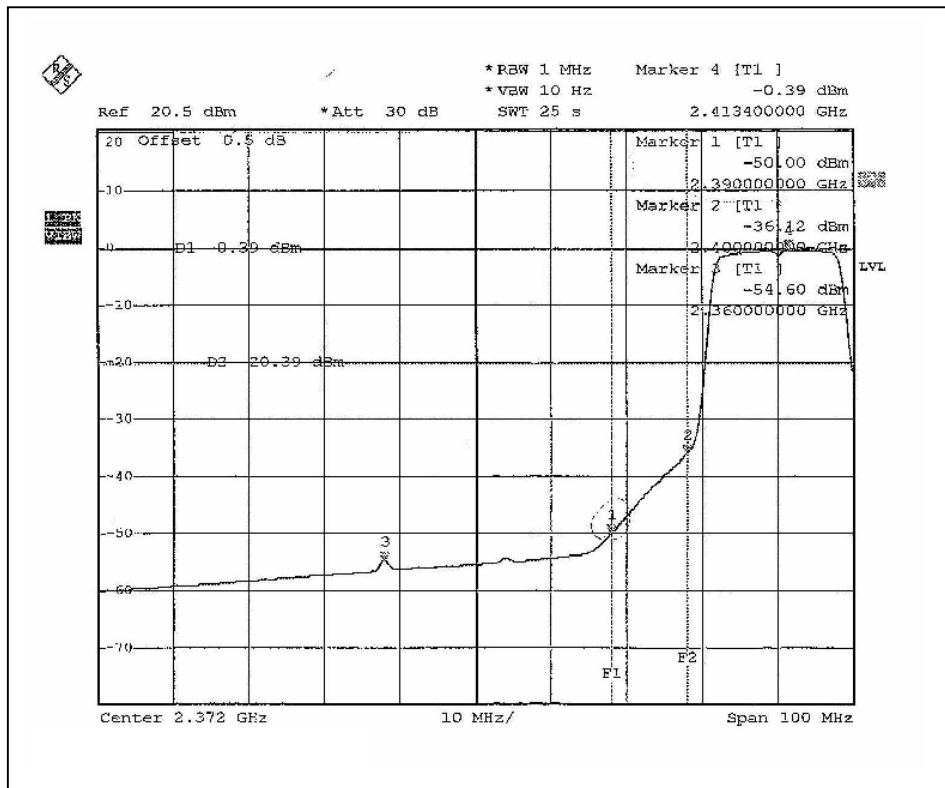


CH11

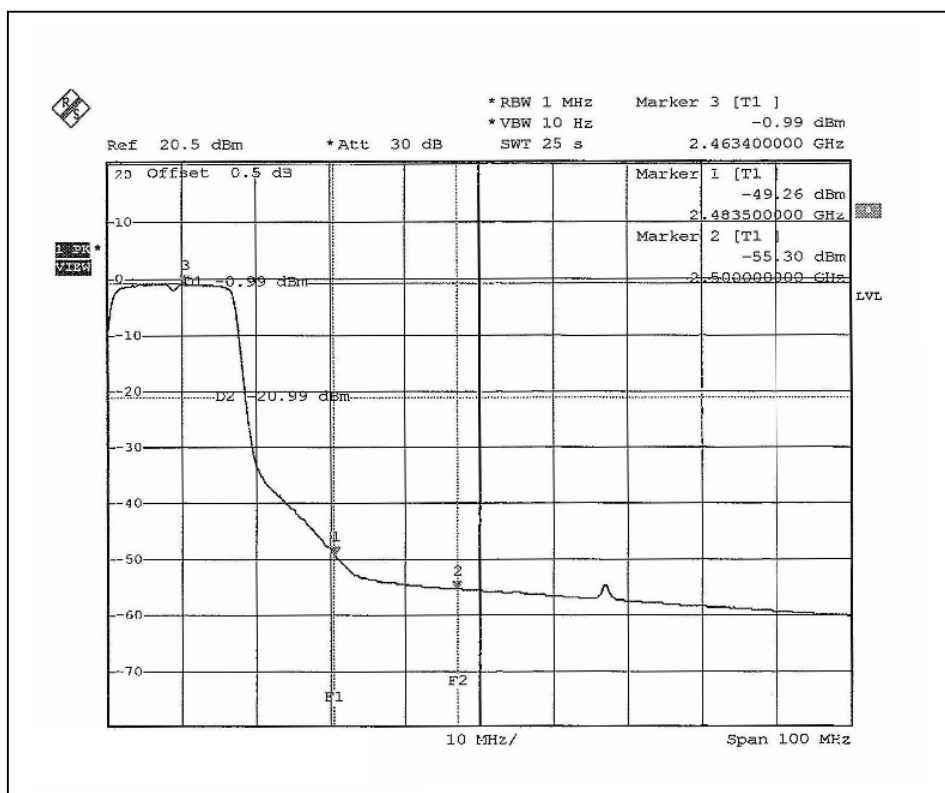

CH1

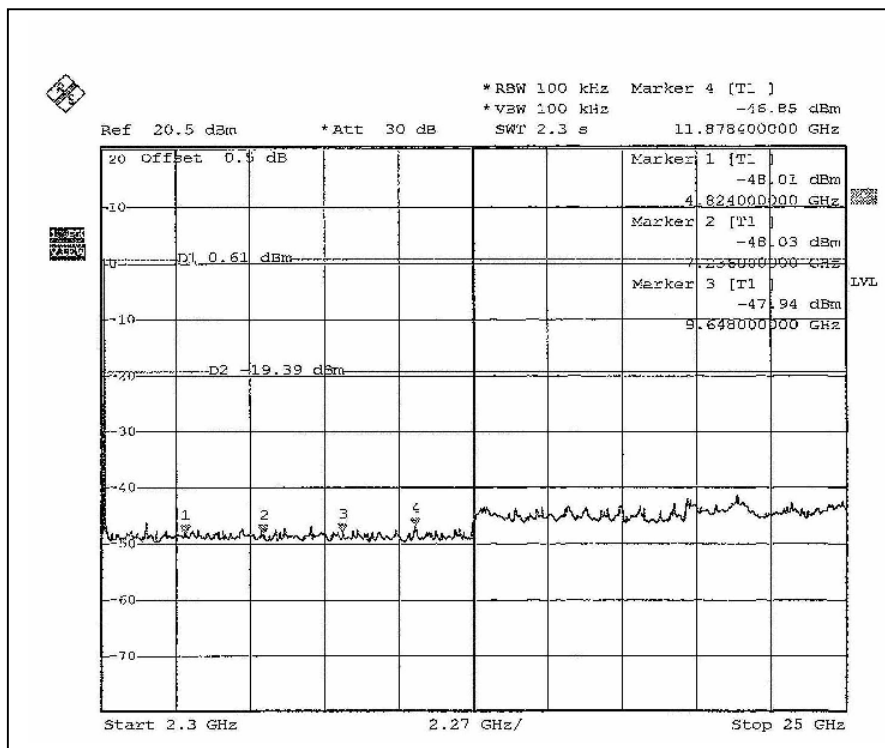

CH11

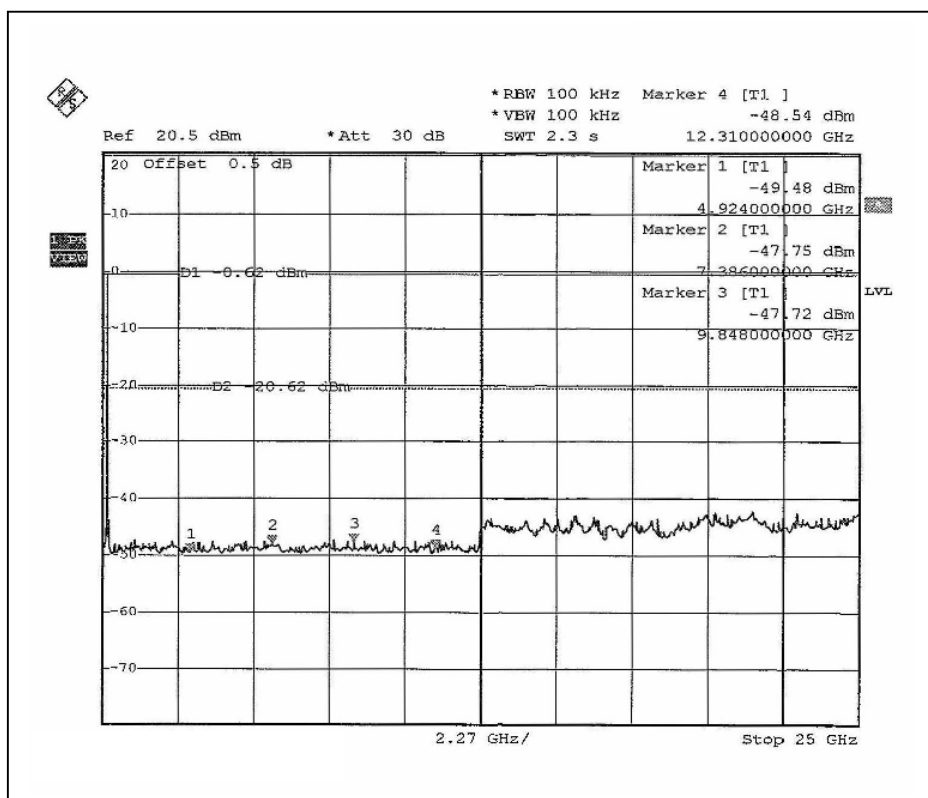



4.6.7 TEST RESULTS- OFDM (Turbo)

802.11g Turbo OFDM modulation

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 47.41dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 111.1dBuV/m, so the maximum field strength in restrict band is $111.1 - 47.41 = 63.69$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 46.61dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 111.1dBuV/m, so the maximum field strength in restrict band is $111.1 - 46.61 = 64.49$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 49.40dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 102.6dBuV/m, so the maximum field strength in restrict band is $102.6 - 49.4 = 53.20$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 50.28dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 102.6dBuV/m, so the maximum field strength in restrict band is $102.6 - 50.28 = 52.32$ dBuV/m which is under 54 dBuV/m limit.


Turbo CH6

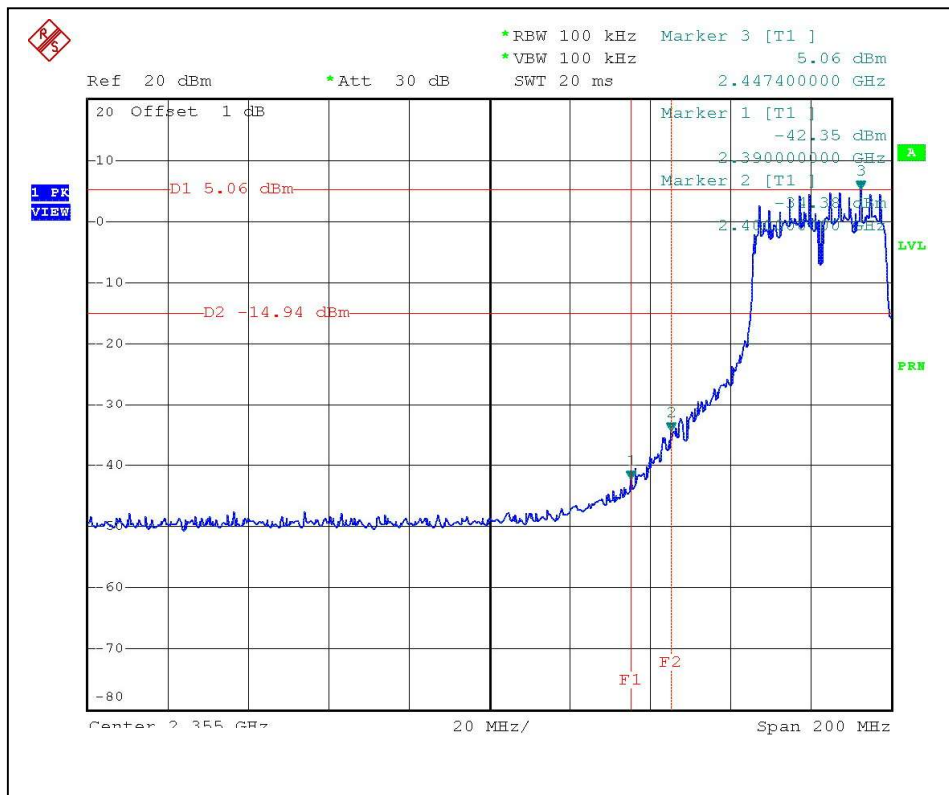


Turbo CH6

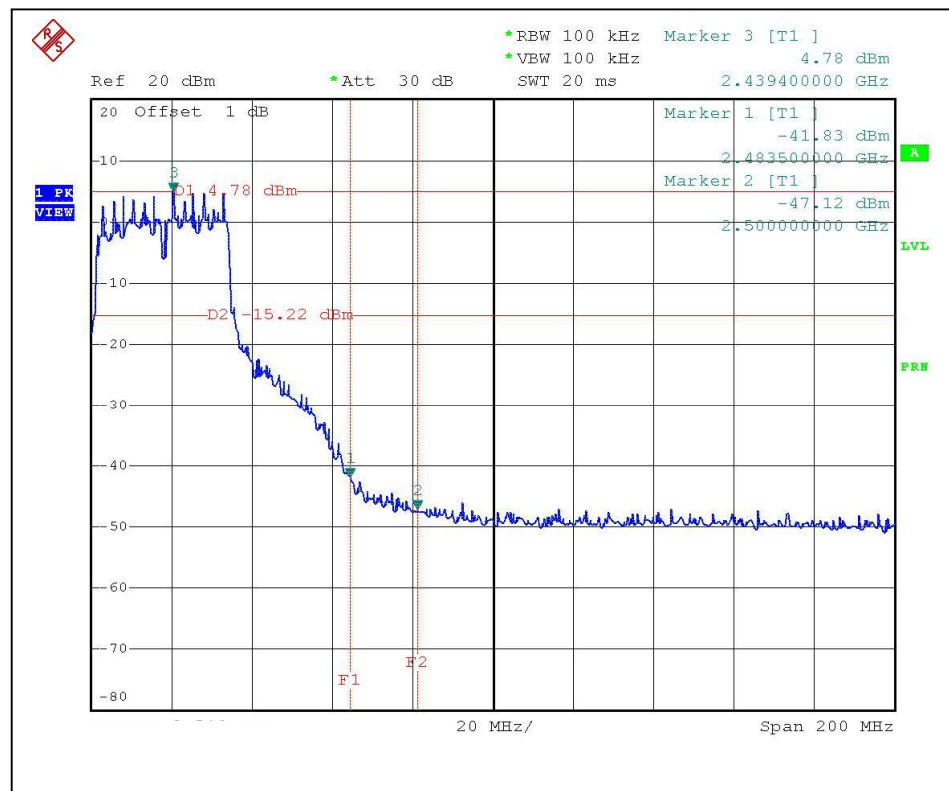


Turbo CH6

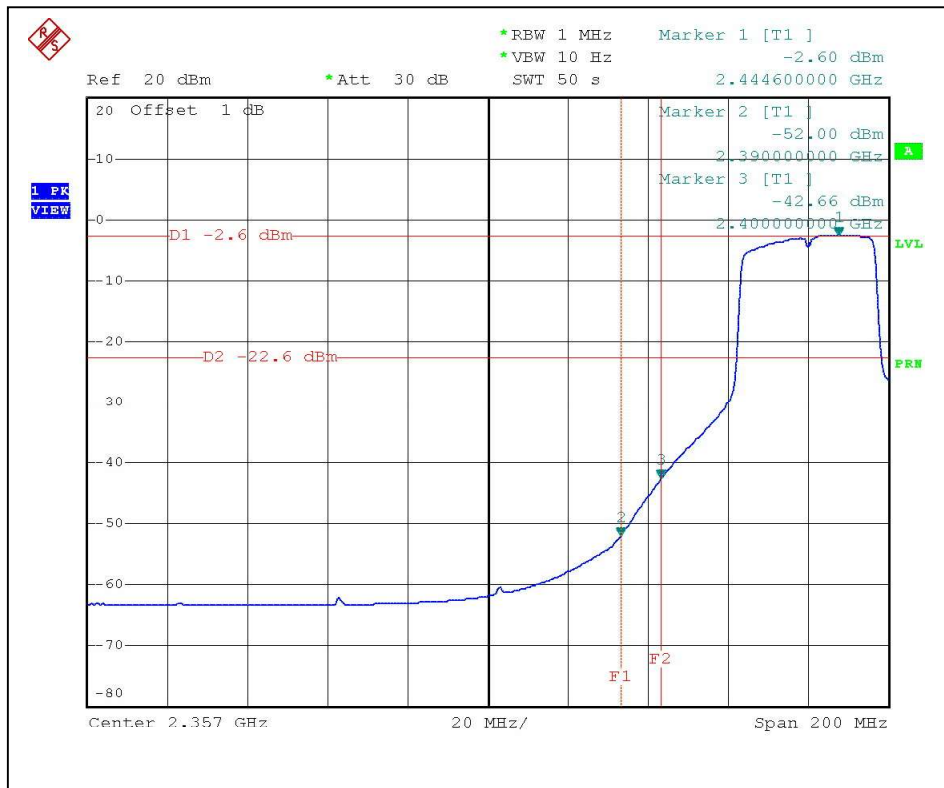

Turbo CH6

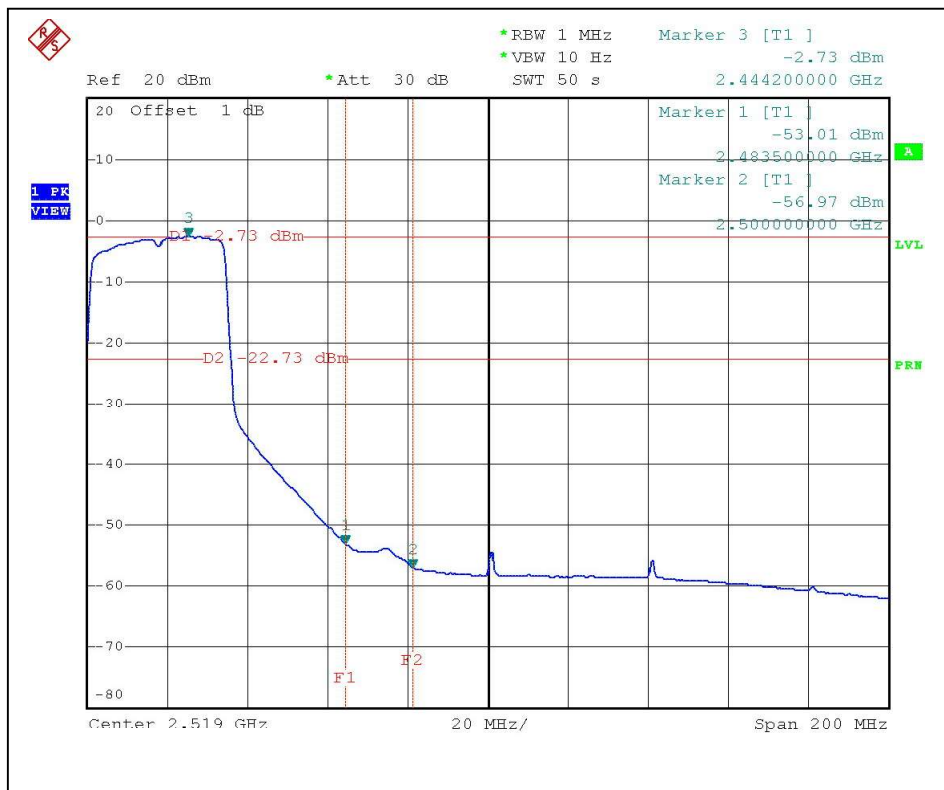

Turbo CH6

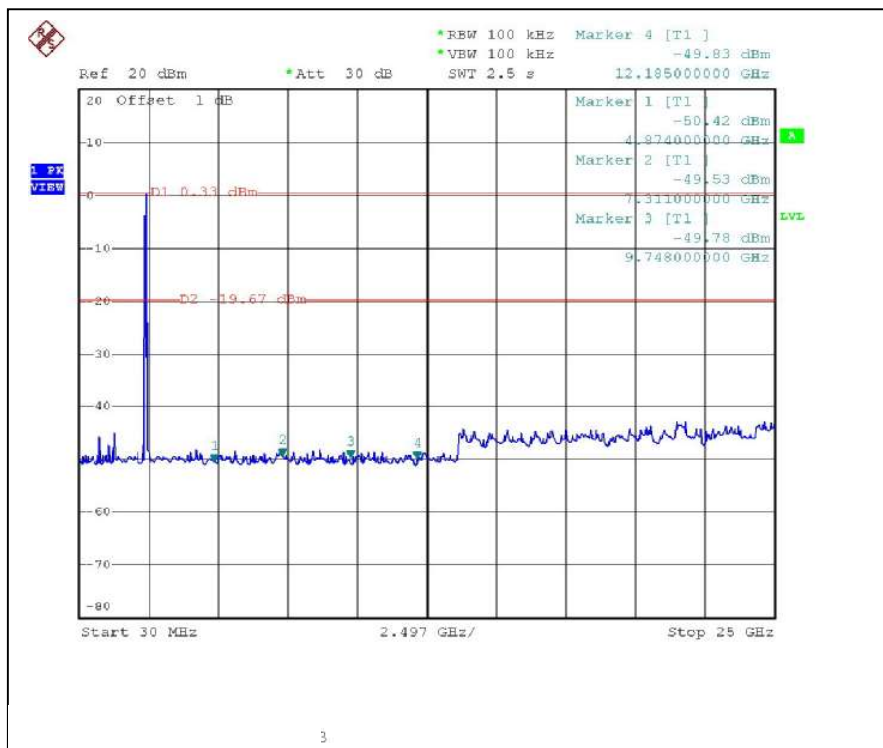



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna with R-SMA connector. The maximum Gain of the antenna is 1.8dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.