

## Supplemental “Transmit Simultaneously” Test Report

**Report No.:** RF160418E10-2

**FCC ID:** KA2CHG022A1

**Test Model:** DCH-G022

**Received Date:** Apr. 18, 2016

**Test Date:** May 05 to 11, 2016

**Issued Date:** Nov. 01, 2016

**Applicant:** D-Link Corporation

**Address:** No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.1.1 Test Mode Applicability and Tested Channel Detail .....	8
3.2 Description of Support Units .....	10
3.2.1 Configuration of System under Test .....	11
<b>4 Test Types and Results .....</b>	<b>12</b>
4.1 Radiated Emission and Bandedge Measurement .....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	12
4.1.2 Test Instruments .....	13
4.1.3 Test Procedures .....	14
4.1.4 Deviation from Test Standard .....	14
4.1.5 Test Setup .....	15
4.1.6 EUT Operating Conditions .....	15
4.1.7 Test Results .....	16
4.2 Conducted Emission Measurement .....	19
4.2.1 Limits of Conducted Emission Measurement .....	19
4.2.2 Test Instruments .....	19
4.2.3 Test Procedures .....	20
4.2.4 Deviation from Test Standard .....	20
4.2.5 Test Setup .....	20
4.2.6 EUT Operating Conditions .....	20
4.2.7 Test Results .....	21
4.3 Conducted Out of Band Emission Measurement (For concurrent transmit at same TX path) .....	23
4.3.1 Limits of Conducted Out of Band Emission Measurement .....	23
4.3.2 Test Setup .....	23
4.3.3 Test Instruments .....	23
4.3.4 Test Procedures .....	23
4.3.5 Deviation from Test Standard .....	23
4.3.6 EUT Operating Conditions .....	23
4.3.7 Test Results .....	24
<b>5 Pictures of Test Arrangements .....</b>	<b>25</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>26</b>

### Release Control Record

Issue No.	Description	Date Issued
RF160418E10-2	Original release.	Nov. 01, 2016

## 1 Certificate of Conformity

**Product:** Mydlink Connected Home Hub , mydlink Home Connected Home Hub 2

**Brand:** D-Link

**Test Model:** DCH-G022


**Sample Status:** ENGINEERING SAMPLE


**Applicant:** D-Link Corporation

**Test Date:** May 05 to 11, 2016

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Nov. 01, 2016  
Claire Kuan / Specialist

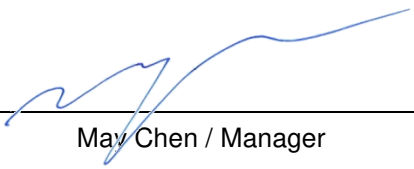**Approved by :**  , **Date:** Nov. 01, 2016  
May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.72dB at 7.53516MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.6dB at 916.00MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.34 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.41 dB
	6GHz ~ 18GHz	3.49 dB
	18GHz ~ 40GHz	3.30 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Mydlink Connected Home Hub , mydlink Home Connected Home Hub 2
Brand	D-Link
Test Model	DCH-G022
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 5V from power adapter
Modulation Type	<b>For WLAN:</b> CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM <b>For Z-Wave:</b> FSK
Modulation Technology	<b>For WLAN:</b> DSSS, OFDM
Transfer Rate	<b>For WLAN:</b> 802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps <b>For Z-Wave:</b> up to 100kbps
Operating Frequency	<b>For WLAN:</b> 2.412 ~ 2.462GHz <b>For Z-Wave:</b> 908.4 ~ 916MHz
Number of Channel	<b>For WLAN:</b> 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) <b>For Z-Wave:</b> 3
Antenna Type	Please see NOTE
Antenna Connector	Please see NOTE
Accessory Device	Adapter x 1
Data Cable Supplied	RJ-45 Cable (unshielded, 1.0m)

Note:

1. The EUT is a WLAN and Z-Wave device.
2. The EUT has two product names, which are identical to each other in all aspects except for the following table:

Product Name	Brand	Model No.	Difference
mydlink Connected Home Hub	D-Link	DCH-G022	for marketing purposes
mydlink Home Connected Home Hub 2			

3. The EUT power needs to be supplied from one power adapter, the information is as below table:

Brand	Model No.	Spec.
D-Link	WB-10E05R	Input: 100-240Vac, 0.4A, 50-60Hz Output: 5V, 2A DC cable: unshielded, 1.2m

4. The antenna provided to the EUT, please refer to the following table:

Antenna No.	Ant. Gain (dBi)	Frequency range (GHz to GHz)	Antenna Type	Antenna Connector
1	2.8	2.4~2.4835	PCB	NA
	3	865~925	PCB	NA
2	3	2.4~2.4835	PCB	NA

5. The EUT incorporates a MIMO function.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.1.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	OB	
-	√	√	√	√	-

Where **RE $\geq$ 1G:** Radiated Emission above 1GHz & Bandedge Measurement

**RE<1G:** Radiated Emission below 1GHz

**PLC:** Power Line Conducted Emission

**OB:** Conducted Out-Band Emission Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Stand mode**.

#### Radiated Emission Test (Above 1GHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11n (HT20)	1 to 11	6	OFDM	BPSK
+ Z-wave	1 to 3	3	-	FSK

#### Radiated Emission Test (Below 1GHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11n (HT20)	1 to 11	6	OFDM	BPSK
+ Z-wave	1 to 3	3	-	FSK

#### Power Line Conducted Emission Test:

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11n (HT20)	1 to 11	6	OFDM	BPSK
+ Z-wave	1 to 3	3	-	FSK

#### Conducted Out-Band Emission Measurement:

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11n (HT20)	1 to 11	6	OFDM	BPSK
+ Z-wave	1 to 3	3	-	FSK

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	26deg. C, 65%RH	120Vac, 60Hz	Gary Cheng
RE≥1G	23deg. C, 63%RH	120Vac, 60Hz	Gary Cheng
PLC	26deg. C, 70%RH	120Vac, 60Hz	Eagle Chen
OB	23deg. C, 64%RH	120Vac, 60Hz	Anderson Chen

### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPod	Apple	MC749TA/A	CC4DMFJUDFDM	NA	Prodvided by Lab
B.	Notebook Computer	LENOVO	E440	PF071LWC	NA	Prodvided by Lab
C.	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB	1	0.1	No	0	Prodvided by Lab
2.	RJ-45	1	10	No	0	Prodvided by Lab
3.	RJ-45	1	10	No	0	Prodvided by Lab
4.	DC	1	1.2	No	0	Supplied by client

### 3.2.1 Configuration of System under Test

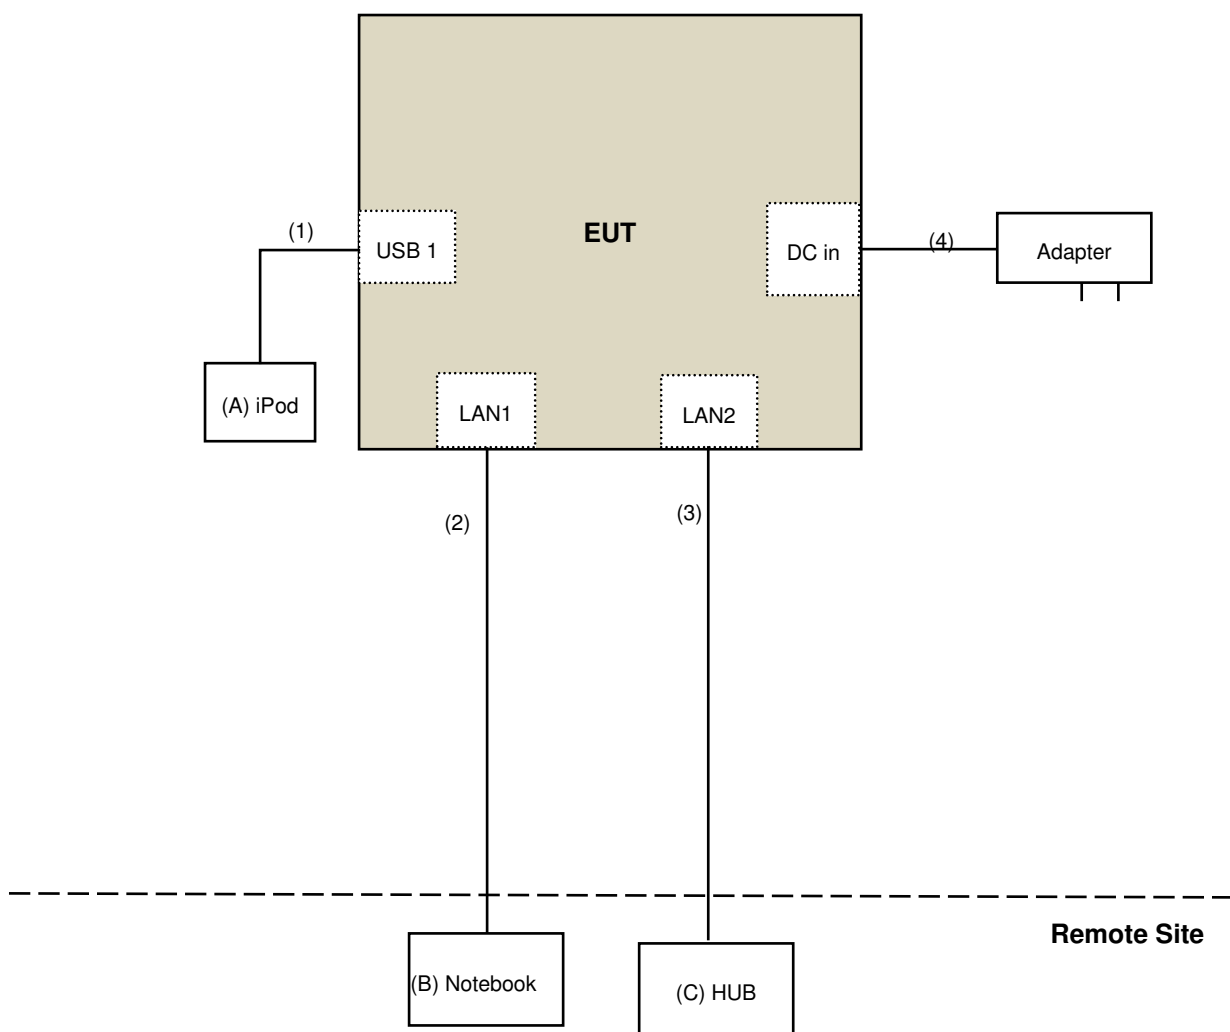

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 24, 2015	July 23, 2016
Pre-Amplifier <sup>(*)</sup> EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna <sup>(*)</sup> Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-01	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 02, 2016	Apr. 01, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A01922	Sep. 19, 2015	Sep. 18, 2016
RF Cable	EMC104-SM- SM-2000 EMC104-SM- SM-5000 EMC104-SM- SM-5000	150318 150323 150324	Mar. 30, 2016	Mar. 29, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated _V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
6. Tested Date: May 10 to 11, 2016

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup

##### <Frequency Range below 1GHz>

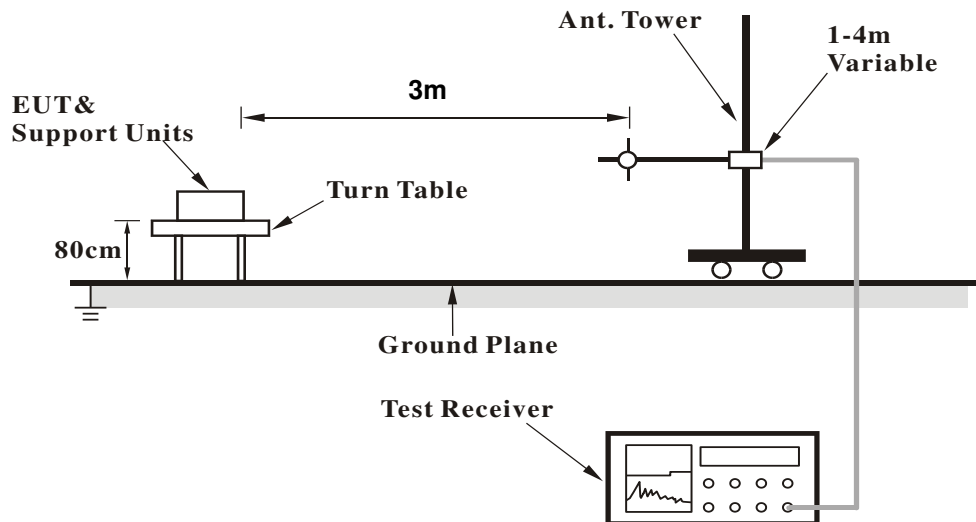

##### <Frequency Range above 1GHz>

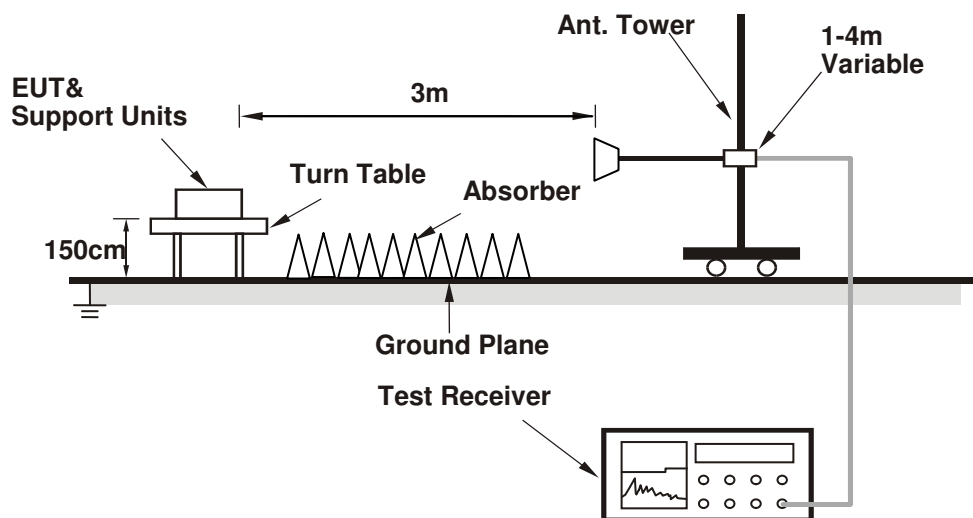

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Connected the EUT with the support unit B (Notebook Computer) which is placed on remote site.
- Contorlling software (QATool\_Dbg.exe[Ver 0.0.0.96] and HyperTerminal.exe paste COMMAND) has been activated to set the EUT on specific status.

#### 4.1.7 Test Results

##### Above 1GHz Data:

<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1832.00	49.2 PK	74.0	-24.8	1.09 H	358	56.9	-7.7
2	#1832.00	32.6 AV	54.0	-21.4	1.09 H	358	40.3	-7.7
3	2748.00	53.4 PK	74.0	-20.6	1.78 H	195	57.8	-4.4
4	2748.00	52.5 AV	54.0	-1.5	1.78 H	195	56.9	-4.4
5	3664.00	38.5 PK	74.0	-35.5	1.09 H	150	41.1	-2.6
6	3664.00	31.0 AV	54.0	-23.0	1.09 H	150	33.6	-2.6
7	4580.00	42.6 PK	74.0	-31.4	1.13 H	169	42.5	0.1
8	4580.00	39.1 AV	54.0	-14.9	1.13 H	169	39.0	0.1
9	4874.00	49.0 PK	74.0	-25.0	1.14 H	270	47.9	1.1
10	4874.00	46.3 AV	54.0	-7.7	1.14 H	270	45.2	1.1
11	#5496.00	38.0 PK	74.0	-36.0	1.10 H	257	35.7	2.3
12	#5496.00	24.1 AV	54.0	-29.9	1.10 H	257	21.8	2.3
13	#6412.00	45.2 PK	74.0	-28.8	1.43 H	188	40.6	4.6
14	#6412.00	38.1 AV	54.0	-15.9	1.43 H	188	33.5	4.6
15	7311.00	53.1 PK	74.0	-20.9	1.02 H	84	45.4	7.7
16	7311.00	46.1 AV	54.0	-7.9	1.02 H	84	38.4	7.7
17	7328.00	44.1 PK	74.0	-29.9	1.56 H	337	36.4	7.7
18	7328.00	30.8 AV	54.0	-23.2	1.56 H	337	23.1	7.7
19	8244.00	46.8 PK	74.0	-27.2	1.56 H	107	38.1	8.7
20	8244.00	40.9 AV	54.0	-13.1	1.56 H	107	32.2	8.7
21	9160.00	45.3 PK	74.0	-28.7	1.63 H	170	36.3	9.0
22	9160.00	32.2 AV	54.0	-21.8	1.63 H	170	23.2	9.0

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1832.00	37.2 PK	74.0	-36.8	1.56 V	330	44.9	-7.7
2	#1832.00	25.7 AV	54.0	-28.3	1.56 V	330	33.4	-7.7
3	2748.00	50.9 PK	74.0	-23.1	1.46 V	97	55.3	-4.4
4	2748.00	49.8 AV	54.0	-4.2	1.46 V	97	54.2	-4.4
5	3664.00	37.2 PK	74.0	-36.8	1.41 V	49	39.8	-2.6
6	3664.00	30.6 AV	54.0	-23.4	1.41 V	49	33.2	-2.6
7	4580.00	42.1 PK	74.0	-31.9	1.27 V	341	42.0	0.1
8	4580.00	38.8 AV	54.0	-15.2	1.27 V	341	38.7	0.1
9	4874.00	49.8 PK	74.0	-24.2	1.00 V	46	48.7	1.1
10	4874.00	45.8 AV	54.0	-8.2	1.00 V	46	44.7	1.1
11	#5496.00	38.2 PK	74.0	-35.8	1.31 V	264	35.9	2.3
12	#5496.00	25.7 AV	54.0	-28.3	1.31 V	264	23.4	2.3
13	#6412.00	43.7 PK	74.0	-30.3	1.24 V	119	39.1	4.6
14	#6412.00	35.9 AV	54.0	-18.1	1.24 V	119	31.3	4.6
15	7311.00	48.8 PK	74.0	-25.2	2.19 V	80	41.1	7.7
16	7311.00	44.1 AV	54.0	-9.9	2.19 V	80	36.4	7.7
17	7328.00	41.9 PK	74.0	-32.1	1.27 V	214	34.2	7.7
18	7328.00	30.1 AV	54.0	-23.9	1.27 V	214	22.4	7.7
19	8244.00	43.7 PK	74.0	-30.3	1.25 V	145	35.0	8.7
20	8244.00	30.2 AV	54.0	-23.8	1.25 V	145	21.5	8.7
21	9160.00	45.3 PK	74.0	-28.7	1.29 V	360	36.3	9.0
22	9160.00	32.8 AV	54.0	-21.2	1.29 V	360	23.8	9.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

**Below 1GHz Data:**

<b>FREQUENCY RANGE</b>	Below 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	------------	--------------------------	-----------------

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.77	38.3 QP	40.0	-1.7	2.00 H	302	47.1	-8.9
2	50.56	38.6 QP	40.0	-1.5	1.10 H	162	47.4	-8.8
3	103.33	32.1 QP	43.5	-11.4	2.00 H	81	44.4	-12.4
4	138.42	30.0 QP	43.5	-13.5	2.00 H	266	39.0	-9.0
5	901.90	41.9 QP	46.0	-4.1	1.80 H	240	38.1	3.8
6	916.00	91.1 QP	94.0	-2.9	1.80 H	240	86.9	4.2
7	928.10	43.4 QP	46.0	-2.6	1.80 H	240	39.1	4.3
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.15	37.8 QP	40.0	-2.2	1.10 V	350	46.8	-9.0
2	55.80	34.4 QP	40.0	-5.6	1.10 V	324	43.4	-9.0
3	66.25	31.1 QP	40.0	-8.9	2.00 V	284	41.3	-10.2
4	85.51	29.1 QP	40.0	-10.9	2.00 V	331	43.4	-14.4
5	901.95	43.3 QP	46.0	-2.7	1.00 V	100	39.5	3.8
6	916.00	93.4 QP	94.0	-0.6	1.01 V	100	89.3	4.2
7	929.54	42.4 QP	46.0	-3.6	1.00 V	100	38.1	4.3

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100287	Apr. 16, 2016	Apr. 15, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-523	Oct. 11, 2016	Oct. 10, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100071	Nov. 11, 2015	Nov. 10, 2016
RF Cable	5D-FB	COACAB-001	May 24, 2016	May 23, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-001	Sep. 13, 2016	Sep. 12, 2017
50 ohms Terminator	N/A	EMC-01	Oct. 06, 2016	Oct. 05, 2017
50 ohms Terminator	N/A	EMC-02	Sep. 29, 2016	Sep. 28, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: May 05, 2016

### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### 4.2.4 Deviation from Test Standard

No deviation.

### 4.2.5 Test Setup

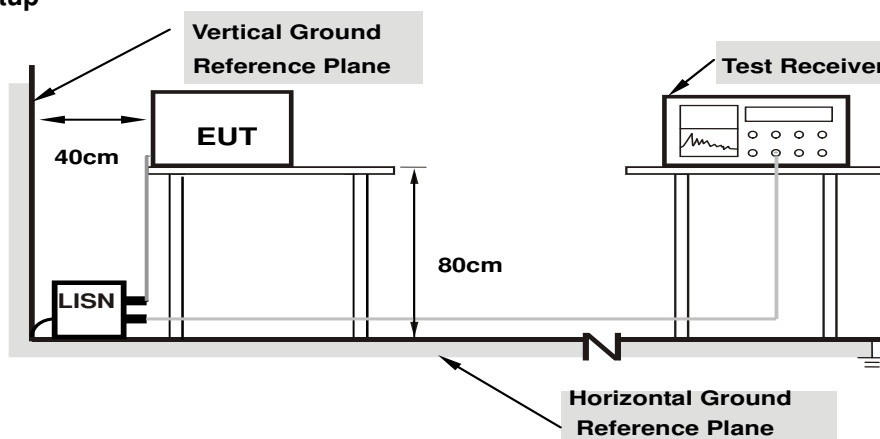

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.22	29.29	14.76	39.51	24.98	65.79	55.79	-26.28	-30.81
2	0.29063	10.25	29.76	25.36	40.01	35.61	60.51	50.51	-20.49	-14.89
3	0.89609	10.26	19.62	11.00	29.88	21.26	56.00	46.00	-26.12	-24.74
4	2.73438	10.38	18.04	9.17	28.42	19.55	56.00	46.00	-27.58	-26.45
<b>5</b>	<b>7.53516</b>	<b>10.56</b>	<b>31.19</b>	<b>26.72</b>	<b>41.75</b>	<b>37.28</b>	<b>60.00</b>	<b>50.00</b>	<b>-18.25</b>	<b>-12.72</b>
6	11.95313	10.71	24.39	17.45	35.10	28.16	60.00	50.00	-24.90	-21.84
7	19.70703	11.01	26.13	21.42	37.14	32.43	60.00	50.00	-22.86	-17.57

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

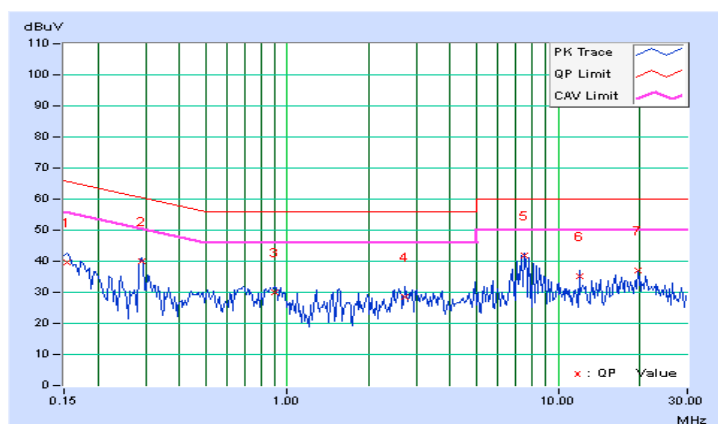


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.29	29.39	15.10	39.68	25.39	65.79	55.79	-26.11	-30.40
2	0.29063	10.34	26.12	20.88	36.46	31.22	60.51	50.51	-24.05	-19.29
3	0.94297	10.33	13.19	2.92	23.52	13.25	56.00	46.00	-32.48	-32.75
4	3.23828	10.49	14.71	4.87	25.20	15.36	56.00	46.00	-30.80	-30.64
5	7.53125	10.60	24.63	19.34	35.23	29.94	60.00	50.00	-24.77	-20.06
6	20.25781	10.99	21.96	16.25	32.95	27.24	60.00	50.00	-27.05	-22.76

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

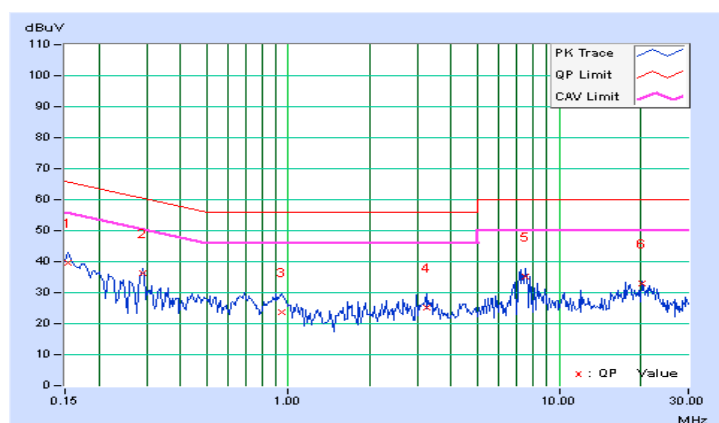


### 4.3 Conducted Out of Band Emission Measurement (For concurrent transmit at same TX path)

#### 4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedures

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 4.3.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

**For concurrent transmit at same TX path:**

**802.11n (HT20)\_CH6 + Z-wave\_CH3**

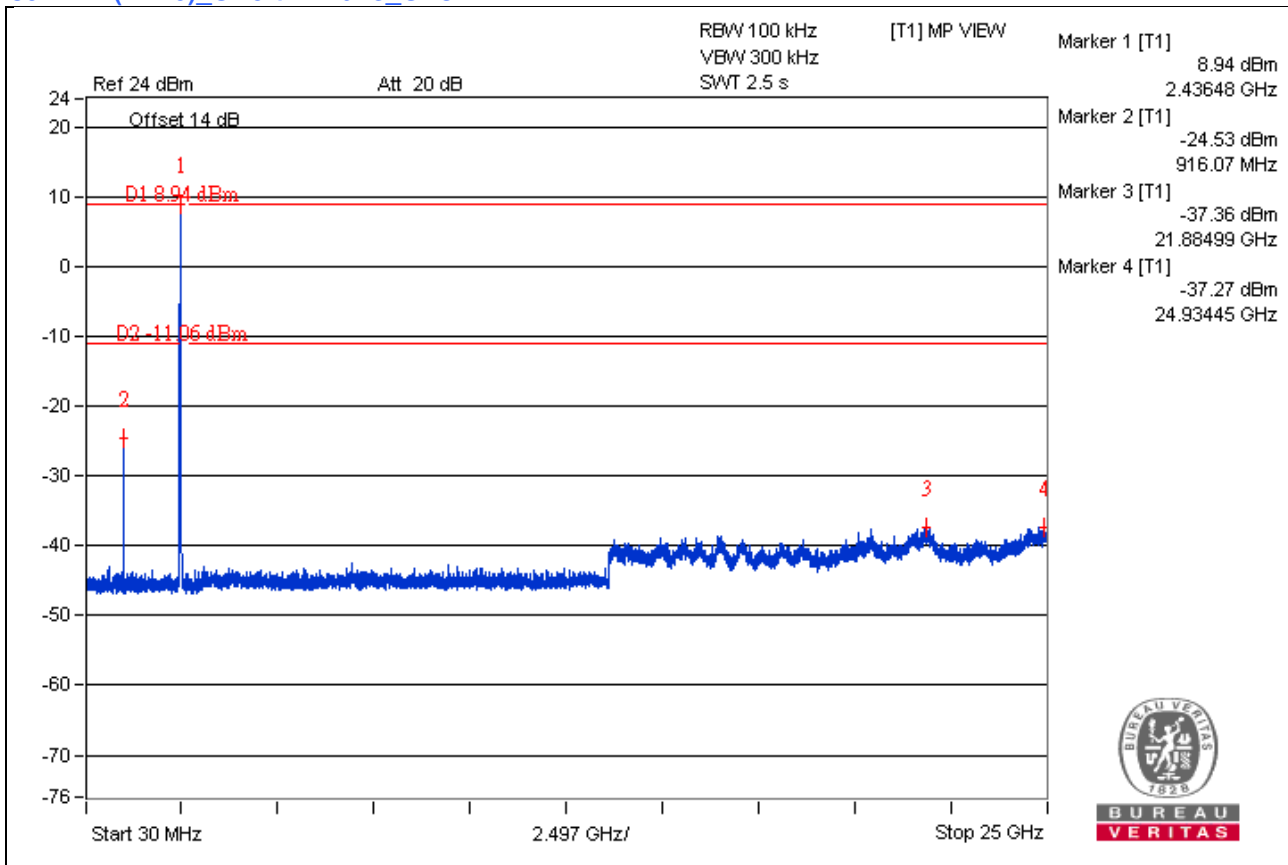

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---