

# FCC RF Test Report

APPLICANT : VeriFone, Inc.  
EQUIPMENT : Point of Sale Terminal  
BRAND NAME : VeriFone  
MODEL NAME : VX520/VX520G  
FCC ID : B32VX520G  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter (PCB)


The product was received on Apr. 28, 2014 and testing was completed on May 18, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



---

Reviewed by: Joseph Lin / Supervisor



---

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Product Feature of Equipment Under Test .....	5
1.4 Product Specification subjective to this standard.....	6
1.5 Modification of EUT .....	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....	6
1.7 Testing Location .....	7
1.8 Applicable Standards .....	7
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	9
2.3 Support Unit used in test configuration .....	9
2.4 Measurement Results Explanation Example .....	9
<b>3 TEST RESULT .....</b>	<b>10</b>
3.1 Conducted Output Power Measurement.....	10
3.2 Peak-to-Average Ratio .....	11
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....	17
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	20
3.5 Band Edge Measurement.....	28
3.6 Conducted Spurious Emission Measurement.....	31
3.7 Field Strength of Spurious Radiation Measurement .....	37
3.8 Frequency Stability Measurement.....	43
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>46</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>47</b>
<b>APPENDIX A. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG1D2822-14	Rev. 01	Initial issue of report	May 27, 2014

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4)	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133(6.4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	RSS-GEN(4.6.1) RSS-133(2.3)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Band Edge Measurement	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Conducted Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 24.31 dB at 4182.000 MHz
3.8	§2.1055 §22.355 §24.235	RSS-132(5.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



# 1 General Description

## 1.1 Applicant

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 200 Rocklin CA 95765 USA

## 1.2 Manufacturer

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 200 Rocklin CA 95765 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Point of Sale Terminal
Brand Name	VeriFone
Model Name	VX520/VX520G
FCC ID	B32VX520G
EUT supports Radios application	GSM/GPRS
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory	
AC Adapter 1	Brand Name: VeriFone
	Model No. : AU1370933g
	Power Rating : I/P: 100-240Vac, 2A, O/P:9.3Vdc, 4A
	Power Cord: 1.8 meter, non-shielded cable, with ferrite core
AC Adapter 2	Brand Name: VeriFone
	Model No. : SM09003A
	Power Rating : I/P: 100-240Vac, 2A, O/P:9.3Vdc, 4A
	Power Cord: 1.8 meter, non-shielded cable, with ferrite core
Battery 1	Brand Name: VeriFone
	Manufacturer : Palladium Energy
	Model No. : 24016-01-R
Battery 2	Brand Name: VeriFone
	Manufacturer : SANYO
	Model No. : 24016-01-R
Battery 3	Brand Name: VeriFone
	Manufacturer : Samsung
	Model No. : 24016-01-R

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.63 dBm GSM1900 : 29.98 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.11	0.04 ppm	250KGXW
Part 24	GSM1900 GPRS class 8	GMSK	1.24	0.02 ppm	246KGXW

## 1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	03CH07-HY

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850.
2. 30 MHz to 19000 MHz for GSM1900.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link
GSM 1900	■ GPRS class 8 Link	■ GPRS class 8 Link


**Note:** The maximum power levels is GPRS multi-slot class 8 mode for GMSK link, only these modes were used for all tests.

#### Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	32.34	32.48	32.63	29.53	29.85	29.98
GPRS class 10	32.32	32.47	32.62	29.50	29.82	29.93



## 2.2 Connection Diagram of Test System

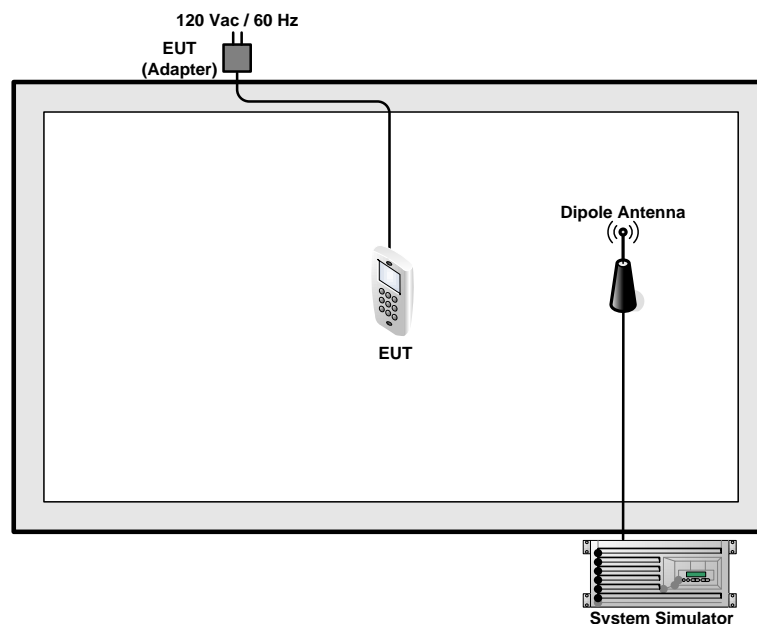

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of Conducted Output Power

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM1900 (GPRS class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
Conducted Power (dBm)	32.34	32.48	32.63	29.53	29.85	29.98

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.2.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.

Record the maximum PAPR level associated with a probability of 0.1%.

### 3.2.4 Test Setup

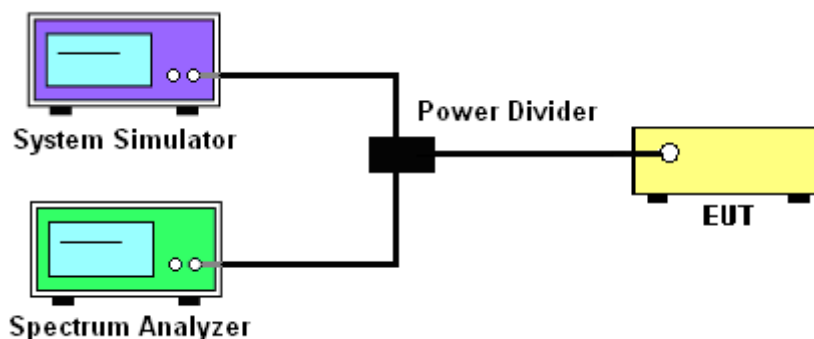


### 3.2.5 Test Result of Peak-to-Average Ratio

	Cellular Band			PCS Band		
Modes	GSM850 (GPRS class 8)			GSM1900 (GPRS class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.16	0.16	0.16	0.16	0.16	0.20

### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


<b>Band :</b>	<b>GSM 850</b>	<b>Test Mode :</b>	<b>GPRS class 8 Link (GMSK)</b>
---------------	----------------	--------------------	---------------------------------

#### Peak-to-Average Ratio on Channel 128 (824.2 MHz)

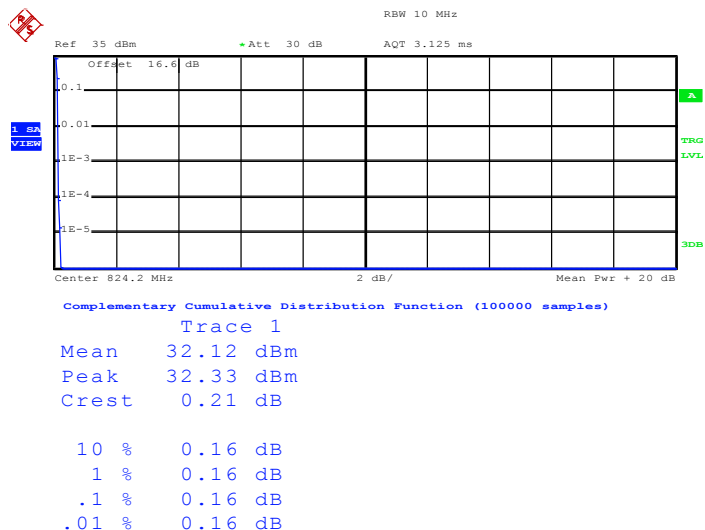

Date: 18.MAY.2014 14:54:43


#### Peak-to-Average Ratio on Channel 189 (836.4 MHz)

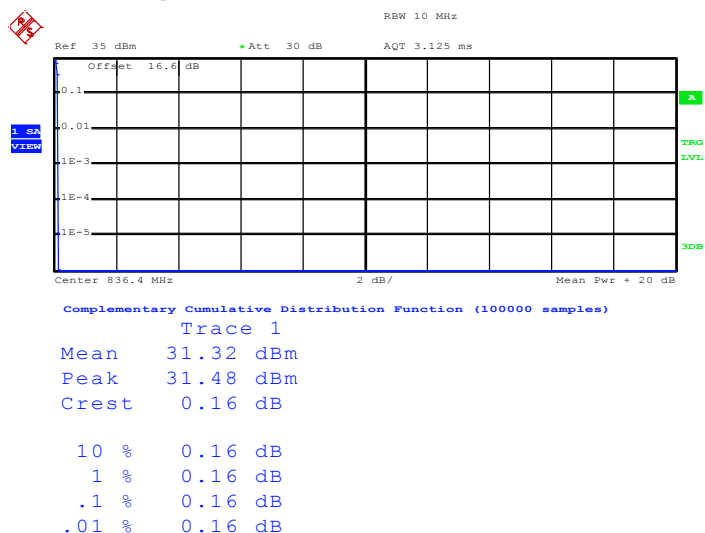

Date: 18.MAY.2014 14:55:11



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

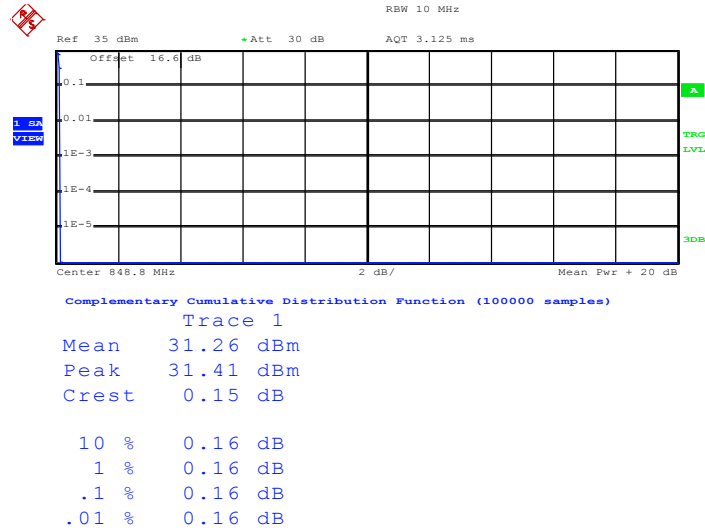


Date: 18.MAY.2014 14:55:30




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

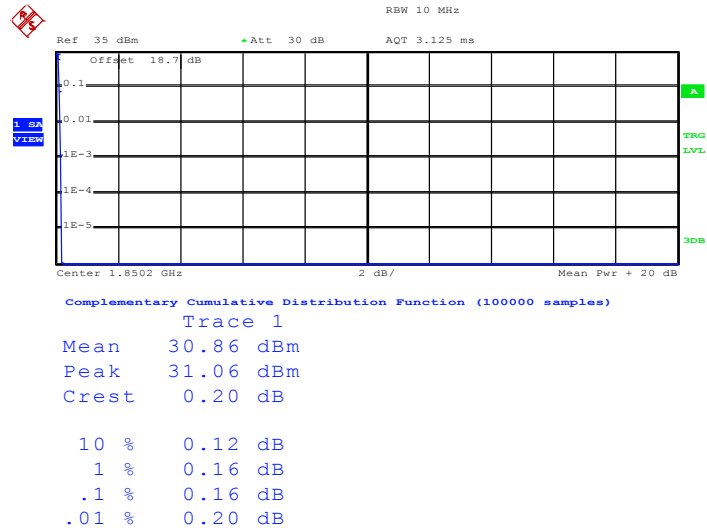

Date: 18.MAY.2014 15:59:18


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

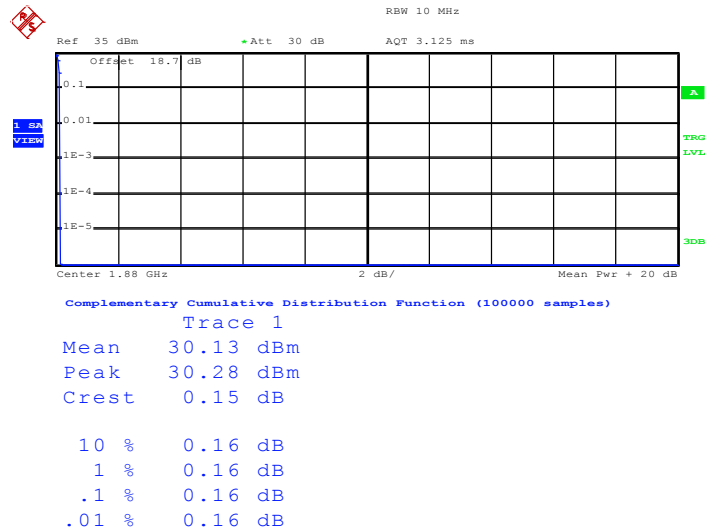

Date: 18.MAY.2014 15:58:46



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

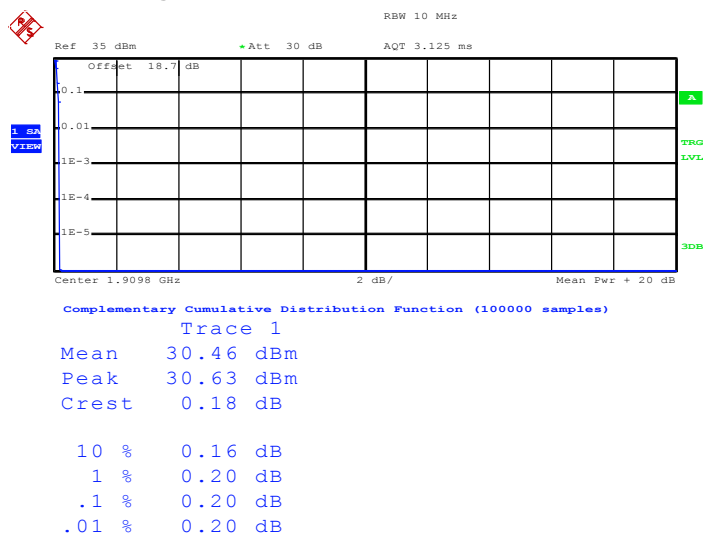

Date: 18.MAY.2014 15:59:42



### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ .

### 3.3.4 Test Setup

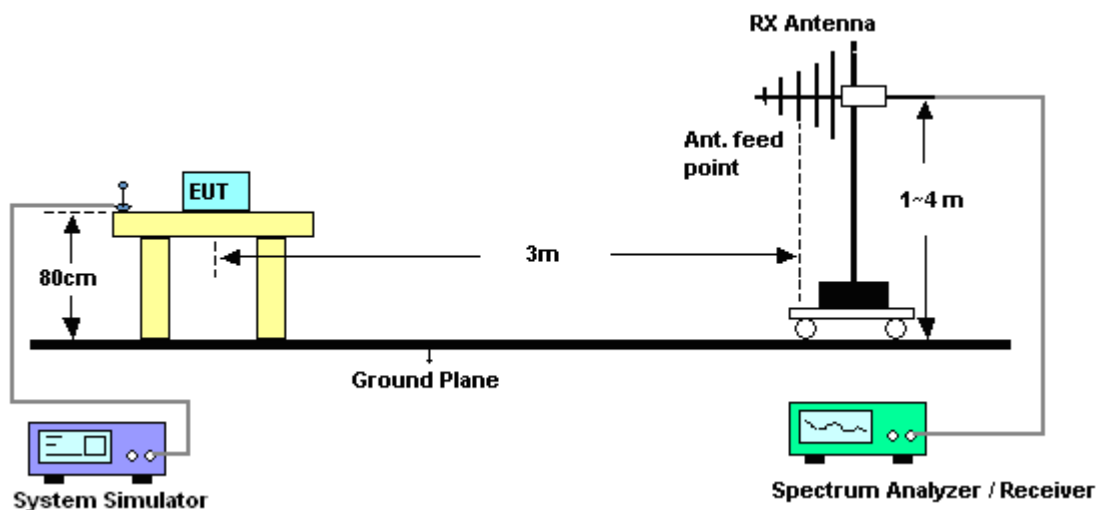

### 3.3.5 Test Result of ERP

<b>GSM850 (GPRS class 8) Radiated Power ERP</b>				
Horizontal Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.2	-11.75	32.00	18.10	0.06
836.4	-10.95	32.06	18.96	0.08
848.8	-10.39	32.76	20.22	0.11
Vertical Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.2	-14.97	34.43	17.31	0.05
836.4	-13.01	34.01	18.85	0.08
848.8	-13.95	33.56	17.46	0.06

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

### 3.3.6 Test Result of EIRP

<b>GSM1900 (GPRS class 8) Radiated Power EIRP</b>				
Horizontal Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>EIRP (dBm)</b>	<b>EIRP (W)</b>
1850.2	-10.74	39.88	29.14	0.82
1880.0	-11.47	39.74	28.27	0.67
1909.8	-12.71	39.91	27.20	0.52
Vertical Polarization				
<b>Frequency (MHz)</b>	<b>LVL (dBm)</b>	<b>Correction Factor (dB)</b>	<b>EIRP (dBm)</b>	<b>EIRP (W)</b>
1850.2	-9.86	40.08	30.22	1.05
1880.0	-9.41	40.35	30.94	1.24
1909.8	-9.72	40.01	30.29	1.07

\* EIRP = LVL (dBm) + Correction Factor (dB)

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

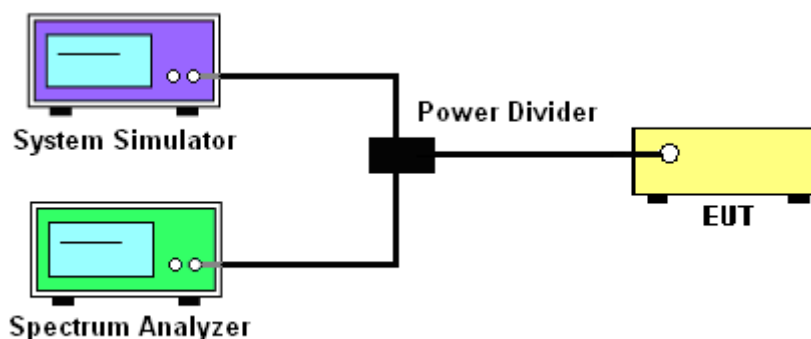


### 3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM1900 (GPRS class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
99% OBW (kHz)	242.00	246.00	250.00	246.00	246.00	246.00
26dB BW (kHz)	314.00	314.00	314.00	316.00	314.00	320.00

### 3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


<b>Band :</b>	GSM 850	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	---------	--------------------	--------------------------

#### 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

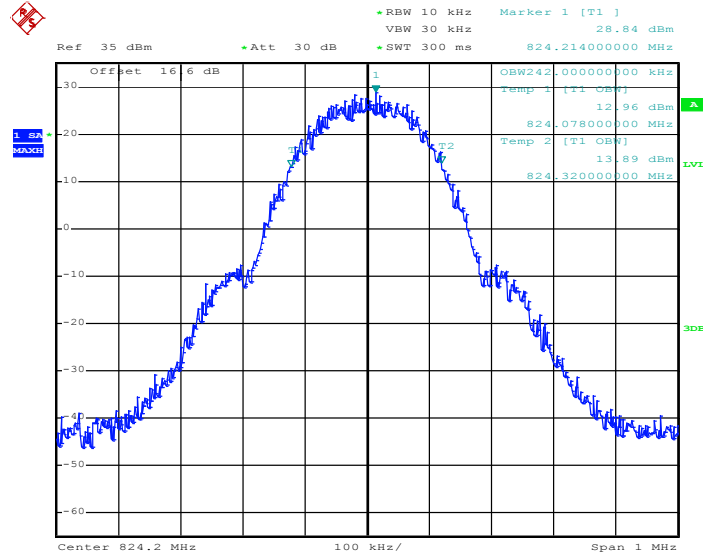

Date: 18.MAY.2014 14:50:01


#### 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

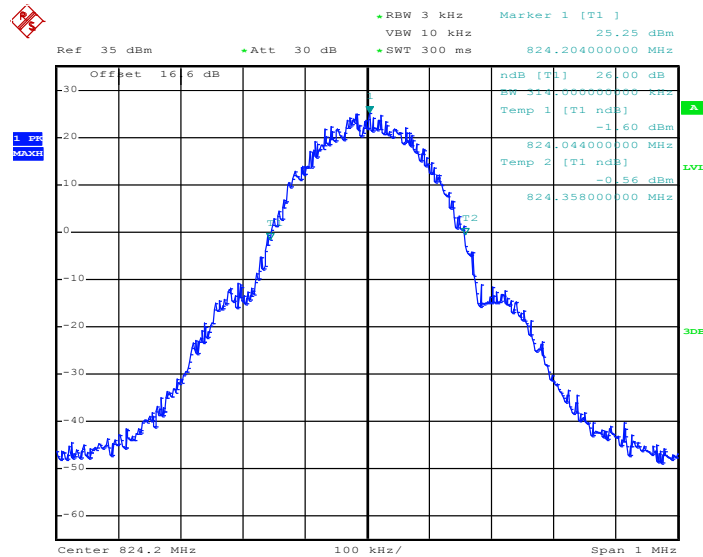

Date: 18.MAY.2014 14:47:21




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

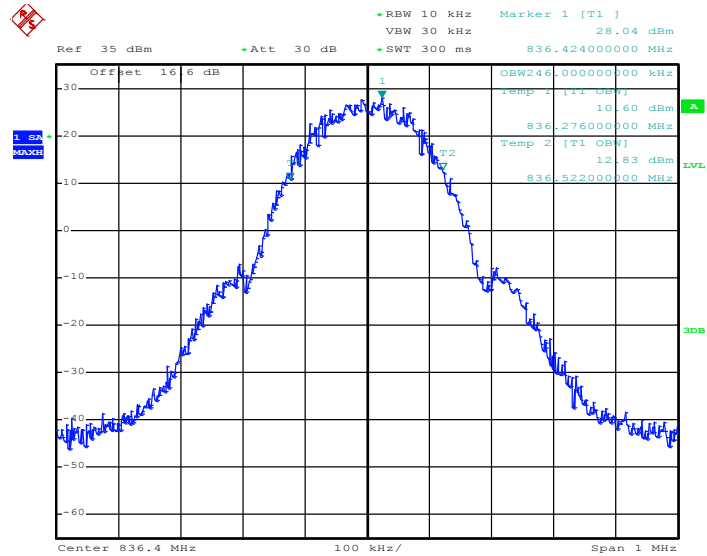

Date: 18.MAY.2014 14:49:16


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

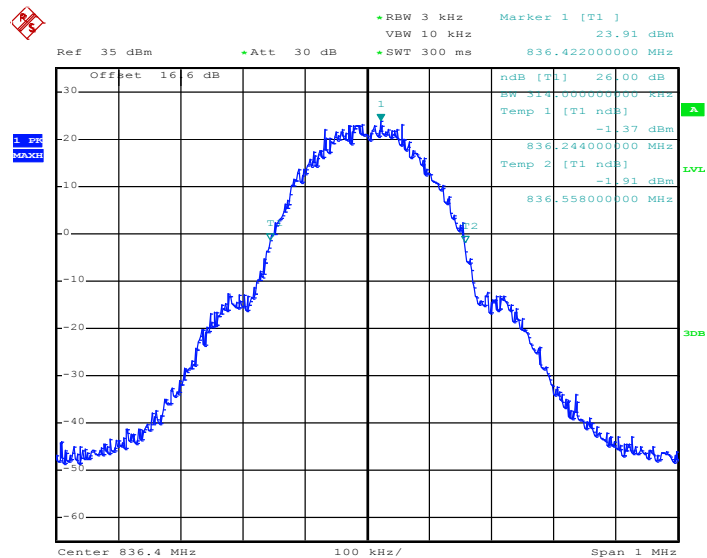

Date: 18.MAY.2014 14:47:57




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

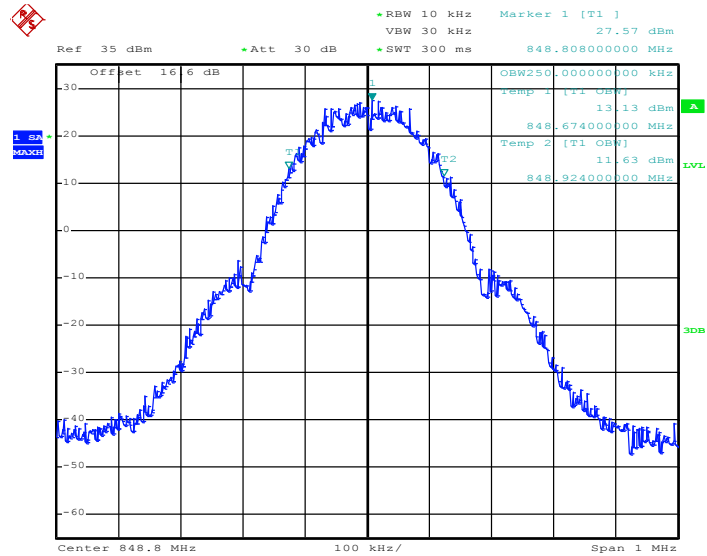

Date: 18.MAY.2014 14:50:43

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

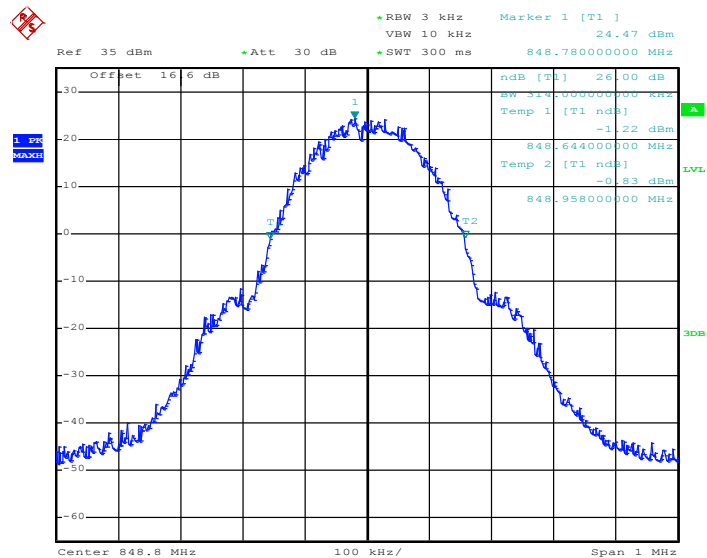


Date: 18.MAY.2014 14:46:45






Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

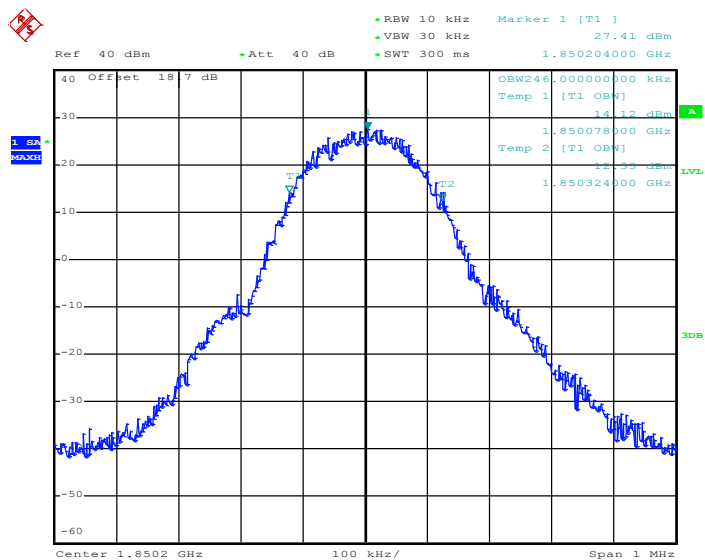


Date: 18.MAY.2014 15:27:05


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

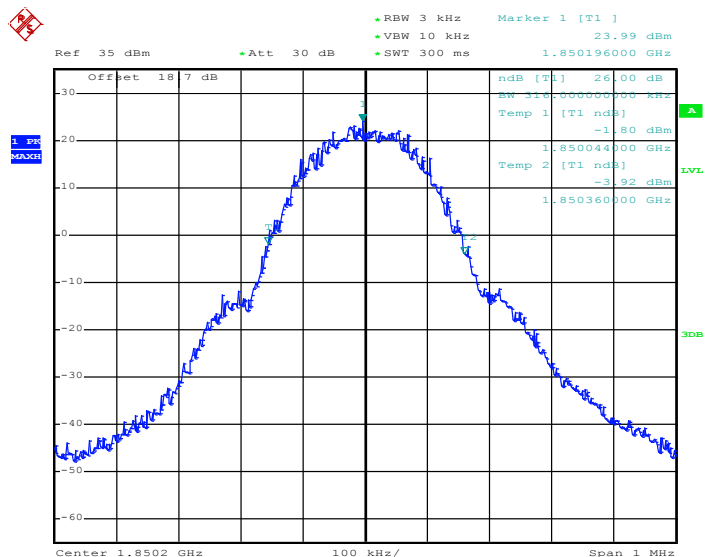

Date: 18.MAY.2014 15:20:14

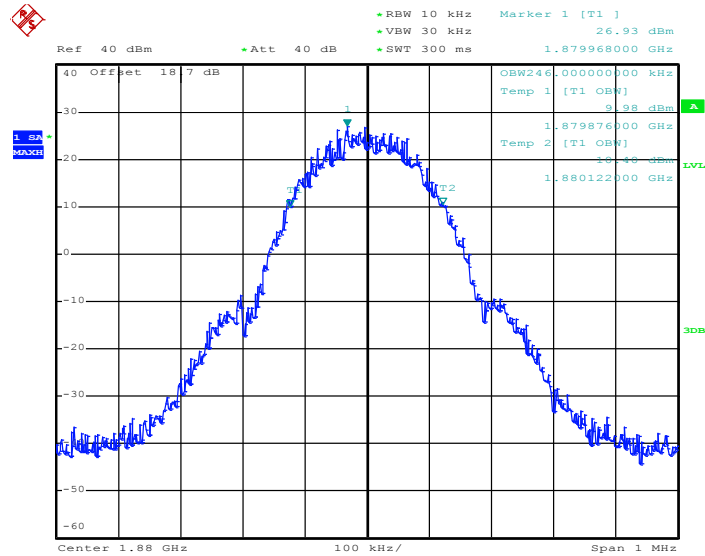**99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)**


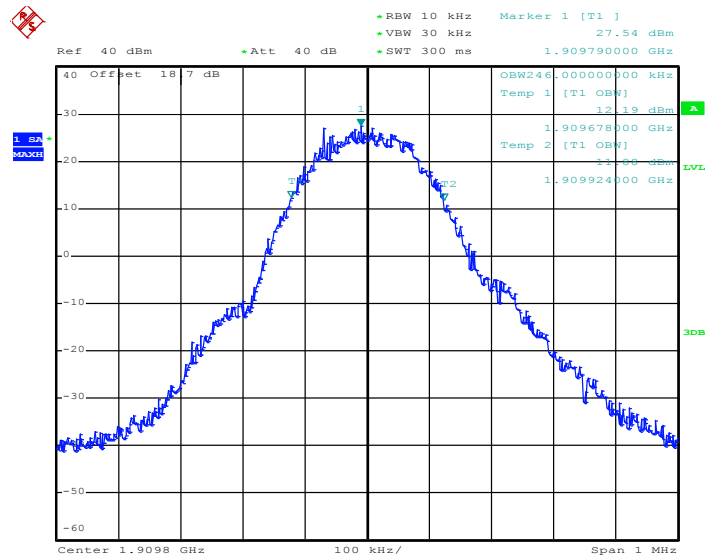
Date: 18.MAY.2014 15:22:54

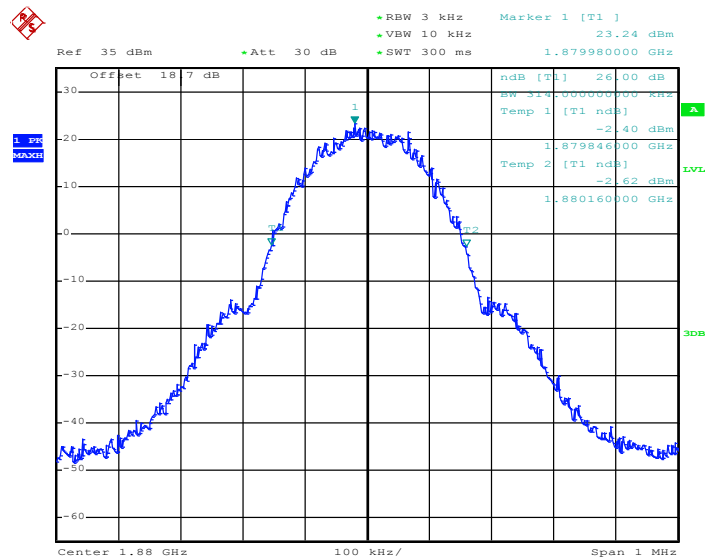**26dB Bandwidth Plot on Channel 661 (1880.0 MHz)**


Date: 18.MAY.2014 15:20:42




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)



Date: 18.MAY.2014 15:25:46

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

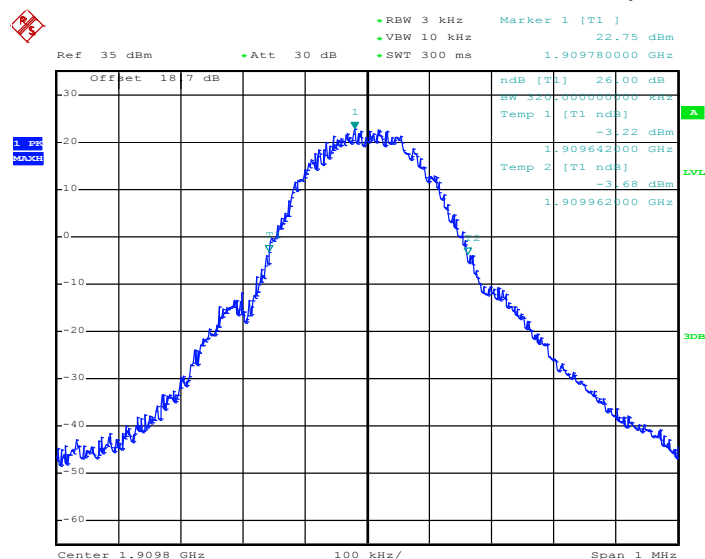

Date: 18.MAY.2014 15:21:11

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$


#### 3.5.4 Test Setup

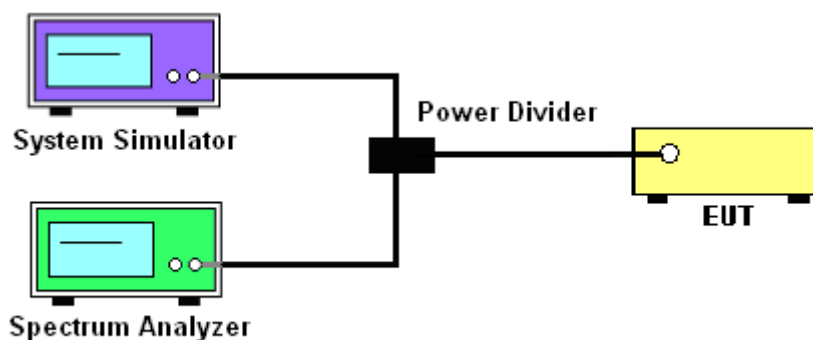

### 3.5.5 Test Result (Plots) of Conducted Band Edge


<b>Band :</b>	GSM850	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	--------	--------------------	--------------------------

#### Lower Band Edge Plot on Channel 128 (824.2 MHz)

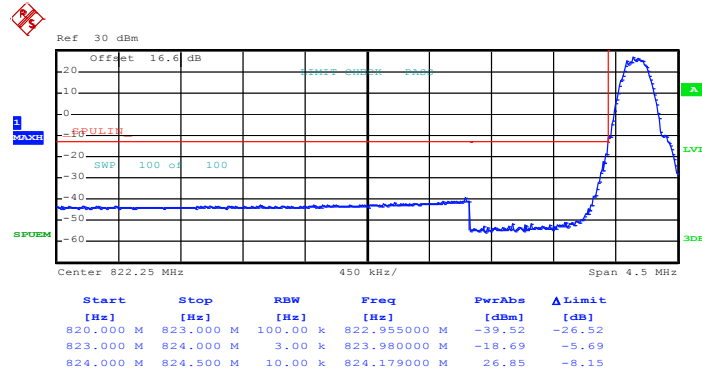

Date: 18.MAY.2014 14:40:35

#### Higher Band Edge Plot on Channel 251 (848.8 MHz)

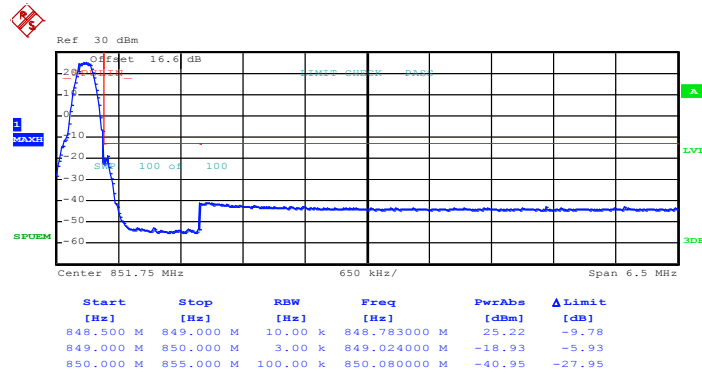


Date: 18.MAY.2014 14:43:25



Band : GSM1900


Test Mode : GPRS class 8 Link (GMSK)

## Lower Band Edge Plot on Channel 512 (1850.2 MHz)

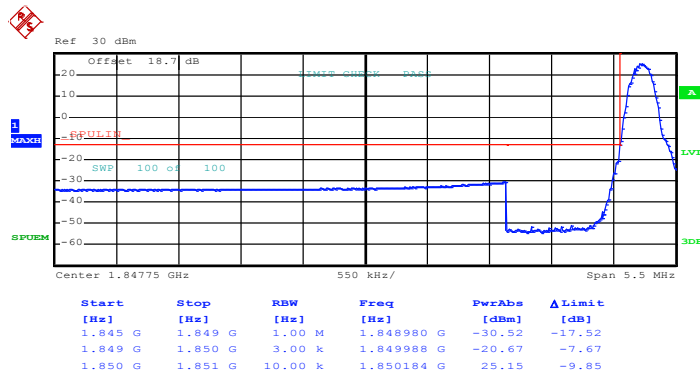

Date: 18.MAY.2014 15:34:19

## Higher Band Edge Plot on Channel 810 (1909.8 MHz)

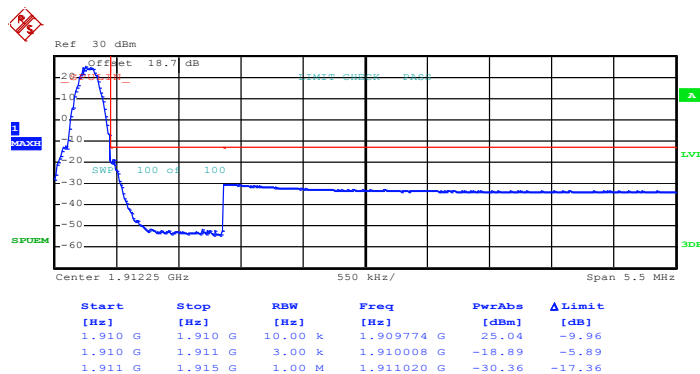

Date: 18.MAY.2014 15:38:11

### 3.6 Conducted Spurious Emission Measurement

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures


1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .

#### 3.6.4 Test Setup

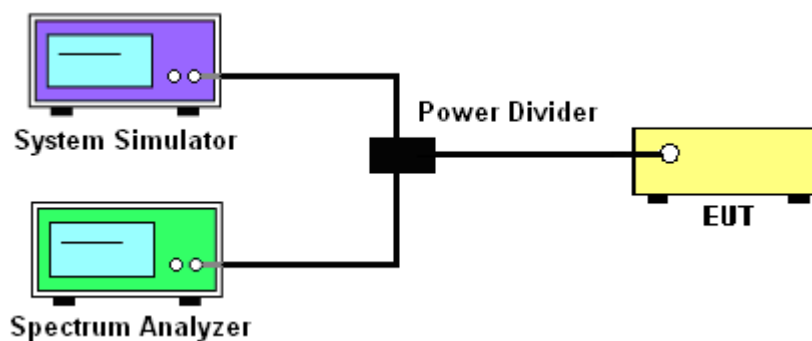


### 3.6.5 Test Result (Plots) of Conducted Spurious Emission

<b>Band :</b>	GSM850	<b>Channel :</b>	CH189
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	836.4 MHz

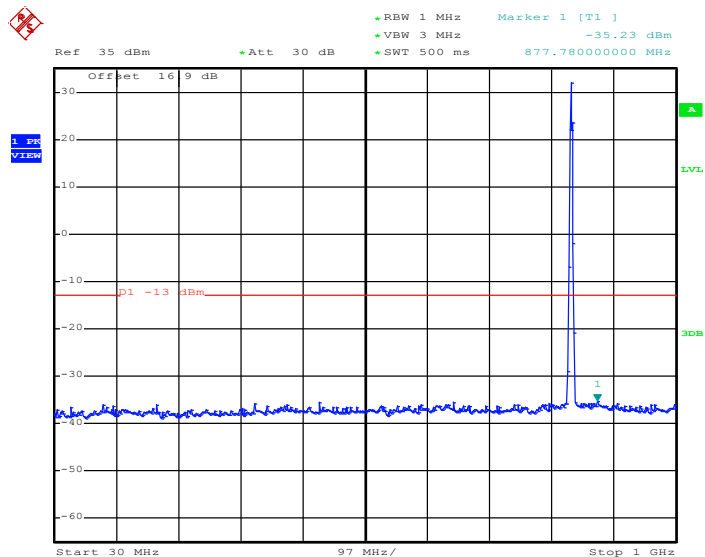**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 18.MAY.2014 14:58:12

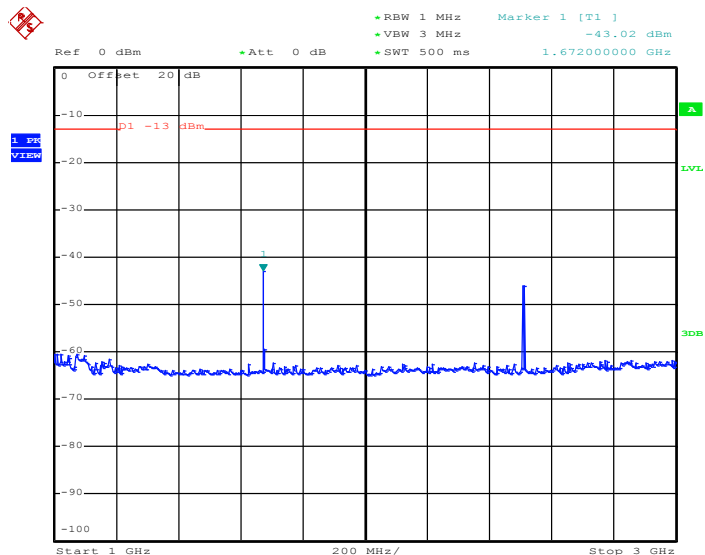
**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 18.MAY.2014 14:58:23







### Conducted Spurious Emission Plot between 7GHz ~ 9GHz




<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	1880.0 MHz

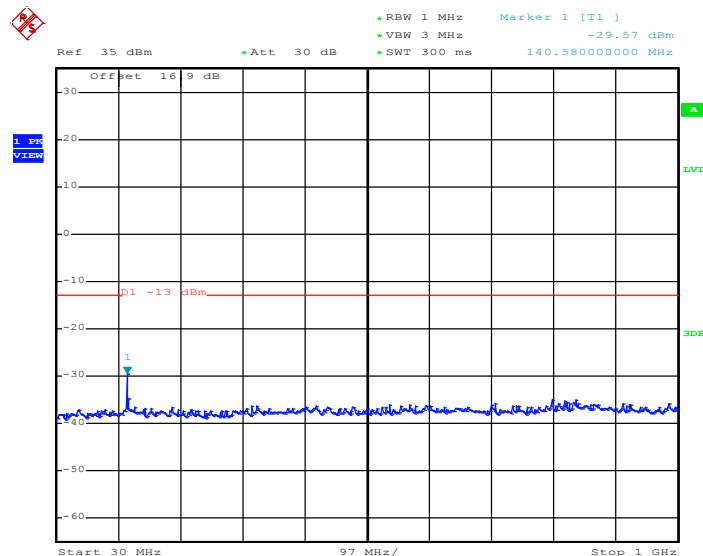**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


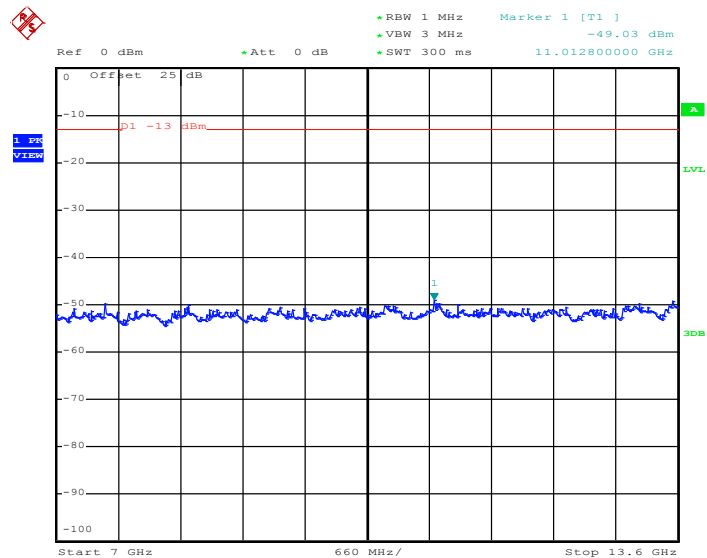
Date: 18.MAY.2014 16:04:25

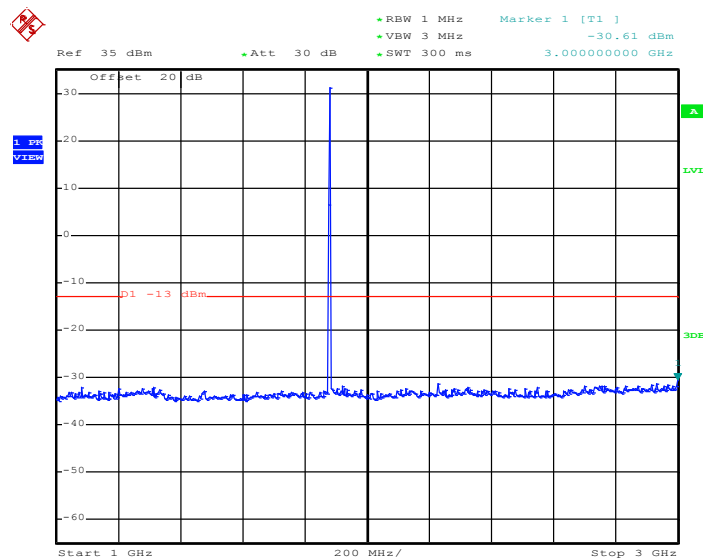**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 18.MAY.2014 16:04:33

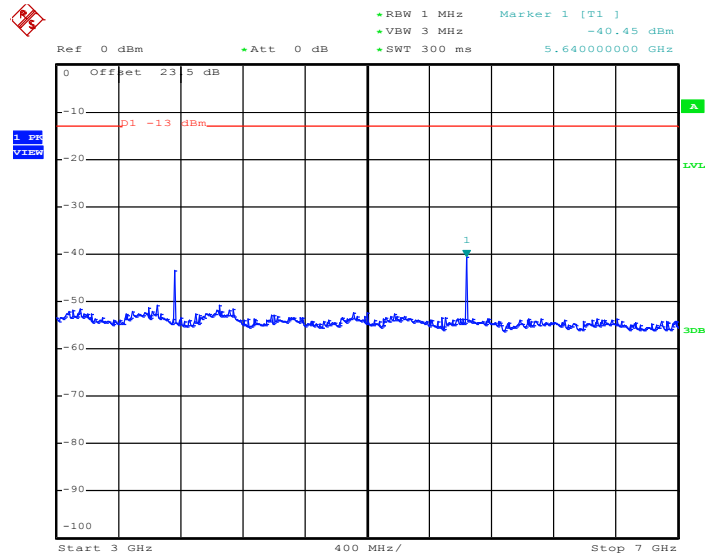**Conducted Spurious Emission Plot between 3GHz ~ 7GHz**


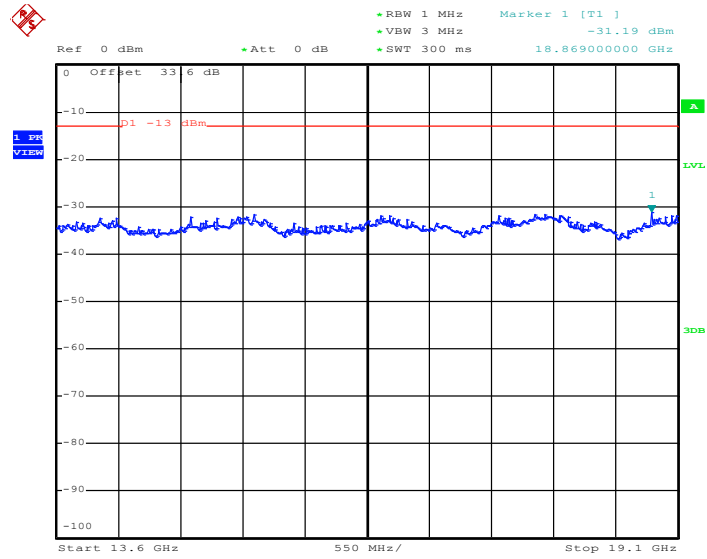
Date: 18.MAY.2014 16:04:44

**Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz**


Date: 18.MAY.2014 16:04:52



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz



Date: 18.MAY.2014 16:05:00

### 3.7 Field Strength of Spurious Radiation Measurement

#### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

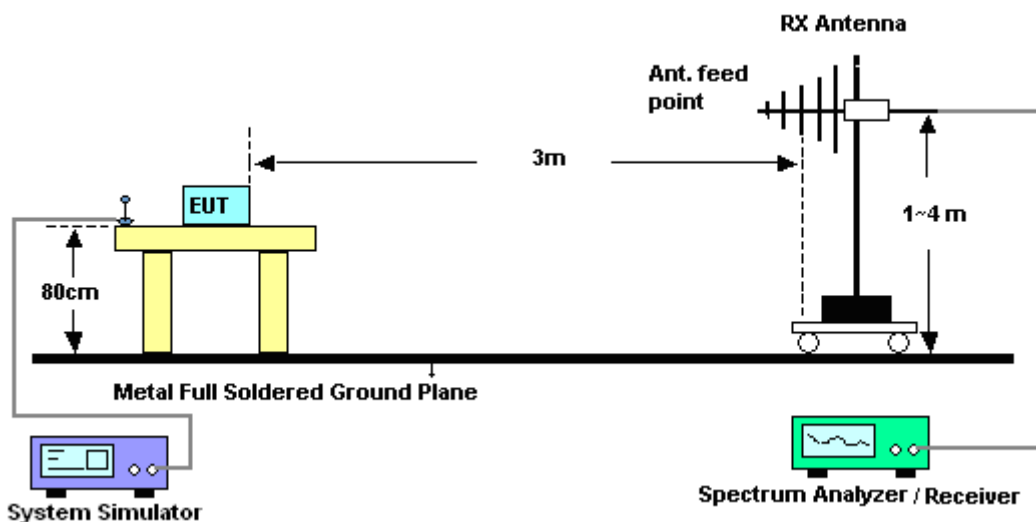


For radiated emissions above 1GHz

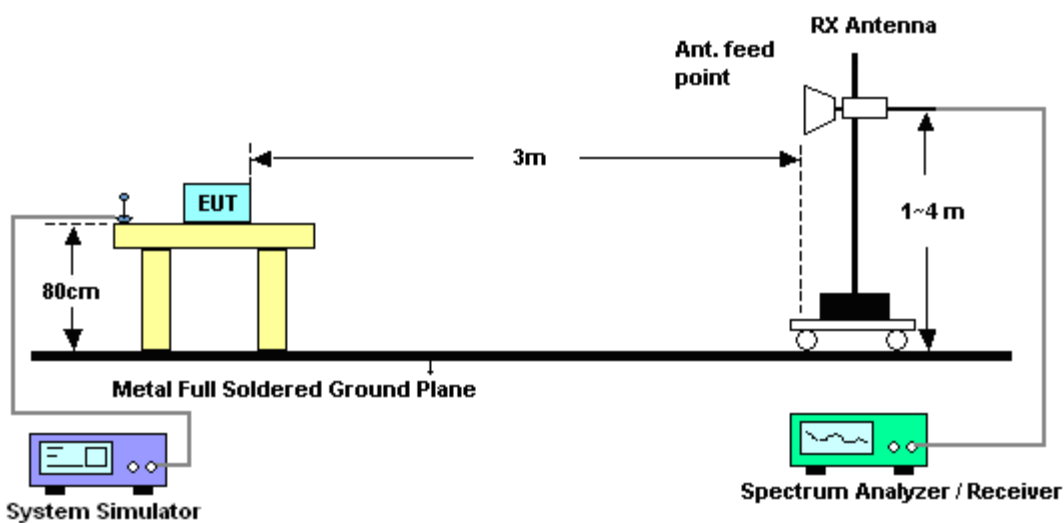

**3.7.5 Test Result of Field Strength of Spurious Radiated**

<b>Band :</b>	GSM850	<b>Temperature :</b>	22~24°C
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

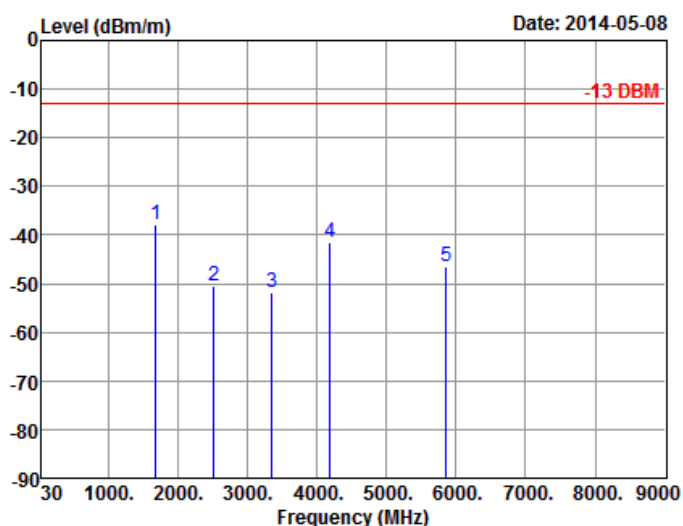


Site : 03CH07-HY

Condition: 3m EIRP\_140314\_H HORIZONTAL

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-37.70	-13	-24.70	-44.38	-42.09	4.49792	8.89	H	Pass
2510	-50.61	-13	-37.61	-60.67	-55.91	5.70772	11.00	H	Pass
3345	-51.97	-13	-38.97	-64.75	-57.03	6.970775	12.03	H	Pass
4182	-41.40	-13	-28.40	-57.33	-45.94	8.12762	12.66	H	Pass
5855	-46.47	-13	-33.47	-67	-50.57	9.09941	13.20	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	22~24°C
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

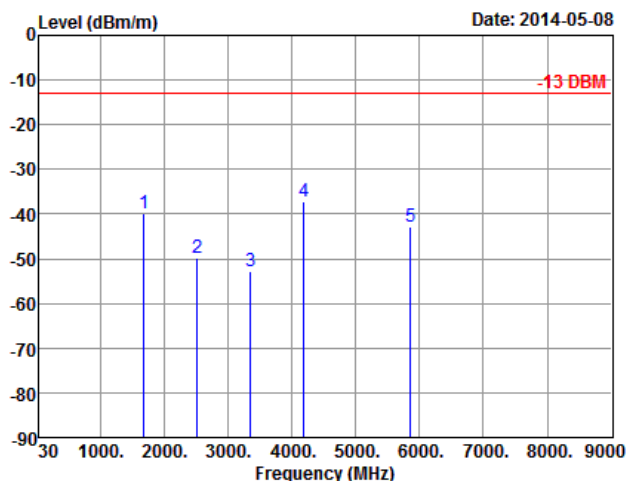


Site : 03CH07-HY  
Condition: 3m EIRP\_140314\_V VERTICAL

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-39.77	-13	-26.77	-45.41	-44.16	4.49792	8.89	V	Pass
2510	-49.93	-13	-36.93	-61.48	-55.23	5.70772	11.00	V	Pass
3345	-52.92	-13	-39.92	-64.72	-57.98	6.970775	12.03	V	Pass
4182	-37.31	-13	-24.31	-52.81	-41.85	8.12762	12.66	V	Pass
5855	-42.93	-13	-29.93	-63.09	-47.03	9.09941	13.20	V	Pass





<b>Band :</b>	GSM1900	<b>Temperature :</b>	22~24°C
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

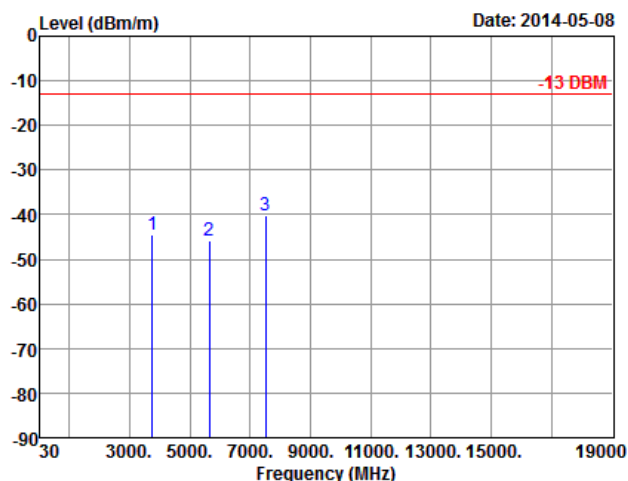


Site : 03CH07-HY  
Condition: 3m EIRP\_140314\_H HORIZONTAL

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-44.63	-13	-31.63	-59.53	-49.71	7.4802	12.56	H	Pass
5639	-45.97	-13	-32.97	-66.22	-50.36	8.80968	13.20	H	Pass
7520	-40.02	-13	-27.02	-64.54	-41.62	9.597	11.20	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	22~24°C
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

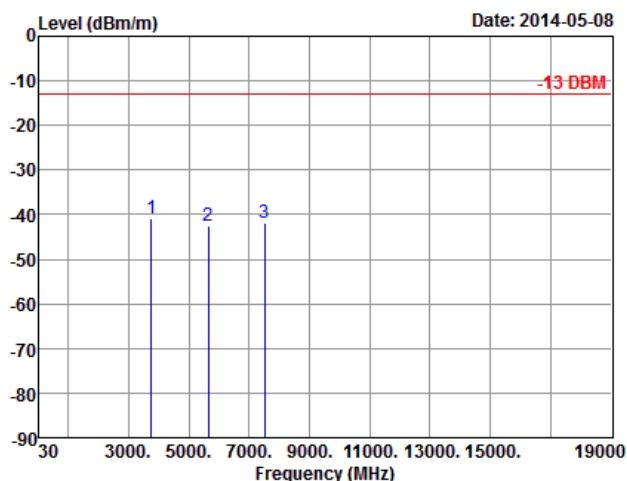

Site : 03CH07-HY  
Condition: 3m EIRP\_140314\_V VERTICAL

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-40.85	-13	-27.85	-55.79	-45.93	7.4802	12.56	V	Pass
5639	-42.45	-13	-29.45	-61.5	-46.84	8.80968	13.20	V	Pass
7520	-41.76	-13	-28.76	-65.05	-43.36	9.597	11.20	V	Pass

### 3.8 Frequency Stability Measurement

#### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

#### 3.8.5 Test Setup

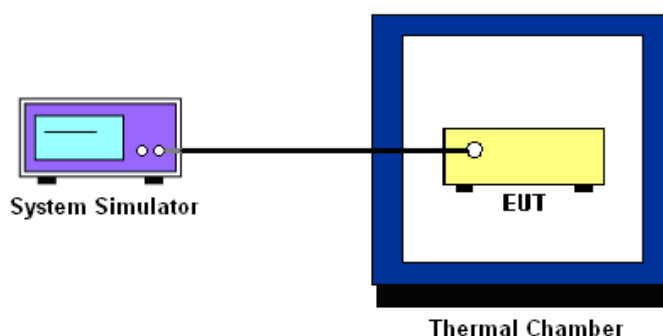

**3.8.6 Test Result of Temperature Variation**

<b>Band :</b>	GSM 850	<b>Channel :</b>	189
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	GPRS class 8	Result
	Deviation (ppm)	
50	0.0299	PASS
40	0.0251	
30	0.0311	
20	0.0263	
10	0.0227	
0	0.0323	
-10	0.0335	
-20	0.0359	
-30	0.0335	

<b>Band :</b>	GSM 1900	<b>Channel :</b>	661
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	1880.0 MHz

Temperature (°C)	GPRS class 8	Result
	Deviation (ppm)	
50	0.0213	PASS
40	0.0223	
30	0.0207	
20	0.0176	
10	0.0197	
0	0.0165	
-10	0.0229	
-20	0.0218	
-30	0.0234	

**3.8.7 Test Result of Voltage Variation**

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	9.50	0.0251	2.5	PASS
		9.30	0.0275		
		BEP	0.0203		
GSM 1900 CH661	GPRS class 8	9.50	0.0160		
		9.30	0.0170		
		BEP	0.0191		

**Note:**

1. Normal Voltage = 9.30V.
2. Battery End Point (BEP) = 6.30 V.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Aug. 01, 2013	May 18, 2014	Jul. 31, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	May 18, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 19, 2013	May 18, 2014	Jul. 18, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	May 08, 2014~ May 09, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	May 08, 2014~ May 09, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	May 08, 2014~ May 09, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	May 08, 2014~ May 09, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	May 08, 2014~ May 09, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	May 08, 2014~ May 09, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/L	N/A	N/A	May 08, 2014~ May 09, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 03, 2013	May 08, 2014~ May 09, 2014	Oct. 02, 2014	Radiation (03CH07-HY)



## **5 Uncertainty of Evaluation**

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------