


FCC SAR TEST REPORT

FCC ID : PY7-77089S
Equipment : GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII
a/b/g/n/ac/lax, GPS and NFC
Applicant : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jun 18, 2021 and testing was started from Jun 21, 2021 and completed on Jun 29, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
3.2 Device Serial Number	5
3.3 General LTE SAR Test and Reporting Considerations	6
4. RF Exposure Limits.....	8
4.1 Uncontrolled Environment.....	8
4.2 Controlled Environment.....	8
5. Specific Absorption Rate (SAR).....	9
5.1 Introduction	9
5.2 SAR Definition.....	9
6. System Description and Setup	10
6.1 Test Site Location.....	10
6.2 E-Field Probe	11
6.3 Data Acquisition Electronics (DAE)	11
6.4 Phantom.....	12
6.5 Device Holder.....	13
7. Measurement Procedures	14
7.1 Spatial Peak SAR Evaluation.....	14
7.2 Power Reference Measurement.....	15
7.3 Area Scan	15
7.4 Zoom Scan.....	16
7.5 Volume Scan Procedures.....	16
7.6 Power Drift Monitoring.....	16
8. Test Equipment List.....	17
9. System Verification	18
9.1 Tissue Verification	18
9.2 System Performance Check Results.....	19
10. RF Exposure Positions	20
10.1 Ear and handset reference point.....	20
10.2 Definition of the cheek position	21
10.3 Definition of the tilt position	22
10.4 Body Worn Accessory	22
10.5 Product Specific Exposure	23
10.6 Wireless Router.....	23
11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm).....	24
12. DL carrier aggregation.....	43
13. WiFi/Bluetooth Output Power (Unit: dBm)	44
14. RF Exposure Conditions	51
15. SAR Test Results	51
15.1 Head SAR	53
15.2 Hotspot SAR	56
15.3 Body Worn Accessory SAR.....	59
15.4 Product Specific SAR.....	61
16. Simultaneous Transmission Analysis	62
16.1 Head Exposure Conditions	63
16.2 Hotspot Exposure Conditions.....	65
16.3 Body-Worn Accessory Exposure Conditions	68
16.4 Product Specific Exposure Conditions	69
17. Uncertainty Assessment	70
18. References.....	70
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos and Antenna Location	

History of this test report

Report No.	Version	Description	Issued Date
FA133143	01	Initial issue of report	Jul. 14, 2021

1. Statement of Compliance

Applicant Name	Sony Corporation			
EUT Description	GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS and NFC			
FCC ID	PY7-77089S			
HW Version	A			
SW Version	3.69 3.46			
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	NII	DSS
Head (1g SAR W/kg)	0.22	0.55	0.32	0.24
Body-Worn (1g SAR W/kg)	0.50	0.21	0.05	0.10
Wireless Router (1g SAR W/kg)	0.74	0.27	0.07	0.11
Product Specific (10g SAR W/kg)			0.19	
Highest Simultaneous Transmission (1g SAR W/kg)	Head: 1.09 Hotspot: 0.74 Body-worn: 0.74	Head: 1.09 Hotspot: 0.74 Body-worn: 0.74	Head: 1.09 Hotspot: 0.74 Body-worn: 0.70	Head: 0.99 Hotspot: 0.74 Body-worn: 0.69
Highest Simultaneous Transmission (10g SAR W/kg)			Product Specific: 0.35	
Date Tested	2021/6/21 ~ 2021/6/29			
Test Result	Pass			
Remark:				
1. This device 2.4/5.2/5.8GHz WLAN support Hotspot operation and Bluetooth support tethering applications.				
2. When 2.4GHz and 5GHz WLAN transmit at the same time, the device will limit different power for 2.4GHz WLAN refer to tune-up procedure for the detail power level, in this report the Sim-Tx analysis was evaluated at higher power level and compliance with FCC requirement.				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	· GSM Voice · GPRS (GMSK) · EDGE (8PSK)	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (Yes)		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	· AMR / RMC 12.2Kbps · HSDPA · HSUPA · DC-HSDPA	
LTE (FDD)	Band 4 Band 5 Band 7 Band 13 Band 17	· QPSK · 16QAM · 64QAM	
LTE (TDD)	Band 41		
WiFi	2.4GHz: 2412 MHz ~ 2462 MHz	· 11b · 11g · 11n (HT20) · 11ax (HE20)	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	· 11a · 11n (HT20) · 11n (HT40) · 11ac (VHT20) · 11ac (VHT40) · 11ac (VHT80) · 11ac (VHT160) · 11ax (HE20) · 11ax (HE40) · 11ax (HE80) · 11ax (HE160)	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

3.2 Device Serial Number

Band	SN
WWAN	QV72001F9B
	QV72001C9B
WLAN	QV7200279B
	QV72001G9B
	QV72000H9B
	QV7200139B

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

3.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05									
FCC ID		PY7-77089S							
Equipment Name		GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS and NFC							
Operating Frequency Range of each LTE transmission band		LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 41: 2496 MHz ~ 2690 MHz							
Channel Bandwidth		LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used		QPSK / 16QAM / 64QAM							
LTE Voice / Data requirements		Voice and Data							
LTE MPR permanently built-in by design		Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
		Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
			1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
		QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
		16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
		16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
		64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
		64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
		256 QAM	≥ 1						≤ 5
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
LTE Carrier Aggregation Combinations		Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 12.							
LTE Carrier Aggregation Additional Information		2. This device supports maximum of 2 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5		
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

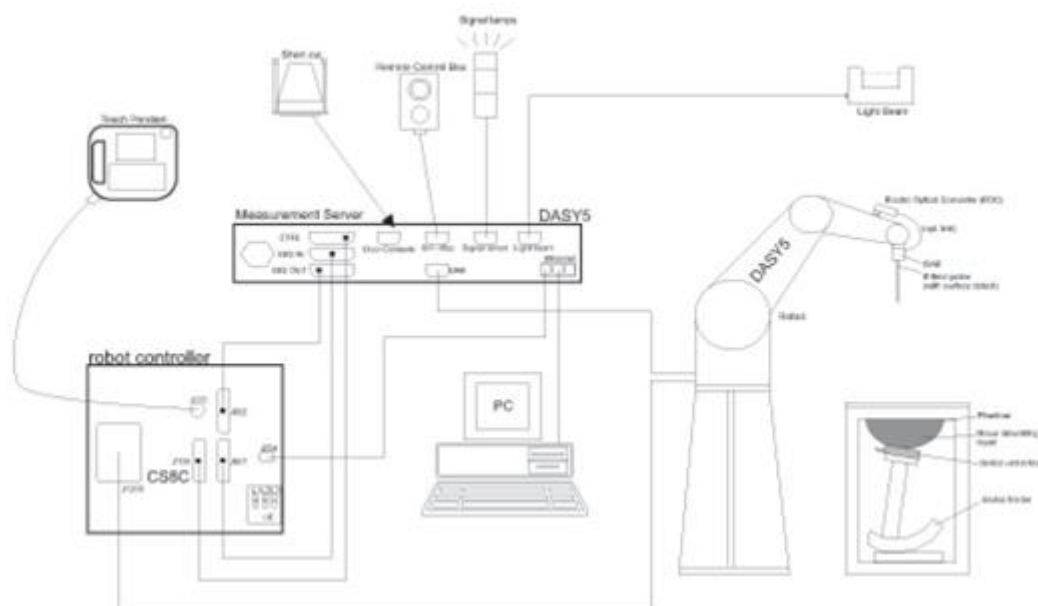

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

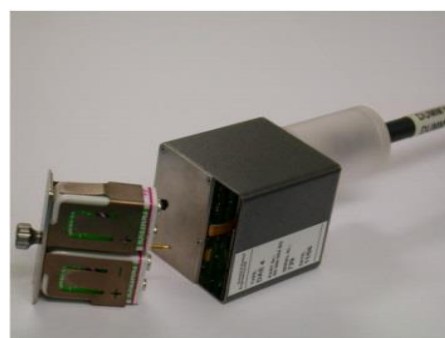


Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 05, 2022
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 25, 2019	Nov. 23, 2021
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Mar. 07, 2019	Mar. 04, 2022
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Mar. 07, 2019	Mar. 04, 2022
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2019	Nov. 19, 2021
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1078	Mar. 06, 2019	Mar. 03, 2022
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1128	Dec. 16, 2019	Dec. 14, 2021
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2021	May. 20, 2022
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 19, 2021	Jan. 18, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Feb. 23, 2021	Feb. 22, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7351	Jul. 06, 2020	Jul. 05, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 10, 2020	Nov. 09, 2021
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 10, 2020	Nov. 09, 2021
Keysight	Wireless Communication Test Set	E5515C	MY50267236	Mar. 21, 2021	Mar. 20, 2022
R&S	BT Base Station	CBT	100815	Feb. 19, 2021	Feb. 18, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 11, 2020	Nov. 10, 2021
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 03, 2020	Sep. 02, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 06, 2020	Nov. 05, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 15, 2021	Jan. 14, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 21, 2020	Oct. 20, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Aug. 26, 2020	Aug. 25, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.5	0.893	41.403	0.89	41.90	0.34	-1.19	± 5	2021/6/25
835	22.4	0.892	42.332	0.90	41.50	-0.89	2.00	± 5	2021/6/21
1750	22.5	1.337	39.015	1.37	40.10	-2.41	-2.71	± 5	2021/6/23
1900	22.1	1.401	40.250	1.40	40.00	0.07	0.63	± 5	2021/6/22
2450	22.2	1.810	38.825	1.80	39.20	0.56	-0.96	± 5	2021/6/28
2600	22.4	1.980	39.120	1.96	39.00	1.02	0.31	± 5	2021/6/24
5250	22.7	4.801	37.002	4.71	35.95	1.93	2.93	± 5	2021/6/26
5250	22.4	4.715	36.916	4.71	35.95	0.11	2.69	± 5	2021/6/29
5600	22.4	5.113	36.368	5.07	35.50	0.85	2.45	± 5	2021/6/29
5750	22.4	5.268	36.176	5.22	35.35	0.92	2.34	± 5	2021/6/29

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Side	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR08	2021/6/25	750	250	D750V3-1107	EX3DV4 - SN7351	DAE4 Sn1424	2.12	8.32	8.48	1.92
SAR08	2021/6/21	835	250	D835V2-4d167	EX3DV4 - SN7351	DAE4 Sn1424	2.40	9.55	9.6	0.52
SAR08	2021/6/23	1750	250	D1750V2-1112	EX3DV4 - SN7351	DAE4 Sn1424	8.68	36.70	34.72	-5.40
SAR08	2021/6/22	1900	50	D1900V2-5d185	EX3DV4 - SN7351	DAE4 Sn1424	1.88	39.40	37.6	-4.57
SAR08	2021/6/28	2450	50	D2450V2-929	EX3DV4 - SN7351	DAE4 Sn1424	2.51	53.10	50.2	-5.46
SAR08	2021/6/24	2600	50	D2600V2-1078	EX3DV4 - SN7351	DAE4 Sn1424	2.72	57.60	54.4	-5.56
SAR08	2021/6/29	5750	100	D5GHZV2-1128-5750	EX3DV4 - SN7351	DAE4 Sn1424	7.37	79.10	73.7	-6.83

Test Side	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
SAR09	2021/6/26	5250	100	D5GHZV2-1128-5250	EX3DV4 - SN3728	DAE4 Sn778	7.59	80.00	75.9	-5.12	2.16	22.90	21.6	-5.68
SAR08	2021/6/29	5250	100	D5GHZV2-1128-5250	EX3DV4 - SN7351	DAE4 Sn1424	7.54	80.00	75.4	-5.75	2.26	22.90	22.6	-1.31
SAR08	2021/6/29	5600	100	D5GHZV2-1128-5600	EX3DV4 - SN7351	DAE4 Sn1424	8.00	82.40	80	-2.91	2.39	23.60	23.9	1.27

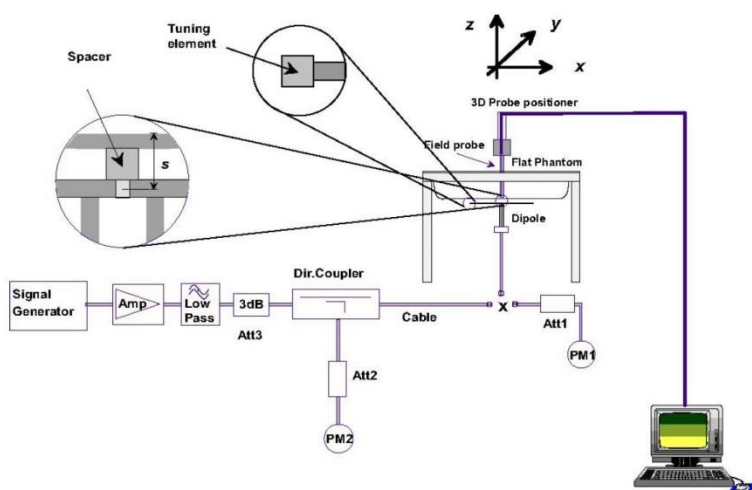


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

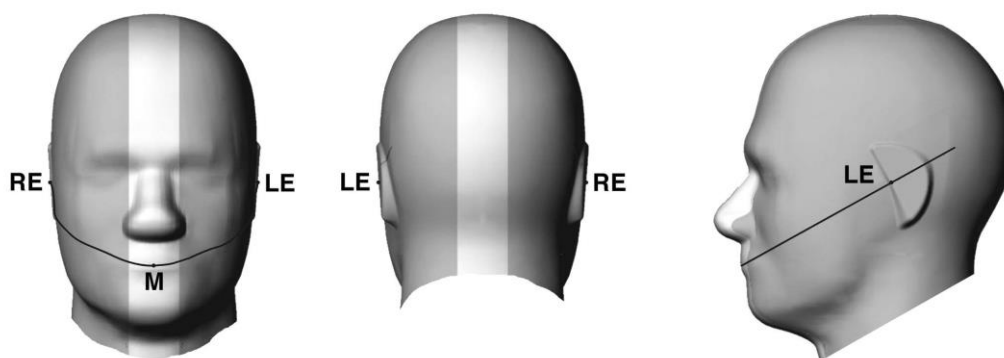


Fig 9.1.1 Front, back, and side views of SAM twin phantom

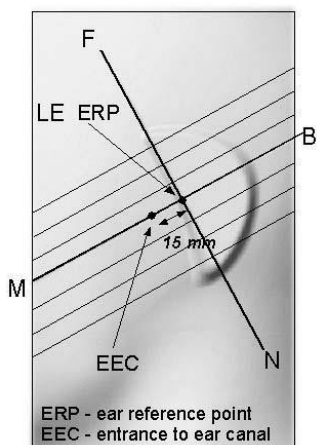


Fig 9.1.2 Close-up side view of phantom showing the ear region.

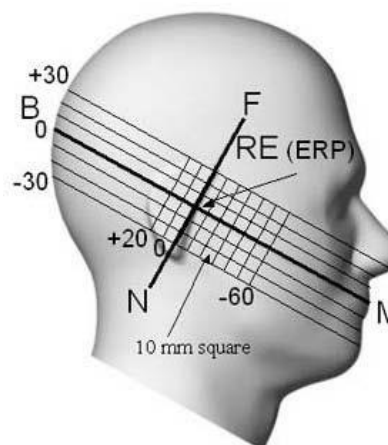


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

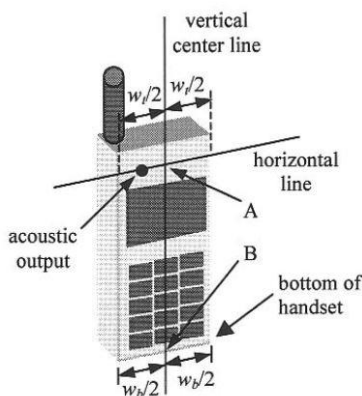


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

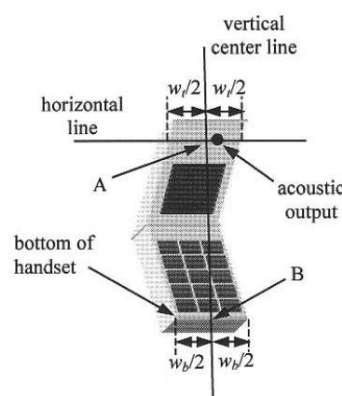


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

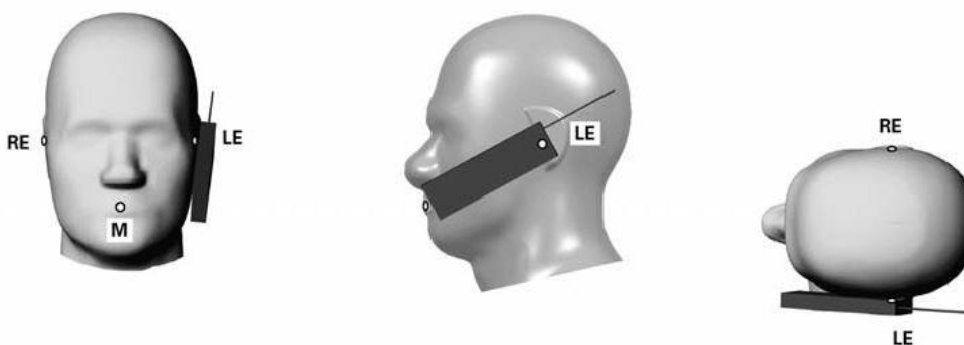


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the handset is in contact with the pinna and a second point, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

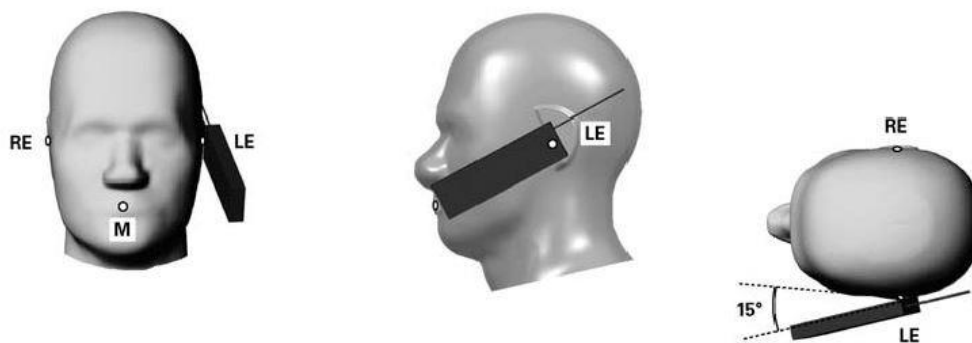


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

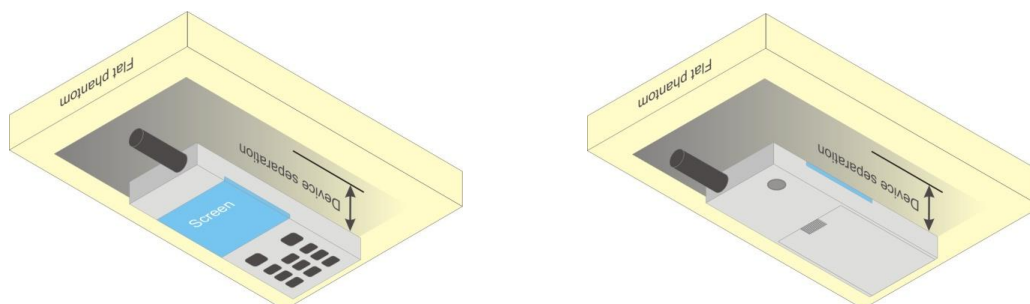


Fig 9.4 Body Worn Position



10.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm)

<GSM Conducted Power>

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table below, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 * \log [\sum (\text{power of each slot, in mW}) / 8]$$

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		32.28	32.66	32.60	33.20	23.28	23.66	23.60	24.20
GPRS 1 Tx slot		32.31	32.69	32.62	33.20	23.31	23.69	23.62	24.20
GPRS 2 Tx slots		28.99	29.04	29.18	30.20	22.99	23.04	23.18	24.20
GPRS 3 Tx slots		27.28	27.07	27.19	28.40	23.02	22.81	22.93	24.14
GPRS 4 Tx slots		26.14	26.07	26.10	27.20	23.14	23.07	23.10	24.20
EDGE 1 Tx slot		27.35	26.69	26.68	27.70	18.35	17.69	17.68	18.70
EDGE 2 Tx slots		23.88	23.59	23.56	24.70	17.88	17.59	17.56	18.70
EDGE 3 Tx slots		21.54	21.80	21.31	22.90	17.28	17.54	17.05	18.64
EDGE 4 Tx slots		20.81	20.74	20.12	21.70	17.81	17.74	17.12	18.70
DTM Multi-slot class 5	GSM 1 Tx slot	28.89	29.03	29.08	30.20	22.87	23.01	23.10	24.18
	GPRS 1 Tx slot	28.89	29.04	29.16	30.20				
DTM Multi-slot class 9	GSM 1 Tx slot	28.95	29.01	29.17	30.20	22.90	22.98	23.11	24.18
	GPRS 1 Tx slot	28.90	29.00	29.09	30.20				
DTM Multi-slot class 11	GSM 1 Tx slot	27.28	26.97	27.13	28.40	22.96	22.76	22.86	24.14
	GPRS 2 Tx slots	27.19	27.04	27.11	28.40				
DTM Multi-slot class 5	GSM 1 Tx slot	28.99	28.98	29.14	30.20	21.12	21.03	21.16	22.25
	EDGE 1 Tx slot	23.86	23.51	23.50	24.70				
DTM Multi-slot class 9	GSM 1 Tx slot	28.99	29.01	29.13	30.20	21.10	21.07	21.16	22.25
	EDGE 1 Tx slot	23.78	23.56	23.55	24.70				
DTM Multi-slot class 11	GSM 1 Tx slot	27.22	27.02	27.12	28.40	20.04	20.03	19.89	21.31
	EDGE 2 Tx slots	21.45	21.80	21.23	22.90				

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		26.55	26.91	26.82	27.70	17.55	17.91	17.82	18.70
GPRS 1 Tx slot		26.59	26.97	26.84	27.70	17.59	17.97	17.84	18.70
GPRS 2 Tx slots		23.19	23.69	23.61	24.70	17.19	17.69	17.61	18.70
GPRS 3 Tx slots		21.63	21.89	21.71	22.90	17.37	17.63	17.45	18.64
GPRS 4 Tx slots		20.89	21.28	21.24	21.70	17.89	18.28	18.24	18.70
EDGE 1 Tx slot		25.70	25.81	25.49	26.70	16.70	16.81	16.49	17.70
EDGE 2 Tx slots		22.44	22.53	22.31	23.70	16.44	16.53	16.31	17.70
EDGE 3 Tx slots		20.46	20.61	20.44	21.90	16.20	16.35	16.18	17.64
EDGE 4 Tx slots		19.26	19.35	18.86	20.70	16.26	16.35	15.86	17.70
DTM Multi-slot class 5	GSM 1 Tx slot	23.14	23.61	23.52	24.70	17.10	17.62	17.51	18.68
	GPRS 1 Tx slot	23.11	23.68	23.55	24.70				
DTM Multi-slot class 9	GSM 1 Tx slot	23.19	23.68	23.53	24.70	17.12	17.66	17.52	18.68
	GPRS 1 Tx slot	23.09	23.68	23.55	24.70				
DTM Multi-slot class 11	GSM 1 Tx slot	21.58	21.84	21.65	22.90	17.34	17.57	17.38	18.64
	GPRS 2 Tx slots	21.61	21.83	21.64	22.90				
DTM Multi-slot class 5	GSM 1 Tx slot	23.10	23.59	23.56	24.70	16.73	17.03	16.93	18.21
	EDGE 1 Tx slot	22.38	22.44	22.25	23.70				
DTM Multi-slot class 9	GSM 1 Tx slot	23.10	23.69	23.53	24.70	16.73	17.12	16.91	18.21
	EDGE 1 Tx slot	22.36	22.52	22.23	23.70				
DTM Multi-slot class 11	GSM 1 Tx slot	21.55	21.83	21.64	22.90	16.56	16.75	16.58	18.00
	EDGE 2 Tx slots	20.41	20.53	20.38	21.90				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

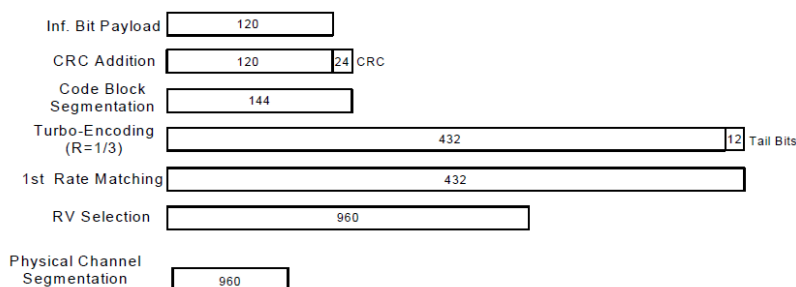
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:


1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	19.25	19.36	19.18	19.70	19.21	19.15	19.15	19.70	24.15	24.00	23.95	24.70
3GPP Rel 99	RMC 12.2Kbps	19.28	19.41	19.21	19.70	19.24	19.16	19.17	19.70	24.18	24.03	24.00	24.70
3GPP Rel 6	HSDPA Subtest-1	18.31	18.44	18.18	19.00	18.17	18.14	18.20	19.00	23.16	23.06	23.01	24.00
3GPP Rel 6	HSDPA Subtest-2	18.32	18.44	18.24	19.00	18.16	18.16	18.19	19.00	23.21	23.05	23.03	24.00
3GPP Rel 6	HSDPA Subtest-3	17.82	17.97	17.73	18.50	17.74	17.29	17.70	18.50	22.71	22.57	22.50	23.50
3GPP Rel 6	HSDPA Subtest-4	17.81	17.95	17.76	18.50	17.72	17.63	17.68	18.50	22.70	22.60	22.55	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	18.26	18.30	18.18	19.00	17.98	18.12	18.05	19.00	23.03	23.00	22.82	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	18.23	18.42	18.11	19.00	18.14	18.13	18.07	19.00	23.17	23.03	22.94	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	17.62	17.81	17.60	18.50	17.69	17.17	17.67	18.50	22.62	22.49	22.49	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	17.73	17.79	17.71	18.50	17.54	17.61	17.52	18.50	22.54	22.44	22.39	23.50
3GPP Rel 6	HSUPA Subtest-1	18.31	18.45	18.22	19.00	18.22	18.15	18.18	19.00	23.20	23.05	23.01	24.00
3GPP Rel 6	HSUPA Subtest-2	16.27	16.38	16.21	17.00	16.24	16.13	16.15	17.00	21.17	21.05	21.05	22.00
3GPP Rel 6	HSUPA Subtest-3	17.30	17.42	17.23	18.00	17.19	17.16	17.16	18.00	22.20	22.09	22.01	23.00
3GPP Rel 6	HSUPA Subtest-4	16.31	16.40	16.18	17.00	16.19	16.12	16.18	17.00	21.17	21.08	21.04	22.00
3GPP Rel 6	HSUPA Subtest-5	18.30	18.40	18.20	19.00	18.20	18.10	18.10	19.00	23.20	23.10	23.00	24.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

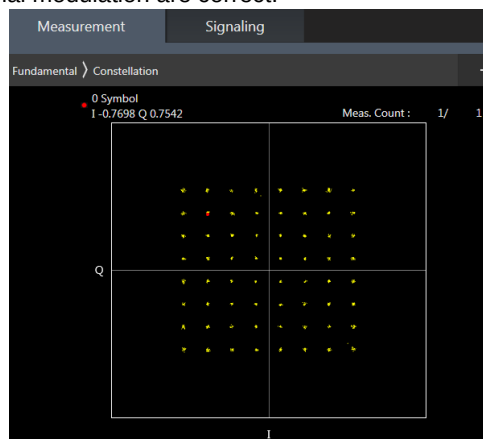

64QAM

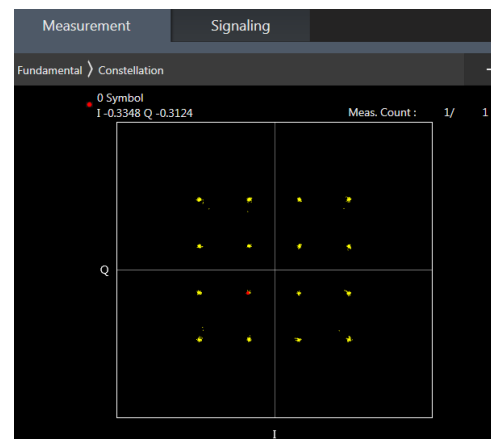

16QAM



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	20	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.45	19.52	19.43		
20	QPSK	1	49	19.18	19.33	19.33	20	0
20	QPSK	1	99	19.27	19.28	19.28		
20	QPSK	50	0	19.39	19.48	19.45		
20	QPSK	50	24	19.44	19.43	19.45	20	0
20	QPSK	50	50	19.35	19.41	19.37		
20	QPSK	100	0	19.39	19.43	19.44		
20	16QAM	1	0	19.18	19.21	19.28	20	0
20	16QAM	1	49	19.06	19.12	19.13		
20	16QAM	1	99	19.13	19.17	19.13		
20	16QAM	50	0	18.91	19.02	18.98	20	0
20	16QAM	50	24	18.94	18.95	18.98		
20	16QAM	50	50	18.88	18.94	18.89		
20	16QAM	100	0	18.91	18.92	18.95	20	0
20	64QAM	1	0	19.04	19.08	19.14		
20	64QAM	1	49	18.87	19.03	19.03		
20	64QAM	1	99	19.06	19.01	19.00	20	0
20	64QAM	50	0	18.93	19.05	18.99		
20	64QAM	50	24	18.98	18.99	19.01		
20	64QAM	50	50	18.88	18.97	18.92	20	0
20	64QAM	100	0	18.97	18.96	18.98		
Channel				20025	20175	20325	20	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.32	19.43	19.43		
15	QPSK	1	37	19.24	19.34	19.28	20	0
15	QPSK	1	74	19.20	19.29	19.27		
15	QPSK	36	0	19.39	19.50	19.44	20	0
15	QPSK	36	20	19.36	19.44	19.47		
15	QPSK	36	39	19.34	19.44	19.40		
15	QPSK	75	0	19.39	19.43	19.38	20	0
15	16QAM	1	0	19.17	19.28	19.29		
15	16QAM	1	37	19.05	19.17	19.12		
15	16QAM	1	74	19.08	19.21	19.15	20	0
15	16QAM	36	0	18.89	19.01	18.98		
15	16QAM	36	20	18.90	18.96	18.98		
15	16QAM	36	39	18.88	18.95	18.91	20	0
15	16QAM	75	0	18.92	18.95	18.91		
15	64QAM	1	0	19.08	19.16	19.16		
15	64QAM	1	37	18.95	19.09	19.05	20	0
15	64QAM	1	74	18.98	19.04	19.01		
15	64QAM	36	0	18.91	19.07	19.04		
15	64QAM	36	20	18.92	19.01	18.99	20	0
15	64QAM	36	39	18.89	19.02	18.95		
15	64QAM	75	0	18.93	19.00	18.93		
Channel				20000	20175	20350	20	0
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.29	19.40	19.33		
10	QPSK	1	25	19.23	19.37	19.34	20	0
10	QPSK	1	49	19.22	19.38	19.34		
10	QPSK	25	0	19.37	19.43	19.37	20	0
10	QPSK	25	12	19.39	19.47	19.38		



FCC SAR TEST REPORT

Report No. : FA133143

10	QPSK	25	25	19.40	19.51	19.47		
10	QPSK	50	0	19.41	19.46	19.42		
10	16QAM	1	0	19.14	19.27	19.24		
10	16QAM	1	25	19.13	19.24	19.20	20	0
10	16QAM	1	49	19.15	19.25	19.24		
10	16QAM	25	0	18.90	18.95	18.91		
10	16QAM	25	12	18.92	18.97	18.93	20	0
10	16QAM	25	25	18.93	19.04	18.98		
10	16QAM	50	0	18.92	18.97	18.92		
10	64QAM	1	0	19.05	19.08	19.01	20	0
10	64QAM	1	25	19.07	19.23	19.16		
10	64QAM	1	49	19.05	19.15	19.09		
10	64QAM	25	0	18.93	19.00	18.93	20	0
10	64QAM	25	12	18.96	19.03	18.98		
10	64QAM	25	25	18.94	19.07	19.03		
10	64QAM	50	0	18.94	19.02	18.94		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.23	19.33	19.29	20	0
5	QPSK	1	12	19.23	19.38	19.30		
5	QPSK	1	24	19.27	19.43	19.38		
5	QPSK	12	0	19.34	19.38	19.38	20	0
5	QPSK	12	7	19.40	19.45	19.42		
5	QPSK	12	13	19.35	19.48	19.40		
5	QPSK	25	0	19.33	19.35	19.37		
5	16QAM	1	0	19.03	19.09	19.10	20	0
5	16QAM	1	12	18.99	19.06	19.03		
5	16QAM	1	24	19.12	19.17	19.05		
5	16QAM	12	0	18.88	18.89	18.90	20	0
5	16QAM	12	7	18.93	18.95	18.96		
5	16QAM	12	13	18.89	19.00	18.90		
5	16QAM	25	0	18.90	18.91	18.93		
5	64QAM	1	0	19.08	19.10	19.07	20	0
5	64QAM	1	12	19.05	19.16	19.13		
5	64QAM	1	24	19.06	19.23	19.19		
5	64QAM	12	0	18.93	18.96	18.98	20	0
5	64QAM	12	7	18.99	19.03	19.04		
5	64QAM	12	13	18.95	19.07	18.99		
5	64QAM	25	0	18.92	18.95	18.91		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.29	19.36	19.35	20	0
3	QPSK	1	8	19.34	19.47	19.40		
3	QPSK	1	14	19.28	19.41	19.40		
3	QPSK	8	0	19.36	19.39	19.42	20	0
3	QPSK	8	4	19.39	19.41	19.44		
3	QPSK	8	7	19.37	19.50	19.43		
3	QPSK	15	0	19.38	19.41	19.41		
3	16QAM	1	0	19.06	19.18	19.12	20	0
3	16QAM	1	8	19.09	19.20	19.13		
3	16QAM	1	14	19.12	19.17	19.12		
3	16QAM	8	0	18.89	18.93	18.94	20	0
3	16QAM	8	4	18.96	19.00	19.00		
3	16QAM	8	7	18.89	19.01	18.94		
3	16QAM	15	0	18.91	18.93	18.96		
3	64QAM	1	0	19.12	19.12	19.12	20	0

3	64QAM	1	8	19.09	19.26	19.24	20	0
3	64QAM	1	14	19.11	19.23	19.22		
3	64QAM	8	0	18.95	18.97	19.03		
3	64QAM	8	4	18.98	19.02	19.03		
3	64QAM	8	7	18.97	19.04	19.04		
3	64QAM	15	0	18.94	18.98	19.00		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.22	19.31	19.25	20	0
1.4	QPSK	1	3	19.26	19.36	19.28		
1.4	QPSK	1	5	19.22	19.35	19.26		
1.4	QPSK	3	0	19.11	19.20	19.13		
1.4	QPSK	3	1	19.32	19.35	19.34		
1.4	QPSK	3	3	19.20	19.24	19.21		
1.4	QPSK	6	0	19.33	19.35	19.31	20	0
1.4	16QAM	1	0	19.05	19.11	19.06	20	0
1.4	16QAM	1	3	19.14	19.20	19.15		
1.4	16QAM	1	5	19.14	19.16	19.15		
1.4	16QAM	3	0	18.83	18.94	18.88		
1.4	16QAM	3	1	18.90	18.99	18.90		
1.4	16QAM	3	3	18.85	18.97	18.88		
1.4	16QAM	6	0	18.88	18.92	18.93	20	0
1.4	64QAM	1	0	19.00	19.03	19.01	20	0
1.4	64QAM	1	3	19.04	19.10	19.00		
1.4	64QAM	1	5	19.00	19.11	19.00		
1.4	64QAM	3	0	19.02	19.05	19.03		
1.4	64QAM	3	1	19.06	19.13	19.04		
1.4	64QAM	3	3	19.04	19.13	19.03		
1.4	64QAM	6	0	18.86	18.88	18.87	20	0

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844	25	0
10	QPSK	1	0	24.25	24.35	24.07		
10	QPSK	1	25	24.16	24.03	23.97		
10	QPSK	1	49	24.09	23.95	23.88	24	1
10	QPSK	25	0	23.30	23.16	23.10		
10	QPSK	25	12	23.36	23.23	23.19		
10	QPSK	25	25	23.29	23.17	23.12		
10	QPSK	50	0	23.33	23.22	23.18	24	1
10	16QAM	1	0	23.62	23.50	23.42		
10	16QAM	1	25	23.52	23.42	23.31		
10	16QAM	1	49	23.48	23.39	23.29	23	2
10	16QAM	25	0	22.28	22.19	22.12		
10	16QAM	25	12	22.36	22.23	22.15		
10	16QAM	25	25	22.29	22.16	22.12		
10	16QAM	50	0	22.33	22.24	22.18	23	2
10	64QAM	1	0	22.47	22.36	22.29		
10	64QAM	1	25	22.46	22.30	22.30		
10	64QAM	1	49	22.29	22.13	21.88	22	3
10	64QAM	25	0	21.31	21.21	21.13		
10	64QAM	25	12	21.40	21.27	21.22		
10	64QAM	25	25	21.31	21.20	21.13		



FCC SAR TEST REPORT

Report No. : FA133143

10	64QAM	50	0	21.37	21.26	21.21		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	24.28	24.15	24.06	25	0
5	QPSK	1	12	24.21	24.03	23.98		
5	QPSK	1	24	24.13	23.95	23.91		
5	QPSK	12	0	23.39	23.13	23.06	24	1
5	QPSK	12	7	23.39	23.20	23.03		
5	QPSK	12	13	23.29	23.13	23.01		
5	QPSK	25	0	23.31	23.17	23.00	24	1
5	16QAM	1	0	23.65	23.43	23.34		
5	16QAM	1	12	23.44	23.25	23.25		
5	16QAM	1	24	23.51	23.29	23.19	23	2
5	16QAM	12	0	22.39	22.16	22.06		
5	16QAM	12	7	22.38	22.22	22.02		
5	16QAM	12	13	22.27	22.09	22.03	23	2
5	16QAM	25	0	22.35	22.21	22.03		
5	64QAM	1	0	22.66	22.41	22.33		
5	64QAM	1	12	22.51	22.29	22.15	23	2
5	64QAM	1	24	22.44	22.31	21.73		
5	64QAM	12	0	21.44	21.22	21.13		
5	64QAM	12	7	21.42	21.23	21.08	22	3
5	64QAM	12	13	21.32	21.15	20.95		
5	64QAM	25	0	21.35	21.19	21.03		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	24.31	24.13	24.07	25	0
3	QPSK	1	8	24.29	24.09	24.00		
3	QPSK	1	14	24.15	24.01	23.91		
3	QPSK	8	0	23.37	23.15	22.65	24	1
3	QPSK	8	4	23.34	23.19	22.97		
3	QPSK	8	7	23.32	23.14	23.03		
3	QPSK	15	0	23.34	23.17	23.06	24	1
3	16QAM	1	0	23.60	23.46	23.31		
3	16QAM	1	8	23.66	23.42	23.28		
3	16QAM	1	14	23.46	23.27	23.21	23	2
3	16QAM	8	0	22.40	22.12	22.09		
3	16QAM	8	4	22.43	22.30	22.16		
3	16QAM	8	7	22.33	22.17	22.06	23	2
3	16QAM	15	0	22.37	22.22	22.10		
3	64QAM	1	0	22.64	22.39	22.17		
3	64QAM	1	8	22.60	22.43	22.10	23	2
3	64QAM	1	14	22.49	22.29	21.82		
3	64QAM	8	0	21.44	21.19	21.02		
3	64QAM	8	4	21.43	21.23	20.97	22	3
3	64QAM	8	7	21.36	21.21	20.89		
3	64QAM	15	0	21.38	21.24	21.01		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	24.20	24.02	23.95	25	0
1.4	QPSK	1	3	24.23	24.03	23.89		
1.4	QPSK	1	5	24.17	23.98	23.85		
1.4	QPSK	3	0	24.11	23.96	23.72		
1.4	QPSK	3	1	24.34	24.04	23.99		
1.4	QPSK	3	3	24.14	23.97	23.82		
1.4	QPSK	6	0	23.29	23.11	23.01	24	1



FCC SAR TEST REPORT

Report No. : FA133143

1.4	16QAM	1	0	23.56	23.34	23.26	24	1
1.4	16QAM	1	3	23.65	23.41	23.27		
1.4	16QAM	1	5	23.46	23.29	23.24		
1.4	16QAM	3	0	23.34	23.14	23.05		
1.4	16QAM	3	1	23.37	23.18	23.06		
1.4	16QAM	3	3	23.31	23.12	22.99	23	2
1.4	16QAM	6	0	22.34	22.16	22.05		
1.4	64QAM	1	0	23.31	22.31	21.89	23	2
1.4	64QAM	1	3	22.45	22.28	21.99		
1.4	64QAM	1	5	22.37	22.27	21.87		
1.4	64QAM	3	0	22.45	22.29	21.95		
1.4	64QAM	3	1	22.51	22.33	21.92		
1.4	64QAM	3	3	22.48	22.26	21.85	22	3
1.4	64QAM	6	0	21.32	21.11	20.81		

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	20	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	19.23	19.13	19.07		
20	QPSK	1	49	19.24	19.15	19.14	20	0
20	QPSK	1	99	19.28	19.17	19.13		
20	QPSK	50	0	19.38	19.22	19.18		
20	QPSK	50	24	19.43	19.32	19.29	20	0
20	QPSK	50	50	19.40	19.30	19.28		
20	QPSK	100	0	19.38	19.32	19.31		
20	16QAM	1	0	19.02	19.01	18.93	20	0
20	16QAM	1	49	19.06	18.97	19.01		
20	16QAM	1	99	19.08	19.06	19.01		
20	16QAM	50	0	18.86	18.73	18.69	20	0
20	16QAM	50	24	18.91	18.83	18.82		
20	16QAM	50	50	18.91	18.82	18.82		
20	16QAM	100	0	18.90	18.81	18.78	20	0
20	64QAM	1	0	18.91	18.87	18.79		
20	64QAM	1	49	18.99	18.91	18.87		
20	64QAM	1	99	19.05	18.96	18.89	20	0
20	64QAM	50	0	18.91	18.77	18.71		
20	64QAM	50	24	18.94	18.87	18.83		
20	64QAM	50	50	18.93	18.83	18.84	20	0
20	64QAM	100	0	18.93	18.82	18.78		
Channel				20825	21100	21375	20	0
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	19.27	19.17	19.14		
15	QPSK	1	37	19.29	19.23	19.16	20	0
15	QPSK	1	74	19.31	19.19	19.18		
15	QPSK	36	0	19.37	19.23	19.20	20	0
15	QPSK	36	20	19.41	19.33	19.34		
15	QPSK	36	39	19.39	19.32	19.27		
15	QPSK	75	0	19.40	19.34	19.20	20	0
15	16QAM	1	0	19.06	18.99	18.94		
15	16QAM	1	37	19.04	19.06	18.98		
15	16QAM	1	74	19.16	19.07	19.00	20	0
15	16QAM	36	0	18.90	18.74	18.69		
15	16QAM	36	20	18.92	18.82	18.80		



FCC SAR TEST REPORT

Report No. : FA133143

15	16QAM	36	39	18.90	18.83	18.79		
15	16QAM	75	0	18.92	18.82	18.72		
15	64QAM	1	0	18.96	18.90	18.84		
15	64QAM	1	37	19.02	18.92	18.89	20	0
15	64QAM	1	74	19.04	18.99	18.92		
15	64QAM	36	0	18.92	18.79	18.76		
15	64QAM	36	20	18.94	18.88	18.88	20	0
15	64QAM	36	39	18.94	18.87	18.85		
15	64QAM	75	0	18.90	18.87	18.74		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	19.22	19.09	19.05	20	0
10	QPSK	1	25	19.17	19.10	19.09		
10	QPSK	1	49	19.20	19.14	19.09		
10	QPSK	25	0	19.36	19.23	19.20	20	0
10	QPSK	25	12	19.39	19.33	19.24		
10	QPSK	25	25	19.40	19.30	19.29		
10	QPSK	50	0	19.38	19.31	19.20	20	0
10	16QAM	1	0	19.13	19.01	18.97		
10	16QAM	1	25	19.08	19.00	18.99		
10	16QAM	1	49	19.10	19.00	19.00	20	0
10	16QAM	25	0	18.87	18.69	18.71		
10	16QAM	25	12	18.92	18.85	18.76		
10	16QAM	25	25	18.90	18.80	18.79	20	0
10	16QAM	50	0	18.89	18.80	18.70		
10	64QAM	1	0	19.00	18.81	18.78		
10	64QAM	1	25	18.97	18.89	18.88	20	0
10	64QAM	1	49	18.96	18.92	18.88		
10	64QAM	25	0	18.91	18.77	18.70		
10	64QAM	25	12	18.94	18.88	18.78	20	0
10	64QAM	25	25	18.91	18.85	18.80		
10	64QAM	50	0	18.95	18.84	18.69		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.19	19.14	19.08	20	0
5	QPSK	1	12	19.22	19.10	19.01		
5	QPSK	1	24	19.21	19.15	19.08		
5	QPSK	12	0	19.35	19.19	19.20	20	0
5	QPSK	12	7	19.38	19.28	19.24		
5	QPSK	12	13	19.35	19.25	19.21		
5	QPSK	25	0	19.32	19.24	19.22	20	0
5	16QAM	1	0	18.97	18.92	18.93		
5	16QAM	1	12	19.03	18.89	18.74		
5	16QAM	1	24	19.05	18.90	18.84	20	0
5	16QAM	12	0	18.87	18.71	18.74		
5	16QAM	12	7	18.88	18.77	18.73		
5	16QAM	12	13	18.87	18.76	18.72	20	0
5	16QAM	25	0	18.90	18.78	18.74		
5	64QAM	1	0	19.01	18.85	18.89		
5	64QAM	1	12	18.98	18.90	18.78	20	0
5	64QAM	1	24	19.04	18.93	18.86		
5	64QAM	12	0	18.91	18.74	18.76		
5	64QAM	12	7	18.94	18.84	18.76	20	0
5	64QAM	12	13	18.92	18.81	18.78		
5	64QAM	25	0	18.83	18.77	18.72		

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230			25	0
Frequency (MHz)				782				
10	QPSK	1	0		24.32		25	0
10	QPSK	1	25		24.20			
10	QPSK	1	49		24.16			
10	QPSK	25	0		23.32		24	1
10	QPSK	25	12		23.27			
10	QPSK	25	25		23.36			
10	QPSK	50	0		23.33		24	1
10	16QAM	1	0		23.60			
10	16QAM	1	25		23.56			
10	16QAM	1	49		23.51		23	2
10	16QAM	25	0		22.34			
10	16QAM	25	12		22.32			
10	16QAM	25	25		22.34		23	2
10	16QAM	50	0		22.30			
10	64QAM	1	0		22.08		23	2
10	64QAM	1	25		22.45			
10	64QAM	1	49		22.44			
10	64QAM	25	0		20.91		22	3
10	64QAM	25	12		21.34			
10	64QAM	25	25		21.40			
10	64QAM	50	0		21.36			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	24.27	24.23	24.23	25	0
5	QPSK	1	12	24.21	24.16	24.16		
5	QPSK	1	24	24.18	24.22	24.18		
5	QPSK	12	0	23.30	23.28	23.28	24	1
5	QPSK	12	7	23.39	23.38	23.34		
5	QPSK	12	13	23.34	23.32	23.29		
5	QPSK	25	0	23.34	23.22	23.34	24	1
5	16QAM	1	0	23.61	23.48	23.53		
5	16QAM	1	12	23.53	23.53	23.40		
5	16QAM	1	24	23.50	23.52	23.48	23	2
5	16QAM	12	0	22.32	22.32	22.30		
5	16QAM	12	7	22.39	22.39	22.35		
5	16QAM	12	13	22.36	22.34	22.32	23	2
5	16QAM	25	0	22.40	22.30	22.33		
5	64QAM	1	0	21.64	21.91	22.46		
5	64QAM	1	12	22.12	22.45	22.46	23	2
5	64QAM	1	24	22.50	22.44	22.47		
5	64QAM	12	0	20.84	21.17	21.32	22	3
5	64QAM	12	7	20.85	21.40	21.37		
5	64QAM	12	13	21.10	21.37	21.34		
5	64QAM	25	0	20.80	21.27	21.36		

<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	25	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	24.35	24.34	24.31		
10	QPSK	1	25	24.33	24.31	24.31	24	1
10	QPSK	1	49	24.31	24.34	24.32		
10	QPSK	25	0	23.32	23.38	23.36		
10	QPSK	25	12	23.43	23.43	23.44	24	1
10	QPSK	25	25	23.50	23.51	23.50		
10	QPSK	50	0	23.41	23.38	23.40		
10	16QAM	1	0	23.64	23.66	23.64	24	1
10	16QAM	1	25	23.69	23.68	23.70		
10	16QAM	1	49	23.73	23.74	23.74		
10	16QAM	25	0	22.36	22.38	22.36	23	2
10	16QAM	25	12	22.39	22.40	22.41		
10	16QAM	25	25	22.46	22.48	22.47		
10	16QAM	50	0	22.40	22.39	22.40	23	2
10	64QAM	1	0	22.34	22.49	22.48		
10	64QAM	1	25	22.62	22.59	22.63		
10	64QAM	1	49	22.61	22.60	22.58	22	3
10	64QAM	25	0	21.33	21.37	21.36		
10	64QAM	25	12	21.26	21.32	21.26		
10	64QAM	25	25	21.04	21.11	21.09	22	3
10	64QAM	50	0	21.18	21.26	21.27		
Channel				23755	23790	23825	25	0
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	24.31	24.33	24.32		
5	QPSK	1	12	24.28	24.31	24.26	24	1
5	QPSK	1	24	24.33	24.34	24.33		
5	QPSK	12	0	23.37	23.36	23.32		
5	QPSK	12	7	23.46	23.45	23.47	24	1
5	QPSK	12	13	23.45	23.44	23.37		
5	QPSK	25	0	23.40	23.36	23.32		
5	16QAM	1	0	23.68	23.71	23.59	24	1
5	16QAM	1	12	23.72	23.53	23.57		
5	16QAM	1	24	23.69	23.72	23.72		
5	16QAM	12	0	22.41	22.38	22.36	23	2
5	16QAM	12	7	22.47	22.47	22.45		
5	16QAM	12	13	22.44	22.46	22.42		
5	16QAM	25	0	22.47	22.37	22.35	23	2
5	64QAM	1	0	22.25	22.29	22.38		
5	64QAM	1	12	22.52	22.28	22.42		
5	64QAM	1	24	22.38	22.03	22.29	22	3
5	64QAM	12	0	21.13	21.22	21.31		
5	64QAM	12	7	21.46	21.49	21.22		
5	64QAM	12	13	21.41	21.36	21.09	22	3
5	64QAM	25	0	21.20	20.83	21.09		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

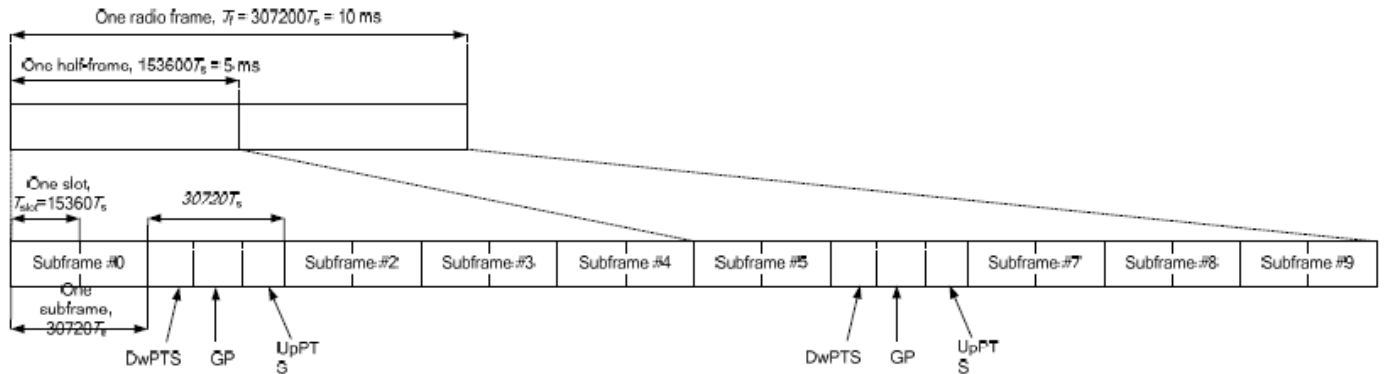


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	20	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	19.26	19.43	19.64	19.65	19.51		
20	QPSK	1	49	19.29	19.47	19.59	19.60	19.36	20	0
20	QPSK	1	99	19.30	19.54	19.70	19.67	19.31		
20	QPSK	50	0	19.42	19.58	19.68	19.77	19.57		
20	QPSK	50	24	19.48	19.69	19.79	19.75	19.56	20	0
20	QPSK	50	50	19.46	19.69	19.76	19.76	19.51		
20	QPSK	100	0	19.50	19.68	19.76	19.77	19.55		
20	16QAM	1	0	18.89	19.06	19.20	19.25	19.11	20	0
20	16QAM	1	49	18.82	19.09	19.20	19.17	18.94		
20	16QAM	1	99	18.87	19.15	19.26	19.21	18.96		
20	16QAM	50	0	18.95	19.14	19.20	19.32	19.11	20	0
20	16QAM	50	24	19.01	19.22	19.30	19.31	19.08		
20	16QAM	50	50	19.00	19.23	19.29	19.29	19.03		
20	16QAM	100	0	19.01	19.20	19.28	19.29	19.06	20	0
20	64QAM	1	0	18.63	18.75	18.97	18.91	18.83		
20	64QAM	1	49	18.57	18.80	18.95	18.98	18.73		
20	64QAM	1	99	18.54	18.90	19.02	18.98	18.59	20	0
20	64QAM	50	0	18.93	19.10	19.23	19.31	19.11		
20	64QAM	50	24	19.02	19.20	19.32	19.31	19.09		
20	64QAM	50	50	18.98	19.20	19.32	19.30	19.03	20	0
20	64QAM	100	0	19.00	19.20	19.29	19.30	19.06		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	19.30	19.47	19.62	19.59	19.43		
15	QPSK	1	37	19.25	19.50	19.56	19.57	19.31	20.00	0
15	QPSK	1	74	19.28	19.62	19.70	19.67	19.36		
15	QPSK	36	0	19.40	19.59	19.69	19.74	19.54	20	0
15	QPSK	36	20	19.46	19.66	19.77	19.75	19.49		
15	QPSK	36	39	19.44	19.68	19.76	19.73	19.47		
15	QPSK	75	0	19.48	19.66	19.77	19.73	19.51	20	0
15	16QAM	1	0	18.88	19.07	19.18	19.20	19.03		
15	16QAM	1	37	18.83	19.05	19.15	19.12	18.84		
15	16QAM	1	74	18.85	19.20	19.32	19.26	19.02	20	0
15	16QAM	36	0	18.87	19.07	19.14	19.24	19.03		
15	16QAM	36	20	18.93	19.12	19.21	19.20	18.97		
15	16QAM	36	39	18.91	19.13	19.21	19.19	18.94	20	0
15	16QAM	75	0	18.98	19.18	19.28	19.28	19.03		
15	64QAM	1	0	18.59	18.83	18.89	18.95	18.76		
15	64QAM	1	37	18.62	18.85	18.97	19.01	18.69	20	0
15	64QAM	1	74	18.56	18.99	19.05	19.03	18.68		
15	64QAM	36	0	18.92	19.07	19.22	19.29	19.07		
15	64QAM	36	20	18.97	19.16	19.30	19.25	19.04	20	0
15	64QAM	36	39	18.95	19.17	19.31	19.26	19.00		
15	64QAM	75	0	18.99	19.17	19.30	19.27	19.03		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	19.40	19.50	19.64	19.63	19.42		
10	QPSK	1	25	19.32	19.57	19.68	19.65	19.34	20.00	0
10	QPSK	1	49	19.35	19.58	19.66	19.66	19.34		
10	QPSK	25	0	19.49	19.60	19.69	19.69	19.53	20	0
10	QPSK	25	12	19.51	19.69	19.78	19.78	19.56		



FCC SAR TEST REPORT

Report No. : FA133143

10	QPSK	25	25	19.48	19.68	19.77	19.77	19.52		
10	QPSK	50	0	19.49	19.69	19.78	19.78	19.53		
10	16QAM	1	0	18.97	19.13	19.25	19.26	19.09		
10	16QAM	1	25	18.91	19.20	19.24	19.26	19.04	20	0
10	16QAM	1	49	18.95	19.18	19.28	19.22	18.98		
10	16QAM	25	0	19.01	19.08	19.22	19.23	19.07		
10	16QAM	25	12	19.04	19.22	19.32	19.34	19.07	20	0
10	16QAM	25	25	18.97	19.18	19.31	19.29	19.00		
10	16QAM	50	0	18.99	19.21	19.31	19.29	19.04		
10	64QAM	1	0	18.82	18.91	18.99	18.97	18.83	20	0
10	64QAM	1	25	18.82	19.03	19.13	19.10	18.84		
10	64QAM	1	49	18.75	18.98	19.08	19.08	18.73		
10	64QAM	25	0	19.04	19.19	19.27	19.28	19.10	20	0
10	64QAM	25	12	19.07	19.28	19.41	19.38	19.10		
10	64QAM	25	25	19.04	19.25	19.37	19.35	19.06		
10	64QAM	50	0	18.99	19.24	19.33	19.31	19.05		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	19.39	19.51	19.56	19.59	19.33	20.00	0
5	QPSK	1	12	19.36	19.55	19.65	19.67	19.40		
5	QPSK	1	24	19.31	19.53	19.58	19.59	19.25		
5	QPSK	12	0	19.45	19.63	19.64	19.69	19.46	20	0
5	QPSK	12	7	19.52	19.70	19.78	19.77	19.52		
5	QPSK	12	13	19.42	19.65	19.72	19.68	19.43		
5	QPSK	25	0	19.42	19.62	19.72	19.68	19.42	20	0
5	16QAM	1	0	18.92	19.05	19.11	19.13	18.89		
5	16QAM	1	12	18.89	19.08	19.17	19.16	18.92		
5	16QAM	1	24	18.92	19.09	19.19	19.14	18.89	20	0
5	16QAM	12	0	18.91	19.10	19.11	19.16	18.93		
5	16QAM	12	7	18.98	19.18	19.28	19.26	19.00		
5	16QAM	12	13	18.92	19.11	19.24	19.16	18.93	20	0
5	16QAM	25	0	18.98	19.17	19.27	19.26	18.99		
5	64QAM	1	0	18.77	18.88	18.92	18.98	18.70		
5	64QAM	1	12	18.61	18.97	18.90	18.91	18.71	20	0
5	64QAM	1	24	18.76	18.98	19.04	19.07	18.70		
5	64QAM	12	0	18.95	19.17	19.16	19.21	18.95		
5	64QAM	12	7	18.99	19.22	19.29	19.27	19.01	20	0
5	64QAM	12	13	18.94	19.14	19.24	19.20	18.94		
5	64QAM	25	0	18.97	19.18	19.29	19.26	19.01		

12. DL carrier aggregation

<LTE Carrier Aggregation combinations>

General Note:

1. This device supports Carrier Aggregation on downlink only for intra band. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset
1	CA_41C		

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Intra-Band	Contiguous	CA_41C	41	20	2593	40620	QPSK	50	24	41	20	2612.80	40818	19.71	19.79

13. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. For 2.4GHz WLAN output power state 1 is using with normal condition, 2.4GHz WLAN output power state 2 active only when the 2.4GHz and 5GHz WLAN transmit at the same time.
2. For MIMO SAR compliance is tested at each single chain and Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 .
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.
7. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
8. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
9. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
10. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel

<2.4GHz WLAN State 1>

2.4GHz WLAN				Chain 0			Chain 1			Chain 0+1		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	14.91	15.00	98.20	12.78	12.80	98.20	16.98	17.00	98.20
		6	2437	14.89	15.00		12.74	12.80		16.96	17.00	
		11	2462	14.94	15.00		12.70	12.80		16.97	17.00	
	802.11g 6Mbps	1	2412	14.88	15.00	99.20	14.86	15.00	99.20	17.88	18.00	99.20
		6	2437	14.85	15.00		14.75	15.00		17.81	18.00	
		11	2462	14.35	14.50		14.39	14.50		17.38	17.50	
	802.11n-HT20 MCS0	1	2412	14.37	14.50	99.70	14.42	14.50	99.70	17.41	17.50	99.70
		6	2437	14.72	15.00		14.84	15.00		17.79	18.00	
		11	2462	12.70	13.00		12.90	13.00		15.81	16.00	
	802.11ax-HE20 MCS0	1	2412	14.46	14.50	99.70	14.47	14.50	99.70	17.48	17.50	99.70
		6	2437	14.91	15.00		14.90	15.00		17.92	18.00	
		11	2462	12.82	13.00		12.87	13.00		15.86	16.00	

5.2GHz WLAN				Chain 0			Chain 1			Chain 0+1		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	10.40	10.50	99.20	10.30	10.50	99.20	13.36	13.50	99.20
		40	5200	10.40	10.50		10.30	10.50		13.36	13.50	
		44	5220	10.40	10.50		10.30	10.50		13.36	13.50	
		48	5240	10.40	10.50		10.30	10.50		13.36	13.50	
	802.11n-HT20 MCS0	36	5180	10.20	10.50	99.70	10.30	10.50	99.70	13.26	13.50	99.70
		40	5200	10.20	10.50		10.30	10.50		13.26	13.50	
		44	5220	10.20	10.50		10.30	10.50		13.26	13.50	
		48	5240	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11n-HT40 MCS0	38	5190	10.20	10.50	99.70	10.30	10.50	99.70	13.26	13.50	99.70
		46	5230	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11ac-VHT20 MCS0	36	5180	10.20	10.50	99.70	10.30	10.50	99.70	13.26	13.50	99.70
		40	5200	10.20	10.50		10.30	10.50		13.26	13.50	
		44	5220	10.20	10.50		10.20	10.50		13.21	13.50	
		48	5240	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11ac-VHT40 MCS0	38	5190	10.20	10.50	99.70	10.20	10.50	99.70	13.21	13.50	99.70
		46	5230	10.30	10.50		10.20	10.50		13.26	13.50	
	802.11ac-VHT80 MCS0	42	5210	10.30	10.50	99.70	10.30	10.50	99.70	13.31	13.50	99.70
	802.11ax-HE20 MCS0	36	5180	10.50	10.50	99.70	10.40	10.50	99.70	13.46	13.50	99.70
		40	5200	10.50	10.50		10.40	10.50		13.46	13.50	
		44	5220	10.40	10.50		10.40	10.50		13.41	13.50	
		48	5240	10.40	10.50		10.40	10.50		13.41	13.50	
	802.11ax-HE40 MCS0	38	5190	10.30	10.50	99.70	10.40	10.50	99.70	13.36	13.50	99.70
		46	5230	10.40	10.50		10.40	10.50		13.41	13.50	
	802.11ax-HE80 MCS0	42	5210	10.40	10.50	99.70	10.40	10.50	99.70	13.41	13.50	99.70

5.3GHz WLAN				Chain 0			Chain 1			Chain 0+1		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	10.40	10.50	99.20	10.30	10.50	99.20	13.36	13.50	99.20
		56	5280	10.40	10.50		10.30	10.50		13.36	13.50	
		60	5300	8.40	8.50		8.40	8.50		11.41	11.50	
		64	5320	8.30	8.50		8.50	8.50		11.41	11.50	
	802.11n-HT20 MCS0	52	5260	10.30	10.50	99.70	10.30	10.50	99.70	13.31	13.50	99.70
		56	5280	10.30	10.50		10.30	10.50		13.31	13.50	
		60	5300	8.30	8.50		8.30	8.50		11.31	11.50	
		64	5320	8.30	8.50		8.30	8.50		11.31	11.50	
	802.11n-HT40 MCS0	54	5270	10.30	10.50	99.70	10.20	10.50	99.70	13.26	13.50	99.70
		62	5310	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11ac-VHT20 MCS0	52	5260	10.20	10.50	99.70	10.30	10.50	99.70	13.26	13.50	99.70
		56	5280	10.20	10.50		10.30	10.50		13.26	13.50	
		60	5300	8.30	8.50		8.20	8.50		11.26	11.50	
		64	5320	8.30	8.50		8.30	8.50		11.31	11.50	
	802.11ac-VHT40 MCS0	54	5270	10.30	10.50	99.70	10.20	10.50	99.70	13.26	13.50	99.70
		62	5310	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11ac-VHT80 MCS0	58	5290	10.30	10.50	99.70	10.40	10.50	99.70	13.36	13.50	99.70
	802.11ac-VHT160 MCS0	50	5250	10.30	10.50	99.70	10.30	10.50	99.70	13.31	13.50	99.70
	802.11ax-HE20 MCS0	52	5260	10.50	10.50	99.70	10.40	10.50	99.70	13.46	13.50	99.70
		56	5280	10.50	10.50		10.40	10.50		13.46	13.50	
		60	5300	8.40	8.50		8.50	8.50		11.46	11.50	
		64	5320	8.40	8.50		8.40	8.50		11.41	11.50	
	802.11ax-HE40 MCS0	54	5270	10.40	10.50	99.70	10.30	10.50	99.70	13.36	13.50	99.70
		62	5310	10.50	10.50		10.40	10.50		13.46	13.50	
	802.11ax-HE80 MCS0	58	5290	10.40	10.50	99.70	10.50	10.50	99.70	13.46	13.50	99.70
	802.11ax-HE160 MCS0	50	5250	10.40	10.50	99.70	10.40	10.50	99.70	13.41	13.50	99.70

5.5GHz WLAN				Chain 0			Chain 1			Chain 0+1		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	10.30	10.50	99.20	10.30	10.50	99.20	13.31	13.50	99.20
		116	5580	10.40	10.50		10.30	10.50		13.36	13.50	
		124	5620	10.40	10.50		10.30	10.50		13.26	13.50	
		132	5660	10.40	10.50		10.30	10.50		13.26	13.50	
		140	5700	10.30	10.50		10.30	10.50		13.31	13.50	
		144	5720	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11n-HT20 MCS0	100	5500	10.30	10.50	99.70	10.30	10.50	99.70	13.31	13.50	99.70
		116	5580	10.30	10.50		10.30	10.50		13.31	13.50	
		124	5620	10.30	10.50		10.30	10.50		13.31	13.50	
		132	5660	10.30	10.50		10.30	10.50		13.31	13.50	
		140	5700	10.30	10.50		10.30	10.50		13.31	13.50	
		144	5720	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11n-HT40 MCS0	102	5510	10.30	10.50	99.70	10.30	10.50	99.70	13.31	13.50	99.70
		110	5550	10.30	10.50		10.30	10.50		13.31	13.50	
		126	5630	10.30	10.50		10.30	10.50		13.31	13.50	
		134	5670	10.30	10.50		10.20	10.50		13.26	13.50	
		142	5710	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11ac-VHT20 MCS0	100	5500	10.20	10.50	99.70	10.30	10.50	99.70	13.26	13.50	99.70
		116	5580	10.30	10.50		10.20	10.50		13.26	13.50	
		124	5620	10.30	10.50		10.20	10.50		13.26	13.50	
		132	5660	10.30	10.50		10.20	10.50		13.26	13.50	
		140	5700	10.30	10.50		10.30	10.50		13.31	13.50	
		144	5720	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11ac-VHT40 MCS0	102	5510	10.30	10.50	99.70	10.20	10.50	99.70	13.26	13.50	99.70
		110	5550	10.20	10.50		10.30	10.50		13.26	13.50	
		126	5630	10.20	10.50		10.30	10.50		13.26	13.50	
		134	5670	10.20	10.50		10.20	10.50		13.21	13.50	
		142	5710	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11ac-VHT80 MCS0	106	5530	10.40	10.50	99.70	10.30	10.50	99.70	13.36	13.50	99.70
		122	5610	10.30	10.50		10.30	10.50		13.31	13.50	
		138	5690	10.40	10.50		10.30	10.50		13.36	13.50	
	802.11ac-VHT160 MCS0	114	5570	10.30	10.50	99.70	10.40	10.50	99.70	13.36	13.50	99.70
	802.11ax-HE20 MCS0	100	5500	10.40	10.50	99.70	10.40	10.50	99.70	13.41	13.50	99.70
		116	5580	10.40	10.50		10.40	10.50		13.41	13.50	
		124	5620	10.40	10.50		10.40	10.50		13.41	13.50	
		132	5660	10.40	10.50		10.40	10.50		13.41	13.50	
		140	5700	10.50	10.50		10.40	10.50		13.46	13.50	
		144	5720	10.40	10.50		10.40	10.50		13.41	13.50	
	802.11ax-HE40 MCS0	102	5510	10.40	10.50	99.70	10.40	10.50	99.70	13.41	13.50	99.70
		110	5550	10.40	10.50		10.40	10.50		13.41	13.50	
		126	5630	10.40	10.50		10.40	10.50		13.41	13.50	
		134	5670	10.40	10.50		10.30	10.50		13.36	13.50	
		142	5710	10.40	10.50		10.40	10.50		13.41	13.50	
	802.11ax-HE80 MCS0	106	5530	10.50	10.50	99.70	10.40	10.50	99.70	13.46	13.50	99.70
		122	5610	10.40	10.50		10.40	10.50		13.41	13.50	
		138	5690	10.50	10.50		10.40	10.50		13.46	13.50	
	802.11ax-HE160 MCS0	114	5570	10.40	10.50	99.70	10.50	10.50	99.70	13.46	13.50	99.70

5.8GHz WLAN				Chain 0			Chain 1			Chain 0+1		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	10.40	10.50	99.20	10.40	10.50	99.20	13.41	13.50	99.20
		157	5785	10.30	10.50		10.30	10.50		13.31	13.50	
		165	5825	10.40	10.50		10.50	10.50		13.46	13.50	
	802.11n-HT20 MCS0	149	5745	10.20	10.50	99.70	10.30	10.50	99.70	13.26	13.50	99.70
		157	5785	10.30	10.50		10.30	10.50		13.31	13.50	
		165	5825	10.30	10.50		10.30	10.50		13.31	13.50	
	802.11n-HT40 MCS0	151	5755	10.20	10.50	99.70	10.20	10.50	99.70	13.21	13.50	99.70
		159	5795	10.20	10.50		10.30	10.50		13.26	13.50	
	802.11ac-VHT20 MCS0	149	5745	10.20	10.50	99.70	10.30	10.50	99.70	13.26	13.50	99.70
		157	5785	10.30	10.50		10.10	10.50		13.21	13.50	
		165	5825	10.30	10.50		10.20	10.50		13.26	13.50	
	802.11ac-VHT40 MCS0	151	5755	10.20	10.50	99.70	10.20	10.50	99.70	13.21	13.50	99.70
		159	5795	10.20	10.50		10.20	10.50		13.21	13.50	
	802.11ac-VHT80 MCS0	155	5775	10.40	10.50	99.70	10.30	10.50	99.70	13.36	13.50	99.70
	802.11ax-HE20 MCS0	149	5745	10.30	10.50	99.70	10.40	10.50	99.70	13.36	13.50	99.70
		157	5785	10.40	10.50		10.40	10.50		13.41	13.50	
		165	5825	10.40	10.50		10.40	10.50		13.41	13.50	
	802.11ax-HE40 MCS0	151	5755	10.30	10.50	99.70	10.30	10.50	99.70	13.31	13.50	99.70
		159	5795	10.30	10.50		10.40	10.50		13.36	13.50	
	802.11ax-HE80 MCS0	155	5775	10.50	10.50	99.70	10.40	10.50	99.70	13.46	13.50	99.70

<2.4GHz WLAN State 2>

2.4GHz WLAN				Chain 0			Chain 1			Chain 0+1		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	11.79	12.00	98.10	11.86	12.00	98.10	14.84	15.00	98.10
		6	2437	11.84	12.00		11.83	12.00		14.85	15.00	
		11	2462	11.83	12.00		11.88	12.00		14.87	15.00	
	802.11g 6Mbps	1	2412	11.89	12.00	99.20	11.81	12.00	99.20	14.86	15.00	99.20
		6	2437	11.85	12.00		11.91	12.00		14.89	15.00	
		11	2462	11.79	12.00		11.78	12.00		14.80	15.00	
	802.11n-HT20 MCS0	1	2412	11.86	12.00	99.70	11.80	12.00	99.70	14.84	15.00	99.70
		6	2437	11.74	12.00		11.82	12.00		14.79	15.00	
		11	2462	11.79	12.00		11.83	12.00		14.84	15.00	
	802.11ax-HE20 MCS0	1	2412	11.90	12.00	99.70	11.86	12.00	99.70	14.89	15.00	99.70
		6	2437	11.88	12.00		11.89	12.00		14.90	15.00	
		11	2462	11.84	12.00		11.91	12.00		14.89	15.00	

<2.4GHz Bluetooth>
<Chain 0>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	13.22	12.22	12.14
	CH 39	2441	13.15	12.16	12.08
	CH 78	2480	13.28	12.51	12.44
Tune-up Limit			14	13	13

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	8.50	8.70
	CH 19	2440	8.80	9.00
	CH 39	2480	8.80	9.00
Tune-up Limit			9	9


<Chain 1>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	13.03	12.09	12.10
	CH 39	2441	13.12	12.15	12.17
	CH 78	2480	13.10	12.11	12.11
Tune-up Limit			14	13	13

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	8.40	8.50
	CH 19	2440	8.50	8.60
	CH 39	2480	8.50	8.60
Tune-up Limit			9	9

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power.

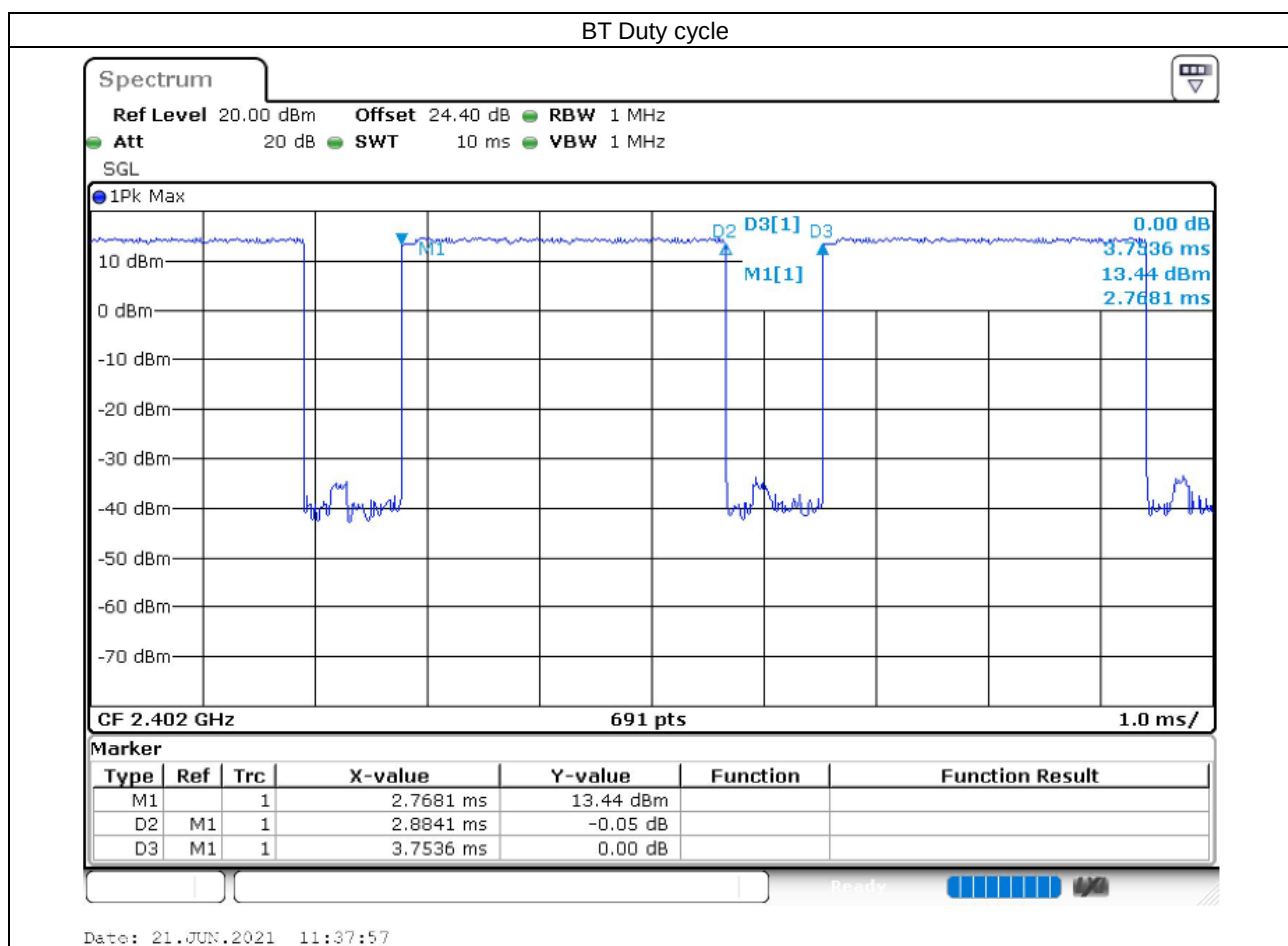

14. RF Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT & 2.4GHz & 5GHz WLAN Chain 0	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
2.4GHz WLAN Chain 1	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm	≤ 25mm
5GHz WLAN Chain 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT & 2.4GHz & 5GHz WLAN Chain 0	Yes	Yes	Yes	No	No	Yes
2.4GHz WLAN Chain 1	Yes	Yes	No	No	No	Yes
5GHz WLAN Chain 1	Yes	Yes	Yes	No	No	Yes

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge, The detail antenna location please refers to Appendix D.

15. SAR Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8W/kg.
- Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
- For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16cm.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	26.14	27.20	1.276	-0.12	0.123	0.157
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	26.14	27.20	1.276	-0.08	0.050	0.064
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	26.14	27.20	1.276	-0.18	0.135	0.172
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	26.14	27.20	1.276	-0.09	0.052	0.066
02	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	21.28	21.70	1.102	-0.17	0.029	0.032
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	21.28	21.70	1.102	-0.13	0.014	0.015
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	21.28	21.70	1.102	-0.12	0.023	0.025
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	21.28	21.70	1.102	-0.08	0.020	0.022

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	19.41	19.70	1.069	-0.15	0.040	0.043
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	19.41	19.70	1.069	0.01	0.016	0.017
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	19.41	19.70	1.069	-0.15	0.033	0.035
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	19.41	19.70	1.069	-0.12	0.017	0.018
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1312	1712.4	19.24	19.70	1.112	-0.15	0.055	0.061
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1312	1712.4	19.24	19.70	1.112	-0.07	0.025	0.028
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1312	1712.4	19.24	19.70	1.112	-0.11	0.032	0.036
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1312	1712.4	19.24	19.70	1.112	-0.02	0.021	0.023
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	24.18	24.70	1.127	-0.14	0.165	0.186
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	24.18	24.70	1.127	-0.11	0.071	0.080
05	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	24.18	24.70	1.127	-0.14	0.168	0.189
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	24.18	24.70	1.127	-0.08	0.075	0.085

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	19.52	20.00	1.117	-0.17	0.045	0.050
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	19.48	20.00	1.127	-0.18	0.043	0.048
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	19.52	20.00	1.117	-0.09	0.029	0.032
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	19.48	20.00	1.127	-0.14	0.027	0.030
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	19.52	20.00	1.117	-0.11	0.034	0.038
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	19.48	20.00	1.127	-0.14	0.033	0.037
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	19.52	20.00	1.117	-0.19	0.028	0.031
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	19.48	20.00	1.127	-0.08	0.028	0.032
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	24.35	25.00	1.161	-0.15	0.174	0.202
07	LTE Band 5	10M	QPSK	25	12	Right Cheek	0mm	20525	836.5	23.23	24.00	1.194	-0.05	0.186	0.222
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	24.35	25.00	1.161	-0.14	0.083	0.096
	LTE Band 5	10M	QPSK	25	12	Right Tilted	0mm	20525	836.5	23.23	24.00	1.194	-0.17	0.093	0.111
	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	24.35	25.00	1.161	-0.17	0.169	0.196
	LTE Band 5	10M	QPSK	25	12	Left Cheek	0mm	20525	836.5	23.23	24.00	1.194	-0.14	0.178	0.213
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	24.35	25.00	1.161	-0.09	0.079	0.092
	LTE Band 5	10M	QPSK	25	12	Left Tilted	0mm	20525	836.5	23.23	24.00	1.194	-0.06	0.085	0.101
	LTE Band 7	20M	QPSK	1	99	Right Cheek	0mm	20850	2510	19.28	20.00	1.180	-0.17	0.010	0.012
	LTE Band 7	20M	QPSK	50	24	Right Cheek	0mm	20850	2510	19.43	20.00	1.140	-0.14	0.009	0.010
	LTE Band 7	20M	QPSK	1	99	Right Tilted	0mm	20850	2510	19.28	20.00	1.180	-0.05	0.012	0.014
	LTE Band 7	20M	QPSK	50	24	Right Tilted	0mm	20850	2510	19.43	20.00	1.140	-0.13	0.011	0.013
08	LTE Band 7	20M	QPSK	1	99	Left Cheek	0mm	20850	2510	19.28	20.00	1.180	-0.01	0.015	0.018
	LTE Band 7	20M	QPSK	50	24	Left Cheek	0mm	20850	2510	19.43	20.00	1.140	-0.15	0.015	0.017
	LTE Band 7	20M	QPSK	1	99	Left Tilted	0mm	20850	2510	19.28	20.00	1.180	-0.17	0.007	0.008
	LTE Band 7	20M	QPSK	50	24	Left Tilted	0mm	20850	2510	19.43	20.00	1.140	-0.16	0.005	0.006
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	24.32	25.00	1.169	-0.15	0.067	0.078
	LTE Band 13	10M	QPSK	25	25	Right Cheek	0mm	23230	782	23.36	24.00	1.159	-0.18	0.071	0.082
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	24.32	25.00	1.169	-0.13	0.033	0.039
	LTE Band 13	10M	QPSK	25	25	Right Tilted	0mm	23230	782	23.36	24.00	1.159	-0.13	0.044	0.051
	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	24.32	25.00	1.169	-0.1	0.084	0.098
09	LTE Band 13	10M	QPSK	25	25	Left Cheek	0mm	23230	782	23.36	24.00	1.159	-0.14	0.098	0.114
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	24.32	25.00	1.169	-0.1	0.036	0.042
	LTE Band 13	10M	QPSK	25	25	Left Tilted	0mm	23230	782	23.36	24.00	1.159	-0.16	0.045	0.052
	LTE Band 17	10M	QPSK	1	0	Right Cheek	0mm	23790	710	24.34	25.00	1.164	-0.16	0.107	0.125
	LTE Band 17	10M	QPSK	25	25	Right Cheek	0mm	23790	710	23.51	24.00	1.119	-0.09	0.124	0.139
	LTE Band 17	10M	QPSK	1	0	Right Tilted	0mm	23790	710	24.34	25.00	1.164	-0.14	0.044	0.051
	LTE Band 17	10M	QPSK	25	25	Right Tilted	0mm	23790	710	23.51	24.00	1.119	-0.12	0.039	0.044
	LTE Band 17	10M	QPSK	1	0	Left Cheek	0mm	23790	710	24.34	25.00	1.164	-0.12	0.112	0.130
10	LTE Band 17	10M	QPSK	25	25	Left Cheek	0mm	23790	710	23.51	24.00	1.119	-0.12	0.133	0.149
	LTE Band 17	10M	QPSK	1	0	Left Tilted	0mm	23790	710	24.34	25.00	1.164	-0.15	0.031	0.036
	LTE Band 17	10M	QPSK	25	25	Left Tilted	0mm	23790	710	23.51	24.00	1.119	-0.18	0.025	0.028

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Right Cheek	0mm	40620	2593	19.70	20.00	1.072	62.9	1.006	0.14	0.012	0.013
	LTE Band 41	20M	QPSK	50	24	Right Cheek	0mm	40620	2593	19.79	20.00	1.050	62.9	1.006	0.01	0.011	0.012
11	LTE Band 41	20M	QPSK	1	99	Right Tilted	0mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.01	0.017	0.018
	LTE Band 41	20M	QPSK	50	24	Right Tilted	0mm	40620	2593	19.79	20.00	1.050	62.9	1.006	0.12	0.016	0.017
	LTE Band 41	20M	QPSK	1	99	Left Cheek	0mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.1	0.014	0.015
	LTE Band 41	20M	QPSK	50	24	Left Cheek	0mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.19	0.010	0.011
	LTE Band 41	20M	QPSK	1	99	Left Tilted	0mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.14	0.008	0.008
	LTE Band 41	20M	QPSK	50	24	Left Tilted	0mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.11	0.009	0.009



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.14	0.533	0.550
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.13	0.122	0.126
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.14	0.154	0.159
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.16	0.039	0.040
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.18	0.269	0.284
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	0.01	0.055	0.058
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.16	0.089	0.094
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.1	0.016	0.017
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.13	0.106	0.108
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.07	0.021	0.021
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.19	0.062	0.063
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.02	0.010	0.010
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.13	0.056	0.059
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.07	0.014	0.015
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.16	0.034	0.036
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.12	0.007	0.007
	WLAN5GHz	802.11ac-VHT160 MCS0	Right Cheek	0mm	Chain 0		50	5250	10.30	10.50	1.047	99.7	1.003	0.16	0.203	0.213
	WLAN5GHz	802.11ac-VHT160 MCS0	Right Tilted	0mm	Chain 0		50	5250	10.30	10.50	1.047	99.7	1.003	-0.09	0.055	0.058
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Cheek	0mm	Chain 0		50	5250	10.30	10.50	1.047	99.7	1.003	-0.16	0.028	0.029
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Tilted	0mm	Chain 0		50	5250	10.30	10.50	1.047	99.7	1.003	0.14	0.018	0.019
13	WLAN5GHz	802.11ac-VHT160 MCS0	Right Cheek	0mm	Chain 1		50	5250	10.30	10.50	1.047	99.7	1.003	0.11	0.300	0.315
	WLAN5GHz	802.11ac-VHT160 MCS0	Right Tilted	0mm	Chain 1		50	5250	10.30	10.50	1.047	99.7	1.003	0.19	0.247	0.259
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Cheek	0mm	Chain 1		50	5250	10.30	10.50	1.047	99.7	1.003	0.19	0.137	0.144
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Tilted	0mm	Chain 1		50	5250	10.30	10.50	1.047	99.7	1.003	-0.08	0.120	0.126
14	WLAN5GHz	802.11ac-VHT160 MCS0	Right Cheek	0mm	Chain 0		114	5570	10.30	10.50	1.047	99.7	1.003	-0.16	0.105	0.110
	WLAN5GHz	802.11ac-VHT160 MCS0	Right Tilted	0mm	Chain 0		114	5570	10.30	10.50	1.047	99.7	1.003	-0.04	0.014	0.015
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Cheek	0mm	Chain 0		114	5570	10.30	10.50	1.047	99.7	1.003	-0.09	0.015	0.016
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Tilted	0mm	Chain 0		114	5570	10.30	10.50	1.047	99.7	1.003	0.04	0.002	0.002
	WLAN5GHz	802.11ac-VHT160 MCS0	Right Cheek	0mm	Chain 1		114	5570	10.40	10.50	1.023	99.7	1.003	0.01	0.002	0.002
	WLAN5GHz	802.11ac-VHT160 MCS0	Right Tilted	0mm	Chain 1		114	5570	10.40	10.50	1.023	99.7	1.003	-0.08	0.001	0.001
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Cheek	0mm	Chain 1		114	5570	10.40	10.50	1.023	99.7	1.003	-0.19	0.079	0.081
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Tilted	0mm	Chain 1		114	5570	10.40	10.50	1.023	99.7	1.003	-0.11	0.063	0.065
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	-0.04	0.119	0.122
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	-0.04	0.020	0.021
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	0.09	0.011	0.011
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	0.09	0.003	0.003
15	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	0.03	0.144	0.151
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	0.18	0.120	0.126
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	-0.17	0.046	0.048
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	-0.17	0.046	0.048

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
16	Bluetooth	1Mbps	Right Cheek	0mm	Chain 0	78	2480	13.28	14.00	1.182	-0.1	0.203	0.240
	Bluetooth	1Mbps	Right Tilted	0mm	Chain 0	78	2480	13.28	14.00	1.182	-0.15	0.045	0.053
	Bluetooth	1Mbps	Left Cheek	0mm	Chain 0	78	2480	13.28	14.00	1.182	-0.18	0.067	0.079
	Bluetooth	1Mbps	Left Tilted	0mm	Chain 0	78	2480	13.28	14.00	1.182	-0.16	0.017	0.020
	Bluetooth	1Mbps	Right Cheek	0mm	Chain 1	39	2441	13.12	14.00	1.225	-0.12	0.134	0.164
	Bluetooth	1Mbps	Right Tilted	0mm	Chain 1	39	2441	13.12	14.00	1.225	-0.16	0.030	0.037
	Bluetooth	1Mbps	Left Cheek	0mm	Chain 1	39	2441	13.12	14.00	1.225	-0.14	0.072	0.088
	Bluetooth	1Mbps	Left Tilted	0mm	Chain 1	39	2441	13.12	14.00	1.225	-0.18	0.015	0.018

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	26.14	27.20	1.276	-0.11	0.117	0.149
17	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.14	27.20	1.276	-0.15	0.144	0.184
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	26.14	27.20	1.276	-0.12	0.130	0.166
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	26.14	27.20	1.276	-0.11	0.104	0.133
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	128	824.2	26.14	27.20	1.276	-0.08	0.029	0.037
	GSM1900	GPRS (4 Tx slots)	Front	10mm	661	1880	21.28	21.70	1.102	-0.03	0.271	0.299
	GSM1900	GPRS (4 Tx slots)	Back	10mm	661	1880	21.28	21.70	1.102	-0.16	0.315	0.347
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	661	1880	21.28	21.70	1.102	-0.09	0.043	0.047
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	661	1880	21.28	21.70	1.102	-0.19	0.048	0.053
18	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	661	1880	21.28	21.70	1.102	-0.17	0.472	0.520

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	19.41	19.70	1.069	-0.02	0.374	0.400
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	19.41	19.70	1.069	-0.17	0.441	0.471
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9400	1880	19.41	19.70	1.069	-0.19	0.053	0.057
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	9400	1880	19.41	19.70	1.069	-0.13	0.055	0.059
19	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	19.41	19.70	1.069	-0.19	0.634	0.678
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1312	1712.4	19.24	19.70	1.112	-0.12	0.389	0.432
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1312	1712.4	19.24	19.70	1.112	-0.11	0.451	0.501
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	1312	1712.4	19.24	19.70	1.112	-0.19	0.048	0.053
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	1312	1712.4	19.24	19.70	1.112	-0.14	0.080	0.089
20	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1312	1712.4	19.24	19.70	1.112	-0.19	0.665	0.739
	WCDMA V	RMC 12.2Kbps	Front	10mm	4132	826.4	24.18	24.70	1.127	-0.05	0.198	0.223
21	WCDMA V	RMC 12.2Kbps	Back	10mm	4132	826.4	24.18	24.70	1.127	-0.1	0.259	0.292
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4132	826.4	24.18	24.70	1.127	-0.12	0.236	0.266
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4132	826.4	24.18	24.70	1.127	-0.14	0.202	0.228
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4132	826.4	24.18	24.70	1.127	-0.09	0.050	0.056



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Front	10mm	20175	1732.5	19.52	20.00	1.117	-0.18	0.371	0.414
	LTE Band 4	20M	QPSK	50	0	Front	10mm	20175	1732.5	19.48	20.00	1.127	-0.16	0.384	0.433
	LTE Band 4	20M	QPSK	1	0	Back	10mm	20175	1732.5	19.52	20.00	1.117	-0.16	0.417	0.466
	LTE Band 4	20M	QPSK	50	0	Back	10mm	20175	1732.5	19.48	20.00	1.127	-0.16	0.430	0.485
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	19.52	20.00	1.117	-0.01	0.049	0.055
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	19.48	20.00	1.127	-0.06	0.051	0.057
	LTE Band 4	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	19.52	20.00	1.117	-0.12	0.074	0.083
	LTE Band 4	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	19.48	20.00	1.127	-0.12	0.076	0.086
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	19.52	20.00	1.117	-0.19	0.624	0.697
22	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	20175	1732.5	19.48	20.00	1.127	-0.18	0.645	0.727
	LTE Band 5	10M	QPSK	1	0	Front	10mm	20525	836.5	24.35	25.00	1.161	-0.07	0.213	0.247
	LTE Band 5	10M	QPSK	25	12	Front	10mm	20525	836.5	23.23	24.00	1.194	-0.08	0.220	0.263
	LTE Band 5	10M	QPSK	1	0	Back	10mm	20525	836.5	24.35	25.00	1.161	-0.13	0.229	0.266
	LTE Band 5	10M	QPSK	25	12	Back	10mm	20525	836.5	23.23	24.00	1.194	-0.17	0.232	0.277
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	20525	836.5	24.35	25.00	1.161	-0.12	0.232	0.269
	LTE Band 5	10M	QPSK	25	12	Left Side	10mm	20525	836.5	23.23	24.00	1.194	-0.15	0.235	0.281
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	20525	836.5	24.35	25.00	1.161	-0.18	0.246	0.286
23	LTE Band 5	10M	QPSK	25	12	Right Side	10mm	20525	836.5	23.23	24.00	1.194	-0.19	0.262	0.313
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	20525	836.5	24.35	25.00	1.161	-0.03	0.045	0.052
	LTE Band 5	10M	QPSK	25	12	Bottom Side	10mm	20525	836.5	23.23	24.00	1.194	-0.06	0.046	0.055
	LTE Band 7	20M	QPSK	1	99	Front	10mm	20850	2510	19.28	20.00	1.180	-0.03	0.183	0.216
	LTE Band 7	20M	QPSK	50	24	Front	10mm	20850	2510	19.43	20.00	1.140	-0.13	0.191	0.218
	LTE Band 7	20M	QPSK	1	99	Back	10mm	20850	2510	19.28	20.00	1.180	-0.13	0.205	0.242
	LTE Band 7	20M	QPSK	50	24	Back	10mm	20850	2510	19.43	20.00	1.140	-0.1	0.216	0.246
	LTE Band 7	20M	QPSK	1	99	Left Side	10mm	20850	2510	19.28	20.00	1.180	-0.16	0.035	0.041
	LTE Band 7	20M	QPSK	50	24	Left Side	10mm	20850	2510	19.43	20.00	1.140	-0.12	0.038	0.043
	LTE Band 7	20M	QPSK	1	99	Right Side	10mm	20850	2510	19.28	20.00	1.180	-0.18	0.031	0.037
	LTE Band 7	20M	QPSK	50	24	Right Side	10mm	20850	2510	19.43	20.00	1.140	-0.11	0.031	0.035
	LTE Band 7	20M	QPSK	1	99	Bottom Side	10mm	20850	2510	19.28	20.00	1.180	-0.11	0.455	0.537
24	LTE Band 7	20M	QPSK	50	24	Bottom Side	10mm	20850	2510	19.43	20.00	1.140	-0.17	0.476	0.543
	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	24.32	25.00	1.169	-0.15	0.175	0.205
	LTE Band 13	10M	QPSK	25	25	Front	10mm	23230	782	23.36	24.00	1.159	-0.17	0.191	0.221
	LTE Band 13	10M	QPSK	1	0	Back	10mm	23230	782	24.32	25.00	1.169	-0.12	0.257	0.301
25	LTE Band 13	10M	QPSK	25	25	Back	10mm	23230	782	23.36	24.00	1.159	-0.09	0.275	0.319
	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	23230	782	24.32	25.00	1.169	-0.12	0.166	0.194
	LTE Band 13	10M	QPSK	25	25	Left Side	10mm	23230	782	23.36	24.00	1.159	0.02	0.211	0.245
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	23230	782	24.32	25.00	1.169	-0.14	0.064	0.075
	LTE Band 13	10M	QPSK	25	25	Right Side	10mm	23230	782	23.36	24.00	1.159	-0.19	0.106	0.123
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	23230	782	24.32	25.00	1.169	-0.17	0.078	0.091
	LTE Band 13	10M	QPSK	25	25	Bottom Side	10mm	23230	782	23.36	24.00	1.159	-0.1	0.077	0.089
	LTE Band 17	10M	QPSK	1	0	Front	10mm	23790	710	24.34	25.00	1.164	-0.1	0.162	0.189
	LTE Band 17	10M	QPSK	25	25	Front	10mm	23790	710	23.51	24.00	1.119	-0.14	0.168	0.188
	LTE Band 17	10M	QPSK	1	0	Back	10mm	23790	710	24.34	25.00	1.164	-0.12	0.195	0.227
	LTE Band 17	10M	QPSK	25	25	Back	10mm	23790	710	23.51	24.00	1.119	-0.13	0.198	0.222
26	LTE Band 17	10M	QPSK	1	0	Left Side	10mm	23790	710	24.34	25.00	1.164	-0.07	0.222	0.258
	LTE Band 17	10M	QPSK	25	25	Left Side	10mm	23790	710	23.51	24.00	1.119	-0.07	0.225	0.252
	LTE Band 17	10M	QPSK	1	0	Right Side	10mm	23790	710	24.34	25.00	1.164	-0.15	0.123	0.143
	LTE Band 17	10M	QPSK	25	25	Right Side	10mm	23790	710	23.51	24.00	1.119	-0.13	0.125	0.140
	LTE Band 17	10M	QPSK	1	0	Bottom Side	10mm	23790	710	24.34	25.00	1.164	-0.05	0.052	0.061
	LTE Band 17	10M	QPSK	25	25	Bottom Side	10mm	23790	710	23.51	24.00	1.119	-0.07	0.062	0.069

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	10mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.12	0.145	0.156
	LTE Band 41	20M	QPSK	50	24	Front	10mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.06	0.148	0.156
	LTE Band 41	20M	QPSK	1	99	Back	10mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.01	0.149	0.161
	LTE Band 41	20M	QPSK	50	24	Back	10mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.02	0.155	0.164
	LTE Band 41	20M	QPSK	1	99	Left Side	10mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.12	0.058	0.063
	LTE Band 41	20M	QPSK	50	24	Left Side	10mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.14	0.055	0.058
	LTE Band 41	20M	QPSK	1	99	Right Side	10mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.12	0.034	0.037
	LTE Band 41	20M	QPSK	50	24	Right Side	10mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.13	0.035	0.037
	LTE Band 41	20M	QPSK	1	99	Bottom Side	10mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.04	0.317	0.342
27	LTE Band 41	20M	QPSK	50	24	Bottom Side	10mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.18	0.328	0.346

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.12	0.105	0.108
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.13	0.207	0.214
28	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.17	0.262	0.270
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.11	0.011	0.011
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.13	0.046	0.049
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.13	0.092	0.097
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.07	0.108	0.114
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.07	0.004	0.005
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.05	0.018	0.018
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.15	0.027	0.028
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.07	0.029	0.030
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.03	0.011	0.012
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.06	0.015	0.016
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.12	0.017	0.018
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Chain 0		42	5210	10.30	10.50	1.047	99.7	1.003	-0.02	0.015	0.016
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Chain 0		42	5210	10.30	10.50	1.047	99.7	1.003	-0.08	0.044	0.046
29	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Chain 0		42	5210	10.30	10.50	1.047	99.7	1.003	-0.09	0.068	0.071
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Chain 0		42	5210	10.30	10.50	1.047	99.7	1.003	-0.15	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Chain 1		42	5210	10.30	10.50	1.047	99.7	1.003	-0.17	0.020	0.021
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Chain 1		42	5210	10.30	10.50	1.047	99.7	1.003	0.13	0.035	0.037
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Chain 1		42	5210	10.30	10.50	1.047	99.7	1.003	-0.14	0.005	0.005
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Chain 1		42	5210	10.30	10.50	1.047	99.7	1.003	-0.11	0.010	0.010
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	-0.08	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	-0.05	0.024	0.025
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	0.04	0.015	0.015
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	-0.18	0.002	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	-0.16	0.009	0.009
30	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	-0.11	0.032	0.034
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	-0.15	0.010	0.010
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	0.09	0.008	0.008

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Chain 0	78	2480	13.28	14.00	1.182	-0.14	0.040	0.047
	Bluetooth	1Mbps	Back	10mm	Chain 0	78	2480	13.28	14.00	1.182	-0.13	0.085	0.100
31	Bluetooth	1Mbps	Left Side	10mm	Chain 0	78	2480	13.28	14.00	1.182	-0.18	0.091	0.108
	Bluetooth	1Mbps	Top Side	10mm	Chain 0	78	2480	13.28	14.00	1.182	-0.05	0.004	0.005
	Bluetooth	1Mbps	Front	10mm	Chain 1	39	2441	13.12	14.00	1.225	-0.11	0.017	0.021
	Bluetooth	1Mbps	Back	10mm	Chain 1	39	2441	13.12	14.00	1.225	-0.18	0.032	0.039
	Bluetooth	1Mbps	Left Side	10mm	Chain 1	39	2441	13.12	14.00	1.225	-0.17	0.034	0.042

15.3 Body Worn Accessory SAR
<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	26.14	27.20	1.276	-0.11	0.117	0.149
32	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.14	27.20	1.276	-0.15	0.144	0.184
	GSM1900	GPRS (4 Tx slots)	Front	10mm	661	1880	21.28	21.70	1.102	-0.03	0.271	0.299
33	GSM1900	GPRS (4 Tx slots)	Back	10mm	661	1880	21.28	21.70	1.102	-0.16	0.315	0.347

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	19.41	19.70	1.069	-0.02	0.374	0.400
34	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	19.41	19.70	1.069	-0.17	0.441	0.471
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1312	1712.4	19.24	19.70	1.112	-0.12	0.389	0.432
35	WCDMA IV	RMC 12.2Kbps	Back	10mm	1312	1712.4	19.24	19.70	1.112	-0.11	0.451	0.501
	WCDMA V	RMC 12.2Kbps	Front	10mm	4132	826.4	24.18	24.70	1.127	-0.05	0.198	0.223
36	WCDMA V	RMC 12.2Kbps	Back	10mm	4132	826.4	24.18	24.70	1.127	-0.1	0.259	0.292

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Front	10mm	20175	1732.5	19.52	20.00	1.117	-0.18	0.371	0.414
	LTE Band 4	20M	QPSK	50	0	Front	10mm	20175	1732.5	19.48	20.00	1.127	-0.16	0.384	0.433
	LTE Band 4	20M	QPSK	1	0	Back	10mm	20175	1732.5	19.52	20.00	1.117	-0.16	0.417	0.466
37	LTE Band 4	20M	QPSK	50	0	Back	10mm	20175	1732.5	19.48	20.00	1.127	-0.16	0.430	0.485
	LTE Band 5	10M	QPSK	1	0	Front	10mm	20525	836.5	24.35	25.00	1.161	-0.07	0.213	0.247
	LTE Band 5	10M	QPSK	25	12	Front	10mm	20525	836.5	23.23	24.00	1.194	-0.08	0.220	0.263
	LTE Band 5	10M	QPSK	1	0	Back	10mm	20525	836.5	24.35	25.00	1.161	-0.13	0.229	0.266
38	LTE Band 5	10M	QPSK	25	12	Back	10mm	20525	836.5	23.23	24.00	1.194	-0.17	0.232	0.277
	LTE Band 7	20M	QPSK	1	99	Front	10mm	20850	2510	19.28	20.00	1.180	-0.03	0.183	0.216
	LTE Band 7	20M	QPSK	50	24	Front	10mm	20850	2510	19.43	20.00	1.140	-0.13	0.191	0.218
	LTE Band 7	20M	QPSK	1	99	Back	10mm	20850	2510	19.28	20.00	1.180	-0.13	0.205	0.242
39	LTE Band 7	20M	QPSK	50	24	Back	10mm	20850	2510	19.43	20.00	1.140	-0.1	0.216	0.246
	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	24.32	25.00	1.169	-0.15	0.175	0.205
	LTE Band 13	10M	QPSK	25	25	Front	10mm	23230	782	23.36	24.00	1.159	-0.17	0.191	0.221
	LTE Band 13	10M	QPSK	1	0	Back	10mm	23230	782	24.32	25.00	1.169	-0.12	0.257	0.301
40	LTE Band 13	10M	QPSK	25	25	Back	10mm	23230	782	23.36	24.00	1.159	-0.09	0.275	0.319
	LTE Band 17	10M	QPSK	1	0	Front	10mm	23790	710	24.34	25.00	1.164	-0.1	0.162	0.189
	LTE Band 17	10M	QPSK	25	25	Front	10mm	23790	710	23.51	24.00	1.119	-0.14	0.168	0.188
41	LTE Band 17	10M	QPSK	1	0	Back	10mm	23790	710	24.34	25.00	1.164	-0.12	0.195	0.227
	LTE Band 17	10M	QPSK	25	25	Back	10mm	23790	710	23.51	24.00	1.119	-0.13	0.198	0.222

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	10mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.12	0.145	0.156
	LTE Band 41	20M	QPSK	50	24	Front	10mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.06	0.148	0.156
	LTE Band 41	20M	QPSK	1	99	Back	10mm	40620	2593	19.70	20.00	1.072	62.9	1.006	-0.01	0.149	0.161
42	LTE Band 41	20M	QPSK	50	24	Back	10mm	40620	2593	19.79	20.00	1.050	62.9	1.006	-0.02	0.155	0.164

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.12	0.105	0.108
43	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 0	State 1	11	2462	14.94	15.00	1.014	98.2	1.018	-0.13	0.207	0.214
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.13	0.046	0.049
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 0	State 2	6	2437	11.84	12.00	1.038	98.1	1.019	-0.13	0.092	0.097
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.05	0.018	0.018
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 1	State 1	1	2412	12.78	12.80	1.005	98.2	1.018	-0.15	0.027	0.028
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.03	0.011	0.012
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 1	State 2	11	2462	11.88	12.00	1.028	98.1	1.019	-0.06	0.015	0.016
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	10mm	Chain 0		50	5250	10.30	10.50	1.047	99.7	1.003	-0.16	0.021	0.022
44	WLAN5GHz	802.11ac-VHT160 MCS0	Back	10mm	Chain 0		50	5250	10.30	10.50	1.047	99.7	1.003	-0.16	0.045	0.047
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	10mm	Chain 1		50	5250	10.30	10.50	1.047	99.7	1.003	-0.16	0.003	0.003
	WLAN5GHz	802.11ac-VHT160 MCS0	Back	10mm	Chain 1		50	5250	10.30	10.50	1.047	99.7	1.003	0.18	0.038	0.040
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	10mm	Chain 0		114	5570	10.30	10.50	1.047	99.7	1.003	-0.14	0.003	0.003
	WLAN5GHz	802.11ac-VHT160 MCS0	Back	10mm	Chain 0		114	5570	10.30	10.50	1.047	99.7	1.003	-0.17	0.018	0.019
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	10mm	Chain 1		114	5570	10.40	10.50	1.023	99.7	1.003	-0.19	0.014	0.014
45	WLAN5GHz	802.11ac-VHT160 MCS0	Back	10mm	Chain 1		114	5570	10.40	10.50	1.023	99.7	1.003	0.14	0.036	0.037
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	-0.08	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Chain 0		155	5775	10.40	10.50	1.023	99.7	1.003	-0.05	0.024	0.025
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	-0.16	0.009	0.009
46	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Chain 1		155	5775	10.30	10.50	1.047	99.7	1.003	-0.11	0.032	0.034

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Chain 0	78	2480	13.28	14.00	1.182	-0.14	0.040	0.047
47	Bluetooth	1Mbps	Back	10mm	Chain 0	78	2480	13.28	14.00	1.182	-0.13	0.085	0.100
	Bluetooth	1Mbps	Front	10mm	Chain 1	39	2441	13.12	14.00	1.225	-0.11	0.017	0.021
	Bluetooth	1Mbps	Back	10mm	Chain 1	39	2441	13.12	14.00	1.225	-0.18	0.032	0.039

15.4 Product Specific SAR
<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Chain 0	50	5250	10.30	10.50	1.047	99.7	1.003	-0.19	0.129	0.135
	WLAN5GHz	802.11ac-VHT160 MCS0	Back	0mm	Chain 0	50	5250	10.30	10.50	1.047	99.7	1.003	-0.19	0.157	0.165
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Chain 0	50	5250	10.30	10.50	1.047	99.7	1.003	0.03	0.116	0.122
	WLAN5GHz	802.11ac-VHT160 MCS0	Top Side	0mm	Chain 0	50	5250	10.30	10.50	1.047	99.7	1.003	-0.02	0.028	0.029
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Chain 1	50	5250	10.30	10.50	1.047	99.7	1.003	-0.18	0.153	0.161
48	WLAN5GHz	802.11ac-VHT160 MCS0	Back	0mm	Chain 1	50	5250	10.30	10.50	1.047	99.7	1.003	-0.18	0.166	0.174
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Chain 1	50	5250	10.30	10.50	1.047	99.7	1.003	0.07	0.016	0.017
	WLAN5GHz	802.11ac-VHT160 MCS0	Top Side	0mm	Chain 1	50	5250	10.30	10.50	1.047	99.7	1.003	0.17	0.023	0.024
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Chain 0	114	5570	10.30	10.50	1.047	99.7	1.003	-0.13	0.072	0.076
	WLAN5GHz	802.11ac-VHT160 MCS0	Back	0mm	Chain 0	114	5570	10.30	10.50	1.047	99.7	1.003	-0.1	0.126	0.132
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Chain 0	114	5570	10.30	10.50	1.047	99.7	1.003	-0.14	0.074	0.078
	WLAN5GHz	802.11ac-VHT160 MCS0	Top Side	0mm	Chain 0	114	5570	10.30	10.50	1.047	99.7	1.003	-0.12	0.006	0.006
	WLAN5GHz	802.11ac-VHT160 MCS0	Front	0mm	Chain 1	114	5570	10.40	10.50	1.023	99.7	1.003	-0.17	0.113	0.116
49	WLAN5GHz	802.11ac-VHT160 MCS0	Back	0mm	Chain 1	114	5570	10.40	10.50	1.023	99.7	1.003	-0.13	0.184	0.189
	WLAN5GHz	802.11ac-VHT160 MCS0	Left Side	0mm	Chain 1	114	5570	10.40	10.50	1.023	99.7	1.003	-0.17	0.012	0.012
	WLAN5GHz	802.11ac-VHT160 MCS0	Top Side	0mm	Chain 1	114	5570	10.40	10.50	1.023	99.7	1.003	-0.11	0.018	0.018

16. Simultaneous Transmission Analysis

Case	Cellular (GSM/UMTS/LTE)	Cellular (5G Sub6)	WLAN 2.4GHz		WLAN 5GHz		Bluetooth	
			Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
1	-	-	Y	Y				
2					Y	Y		
3			Y	Y	Y	Y		
4							Y	
5								Y
6					Y	Y	Y	
7					Y	Y		Y
8	GSM UMTS LTE	-	Y	Y				
9					Y	Y		
10			Y	Y	Y	Y		
11							Y	
12								Y
13					Y	Y	Y	
14					Y	Y		Y

General Note:

1. This device 2.4/5.2/5.8GHz WLAN supports Hotspot operation and Bluetooth support tethering applications.
2. For MIMO SAR compliance is tested at each single chain and Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6W/kg and SAR peak to location ratio ≤ 0.04.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

16.1 Head Exposure Conditions

<2.4GHz WLAN State 1>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	1+4+5+7 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth Chain 0	Bluetooth Chain 1						
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM850	Right Cheek	0.157	0.550	0.108	0.213	0.315	0.240	0.164	0.815	0.685	0.397	0.321	0.925	0.849
	Right Tilted	0.064	0.126	0.021	0.058	0.259	0.053	0.037	0.211	0.381	0.117	0.101	0.434	0.418
	Left Cheek	0.172	0.159	0.063	0.029	0.144	0.079	0.088	0.394	0.345	0.251	0.260	0.424	0.433
	Left Tilted	0.066	0.040	0.010	0.019	0.126	0.020	0.018	0.116	0.211	0.086	0.084	0.231	0.229
GSM1900	Right Cheek	0.032	0.550	0.108	0.213	0.315	0.240	0.164	0.690	0.560	0.272	0.196	0.800	0.724
	Right Tilted	0.015	0.126	0.021	0.058	0.259	0.053	0.037	0.162	0.332	0.068	0.052	0.385	0.369
	Left Cheek	0.025	0.159	0.063	0.029	0.144	0.079	0.088	0.247	0.198	0.104	0.113	0.277	0.286
	Left Tilted	0.022	0.040	0.010	0.019	0.126	0.020	0.018	0.072	0.167	0.042	0.040	0.187	0.185
WCDMA II	Right Cheek	0.043	0.550	0.108	0.213	0.315	0.240	0.164	0.701	0.571	0.283	0.207	0.811	0.735
	Right Tilted	0.017	0.126	0.021	0.058	0.259	0.053	0.037	0.164	0.334	0.070	0.054	0.387	0.371
	Left Cheek	0.035	0.159	0.063	0.029	0.144	0.079	0.088	0.257	0.208	0.114	0.123	0.287	0.296
	Left Tilted	0.018	0.040	0.010	0.019	0.126	0.020	0.018	0.068	0.163	0.038	0.036	0.183	0.181
WCDMA IV	Right Cheek	0.061	0.550	0.108	0.213	0.315	0.240	0.164	0.719	0.589	0.301	0.225	0.829	0.753
	Right Tilted	0.028	0.126	0.021	0.058	0.259	0.053	0.037	0.175	0.345	0.081	0.065	0.398	0.382
	Left Cheek	0.036	0.159	0.063	0.029	0.144	0.079	0.088	0.258	0.209	0.115	0.124	0.288	0.297
	Left Tilted	0.023	0.040	0.010	0.019	0.126	0.020	0.018	0.073	0.168	0.043	0.041	0.188	0.186
WCDMA V	Right Cheek	0.186	0.550	0.108	0.213	0.315	0.240	0.164	0.844	0.714	0.426	0.350	0.954	0.878
	Right Tilted	0.080	0.126	0.021	0.058	0.259	0.053	0.037	0.227	0.397	0.133	0.117	0.450	0.434
	Left Cheek	0.189	0.159	0.063	0.029	0.144	0.079	0.088	0.411	0.362	0.268	0.277	0.441	0.450
	Left Tilted	0.085	0.040	0.010	0.019	0.126	0.020	0.018	0.135	0.230	0.105	0.103	0.250	0.248
LTE Band 4	Right Cheek	0.050	0.550	0.108	0.213	0.315	0.240	0.164	0.708	0.578	0.290	0.214	0.818	0.742
	Right Tilted	0.032	0.126	0.021	0.058	0.259	0.053	0.037	0.179	0.349	0.085	0.069	0.402	0.386
	Left Cheek	0.038	0.159	0.063	0.029	0.144	0.079	0.088	0.260	0.211	0.117	0.126	0.290	0.299
	Left Tilted	0.032	0.040	0.010	0.019	0.126	0.020	0.018	0.082	0.177	0.052	0.050	0.197	0.195
LTE Band 5	Right Cheek	0.222	0.550	0.108	0.213	0.315	0.240	0.164	0.880	0.750	0.462	0.386	0.990	0.914
	Right Tilted	0.111	0.126	0.021	0.058	0.259	0.053	0.037	0.258	0.428	0.164	0.148	0.481	0.465
	Left Cheek	0.213	0.159	0.063	0.029	0.144	0.079	0.088	0.435	0.386	0.292	0.301	0.465	0.474
	Left Tilted	0.101	0.040	0.010	0.019	0.126	0.020	0.018	0.151	0.246	0.121	0.119	0.266	0.264
LTE Band 7	Right Cheek	0.012	0.550	0.108	0.213	0.315	0.240	0.164	0.670	0.540	0.252	0.176	0.780	0.704
	Right Tilted	0.014	0.126	0.021	0.058	0.259	0.053	0.037	0.161	0.331	0.067	0.051	0.384	0.368
	Left Cheek	0.018	0.159	0.063	0.029	0.144	0.079	0.088	0.240	0.191	0.097	0.106	0.270	0.279
	Left Tilted	0.008	0.040	0.010	0.019	0.126	0.020	0.018	0.058	0.153	0.028	0.026	0.173	0.171
LTE Band 13	Right Cheek	0.082	0.550	0.108	0.213	0.315	0.240	0.164	0.740	0.610	0.322	0.246	0.850	0.774
	Right Tilted	0.051	0.126	0.021	0.058	0.259	0.053	0.037	0.198	0.368	0.104	0.088	0.421	0.405
	Left Cheek	0.114	0.159	0.063	0.029	0.144	0.079	0.088	0.336	0.287	0.193	0.202	0.366	0.375
	Left Tilted	0.052	0.040	0.010	0.019	0.126	0.020	0.018	0.102	0.197	0.072	0.070	0.217	0.215
LTE Band 17	Right Cheek	0.139	0.550	0.108	0.213	0.315	0.240	0.164	0.797	0.667	0.379	0.303	0.907	0.831
	Right Tilted	0.051	0.126	0.021	0.058	0.259	0.053	0.037	0.198	0.368	0.104	0.088	0.421	0.405
	Left Cheek	0.149	0.159	0.063	0.029	0.144	0.079	0.088	0.371	0.322	0.228	0.237	0.401	0.410
	Left Tilted	0.036	0.040	0.010	0.019	0.126	0.020	0.018	0.086	0.181	0.056	0.054	0.201	0.199
LTE Band 41	Right Cheek	0.013	0.550	0.108	0.213	0.315	0.240	0.164	0.671	0.541	0.253	0.177	0.781	0.705
	Right Tilted	0.018	0.126	0.021	0.058	0.259	0.053	0.037	0.165	0.335	0.071	0.055	0.388	0.372
	Left Cheek	0.015	0.159	0.063	0.029	0.144	0.079	0.088	0.237	0.188	0.094	0.103	0.267	0.276
	Left Tilted	0.009	0.040	0.010	0.019	0.126	0.020	0.018	0.059	0.154	0.029	0.027	0.174	0.172

<2.4GHz WLAN State 2>

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3+4+5 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	5GHz WLAN Chain 0 1g SAR (W/kg)	5GHz WLAN Chain 1 1g SAR (W/kg)	
GSM850	Right Cheek	0.157	0.284	0.059	0.213	0.315	1.028
	Right Tilted	0.064	0.058	0.015	0.058	0.259	0.454
	Left Cheek	0.172	0.094	0.036	0.029	0.144	0.475
	Left Tilted	0.066	0.017	0.007	0.019	0.126	0.235
GSM1900	Right Cheek	0.032	0.284	0.059	0.213	0.315	0.903
	Right Tilted	0.015	0.058	0.015	0.058	0.259	0.405
	Left Cheek	0.025	0.094	0.036	0.029	0.144	0.328
	Left Tilted	0.022	0.017	0.007	0.019	0.126	0.191
WCDMA II	Right Cheek	0.043	0.284	0.059	0.213	0.315	0.914
	Right Tilted	0.017	0.058	0.015	0.058	0.259	0.407
	Left Cheek	0.035	0.094	0.036	0.029	0.144	0.338
	Left Tilted	0.018	0.017	0.007	0.019	0.126	0.187
WCDMA IV	Right Cheek	0.061	0.284	0.059	0.213	0.315	0.932
	Right Tilted	0.028	0.058	0.015	0.058	0.259	0.418
	Left Cheek	0.036	0.094	0.036	0.029	0.144	0.339
	Left Tilted	0.023	0.017	0.007	0.019	0.126	0.192
WCDMA V	Right Cheek	0.186	0.284	0.059	0.213	0.315	1.057
	Right Tilted	0.080	0.058	0.015	0.058	0.259	0.470
	Left Cheek	0.189	0.094	0.036	0.029	0.144	0.492
	Left Tilted	0.085	0.017	0.007	0.019	0.126	0.254
LTE Band 4	Right Cheek	0.050	0.284	0.059	0.213	0.315	0.921
	Right Tilted	0.032	0.058	0.015	0.058	0.259	0.422
	Left Cheek	0.038	0.094	0.036	0.029	0.144	0.341
	Left Tilted	0.032	0.017	0.007	0.019	0.126	0.201
LTE Band 5	Right Cheek	0.222	0.284	0.059	0.213	0.315	1.093
	Right Tilted	0.111	0.058	0.015	0.058	0.259	0.501
	Left Cheek	0.213	0.094	0.036	0.029	0.144	0.516
	Left Tilted	0.101	0.017	0.007	0.019	0.126	0.270
LTE Band 7	Right Cheek	0.012	0.284	0.059	0.213	0.315	0.883
	Right Tilted	0.014	0.058	0.015	0.058	0.259	0.404
	Left Cheek	0.018	0.094	0.036	0.029	0.144	0.321
	Left Tilted	0.008	0.017	0.007	0.019	0.126	0.177
LTE Band 13	Right Cheek	0.082	0.284	0.059	0.213	0.315	0.953
	Right Tilted	0.051	0.058	0.015	0.058	0.259	0.441
	Left Cheek	0.114	0.094	0.036	0.029	0.144	0.417
	Left Tilted	0.052	0.017	0.007	0.019	0.126	0.221
LTE Band 17	Right Cheek	0.139	0.284	0.059	0.213	0.315	1.010
	Right Tilted	0.051	0.058	0.015	0.058	0.259	0.441
	Left Cheek	0.149	0.094	0.036	0.029	0.144	0.452
	Left Tilted	0.036	0.017	0.007	0.019	0.126	0.205
LTE Band 41	Right Cheek	0.013	0.284	0.059	0.213	0.315	0.884
	Right Tilted	0.018	0.058	0.015	0.058	0.259	0.408
	Left Cheek	0.015	0.094	0.036	0.029	0.144	0.318
	Left Tilted	0.009	0.017	0.007	0.019	0.126	0.178

16.2 Hotspot Exposure Conditions

<2.4GHz WLAN State 1>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	1+4+5+7 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	5GHz WLAN Chain 0 1g SAR (W/kg)	5GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth Chain 0 1g SAR (W/kg)	Bluetooth Chain 1 1g SAR (W/kg)						
GSM850	Front	0.149	0.108	0.018	0.016	0.021	0.047	0.021	0.275	0.186	0.196	0.170	0.233	0.207
	Back	0.184	0.214	0.028	0.046	0.037	0.100	0.039	0.426	0.267	0.284	0.223	0.367	0.306
	Left side	0.166	0.270	0.030	0.071	0.010	0.108	0.042	0.466	0.247	0.274	0.208	0.355	0.289
	Right side	0.133							0.133	0.133	0.133	0.133	0.133	0.133
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.037							0.037	0.037	0.037	0.037	0.037	0.037
GSM1900	Front	0.299	0.108	0.018	0.016	0.021	0.047	0.021	0.425	0.336	0.346	0.320	0.383	0.357
	Back	0.347	0.214	0.028	0.046	0.037	0.100	0.039	0.589	0.430	0.447	0.386	0.530	0.469
	Left side	0.047	0.270	0.030	0.071	0.010	0.108	0.042	0.347	0.128	0.155	0.089	0.236	0.170
	Right side	0.053							0.053	0.053	0.053	0.053	0.053	0.053
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.520							0.520	0.520	0.520	0.520	0.520	0.520
WCDMA II	Front	0.400	0.108	0.018	0.016	0.021	0.047	0.021	0.526	0.437	0.447	0.421	0.484	0.458
	Back	0.471	0.214	0.028	0.046	0.037	0.100	0.039	0.713	0.554	0.571	0.510	0.654	0.593
	Left side	0.057	0.270	0.030	0.071	0.010	0.108	0.042	0.357	0.138	0.165	0.099	0.246	0.180
	Right side	0.059							0.059	0.059	0.059	0.059	0.059	0.059
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.678							0.678	0.678	0.678	0.678	0.678	0.678
WCDMA IV	Front	0.432	0.108	0.018	0.016	0.021	0.047	0.021	0.558	0.469	0.479	0.453	0.516	0.490
	Back	0.501	0.214	0.028	0.046	0.037	0.100	0.039	0.743	0.584	0.601	0.540	0.684	0.623
	Left side	0.053	0.270	0.030	0.071	0.010	0.108	0.042	0.353	0.134	0.161	0.095	0.242	0.176
	Right side	0.089							0.089	0.089	0.089	0.089	0.089	0.089
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.739							0.739	0.739	0.739	0.739	0.739	0.739
WCDMA V	Front	0.223	0.108	0.018	0.016	0.021	0.047	0.021	0.349	0.260	0.270	0.244	0.307	0.281
	Back	0.292	0.214	0.028	0.046	0.037	0.100	0.039	0.534	0.375	0.392	0.331	0.475	0.414
	Left side	0.266	0.270	0.030	0.071	0.010	0.108	0.042	0.566	0.347	0.374	0.308	0.455	0.389
	Right side	0.228							0.228	0.228	0.228	0.228	0.228	0.228
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.056							0.056	0.056	0.056	0.056	0.056	0.056
LTE Band 4	Front	0.433	0.108	0.018	0.016	0.021	0.047	0.021	0.559	0.470	0.480	0.454	0.517	0.491
	Back	0.485	0.214	0.028	0.046	0.037	0.100	0.039	0.727	0.568	0.585	0.524	0.668	0.607
	Left side	0.057	0.270	0.030	0.071	0.010	0.108	0.042	0.357	0.138	0.165	0.099	0.246	0.180
	Right side	0.086							0.086	0.086	0.086	0.086	0.086	0.086
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.727							0.727	0.727	0.727	0.727	0.727	0.727
LTE Band 5	Front	0.263	0.108	0.018	0.016	0.021	0.047	0.021	0.389	0.300	0.310	0.284	0.347	0.321
	Back	0.277	0.214	0.028	0.046	0.037	0.100	0.039	0.519	0.360	0.377	0.316	0.460	0.399
	Left side	0.281	0.270	0.030	0.071	0.010	0.108	0.042	0.581	0.362	0.389	0.323	0.470	0.404
	Right side	0.313							0.313	0.313	0.313	0.313	0.313	0.313
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.055							0.055	0.055	0.055	0.055	0.055	0.055
LTE Band 7	Front	0.218	0.108	0.018	0.016	0.021	0.047	0.021	0.344	0.255	0.265	0.239	0.302	0.276
	Back	0.246	0.214	0.028	0.046	0.037	0.100	0.039	0.488	0.329	0.346	0.285	0.429	0.368
	Left side	0.043	0.270	0.030	0.071	0.010	0.108	0.042	0.343	0.124	0.151	0.085	0.232	0.166
	Right side	0.037							0.037	0.037	0.037	0.037	0.037	0.037
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.543							0.543	0.543	0.543	0.543	0.543	0.543

LTE Band 13	Front	0.221	0.108	0.018	0.016	0.021	0.047	0.021	0.347	0.258	0.268	0.242	0.305	0.279
	Back	0.319	0.214	0.028	0.046	0.037	0.100	0.039	0.561	0.402	0.419	0.358	0.502	0.441
	Left side	0.245	0.270	0.030	0.071	0.010	0.108	0.042	0.545	0.326	0.353	0.287	0.434	0.368
	Right side	0.123							0.123	0.123	0.123	0.123	0.123	0.123
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.091							0.091	0.091	0.091	0.091	0.091	0.091
LTE Band 17	Front	0.189	0.108	0.018	0.016	0.021	0.047	0.021	0.315	0.226	0.236	0.210	0.273	0.247
	Back	0.227	0.214	0.028	0.046	0.037	0.100	0.039	0.469	0.310	0.327	0.266	0.410	0.349
	Left side	0.258	0.270	0.030	0.071	0.010	0.108	0.042	0.558	0.339	0.366	0.300	0.447	0.381
	Right side	0.143							0.143	0.143	0.143	0.143	0.143	0.143
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.069							0.069	0.069	0.069	0.069	0.069	0.069
LTE Band 41	Front	0.156	0.108	0.018	0.016	0.021	0.047	0.021	0.282	0.193	0.203	0.177	0.240	0.214
	Back	0.164	0.214	0.028	0.046	0.037	0.100	0.039	0.406	0.247	0.264	0.203	0.347	0.286
	Left side	0.063	0.270	0.030	0.071	0.010	0.108	0.042	0.363	0.144	0.171	0.105	0.252	0.186
	Right side	0.037							0.037	0.037	0.037	0.037	0.037	0.037
	Top side		0.011		0.002	0.010	0.005		0.011	0.012	0.005	0.000	0.017	0.012
	Bottom side	0.346							0.346	0.346	0.346	0.346	0.346	0.346

<2.4GHz WLAN State 2>

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3+4+5 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	5GHz WLAN Chain 0 1g SAR (W/kg)	5GHz WLAN Chain 1 1g SAR (W/kg)	
GSM850	Front	0.149	0.049	0.012	0.016	0.021	0.247
	Back	0.184	0.097	0.016	0.046	0.037	0.380
	Left side	0.166	0.114	0.018	0.071	0.010	0.379
	Right side	0.133					0.133
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.037					0.037
GSM1900	Front	0.299	0.049	0.012	0.016	0.021	0.397
	Back	0.347	0.097	0.016	0.046	0.037	0.543
	Left side	0.047	0.114	0.018	0.071	0.010	0.260
	Right side	0.053					0.053
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.520					0.520
WCDMA II	Front	0.400	0.049	0.012	0.016	0.021	0.498
	Back	0.471	0.097	0.016	0.046	0.037	0.667
	Left side	0.057	0.114	0.018	0.071	0.010	0.270
	Right side	0.059					0.059
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.678					0.678
WCDMA IV	Front	0.432	0.049	0.012	0.016	0.021	0.530
	Back	0.501	0.097	0.016	0.046	0.037	0.697
	Left side	0.053	0.114	0.018	0.071	0.010	0.266
	Right side	0.089					0.089
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.739					0.739
WCDMA V	Front	0.223	0.049	0.012	0.016	0.021	0.321
	Back	0.292	0.097	0.016	0.046	0.037	0.488
	Left side	0.266	0.114	0.018	0.071	0.010	0.479
	Right side	0.228					0.228
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.056					0.056



FCC SAR TEST REPORT

Report No. : FA133143

LTE Band 4	Front	0.433	0.049	0.012	0.016	0.021	0.531
	Back	0.485	0.097	0.016	0.046	0.037	0.681
	Left side	0.057	0.114	0.018	0.071	0.010	0.270
	Right side	0.086					0.086
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.727					0.727
LTE Band 5	Front	0.263	0.049	0.012	0.016	0.021	0.361
	Back	0.277	0.097	0.016	0.046	0.037	0.473
	Left side	0.281	0.114	0.018	0.071	0.010	0.494
	Right side	0.313					0.313
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.055					0.055
LTE Band 7	Front	0.218	0.049	0.012	0.016	0.021	0.316
	Back	0.246	0.097	0.016	0.046	0.037	0.442
	Left side	0.043	0.114	0.018	0.071	0.010	0.256
	Right side	0.037					0.037
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.543					0.543
LTE Band 13	Front	0.221	0.049	0.012	0.016	0.021	0.319
	Back	0.319	0.097	0.016	0.046	0.037	0.515
	Left side	0.245	0.114	0.018	0.071	0.010	0.458
	Right side	0.123					0.123
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.091					0.091
LTE Band 17	Front	0.189	0.049	0.012	0.016	0.021	0.287
	Back	0.227	0.097	0.016	0.046	0.037	0.423
	Left side	0.258	0.114	0.018	0.071	0.010	0.471
	Right side	0.143					0.143
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.069					0.069
LTE Band 41	Front	0.156	0.049	0.012	0.016	0.021	0.254
	Back	0.164	0.097	0.016	0.046	0.037	0.360
	Left side	0.063	0.114	0.018	0.071	0.010	0.276
	Right side	0.037					0.037
	Top side		0.005		0.002	0.010	0.017
	Bottom side	0.346					0.346

16.3 Body-Worn Accessory Exposure Conditions

<2.4GHz WLAN State 1>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	1+4+5+7 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth Chain 0	Bluetooth Chain 1						
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM850	Front	0.149	0.108	0.018	0.022	0.014	0.047	0.021	0.275	0.185	0.196	0.170	0.232	0.206
	Back	0.184	0.214	0.028	0.047	0.040	0.100	0.039	0.426	0.271	0.284	0.223	0.371	0.310
GSM1900	Front	0.299	0.108	0.018	0.022	0.014	0.047	0.021	0.425	0.335	0.346	0.320	0.382	0.356
	Back	0.347	0.214	0.028	0.047	0.040	0.100	0.039	0.589	0.434	0.447	0.386	0.534	0.473
WCDMA II	Front	0.400	0.108	0.018	0.022	0.014	0.047	0.021	0.526	0.436	0.447	0.421	0.483	0.457
	Back	0.471	0.214	0.028	0.047	0.040	0.100	0.039	0.713	0.558	0.571	0.510	0.658	0.597
WCDMA IV	Front	0.432	0.108	0.018	0.022	0.014	0.047	0.021	0.558	0.468	0.479	0.453	0.515	0.489
	Back	0.501	0.214	0.028	0.047	0.040	0.100	0.039	0.743	0.588	0.601	0.540	0.688	0.627
WCDMA V	Front	0.223	0.108	0.018	0.022	0.014	0.047	0.021	0.349	0.259	0.270	0.244	0.306	0.280
	Back	0.292	0.214	0.028	0.047	0.040	0.100	0.039	0.534	0.379	0.392	0.331	0.479	0.418
LTE Band 4	Front	0.433	0.108	0.018	0.022	0.014	0.047	0.021	0.559	0.469	0.480	0.454	0.516	0.490
	Back	0.485	0.214	0.028	0.047	0.040	0.100	0.039	0.727	0.572	0.585	0.524	0.672	0.611
LTE Band 5	Front	0.263	0.108	0.018	0.022	0.014	0.047	0.021	0.389	0.299	0.310	0.284	0.346	0.320
	Back	0.277	0.214	0.028	0.047	0.040	0.100	0.039	0.519	0.364	0.377	0.316	0.464	0.403
LTE Band 7	Front	0.218	0.108	0.018	0.022	0.014	0.047	0.021	0.344	0.254	0.265	0.239	0.301	0.275
	Back	0.246	0.214	0.028	0.047	0.040	0.100	0.039	0.488	0.333	0.346	0.285	0.433	0.372
LTE Band 13	Front	0.221	0.108	0.018	0.022	0.014	0.047	0.021	0.347	0.257	0.268	0.242	0.304	0.278
	Back	0.319	0.214	0.028	0.047	0.040	0.100	0.039	0.561	0.406	0.419	0.358	0.506	0.445
LTE Band 17	Front	0.189	0.108	0.018	0.022	0.014	0.047	0.021	0.315	0.225	0.236	0.210	0.272	0.246
	Back	0.227	0.214	0.028	0.047	0.040	0.100	0.039	0.469	0.314	0.327	0.266	0.414	0.353
LTE Band 41	Front	0.156	0.108	0.018	0.022	0.014	0.047	0.021	0.282	0.192	0.203	0.177	0.239	0.213
	Back	0.164	0.214	0.028	0.047	0.040	0.100	0.039	0.406	0.251	0.264	0.203	0.351	0.290

<2.4GHz WLAN State 2>

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3+4+5 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	5GHz WLAN Chain 0 1g SAR (W/kg)	5GHz WLAN Chain 1 1g SAR (W/kg)	
GSM850	Front	0.149	0.049	0.012	0.022	0.014	0.246
	Back	0.184	0.097	0.016	0.047	0.040	0.384
GSM1900	Front	0.299	0.049	0.012	0.022	0.014	0.396
	Back	0.347	0.097	0.016	0.047	0.040	0.547
WCDMA II	Front	0.400	0.049	0.012	0.022	0.014	0.497
	Back	0.471	0.097	0.016	0.047	0.040	0.671
WCDMA IV	Front	0.432	0.049	0.012	0.022	0.014	0.529
	Back	0.501	0.097	0.016	0.047	0.040	0.701
WCDMA V	Front	0.223	0.049	0.012	0.022	0.014	0.320
	Back	0.292	0.097	0.016	0.047	0.040	0.492
LTE Band 4	Front	0.433	0.049	0.012	0.022	0.014	0.530
	Back	0.485	0.097	0.016	0.047	0.040	0.685
LTE Band 5	Front	0.263	0.049	0.012	0.022	0.014	0.360
	Back	0.277	0.097	0.016	0.047	0.040	0.477
LTE Band 7	Front	0.218	0.049	0.012	0.022	0.014	0.315
	Back	0.246	0.097	0.016	0.047	0.040	0.446
LTE Band 13	Front	0.221	0.049	0.012	0.022	0.014	0.318
	Back	0.319	0.097	0.016	0.047	0.040	0.519
LTE Band 17	Front	0.189	0.049	0.012	0.022	0.014	0.286
	Back	0.227	0.097	0.016	0.047	0.040	0.427
LTE Band 41	Front	0.156	0.049	0.012	0.022	0.014	0.253
	Back	0.164	0.097	0.016	0.047	0.040	0.364

16.4 Product Specific Exposure Conditions

Exposure Position	1	2	3	4	5	6	1+2+3+4 Summed 10g SAR (W/kg)	3+4+5 Summed 10g SAR (W/kg)	3+4+6 Summed 10g SAR (W/kg)
	2.4GHz WLAN Chain 0 10g SAR (W/kg)	2.4GHz WLAN Chain 1 10g SAR (W/kg)	5GHz WLAN Chain 0 10g SAR (W/kg)	5GHz WLAN Chain 1 10g SAR (W/kg)	Bluetooth Chain 0 10g SAR (W/kg)	Bluetooth Chain 1 10g SAR (W/kg)			
Front			0.135	0.161			0.296	0.296	0.296
Back			0.165	0.189			0.354	0.354	0.354
Left side			0.122	0.017			0.139	0.139	0.139
Right side							0.000	0.000	0.000
Top side			0.029	0.024			0.053	0.053	0.053
Bottom side							0.000	0.000	0.000

Test Engineer : Max Jhuang, Jay Jian, Luke Lee and Chris Yang



17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.