


# TEST REPORT

 <b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2021-03347-1 Page (1) / (40) Pages	
--	--	--

## 1. Applicant

- Name : SOLUM CO.,LTD.
- Address : 4,5,6th F, 357, Guseong-ro, Giheung-gu, Gyeonggi-do, Yongin-si, Republic of Korea
- Date of Receipt : 2021-07-15(First issued)
- Date of Receipt : 2024-12-10(Frequency band, Channel Spacing change and PCB antenna Change)

## 2. Manufacturer

- Name #1 : SOLUM CO.,LTD.
- Address #1 : 4,5,6th F, 357, Guseong-ro, Giheung-gu, Gyeonggi-do, Yongin-si, Republic of Korea
- Name #2 : SOLUM VINA CO., LTD
- Address #2 : Plot B3, Ba Thien 2 Industrial park, Thien Ke Ward, Binh Xuyen District, Vinh Phuc Province, 281200., People's Republic of Vietnam

## 3. Use of Report : For FCC Certification

## 4. Test Sample / Model : ESL Label / EL097H2WRN(Test model : EL097H2C4N)

## 5. Date of Test : 2021-08-16 to 2021-09-01(First issued) 2025-01-09 to 2025-01-14(Frequency band, Channel Spacing change and PCB antenna Change)



## 6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247, ANSI C63.10-2013


## 8. Testing Environment : refer to 8 page

## 8. Test Results : Compliance

## 9. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (First issued) : (Address : (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea) (Frequency band, Channel Spacing change and PCB antenna Change) (Address : 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by  Seoung-uk Park: (Signature)	Technical Manager  Young-taek Lee: (Signature)
----------	---	---



Report No.:  
CTK-2021-03347-1  
Page (2) / (40) Pages

Republic of KOREA **CTK Co., Ltd.**


## REPORT REVISION HISTORY

Date	Revision	Page No
2021-09-01	Issued (CTK-2021-03347)	all
2025-03-07	Issued (CTK-2021-03347-1) 1. Add Variant Model(EL097H2C4N)	all

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***

## **CONTENTS**

1. General Product Description .....	5
1.1 Applicant Information .....	5
1.2 Product Information .....	5
1.3 Peripheral Devices .....	5
2. Facility and Accreditations .....	6
2.1 Laboratory Accreditations and Listings .....	6
2.2 Calibration Details of Equipment Used for Measurement .....	6
3. Test Specifications .....	7
3.1 Standards .....	7
3.2 Mode of operation during the test .....	7
3.3 Measurement Uncertainty .....	8
3.4 Test Software .....	8
3.5 Testing Environment .....	8
4. Technical Characteristic Test .....	9
4.1 6dB Bandwidth & 99% Bandwidth .....	9
4.2 Maximum peak Conducted Output Power .....	13
4.3 Power Spectral Density .....	16
4.4 Band Edge & Conducted Spurious emission .....	19
4.5 Radiated Emission .....	23
APPENDIX A – Test Equipment Used For Tests .....	39

	<b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: <b>CTK-2021-03347-1</b> Page (5) / (40) Pages	
--	--	---	--

# 1. General Product Description

## 1.1 Applicant Information

<b>Company</b>	SOLUM CO.,LTD.
<b>Contact Point</b>	4,5,6th F, 357, Guseong-ro, Giheung-gu, Gyeonggi-do, Yongin-si, Republic of Korea
<b>Contact Person</b>	Name : Ki Dong Lee E-mail : kdlee007@solu-m.com Tel : +82-31-8006-7677

## 1.2 Product Information

<b>FCC ID</b>	2AFWN-EL097H2WRN
<b>Product Description</b>	ESL Label
<b>Model name</b>	EL097H2WRN
<b>Variant Model name</b>	EL097H2BRN, EL097H2BYN, EL097H2WYN (Variant models have no technical differences with each model except for the model name and color for marketing purposes.) EL097H2C4N (Variant models have no technical differences with each model except for the model name and color, Frequency band, Channel Spacing change and antenna Change)
<b>Operating Frequency</b>	2 401 MHz - 2 480 MHz
<b>RF Output Power</b>	4.23 dBm(2.65 mW)
<b>Antenna Specification</b>	Antenna type : PCB Antenna Peak Gain : 1.66 dBi
<b>Number of channels</b>	80
<b>Channel Spacing</b>	1 MHz
<b>Type of Modulation</b>	GFSK
<b>Power Source</b>	DC 3.0 V(Battery)
<b>Firmware Version Id Number(FVIN)</b>	V29
<b>RF Power setting in Test SW</b>	"4"

## 1.3 Peripheral Devices

-For Conducted Measurement and Radiated Measurement

Device	Manufacturer	Model No.	Serial No.
Notebook	HP Inc.	HP Probook 455 G7	5CD0234DWW
AC Adapter	HP Inc.	TPN-LA16	PA-1650-20HL

## 2. Facility and Accreditations

### 2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

### 2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

### 3. Test Specifications

#### 3.1 Standards

Section in FCC	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(e)	Transmitter power spectral density	C	
15.247(b)	Maximum peak conducted output power	C	
15.247(d)	Unwanted emission	C	
15.209	Transmitter emission	C	Radiated
15.207(a)	AC Conducted Emission	NA(Note 3)	Line Conducted
<u>Note 1:</u> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<u>Note 2:</u> The data in this test report are traceable to the national or international standards.			
<u>Note 3:</u> The equipment is operated on battery power only.			
<u>Note 4:</u> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013,			
<u>Note 5:</u> The tests were performed according to the method of measurements prescribed in KDB No.558074.			

#### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.  
 During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.  
 The results are only attached worst cases.

##### Test Frequency (First issued)

Lowest	Middle	Highest
2 402 MHz	2 440 MHz	2 480 MHz

##### (Frequency band, Channel Spacing change and PCB antenna Change)

Lowest	Middle	Highest
2 401 MHz	2 440 MHz	2 480 MHz

\*For Conducted data on Middle and Highest Channel, refer to the data in First issued

##### Test mode (First issued)

Modulation	Duty Cycle
GFSK	86 %

##### (Frequency band, Channel Spacing change and PCB antenna Change)

Modulation	Duty Cycle
GFSK	100 %

### 3.3 Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.

Coverage factor  $k = 2$ , Confidence levels of 95 %

(First issued)

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L. : Approx. 95%, $k=2$ )
Occupied Bandwidth	0.1 MHz (C.L. : Approx. 95%, $k=2$ )
Unwanted Emission(conducted)	3.0 dB (C.L. : Approx. 95%, $k=2$ )
Radiated Emissions ( $f \leq 1$ GHz)	2.0 dB (C.L. : Approx. 95%, $k=2$ )
Radiated Emissions ( $f > 1$ GHz)	2.1 dB (C.L. : Approx. 95%, $k=2$ )

(Frequency band, Channel Spacing change and PCB antenna Change)

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L. : Approx. 95%, $k=2$ )
Occupied Bandwidth	0.1 MHz (C.L. : Approx. 95%, $k=2$ )
Unwanted Emission(conducted)	3.0 dB (C.L. : Approx. 95%, $k=2$ )
Radiated Emissions ( $f \leq 1$ GHz)	3.82 dB (C.L. : Approx. 95%, $k=2$ )
Radiated Emissions ( $f > 1$ GHz)	4.5 dB (C.L. : Approx. 95%, $k=2$ )

### 3.4 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	EP5RE Ver. 6.0.10, ES10 Ver. 2022.04.000

### 3.5 Testing Environment

Test Item	Test Date	Temperature (°C)	Relative Humidity (%)
6 dB Bandwidth	2025-01-09	24	36
Transmitter power spectral density	2025-01-09	24	36
Maximum peak conducted output power	2025-01-09	24	36
Unwanted emission	2025-01-09	24	36
Transmitter emission	2025-01-11 ~ 2025-01-14	20 ~ 25	30~34



## 4. Technical Characteristic Test

### 4.1 6dB Bandwidth & 99% Bandwidth

#### Test Procedures(ANSI C63.10-2013 6.9.2)

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Test Procedures(ANSI C63.10-2013 6.9.3)

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

#### Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Sweep = auto couple
- f) Allow trace to fully stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### **Limit :**

---

6 dB Bandwidth > 500 kHz

---

**Test Data :**

**(First issued)**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
Low	2 402	0.703	1.042	Complies
Middle	2 440	0.712	1.051	Complies
High	2 480	0.716	1.051	Complies


**(Frequency band, Channel Spacing change and PCB antenna Change)**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
Low	2 401	0.714	1.057	Complies


See next pages for actual measured spectrum plots.

(First issued)


**6 dB Bandwidth[MHz]**  
Low channel

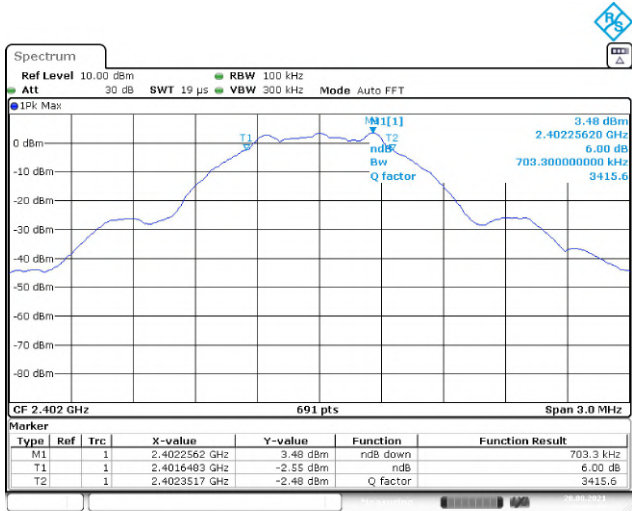


**99% Bandwidth[MHz]**  
Low channel

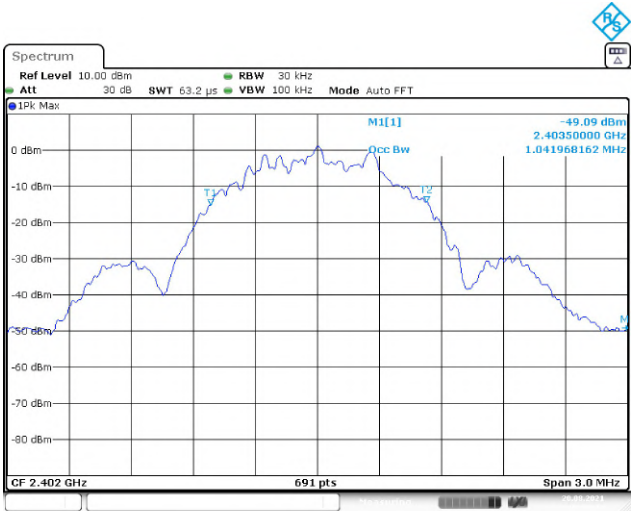


Middle channel

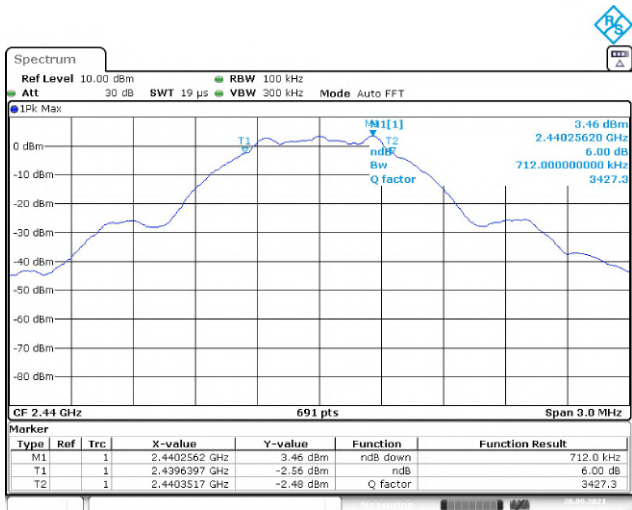


Middle channel

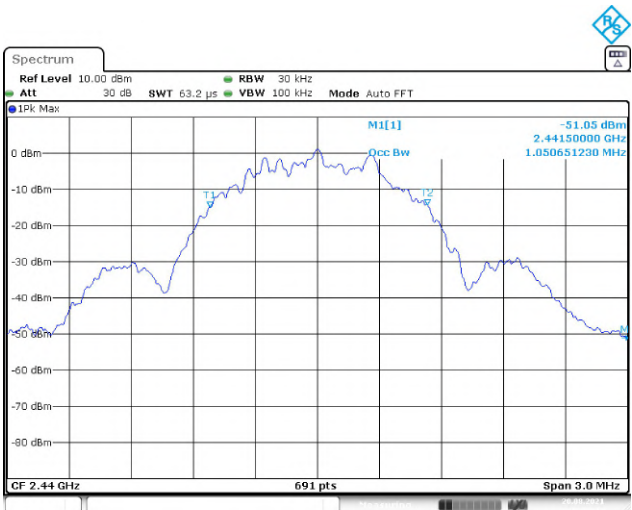

High channel

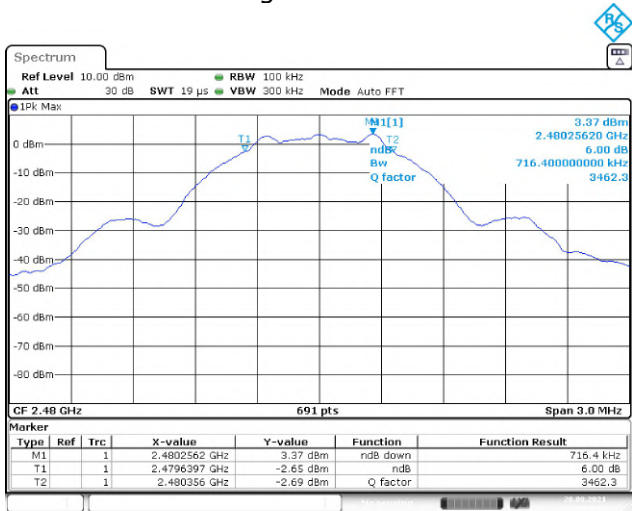

High channel

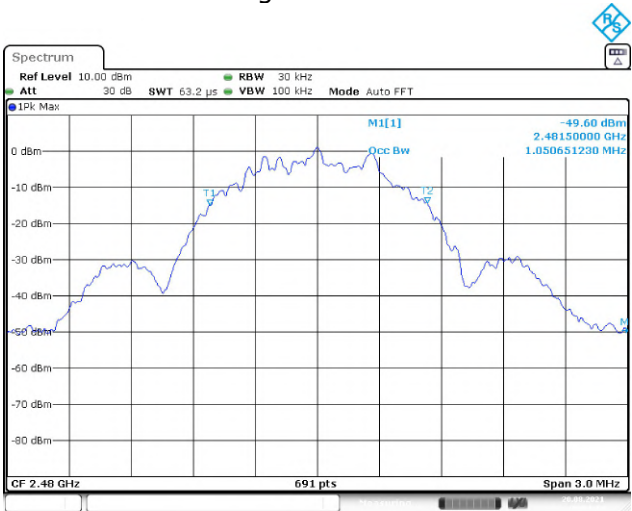



(Frequency band, Channel Spacing change and PCB antenna Change)

6 dB Bandwidth[MHz]

Low channel

99% Bandwidth[MHz]

Low channel

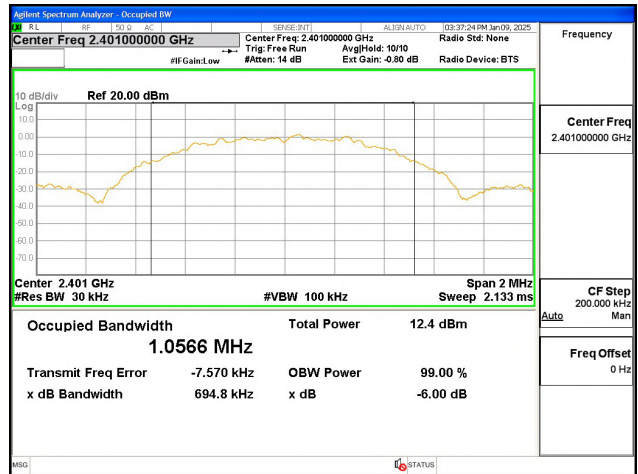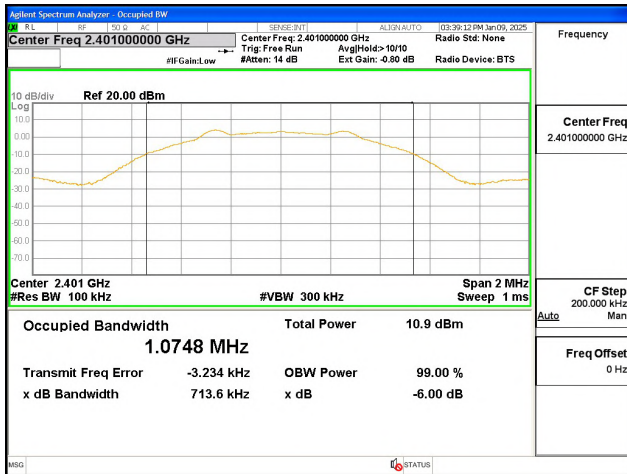

## 4.2 Maximum peak Conducted Output Power

### Test Procedures(ANSI C63.10-2013 11.9.1)

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth:

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- |  |                             |
|--|-----------------------------|
| a) RBW $\geq$ DTS Bandwidth  | b) VBW $\geq 3 \times$ RBW  |
| c) span $\geq 3 \times$ RBW  | d) Sweep time = auto couple |
| e) Detector = peak   | f) Trace mode= max hold     |
| g) Allow trace to fully stabilize                                  |                             |
| h) Use peak marker function to determine the peak amplitude level. |                             |

#### Limit :

---

Maximum Output Power < 1 W (30 dBm)

---

#### Test Data :

##### (First issued)


Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Low	2 402	4.23	30	Complies
Middle	2 440	4.18	30	Complies
High	2 480	4.08	30	Complies

##### (Frequency band, Channel Spacing change and PCB antenna Change)


Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Low	2 401	4.19	30	Complies

See next pages for actual measured spectrum plots.


(First issued)  
**Output Power**  
 Low channel

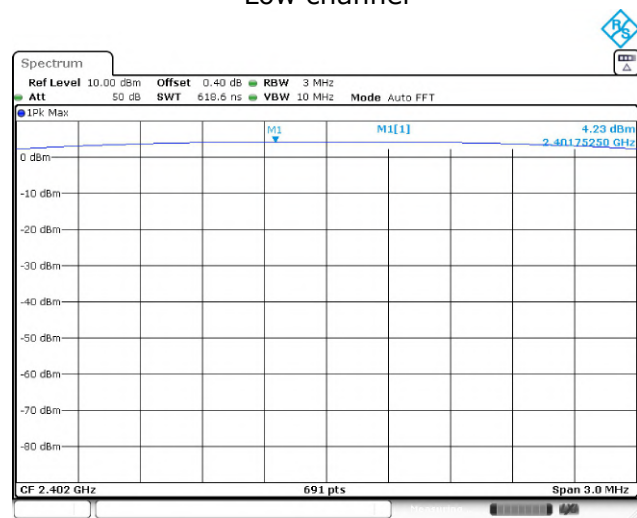


Middle channel

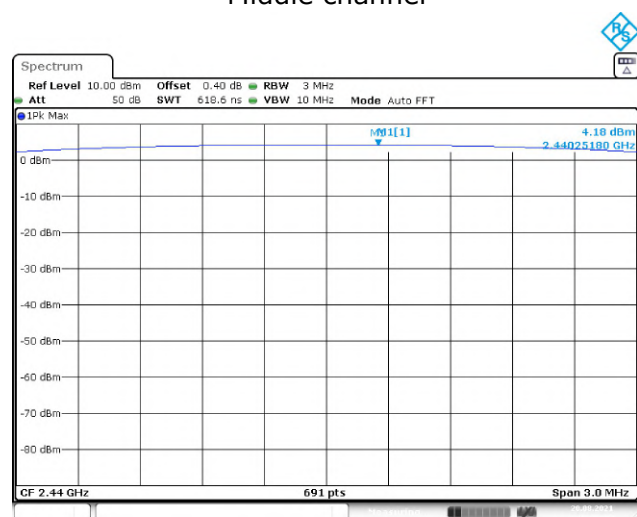

High channel

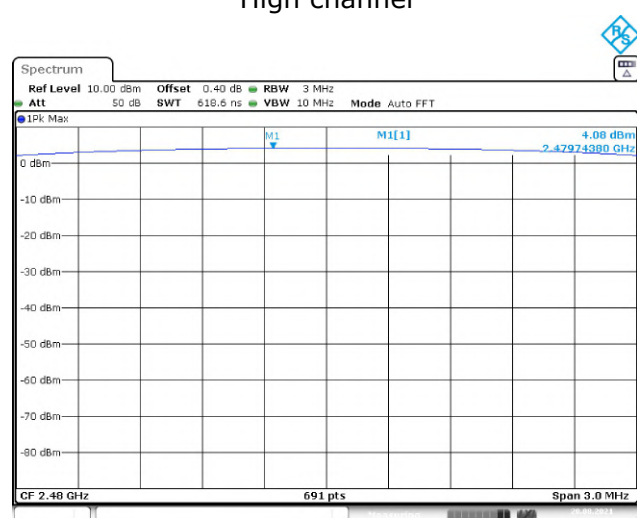

(Frequency band, Channel Spacing change and PCB antenna Change)  
Output Power  
Low channel

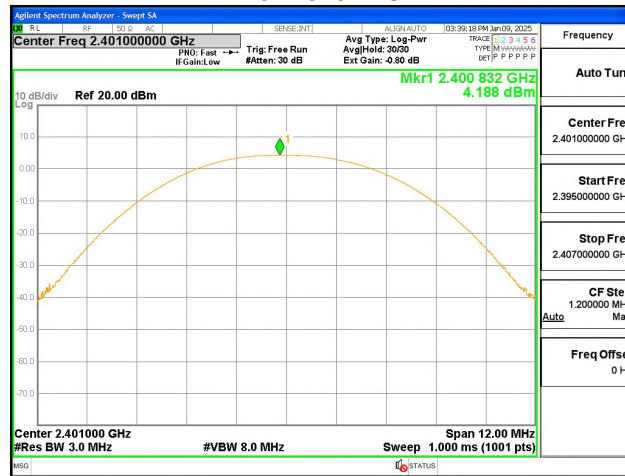

## 4.3 Power Spectral Density

### Test Procedures(ANSI C63.10-2013 11.10.2)

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- |  |                                   |
|--|-----------------------------------|
| a) RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$                            | b) VBW $\geq 3 \times \text{RBW}$ |
| c) span $\geq 1.5 \times \text{DTS bandwidth}$   | d) Sweep time = auto couple       |
| e) Detector = peak   | f) Trace mode = max hold          |
| g) Allow trace to fully stabilize  |                                   |
| h) Use the peak marker function to determine the maximum amplitude level within the RBW. |                                   |

#### Limit :

---

Power Spectral Density < 8 dBm @ 3 kHz BW

---

#### Test Data :

##### (First issued)

Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Low	2 402	-12.20	8	Complies
Middle	2 440	-12.25	8	Complies
High	2 480	-12.33	8	Complies


##### (Frequency band, Channel Spacing change and PCB antenna Change)

Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Low	2 401	-8.798	8	Complies


See next pages for actual measured spectrum plots.




**(First issued)**  
**Power Spectral Density**  
 Low channel

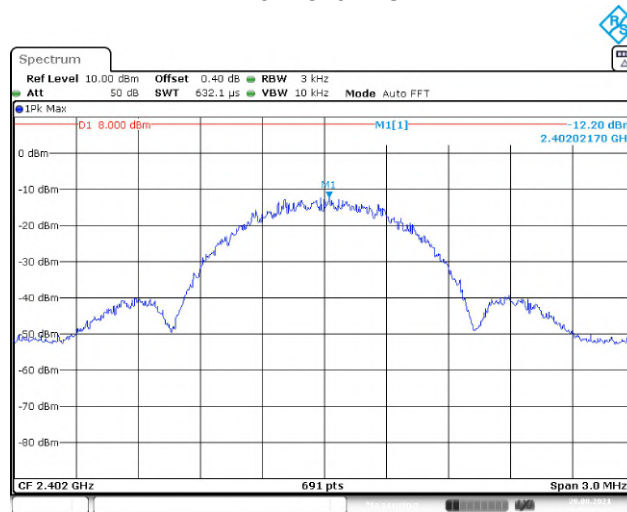

**Middle channel**

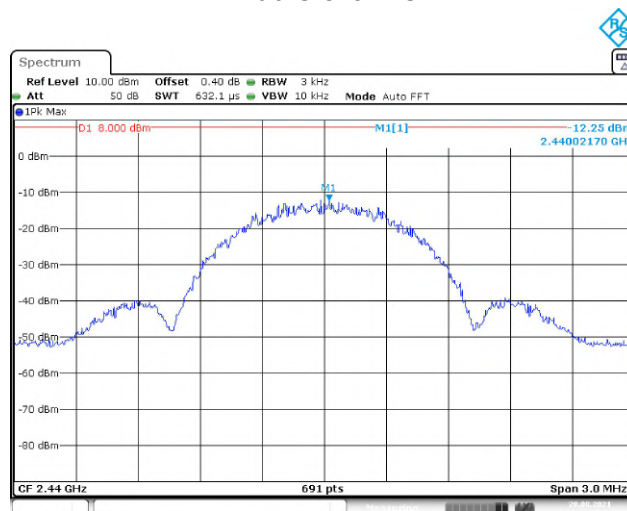


**High channel**

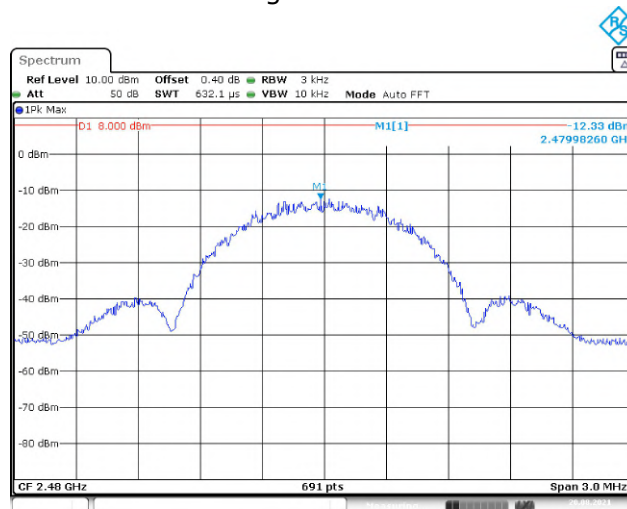

**(Frequency band, Channel Spacing change and PCB antenna Change)**

Power Spectral Density  
Low channel

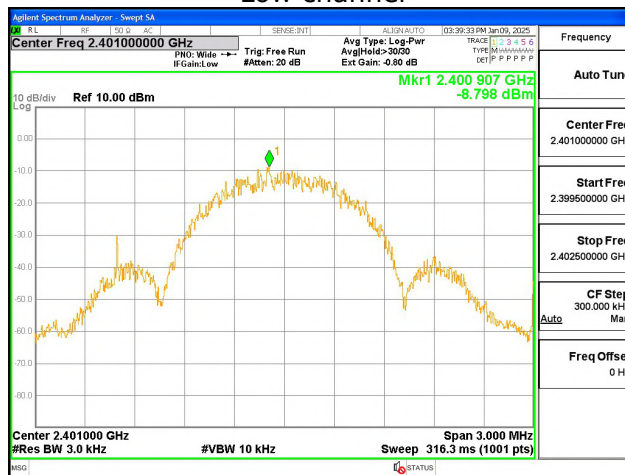

## 4.4 Band Edge & Conducted Spurious emission

### Test Procedures(ANSI C63.10-2013 11.11.3)

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Sweep time = auto couple
- e) Trace mode= max hold
- f) Allow trace to fully stabilize
- g) Use the peak marker function to determine the maximum amplitude level.

#### **Limit :**

---

Emission level < 20 dBc



---

#### **Test results: Complies**


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.


(First issued)  
Conducted Band-Edge

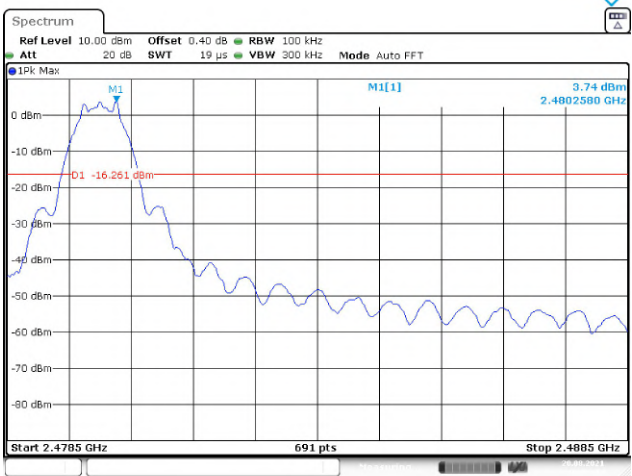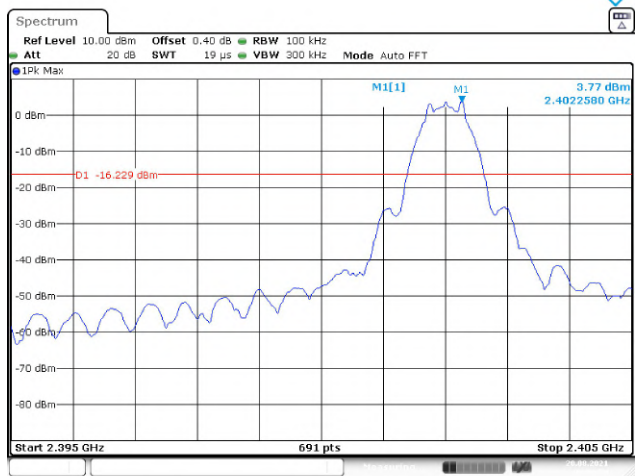


# Conducted Spurious Emission Low channel

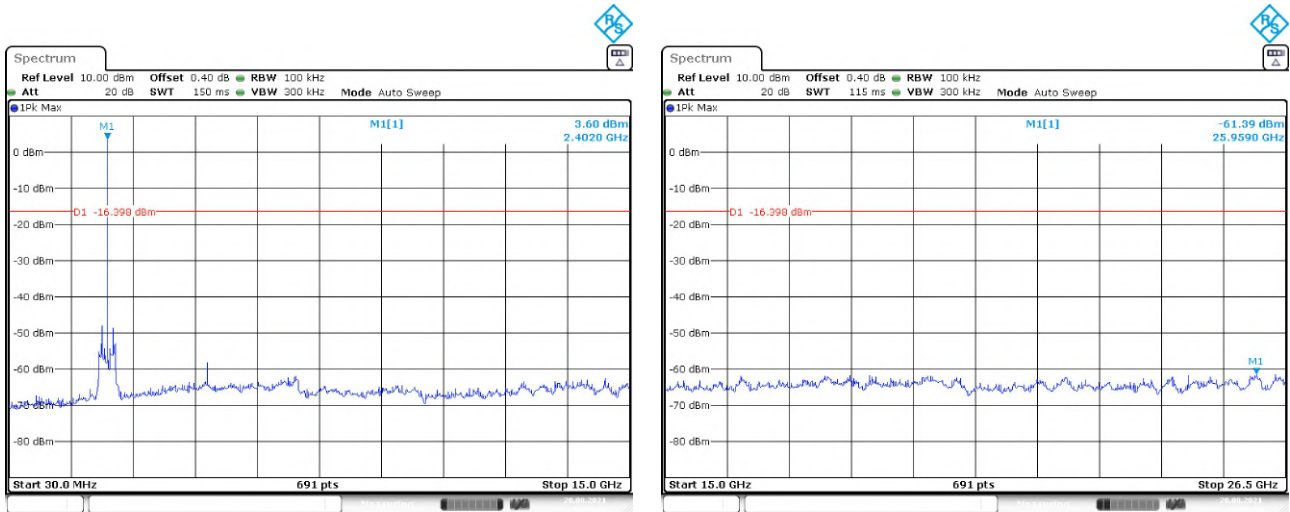


## Middle channel

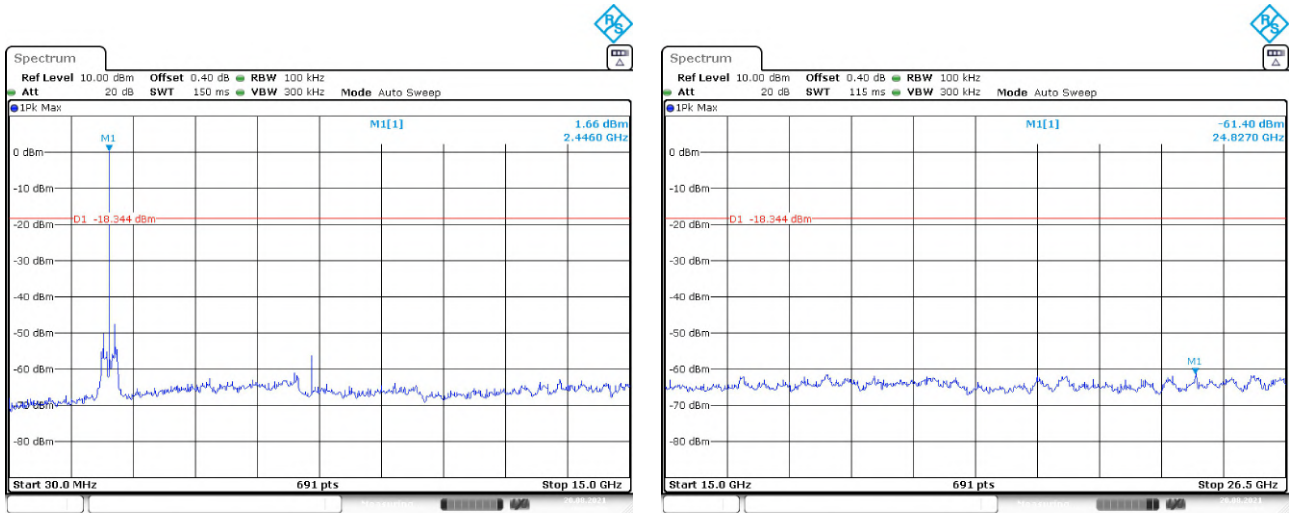


## High channel

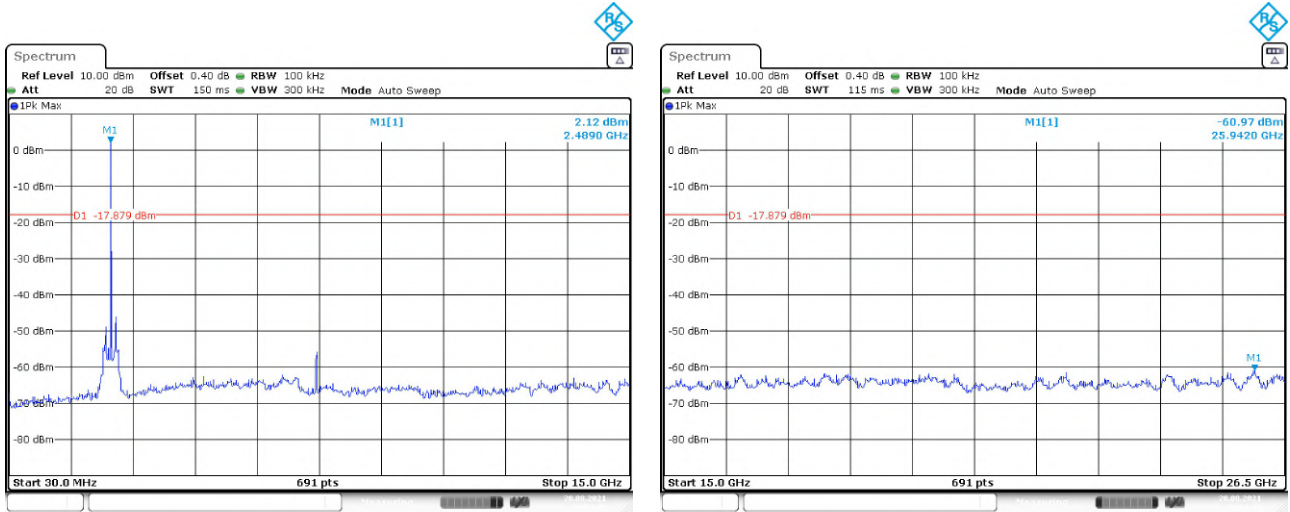

**(Frequency band, Channel Spacing change and PCB antenna Change)**  
**Conducted Band-Edge**

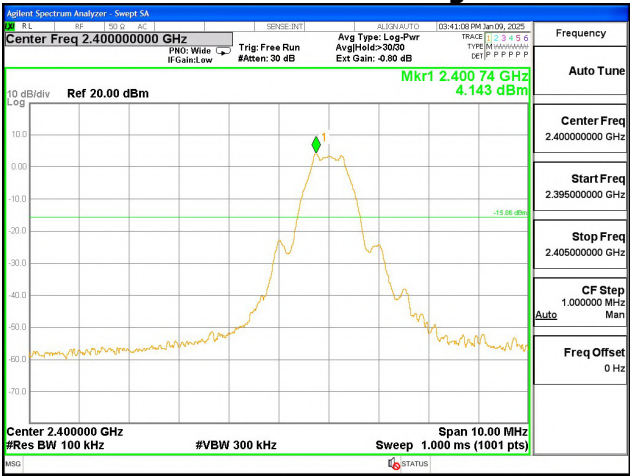

**Conducted Spurious Emission**  
 Low channel

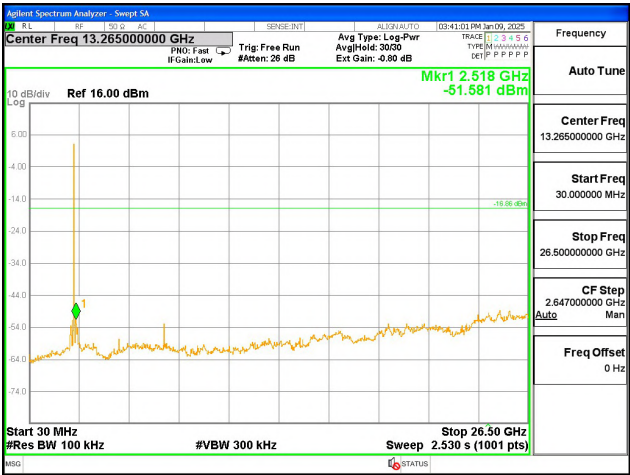

## 4.5 Radiated Emission

### Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)  
☒ 3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

### Instrument Settings

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz
- b) VBW  $\geq$  RBW
- c) Sweep time = auto couple

## Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

**Table 1. Restricted Frequency Bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	<b>2310-2390</b>	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	<b>2483.5-2500</b>	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 2. General Field Strength Limits for Licence-Exempt Transmitters**

Frequency(MHz)	Field Strength (uA/m)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measurement Distance (meters)
0.009-0.490	6.37/F (F in kHz)	2400/F(kHz)	48.5 - 13.8	300
0.490-1.705	63.7/F (F in kHz)	24000/F(kHz)	33.8 - 23	30
1.705-30	0.08	30	29.5	30
30-88	-	100**	40	3
88-216	-	150**	43.5	3
216-960	-	200**	46	3
Above 960	-	500	54	3


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz and detector is peak for peak measurement and detector RMS and Trace Averaging type for average measurement.

## Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

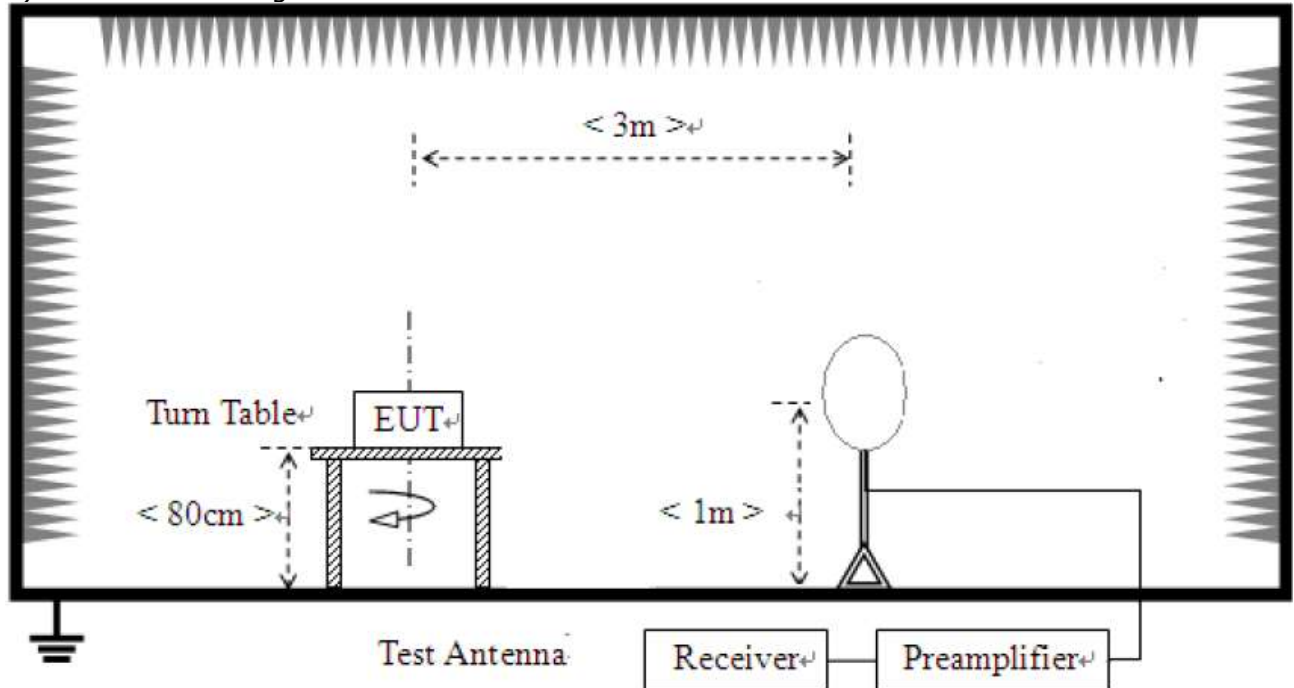

- 2) For field strength of emissions from 30 MHz to 1 GHz

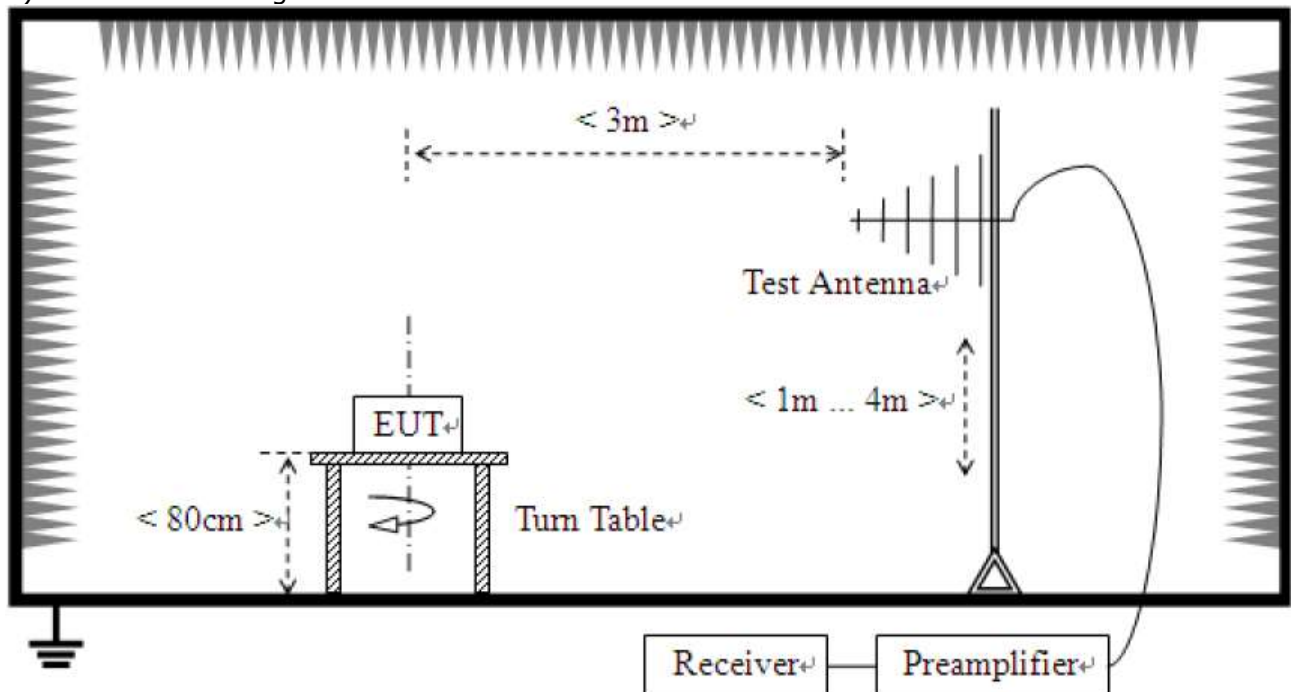

3) For field strength of emissions above 1 GHz

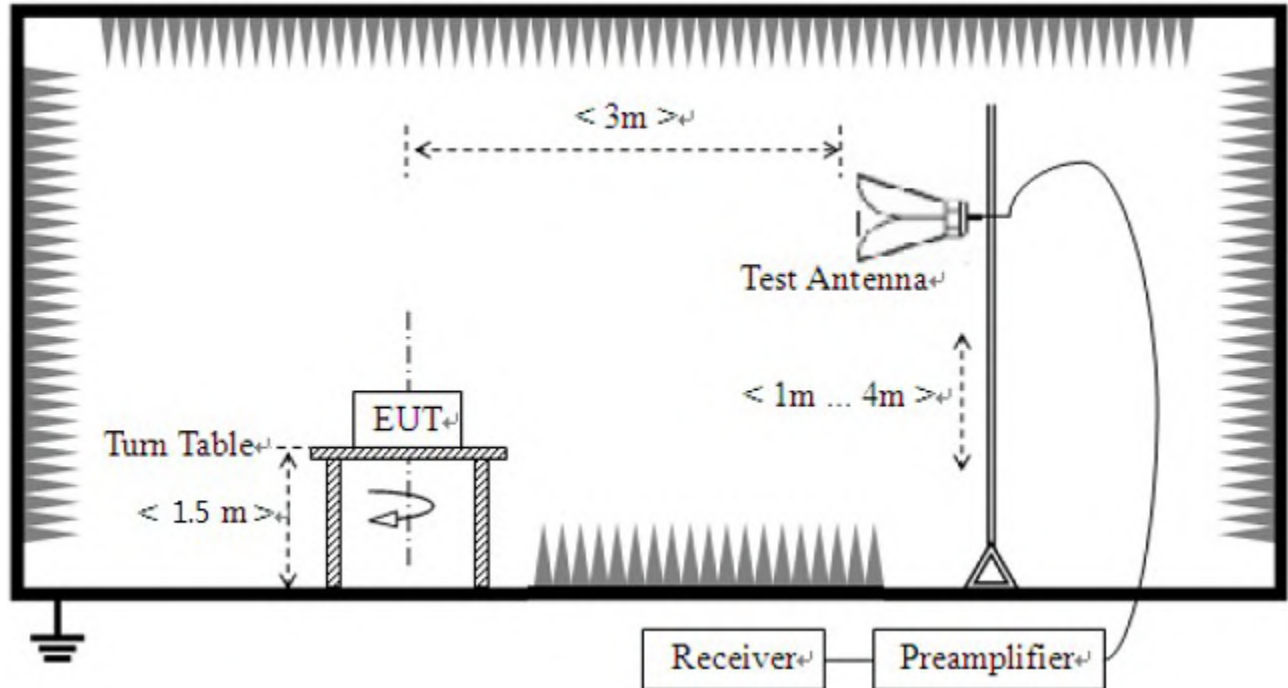


Test results

(First issued)

1) Restricted Frequency Bands

1. 2 310 MHz to 2 390 MHz

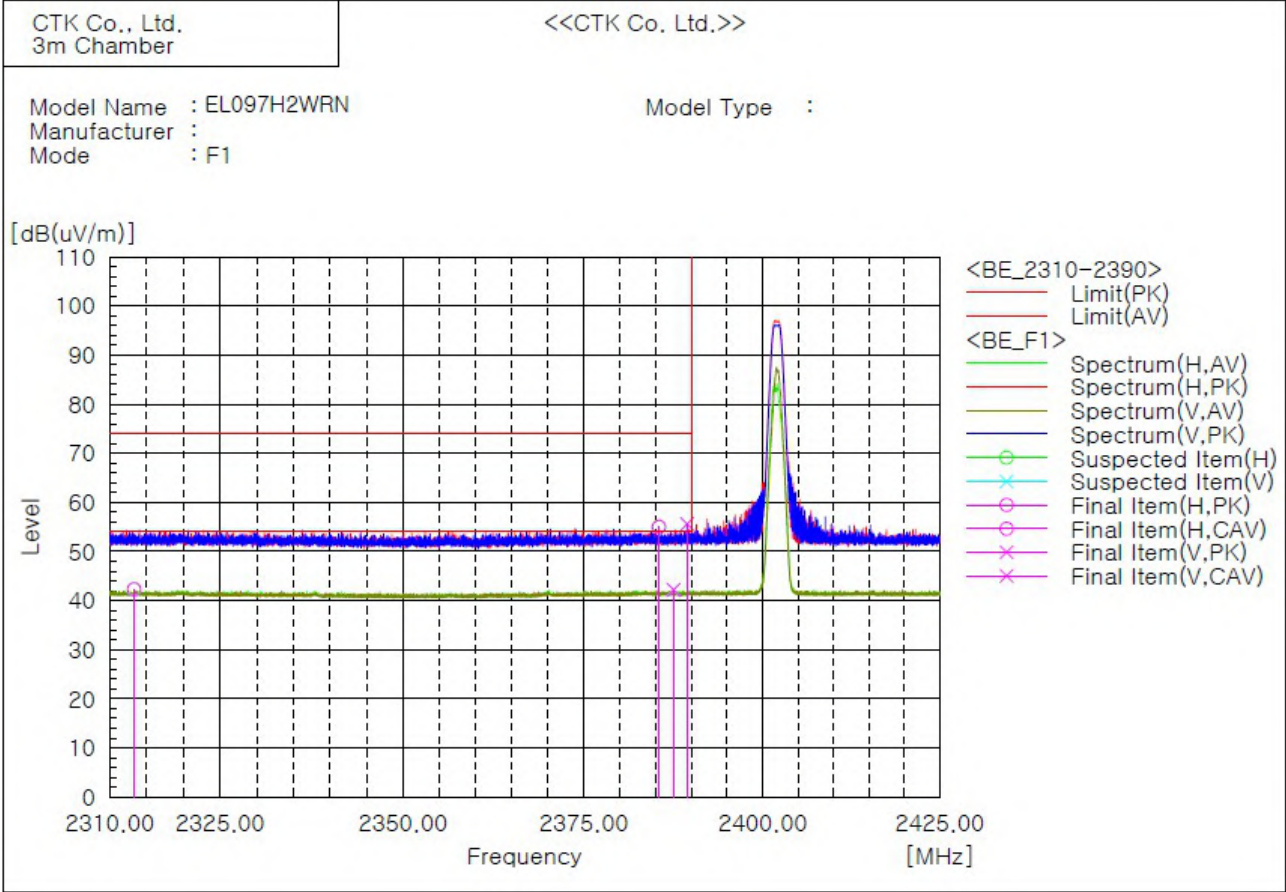

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	2365.512	H	48.8		6.2	55.0		74.0	54.0	19.0		99.8	355.6
2	2313.350	H		36.1	6.2		42.3	74.0	54.0		11.7	353.2	0.0
3	2389.436	V	49.4		6.2	55.6		74.0	54.0	18.4		99.8	164.4
4	2387.524	V		36.0	6.2		42.2	74.0	54.0		11.8	464.1	0.0




## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-03347-1  
Page (29) / (40) Pages

### 2. 2 483.5 MHz – 2 500 MHz

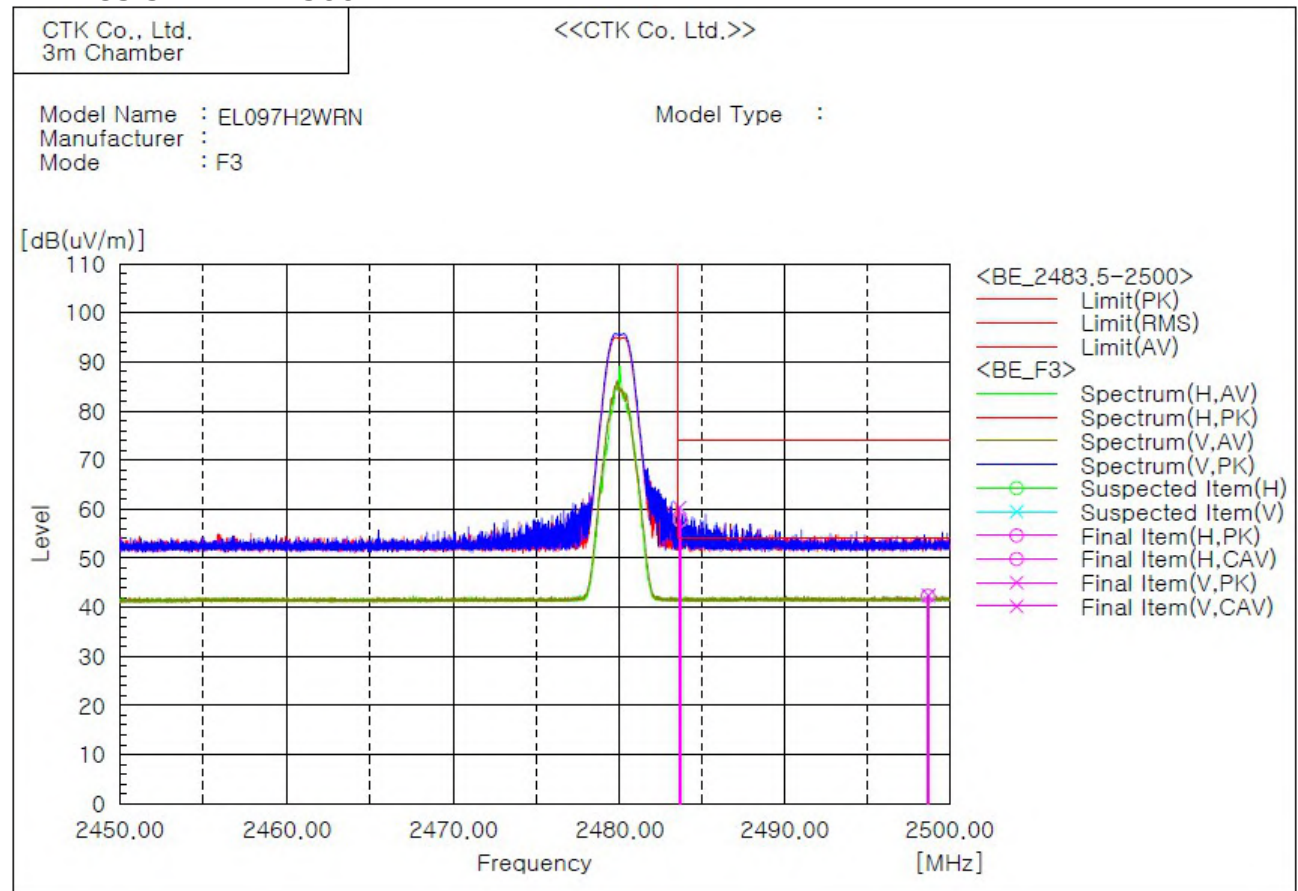

#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	2483.689	H	51.6	36.0	6.2	57.8	42.3	74.0	54.0	16.2	11.7	464.3	4.2
2	2498.688	H	54.1	36.1	6.3	60.3	42.4	74.0	54.0	13.7	11.6	99.8	0.0
3	2483.631	V	54.1	36.1	6.2	60.3	42.4	74.0	54.0	13.7	11.6	99.8	70.7
4	2498.712	V	54.1	36.1	6.3	60.3	42.4	74.0	54.0	13.7	11.6	99.8	0.1

#### Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain




## 2) Spurious

**1. 9 kHz to 30 MHz**

**Test mode : Transmit, High Channel(Worst case)**

The requirements are:

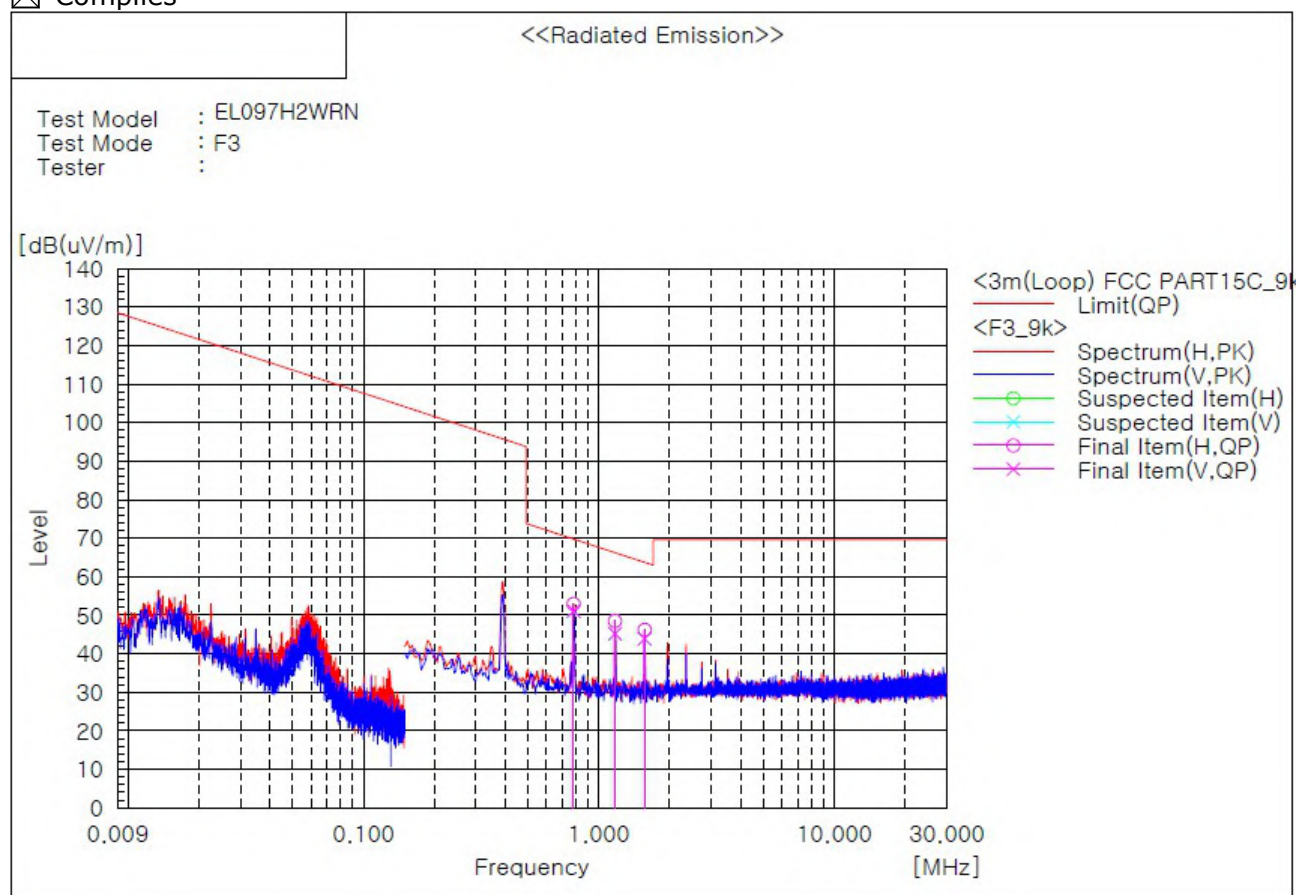☒ Complies

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	0.781	H	27.9	25.0	52.9	69.8	16.9	100.0	116.0
2	0.781	V	26.1	25.0	51.1	69.8	18.7	100.0	80.0
3	1.172	H	23.5	25.0	48.5	66.2	17.7	100.0	60.0
4	1.172	V	20.2	25.0	45.2	66.2	21.0	100.0	116.0
5	1.564	V	18.9	25.0	43.9	63.7	19.8	100.0	80.0
6	1.568	H	21.2	25.0	46.2	63.7	17.5	100.0	132.0

**Note :**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

\* Reading data is the peak value.


## 2. 30 MHz to 1 GHz

Test mode : Transmit, Low Channel(Worst case)

The requirements are:

☒ Complies

### Test Data

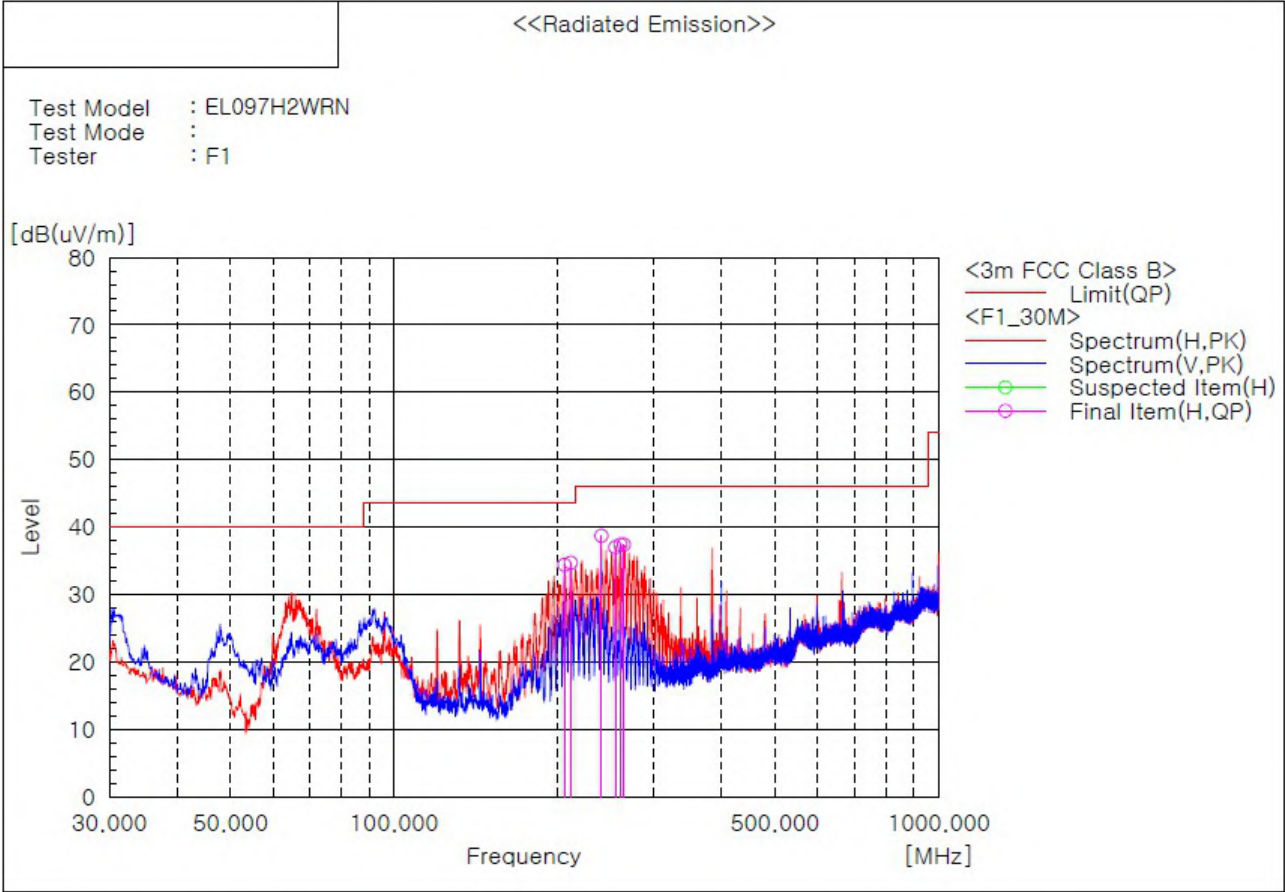


### 3. 1 GHz to 26.5 GHz

**Test mode : Transmit, Middle Channel(Worst case)**

The requirements are:

☒ Complies

#### Test Data

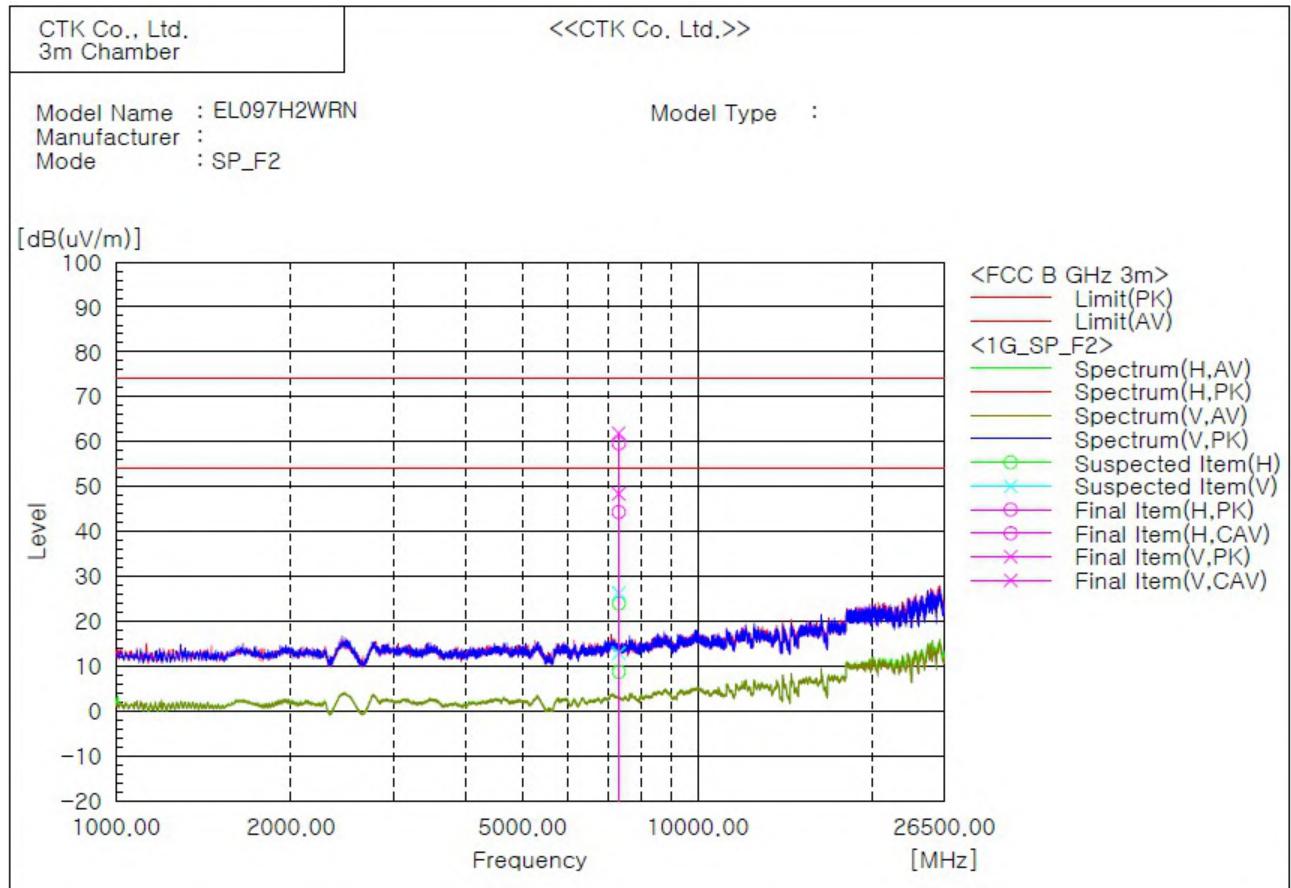

#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	7319.750	V	57.8	44.3	4.1	61.9	48.4	74.0	54.0	12.1	5.6	99.8	359.9
2	7319.750	V	57.8	44.3	4.1	61.9	48.4	74.0	54.0	12.1	5.6	224.0	183.3
3	7319.750	H	55.5	40.2	4.1	59.6	44.3	74.0	54.0	14.4	9.7	353.2	0.0
4	7321.875	H	55.5	40.2	4.1	59.6	44.3	74.0	54.0	14.4	9.7	99.8	186.0

#### Remarks


- The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
- Result = Reading + c.f(correction factor)
- Correction factor = Antenna factor + Cable loss - Amp Gain



**(Frequency band, Channel Spacing change and PCB antenna Change)**

**1) Restricted Frequency Bands**

**1. 2 310 MHz to 2 390 MHz**

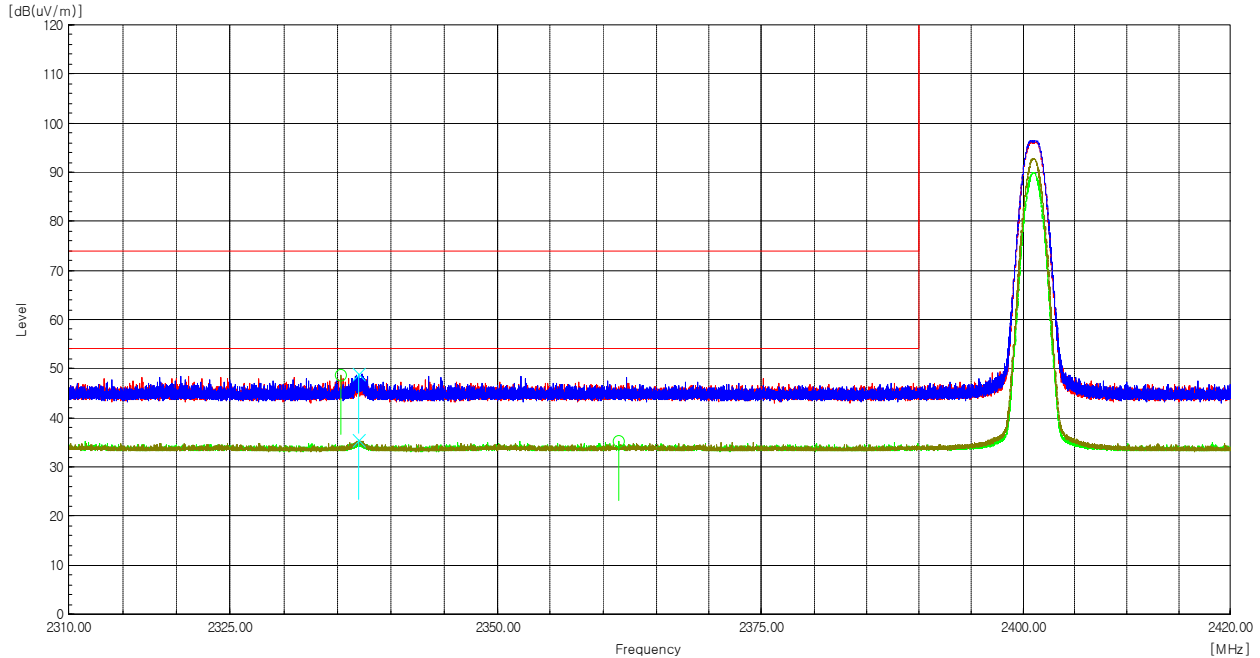


Frequency [MHz]	(P)	Reading [dBUV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2335.4	H	54.6	-5.9	48.7	-----	74.0	-----	25.3	-----	Peak
2337.0	V	41.4	-5.9	-----	35.5	-----	54.0	-----	18.5	Average
2337.0	V	54.8	-5.9	48.9	-----	74.0	-----	25.1	-----	Peak
2361.4	H	41.1	-5.8	-----	35.3	-----	54.0	-----	18.7	Average

**Remarks**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.

## 2. 2 483.5 MHz – 2 500 MHz

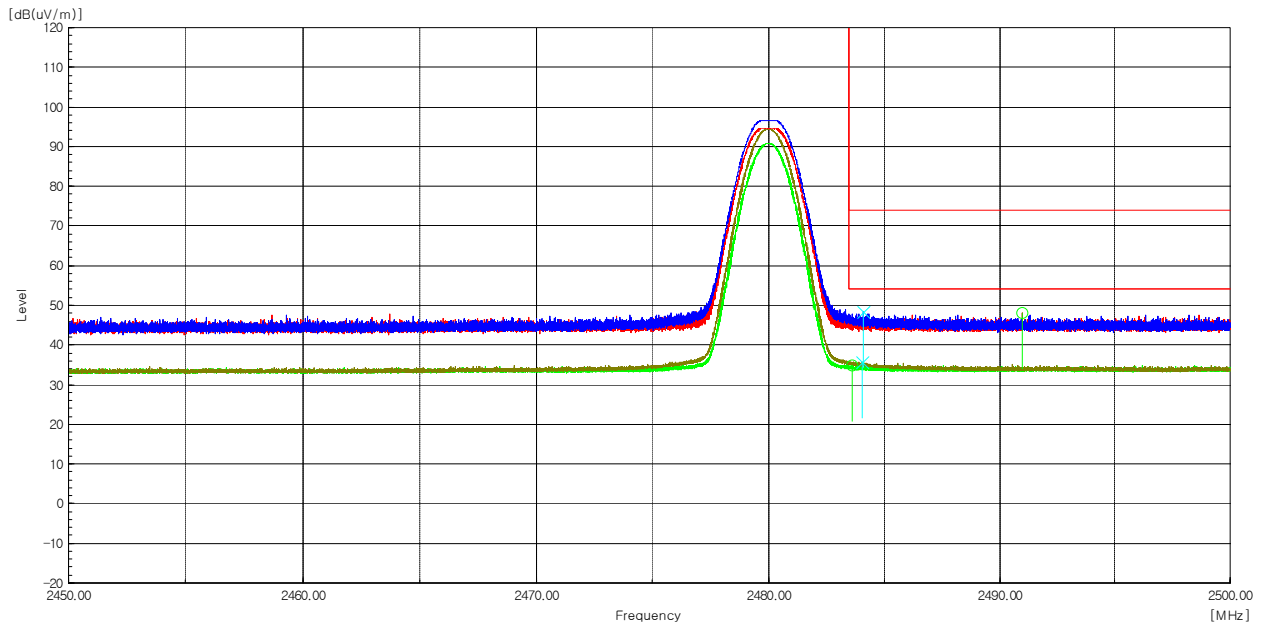

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2483.6	H	40.2	-5.3	-----	34.9	-----	54.0	-----	19.1	Average
2484.0	V	41.0	-5.3	-----	35.7	-----	54.0	-----	18.3	Average
2484.1	V	53.7	-5.3	48.4	-----	74.0	-----	25.6	-----	Peak
2491.0	H	53.3	-5.2	48.1	-----	74.0	-----	25.9	-----	Peak

### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.


## 2) Spurious

### 1. 9 kHz to 30 MHz

**Test mode : Transmit, High Channel(Worst case)**

The requirements are:

☒ Complies

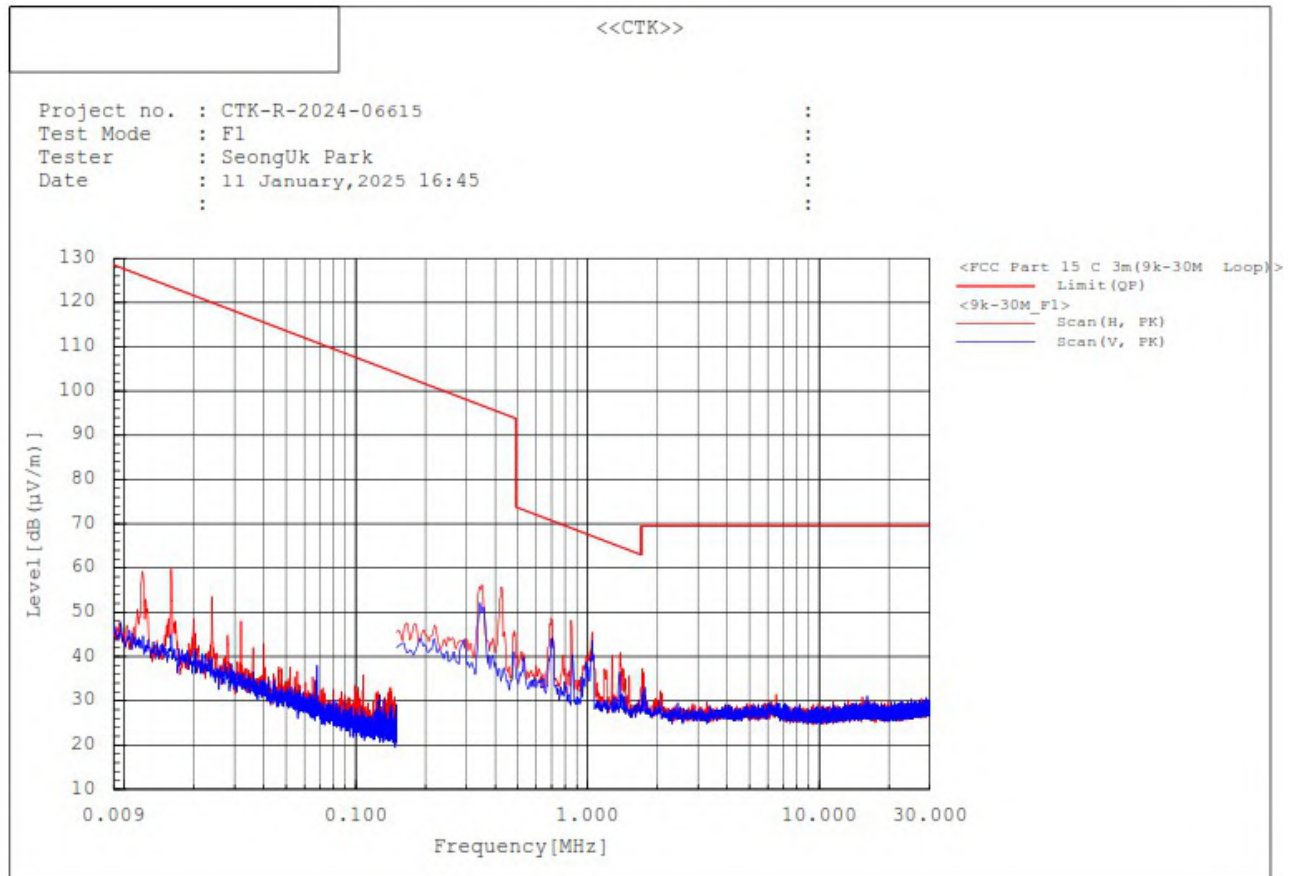

#### Note :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.
5. The emissions were 20 dB lower than the limit.

\* Reading data is the peak value.


## 2. 30 MHz to 1 GHz

**Test mode : Transmit, Low Channel(Worst case)**

The requirements are:

☒ Complies

## Test Data

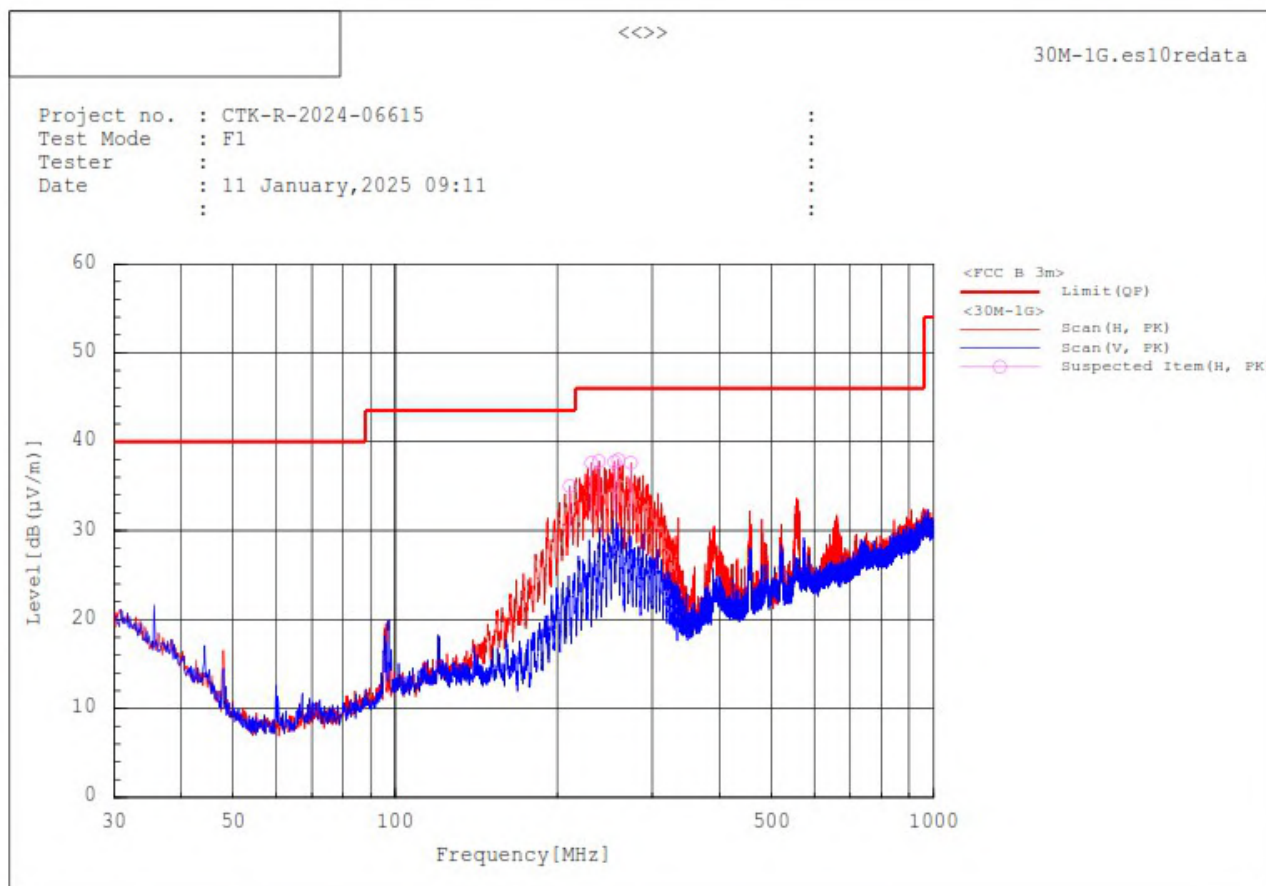

### Spectrum Selection

No.	Frequency	Pol	Reading PK	c.f	Result PK	Limit QP	Margin QP-PK	Height	Angle
	[MHz]		[dB (μV)]	[dB (1/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB]	[cm]	[deg]
1	211.002	H	50.1	-15.1	35.0	43.5	8.5	100.0	0.1
2	231.469	H	51.3	-13.7	37.6	46.0	8.4	100.0	0.1
3	238.841	H	50.6	-12.8	37.8	46.0	8.2	100.0	0.1
4	255.331	H	48.1	-10.4	37.7	46.0	8.3	100.0	59.8
5	259.696	H	47.8	-9.8	38.0	46.0	8.0	100.0	18.9
6	274.052	H	48.4	-10.8	37.6	46.0	8.4	100.0	36.9

**Remark :**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.

\* Reading data is the peak value.


### 3. 1 GHz to 18 GHz

**Test mode : Transmit, Middle Channel(Worst case)**

The requirements are:

☒ Complies

**Test Data**

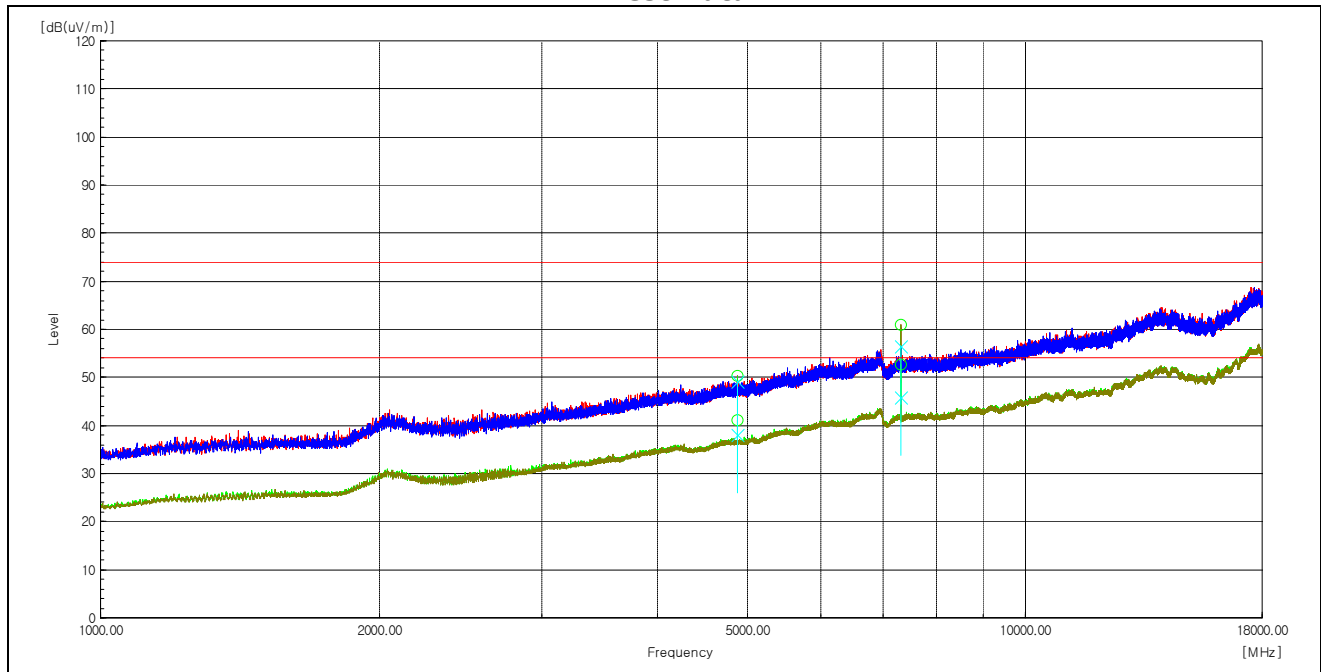

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4878.9	V	46.6	2.5	49.1	-----	74.0	-----	24.9	-----	Peak
4879.6	H	47.7	2.5	50.2	-----	74.0	-----	23.8	-----	Peak
4880.2	V	35.5	2.5	-----	38.0	-----	54.0	-----	16.0	Average
4880.2	H	38.6	2.5	-----	41.1	-----	54.0	-----	12.9	Average
7319.5	H	53.6	7.3	60.9	-----	74.0	-----	13.1	-----	Peak
7320.2	H	45.5	7.3	-----	52.8	-----	54.0	-----	1.2	Average
7320.2	V	38.5	7.3	-----	45.8	-----	54.0	-----	8.2	Average
7320.9	V	49.2	7.3	56.5	-----	74.0	-----	17.5	-----	Peak

#### Remarks


1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.

#### 4. 18 GHz to 26.5 GHz

**Test mode : Transmit, Middle Channel(Worst case)**

The requirements are:

☒ Complies

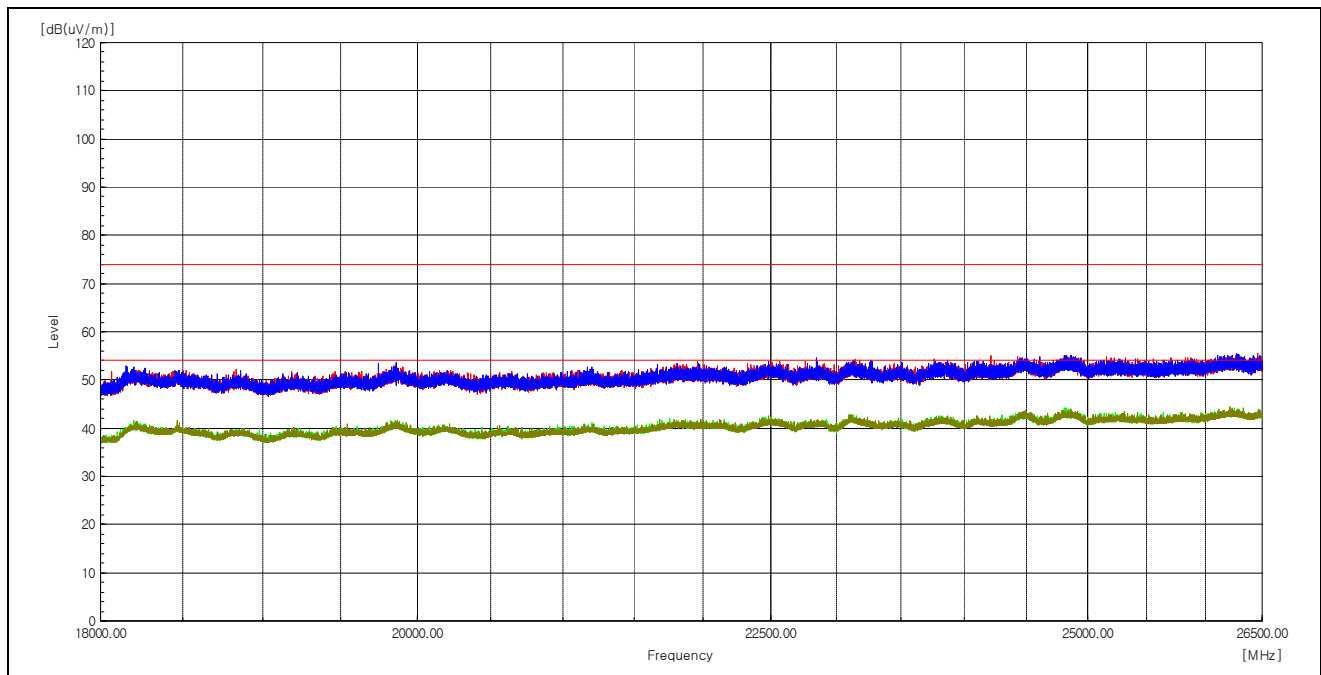

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------	------------------------	------------------------	------------------------	----------------------	----------------------	------

No Peak Data

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.

## APPENDIX A – Test Equipment Used For Tests (First issued)

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	SPECTRUM ANALYZER	R&S	FSV30	100925	2021-01-14	2022-01-14
2	SPECTRUM ANALYZER	R&S	FSV40	101574	2021-01-18	2022-01-18
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2020-10-20	2021-10-20
4	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2020-05-20	2022-05-20
5	Bilog Antenna	Schaffner	CBL6111C	2551	2021-03-22	2023-03-22
6	AMPLIFIER	SONOMA	310	291721	2021-01-22	2022-01-22
7	6dB Attenuator	R&S	DNF	272.4110.50-2	2020-10-23	2021-10-23
8	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2021-01-12	2022-01-12
9	Double Ridged Guide Antenna	ETS-Lindgren	3117	00154525	2019-10-14	2021-10-14
10	Double Ridged Guide Antenna	ETS-Lindgren	3116	00062916	2020-04-14	2022-04-14
11	Preamplifier	Agilent	8449B	3008A02011	2020-11-30	2021-11-30
12	Band Reject Filter	Micro Tronics	BRM50702	G233	2021-01-14	2022-01-14
13	Signal Generator	R&S	SMB100A	175528	2021-04-12	2022-04-12
14	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	711196	2021-01-14	2022-01-14
15	6dB Attenuator	BIRD	5W 6dB	1744	2020-12-16	2021-12-16

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (conducted)	Junkosha Inc.	MWX221	1510S087	2021-02-02
2	3m Loop Cable (Radiated)	HUBER+SUHNER	N/A	N/A	2020-10-25
3	3 m 1GHz Above RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2021-01-28
4	3 m 1GHz Below RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	N/A (below 1GHz)	2021-01-28
4	3 m 1GHz Above RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27573/4	2020-12-12
5	3 m 1GHz Above RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	801924/4	2020-12-12
6	3 m 1GHz Above RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2021-02-02
7	3 m 1GHz Above RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2374/2	2021-02-02

**(Frequency band, Channel Spacing change and PCB antenna Change)**

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50200512	2024-03-21	2025-03-21
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2024-03-21	2025-03-21
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2024-04-29	2025-04-29
4	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2024-04-15	2026-04-15
5	Bilog Antenna	TESEQ	CBL6111D	60654	2023-08-21	2025-08-21
6	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2024-07-31	2025-07-31
7	ATTENUATOR	PASTERNAK	PE7AP006-06	L2021050400002 3	2024-07-31	2025-07-31
8	ATTENUATOR	NONE	6dB	190557	2024-09-19	2025-09-19
9	Preamplifier	Agilent	8449B	3008A00620	2024-04-11	2025-04-11
10	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2024-04-16	2025-04-16
11	Horn Antenna	SCHWARZBECK	BBHA9170	01153	2024-10-18	2025-10-18
12	Low Noise Amplifier	TESTEK	TK-PA1840H	210124-L	2024-10-18	2025-10-18
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2024-11-25	2025-11-25
14	Spectrum Analyzer	Rohde & Schwarz	FSV40	101574	2025-01-10	2026-01-10
15	DC Power Supply	Agilent	E3642A	KR93300203	2024-11-25	2025-11-25

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable(conducted)	Junkosha Inc.	MWX221	2008S240	2025-01-09
2	RF Cable (9kHz-1GHz Radiated)	Canare Corporation	L-5D2W	N/A	2025-03-05
3	RF Cable (9kHz-1GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2025-03-05
4	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2025-02-21
5	RF Cable (1GHz-18GHz Radiated)	Rosenberger	NONE	1520.9927.00	2025-02-21
6	RF Cable (1GHz-18GHz Radiated)	Sensorview Co., LTD	9S18	TPC2204060007	2025-02-21
7	RF Cable (18GHz-26.5GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2372/2	2025-02-21
8	RF Cable (18GHz-26.5GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY073/2	2025-02-21
9	RF Cable (18GHz-26.5GHz Radiated)	Sensorview Co., LTD	9S40	TP210713-001	2025-02-21

-END-