

FCC TEST REPORT

FCC ID:2AZW8-1819561

Report No..... : ZHT-241218112W01-2
Product..... : 3000L Rechargeable Lantern
Trademark..... : Duracell
Model(s)..... : 1819561
Model difference..... : /
Applicant..... : NINGBO EVERNEW ELECTRIC TECHNOLOGY CO., LTD.
Address..... : Room 1402, Herong Building A, Ningbo, China
Manufacturer..... : Ningbo Great Pod Electrical Appliance Co., Ltd.
Address..... : Dongzhou, Wanghai, Xidian, Ninghai, Ningbo, China
Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.
Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Date of Receipt..... : Dec. 18, 2024
Date of Test(s)..... : Dec. 18, 2024 to Dec. 24, 2024
Date of Issue..... : Dec. 30, 2024
Test Standard(s)..... : FCC CFR 47 PART 1 , 1.1310
Test procedure : : KDB 680106 D01 Wireless Power Transfer v04

In the configuration tested, the EUT complied with the standards specified above.

Tested by:

Kimi Lu

Kimi Lu/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director

Approved by:

Levi Lee

Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.

RF Exposure Evaluation

Product Name:	3000L Rechargeable Lantern
Product Model No.:	1819561
Test Auxiliary:	Wireless charging load
Transmitting mode:	Keep the EUT in continuously wireless charging mode

Test Modes	
Mode 1	AC adapter charging mode + Wireless charging mode(5W)
Mode 2	Wireless charging(5W)
Note:1.The EUT supports portable use.	

Auxiliary equipment					
Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless charging load	N/A	EESON	N/A	AE
E-2	AC adapter	N/A	CHG-WALL-PD-45W	N/A	AE

1 Measuring Standard

KDB 680106 D01 Wireless Power Transfer v04

2 Requirements

According to the item 5 of KDB 680106 D01 v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

Requirements of section 3 of KDB 680106 D01	Yes/ No	Description
Mobile Device and Portable Device Configurations	Yes	Portable Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range110.1kHz-205kHz
RF Exposure compliance may be ensured only for a minimum conditions at smaller distances can still be considered unlikely.separation distance that is greater than 20 cm, while use	No	The EUT H-field and E-field strengths at 0 cm surrounding the device.

3 Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

4 Test Setup

For portable exposure conditions:

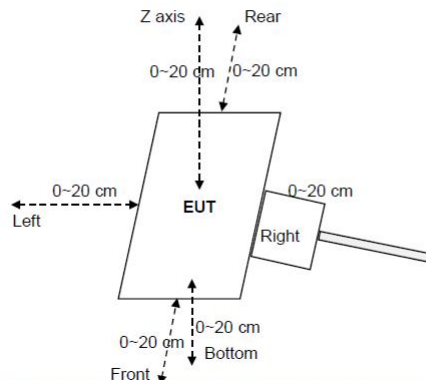

5 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (0-20 cm from all sides and 0-20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

Remark: The EUT' s test position A, B, C, D and E is valid for the E and H field measurements.

6 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Near-field Electric and Electric Field Sensor System	SPEAG	MAGPy- 8H3D+ED3 V2	3101	Mar. 12, 2024	Mar. 11, 2026
Test software: MAGPY.exe V2.6					

7 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	H-field	$\pm 0.7\text{dB}$
2	E-field	$\pm 1.06\text{dB}$

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included

8 Test Result

All modes were tested, only the worst-case was recorded in the report. Mode 2 is the worst mode.

E-Filed Strength from the edges surrounding the EUT (V/m)								
The measurement probe was placed at test distance which is between the edge of the charger and the geometric of probe(cm)	Frequency Range (MHz)	Test Position A (Left)	Test Position B (Right)	Test Position C (Rear)	Test Position D (Front)	Test Position E (Top)	Test Position F (Bottom)	Limits (V/m)
0	0.1101-0.205	1.90	1.89	1.90	1.93	1.92	1.83	614
2	0.1101-0.205	1.87	1.85	1.86	1.83	1.84	1.85	614
4	0.1101-0.205	1.83	1.82	1.81	1.81	1.82	1.80	614
6	0.1101-0.205	1.73	1.71	1.72	1.78	1.76	1.78	614
8	0.1101-0.205	1.70	1.67	1.70	1.76	1.73	1.75	614
10	0.1101-0.205	1.66	1.66	1.68	1.72	1.70	1.62	614
12	0.1101-0.205	1.63	1.63	1.63	1.70	1.68	1.55	614
14	0.1101-0.205	1.52	1.55	1.60	1.68	1.64	1.42	614
16	0.1101-0.205	1.49	1.53	1.51	1.62	1.61	1.40	614
18	0.1101-0.205	1.43	1.50	1.49	1.54	1.54	1.38	614
20	0.1101-0.205	1.39	1.43	1.47	1.43	1.46	1.35	614

H-Filed Strength from the edges surrounding the EUT (A/m)								
The measurement probe was placed at test distance which is between the edge of the charger and the geometric of probe(cm)	Frequency Range (MHz)	Test Position A (Left) A/m	Test Position B (Right) A/m	Test Position C (Rear) A/m	Test Position D (Front) A/m	Test Position E (Top) A/m	Test Position F (Bottom) A/m	Limits (A/m)
0	0.1101-0.205	1.50	1.53	1.52	1.53	1.52	1.54	1.63
2	0.1101-0.205	1.48	1.50	1.46	1.48	1.50	1.49	1.63
4	0.1101-0.205	1.43	1.48	1.38	1.48	1.46	1.48	1.63
6	0.1101-0.205	1.40	1.45	1.36	1.46	1.45	1.46	1.63
8	0.1101-0.205	1.36	1.44	1.32	1.45	1.41	1.44	1.63
10	0.1101-0.205	1.33	1.39	1.30	1.43	1.39	1.40	1.63
12	0.1101-0.205	1.31	1.35	1.44	1.41	1.36	1.44	1.63
14	0.1101-0.205	1.27	1.33	1.41	1.39	1.34	1.41	1.63
16	0.1101-0.205	1.22	1.31	1.38	1.37	1.32	1.38	1.63
18	0.1101-0.205	1.19	1.27	1.34	1.36	1.29	1.31	1.63
20	0.1101-0.205	1.17	1.24	1.32	1.34	1.24	1.22	1.63

9 Test Set-up Photo

