



# **SAR Evaluation Report**

in accordance with the requirements of  
FCC Report and Order: ET Docket 93-62, and OET Bulletin 65 Supplement C

for

**Notebook PC**

**Model: TravelMate C300**

**FCC ID: PU5MS2140AB**

*Prepared for*

**Wistron Corporation  
21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,  
Taipei Hsien 221, Taiwan, R. O. C.**

*Prepared by*

**Compliance Certification Services Inc.  
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,  
Taoyuan Hsien, (338) Taiwan, R.O.C.  
TEL: 886-3-324-0332  
FAX: 886-3-324-5235**

---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



## **CERTIFICATE OF COMPLIANCE (SAR EVALUATION)**

**Dates of Tests:** December 29-30, 2003

<b>Applicant:</b>	Wistron Corporation 21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R. O. C.
<b>Model Number:</b>	TravelMate C300
<b>FCC ID:</b>	PU5MS2140AB
<b>Device Category:</b>	PORTABLE DEVICES
<b>Exposure Category:</b>	GENERAL POPULATION/UNCONTROLLED EXPOSURE

**Test Sample is a:** Production unit  
**Modulation type:** 802.11a  
Orthogonal Frequency Division Multiplexing (OFDM)  
**Tx Frequency:** 5180 MHz to 5320 MHz (UNII-1 & UNII-2)  
**Max. O/P Power:** UNII-1 & 2: 16.57 dBm  
(Conducted/Peak)  
**Max. SAR (1g):** UNII-1 & 2: 1.41 W/kg  
**Application Type:** Certification  
**FCC Rule Part(s):** 15E



**Note:** This Report is only applicable for 802.11a

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C (released on 6/29/2001 see Test Report).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Approved by:**

**Jonson Lee / Director**  
Compliance Certification Services Inc.

**Reviewed by:**

**James Lee / Senior engineer**  
Compliance Certification Services Inc.



## **TABLE OF CONTENTS**

<b>1. EUT DESCRIPTION .....</b>	<b>4</b>
<b>2. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC .....</b>	<b>5</b>
<b>3. DOSIMETRIC ASSESSMENT SYSTEM .....</b>	<b>5</b>
3.1. MEASUREMENT SYSTEM DIAGRAM.....	6
3.2. SYSTEM COMPONENTS .....	7
DASY4 Measurement Server.....	7
Data Acquisition Electronics (DAE).....	7
SAM Phantom (V4.0) .....	8
Device Holder for SAM Twin Phantom .....	8
System Validation Kits .....	8
<b>4. EVALUATION PROCEDURES .....</b>	<b>9</b>
<b>5. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
<b>6. EXPOSURE LIMIT .....</b>	<b>13</b>
<b>7. MEASUREMENT RESULTS.....</b>	<b>14</b>
7.1. SYSTEM PERFORMANCE CHECK .....	14
7.2. TEST LIQUID CONFIRMATION .....	15
7.3. EUT TUNE-UP PROCEDURES .....	16
7.4. SAR MEASUREMENTS RESULTS .....	17
<b>8. EUT PHOTOS</b>	<b>22</b>
<b>9. EQUIPMENT LIST &amp; CALIBRATION STATUS.....</b>	<b>24</b>
<b>10. REFERENCES</b>	<b>26</b>
<b>11. ATTACHMENTS.....</b>	<b>27</b>



## 1. EUT DESCRIPTION

<b>Applicant:</b>	Wistron Corporation 21F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan, R. O. C.
<b>Model Number:</b>	TravelMate C300
<b>FCC ID:</b>	PU5MS2140AB
<b>Device Category:</b>	PORTABLE DEVICES
<b>Exposure Category:</b>	GENERAL POPULATION/UNCONTROLLED EXPOSURE

<b>Test Sample is a:</b>	Production unit
<b>Modulation type:</b>	802.11a Orthogonal Frequency Division Multiplexing (OFDM)
<b>Tx Frequency:</b>	5180 MHz to 5320 MHz (UNII-1 & UNII-2)
<b>Max. O/P Power:</b> (Conducted/Peak)	UNII-1 & 2: 16.57 dBm
<b>Max. SAR (1g):</b>	UNII-1 & 2: 1.41 W/kg
<b>Application Type:</b>	Certification
<b>FCC Rule Part(s):</b>	15E



<b>Antennas:</b>	Main/Aux: PIFA
------------------	-------------------



## **2. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC**

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992 [6]. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

## **3. DOSIMETRIC ASSESSMENT SYSTEM**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than  $\pm 0.02$  mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe ES3DV2-SN: 3021 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated with the procedure and found to be better than  $\pm 0.25$  dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and EN50361.



### 3.2. SYSTEM COMPONENTS

#### DASY4 Measurement Server



The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and

handles safety operation. The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

#### Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



#### ES3DV2 Isotropic E-Field Probe for Dosimetric Measurements

<b>Construction:</b>	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
<b>Calibration:</b>	Basic Broad Band Calibration in air: 10-2500 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request.
<b>Frequency:</b>	10 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity:</b>	$\pm 0.2$ dB in HSL (rotation around probe axis); $\pm 0.3$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range:</b>	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions:</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm
<b>Application:</b>	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones



Interior of probe



Isotropic E-Field Probe

### SAM Phantom (V4.0)

**Construction:** The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ±0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm



### Device Holder for SAM Twin Phantom

**Construction:** In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



### System Validation Kits

**Construction:** Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 450, 900, 1800, 2450, 5800 MHz

**Return loss:** > 20 dB at specified validation position

**Power capability:** > 100 W (f < 1GHz); > 40 W (f > 1GHz)

**Dimensions:**  
 450V2: dipole length: 270 mm; overall height: 330 mm  
 D900V2: dipole length: 149 mm; overall height: 330 mm  
 D1800V2: dipole length: 72 mm; overall height: 300 mm  
 D2450V2: dipole length: 51.5 mm; overall height: 300 mm  
 D5GHzV2: dipole length: 25.5 mm; overall height: 290 mm







#### 4. EVALUATION PROCEDURES

##### DATA EVALUATION

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	$dcp_i$
Device parameters:	- Frequency	$f$
	- Crest factor	$cf$
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	$V_i$	= Compensated signal of channel i	(i = x, y, z)
	$U_i$	= Input signal of channel i	(i = x, y, z)
	$cf$	= Crest factor of exciting field	(DASY parameter)
	$dcp_i$	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	$V_i$	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)
		$\mu V/(V/m)^2$ for E0field Probes	
	$ConvF$	= Sensitivity enhancement in solution	
	$a_{ij}$	= Sensor sensitivity factors for H-field probes	
	$f$	= Carrier frequency (GHz)	
	$E_i$	= Electric field strength of channel i in V/m	
	$H_i$	= Magnetic field strength of channel i in A/m	



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

- with  $SAR$  = local specific absorption rate in mW/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

- with  $P_{pwe}$  = Equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m  
 $H_{tot}$  = total magnetic field strength in A/m



## **SAR MEASUREMENT PROCEDURES**

The procedure for assessing the peak spatial-average SAR value consists of the following steps:

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to **10 mm by 10 mm** and can be edited by a user.

- **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures **7 x 7 x 8** points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

- **Power Drift measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4 software stop the measurements if this limit is exceeded.

- **Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.



## 5. MEASUREMENT UNCERTAINTY

UNCERTAINTY BUDGE ACCORDING TO IEEE P1528								
Error Description	Uncertainty Value [%]	Prob. Dist.	Div.	( $c_i$ ) 1g	( $c_i$ ) 10g	Std. Unc.(1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±8.3	N	1	1	1	±4.8%	±4.8%	∞
Axial Isotropy	±4.7	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±2.0	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Linearity	±4.7	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±1.0	N	$\sqrt{3}$	1	1	±1.0%	±1.0%	∞
Response Time	±0.8	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Condition	±1.59	R	$\sqrt{3}$	1	1	±0.9%	±0.9%	∞
Probe Positioner	±0.8	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±5	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Max. SAR Eval.	±1.0	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Extrap/Interp algorithm error	20	R	$\sqrt{3}$	1	1	11.6	11.6	∞
<b>Test sample Related</b>								
Device Positioning	±1.1	N	1	1	1	±1.1%	±1.1%	145
Device Holder	±3.6	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±4.0	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±15.4%	±15.3%	330
<b>Expanded STD Uncertainty</b>						<b>±30.8%</b>	<b>±30.6%</b>	

Table: Worst-case uncertainty for DASY4 assessed according to IEEE P1528.

The budge is valid for the frequency range 300 MHz to 6G Hz and represents a worst-case analysis.



## 6. EXPOSURE LIMIT

### (A).Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

### (B).Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

#### **Population/Uncontrolled Environments:**

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

#### **Occupational/Controlled Environments:**

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**NOTE**  
**GENERAL POPULATION/UNCONTROLLED EXPOSURE**  
**PARTIAL BODY LIMIT**  
**1.6 W/kg**



## 7. MEASUREMENT RESULTS

### 7.1. SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

#### SYSTEM PERFORMANCE CHECK MEASUREMENT CONDITIONS

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe ES3DV2-SN: 3023 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x8 fine cube was chosen for cube integration ( $dx=dy=4.3$  mm,  $dz=3$  mm).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was 250 mW $\pm$ 3%.
- The results are normalized to 1 W input power.

#### REFERENCE SAR VALUES

The reference SAR values were using measurement results indicated in the dipole calibration document (see table below)

f (MHz)	Head Tissue		Body Tissue	
	SAR <sub>1g</sub>	SAR <sub>10g</sub>	SAR <sub>1g</sub>	SAR <sub>10g</sub>
5200	86.0	23.8	84.0	23.4
5800	88.8	24.4	80.0	22.4

#### SYSTEM PERFORMANCE CHECK RESULTS

**Dipole:** D5GHzV2 SN 1004

**Date:** December 29, 2003

**Ambient condition:** Temperature 24.4°C; Relative humidity 59%

Body Simulating Liquid			Parameters	Target	Measured	Deviation[%]	Limited[%]
f (MHz)	Temp. [°C]	Depth [cm]					
5200	23.40	15.00	Permittivity:	49	48.38	-1.27	$\pm 10$
			Conductivity:	5.3	5.36	1.13	$\pm 5$
			1g SAR:	84	88	4.76	$\pm --$

**Dipole:** D5GHzV2 SN 1004

**Date:** December 30, 2003

**Ambient condition:** Temperature 24.5°C; Relative humidity 60%

Body Simulating Liquid			Parameters	Target	Measured	Deviation[%]	Limited[%]
f (MHz)	Temp. [°C]	Depth [cm]					
5200	23.50	15.00	Permittivity:	49	48.85	-0.31	$\pm 10$
			Conductivity:	5.3	5.42	2.26	$\pm 5$
			1g SAR:	84	88.2	5.00	$\pm --$

## 7.2. TEST LIQUID CONFIRMATION

### SIMULATING LIQUIDS PARAMETER CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within  $\pm 5\%$  of the values given in the table below. 5% may not be easily achieved at certain frequencies. Under such circumstances, 10% tolerance may be used until more precise tissue recipes are available circumstances, 10% tolerance may be used until more precise tissue recipes are available

### TISSUE SIMULATING LIQUIDS

In the current guidelines and draft standards for compliance testing of mobile phones (i.e., IEEE P1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given only at 3.0 GHz and 5.8 GHz. As an intermediate solution, dielectric parameters for the frequencies between 5 to 5.8 GHz were obtained using linear interpolation (see table below).

SPEAG has developed suitable head and body tissue simulating liquids consisting of the following ingredients: de-ionized water, salt and a special composition including mineral oil and an emulgators. Dielectric parameters of these liquids were measured using a HP 8570D Dielectric Probe Kit in conjunction with HP E8358A Network Analyzer (30 kHz – 9G Hz). The differences with respect to the interpolated values were well within desired  $\pm 5\%$  for the whole 5 to 5.8 GHz range.

f (GHz)	Head Tissue		Body Tissue		Reference
	rel. permittivity	conductivity	rel. permittivity	conductivity	
3.0	38.5	2.40	52.0	2.73	Standard
5.8	35.3	5.27	48.2	6.00	Standard
5.0	36.2	1.45	49.3	5.07	Interpolated
5.1	36.1	4.55	49.1	5.18	Interpolated
5.2	36.0	4.66	49.0	5.30	Interpolated
5.3	35.9	4.76	48.9	5.42	Interpolated
5.4	35.8	4.86	48.7	5.53	Interpolated
5.5	35.6	4.96	48.6	5.65	Interpolated
5.6	35.5	5.07	48.5	5.77	Interpolated
5.7	35.4	5.17	48.3	5.88	Interpolated

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

### SIMULATING LIQUIDS PARAMETER CHECK RESULTS

**Ambient condition:** Temperature: 24.4°C; Relative humidity: 59%

**Date:** December 29, 2003

Body Simulating Liquid			Parameters	Target	Measured	Deviation[%]	Limited[%]
f (MHz)	Temp. [°C]	Depth (cm)					
5200	23.4	15	Permittivity:	49	48.38	-1.27	$\pm 10$
			Conductivity:	5.3	5.36	1.13	$\pm 5$

**Ambient condition:** Temperature: 24.5°C; Relative humidity: 60%

**Date:** December 30, 2003

Body Simulating Liquid			Parameters	Target	Measured	Deviation[%]	Limited[%]
f (MHz)	Temp. [°C]	Depth (cm)					
5200	23.5	15	Permittivity:	49	48.85	-0.31	$\pm 10$
			Conductivity:	5.3	5.42	2.26	$\pm 5$

**7.3. EUT TUNE-UP PROCEDURES**

The following procedures had been used to prepare the EUT for the SAR test.

- The client supplied a special driving program (CRTU Version 1.2.0.3000) to program the EUT to continually transmit the specified maximum power. And also to change the channel frequency.
- The conducted power was measured at the high, middle and low channel frequency before and after the SAR measurement.
- Co-Location is not requirement, because the host device doesn't have two mini-pci sockets or mount on it.

**Conducted Power Measurements**

802.11a Normal mode

Channel	f (MHz)	Peak <sub>[dBm]</sub>
1	5180	16.45
4	5240	16.35
5	5260	<b>16.57</b>
8	5320	16.50



## 7.4. SAR MEASUREMENTS RESULTS

### EUT Setup Configuration 1



802.11a (OFDM): Duty Cycle = 100%, Crest Factor: 1. Depth of liquid: 15.0 cm

Sep. [mm]	Antenna	Channel	Frequency [MHz]	*Conducted Power_dBm		Liquid Temp [°C]	SAR (W/kg)	Limit (W/kg)
				Before	After			
0	Main	1	5180	16.43	16.41	23.5	0.00459	1.6
0	Main	4	5240	16.33	16.31	23.5	0.00407	1.6
0	Main	5	5260	16.56	16.54	23.5	0.00405	1.6
0	Main	8	5320	16.49	16.47	23.5	0.00311	1.6

#### Notes:

1. \*: Peak power.
2. Bottom face in parallel with flat phantom.
3. The SAR measured at the middle channel for this configuration is at least 3 dB lower than SAR limit, testing at the high and low channels is option.
4. See attachment for the result presentation in plot format.

**EUT Setup Configuration 2**



802.11a (OFDM): Duty Cycle = 100%, Crest Factor: 1. Depth of liquid: 15.0 cm

Sep. [mm]	Antenna	Channel	Frequency [MHz]	*Conducted Power_dBm		Liquid Temp [°C]	SAR (W/kg)	Limit (W/kg)
				Before	After			
0	Aux	1	5180	16.42	16.41	23.4	0.00396	1.6
0	Aux	4	5240	16.32	16.31	23.4	Lower than Noise	1.6
0	Aux	5	5260	16.54	16.52	23.4		1.6
0	Aux	8	5320	16.47	16.45	23.4		1.6

**Notes:**

1. \*: Peak power.
2. Bottom face in parallel with flat phantom.
3. The SAR measured at the middle channel for this configuration is at least 3 dB lower than SAR limit, testing at the high and low channels is option.
4. See attachment for the result presentation in plot format.

### EUT Setup Configuration 3

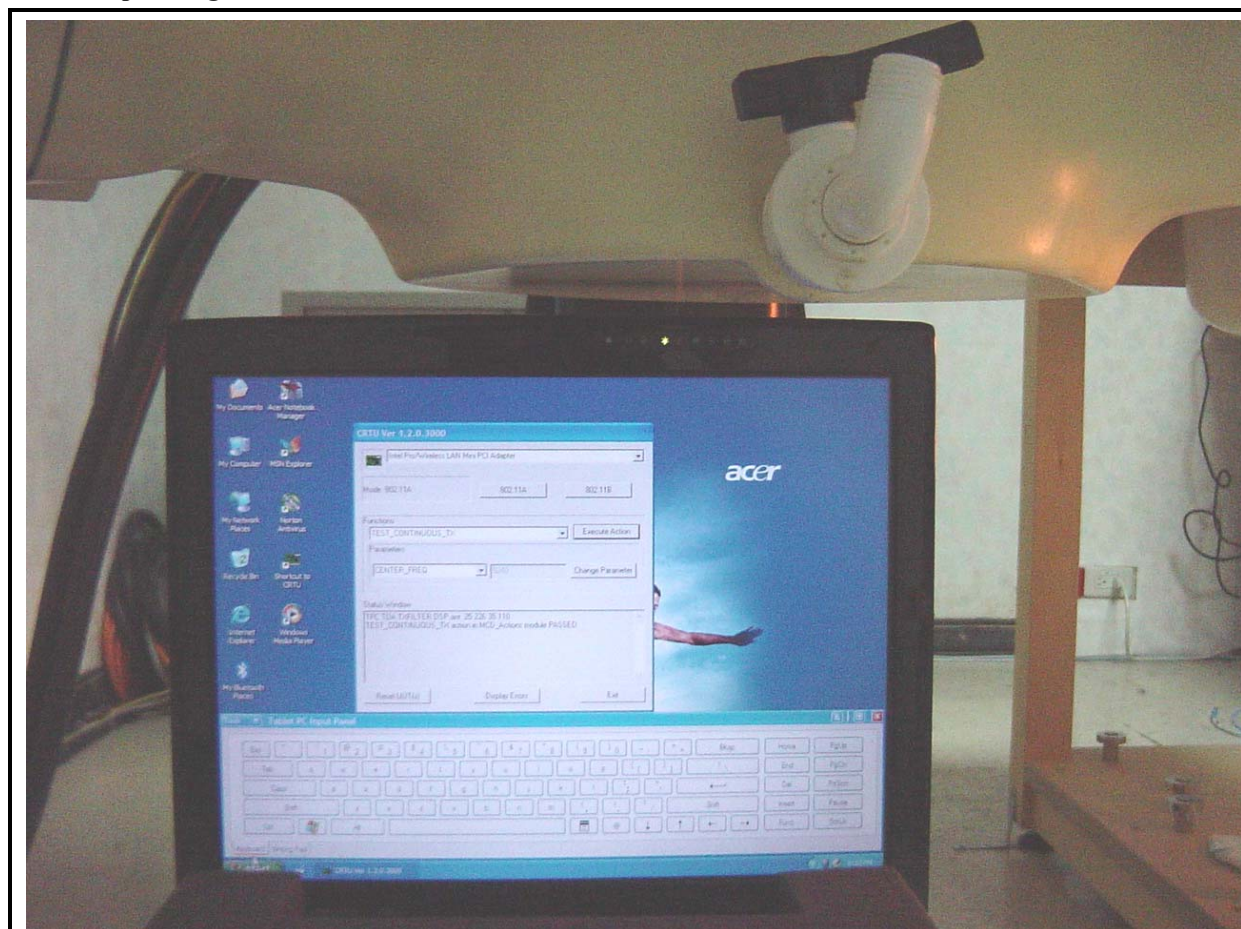

802.11a (OFDM): Duty Cycle = 100%, Crest Factor: 1. Depth of liquid: 15.0 cm


Sep. [mm]	Antenna	Channel	Frequency [MHz]	*Conducted Power_dBm		Liquid Temp [°C]	SAR (W/kg)	Limit (W/kg)
				Before	After			
15	Main	1	5180	16.42	16.40	23.5	0.00896	1.6
15	Main	4	5240	16.32	16.30	23.5	Lower than Noise	1.6
15	Main	5	5260	16.54	16.52	23.5		1.6
15	Main	8	5320	16.47	16.45	23.5	0.00659	1.6

**Notes:**

1. \*: Peak power.
2. Host device perpendicular to flat phantom.
3. The SAR measured at the middle channel for this configuration is at least 3 dB lower than SAR limit, testing at the high and low channels is option.
4. See attachment for the result presentation in plot format.



#### EUT Setup Configuration 4

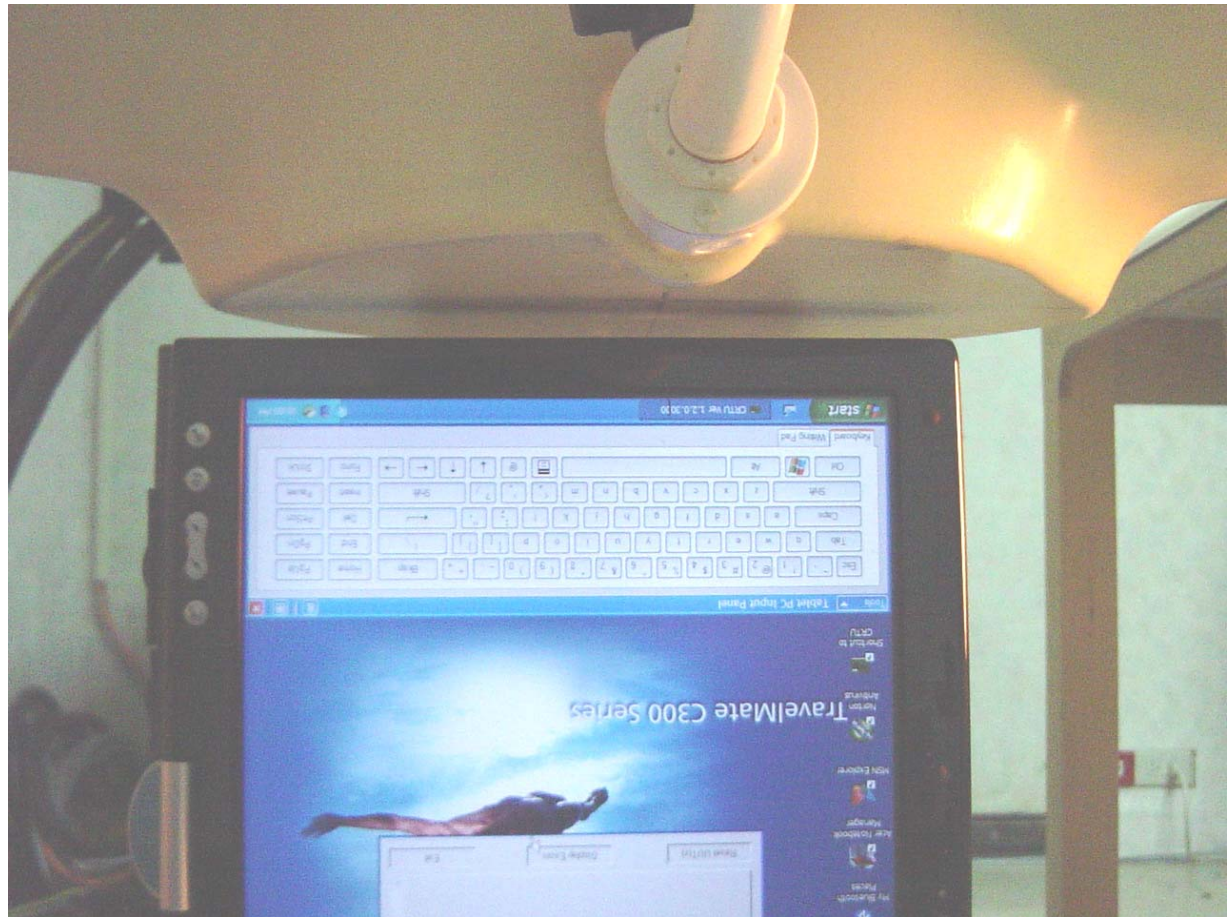


802.11a (OFDM): Duty Cycle = 100%, Crest Factor: 1. Depth of liquid: 15.0 cm

Sep. [mm]	Antenna	Channel	Frequency [MHz]	*Conducted Power_dBm		Liquid Temp [°C]	SAR (W/kg)	Limit (W/kg)
				Before	After			
15	Aux	1	5180	16.43	16.41	23.5	0.167	1.6
15	Aux	4	5240	16.33	16.31	23.5	0.115	1.6
15	Aux	5	5260	16.55	16.52	23.5	0.099	1.6
15	Aux	8	5320	16.48	16.46	23.5	0.125	1.6

#### Notes:

1. \*: Peak power.
2. Host device perpendicular to flat phantom.
3. The SAR measured at the middle channel for this configuration is at least 3 dB lower than SAR limit, testing at the high and low channels is option.
4. See attachment for the result presentation in plot format.

## EUT Setup Configuration 5

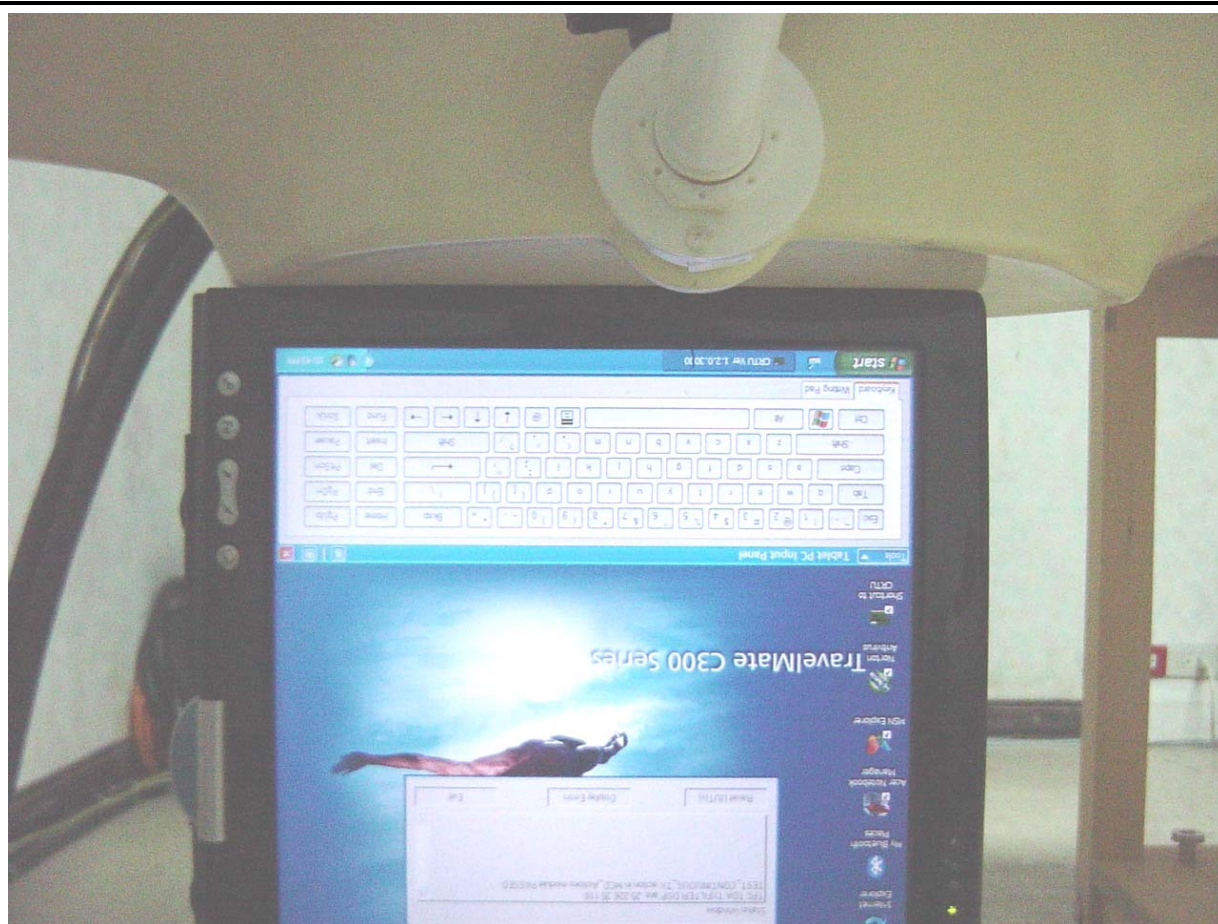

802.11a (OFDM): Duty Cycle = 100%, Crest Factor: 1. Depth of liquid: 15.0 cm




Sep. [mm]	Antenna	Channel	Frequency [MHz]	*Conducted Power_dBm		Liquid Temp [°C]	SAR (W/kg)	Limit (W/kg)
				Before	After			
0	Aux	1	5180	16.45	16.42	23.5	1.15	1.6
0	Aux	4	5240	16.35	16.32	23.5	1.37	1.6
0	Aux	5	5260	<b>16.57</b>	16.55	23.5	<b>1.41</b>	1.6
0	Aux	8	5320	16.50	16.48	23.5	1.29	1.6

### Notes:

1. \*: Peak power.
2. Host device perpendicular to flat phantom.
3. The SAR measured at the middle channel for this configuration is at least 3 dB lower than SAR limit, testing at the high and low channels is option.
4. See attachment for the result presentation in plot format.

**8. EUT PHOTOS**



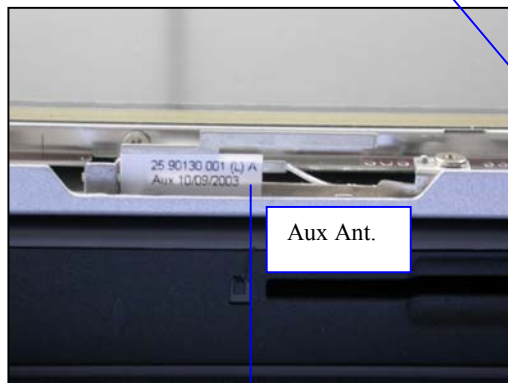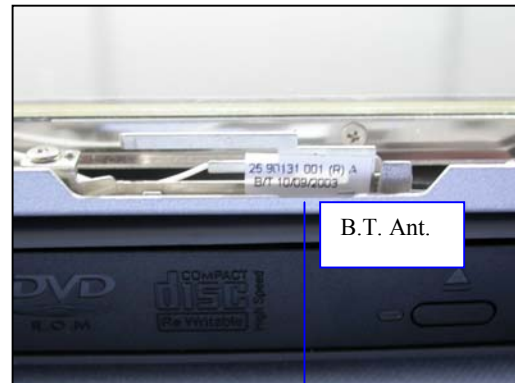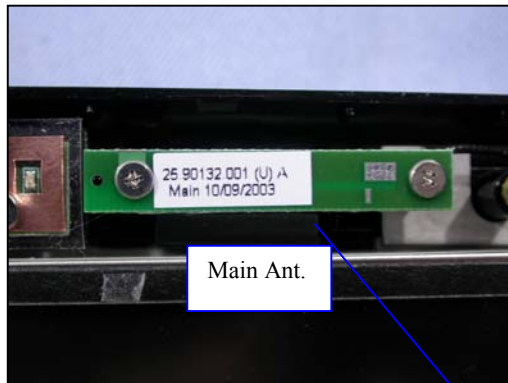

**9. EQUIPMENT LIST & CALIBRATION STATUS**

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Due
S-Parameter Network Analyzer	Agilent	E8358A	US40280243	03/24/04
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A
Power Meter	Boonton	4531	13061	07/03/04
Power Sensor	Boonton	56218	2240	07/03/04
Power Meter	Agilent	E4416A	GB41291611	03/15/04
Power Sensor	Agilent	E9327A	US40441097	03/15/04
Thermometer	Amarell	4046	23641	12/12/12
Thermometer	Amarell	4046	24775	12/11/13
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	1100.0008.02	N/A
Signal Generator	Agilent	83630B	3844A01022	01/15/04
Amplifier	Mini-Circuit	ZVE-8G	N/A	N/A
DC Power generator	ABM	8301HD		N/A
Data Acquisition Electronics (DAE)	SPEAG	DAE3	558	03/07/04
Dosimetric E-Field Probe	SPEAG	ES3DV2	3023	09/23/04
900 MHz System Validation Dipole	SPEAG	D900V2	179	03/31/04
1800 MHz System Validation Dipole	SPEAG	D1800V2	2d026	04/01/04
2450 MHz System Validation Dipole	SPEAG	D2450V2	728	03/05/04
5GHz System Validation Dipole	SPEAG	D5GHz V2	1004	10/05/04
Probe Alignment Unit	SPEAG	LB (V2)	348	N/A
Robot	Staubli	RX90B L	F02/5T69A1/A/01	N/A
SAM Twin Phantom V4.0	SPEAG	N/A	N/A	N/A
Devices Holder	SPEAG	N/A	N/A	N/A
Head 835 MHz	CCS	H835A	N/A	N/A
Muscle 835 MHz	CCS	M835A	N/A	N/A
Head 900 MHz	CCS	H900A	N/A	N/A
Muscle 900 MHz	CCS	M900A	N/A	N/A
Head 1800 MHz	CCS	H1800A	N/A	N/A
Muscle 1800 MHz	CCS	M1800A	N/A	N/A
Head 1900 MHz	CCS	H1900A	N/A	N/A
Muscle 1900 MHz	CCS	M1900A	N/A	N/A
Head 2450 MHz	CCS	H2450A	N/A	N/A
Muscle 2450 MHz	CCS	M2450A	N/A	N/A
Head 5800 MHz	SPEAG	H5800A	N/A	N/A
Muscle 5800 MHz	SPEAG	M5800A	N/A	N/A



**10. REFERENCES**

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEEE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard Kuhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10

**11. ATTACHMENTS**

<b>Exhibit</b>	<b>Content</b>
1	Data Acquisition Electronics (DAE)-DAE3, S/N: 558
2	Dosimetric E-Field Probe - ES3DV6, S/N:3023
3	Validation Dipole - D5GHzV2, S/N: 1004
4	System Performance Check Plots
5	SAR Test Plots

**End of Report**

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland

**Client**

## CALIBRATION CERTIFICATE

Object(s) **DAE3 - SN:558**

Calibration procedure(s) **QA CAL-06 v2  
Calibration procedure for the data acquisition unit (DAE)**

Calibration date: **March 07, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 International standard.

All calibrations have been conducted in the closed laboratory facility; environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
Fluke Process Calibrator Type 702	SN: 6295803	3-Sep-01	Sep-03

	Name	Function	Signature
Calibrated by:	Eric Hainfeld	Technician	
Approved by:	Fin Bornhoff	R&D Director	

Date issued: March 07, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

## 1. DC Voltage Measurement

DA - Converter Values from DAE

High Range: 1LSB =  $6.1\mu\text{V}$ , full range = 400 mV  
 Low Range: 1LSB =  $61\text{nV}$ , full range = 4 mV

Software Set-up: Calibration time: 3 sec Measuring time: 3 sec

Setup	X	Y	Z
High Range	405.010098	404.9037428	405.0817835
Low Range	3.972	3.95185	3.96828
Connector Position	86 °		

High Range	Input	Reading in $\mu\text{V}$	% Error
Channel X + Input	200mV	200000	0.00
	20mV	20003.4	0.02
Channel X - Input	20mV	-19993	-0.04
Channel Y + Input	200mV	200001	0.00
	20mV	20002.7	0.01
Channel Y - Input	20mV	-19993	-0.04
Channel Z + Input	200mV	200000	0.00
	20mV	20000.8	0.00
Channel Z - Input	20mV	-19997.7	-0.01

Low Range	Input	Reading in $\mu\text{V}$	% Error
Channel X + Input	2mV	2000.2	0.01
	0.2mV	200.04	0.02
Channel X - Input	0.2mV	-200.81	0.41
Channel Y + Input	2mV	2000.1	0.00
	0.2mV	199.47	-0.27
Channel Y - Input	0.2mV	-201.01	0.50
Channel Z + Input	2mV	1999.9	0.00
	0.2mV	198.68	-0.66
Channel Z - Input	0.2mV	-201.1	0.55

## 2. Common mode sensitivity

Software Set-up

Calibration time: 3 sec, Measuring time: 3 sec

High/Low Range

in $\mu\text{V}$	Common mode Input Voltage	High Range Reading	Low Range Reading
Channel X	200mV	-1.0284	-1.5716
	- 200mV	3.9204	1.3725
Channel Y	200mV	6.7686	5.874
	- 200mV	-6.8145	-8.0898
Channel Z	200mV	2.1943	2.766
	- 200mV	-2.52	-4.6218

## 3. Channel separation

Software Set-up

Calibration time: 3 sec, Measuring time: 3 sec

High Range

in $\mu\text{V}$	Input Voltage	Channel X	Channel Y	Channel Z
Channel X	200mV	-	0.88082	0.19177
Channel Y	200mV	0.049124	-	0.25676
Channel Z	200mV	-2.1226	-0.89508	-

## 4. AD-Converter Values with inputs shorted

in LSB	Low Range	High Range
Channel X	16492	16236
Channel Y	16307	15690
Channel Z	16461	16033

## 5. Input Offset Measurement

Measured after 15 min warm-up time of the Data Acquisition Electronic.  
Every Measurement is preceded by a calibration cycle.

Software set-up:

Calibration time: 3 sec  
Measuring time: 3 sec  
Number of measurements: 100, Low Range

Input 10M $\Omega$

in $\mu$ V	Average	min. Offset	max. Offset	Std. Deviation
Channel X	-0.52	-1.64	0.60	0.43
Channel Y	-2.05	-3.65	0.06	0.51
Channel Z	-0.34	-2.05	0.43	0.37

Input shorted

in $\mu$ V	Average	min. Offset	max. Offset	Std. Deviation
Channel X	0.04	-0.84	1.09	0.41
Channel Y	-0.77	-2.08	0.17	0.40
Channel Z	-1.01	-1.68	-0.38	0.24

## 6. Input Offset Current

in fA	Input Offset Current
Channel X	< 25
Channel Y	< 25
Channel Z	< 25

## 7. Input Resistance

	Calibrating	Measuring
Channel X	200 k $\Omega$	200 M $\Omega$
Channel Y	200 k $\Omega$	200 M $\Omega$
Channel Z	200 k $\Omega$	200 M $\Omega$



## 8. Low Battery Alarm Voltage

in V	Alarm Level
Supply (+ Vcc)	7.66 V
Supply (- Vcc)	-7.53 V

## 9. Power Consumption

in mA	Switched off	Stand by	Transmitting
Supply (+ Vcc)	0.000	5.83	14.1
Supply (- Vcc)	-0.011	-7.86	-9.13

## 10. Functional test

Touch async pulse 1	ok
Touch async pulse 2	ok
Touch status bit 1	ok
Touch status bit 2	ok
Remote power off	ok
Remote analog Power control	ok
Modification Status	B – C

Client **C&C Taiwan (Auden)**

## CALIBRATION CERTIFICATE

Object(s) **ES3DV2 - SN:3023**

Calibration procedure(s) **QA CAL-01.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 23, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS No. 251-0340)	Apr-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (Agilent, No. 20020918)	In house check: Oct 03
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Laboratory Director	

Approved by:	Niels Kuster	Quality Manager
--------------	--------------	-----------------

Date issued: October 5, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.



# Probe ES3DV2

## SN:3023

Manufactured:	April 15, 2003
Last calibration:	September 23, 2003

**Calibrated for DASY Systems**

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: ES3DV2 SN:3023

### Sensitivity in Free Space

### Diode Compression

NormX	<b>0.85</b> $\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	<b>96</b>	mV
NormY	<b>0.94</b> $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	<b>96</b>	mV
NormZ	<b>1.01</b> $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	<b>96</b>	mV

### Sensitivity in Tissue Simulating Liquid

Head                      **900 MHz**                       $\epsilon_r = 41.5 \pm 5\%$                        $\sigma = 0.97 \pm 5\% \text{ mho/m}$   
 Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>6.0</b> $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	<b>6.0</b> $\pm 9.5\%$ (k=2)	Alpha	<b>0.33</b>
ConvF Z	<b>6.0</b> $\pm 9.5\%$ (k=2)	Depth	<b>1.66</b>

Head                      **1800 MHz**                       $\epsilon_r = 40.0 \pm 5\%$                        $\sigma = 1.40 \pm 5\% \text{ mho/m}$   
 Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>4.9</b> $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	<b>4.9</b> $\pm 9.5\%$ (k=2)	Alpha	<b>0.23</b>
ConvF Z	<b>4.9</b> $\pm 9.5\%$ (k=2)	Depth	<b>2.54</b>

### Boundary Effect

Head                      **900 MHz**                      Typical SAR gradient: 5 % per mm




Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%] Without Correction Algorithm		5.8	2.8
SAR <sub>be</sub> [%] With Correction Algorithm		0.1	0.3

Head                      **1800 MHz**                      Typical SAR gradient: 10 % per mm

Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%] Without Correction Algorithm		7.7	4.7
SAR <sub>be</sub> [%] With Correction Algorithm		0.1	0.3

### Sensor Offset

Probe Tip to Sensor Center	<b>2.0</b>	mm
----------------------------	------------	----

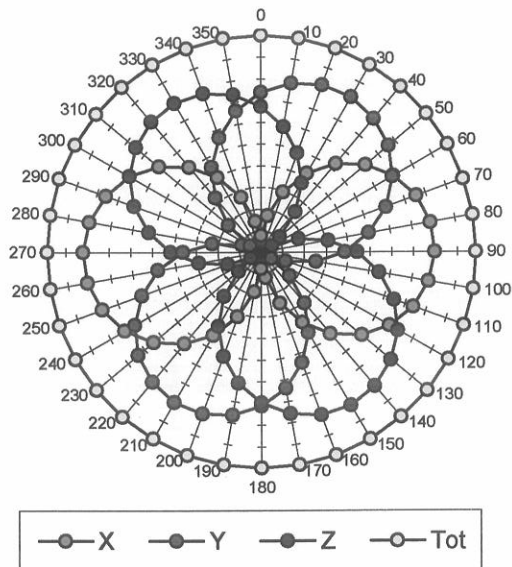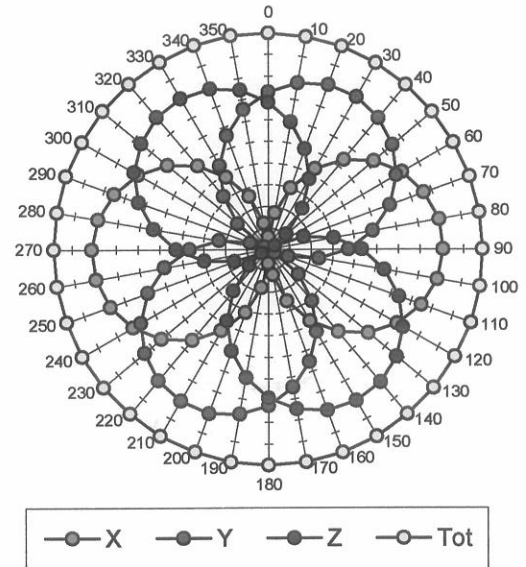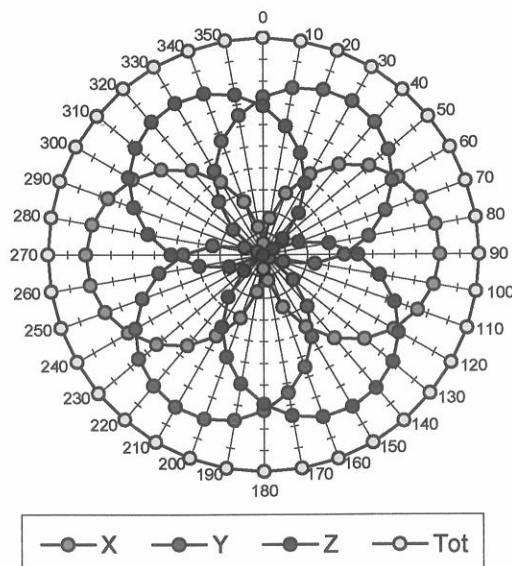Receiving Pattern ( $\phi$ ,  $\theta = 0^\circ$ )**f = 30 MHz, TEM cell ifi110****f = 100 MHz, TEM cell ifi110****f = 300 MHz, TEM cell ifi110****f = 900 MHz, TEM cell ifi110**