




# TEST REPORT

Applicant Name : Advanced Card Systems Limited  
Address : Units 4108 - 4110, 41st Floor, Manhattan Place, 23 Wang Tai Road, Kowloon Bay, Hong Kong  
Report Number : SZNS220809-36126E-RF-00A  
FCC ID: V5MACR350

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Type: Bus Validator  
Model No.: ACR350  
Multiple Model(s) No.: N/A  
Trade Mark:   
Date Received: 2022/08/09  
Report Date: 2022/10/13

|              |       |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Roger Ling*

Roger Ling  
EMC Engineer

## Approved By:

*Candy Li*

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

|   |           |
|---|-----------|
| <b>GENERAL INFORMATION.....</b>   | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                | 4         |
| OBJECTIVE .....   | 4         |
| TEST METHODOLOGY .....  | 4         |
| MEASUREMENT UNCERTAINTY.....  | 5         |
| TEST FACILITY .....   | 5         |
| <b>SYSTEM TEST CONFIGURATION .....</b>  | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....   | 6         |
| EUT EXERCISE SOFTWARE .....   | 6         |
| SPECIAL ACCESSORIES.....  | 6         |
| EQUIPMENT MODIFICATIONS .....   | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....  | 6         |
| EXTERNAL I/O CABLE.....   | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....   | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>  | <b>8</b>  |
| <b>TEST EQUIPMENT LIST .....</b>  | <b>9</b>  |
| <b>FCC §15.247 (I) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>           | <b>10</b> |
| APPLICABLE STANDARD .....   | 10        |
| RESULT .....  | 10        |
| <b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>   | <b>12</b> |
| APPLICABLE STANDARD .....   | 12        |
| ANTENNA CONNECTOR CONSTRUCTION .....  | 12        |
| <b>FCC §15.205, §15.209 &amp; §15.247(D) – RADIATED EMISSIONS .....</b>                 | <b>13</b> |
| APPLICABLE STANDARD .....   | 13        |
| EUT SETUP .....   | 13        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                       | 14        |
| TEST PROCEDURE .....  | 14        |
| FACTOR & MARGIN CALCULATION .....   | 14        |
| TEST DATA .....   | 14        |
| <b>FCC §15.247(A) (1)-CHANNEL SEPARATION TEST .....</b>                                 | <b>22</b> |
| APPLICABLE STANDARD .....   | 22        |
| TEST PROCEDURE .....  | 22        |
| TEST DATA .....   | 22        |
| <b>FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH .....</b> | <b>23</b> |
| APPLICABLE STANDARD .....   | 23        |
| TEST PROCEDURE .....  | 23        |
| TEST DATA .....   | 24        |
| <b>FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST .....</b>                  | <b>25</b> |
| APPLICABLE STANDARD .....   | 25        |
| TEST PROCEDURE .....  | 25        |
| TEST DATA .....   | 25        |

|   |           |
|---|-----------|
| <b>FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....</b> | <b>26</b> |
| APPLICABLE STANDARD .....   | 26        |
| TEST PROCEDURE .....  | 26        |
| TEST DATA .....   | 26        |
| <b>FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>       | <b>27</b> |
| APPLICABLE STANDARD .....   | 27        |
| TEST PROCEDURE .....  | 27        |
| TEST DATA .....   | 27        |
| <b>FCC §15.247(D) - BAND EDGES TESTING.....</b>                       | <b>28</b> |
| APPLICABLE STANDARD .....   | 28        |
| TEST PROCEDURE .....  | 28        |
| TEST DATA .....   | 28        |
| <b>APPENDIX .....</b>   | <b>29</b> |
| APPENDIX A: 20dB EMISSION BANDWIDTH.....                              | 29        |
| APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....                          | 33        |
| APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....                  | 37        |
| APPENDIX D: CARRIER FREQUENCY SEPARATION .....                        | 41        |
| APPENDIX E: TIME OF OCCUPANCY .....                                   | 43        |
| APPENDIX F: NUMBER OF HOPPING CHANNELS .....                          | 53        |
| APPENDIX G: BAND EDGE MEASUREMENTS .....                              | 55        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                     |  |
|-------------------------------------|--|
| Frequency Range                     | Bluetooth: 2402~2480MHz  |
| Maximum conducted Peak output power | Bluetooth: -8.62dBm  |
| Modulation Technique                | Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK   |
| Antenna Specification*              | 1.6dBi (provided by the applicant)   |
| Voltage Range                       | DC 9V-36 V   |
| Sample serial number                | SZNS220809-36126E-RF-S1 for Radiated Emissions<br>SZNS220809-36126E-RF-S2 for RF Conducted Test<br>(Assigned by ATC) |
| Sample/EUT Status                   | Good condition   |
| Tested Voltage                      | Normal Voltage: 24V <sub>DC</sub>  |

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

| Parameter                    |                 | Uncertainty |
|------------------------------|-----------------|-------------|
| Occupied Channel Bandwidth   |                 | 5%          |
| RF output power, conducted   |                 | 0.73dB      |
| Unwanted Emission, conducted |                 | 1.6dB       |
| AC Line Conducted emission   |                 | 2.72dB      |
| Emissions,<br>Radiated       | 30MHz - 1GHz    | 4.28dB      |
|                              | 1GHz - 18GHz    | 4.98dB      |
|                              | 18GHz - 26.5GHz | 5.06dB      |
| Temperature                  |                 | 1 °C        |
| Humidity                     |                 | 6%          |
| Supply voltages              |                 | 0.4%        |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“HCI\_TESTER”\* exercise software was used and the power level is 15\*, which provided by the applicant.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer | Description     | Model              | Serial Number |
|--------------|-----------------|--------------------|---------------|
| Unknown      | Storage Battery | Unknown            | Unknown       |
| HIKVISION    | Router          | DS-3WR03-E         | 10021642429   |
| SanDisk      | USB disk        | SDCZ73-016G-Z35    | 2145493       |
| SanDisk      | SD card         | SDSQUNC-016G-ZN6MA | 0421XX7747P4  |
| Unknown      | Load            | 50ohm              | Unknown       |

### External I/O Cable

| Cable Description                  | Length (m) | From Port | To              |
|------------------------------------|------------|-----------|-----------------|
| Un-shielding Detachable DC Cable   | 1.0        | EUT       | Storage Battery |
| Un-shielding Detachable RJ45 Cable | 5.0        | EUT       | Router          |

## Block Diagram of Test Setup

For Radiated Emissions:

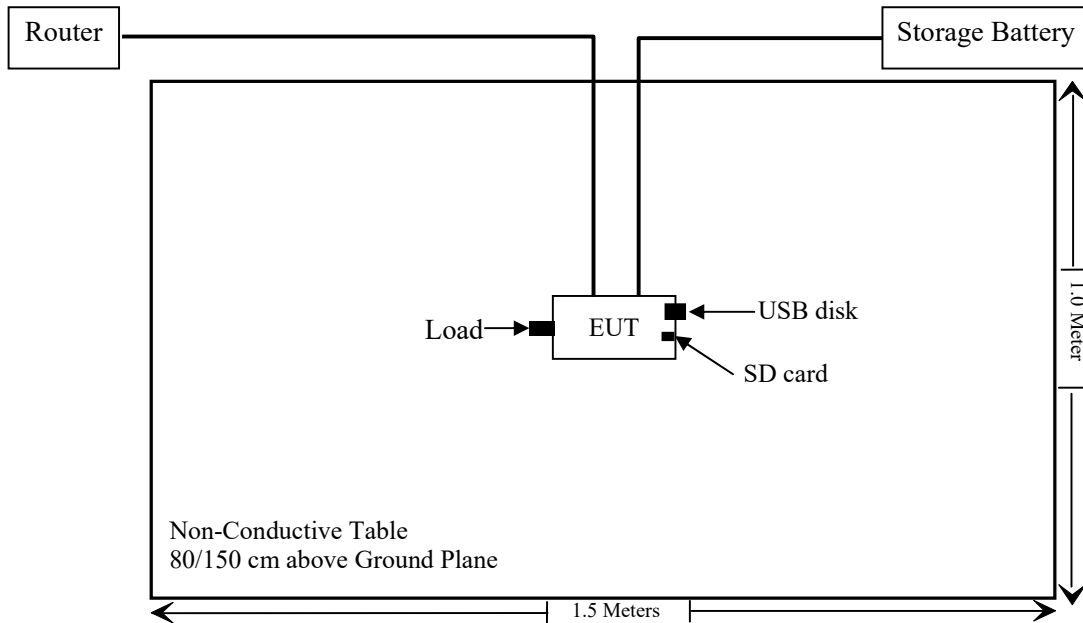

**SUMMARY OF TEST RESULTS**

| FCC Rules                     | Description of Test                               | Result         |
|-------------------------------|---|----------------|
| §15.247 (i) & §2.1091         | MAXIMUM PERMISSIBLE EXPOSURE (MPE)                | Compliant      |
| §15.203                       | Antenna Requirement                               | Compliant      |
| §15.207(a)                    | AC Line Conducted Emissions                       | Not Applicable |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions                                | Compliant      |
| §15.247(a)(1)                 | 20 dB Emission Bandwidth & 99% Occupied Bandwidth | Compliant      |
| §15.247(a)(1)                 | Channel Separation Test                           | Compliant      |
| §15.247(a)(1)(iii)            | Time of Occupancy (Dwell Time)                    | Compliant      |
| §15.247(a)(1)(iii)            | Quantity of hopping channel Test                  | Compliant      |
| §15.247(b)(1)                 | Peak Output Power Measurement                     | Compliant      |
| §15.247(d)                    | Band edges  | Compliant      |

Not Applicable: EUT is power by battery and used on vehicle.



**TEST EQUIPMENT LIST**

| Manufacturer                                    | Description       | Model             | Serial Number | Calibration Date | Calibration Due Date |
|---|-------------------|-------------------|---------------|------------------|----------------------|
| Radiated emission test                          |                   |                   |               |                  |                      |
| Rohde& Schwarz                                  | Test Receiver     | ESR               | 102725        | 2021/12/13       | 2022/12/12           |
| Rohde&Schwarz                                   | Spectrum Analyzer | FSV40             | 101949        | 2021/12/13       | 2022/12/12           |
| SONOMA INSTRUMENT                               | Amplifier         | 310 N             | 186131        | 2021/11/09       | 2022/11/08           |
| A.H. Systems, inc.                              | Preamplifier      | PAM-0118P         | 135           | 2021/11/09       | 2022/11/08           |
| Quinstar  | Amplifier         | QLW-18405536-J0   | 15964001002   | 2021/11/11       | 2022/11/10           |
| Schwarzbeck                                     | Bilog Antenna     | VULB9163          | 9163-323      | 2021/07/06       | 2024/07/05           |
| Schwarzbeck                                     | Horn Antenna      | BBHA9120D         | 9120D-1067    | 2020/01/05       | 2023/01/04           |
| Schwarzbeck                                     | HORN ANTENNA      | BBHA9170          | 9170-359      | 2020/01/05       | 2023/01/04           |
| Radiated Emission Test Software: e3 19821b (V9) |                   |                   |               |                  |                      |
| Unknown   | RF Coaxial Cable  | No.10             | N050          | 2021/12/14       | 2022/12/13           |
| Unknown   | RF Coaxial Cable  | No.11             | N1000         | 2021/12/14       | 2022/12/13           |
| Unknown   | RF Coaxial Cable  | No.12             | N040          | 2021/12/14       | 2022/12/13           |
| Unknown   | RF Coaxial Cable  | No.13             | N300          | 2021/12/14       | 2022/12/13           |
| Unknown   | RF Coaxial Cable  | No.14             | N800          | 2021/12/14       | 2022/12/13           |
| Unknown   | RF Coaxial Cable  | No.15             | N600          | 2021/12/14       | 2022/12/13           |
| Unknown   | RF Coaxial Cable  | No.16             | N650          | 2021/12/14       | 2022/12/13           |
| Wainwright                                      | High Pass Filter  | WHKX3.6/18 G-10SS | 5             | 2021/12/14       | 2022/12/13           |
| RF conducted test                               |                   |                   |               |                  |                      |
| Rohde&Schwarz                                   | Spectrum Analyzer | FSV-40            | 101590        | 2022/01/19       | 2023/01/18           |
| Tonscend  | RF Control Unit   | JS0806-2          | 19G8060182    | 2021/10/26       | 2022/10/25           |
| WEINSCHHEL                                      | 10dB Attenuator   | 5324              | AU 3842       | 2021/12/14       | 2022/12/13           |
| Unknown   | RF Coaxial Cable  | No.31             | RF-01         | Each time        |                      |

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

#### Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                               | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (Minutes) |
| 0.3-1.34  | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30   | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300  | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500  | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000  | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz

\* = Plane-wave equivalent power density

### Result

#### Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

**Result****For worst case:**

| Mode         | Frequency (MHz) | Antenna Gain |           | Tune up conducted power |        | Evaluation Distance (cm) | Power Density (mW/cm <sup>2</sup> ) | MPE Limit (mW/cm <sup>2</sup> ) |
|--------------|-----------------|--------------|-----------|-------------------------|--------|--------------------------|-------------------------------------|---------------------------------|
|              |                 | (dBi)        | (numeric) | (dBm)                   | (mW)   |                          |                                     |                                 |
| BT           | 2402-2480       | 1.6          | 1.45      | -8.0                    | 0.16   | 20                       | 0.00005                             | 1                               |
| BLE          | 2402-2480       | 1.6          | 1.45      | -9.0                    | 0.13   | 20                       | 0.00004                             | 1                               |
| Wi-Fi        | 2412-2462       | 2.2          | 1.66      | 11.0                    | 12.59  | 20                       | 0.004                               | 1                               |
| GSM850*      | 824-849         | 0.5          | 1.12      | 25.0                    | 316.23 | 20                       | 0.071                               | 0.549                           |
| PCS1900*     | 1850-1910       | 3.0          | 2.00      | 24.0                    | 251.19 | 20                       | 0.100                               | 1                               |
| WCDMA Band 2 | 1850-1910       | 3.0          | 2.00      | 24.5                    | 281.84 | 20                       | 0.112                               | 1                               |
| WCDMA Band 4 | 1710-1755       | 3.0          | 2.00      | 23.5                    | 223.87 | 20                       | 0.089                               | 1                               |
| WCDMA Band 5 | 824-849         | 0.5          | 1.12      | 23.5                    | 223.87 | 20                       | 0.050                               | 0.549                           |
| LTE Band 2   | 1850-1910       | 3.0          | 2.00      | 21.0                    | 125.89 | 20                       | 0.050                               | 1                               |
| LTE Band 4   | 1710-1755       | 3.0          | 2.00      | 22.0                    | 158.49 | 20                       | 0.063                               | 1                               |
| LTE Band 5   | 824-849         | 0.5          | 1.12      | 23.0                    | 199.53 | 20                       | 0.045                               | 0.549                           |
| LTE Band 12  | 699-716         | 0.5          | 1.12      | 23.5                    | 223.87 | 20                       | 0.050                               | 0.466                           |
| LTE Band 38  | 2570-2620       | 3.0          | 2.00      | 20.0                    | 100.00 | 20                       | 0.040                               | 1                               |
| LTE Band 41  | 2496-2690       | 3.0          | 2.00      | 19.0                    | 79.43  | 20                       | 0.032                               | 1                               |

Note : The tune-up power and antenna gain was declared by the applicant.

Note\*: It was the time average power according to the below duty cycle.

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

| Number of Time slot                                  | 1     | 2     | 3        | 4     |
|--|-------|-------|----------|-------|
| Duty Cycle   | 1:8   | 1:4   | 1:2.66   | 1:2   |
| Time based Ave. power compared to slotted Ave. power | -9 dB | -6 dB | -4.25 dB | -3 dB |
| Crest Factor   | 8     | 4     | 2.66     | 2     |

Simultaneous transmitting consideration (worst case):

$$\begin{aligned} \text{The ratio} &= \text{MPE}_{\text{BT}}/\text{limit}_{\text{BT}} + \text{MPE}_{\text{Wi-Fi}}/\text{limit}_{\text{Wi-Fi}} + \text{MPE}_{\text{GSM850}}/\text{limit}_{\text{GSM850}} \\ &= 0.00005/1 + 0.004/1 + 0.071/0.549 = 0.133 < 1.0 \end{aligned}$$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant.**

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is 1.6dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.


## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard


FCC §15.205; §15.209; §15.247(d)

### EUT Setup

Below 1 GHz:

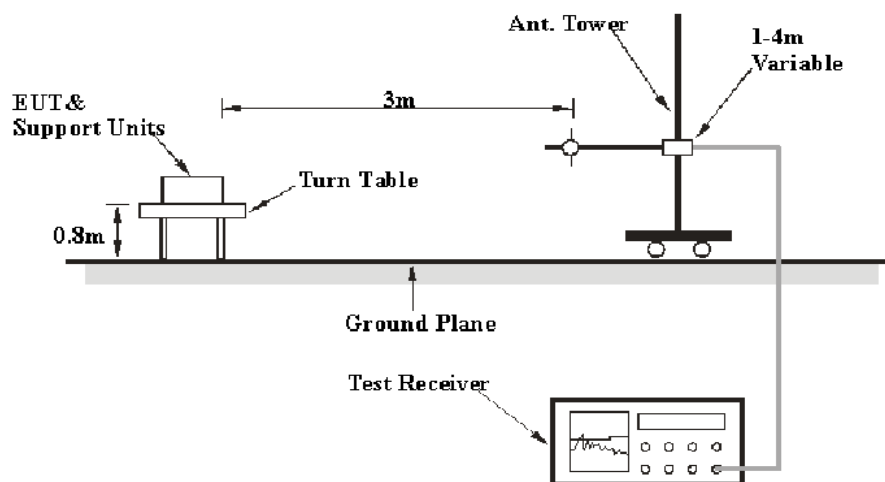

Above 1GHz:

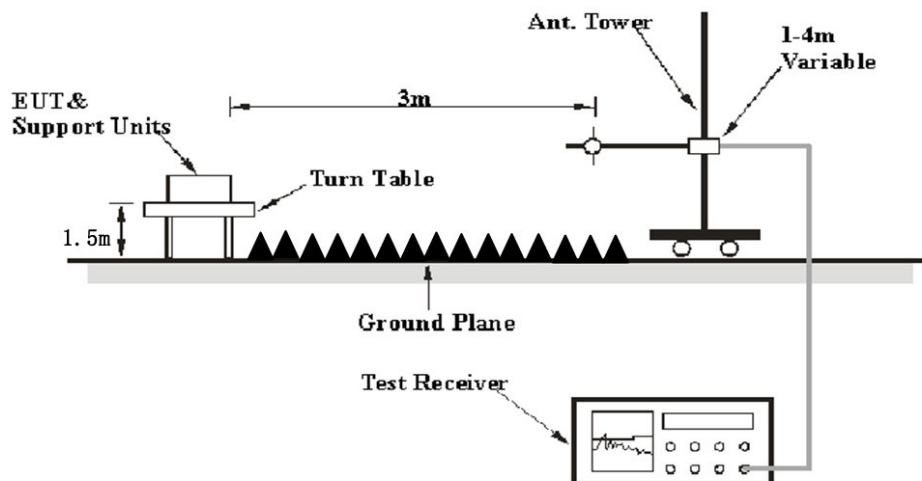

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1 MHz   | 3 MHz     | /       | PK          |

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N1*L1+N2*L2+\dots+Nn-1*Ln-1+Nn*Ln$ ,

where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20\*log(Duty cycle)

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions


|                    |            |
|--------------------|------------|
| Temperature:       | 25~25.7 °C |
| Relative Humidity: | 56~60 %    |
| ATM Pressure:      | 101.0 kPa  |

The testing was performed by Level Li on 2022-09-26 for below 1GHz and Zeki Ma on 2022-08-27 and 2022-10-13 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

**30MHz-1GHz:** (worst case is 8DPSK Mode, Low channel)


Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.

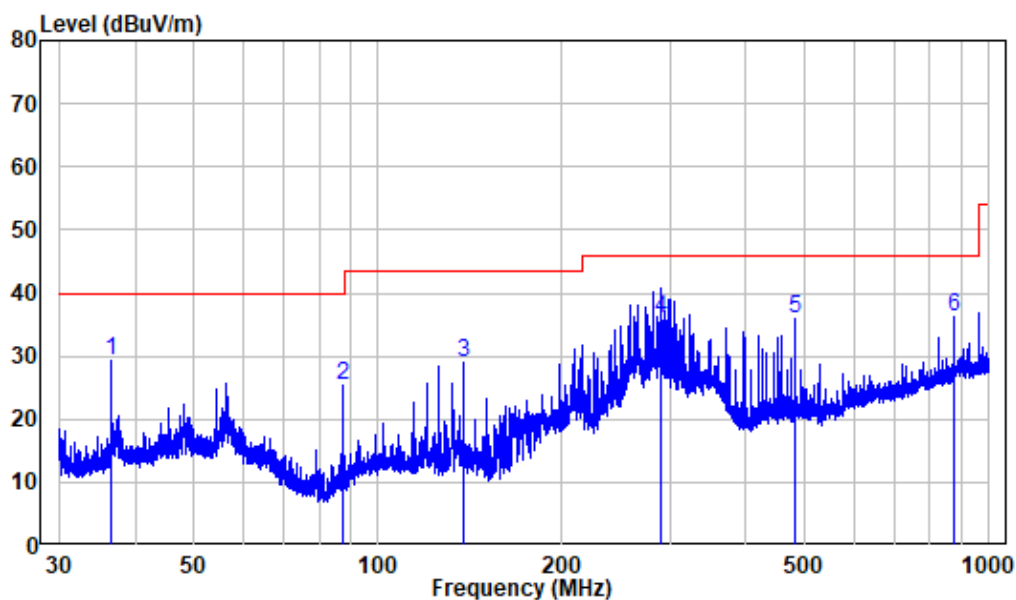**Horizontal:**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : SZNS220809-36126E-RF  
Test Mode: BT

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 36.573  | -11.09 | 40.45         | 29.36  | 40.00         | -10.64        | Peak   |
| 2 | 87.571  | -14.70 | 39.94         | 25.24  | 40.00         | -14.76        | Peak   |
| 3 | 138.024 | -15.35 | 44.42         | 29.07  | 43.50         | -14.43        | Peak   |
| 4 | 290.399 | -9.30  | 45.10         | 35.80  | 46.00         | -10.20        | QP     |
| 5 | 480.107 | -5.00  | 40.81         | 35.81  | 46.00         | -10.19        | Peak   |
| 6 | 875.247 | 1.18   | 35.12         | 36.30  | 46.00         | -9.70         | Peak   |

## Vertical

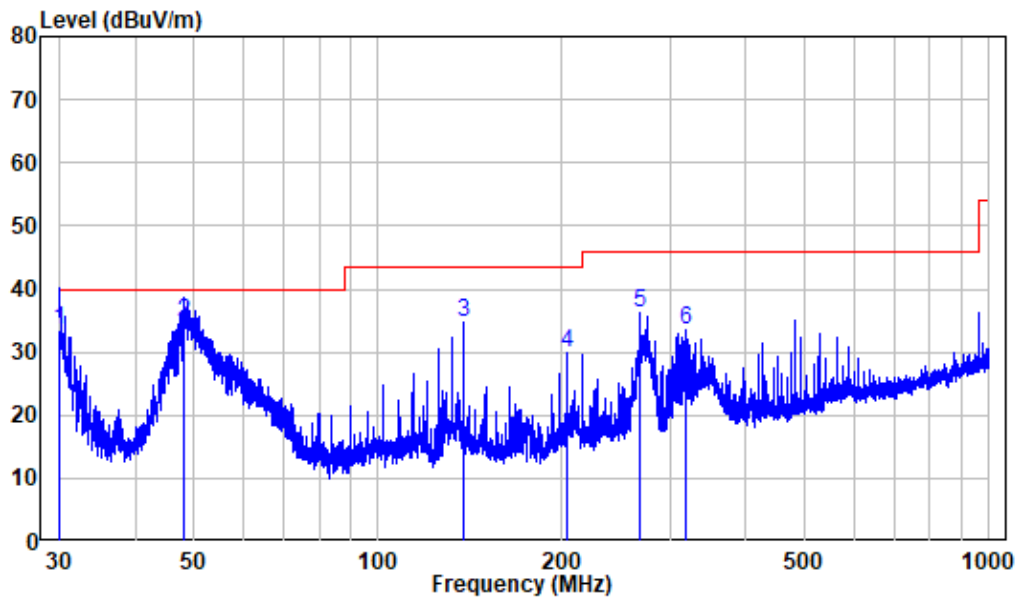

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220809-36126E-RF  
 Test Mode: BT

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 30.079  | -12.39 | 45.80      | 33.41  | 40.00      | -6.59      | QP     |
| 2 | 48.036  | -10.00 | 44.70      | 34.70  | 40.00      | -5.30      | QP     |
| 3 | 138.024 | -15.35 | 49.98      | 34.63  | 43.50      | -8.87      | Peak   |
| 4 | 203.969 | -11.74 | 41.53      | 29.79  | 43.50      | -13.71     | Peak   |
| 5 | 268.721 | -10.29 | 46.38      | 36.09  | 46.00      | -9.91      | Peak   |
| 6 | 319.797 | -8.46  | 41.92      | 33.46  | 46.00      | -12.54     | Peak   |



**Above 1GHz:** (worst case is 8DPSK Mode, 3DH5)

| Frequency<br>(MHz)      | Receiver          |        | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Factor<br>(dB/m) | Absolute<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|-------------------------|-------------------|--------|------------------------------|---------------|----------------|------------------|-------------------------------|-------------------|----------------|
|                         | Reading<br>(dBμV) | PK/Ave |                              | Height<br>(m) | Polar<br>(H/V) |                  |                               |                   |                |
| Low Channel(2402MHz)    |                   |        |                              |               |                |                  |                               |                   |                |
| 2310                    | 68.75             | PK     | 7                            | 2.4           | H              | -7.24            | 61.51                         | 74                | -12.49         |
| 2310                    | 68.20             | PK     | 357                          | 1.6           | V              | -7.24            | 60.96                         | 74                | -13.04         |
| 2390                    | 69.66             | PK     | 133                          | 2.2           | H              | -7.22            | 62.44                         | 74                | -11.56         |
| 2390                    | 70.02             | PK     | 356                          | 2.2           | V              | -7.22            | 62.80                         | 74                | -11.20         |
| 4804                    | 54.89             | PK     | 136                          | 1.4           | H              | -3.51            | 51.38                         | 74                | -22.62         |
| 4804                    | 55.21             | PK     | 173                          | 1.4           | V              | -3.51            | 51.70                         | 74                | -22.30         |
| Middle Channel(2441MHz) |                   |        |                              |               |                |                  |                               |                   |                |
| 4882                    | 55.39             | PK     | 169                          | 2.2           | H              | -3.37            | 52.02                         | 74                | -21.98         |
| 4882                    | 55.43             | PK     | 30                           | 2.2           | V              | -3.37            | 52.06                         | 74                | -21.94         |
| High Channel(2480 MHz)  |                   |        |                              |               |                |                  |                               |                   |                |
| 2483.5                  | 69.40             | PK     | 358                          | 1.9           | H              | -7.20            | 62.20                         | 74                | -11.80         |
| 2483.5                  | 69.76             | PK     | 89                           | 1.9           | V              | -7.20            | 62.56                         | 74                | -11.44         |
| 2500                    | 69.07             | PK     | 273                          | 2.1           | H              | -7.18            | 61.89                         | 74                | -12.11         |
| 2500                    | 68.89             | PK     | 179                          | 1.7           | V              | -7.18            | 61.71                         | 74                | -12.29         |
| 4960                    | 54.95             | PK     | 304                          | 1.3           | H              | -3.01            | 51.94                         | 74                | -22.06         |
| 4960                    | 54.99             | PK     | 169                          | 1.3           | V              | -3.01            | 51.98                         | 74                | -22.02         |

| Field Strength of Average |  |                |  |                                    |                   |                |
|---------------------------|--|----------------|--|------------------------------------|-------------------|----------------|
| Frequency<br>(MHz)        | Peak<br>Measurement<br>@3m<br>(dBμV/m) | Polar<br>(H/V) | Duty Cycle<br>Correction<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part 15.247   |                |
|                           |  |                |  |                                    | Limit<br>(dBμV/m) | Margin<br>(dB) |
| Low Channel(2402MHz)      |  |                |  |                                    |                   |                |
| 2310                      | 61.51                                  | H              | -24.79                                     | 36.72                              | 54                | -17.28         |
| 2310                      | 60.96                                  | V              | -24.79                                     | 36.17                              | 54                | -17.83         |
| 2390                      | 62.44                                  | H              | -24.79                                     | 37.65                              | 54                | -16.35         |
| 2390                      | 62.80                                  | V              | -24.79                                     | 38.01                              | 54                | -15.99         |
| 4804                      | 51.38                                  | H              | -24.79                                     | 26.59                              | 54                | -27.41         |
| 4804                      | 51.70                                  | V              | -24.79                                     | 26.91                              | 54                | -27.09         |
| Middle Channel(2441MHz)   |  |                |  |                                    |                   |                |
| 4882                      | 52.02                                  | H              | -24.79                                     | 27.23                              | 54                | -26.77         |
| 4882                      | 52.06                                  | V              | -24.79                                     | 27.27                              | 54                | -26.73         |
| High Channel(2480MHz)     |  |                |  |                                    |                   |                |
| 2483.5                    | 62.20                                  | H              | -24.57                                     | 37.63                              | 54                | -16.37         |
| 2483.5                    | 62.56                                  | V              | -24.57                                     | 37.99                              | 54                | -16.01         |
| 2500                      | 61.89                                  | H              | -24.57                                     | 37.32                              | 54                | -16.68         |
| 2500                      | 61.71                                  | V              | -24.57                                     | 37.14                              | 54                | -16.86         |
| 4960                      | 51.94                                  | H              | -24.57                                     | 27.37                              | 54                | -26.63         |
| 4960                      | 51.98                                  | V              | -24.57                                     | 27.41                              | 54                | -26.59         |

Note:

Absolute Level = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

The worst case duty cycle as below:

Duty cycle = Ton/100ms = 2.88\*2/100=0.0576


Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.0576 = -24.79

## Pulse length: 2.88ms

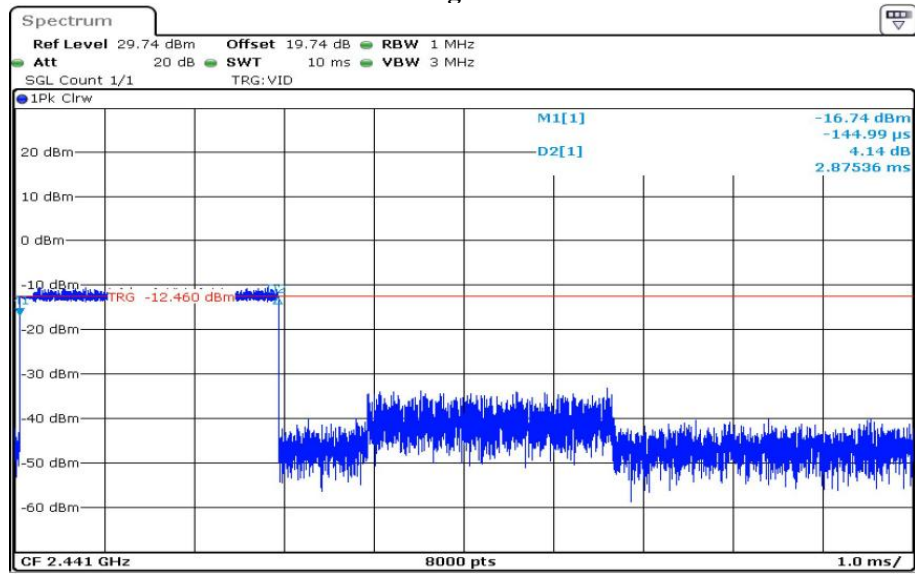

Date: 9.OCT.2022 18:59:54

## Maximum Pulse number in 100ms: 2

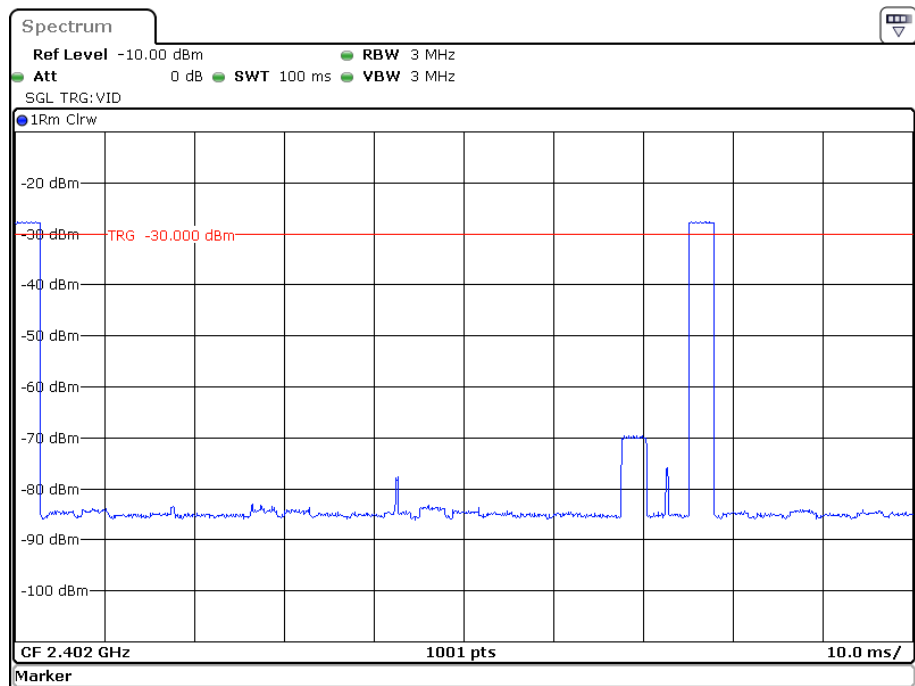


Date: 13.OCT.2022 03:35:12


1-18GHz

Pre-scan for Middle channel

Horizontal:

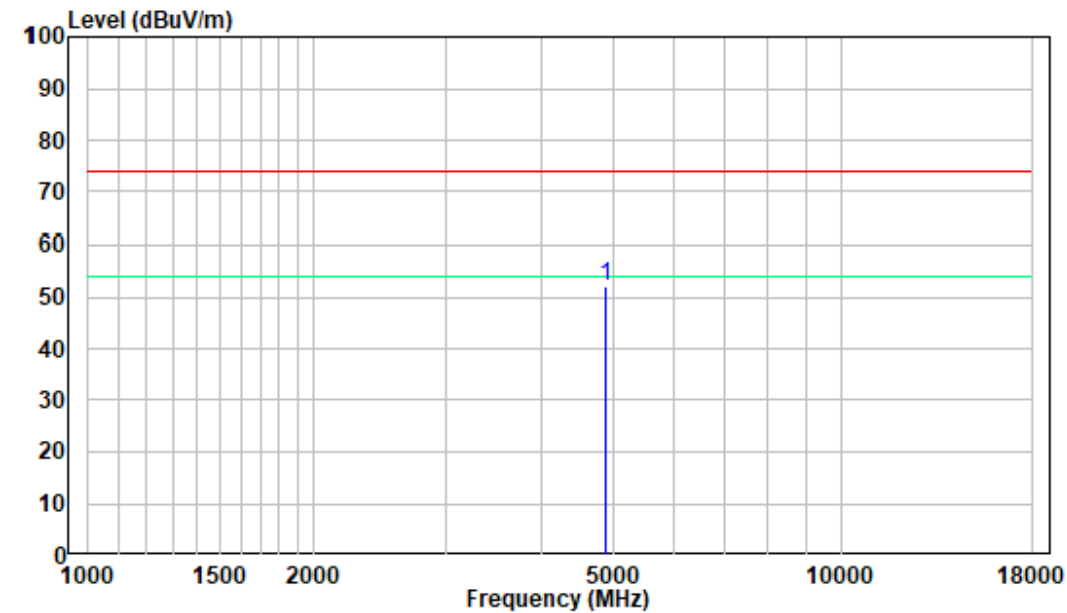


Vertical:

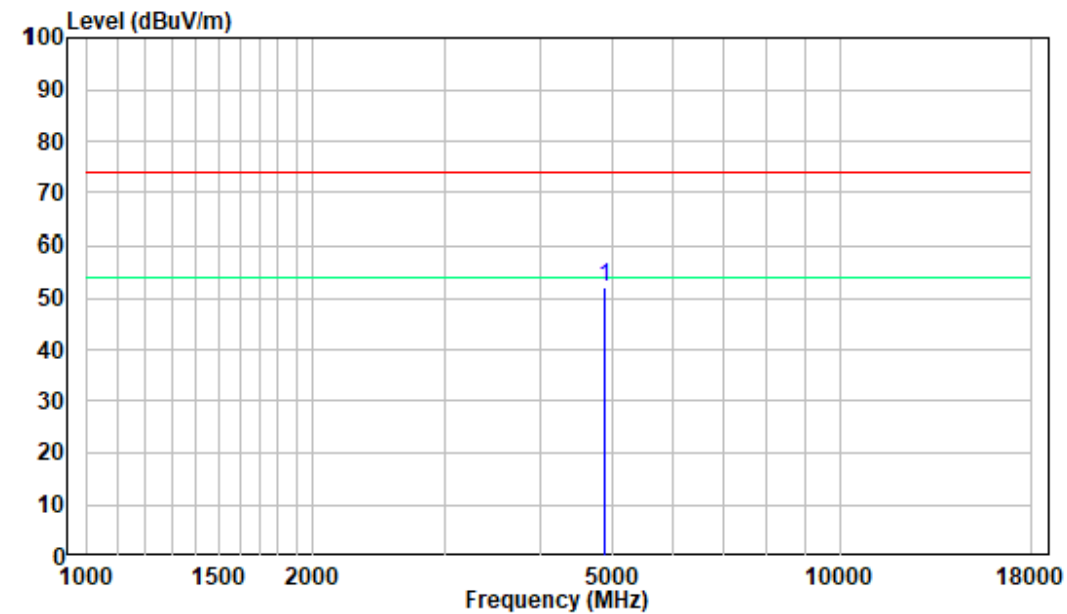


18-25GHz

Pre-scan for Middle channel

Horizontal:

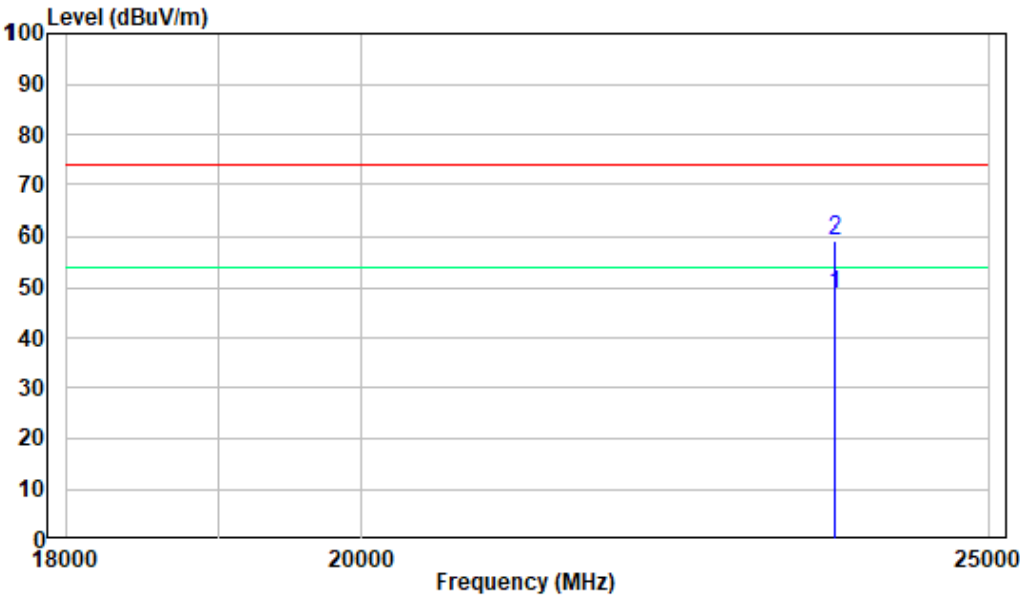

Vertical:

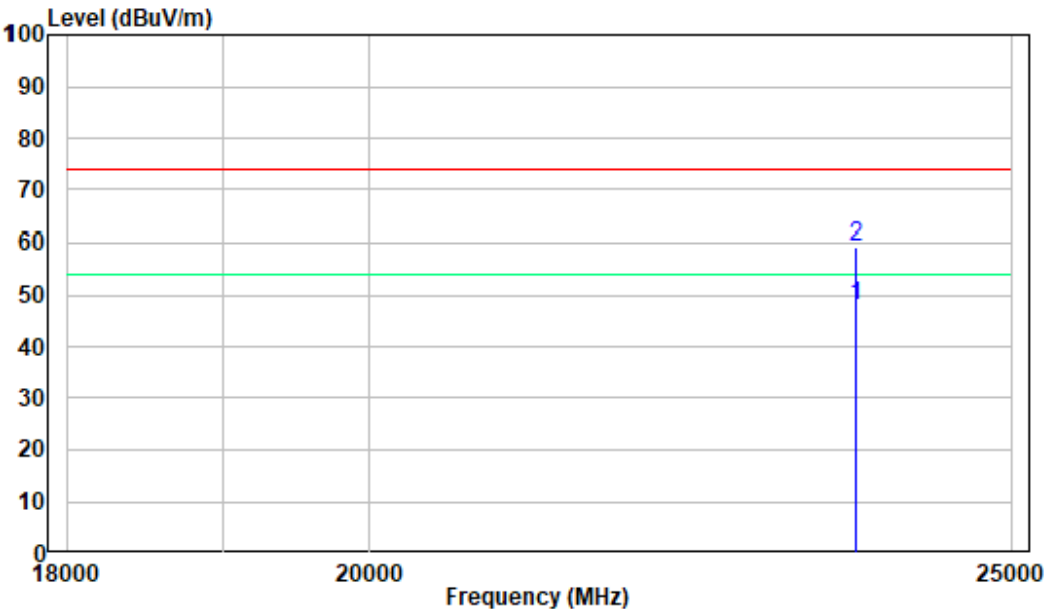


## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

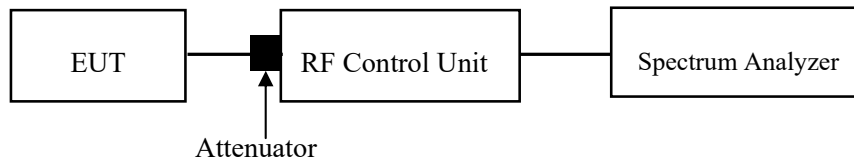

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.2 °C   |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-10-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

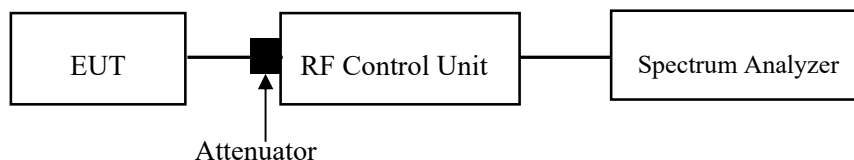

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.2 °C   |
| <b>Relative Humidity:</b> | 56 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-10-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.




## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

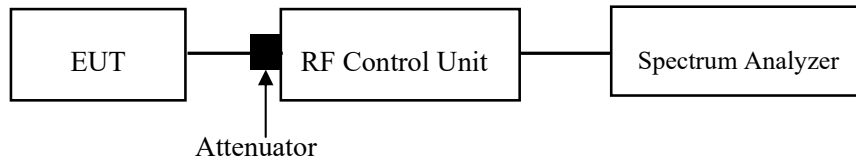

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.2 °C   |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-10-09.*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

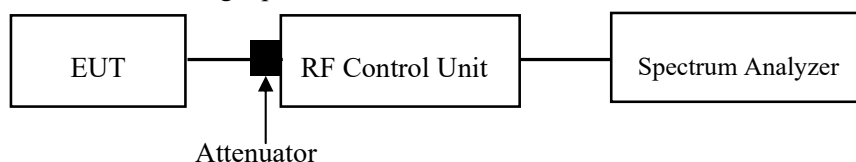**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.2 °C   |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-10-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

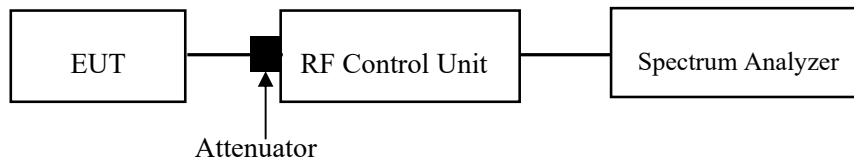

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.2 °C   |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-10-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

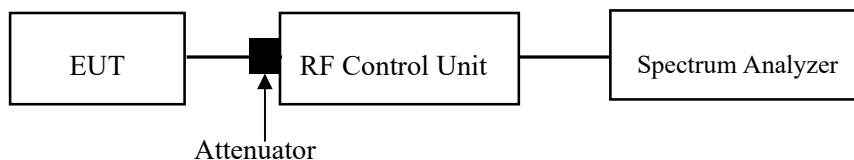

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.2 °C   |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-10-09.*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix.

## APPENDIX


### Appendix A: 20dB Emission Bandwidth Test Result

| Test Mode | Antenna | Channel | 20db EBW[MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|---------------|------------|---------|
| DH1       | Ant1    | 2402    | 0.90          | ---        | ---     |
|           |         | 2441    | 0.92          | ---        | ---     |
|           |         | 2480    | 0.91          | ---        | ---     |
| 2DH1      | Ant1    | 2402    | 1.35          | ---        | ---     |
|           |         | 2441    | 1.35          | ---        | ---     |
|           |         | 2480    | 1.35          | ---        | ---     |
| 3DH1      | Ant1    | 2402    | 1.19          | ---        | ---     |
|           |         | 2441    | 1.26          | ---        | ---     |
|           |         | 2480    | 1.25          | ---        | ---     |

## Test Graphs

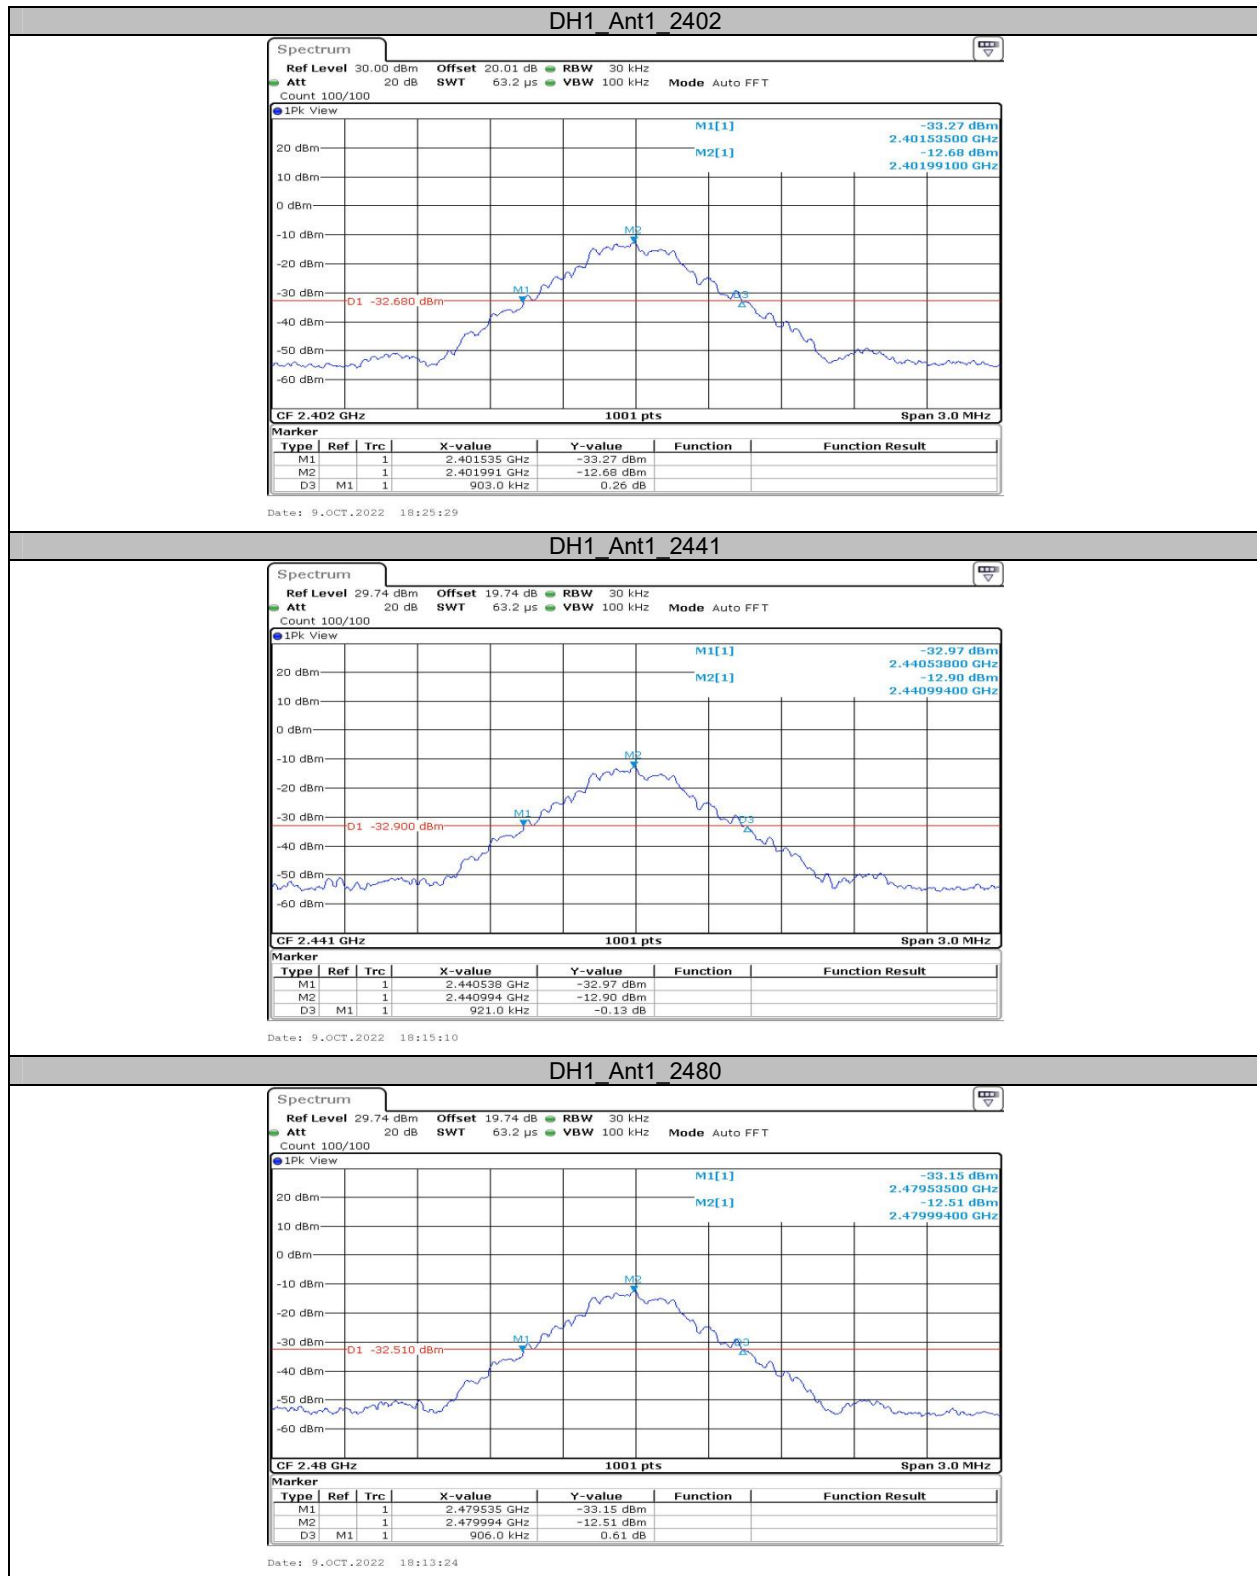

## 2DH1\_Ant1\_2402

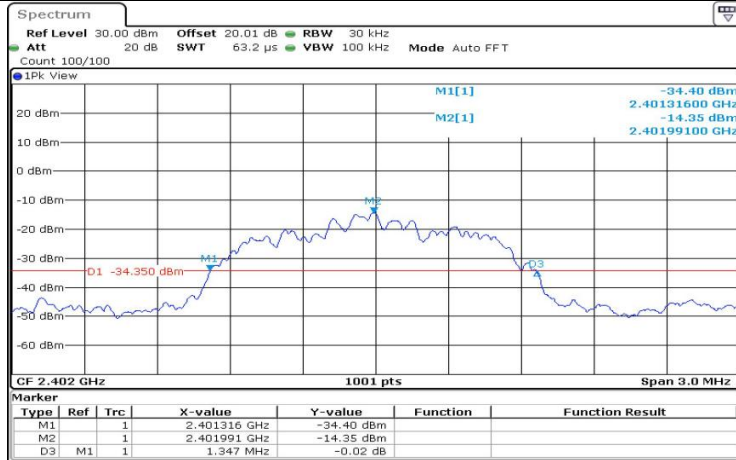


Date: 9.OCT.2022 18:33:17

## 2DH1\_Ant1\_2441




Date: 9.OCT.2022 18:34:34

## 2DH1\_Ant1\_2480

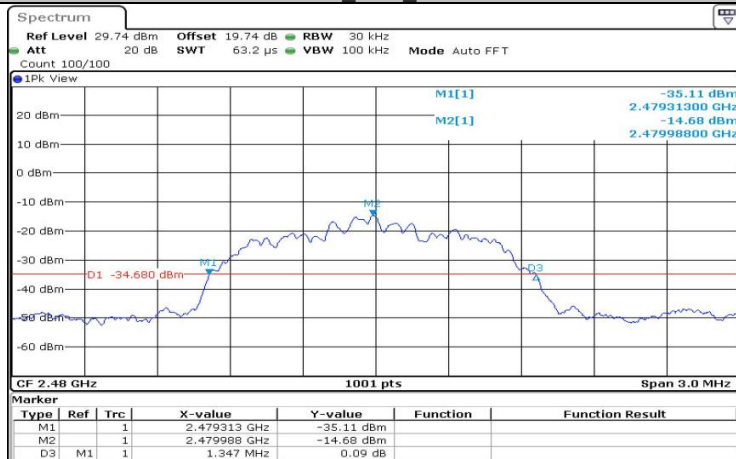


Date: 9.OCT.2022 18:39:59

## 3DH1\_Ant1\_2402

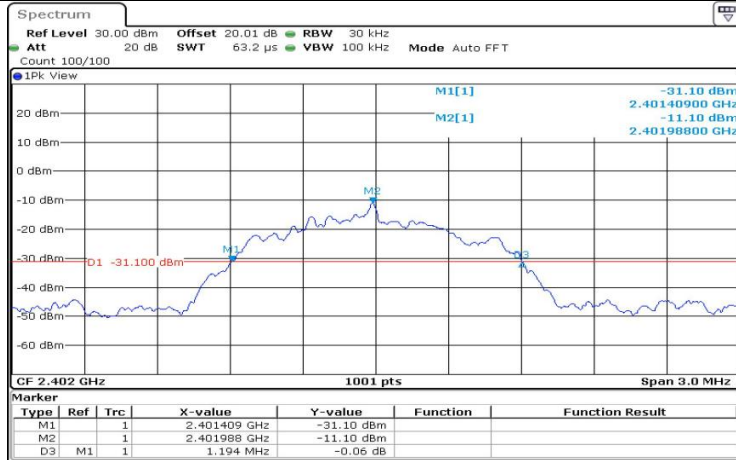


Date: 9.OCT.2022 18:49:19

## 3DH1\_Ant1\_2441

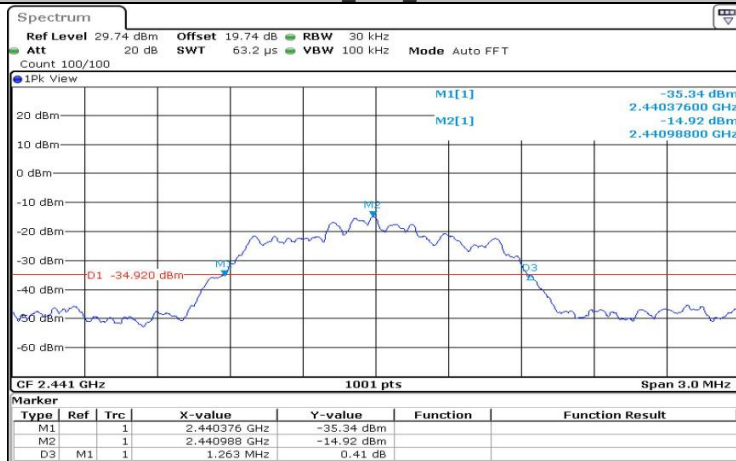

Date: 9.OCT.2022 18:50:47

## 3DH1\_Ant1\_2480

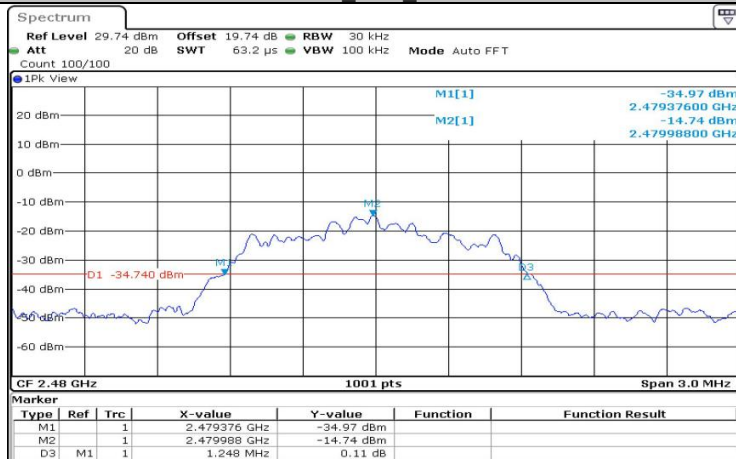


Date: 9.OCT.2022 18:51:49




**Appendix B: Occupied Channel Bandwidth  
Test Result**

| Test Mode | Antenna | Channel | OCB [MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|-----------|------------|---------|
| DH1       | Ant1    | 2402    | 0.839     | ---        | ---     |
|           |         | 2441    | 0.839     | ---        | ---     |
|           |         | 2480    | 0.839     | ---        | ---     |
| 2DH1      | Ant1    | 2402    | 1.223     | ---        | ---     |
|           |         | 2441    | 1.214     | ---        | ---     |
|           |         | 2480    | 1.196     | ---        | ---     |
| 3DH1      | Ant1    | 2402    | 1.151     | ---        | ---     |
|           |         | 2441    | 1.178     | ---        | ---     |
|           |         | 2480    | 1.178     | ---        | ---     |

## Test Graphs

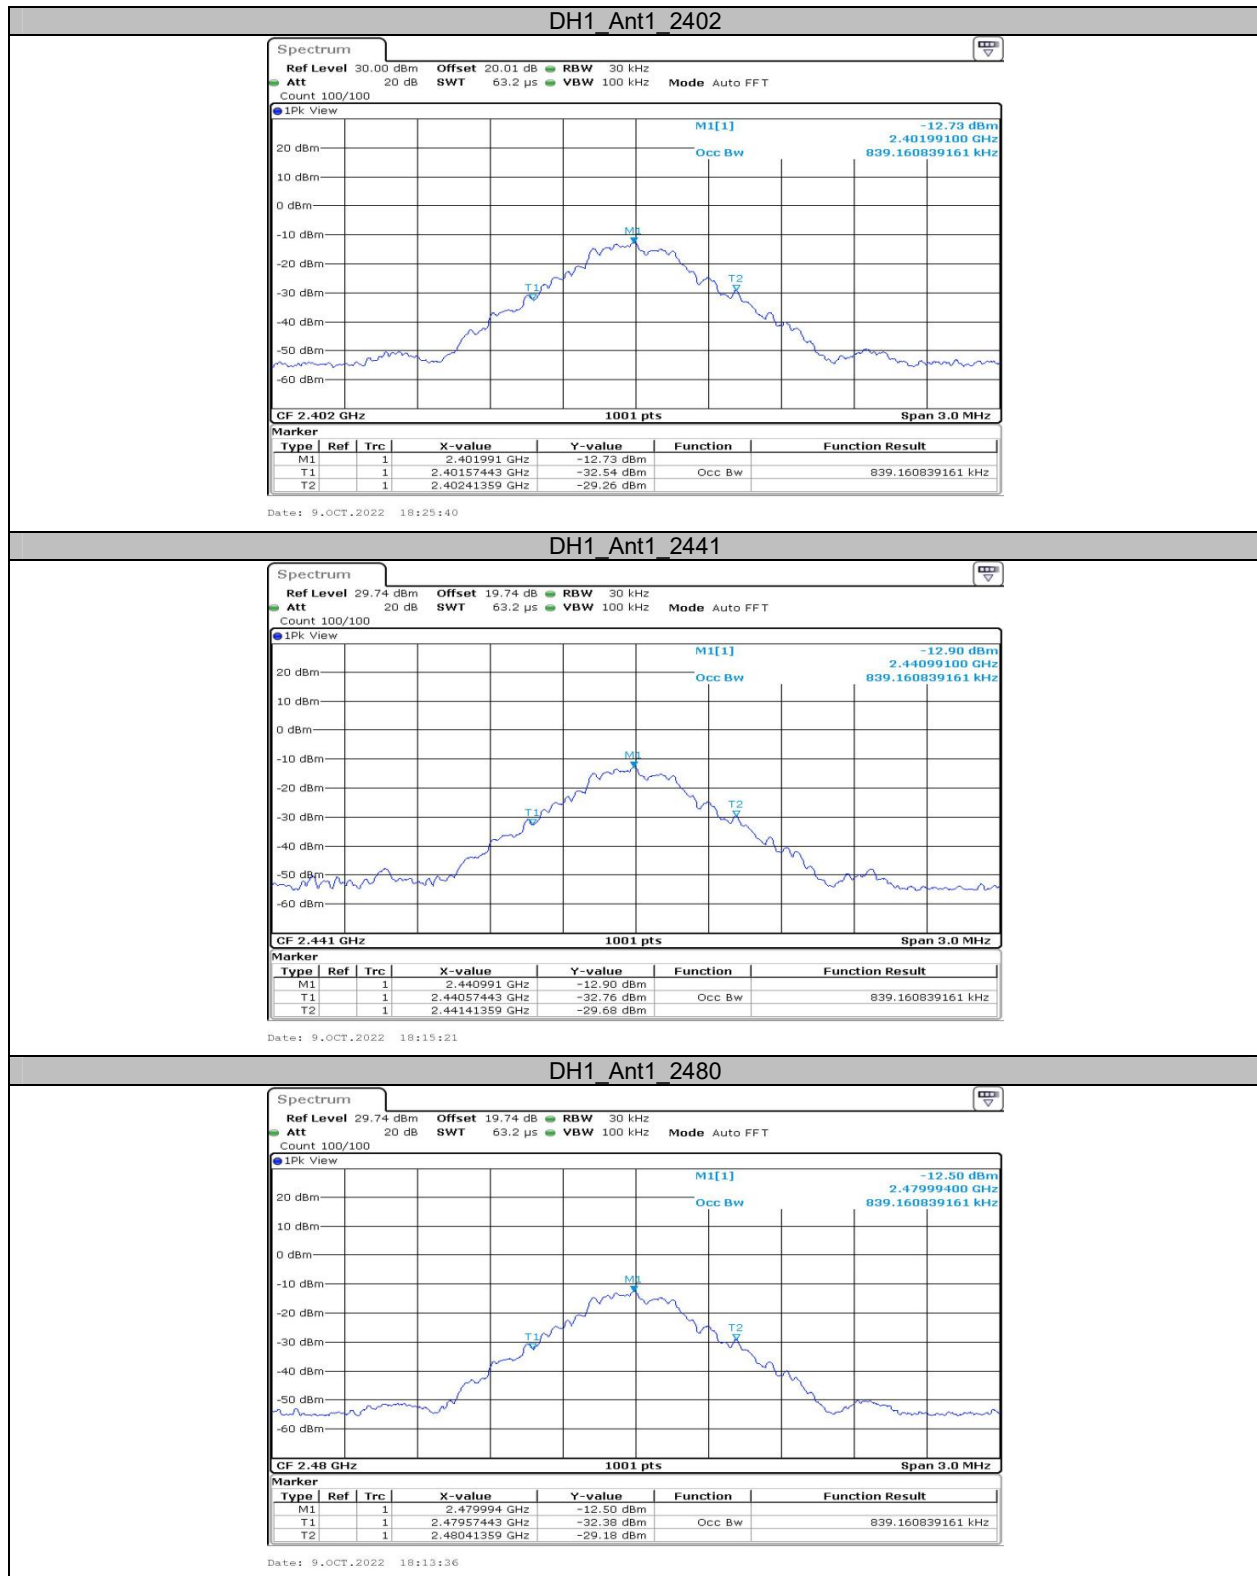


## 2DH1\_Ant1\_2402

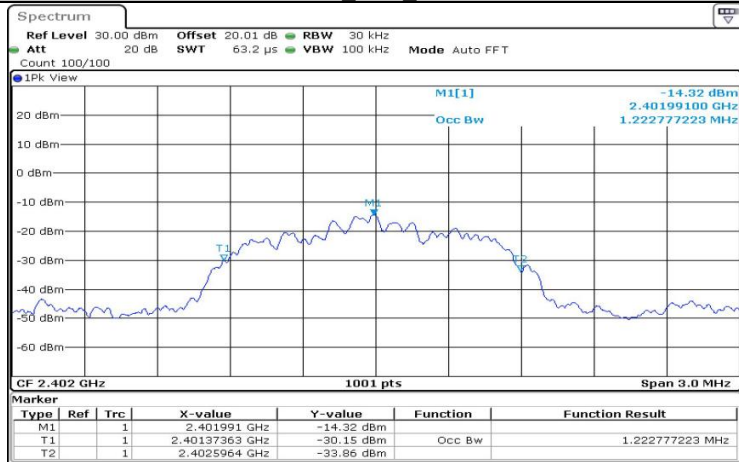


Date: 9.OCT.2022 18:33:29

## 2DH1\_Ant1\_2441

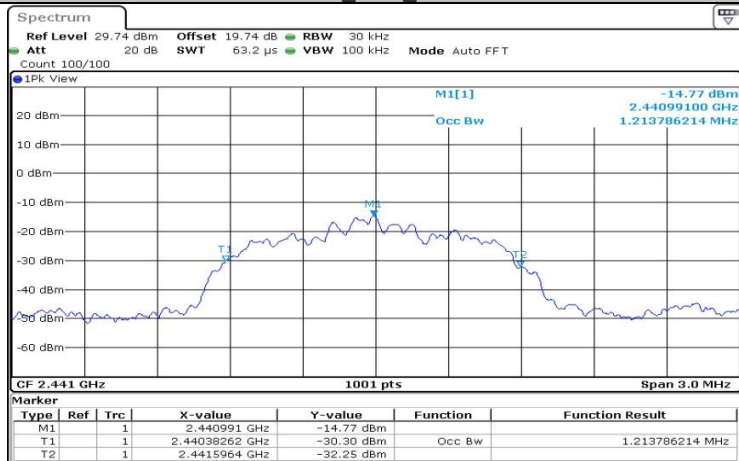


Date: 9.OCT.2022 18:34:46

## 2DH1\_Ant1\_2480

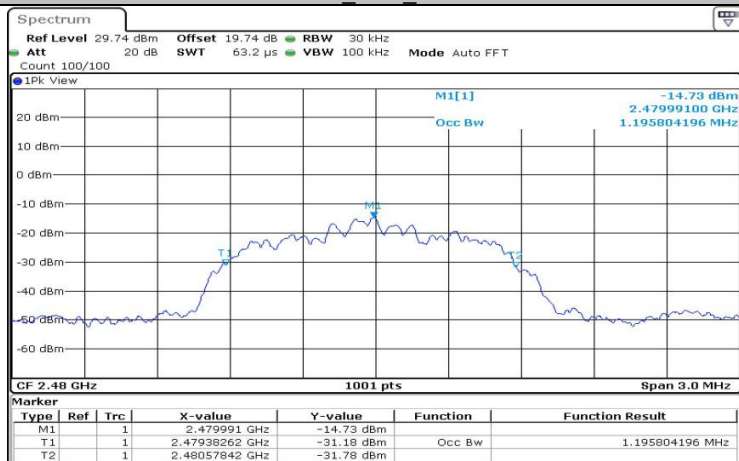


Date: 9.OCT.2022 18:40:11

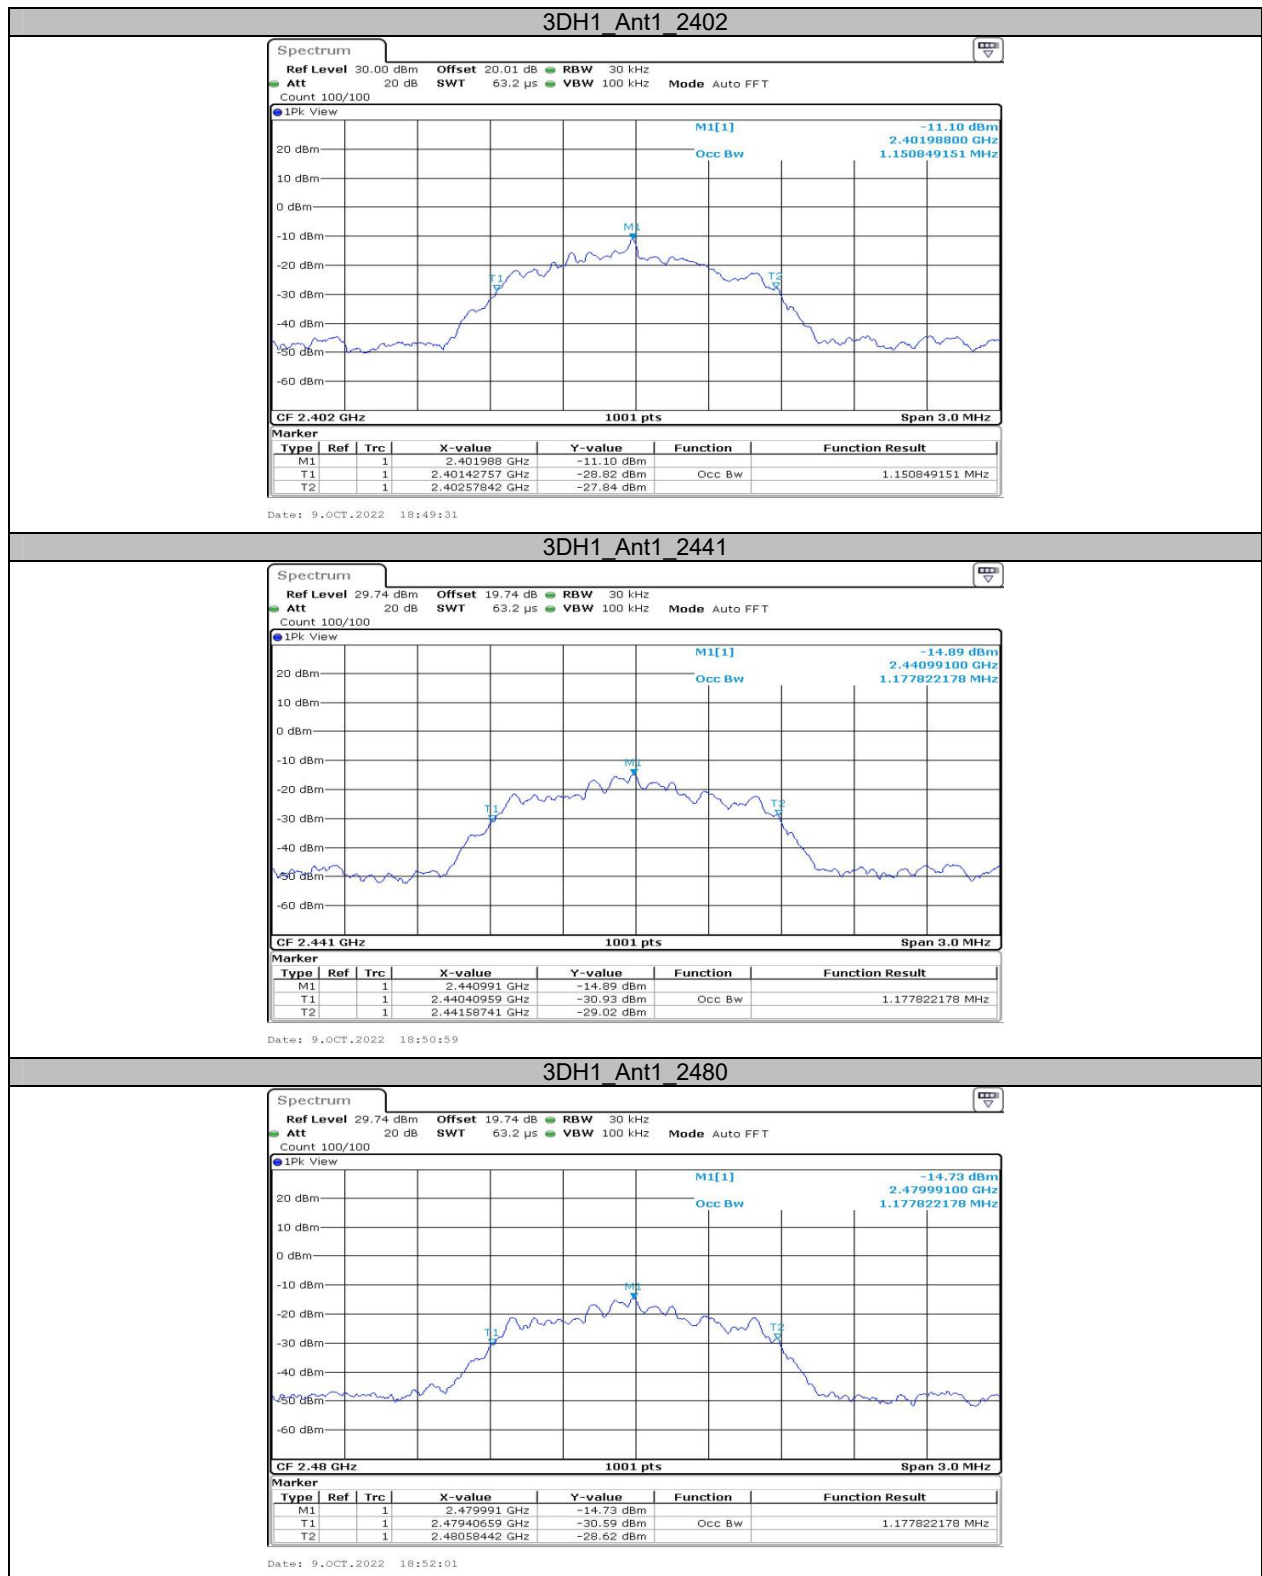


**Appendix C: Maximum conducted Peak output power  
Test Result**

| Test Mode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| DH1       | Ant1    | 2402    | -9.67       | ≤20.97     | PASS    |
|           |         | 2441    | -9.63       | ≤20.97     | PASS    |
|           |         | 2480    | -9.17       | ≤20.97     | PASS    |
| 2DH1      | Ant1    | 2402    | -9.86       | ≤20.97     | PASS    |
|           |         | 2441    | -9.86       | ≤20.97     | PASS    |
|           |         | 2480    | -9.42       | ≤20.97     | PASS    |
| 3DH1      | Ant1    | 2402    | -9.49       | ≤20.97     | PASS    |
|           |         | 2441    | -9.39       | ≤20.97     | PASS    |
|           |         | 2480    | -8.62       | ≤20.97     | PASS    |


## Test Graphs

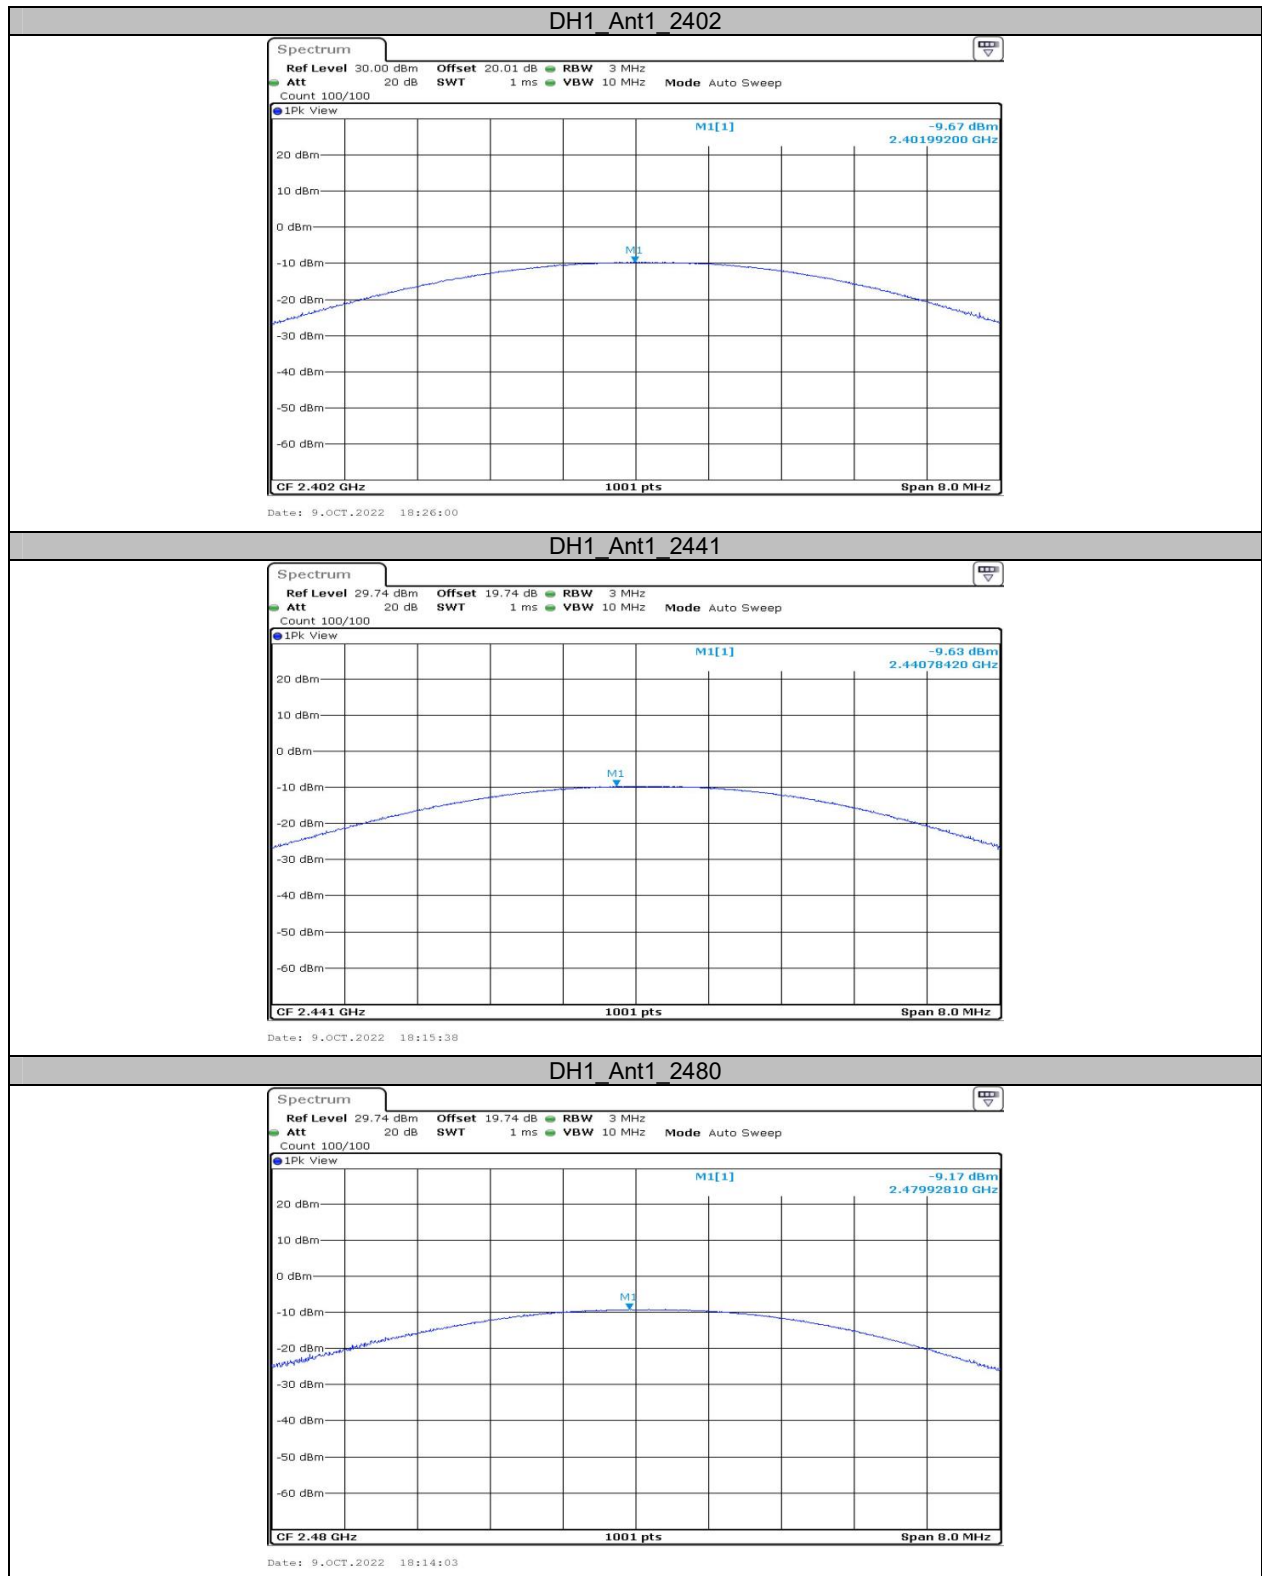

## 2DH1\_Ant1\_2402

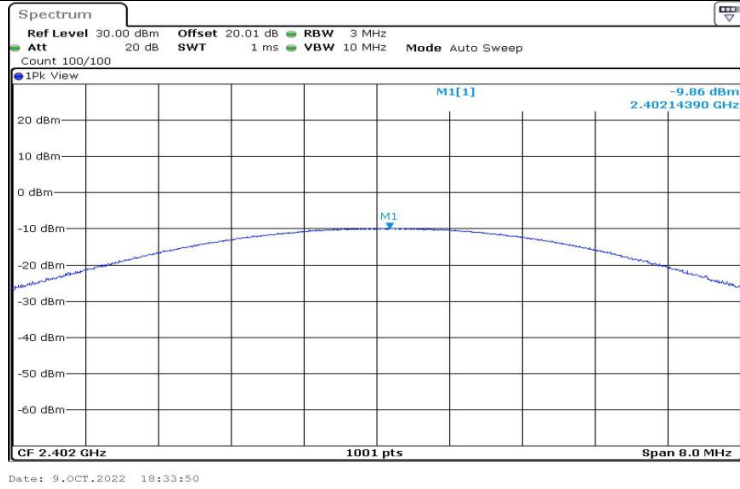


## 2DH1\_Ant1\_2441

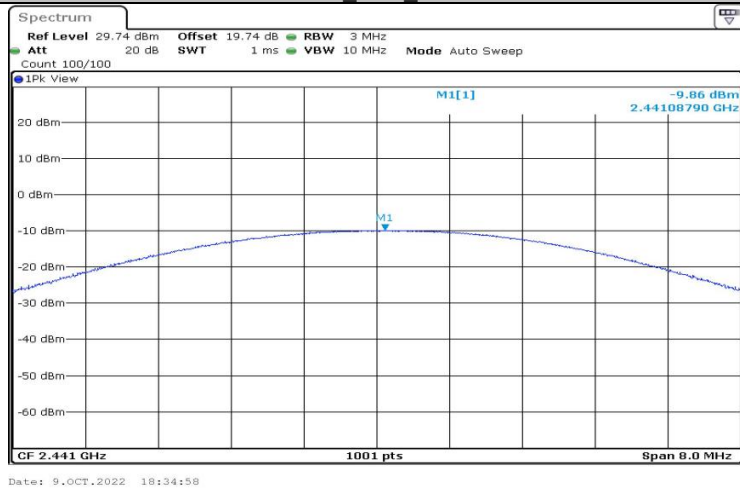

## 2DH1\_Ant1\_2480



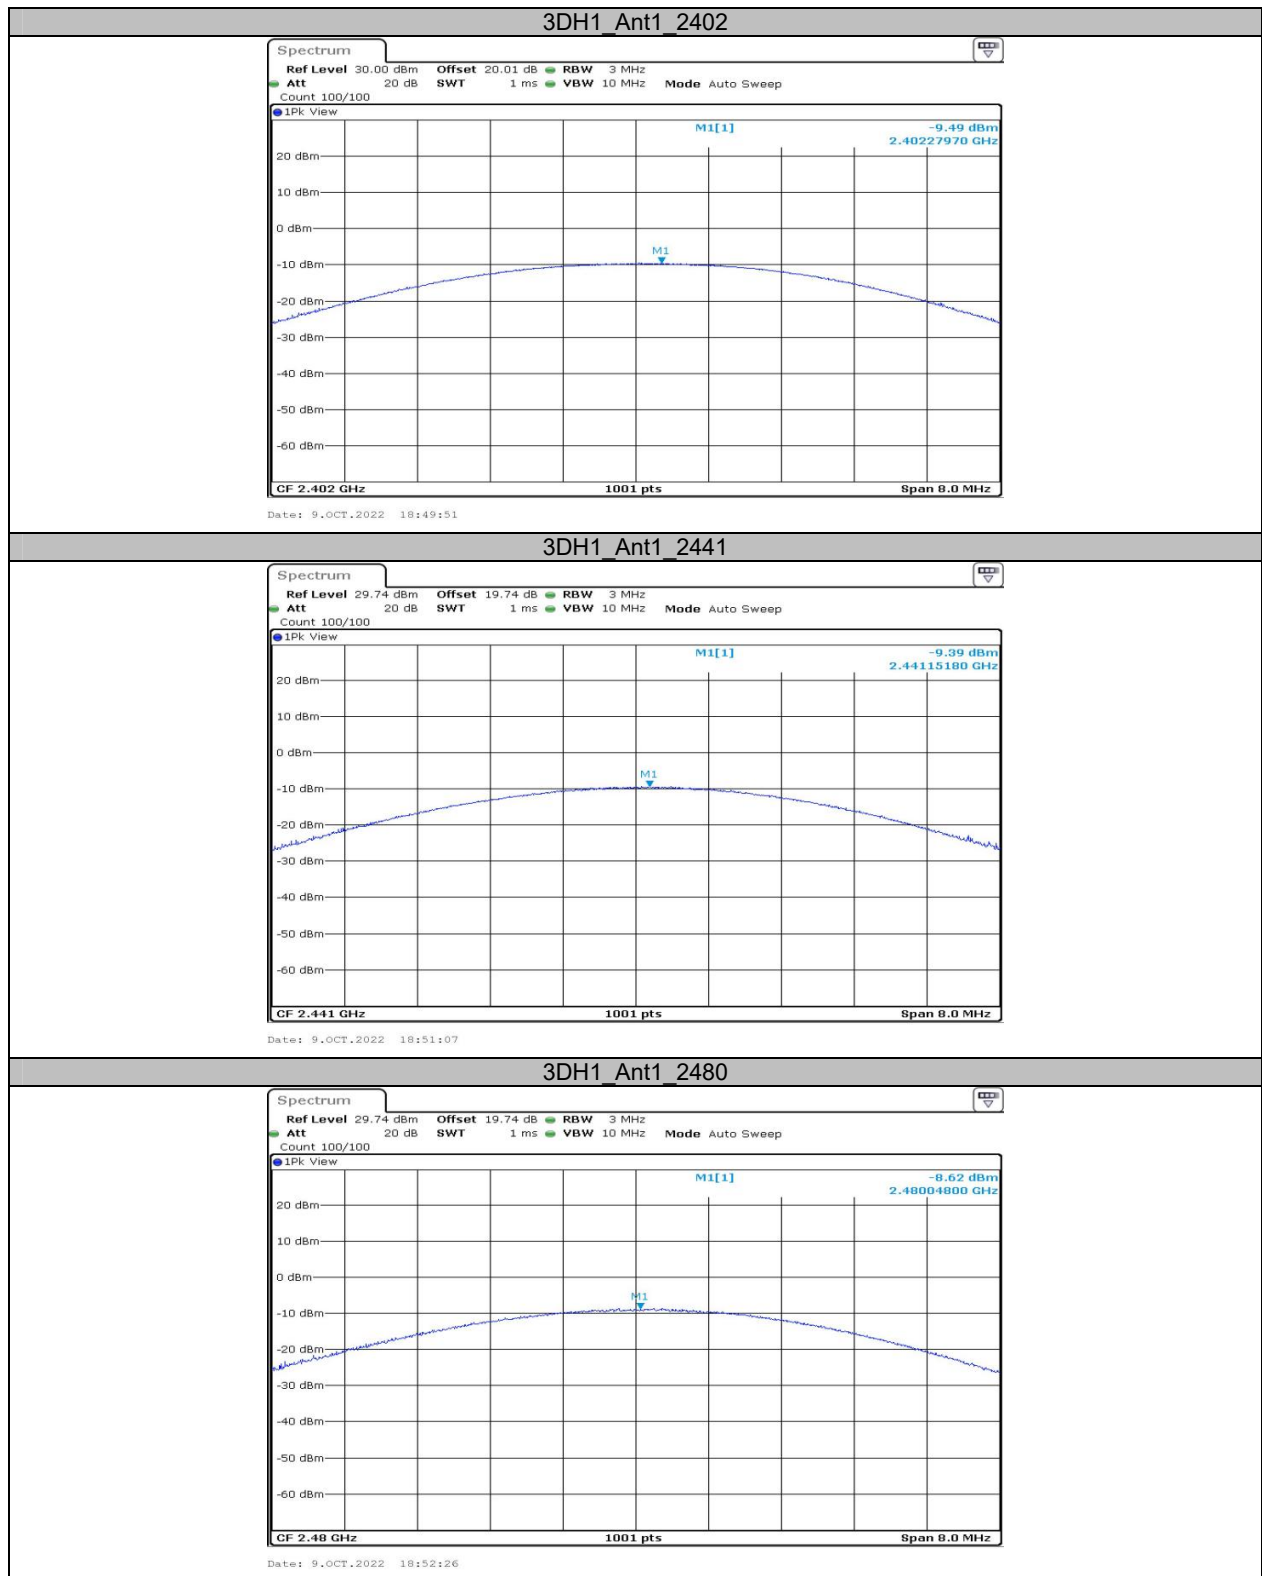




**Appendix D: Carrier frequency separation  
Test Result**

| Test Mode | Antenna | Channel | Result[MHz] | Limit[MHz]   | Verdict |
|-----------|---------|---------|-------------|--------------|---------|
| DH1       | Ant1    | Hop     | 1.003       | $\geq 0.613$ | PASS    |
| 2DH1      | Ant1    | Hop     | 1.003       | $\geq 0.900$ | PASS    |
| 3DH1      | Ant1    | Hop     | 1           | $\geq 0.840$ | PASS    |

## Test Graphs

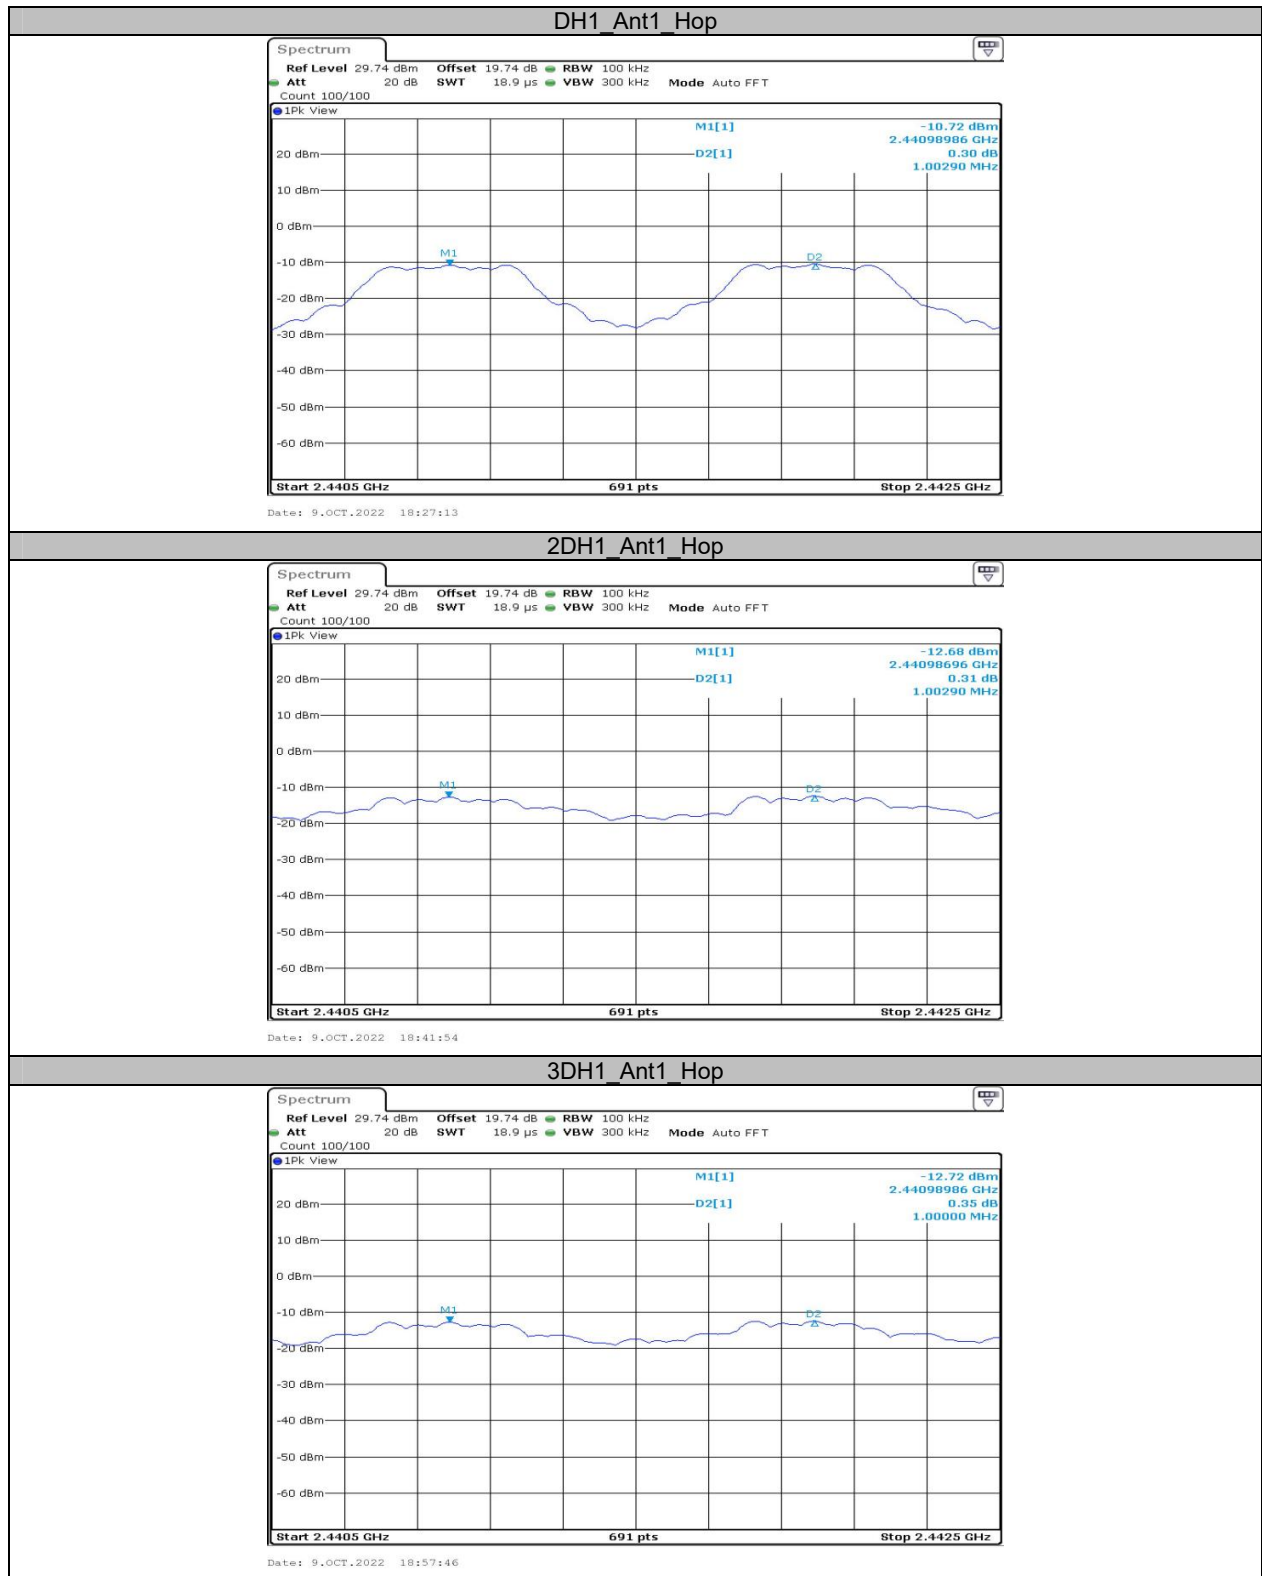

**Appendix E: Time of occupancy  
Test Result**


| Test Mode | Antenna | Channel | Burst Width<br>[ms] | Total Hops<br>[Num] | Result[s] | Limit[s] | Verdict |
|-----------|---------|---------|---------------------|---------------------|-----------|----------|---------|
| DH1       | Ant1    | Hop     | 0.38                | 320                 | 0.122     | ≤0.4     | PASS    |
| DH3       | Ant1    | Hop     | 1.63                | 160                 | 0.261     | ≤0.4     | PASS    |
| DH5       | Ant1    | Hop     | 2.87                | 120                 | 0.344     | ≤0.4     | PASS    |
| 2DH1      | Ant1    | Hop     | 0.39                | 320                 | 0.125     | ≤0.4     | PASS    |
| 2DH3      | Ant1    | Hop     | 1.63                | 160                 | 0.261     | ≤0.4     | PASS    |
| 2DH5      | Ant1    | Hop     | 2.87                | 110                 | 0.316     | ≤0.4     | PASS    |
| 3DH1      | Ant1    | Hop     | 0.39                | 320                 | 0.125     | ≤0.4     | PASS    |
| 3DH3      | Ant1    | Hop     | 1.63                | 170                 | 0.277     | ≤0.4     | PASS    |
| 3DH5      | Ant1    | Hop     | 2.88                | 120                 | 0.346     | ≤0.4     | PASS    |


Note 1: A period time= $0.4 \times 79 = 31.6(S)$ , Result=Burst Width\*Total hops


Note 2: Total hops=Hopping Number in  $3.16s \times 10$


Note 3: Hopping Number in  $3.16s$ =Total of highest signals in  $3.16s$  (Second high signals were other channel)


## Test Graphs

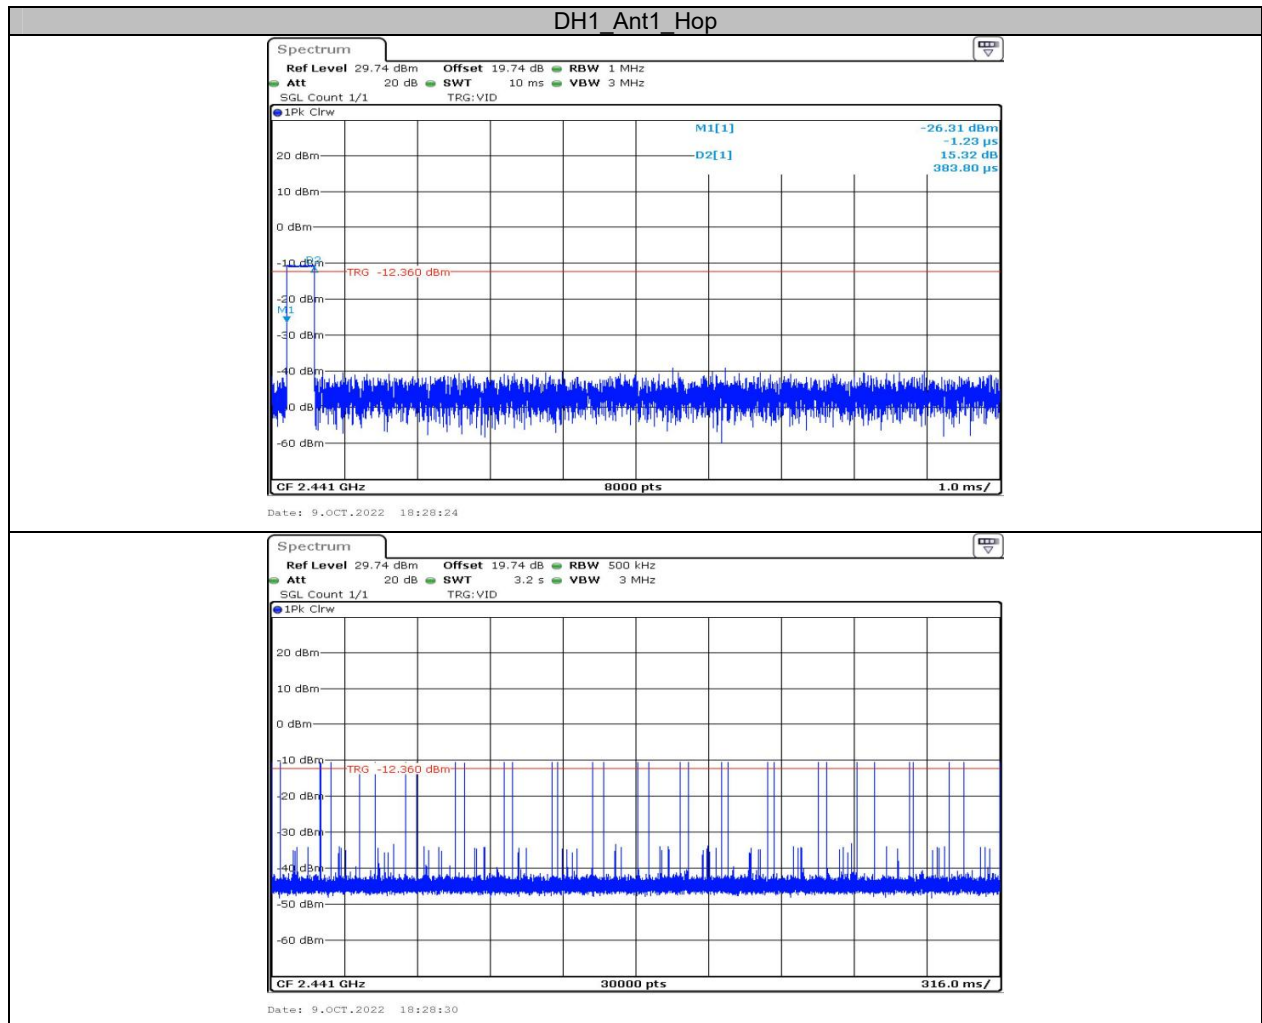

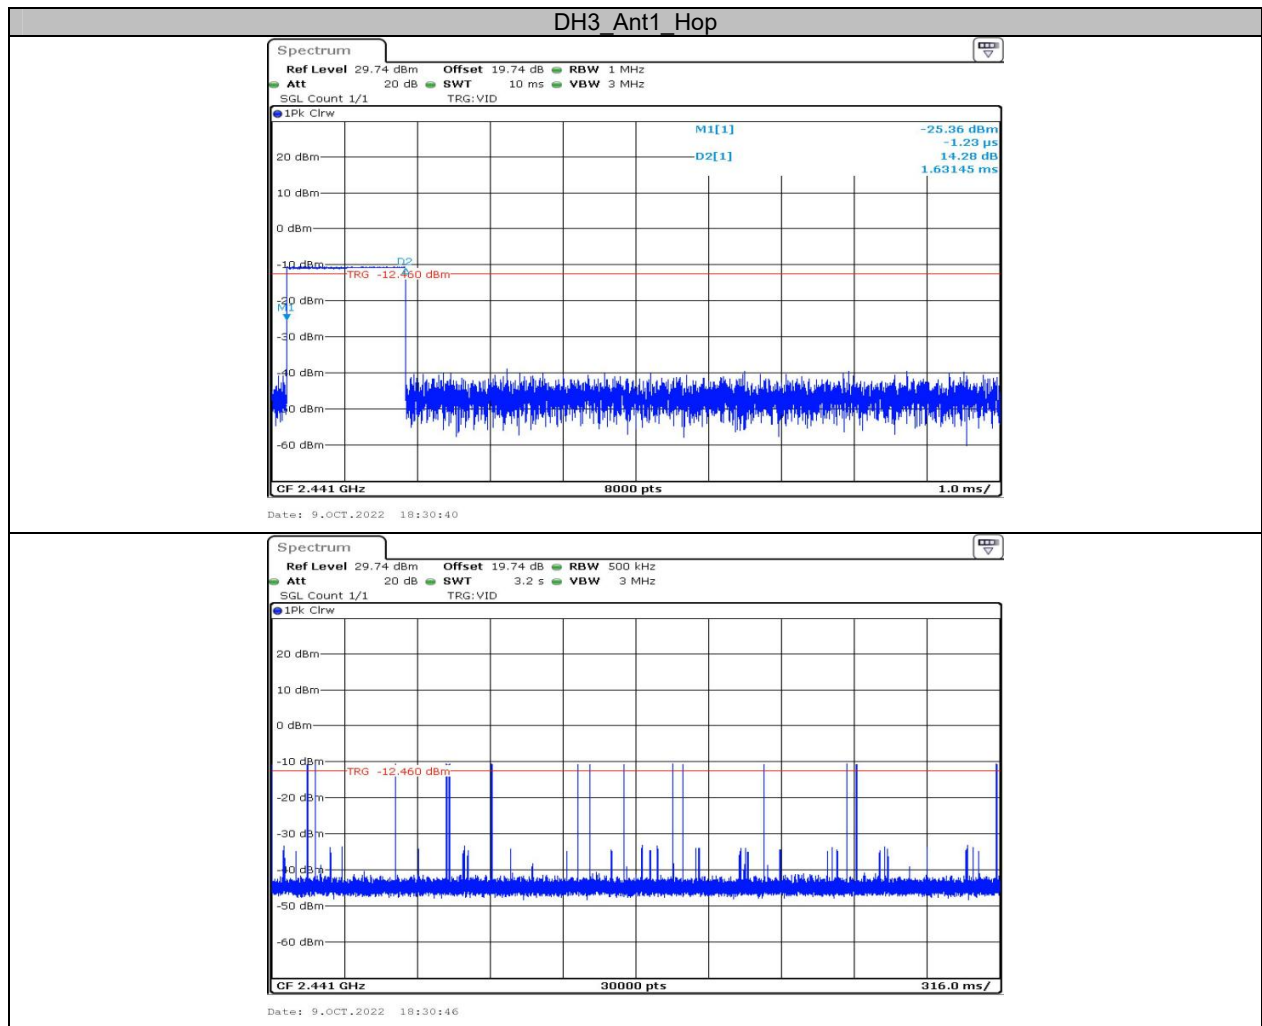


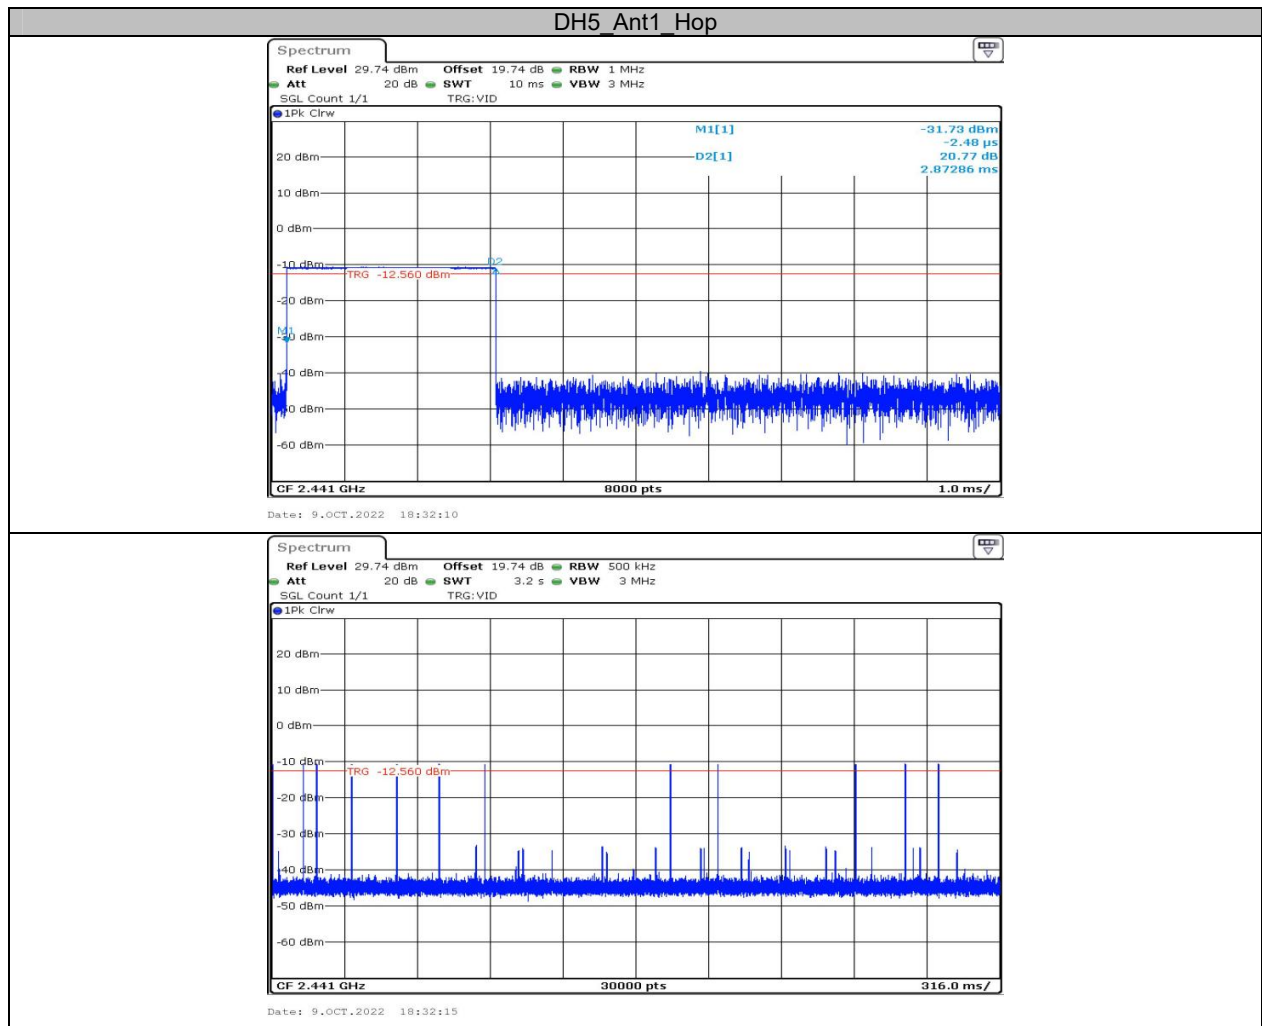


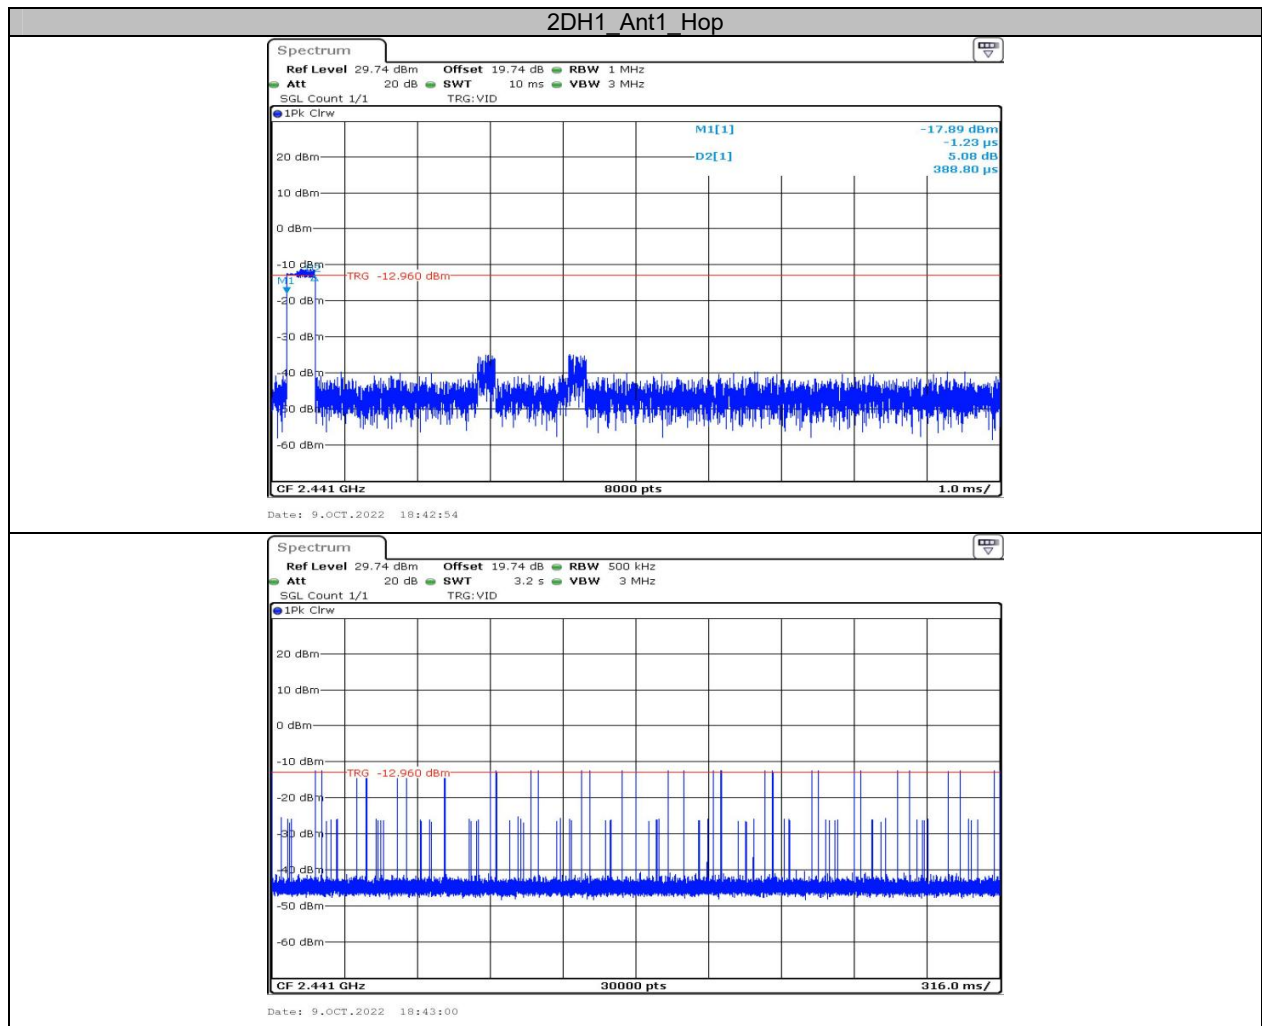


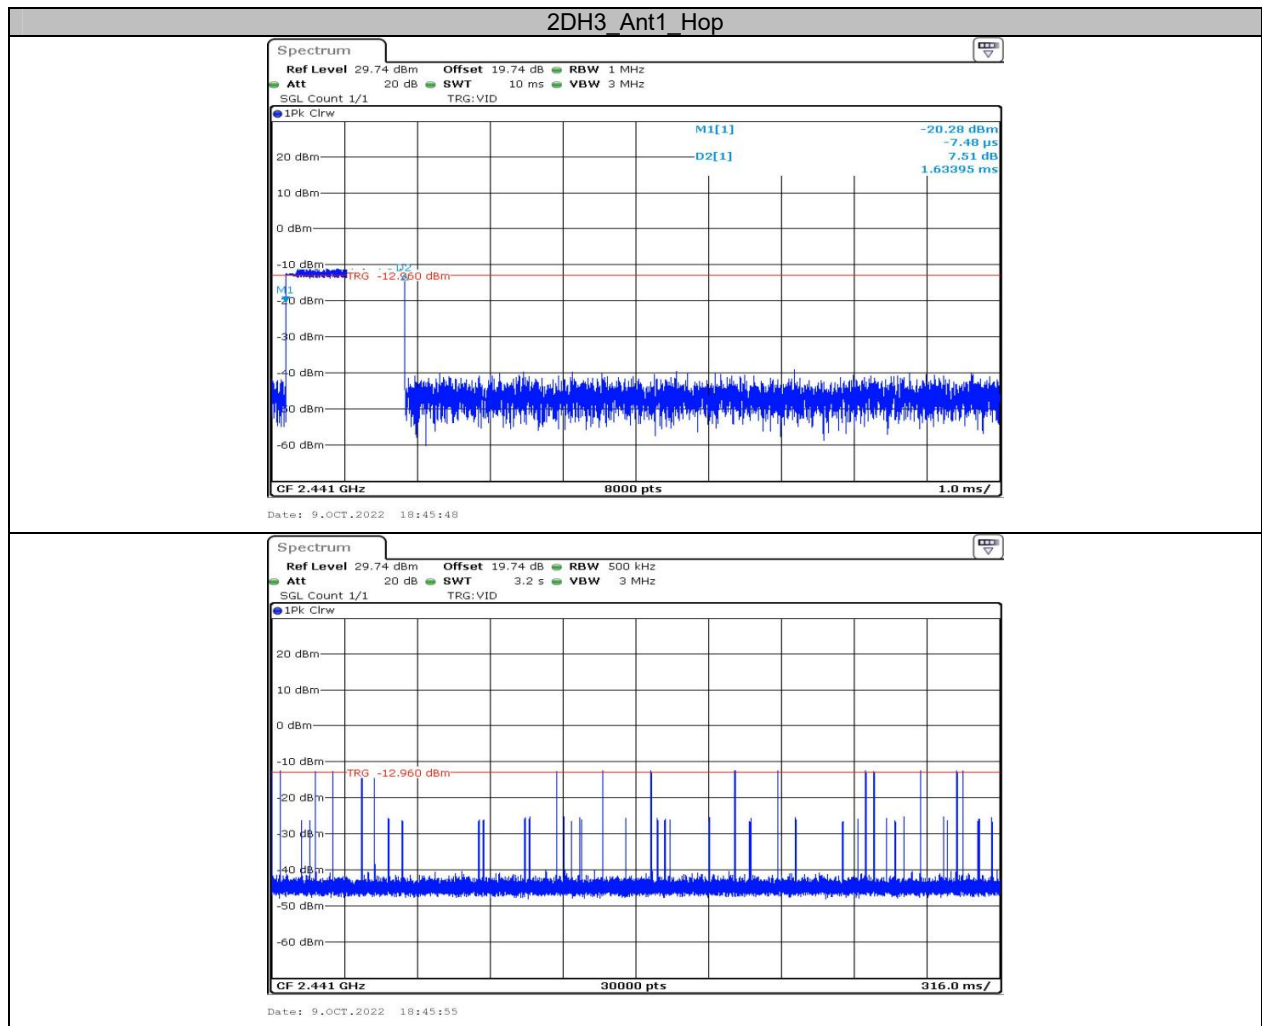




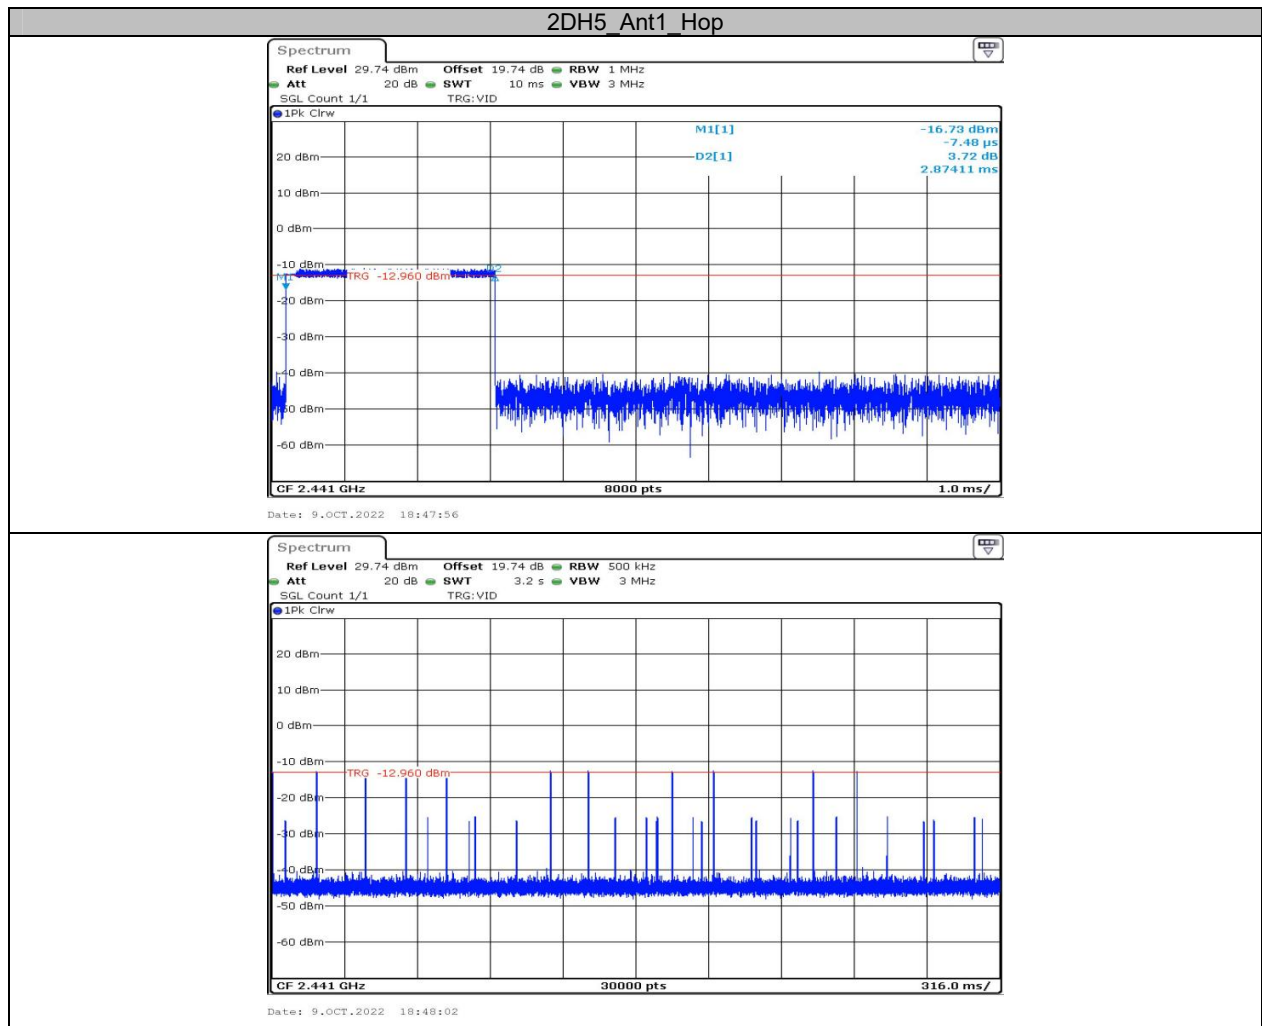

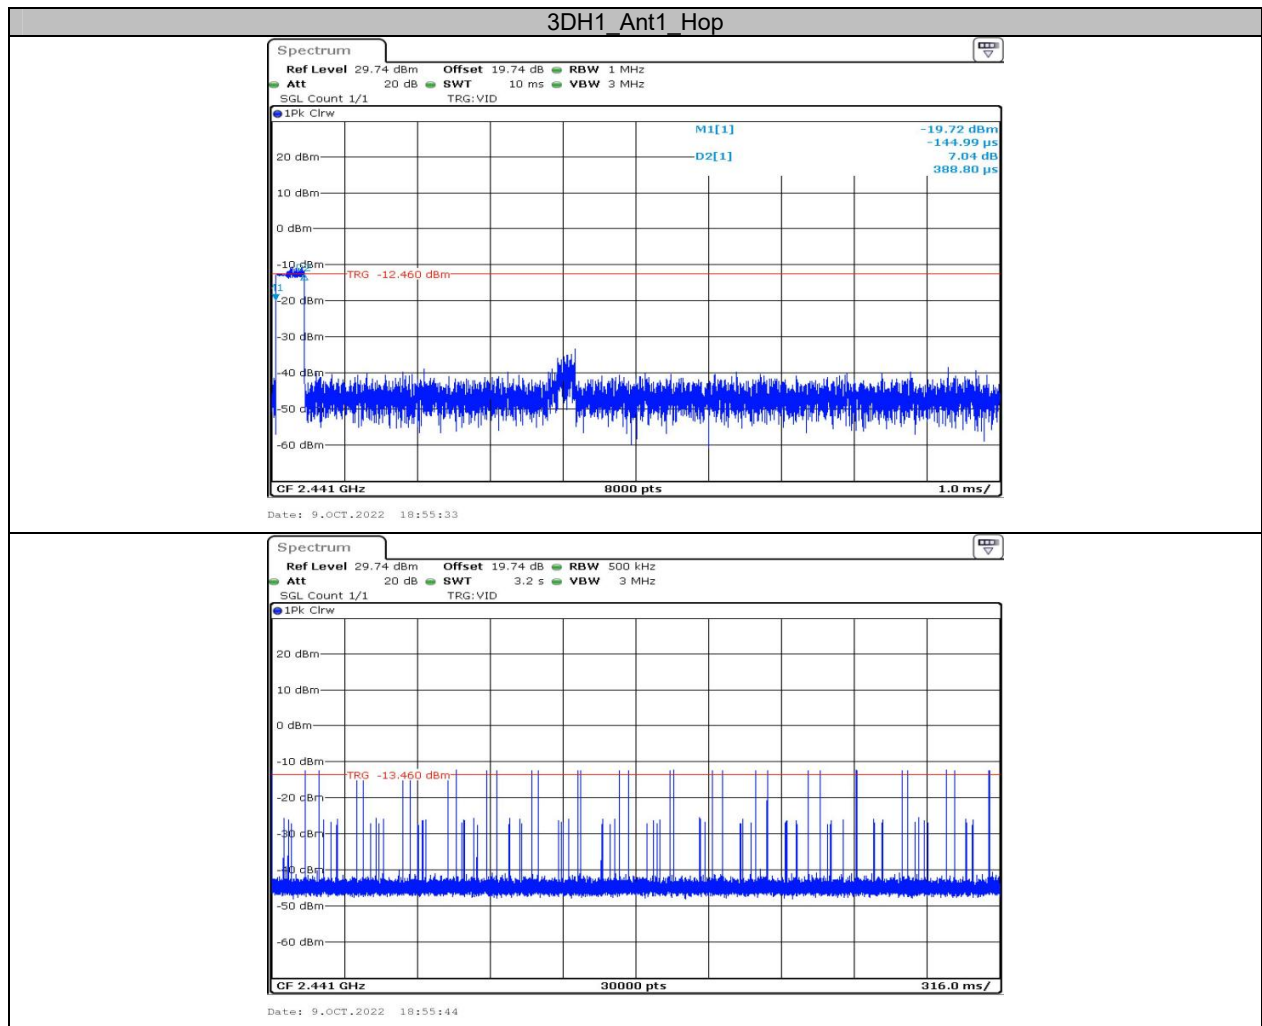

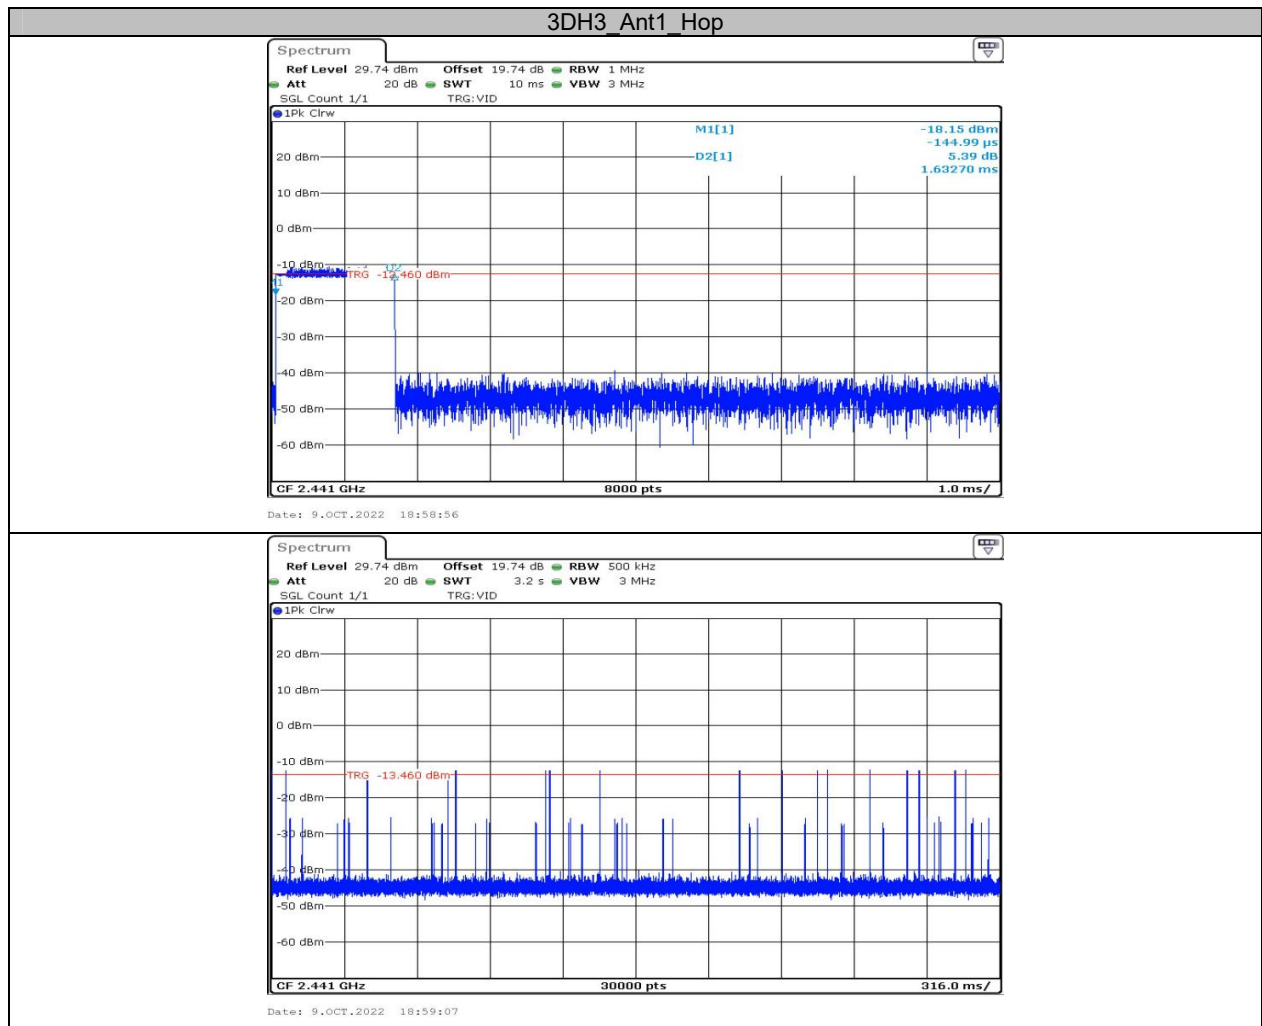

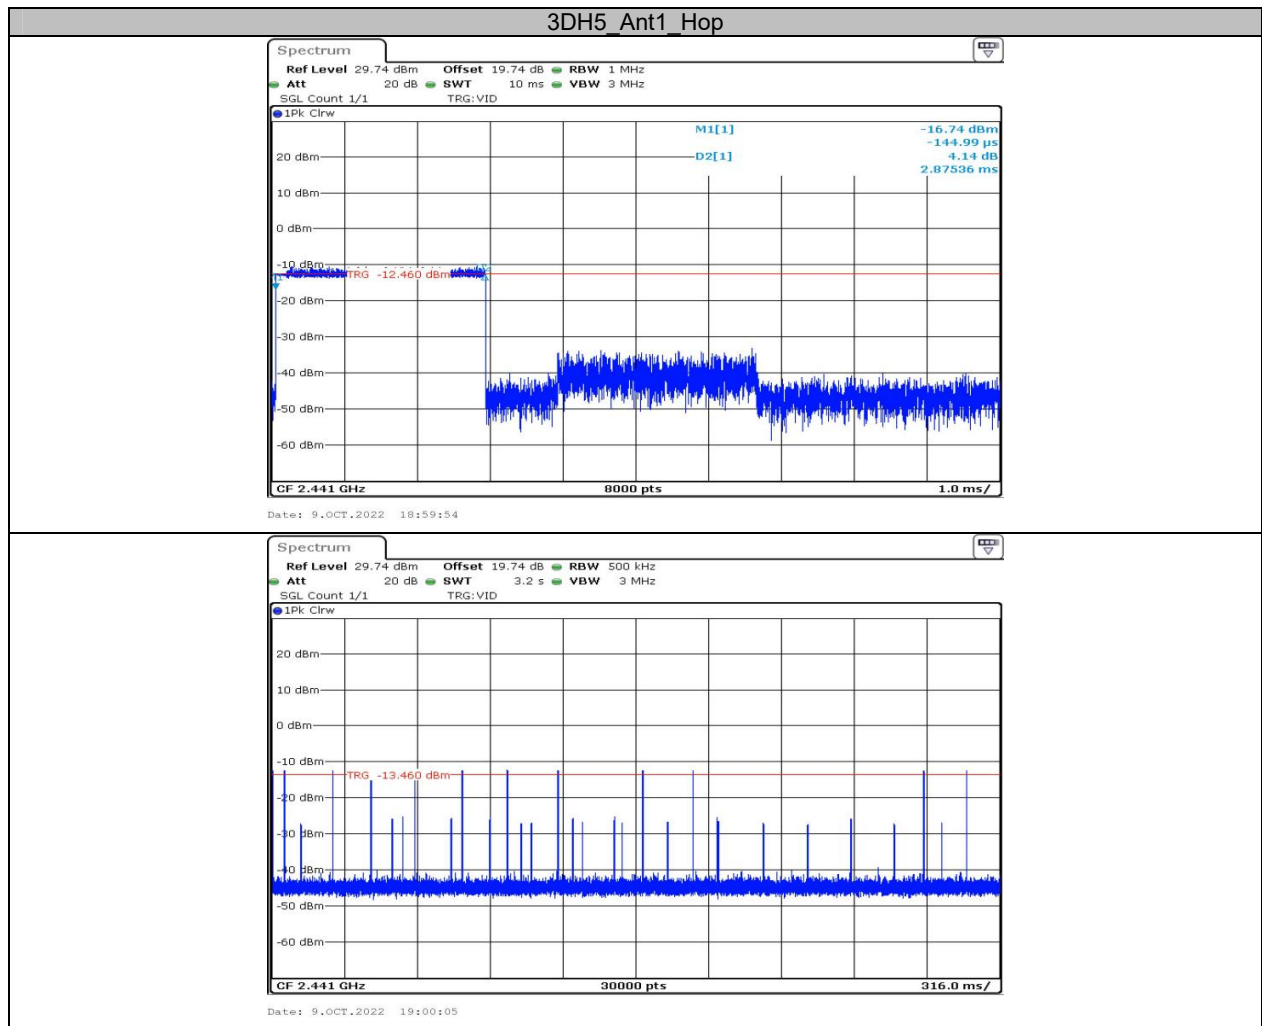


## Appendix F: Number of hopping channels

### Test Result

| Test Mode | Antenna | Channel | Result[Num] | Limit[Num] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| DH1       | Ant1    | Hop     | 79          | $\geq 15$  | PASS    |
| 2DH1      | Ant1    | Hop     | 79          | $\geq 15$  | PASS    |
| 3DH1      | Ant1    | Hop     | 79          | $\geq 15$  | PASS    |

### Test Graphs



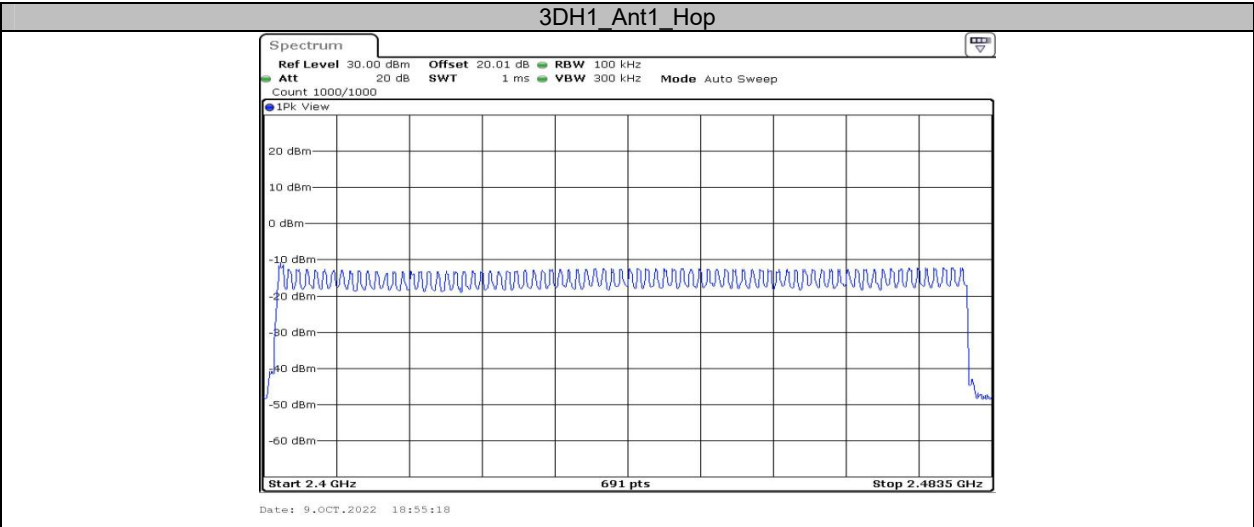

## Appendix G: Band edge measurements


### Test Graphs








## 2DH1\_Ant1\_Low\_Hop\_2402

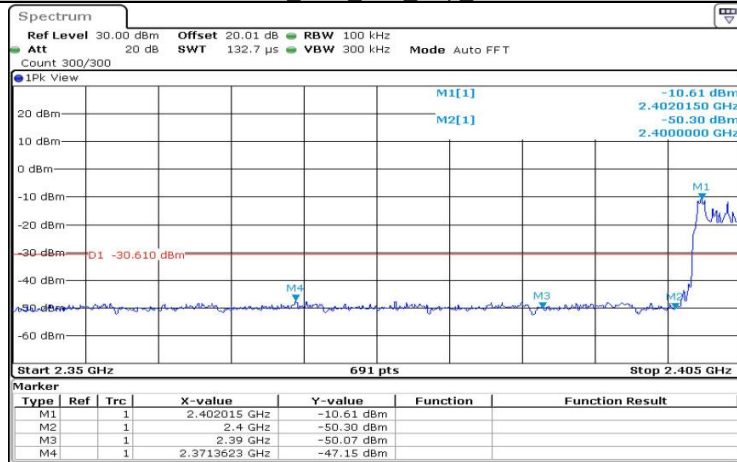


Date: 9.OCT.2022 18:41:26

## 2DH1\_Ant1\_High\_Hop\_2480

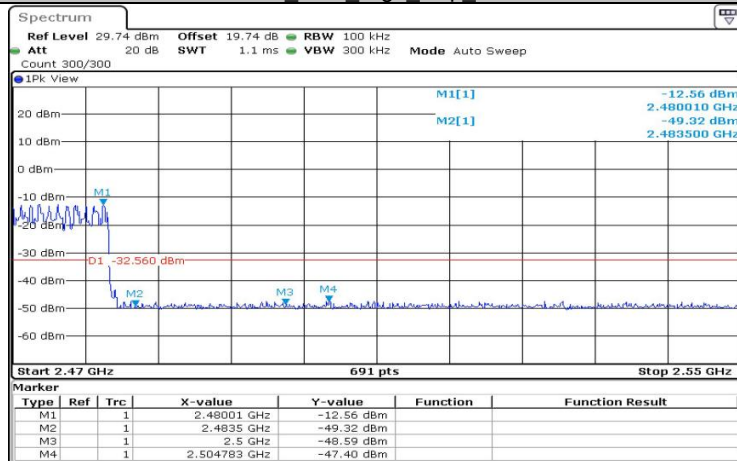

Date: 9.OCT.2022 18:43:12

## 3DH1\_Ant1\_Low\_2402

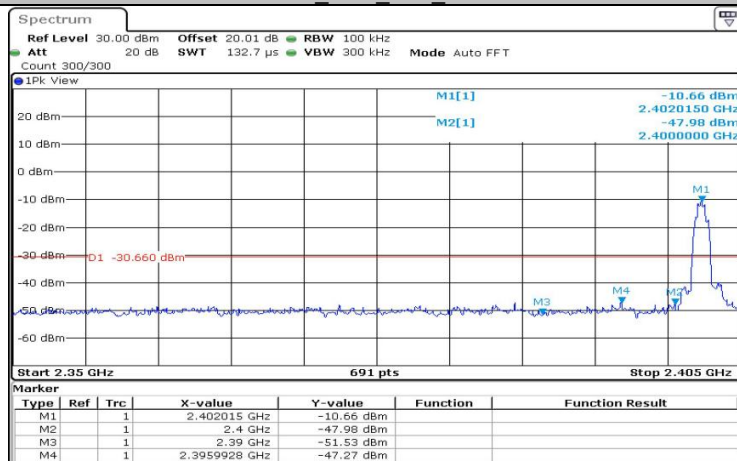

Date: 9.OCT.2022 18:49:41



\*\*\*\*\* END OF REPORT \*\*\*\*\*