

# TEST REPORT

<b>FCC Applicant:</b>	ATEN Technology, Inc., dba IOGEAR
<b>Address of Applicant:</b>	15365 Barranca Parkway Irvine, CA 92618
<b>IC Applicant:</b>	ATEN TECHNOLOGY INC, DBA IOGEAR
<b>Address of Applicant:</b>	15365 Barranca Pkwy Irvine, CA 92618
<b>Manufacturer:</b>	Lexking Technology Co., Ltd.
<b>Address of Manufacturer:</b>	7F-5, No.155, Zhongyang Rd., Xindian Dist., 23150 New Taipei City, Taiwan R.O.C
<b>Equipment Under Test (EUT)</b>	
Product Name:	Long Range 2.4GHz Wireless Keyboard and Mouse Combo-Mouse
Model No.:	GKM552RB
Trade Mark:	IOGEAR
<b>FCC ID:</b>	QLEGKM552RBM
<b>IC:</b>	8740A-KBGKM552RBM
<b>Applicable standards:</b>	FCC CFR Title 47 Part 15 Subpart C Section 15.249 RSS-Gen Issue 5 RSS-210 Issue 10
<b>Date of sample receipt:</b>	2020-07-22
<b>Date of Test:</b>	2020-07-23 to 2020-07-28
<b>Date of report issued:</b>	2020-07-29
<b>Test Result :</b>	PASS *

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	2020-07-29	Original

Prepared By:




Date:

2020-07-29

Project Engineer

Check By:



Date:

2020-07-29

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5.6 TEST FACILITY.....	8
5.7 TEST LOCATION .....	8
5.8 ADDITIONAL INSTRUCTIONS.....	8
6 TEST INSTRUMENTS LIST .....	9
7 TEST RESULTS AND MEASUREMENT DATA.....	11
7.1 ANTENNA REQUIREMENT .....	11
7.2 CONDUCTED EMISSIONS .....	12
7.3 RADIATED EMISSION METHOD.....	13
7.3.1 Field Strength of The Fundamental Signal .....	15
7.3.2 Spurious emissions.....	16
7.3.3 Bandedge emissions.....	21
7.4 20dB OCCUPY BANDWIDTH AND 99% BANDWIDTH .....	23
8 TEST SETUP PHOTO .....	26
9 EUT CONSTRUCTIONAL DETAILS .....	26

## 4 Test Summary

Test Item	Section	Result
Antenna requirement	15.203 RSS-Gen Section 6.8	Pass
AC Power Line Conducted Emission	15.207 RSS-Gen Section 8.8	N/A
Field strength of the fundamental signal	15.249 (a) RSS-210 B10(a)	Pass
Spurious emissions	15.249 (a) (d)/15.209 RSS-210 B10(a)&(b) RSS-Gen Clause 8.9&8.10	Pass
Band edge	15.249 (d)/15.205 RSS-210 B10(b)& RSS-Gen Clause 8.9&8.10	Pass
20dB Occupied Bandwidth 99% Occupied Bandwidth	15.215 (c) RSS-Gen 6.7	Pass

Remarks:

1. Test according to ANSI C63.10: 2013.
2. Pass: The EUT complies with the essential requirements in the standard.
3. N/A: Not applicable.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Long Range 2.4GHz Wireless Keyboard and Mouse Combo-Mouse
Model No.:	GKM552RB
Test model:	GKM552RB
Remark: /.	
Serial No.:	N/A
Hardware version:	GKM552RBM-HW-V1
Software version:	GKM552RBM-FW-V1
Test sample(s) ID:	GTS202007000299-1
Sample(s) Status	Engineered sample
Operation Frequency:	2408MHz~2474MHz
Channel numbers:	34
Channel separation:	2MHz
Modulation type:	FSK
Antenna Type:	PCB antenna
Antenna gain:	-0.61dBi(declare by applicant)
Power supply:	DC 1.5V From battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2408MHz	9	2426MHz	18	2444MHz	27	2462 MHz
1	2410MHz	10	2428MHz	19	2446MHz	28	2464 MHz
2	2412 MHz	11	2430 MHz	20	2448 MHz	29	2466MHz
3	2414 MHz	12	2432 MHz	21	2450 MHz	30	2468MHz
4	2416 MHz	13	2434 MHz	22	2452 MHz	31	2470MHz
5	2418 MHz	14	2436 MHz	23	2454 MHz	32	2472MHz
6	2420 MHz	15	2438 MHz	24	2456 MHz	33	2474MHz
7	2422 MHz	16	2440 MHz	25	2458 MHz	/	/
8	2424 MHz	17	2442 MHz	26	2460 MHz	/	/

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2408MHz
The middle channel	2440MHz
The Highest channel	2474MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the dutycycle &gt;98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	89.75	93.61	87.34

## 5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

## 5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

## 5.8 Additional Instructions

Test Software	/
Software name	/
Software version	/
Power level setup	/



## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

## 7 Test results and Measurement Data


### 7.1 Antenna requirement



<b>Standard requirement:</b>
<p><b>FCC part 15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
<p><b>RSS-Gen 6.8:</b></p> <p>The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.</p> <p>For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).</p>
<b>EUT Antenna:</b>
<i>The antenna is PCB antenna, the best case gain of the antenna refer to section 5.1, reference to the appendix II for details</i>

## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 RSS-Gen Section 8.8																			
Test Method:	ANSI C63.10:2013 and RSS-Gen																			
Test Frequency Range:	150KHz to 30MHz																			
Class / Severity:	Class B																			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																			
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* Decreases with the logarithm of the frequency.</p>						Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																			
	Quasi-peak	Average																		
0.15-0.5	66 to 56*	56 to 46*																		
0.5-5	56	46																		
5-30	60	50																		
Test setup:	<div><p style="text-align: center;"><b>Reference Plane</b></p><p>Remark: E.U.T.: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>																			
Test procedure:	<div><div>1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2014 on conducted measurement.</div></div>																			
Test Instruments:	Refer to section 6.0 for details																			
Test mode:	Refer to section 5.2 for details																			
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar														
Test voltage:	AC 120V, 60Hz																			
Test results:	N/A; Because the EUT is powered by the battery, so the item is not applicable.																			

## 7.3 Radiated Emission Method

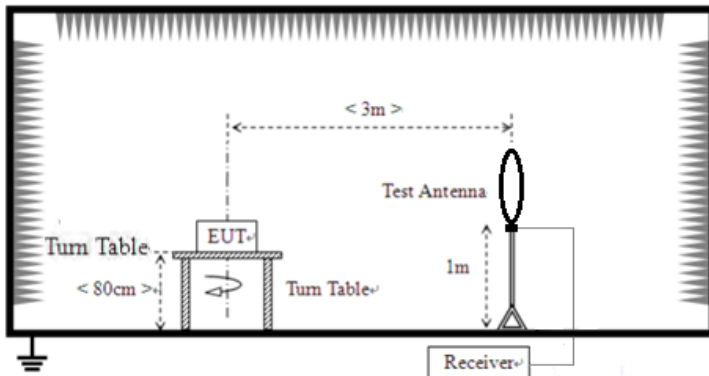Test Requirement:	FCC Part15 C Section 15.209 , 15.249 (a) &(d) RSS-210 B10(a)& RSS-210 B10(b)& RSS-Gen Clause 8.9&8.10				
Test Method:	ANSI C63.10: 2013 & RSS-Gen				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
5000 @3m			Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	<div>For radiated emissions from 9kHz to 30MHz</div> <div></div> <div>For radiated emissions from 30MHz to 1GHz</div>				

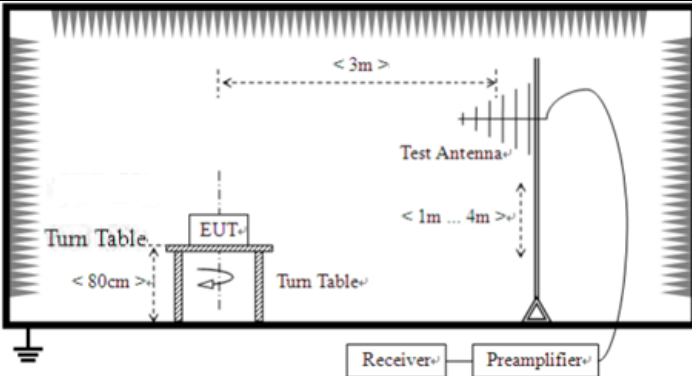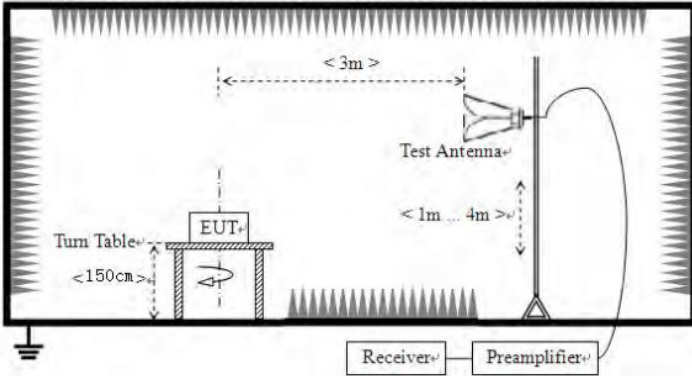	<div></div> <p>For radiated emissions above 1GHz</p> <div></div>						
Test Procedure:	<ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li></ol>						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	<table><tr><td>Temp.:</td><td>25 °C</td><td>Humid.:</td><td>52%</td><td>Press.:</td><td>1012mbar</td></tr></table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
Test voltage:	DC 3V						
Test results:	Pass						

## Measurement data:

## 7.3.1 Field Strength of The Fundamental Signal

### Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2408	106.83	-14.42	92.41	114	-21.59	Vertical
2408	104.7	-14.42	90.28	114	-23.72	Horizontal
2440	107.92	-14.30	93.62	114	-20.38	Vertical
2440	105.54	-14.30	91.24	114	-22.76	Horizontal
2474	107.52	-14.15	93.37	114	-20.63	Vertical
2474	105.86	-14.15	91.71	114	-22.29	Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2408	102.04	-14.42	87.62	94	-6.38	Vertical
2408	101.36	-14.42	86.94	94	-7.06	Horizontal
2440	103.77	-14.30	86.47	94	-7.53	Vertical
2440	102.86	-14.30	87.56	94	-6.44	Horizontal
2474	101.81	-14.15	87.66	94	-6.34	Vertical
2474	100.44	-14.15	86.29	94	-7.71	Horizontal


## 7.3.2 Spurious emissions

### ■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

### ■ Below 1GHz


Horizontal:

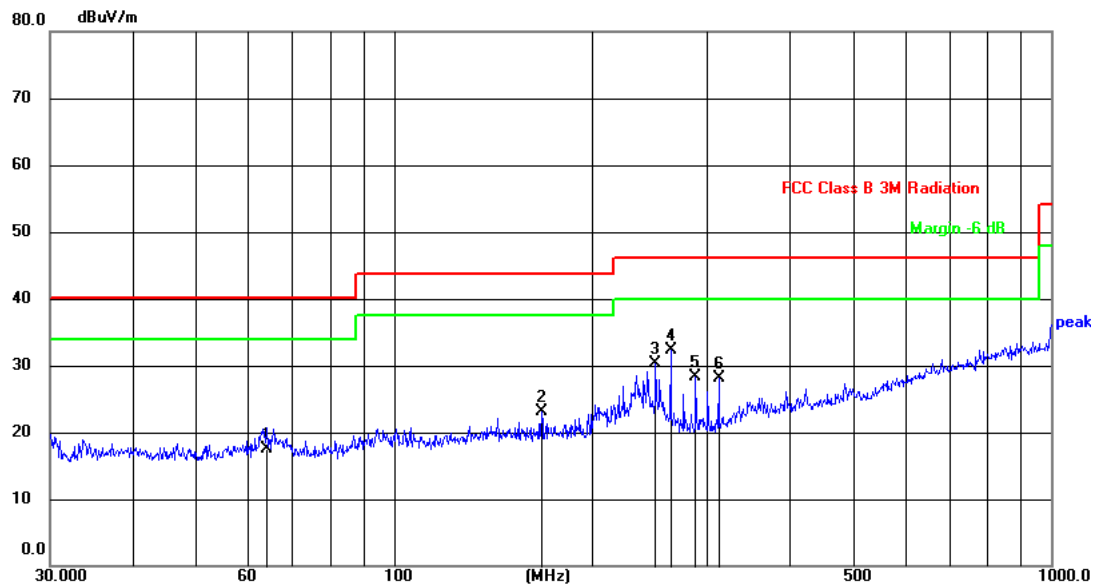

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	64.2074	38.31	-20.71	17.60	40.00	-22.40	QP
2	167.8240	41.41	-18.31	23.10	43.50	-20.40	QP
3	250.3009	48.60	-18.20	30.40	46.00	-15.60	QP
4	263.8190	50.42	-18.12	32.30	46.00	-13.70	QP
5	287.9904	46.77	-18.47	28.30	46.00	-17.70	QP
6	312.1794	46.37	-18.27	28.10	46.00	-17.90	QP



**Vertical:**

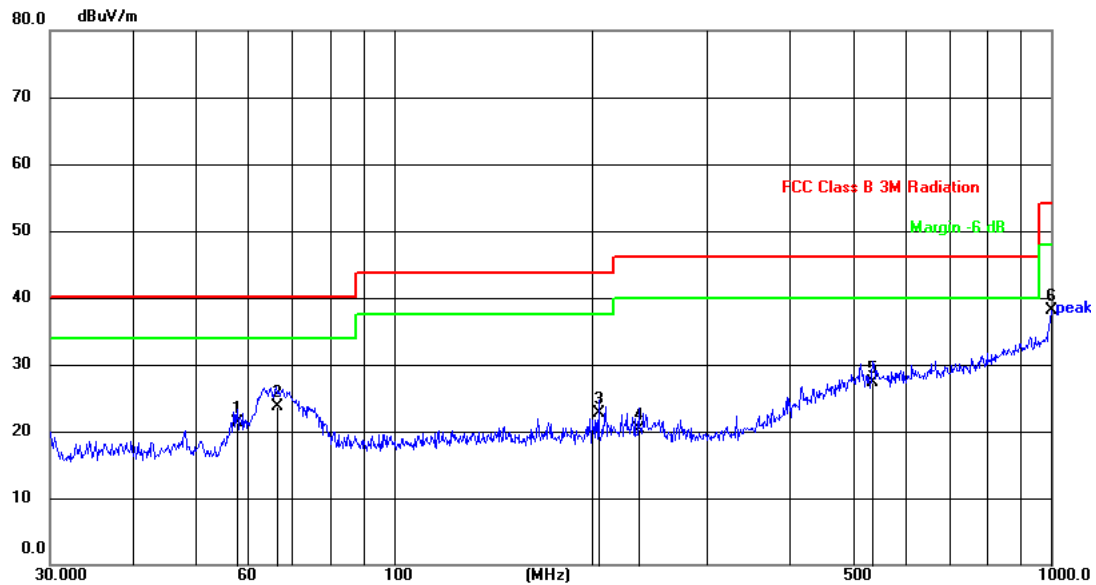

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	57.7961	42.08	-20.78	21.30	40.00	-18.70	QP
2	66.2662	44.32	-20.62	23.70	40.00	-16.30	QP
3	204.9551	41.53	-18.73	22.80	43.50	-20.70	QP
4	235.8163	38.72	-18.32	20.40	46.00	-25.60	QP
5	535.7073	40.25	-12.85	27.40	46.00	-18.60	QP
6	1000.0000	41.65	-3.45	38.20	54.00	-15.80	QP

## ■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

### Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4816.00	56.41	-9.88	46.53	74	-27.47	Vertical
7224.00	51.40	-4.12	47.28	74	-26.72	Vertical
9632.00	---	---	---	---	---	Vertical
12040.00	---	---	---	---	---	Vertical
4816.00	54.71	-9.88	44.83	74	-29.17	Horizontal
7224.00	49.39	-4.12	45.27	74	-28.73	Horizontal
9632.00	---	---	---	---	---	Horizontal
12040.00	---	---	---	---	---	Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4816.00	51.16	-9.88	41.28	54	-12.72	Vertical
7224.00	44.51	-4.12	40.39	54	-13.61	Vertical
9632.00	---	---	---	---	---	Vertical
12040	---	---	---	---	---	Vertical
4816.00	50.90	-9.88	41.02	54	-12.98	Horizontal
7224.00	43.51	-4.12	39.39	54	-14.61	Horizontal
9632.00	---	---	---	---	---	Horizontal
12040	---	---	---	---	---	Horizontal

### Remark:

1. Final Level = Receiver Read level + Correction Factor (Antenna Factor + Cable Loss – Preamplifier Factor)
2. The emission levels of other frequencies are more than 20 dB below the limit and not show in test report.
3. “---”, means this data is too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

## Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	52.17	-9.79	42.38	74	-31.62	Vertical
7320.00	47.38	-3.85	43.53	74	-30.47	Vertical
9760.00	---	---	---	---	---	Vertical
12200.00	---	---	---	---	---	Vertical
4880.00	51.08	-9.79	41.29	74	-32.71	Horizontal
7320.00	44.79	-3.85	40.94	74	-33.06	Horizontal
9760.00	---	---	---	---	---	Horizontal
12200.00	---	---	---	---	---	Horizontal

## Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	49.98	-9.79	40.19	54	-13.81	Vertical
7320.00	44.70	-3.85	40.85	54	-13.15	Vertical
9760.00	---	---	---	---	---	Vertical
12200.00	---	---	---	---	---	Vertical
4880.00	49.43	-9.79	39.64	54	-14.36	Horizontal
7320.00	42.88	-3.85	39.03	54	-14.97	Horizontal
9760.00	---	---	---	---	---	Horizontal
12200.00	---	---	---	---	---	Horizontal

## Remark:

1. Final Level =Receiver Read level +Correction Factor(Antenna Factor + Cable Loss – Preamplifier Factor )
2. The emission levels of other frequencies are more than 20 dB below the limit and not show in test report.
3. “---”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

## Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4948.00	51.47	-9.7	41.77	74	-32.23	Vertical
7422.00	47.50	-3.55	43.95	74	-30.05	Vertical
9896.00	---	---	---	---	---	Vertical
12370.00	---	---	---	---	---	Vertical
4948.00	50.66	-9.7	40.96	74	-33.04	Horizontal
7422.00	46.62	-3.55	43.07	74	-30.93	Horizontal
9896.00	---	---	---	---	---	Horizontal
12370.00	---	---	---	---	---	Horizontal

## Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4948.00	49.22	-9.7	39.52	54	-14.48	Vertical
7422.00	44.58	-3.55	41.03	54	-12.97	Vertical
9896.00	---	---	---	---	---	Vertical
12370.00	---	---	---	---	---	Vertical
4948.00	48.11	-9.7	38.41	54	-15.59	Horizontal
7422.00	41.71	-3.55	38.16	54	-15.84	Horizontal
9896.00	---	---	---	---	---	Horizontal
12370.00	---	---	---	---	---	Horizontal

## Remark:

1. Final Level = Receiver Read level + Correction Factor (Antenna Factor + Cable Loss – Preamplifier Factor)
2. The emission levels of other frequencies are more than 20 dB below the limit and not show in test report.
3. “---”, means this data is too weak instrument of signal is unable to test.

### 7.3.3 Bandedge emissions

*All of the restriction bands were tested, and only the data of worst case was exhibited.*

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	58.06	-14.50	43.56	74	-30.44	Horizontal
2400.00	58.19	-14.45	43.74	74	-30.26	Horizontal
2390.00	58.41	-14.13	44.28	74	-29.72	Vertical
2400.00	58.45	-14.06	44.39	74	-29.61	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	52.12	-14.50	37.62	54	-16.38	Horizontal
2400.00	52.03	-14.45	37.58	54	-16.42	Horizontal
2390.00	52.78	-14.50	38.28	54	-15.72	Vertical
2400.00	52.81	-14.45	38.36	54	-15.64	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	56.79	-14.13	42.66	74	-31.34	Horizontal
2500.00	56.57	-14.06	42.51	74	-31.49	Horizontal
2483.50	57.11	-14.13	42.98	74	-31.02	Vertical
2500.00	56.94	-14.06	42.88	74	-31.12	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	51.72	-14.13	37.59	54	-16.41	Horizontal
2500.00	51.73	-14.06	37.67	54	-16.33	Horizontal
2483.50	52.57	-14.13	38.44	54	-15.56	Vertical
2500.00	52.27	-14.06	38.21	54	-15.79	Vertical

Remark:

1. *Final Level = Receiver Read level + Correction Factor ( Antenna Factor + Cable Loss – Preamplifier Factor )*

## 7.4 20dB Occupy Bandwidth and 99% bandwidth

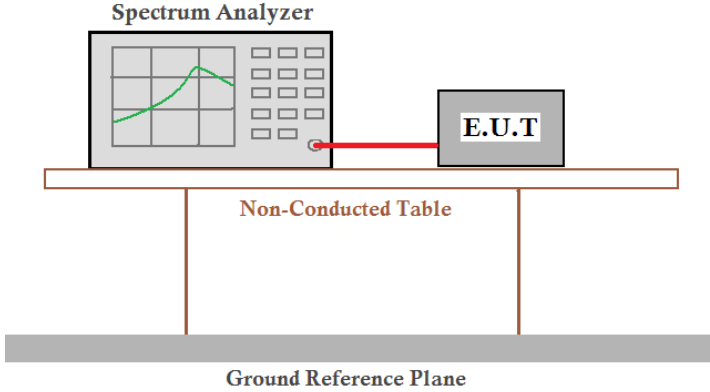
Test Requirement:	FCC Part15 C Section 15.215 RSS-Gen Section 6.7
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	2.272	Pass
Middle	2.261	Pass
Highest	2.240	Pass

Test channel	99% bandwidth(MHz)	Result
Lowest	2.0701	Pass
Middle	2.0549	
Highest	2.0783	

Test plot as follows:

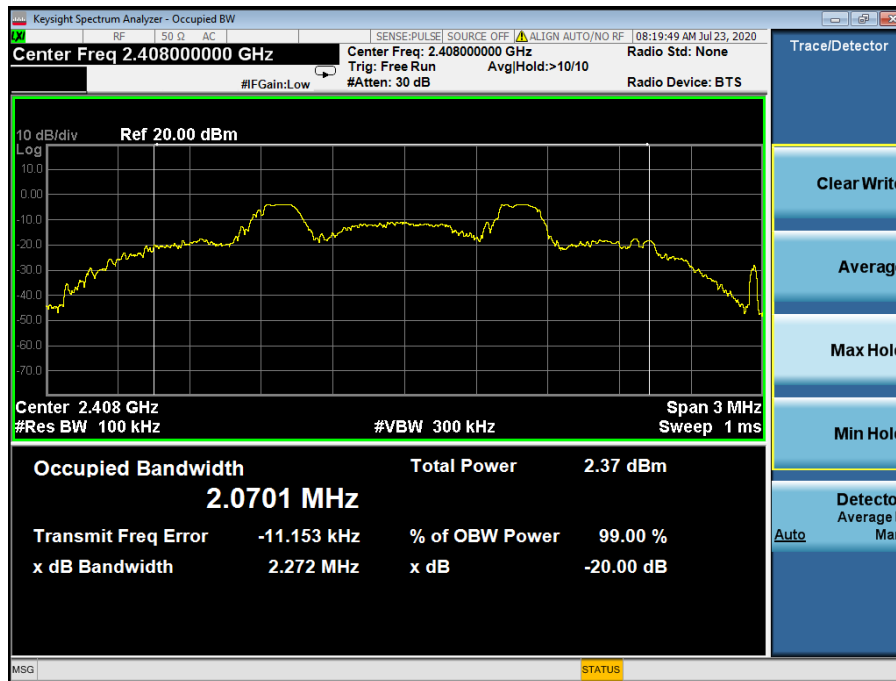


Lowest channel



Middle channel



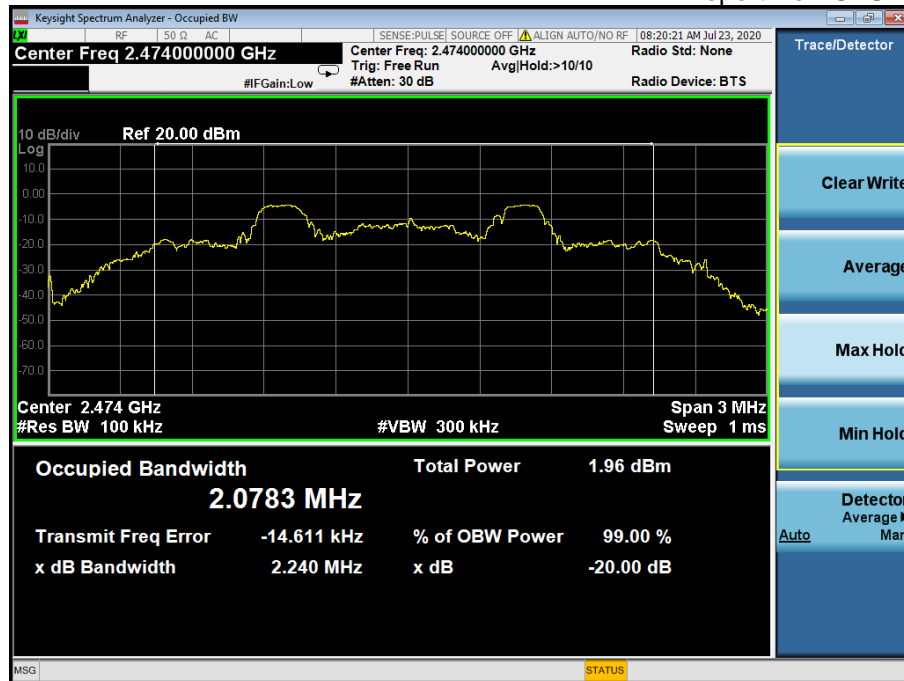

Highest channel

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----