



No.:
FCCSZ2024-0006-RF1

TEST REPORT

FCC ID : 2AUTE-4TS24A




NAME OF SAMPLE : Photo Printer

APPLICANT : Xiamen Hanin Co., Ltd.

CLASSIFICATION OF TEST : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: Xiamen Hanin Co., Ltd. Address: Room 305A, Angye Building, Pioneering Park,Torch High-tech Zone,Xiamen,China	
Manufacturer		Name: Xiamen Hanin Co., Ltd. Address: Room 305A, Angye Building, Pioneering Park,Torch High-tech Zone,Xiamen,China	
Equipment Under Test		Name: Photo Printer Model/Type: HCP-4TS24A Additional Models/Types: CP4100 Brand: N/A Serial NO.: N/A Sample NO.: 4-1	
Date of Receipt.	2024.01.23	Date of Testing	2024.01.24 ~ 2024.03.01
Test Specification		Test Result	
FCC Part 15, Subpart C, Section 15.247		PASS	
Evaluation of Test Result	The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Issue Date: 2024.03.01		
Tested by:  Zhu Yulin Name Signature	Reviewed by:  Huang Meng Name Signature	Approved by:  Dong Sanbi Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	7
2 GENERAL INFORMATION	8
2.1 GENERAL PRODUCT INFORMATION	8
2.2 DESCRIPTION OF ACCESSORIES	8
2.3 OTHER INFORMATION	9
2.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
2.6 DESCRIPTION OF SUPPORT UNITS	12
3 TEST TYPES AND RESULTS	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION AND RESTRICTED BANDS MEASUREMENTS	16
3.3 NUMBER OF HOPPING FREQUENCY USED	24
3.4 DWELL TIME ON EACH CHANNEL	25
3.5 20DB EMISSION BANDWIDTH	26
3.6 HOPPING CHANNEL SEPARATION	27
3.7 CONDUCTED OUTPUT POWER	28
3.8 OUT OF BAND EMISSION AND BAND EDGE MEASUREMENTS	29
3.9 OCCUPIED BANDWIDTH MEASUREMENT	30
4 PHOTOGRAPHS OF TEST SETUP	31
5 PHOTOGRAPHS OF THE EUT	32
6 APPENDIX A	33
6.1 20DB EMISSION BANDWIDTH	33
6.2 CONDUCTED OUTPUT POWER	37
6.3 HOPPING CHANNEL SEPARATION	38
6.4 DELL TIME OF EACH CHANNEL	40
6.5 NUMBER OF HOPPING CHANNELS	41
6.6 BAND EDGE MEASUREMENTS	46
6.7 OUT OF BAND EMISSION MEASUREMENT	51
6.8 OCCUPIED CHANNEL BANDWIDTH (FOR REFERENCE)	61



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2024-0006-RF1	Original release	2024.03.01



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15 Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC Part 15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit
FCC Part 15.247(a)(1)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
FCC Part 15.247(a)(1)	Hopping Channel Separation	PASS	Meet the requirement of limit.
FCC Part 15.247(a)(1)	Dell Time of Each Channel	PASS	Meet the requirement of limit.
FCC Part 15.247(a)(1)	20dB Emissions Bandwidth	PASS	Meet the requirement of limit.
---	Occupied Channel Bandwidth	N/A	For reference
FCC Part 15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
FCC Part 15.247(d), FCC Part 15.209,15.205	Radiated Emission and Restricted bands Measurements	PASS	Meet the requirement of limit.
FCC Part 15.247(d)	Out of band Emission and Band edge measurements	PASS	Meet the requirement of limit.
FCC Part 15.203 FCC Part 15.247(b)	Antenna Requirement	PASS	No antenna connector is used.



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Antenna Port Conducted Test					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 30	104408	1 year	2024.5.21
#3Shielding room	MORI	443	N/A	3 year	2026.5.16
Wideband radio communication tester	Rohde&Schwarz	CMW 500	168778	1 year	2024.5.25
Analog signal Generator (100kHz ~ 40GHz)	Rohde&Schwarz	SMB 100A	181934	1 year	2024.5.21
Vector signal Generator (9kHz ~ 6GHz)	Keysight	N5182B	MY57301451	1 year	2024.4.25
Vector signal Generator (9kHz ~ 6GHz)	Rohde&Schwarz	SGT 100A	111724	1 year	2024.5.21
RF control unit(BT/WiFi)	Tonscend	JS0806-2-8CH	20E8060261	1 year	2024.5.21
Temperature and humidity meter	/	C193561457	C193561457	1 year	2024.5.21
Radiation Spurious Test - 3M Chamber #2					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2024.5.21
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2024.5.25
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2024.5.21
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2024.3.25
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2024.3.25
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2024.5.21
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2024.5.21
Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100299	1 year	2024.5.21
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2024.5.21
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2024.5.21
Preamplifier(18Gz-40GHz)	Rohde&Schwarz	SCU-40A	101209	1 year	2024.5.21
#2 control room	MORI	433	CS0300028	3 year	2024.5.21
Temperature and humidity meter	/	C193561517	C193561517	1 year	2024.5.21
Radiation Spurious Test - 3M Chamber #1					
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2024.5.25
Loop antenna (8.3k~30MHz)	Rohde&Schwarz	HFH2-Z2E	100951	1 year	2024.5.26
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	1132	1 year	2024.5.21
Horn antenna(1GHz-18GHz)	ETS	3117	227634	1 year	2024.3.25
Horn antenna(18GHz-40GHz)	SCHWARZBECK	BBHA 9170	01003	1 year	2024.3.25
3m anechoic chamber	MORI	966	CS0200019	3 year	2026.5.18
Attenuator	/	SJ-5dB	607684	1 year	2024.5.21
#1 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561473	CS0200071	1 year	2024.5.21



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	Measurement Uncertainty
1	Occupied Channel Bandwidth	± 1.86 %
2	RF output power, conducted	± 0.9 dB
3	Power Spectral Density, conducted	± 0.8 dB
4	Conducted emission test	± 2.7 dB
5	Radiated emission 9kHz-30MHz	± 5.6 dB
	Radiated emission 30MHz-1GHz	± 4.6 dB
	Radiated emission 1GHz-18GHz	± 4.4 dB
	Radiated emission 18GHz-40GHz	± 5.1 dB
6	Temperature	± 0.73 °C
7	Humidity	± 3.90 %
8	Supply voltages	± 0.37 %
9	Time	± 0.27 %
Remark: 95% Confidence Levels, k=2.		

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen City, Guangdong Province 518110 P.R.China

Post Code: 518110 Tel: 0755-23763060-8805
Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn
FCC(Test firm designation number: CN1363)
IC(Test firm CAB identifier number: CN0137)
CNAS(Test firm designation number: L16091)



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Photo Printer
BRAND	N/A
MODEL	HCP-4TS24A
ADDITIONAL MODEL (Remark 6)	CP4100
FCC ID	2AUTE-4TS24A
POWER SUPPLY	DC 24V from Adapter
MODULATION TYPE	GFSK, $\pi/4$ DQPSK, 8DPSK
OPERATING FREQUENCY	2402MHz~2480MHz
NUMBER OF CHANNEL	79
PEAK OUTPUT POWER	6.19dBm (Max. Measured)
ANTENNA TYPE (Remark 4/5)	FPC Antenna, with 2.26dBi gain
HARDWARE VERSION:	CP6000MB
SOFTWARE VERSION:	CP4100_V1.X.X.X
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A
<p>Remark:</p> <ol style="list-style-type: none">For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.EUT photo refer to the report (Report NO.: FCCSZ2024-0006-EUT).Please refer to the antenna report.Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.the only difference is the model name.	

2.2 DESCRIPTION OF ACCESSORIES

Adapter	
Brand	N/A
Model No.:	AP053U-24200
Input:	100-240V~50/60Hz 1.5A
Output:	24.0V \Rightarrow 2.0A 48.0W
SN	KX202126000264
AC Cable:	N/A
DC Cable:	Shielded with one ferrite



2.3 OTHER INFORMATION

Operation frequency each of channel.

Operation Frequency Each of Channel							
For BT (GFSK, $\pi/4$ -DQPSK, 8-DPSK)							
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore, only the data of the test channels were recorded in this report.



2.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

The worst case was found when positioned on xaxis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	BT LINK

Where **RE < 1G**: Radiated Emission below 1GHz.

PLC: Power Line Conducted Emission.

RE ≥ 1G: Radiated Emission above 1GHz.

APCM: Antenna Port Conducted Measurement.

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0	FHSS	GFSK	DH5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0, 39, 78	FHSS	GFSK	DH5
A	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5
A	0, 39, 78	FHSS	8DPSK	3DH5



POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	BT Link

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0, 39, 78	FHSS	GFSK	DH5
A	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5
A	0, 39, 78	FHSS	8DPSK	3DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	25.5deg. C, 56%RH	DC 24V from Adapter	Liu Yuan
RE≥1G	25.5deg. C, 56%RH	DC 24V from Adapter	Liu Yuan
PLC	25.5deg. C, 56%RH	DC 24V from Adapter	Zhu Yulin
APCM	25.2deg. C, 57%RH	DC 24V from Adapter	Zhu Yulin



2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, Subpart C. Section 15.247

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards

2.6 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

During the tests:

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	Mobile phone	MIYU	MIYU R17-X25	N/A	Lab		
Support Cable							
NO	Description	Quantity (Number)	Length (m)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Limit


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


3.1.2 Measurement procedure


- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.1.3 Test setup

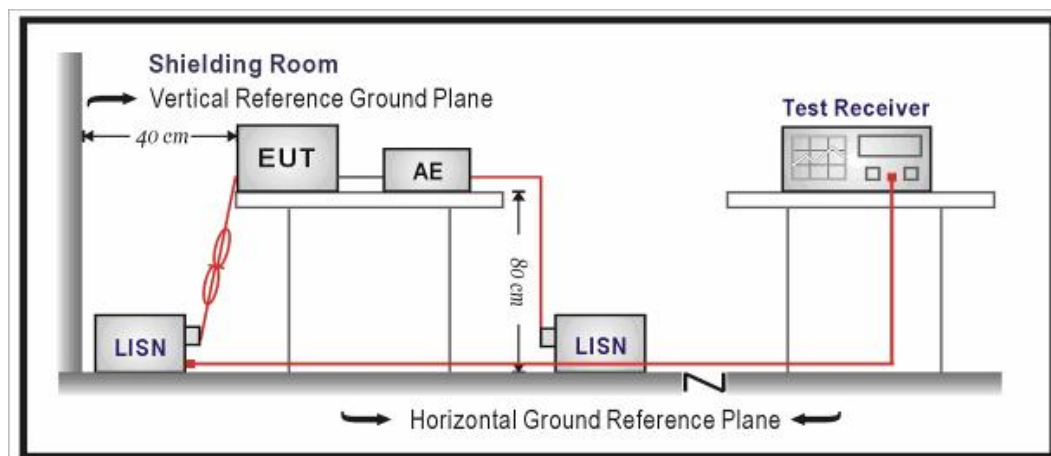

3.1.4 Test results

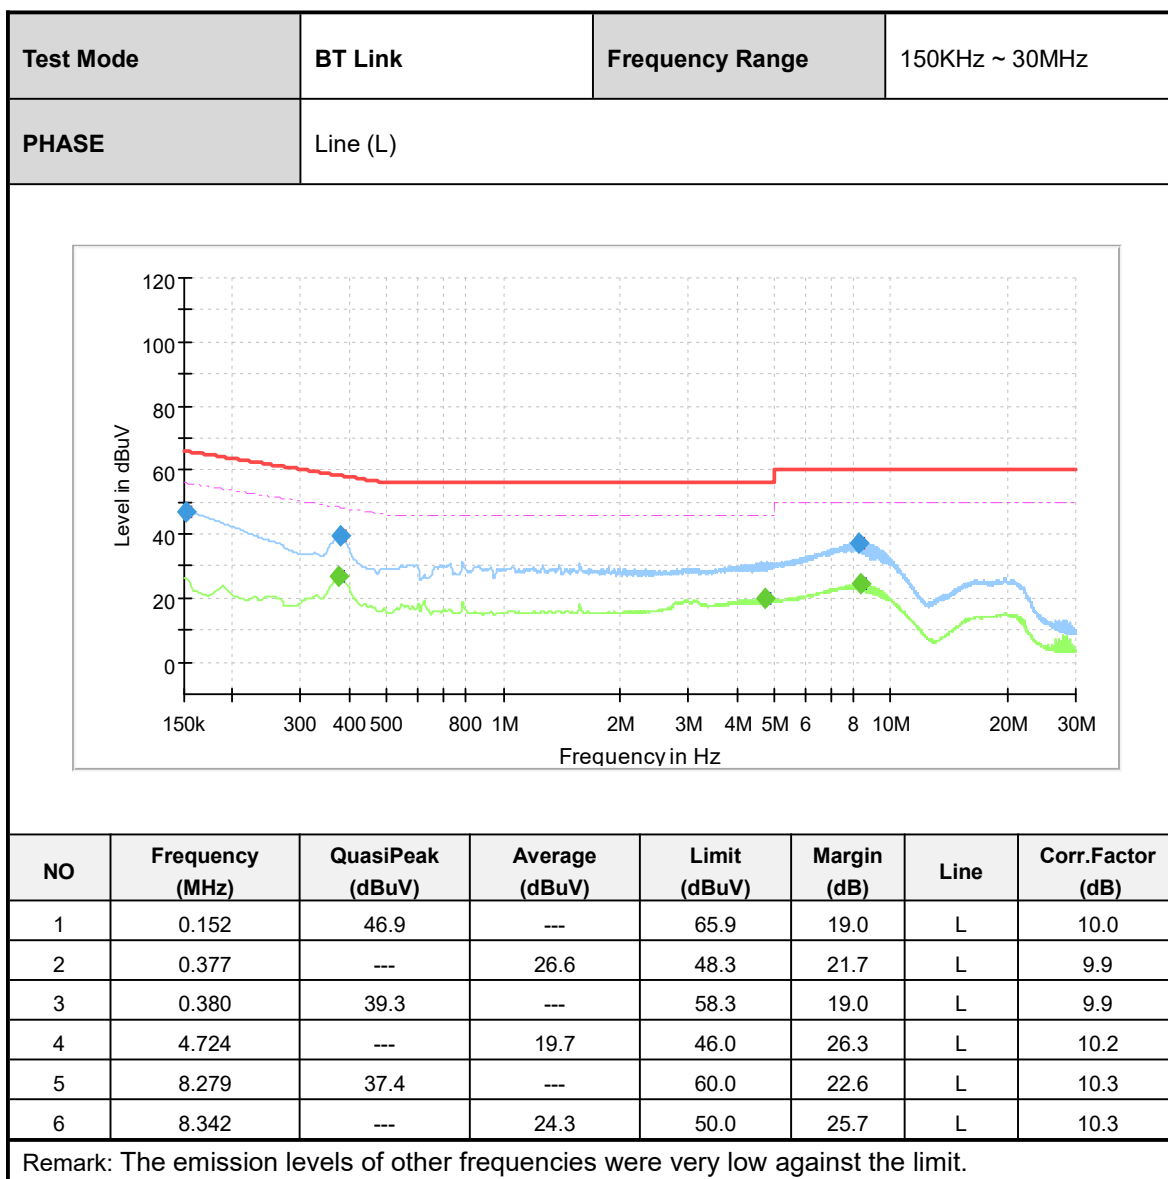

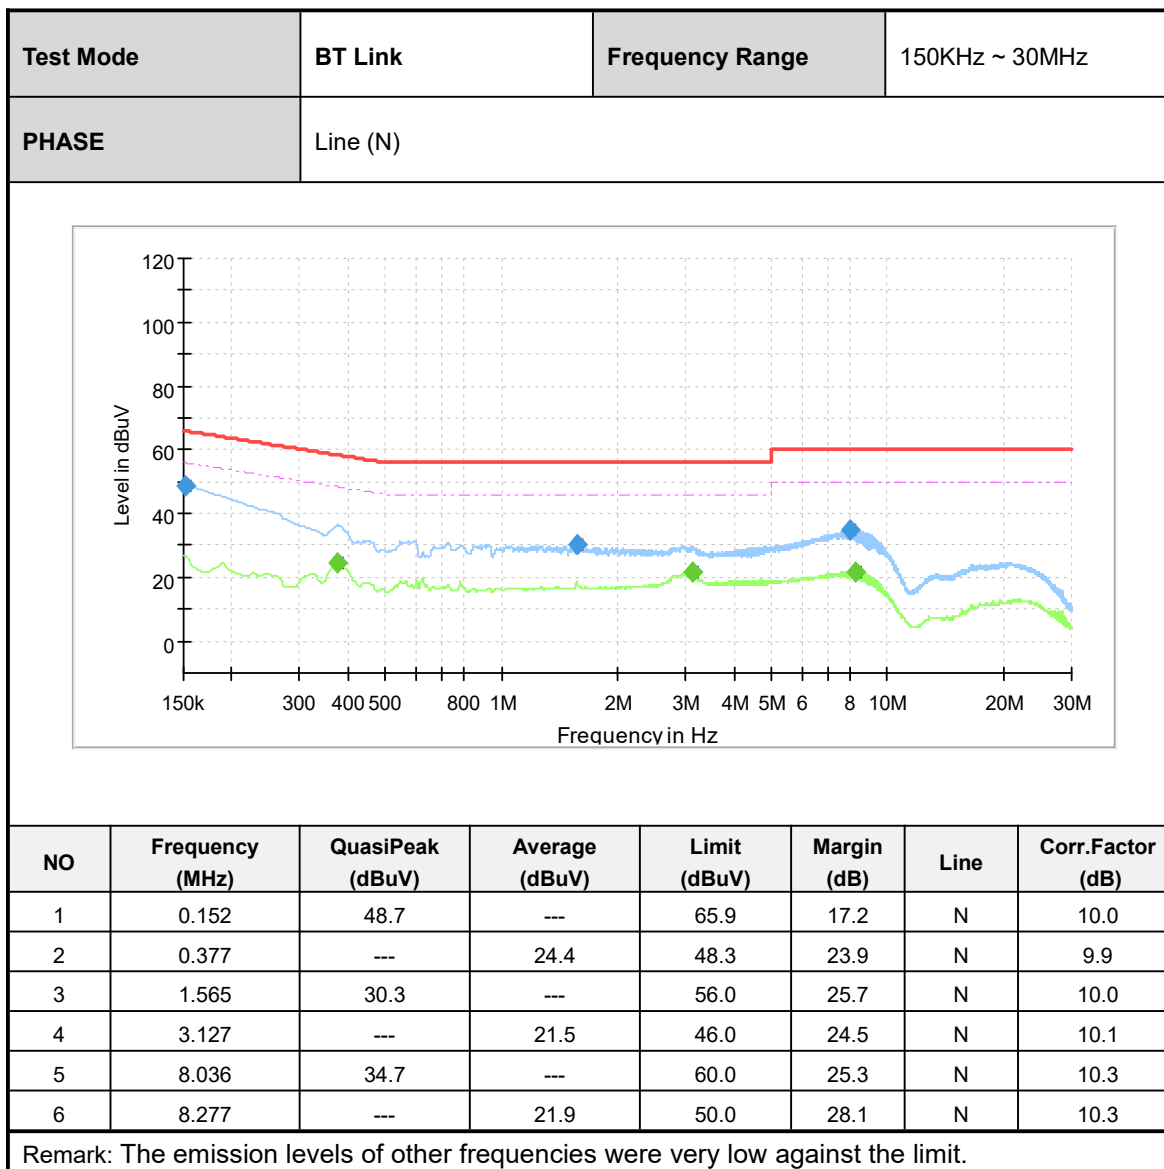



3.2 RADIATED EMISSION AND RESTRICTED BANDS MEASUREMENTS

3.2.1 Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.2.2 Measurement procedure


- The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.2.3 Test setup


Below 30MHz Test Setup:

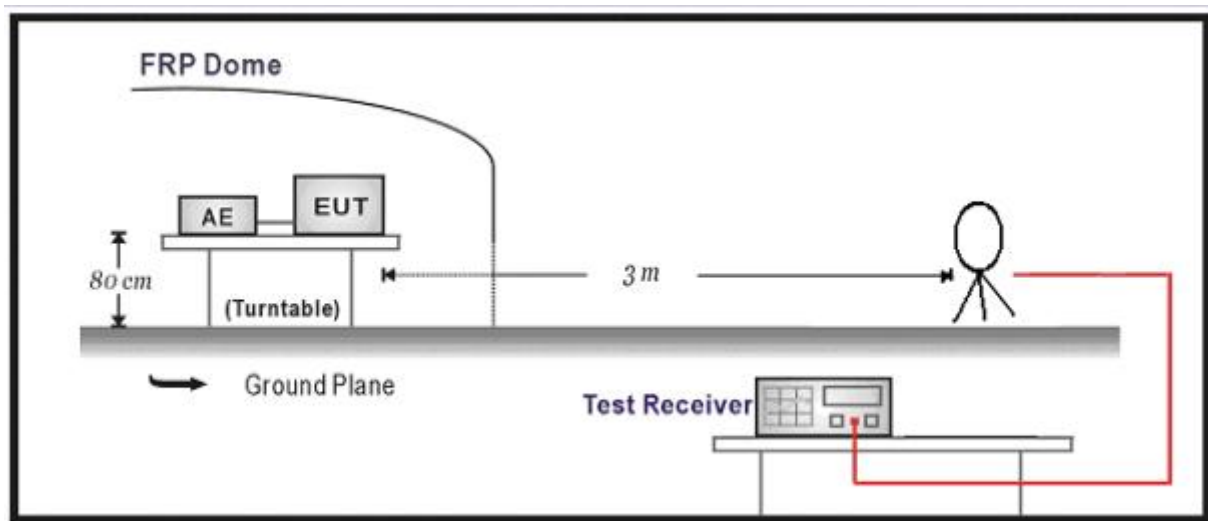

Below 1GHz Test Setup:

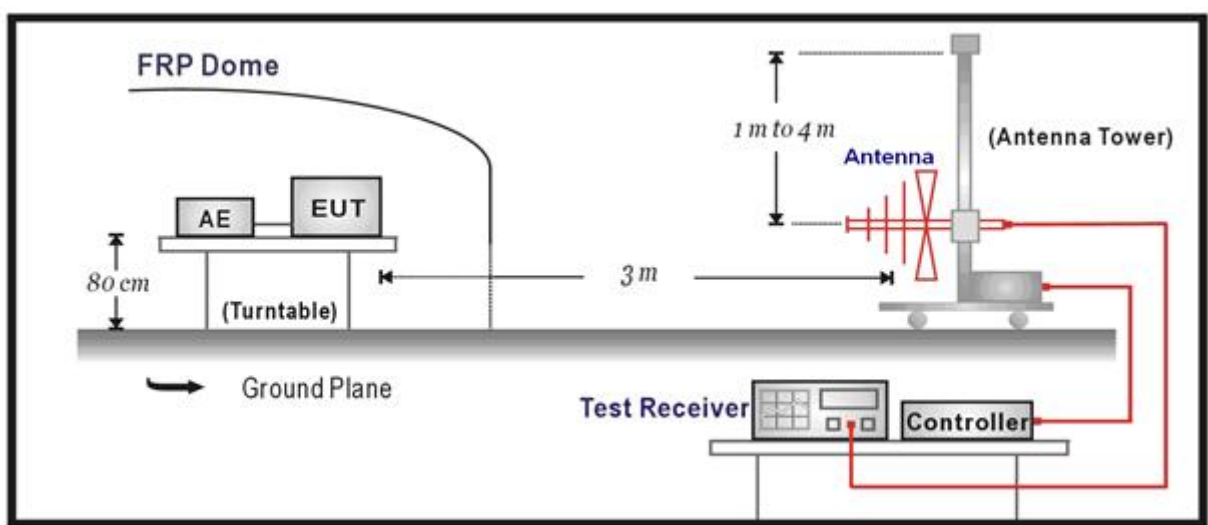


Above 1GHz Test Setup:

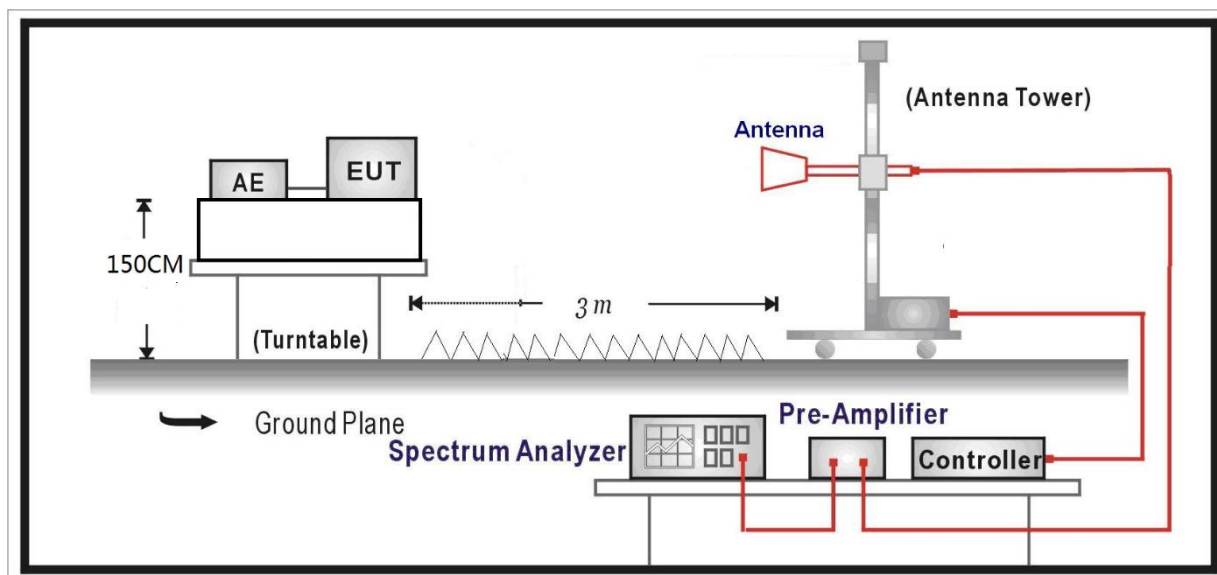



3.2.4 Test results


BELOW 1GHz WORST-CASE DATA:

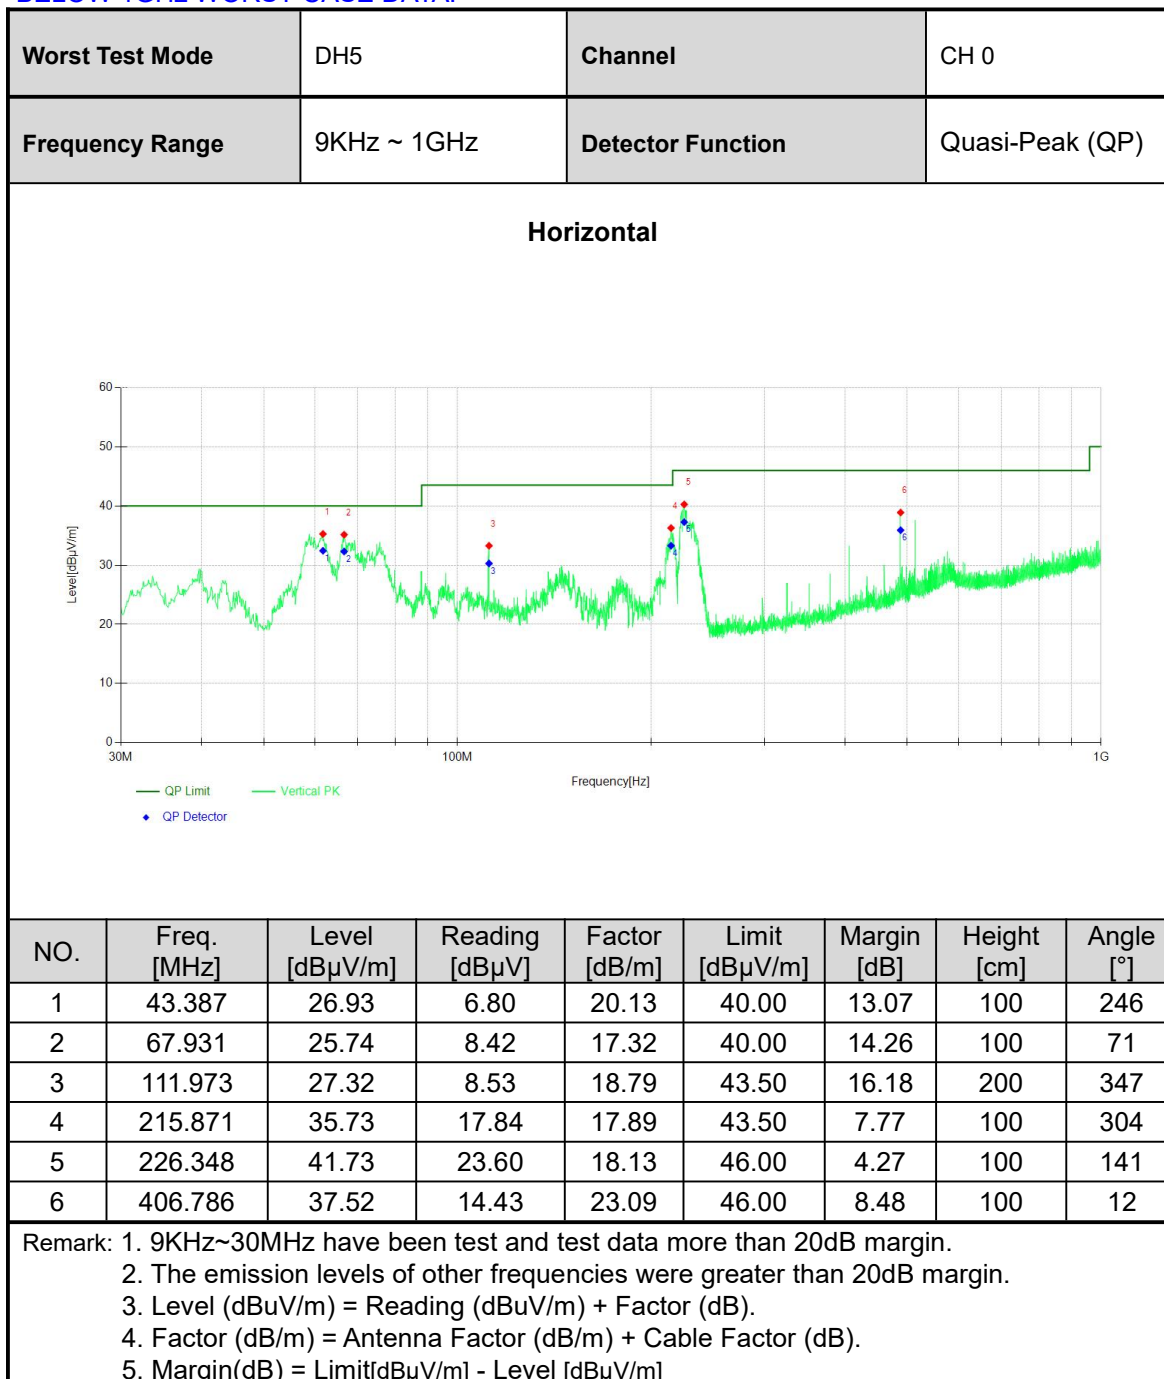



Worst Test Mode	DH5	Channel	CH 0
Frequency Range	9KHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Vertical

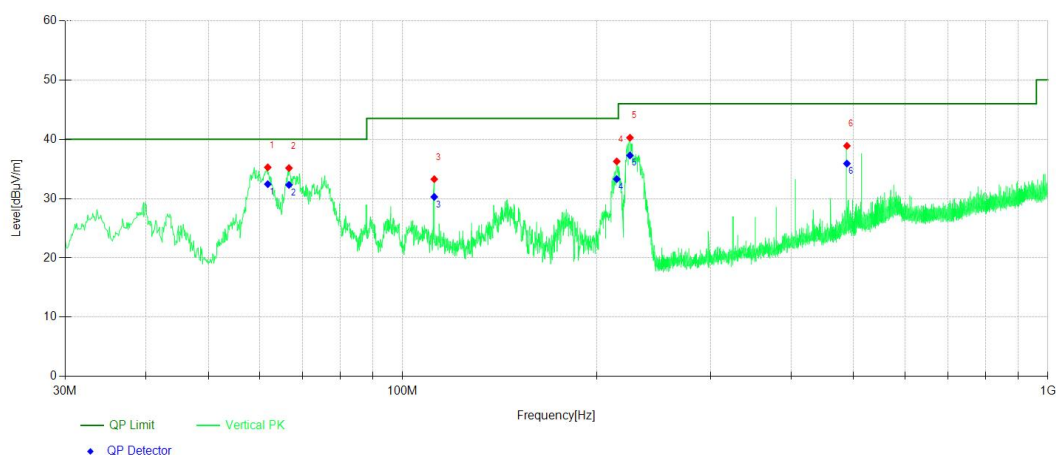

NO.	Freq. [MHz]	Level [dBμV/m]	Reading [dBμV]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	61.819	35.26	16.67	18.59	40.00	4.74	100	2
2	66.670	35.14	17.55	17.59	40.00	4.86	100	9
3	111.973	33.27	14.48	18.79	43.50	10.23	100	184
4	214.707	36.27	18.41	17.86	43.50	7.23	100	21
5	225.087	40.26	22.15	18.11	46.00	5.74	100	21
6	488.177	38.89	13.94	24.95	46.00	7.11	100	255

Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.
2. The emission levels of other frequencies were greater than 20dB margin.
3. Level (dBμV/m) = Reading (dBμV/m) + Factor (dB).
4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
5. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



ABOVE 1GHz WORST-CASE DATA:

All modes have been tested, and the worst-case was recorded in this report.

Channel		DH5- CH 0		Frequency		2402MHz	
Frequency Range		Above 1G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	2359.06	40.90	0.05	40.95	54.00	13.05	AV
2	2372.17	51.99	-0.27	51.72	74.00	22.28	PK
3	2390.00	39.48	-0.15	39.33	54.00	14.67	AV
4	2390.00	48.76	-0.15	48.61	74.00	25.39	PK
5	2401.84	90.23	-0.04	90.19			PK
6	2401.96	89.79	-0.04	89.75			AV
7	4804.00	44.74	9.29	54.03	74.00	19.97	PK
8	4804.00	35.51	9.29	44.80	54.00	9.20	AV
9	7206.00	30.78	12.81	43.59	74.00	30.41	PK
10	7206.00	21.24	12.81	34.05	54.00	19.95	AV
11	9608.00	29.75	13.32	43.07	74.00	30.93	PK
12	9608.00	20.96	13.32	34.28	54.00	19.72	AV
Vertical							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	2358.25	40.91	0.03	40.94	54.00	13.06	AV
2	2363.56	50.95	-0.04	50.91	74.00	23.09	PK
3	2390.00	39.27	-0.15	39.12	54.00	14.88	AV
4	2390.00	48.75	-0.15	48.60	74.00	25.40	PK
5	2401.87	88.32	-0.04	88.28			AV
6	2402.17	88.67	-0.02	88.65			PK
7	4804.00	44.09	9.29	53.38	74.00	20.62	PK
8	4804.00	35.21	9.29	44.50	54.00	9.50	AV
9	7206.00	29.03	12.81	41.84	74.00	32.16	PK
10	7206.00	20.89	12.81	33.70	54.00	20.30	AV
11	9608.00	28.95	13.32	42.27	74.00	31.73	PK
12	9608.00	20.84	13.32	34.16	54.00	19.84	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m].							



Channel		DH5- CH 39		Frequency		2441MHz	
Frequency Range		Above 1G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	4882.00	43.12	9.83	52.95	74.00	21.05	PK
2	4882.00	35.32	9.83	45.15	54.00	8.85	AV
3	7323.00	21.15	10.96	32.11	54.00	21.89	AV
4	7323.00	29.77	10.96	40.73	74.00	33.27	PK
5	9764.00	28.16	13.23	41.39	74.00	32.61	PK
6	9764.00	19.23	13.23	32.46	54.00	21.54	AV
Vertical							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	4882.00	43.55	9.83	53.38	74.00	20.62	PK
2	4882.00	34.95	9.83	44.78	54.00	9.22	AV
3	7323.00	28.58	10.96	39.54	74.00	34.46	PK
4	7323.00	21.04	10.96	32.00	54.00	22.00	AV
5	9764.00	27.53	13.23	40.76	74.00	33.24	PK
6	9764.00	19.34	13.23	32.57	54.00	21.43	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]							



Channel		DH5- CH 78		Frequency		2480MHz	
Frequency Range		Above 1G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	2480.00	90.58	0.31	90.89			PK
2	2480.00	90.31	0.31	90.62			AV
3	2483.50	44.35	0.45	44.80	74.00	29.20	PK
4	2483.50	36.79	0.45	37.24	74.00	36.76	AV
5	2484.38	38.19	0.49	38.68	54.00	15.32	AV
6	2484.90	47.09	0.52	47.61	74.00	26.39	PK
7	4960.00	34.52	10.70	45.22	54.00	8.78	AV
8	4960.00	43.84	10.70	54.54	74.00	19.46	PK
9	7440.00	29.04	9.75	38.79	74.00	35.21	PK
10	7440.00	21.26	9.75	31.01	54.00	22.99	AV
11	9920.00	19.34	13.83	33.17	54.00	20.83	AV
12	9920.00	27.73	13.83	41.56	74.00	32.44	PK
Vertical							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	2480.00	91.78	0.31	92.09			PK
2	2480.00	91.46	0.31	91.77			AV
3	2483.50	37.29	0.45	37.74	74.00	36.26	AV
4	2483.50	45.15	0.45	45.60	74.00	28.40	PK
5	2484.23	37.96	0.48	38.44	54.00	15.56	AV
6	2484.29	47.09	0.48	47.57	74.00	26.43	PK
7	4960.00	41.65	10.70	52.35	74.00	21.65	PK
8	4960.00	34.48	10.70	45.18	54.00	8.82	AV
9	7440.00	29.42	9.75	39.17	74.00	34.83	PK
10	7440.00	21.34	9.75	31.09	54.00	22.91	AV
11	9920.00	28.33	13.83	42.16	74.00	31.84	PK
12	9920.00	19.37	13.83	33.20	54.00	20.80	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]							



3.3 NUMBER OF HOPPING FREQUENCY USED


3.3.1 Limits

At least 15 channels frequencies, and should be equally spaced.

3.3.2 Measurement procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were completed.

3.3.3 Test setup

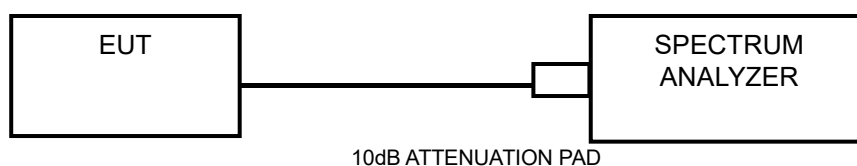

3.3.4 Test result

Refer to Appendix A.



3.4 DWELL TIME ON EACH CHANNEL


3.4.1 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 Measurement procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

3.4.3 Test setup

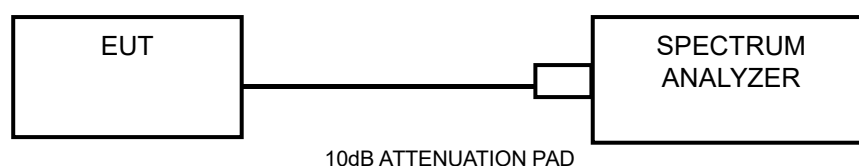

3.4.4 Test result

Refer to Appendix A.



3.5 20dB EMISSION BANDWIDTH


3.5.1 Limits

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dBbandwidth of hopping channel shell be a minimum limit for the hopping channel separation

3.5.2 Measurement procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

3.5.3 Test setup

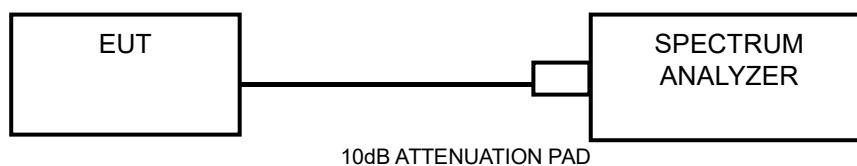

3.5.4 Test result

Refer to Appendix A.



3.6 HOPPING CHANNEL SEPARATION


3.6.1 Limits

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

3.6.2 Measurement procedure

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) \geq RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

3.6.3 Test setup

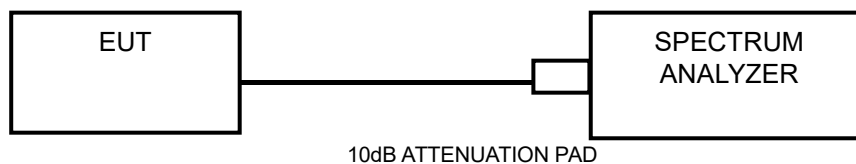

3.6.4 Test result

Refer to Appendix A.



3.7 CONDUCTED OUTPUT POWER


3.7.1 Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

3.7.2 Measurement procedure

- A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

3.7.3 Test setup

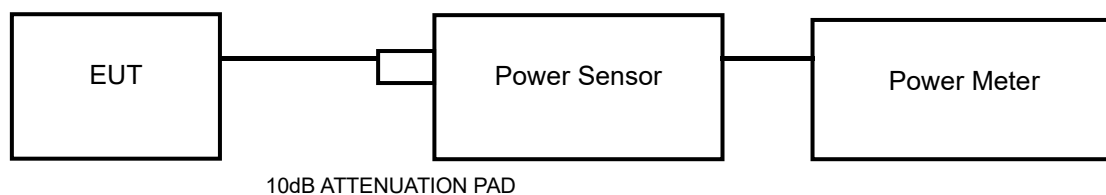

3.7.4 Test result

Refer to Appendix A.



3.8 OUT OF BAND EMISSION AND BAND EDGE MEASUREMENTS


3.8.1 Limits

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

3.8.2 Measurement procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

3.8.3 Test setup

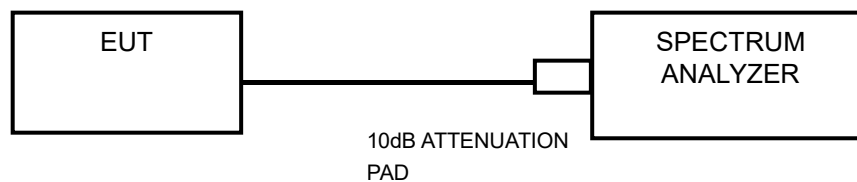

3.8.4 Test result

Refer to Appendix A.


3.9 OCCUPIED BANDWIDTH MEASUREMENT

3.9.1 Measurement procedure

The transmitter antenna output was connected to the spectrum analyzer through an attenuator. The resolution bandwidth shall be set to the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.9.2 Test setup



3.9.3 Test result

Refer to Appendix A.



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Photos).



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos and Internal Photos).



6 Appendix A


6.1 20dB Emission Bandwidth

6.1.1 Test Result


TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.03	2401.46	2402.50	---	---
DH5	Ant1	2441	1.03	2440.46	2441.50	---	---
DH5	Ant1	2480	1.04	2479.46	2480.49	---	---
2DH5	Ant1	2402	1.40	2401.30	2402.70	---	---
2DH5	Ant1	2441	1.41	2440.29	2441.70	---	---
2DH5	Ant1	2480	1.40	2479.29	2480.69	---	---
3DH5	Ant1	2402	1.40	2401.30	2402.70	---	---
3DH5	Ant1	2441	1.40	2440.29	2441.69	---	---
3DH5	Ant1	2480	1.40	2479.29	2480.70	---	---




6.1.2 Test Graphs

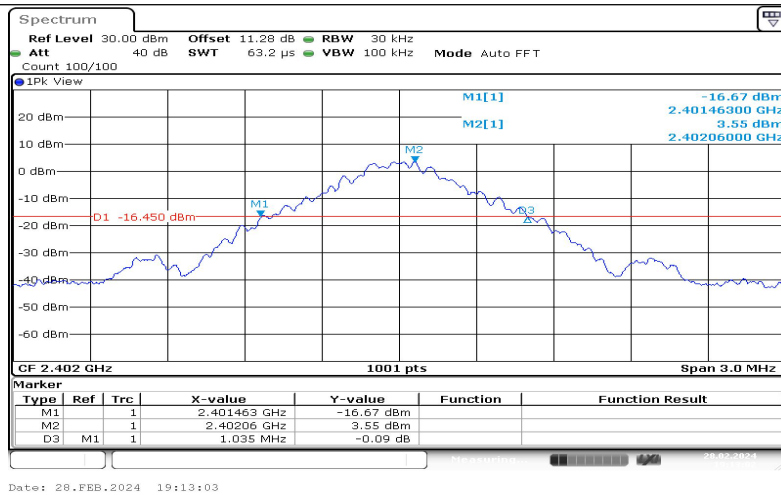


DH5-Ant1-2402

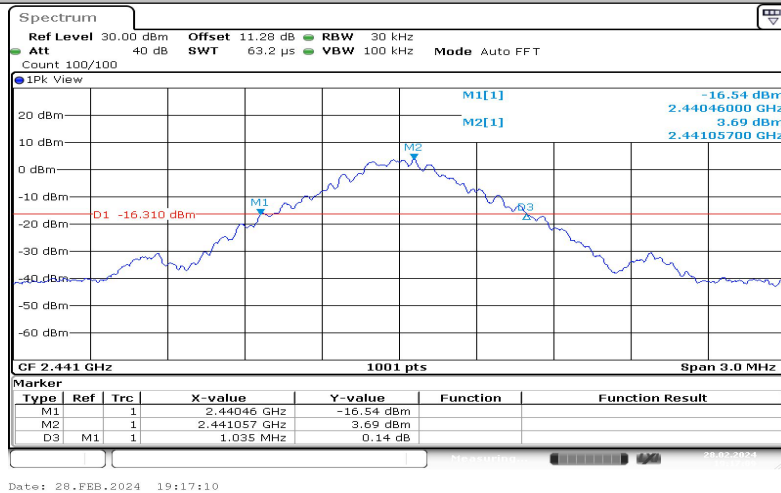


DH5-Ant1-2441

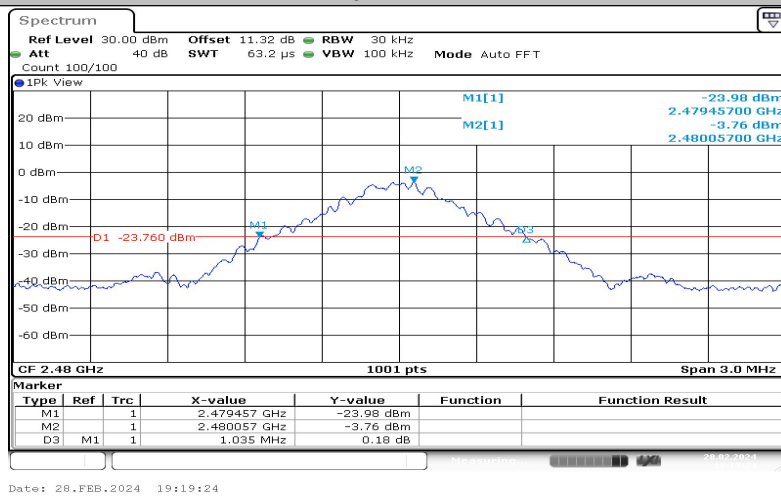


DH5-Ant1-2480

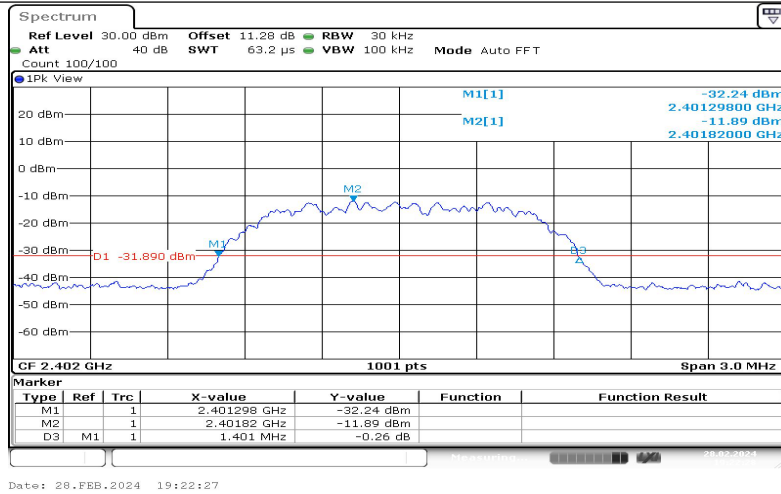


2DH5-Ant1-2402

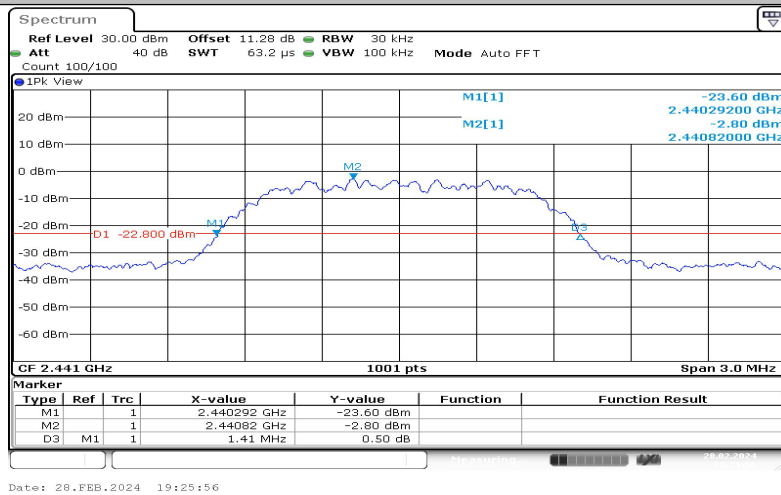


2DH5-Ant1-2441

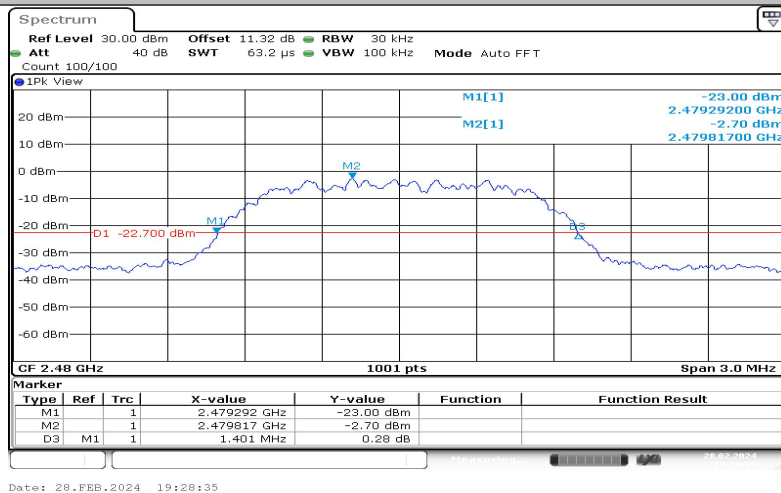


2DH5-Ant1-2480

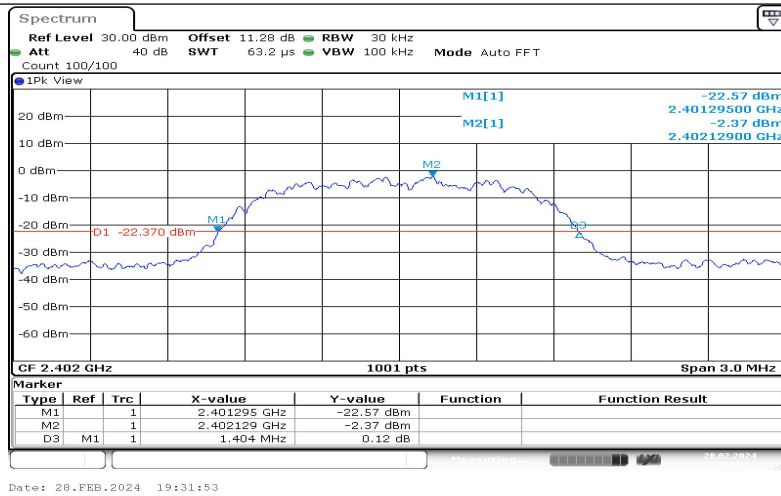

3DH5-Ant1-2402

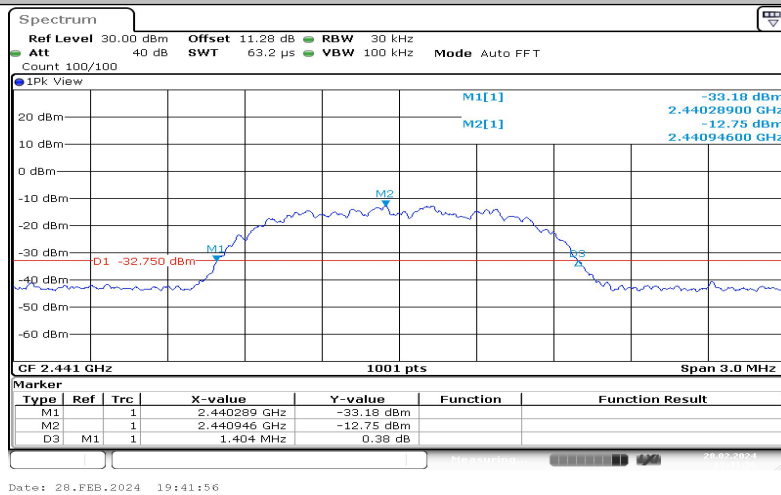

3DH5-Ant1-2441

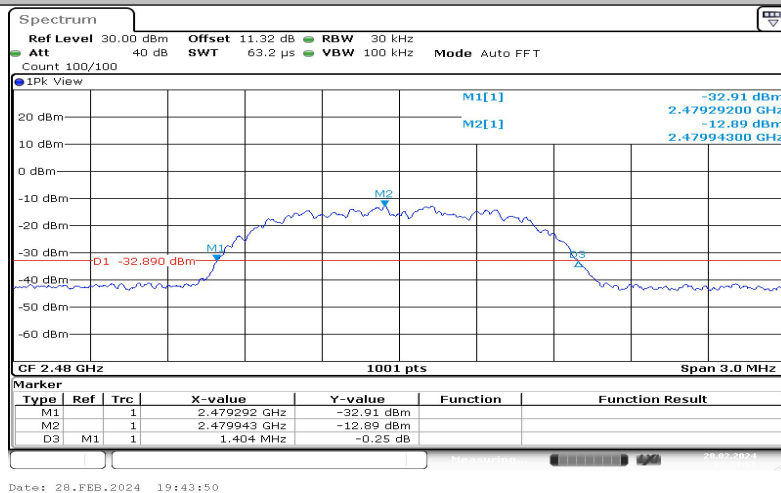

3DH5-Ant1-2480



6.2 Conducted Output Power

6.2.1 Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	5.33	≤20.97	PASS
DH5	Ant1	2441	5.64	≤20.97	PASS
DH5	Ant1	2480	6.19	≤20.97	PASS
2DH5	Ant1	2402	4.31	≤20.97	PASS
2DH5	Ant1	2441	4.38	≤20.97	PASS
2DH5	Ant1	2480	3.68	≤20.97	PASS
3DH5	Ant1	2402	4.62	≤20.97	PASS
3DH5	Ant1	2441	4.69	≤20.97	PASS
3DH5	Ant1	2480	4.09	≤20.97	PASS




6.3 Hopping Channel Separation

6.3.1 Test Result


TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.835	≥ 0.693	PASS
2DH5	Ant1	Hop	1.27	≥ 0.940	PASS
3DH5	Ant1	Hop	1.003	≥ 0.933	PASS




6.3.2 Test Graphs

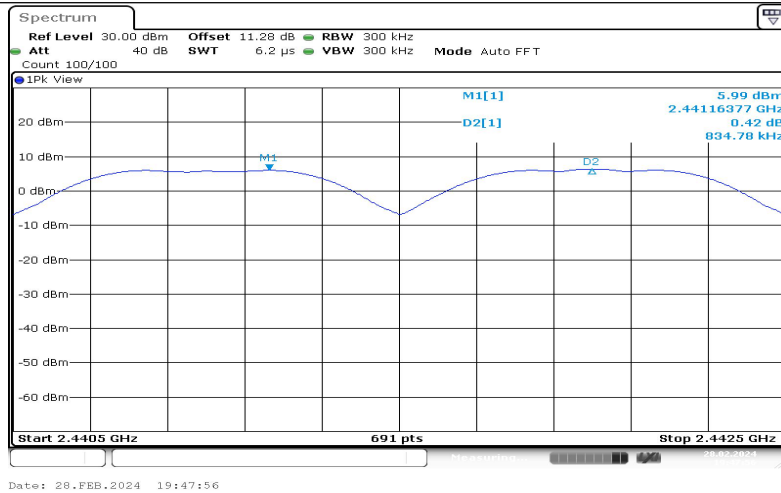

DH5-Ant1-Hop

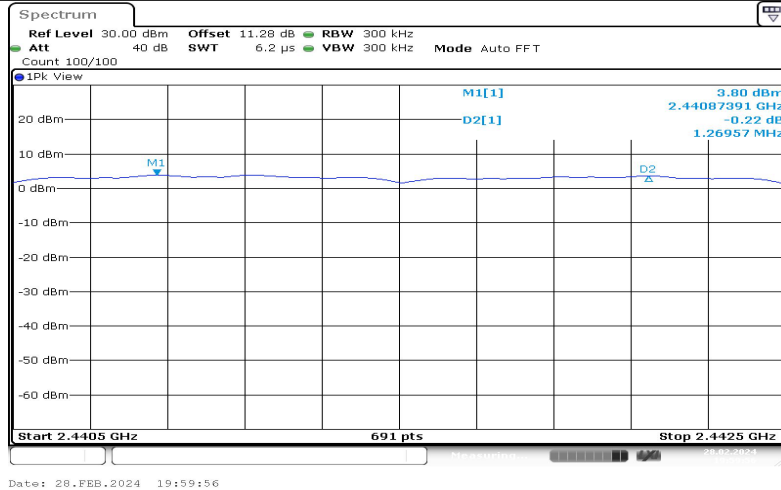

2DH5-Ant1-Hop

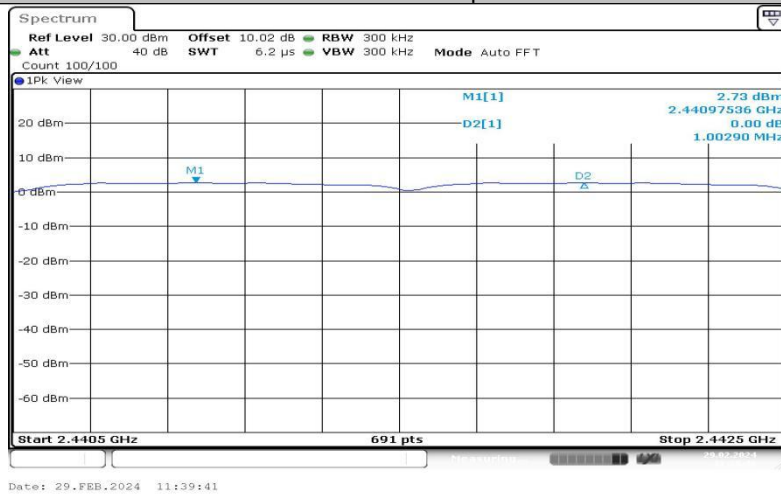

3DH5-Ant1-Hop




6.4 Dell Time of Each Channel

6.4.1 Test Result


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.868	106.67	0.306	≤0.4	PASS
DH1	Ant1	Hop	0.379	320	0.121	≤0.4	PASS
DH3	Ant1	Hop	1.628	160	0.26	≤0.4	PASS
2DH5	Ant1	Hop	2.870	106.67	0.306	≤0.4	PASS
2DH1	Ant1	Hop	0.386	320	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
3DH5	Ant1	Hop	2.872	106.67	0.306	≤0.4	PASS
3DH1	Ant1	Hop	0.385	320	0.123	≤0.4	PASS
3DH3	Ant1	Hop	1.629	160	0.261	≤0.4	PASS




6.4.1 Test Graphs

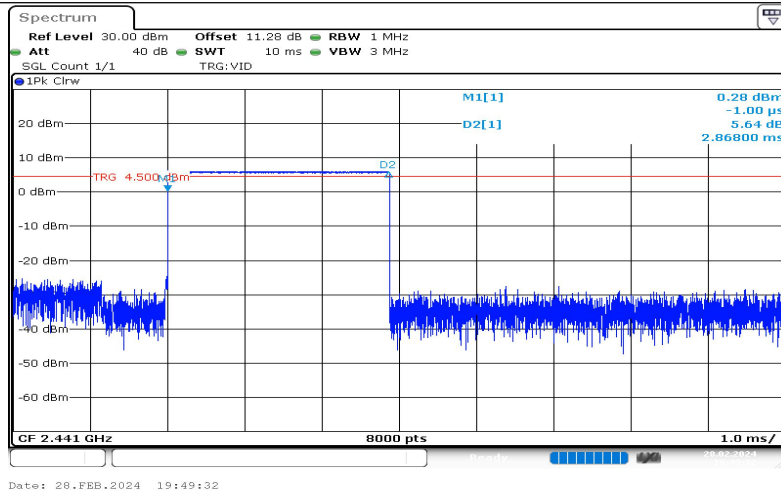


DH5-Ant1-Hop-2.868-106.67

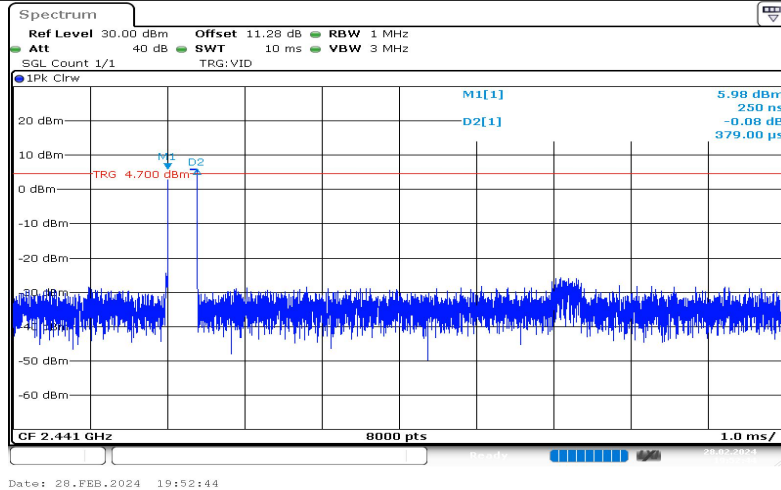


DH1-Ant1-Hop-0.379-320

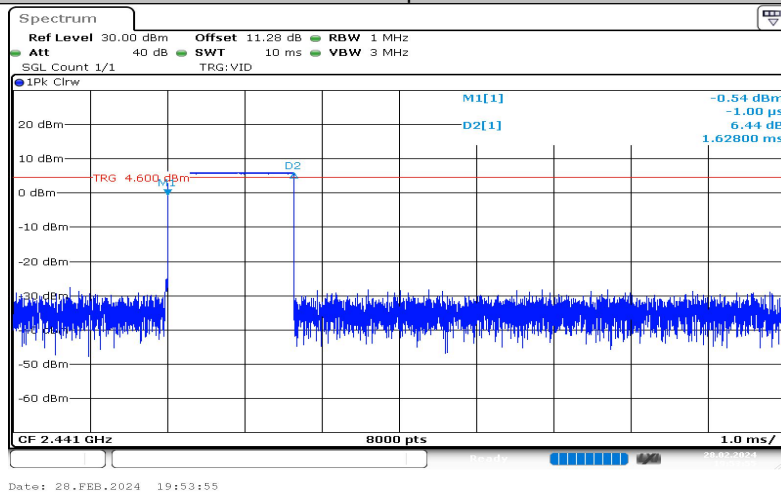


DH3-Ant1-Hop-1.628-160

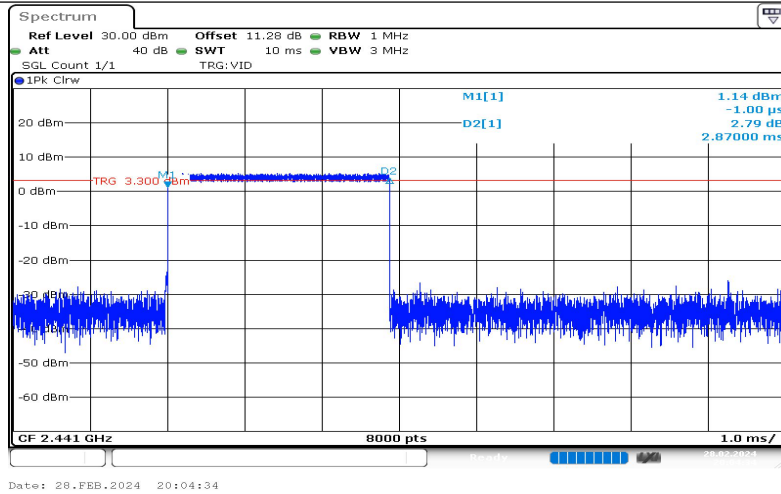


2DH5-Ant1-Hop-2.870-106.67

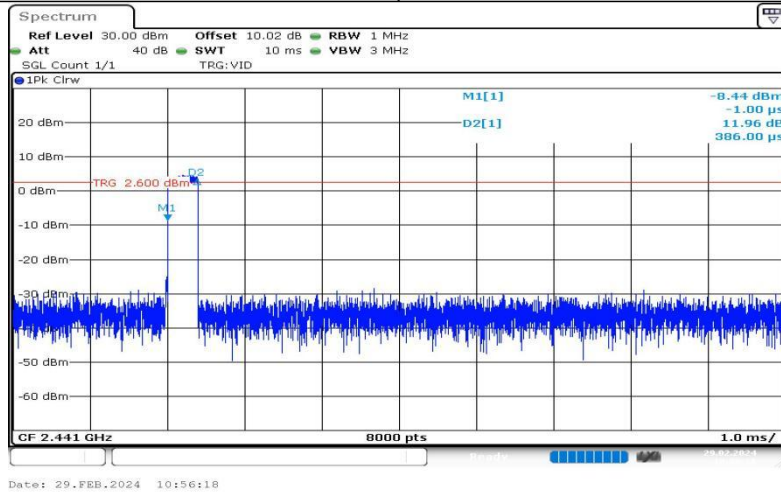


2DH1-Ant1-Hop-0.386-320

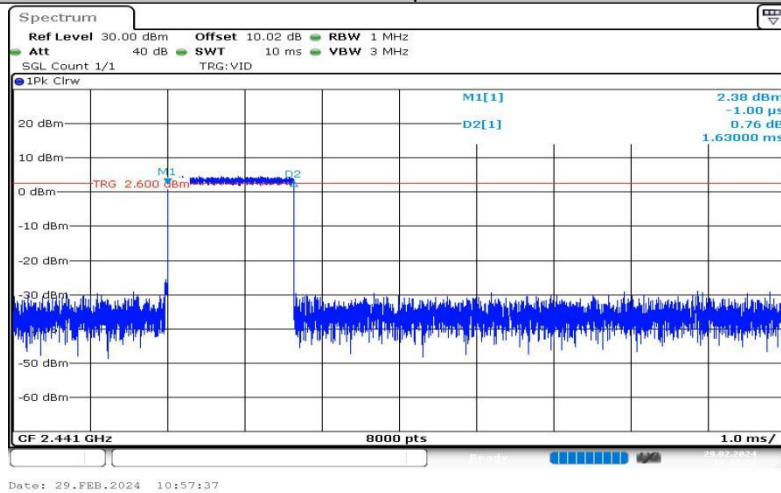


2DH3-Ant1-Hop-1.630-160

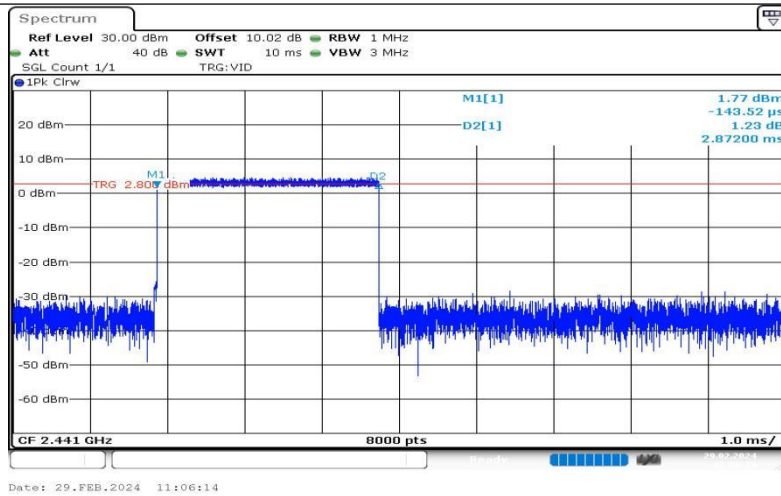

3DH5-Ant1-Hop-2.872-106.67

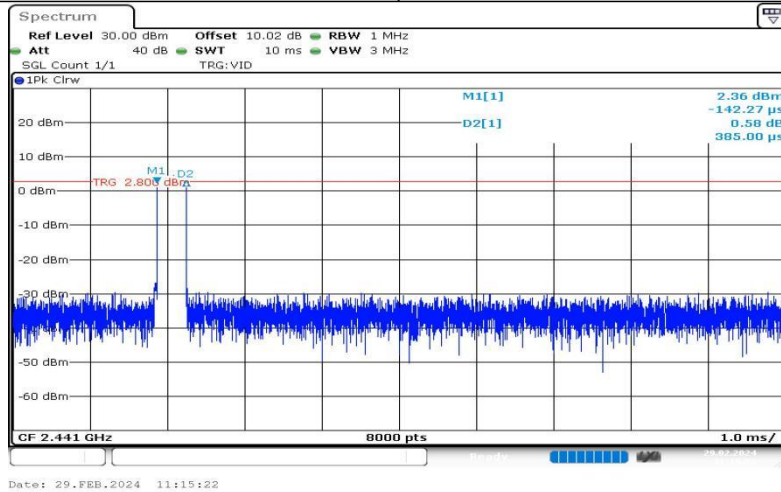

3DH1-Ant1-Hop-0.385-320

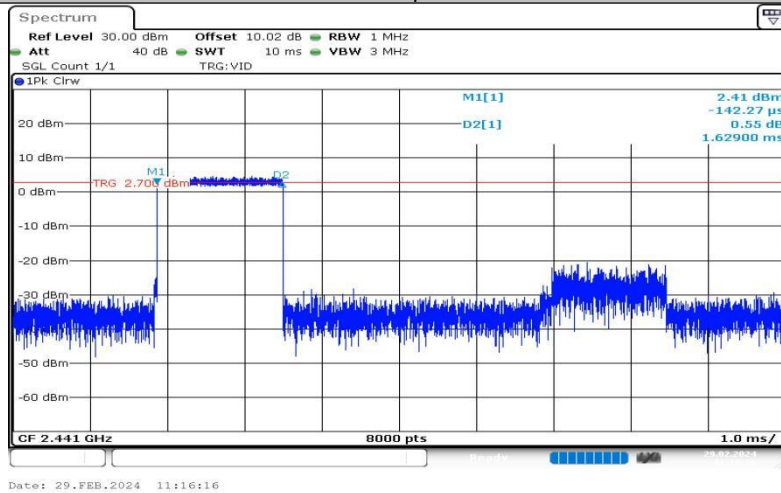

3DH3-Ant1-Hop-1.629-160




6.5 Number of hopping channels

6.5.1 Test Result


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS




6.5.2 Test Graphs

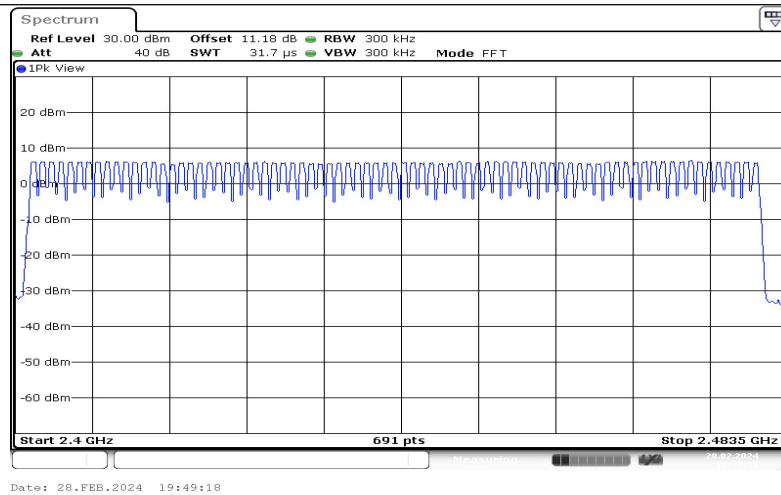

DH5-Ant1-Hop

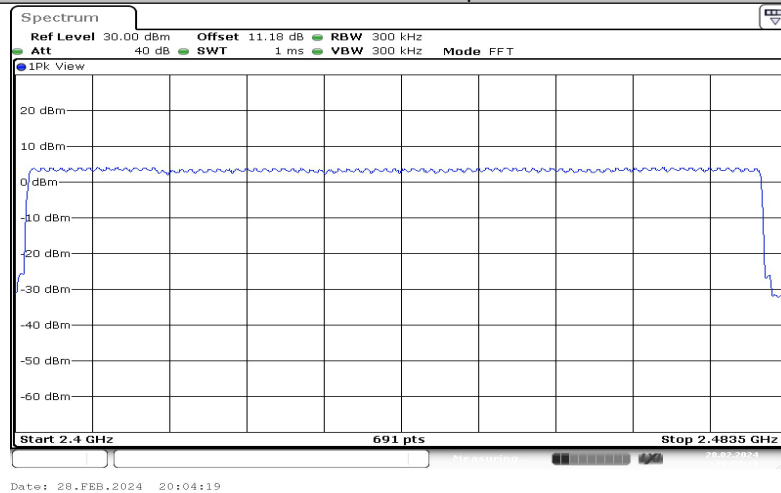

2DH5-Ant1-Hop

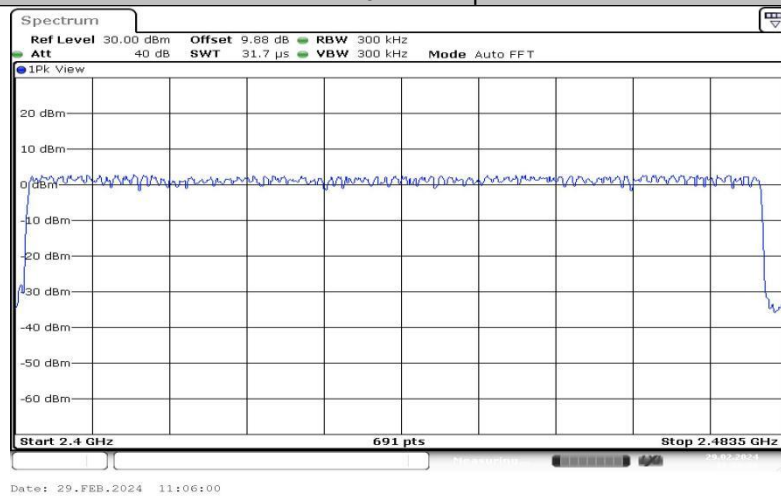

3DH5-Ant1-Hop