

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Product: Commercial Kiosk Tablet

Model No.: INF431

Trademark: GLORYSTAR

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: January 20, 2025


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2412174-03E Page 2 of 87

Date: 2025-01-20



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Page 3 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test	13
6.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit	14
7.0	6dB Bandwidth Measurement	24
8.0	Maximum Output Power	44
9.0	Power Spectral Density Measurement.	47
10.0	Out of Band Measurement	66
11.0	Antenna Requirement.	84
12.0	FCC ID Label.	85
13.0	Photo of Test Setup and EUT View	86

Date: 2025-01-20



Page 4 of 87

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: Bldg., 9, 4/F., ZongYuntai Technology Industrial Park, Songbai Road, Shiyan Street, Boan,

Shenzhen, China

1.3 Description of EUT

Product: Commercial Kiosk Tablet

Manufacturer: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: Bldg., 9, 4/F., Zong Yuntai Technology Industrial Park, Songbai Road, Shiyan

Street, Boan, Shenzhen, China

Trademark: GLORYSTAR

Model Number: INF431 Additional Model Number: N/A

Hardware Version: V1.0 Software Version: V1.0 Serial No.: GS431241200001

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20, HT40

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; EEE 802.11n (HT40): 7 Channels;

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2025-01-20



Page 5 of 87

Antenna: Two dipole Antennas used. The gain of the antennas is 1.39dBi Max for each (Get

from the antenna specification)

Rating: Input: 100-240V~, 50/60Hz, 150W(MAX)

1.4 Submitted Sample: 2 Samples

1.5 Test Duration: 2024-12-16 to 2025-01-20

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Report No.: TW2412174-03E Page 6 of 87

Date: 2025-01-20



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2024-07-18	2026-07-17
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	1	2024-07-12	2025-07-11
RF Cable	Zhengdi	7m		2024-07-12	2025-07-11
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1
For Radiated Emissions	
Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Date: 2025-01-20



Page 7 of 87

3. Description of Test Modes

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: mcs0 data rate (worst case) were chosen for full testing

Note: 1. during the test, the duty cycle was set up to 100%.

2. During the radiated emissions test, for IEEE 802.11b/g SISO mode, ANT1 and ANT2 were tested and only the worst case was reported; MIMO mode was tested for IEEE 802.11n (HT20/HT40)

Page 8 of 87 Report No.: TW2412174-03E

Date: 2025-01-20



3.0 **Technical Details**

3.1 Summary of test results

The EUT has been tested ac	ecording to the following speci	ifications:	
Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	Pass	Complies
C Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	Pass	Complies
CC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	Pass	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	Pass	Complies
CC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	Pass	Complies
CC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	Pass	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 9 of 87


Report No.: TW2412174-03E

Date: 2025-01-20



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

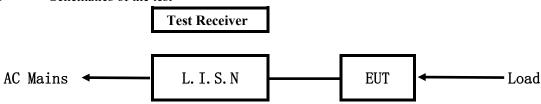


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

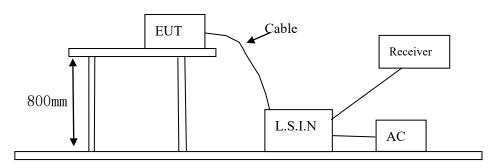

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Commercial Kiosk	GLORY STAR TECHNICS	INIE 42 1	24 A CC INIE421
Tablet	(SHENZHEN) CO., LTD.	INF431	2AACS-INF431

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2412174-03E Page 10 of 87

Date: 2025-01-20



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2025-01-20



Conducted Emission on Live Terminal (150kHz to 30MHz) A:


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

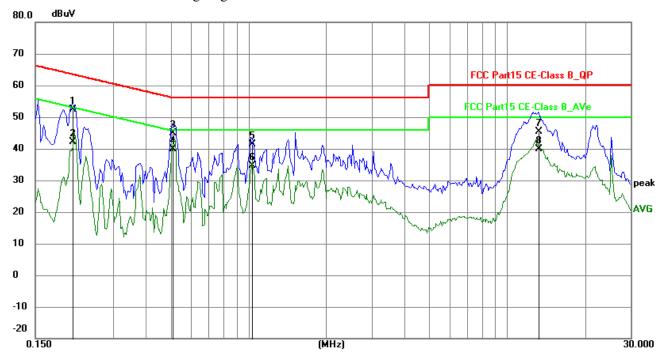

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2085	42.08	10.32	52.40	63.26	-10.86	QP	Р
2	0.2085	31.80	10.32	42.12	53.26	-11.14	AVG	Р
3	0.5088	34.48	10.40	44.88	56.00	-11.12	QP	Р
4	0.5088	29.39	10.40	39.79	46.00	-6.21	AVG	Р
5	1.0353	30.93	10.53	41.46	56.00	-14.54	QP	Р
6	1.0353	23.99	10.53	34.52	46.00	-11.48	AVG	Р
7	13.2258	30.82	14.67	45.49	60.00	-14.51	QP	Р
8	13.2258	25.30	14.67	39.97	50.00	-10.03	AVG	Р

Page 12 of 87 Report No.: TW2412174-03E

Date: 2025-01-20



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

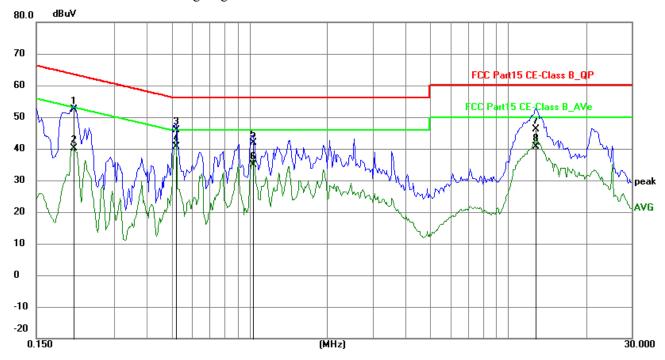

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2085	42.04	10.32	52.36	63.26	-10.90	QP	Р
2	0.2085	29.86	10.32	40.18	53.26	-13.08	AVG	Р
3	0.5205	35.57	10.41	45.98	56.00	-10.02	QP	Р
4	0.5205	30.26	10.41	40.67	46.00	-5.33	AVG	Р
5	1.0353	31.35	10.53	41.88	56.00	-14.12	QP	Р
6	1.0353	24.44	10.53	34.97	46.00	-11.03	AVG	Р
7	12.7772	31.66	14.55	46.21	60.00	-13.79	QP	Р
8	12.7772	25.98	14.55	40.53	50.00	-9.47	AVG	Р

Date: 2025-01-20




Page 13 of 87

6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

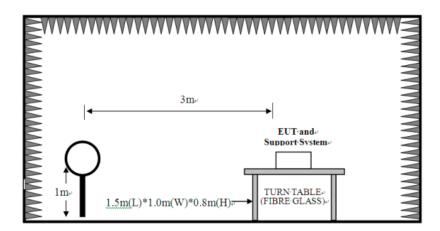


Date: 2025-01-20



For radiated emissions from 30MHz to1GHz

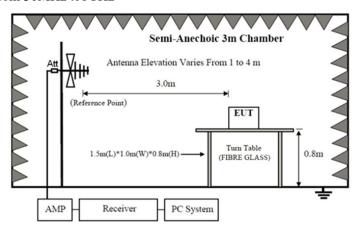

For radiated emissions above 1GHz

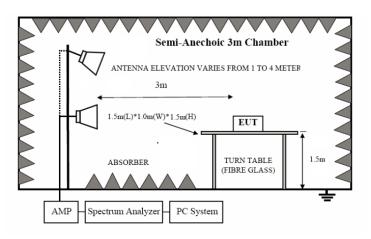

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Date: 2025-01-20



Page 15 of 87

Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. For IEEE 802.11b/g SISO mode, ANT1 and ANT2 were tested; MIMO mode was tested for IEEE 802.11n (HT20/HT40). In the test report, only the worst case was reported and 802.11g was the worst case.

Page 16 of 87

Report No.: TW2412174-03E Date: 2025-01-20




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

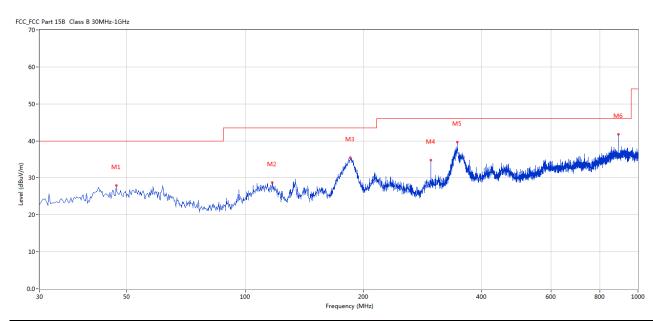

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	46.971	27.93	-5.71	40.0	12.07	Peak	170.00	100	Horizontal	Pass
2	117.278	28.72	-7.37	43.5	14.78	Peak	337.00	100	Horizontal	Pass
3	185.161	35.47	-7.14	43.5	8.03	Peak	359.00	100	Horizontal	Pass
4	296.926	34.85	-4.01	46.0	11.15	Peak	16.00	100	Horizontal	Pass
5	346.626	39.62	-2.66	46.0	6.38	Peak	356.00	100	Horizontal	Pass
6	890.902	41.80	4.89	46.0	4.20	Peak	104.00	100	Horizontal	Pass

Page 17 of 87

Report No.: TW2412174-03E

Date: 2025-01-20




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

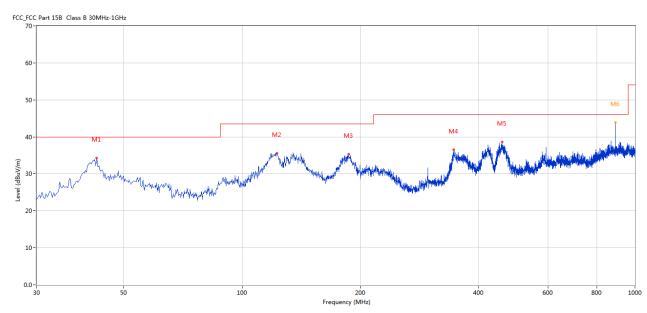

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	42.607	34.23	-5.67	40.0	5.77	Peak	160.00	100	Vertical	Pass
2	122.612	35.60	-7.90	43.5	7.90	Peak	342.00	100	Vertical	Pass
3	186.858	35.35	-7.26	43.5	8.15	Peak	41.00	100	Vertical	Pass
4	345.656	36.47	-2.73	46.0	9.53	Peak	266.00	100	Vertical	Pass
5	458.875	38.57	-0.93	46.0	7.43	Peak	294.00	100	Vertical	Pass
6*	890.902	43.94	4.89	46.0	2.06	QP	326.00	100	Vertical	Pass

Page 18 of 87


Report No.: TW2412174-03E

Date: 2025-01-20



Please refer to the following test plots for details:

CH01 for 11b at 1Mbps: Vertical

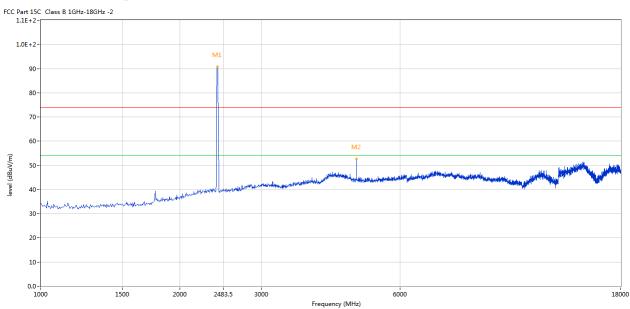


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2410.647	90.78	-3.57	74.0	16.78	Peak	255.00	100	Vertical	N/A
2	4824.044	52.53	3.14	74.0	-21.47	Peak	288.00	100	Vertical	Pass

Page 19 of 87 Report No.: TW2412174-03E

Date: 2025-01-20



CH01 for 11b at 1Mbps: Horizontal

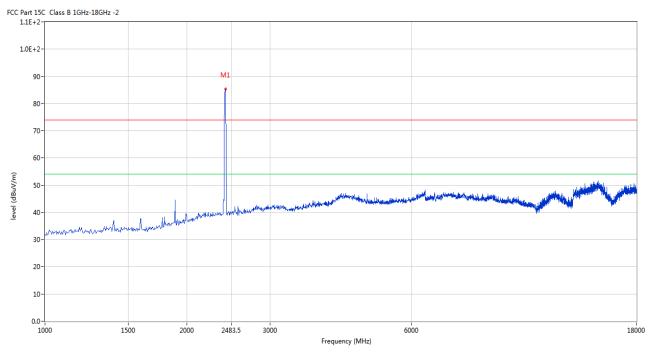


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2414.896	85.44	-3.57	74.0	11.44	Peak	179.00	100	Horizontal	N/A

Report No.: TW2412174-03E Page 20 of 87

Date: 2025-01-20



CH06 for 11b at 1Mbps: Vertical

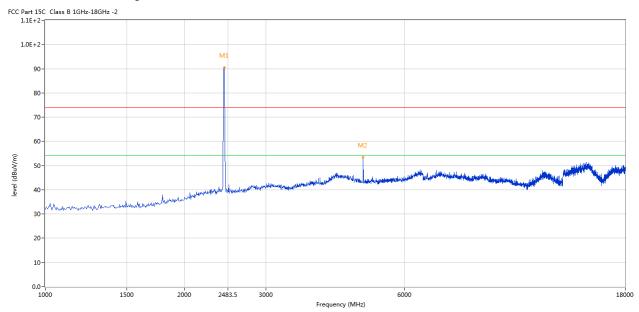


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2436.141	90.58	-3.57	74.0	16.58	Peak	269.00	100	Vertical	N/A
2	4872.173	53.53	3.19	74.0	-20.47	Peak	269.00	100	Vertical	Pass

Report No.: TW2412174-03E Page 21 of 87

Date: 2025-01-20



CH06 for 11b at 1Mbps: Horizontal

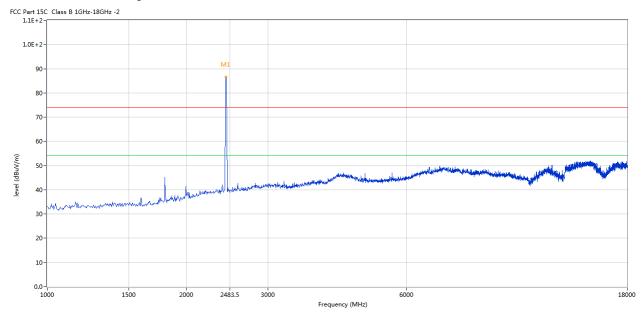


No	. Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2436.141	86.62	-3.57	74.0	12.62	Peak	191.00	100	Horizontal	N/A

Report No.: TW2412174-03E Page 22 of 87

Date: 2025-01-20



CH11 for 11b at 1Mbps: Vertical

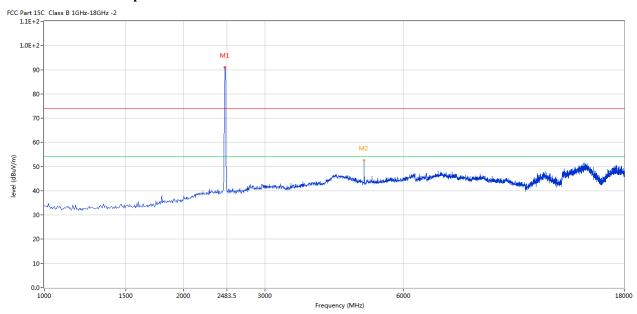


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2461.635	90.93	-3.57	74.0	16.93	Peak	88.00	100	Vertical	N/A
2	4921.770	52.52	3.27	74.0	-21.48	Peak	279.00	100	Vertical	Pass

Report No.: TW2412174-03E Page 23 of 87

Date: 2025-01-20



CH11 for 11g at 6Mbps: Horizontal

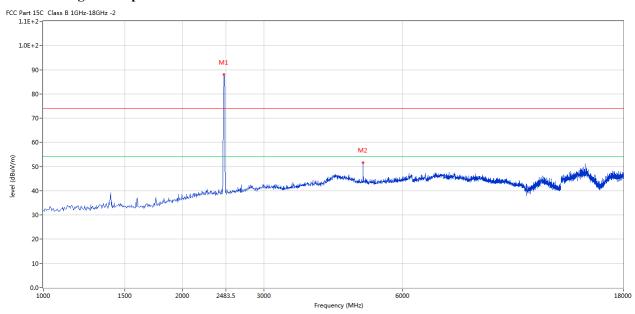

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2461.635	87.98	-3.57	74.0	13.98	Peak	176.00	100	Horizontal	N/A
2	4921.770	51.66	3.27	74.0	-22.34	Peak	181.00	100	Horizontal	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise.
- 5. The peak value less than the AV limit, no necessary to take down the AV measurement result.


Report No.: TW2412174-03E Page 24 of 87

Date: 2025-01-20



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 25 of 87 Report No.: TW2412174-03E

Date: 2025-01-20



6dB Occupied Bandwidth

EUT		Commerc	ial Kiosk T	ablet	Mod	lel	INI	F431
Mode		8	302.11b		Input Vol	tage	120	0V~
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
1		2412	1	10.14		0.5		Pass
6		2437	1	10	.14		0.5	Pass
11		2462	1	10	.16 0.5		0.5	Pass
1		2412	11	11	.04	.04		Pass
6		2437	11	11.04			0.5	Pass
11	2462		11	11	.16		0.5	Pass

Note: Two antennas (Ant 1 and Ant 2) were tested and only the worst cased was recorded in the test report. Ant 2 was the worst case.


Page 26 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



1. 802.11b at 1Mbps of CH01

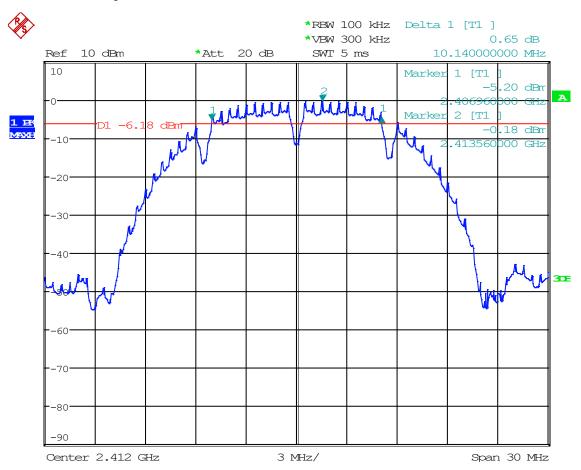

Date: 16.JAN.2025 09:21:04


Page 27 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



2. 802.11b at 1Mbps of CH06

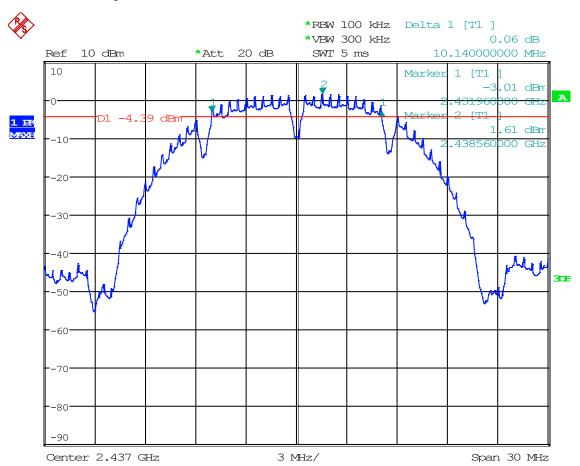

Date: 16.JAN.2025 10:01:26


Page 28 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



3. 802.11b at 1Mbps of CH11

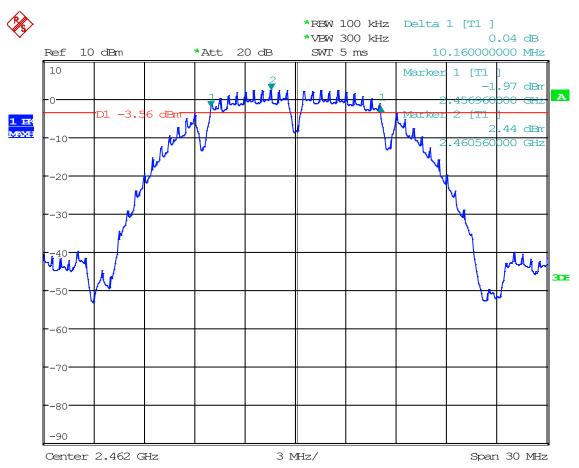

Date: 16.JAN.2025 11:39:51


Page 29 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



4. 802.11b at 11Mbps of CH01

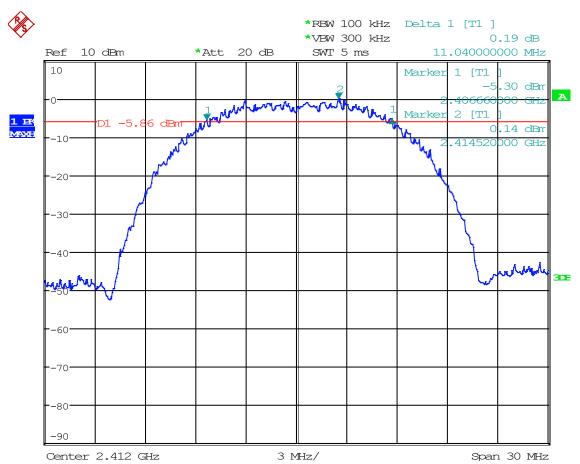

Date: 16.JAN.2025 09:28:23


Page 30 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



5. 802.11b at 11Mbps of CH06

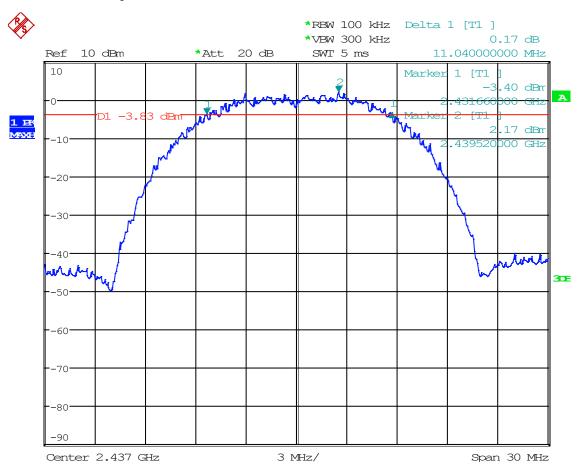

Date: 16.JAN.2025 10:09:36


Page 31 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



6. 802.11b at 11Mbps of CH11

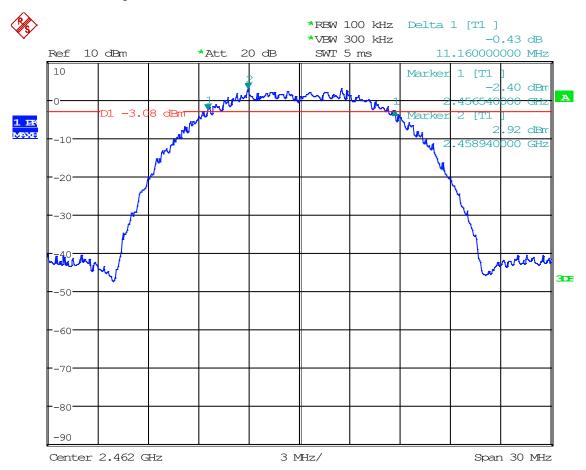

Date: 16.JAN.2025 10:18:33

Page 32 of 87 Report No.: TW2412174-03E

Date: 2025-01-20



6dB Occupied Bandwidth

EUT		Commerc	ial Kiosk T	ablet	Mod	lel	I	NF431
Mode		8	302.11g		Input Vol	tage		120V~
Temperature		24	4 deg. C,		Humidity		5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	-	ndwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	6	16	.32		0.5	Pass
6		2437	6	16	.32		0.5	Pass
11		2462	6	16	.38	0.5		Pass

Note: Two antennas (Ant 1 and Ant 2) were tested and only the worst cased was recorded in the test report. Ant 2 was the worst case.

Page 33 of 87


Report No.: TW2412174-03E

Date: 2025-01-20



Test Plots:

1.802.11g at 6Mbps of CH01

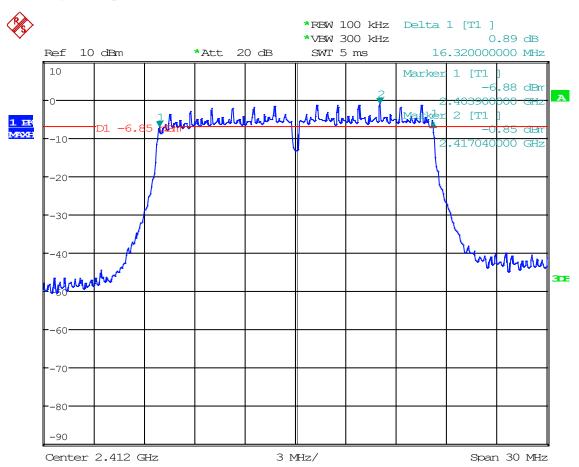

Date: 16.JAN.2025 09:31:53


Page 34 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



2. 802.11g at 6Mbps of CH06

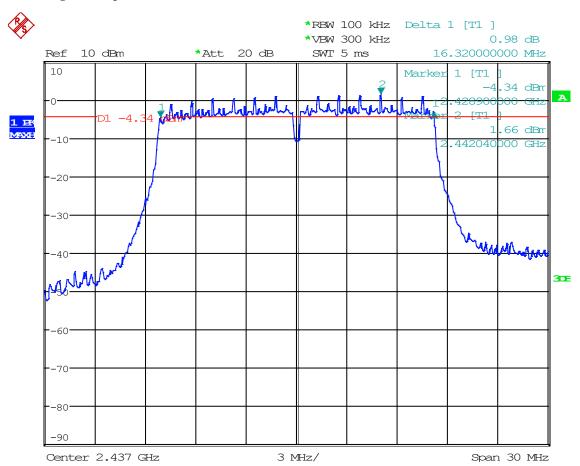

Date: 16.JAN.2025 09:57:43


Page 35 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



3. 802.11g at 6Mbps of CH11

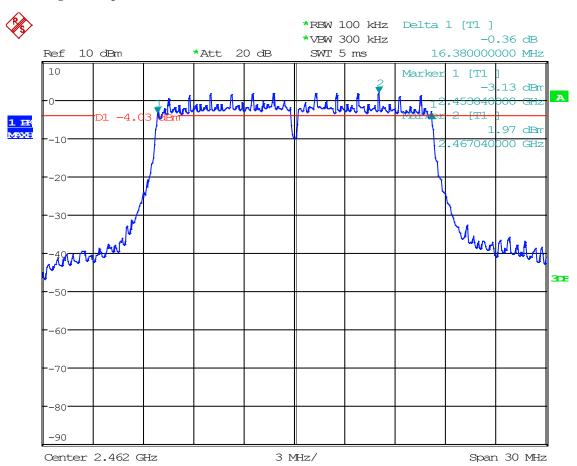

Date: 16.JAN.2025 11:17:39

Report No.: TW2412174-03E Page 36 of 87

Date: 2025-01-20



6dB Occupied Bandwidth

EUT		Commerc	ial Kiosk T	ablet	Mod	el	INI	F431
Mode		802	.11n HT20		Input Vol	tage	120	0V~
Temperat	Temperature		4 deg. C,		Humidity		56%	6 RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	-	ndwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	mcs0	17.16			0.5	Pass
6		2437	mcs0	17	.04		0.5	Pass
11	2462		mcs0	17	.28		0.5	Pass

Note: Two antennas (Ant 1 and Ant 2) were tested and only the worst cased was recorded in the test report. Ant 2 was the worst case.

Page 37 of 87


Report No.: TW2412174-03E

Date: 2025-01-20



Test Plots:

1.802.11n at HT20 of CH01

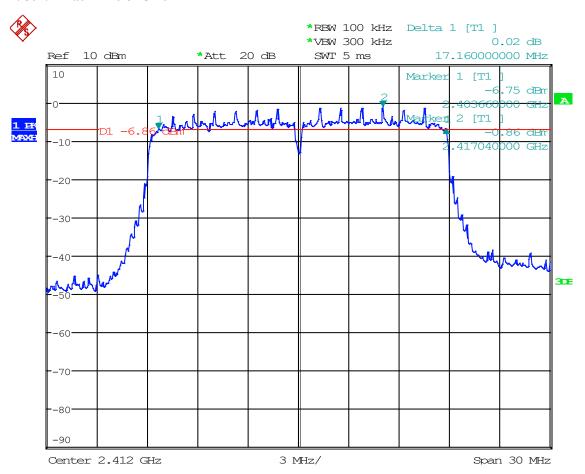

Date: 16.JAN.2025 09:38:27


Page 38 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



2.802.11n at HT20 of CH06

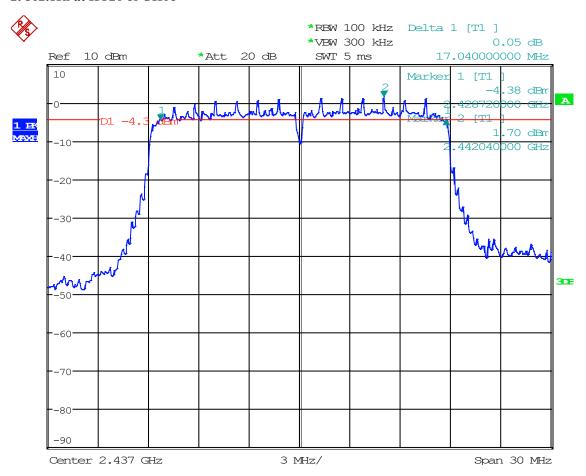

Date: 16.JAN.2025 09:47:17


Page 39 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



3.802.11n at HT20 of CH11

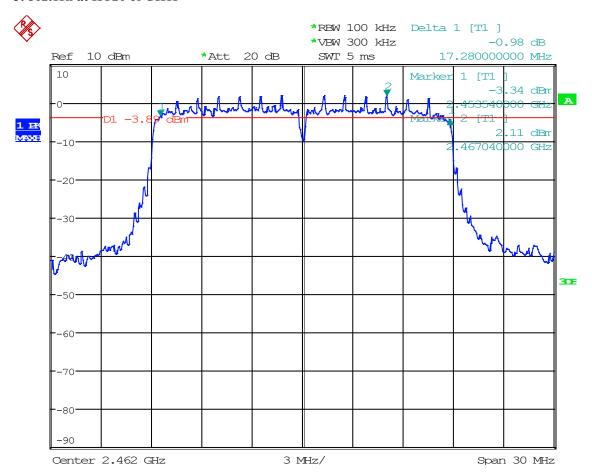

Date: 16.JAN.2025 11:21:56

Report No.: TW2412174-03E Page 40 of 87

Date: 2025-01-20



6dB Occupied Bandwidth

EUT		Commerc	ial Kiosk T	ablet	Mod	Model		F431
Mode		802	.11n HT40		Input Voltage		120V~	
Temperat	ure	24	4 deg. C,		Humidity		56% RH	
Channel		Channel Frequency (MHz)		6 dB Bandwidth (MHz)			mum Limit MHz)	Pass/ Fail
3		2422	mcs0 35		.80		0.5	Pass
6		2437	mcs0	35	.70	0.5		Pass
9	2452		mcs0	35	.80		0.5	Pass

Note: Two antennas (Ant 1 and Ant 2) were tested and only the worst cased was recorded in the test report. Ant 2 was the worst case.

Page 41 of 87


Report No.: TW2412174-03E

Date: 2025-01-20



Test Plots:

1.802.11n at HT40 of CH03

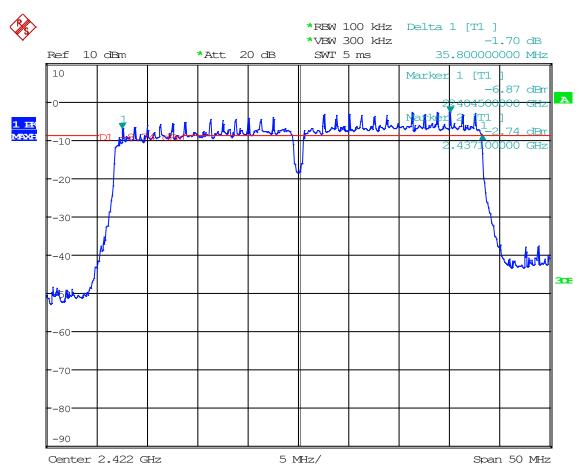

Date: 16.JAN.2025 11:29:55


Page 42 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



2.802.11n at HT40 of CH06

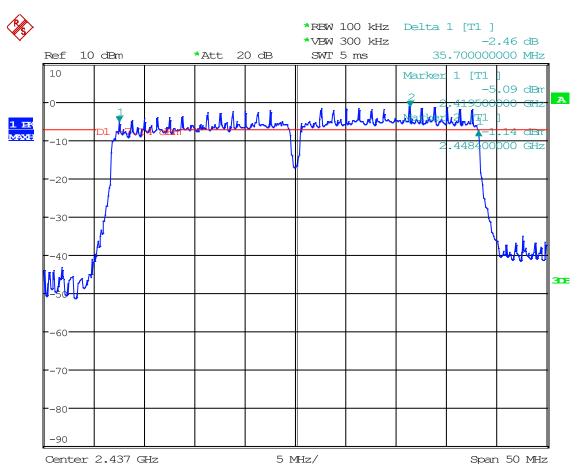

Date: 16.JAN.2025 11:32:09


Page 43 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



3.802.11n at HT40 of CH09

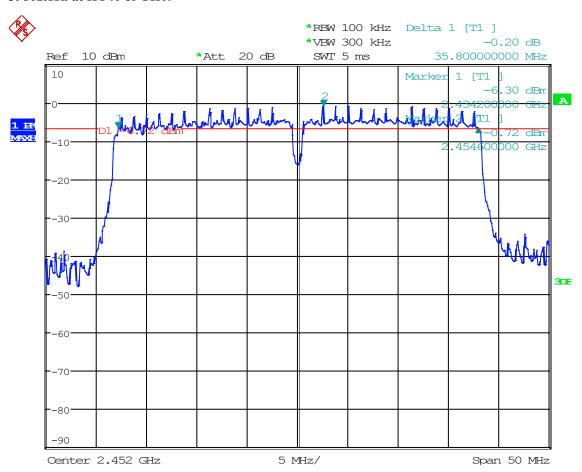

Date: 16.JAN.2025 11:33:39

Report No.: TW2412174-03E


Date: 2025-01-20



Page 44 of 87

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Peak power was measured

Report No.: TW2412174-03E Page 45 of 87

Date: 2025-01-20



8.4Test Results

EUT		Commercial Kiosk Tablet				Model	IN	NF431	
Mode		802.11b					Test Voltage	1:	20V~
Temperat	ure	24 deg. C,					Humidity	5% RH	
Channel	Frequ (MH	uency			Ant 2 Power Ant 1 Power		Power Li (dBm)		Pass/ Fail
	(10111)	<i>L)</i>	dBm	mW	dBm	mW	(dDill)	,	
1	2412		11.88	15.42	10.56	11.38	30		Pass
6	2437		14.07	25.53	13.23	21.04	30		Pass
11	2462		15.10	32.36	14.63	29.04	30		Pass

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		Сс	mmerci	al Kiosk	Tablet	M	Iodel	INF4	431	
Mode			80)2.11g		Test	Voltage	120	V~	
Temperat	ure		24	deg. C,		Hu	umidity 56%		RH	
Channel	Frequ (MH	equency Ant 2 Powe		Power	Ant 1 Po	wer		ver Limit dBm)	Pass/ Fail	
	(IVIII	Z)	dBm	mW	dBm	mW	(ивііі)		
1	2412		18.18	65.77	17.23	52.84		30	Pass	
6	2437		16.77	47.53	15.53	35.73		30	Pass	
11	2462		17.75	59.57	17.01	50.23		30	Pass	

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No.: TW2412174-03E Page 46 of 87

Date: 2025-01-20



EUT		Commercial Kiosk Tablet			N	Model		INF431			
Mode		802.11n (HT20) Test Vol		Voltage	Voltage 120V~		,				
Temperat	ure		24	deg. C,		Hu	midity		56% RH		
Channel	Frequ (MH			Ant 1 Po	wer	Total Ma Power Out		Power Limit	Pass/ Fail		
	(IVIII	<i>L)</i>	dBm	mW	dBm	mW	-MIMO (dl	3m)	(dBm)		
1	2412		17.70	58.88	16.35	43.15	20.09		30	Pass	
6	2437		16.30	42.66	15.12	32.51	18.76		30	Pass	
11	2462		17.41	55.08	16.71	46.88	20.08	·	30	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		Commercial Kiosk Tablet]	Model		INF431		
Mode		802.11n (HT40)			Tes	Test Voltage		120V~			
Temperat	ure		24 deg. C, Humidity 56% RH			RH					
Channel	Frequ (MH	uency z)	Ant 2 I	Power mW	Ant 1 Po	wer mW	Total Ma Power Output-MI (dBm)		Power Limit (dBm)	Pass/ Fail	
3	2422		19.03	79.98	18.15	65.31	21.62		30	Pass	
6	2437		16.63	46.03	15.68	36.98	19.19		30	Pass	
9	2452		17.46	55.72	16.11	40.83	19.85		30	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No.: TW2412174-03E

Date: 2025-01-20



Page 47 of 87

9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2412174-03E

Date: 2025-01-20



Page 48 of 87

9.4Test Result

EUT		Commercial Kiosk Tablet		Model	INF ²	131
Mode		802.11b 11Mbps		Test Voltage	120	V~
Temperat	ure	are 24 deg. C,		Humidity	56%	RH
Channel	_	uency [Hz)	Ant 2 Power Spects	ral Density (dBm/10kHz)	Limit (dBm/3kHz	Pass/ Fail
1	24	412		-8.77	8	Pass
6	24	437		-6.53	8	Pass
11	24	462		-5.85	8	Pass

Note: Ant 1 and Ant 2 were tested and Ant 2 was the worst case

EUT		C	ommercial Kiosk Tablet	Model		INF431	
Mode		802.11b 1Mbps		Test Voltage		120V~	
Temperat	ure	24 deg. C,		Humidity		56% RF	I
Channel	Freq	uency Ant 2 Power Spectral 1		Density (dBm/10kHz)		Limit	Pass/ Fail
	(M	Hz)				(dBm/3kHz)	
1	24	112	-9.	.88		8	Pass
6	24	37 -7.		.75		8	Pass
11	24	162	-6.	75		8	Pass

Note: Ant 1 and Ant 2 were tested and Ant 2 was the worst case

Page 49 of 87 Report No.: TW2412174-03E

Date: 2025-01-20

EUT		Commercial Kiosk Tablet		Model		INF431					
Mode		802.11g 6Mbps		802.11g 6Mbps		Test Voltage		802.11g 6Mbps Test Voltage		120V~	
Temperat	ure	24 deg. C,		Humidity		56% RH					
Channel	_	uency	Ant 2 Power Spectra	al Density (dBm/10kHz)		Limit	Pass/ Fail				
	(M	(Hz)				(dBm/3kHz)					
1	24	412	-]	-10.77		8	Pass				
6	24	137	-	-8.33		8	Pass				
11	24	162	-	6.66		8	Pass				

Note: Ant 1 and Ant 2 were tested and Ant 2 was the worst case

EUT		Commercial Kiosk Tablet		ablet		Model		INF43	1
Mode	;	802.11n HT20 mcs0		s0		Test Voltage		120V~	
Temperat	ture		24 deg. C,		Humidity			56% RH	
Channel	Freq	uency	Ant 2 Power	Factor		Total Power Spectra	al	Limit	Pass/ Fail
	(M	(Hz)	Spectral Density			Density-MIMO		(dBm/3kHz)	
						(dBm/10kHz)			
1	24	112	-10.77	3.01		-7.76		8	Pass
6	24	137	-8.94	3.01		-5.93		8	Pass
11	24	162	-7.26	3.01		-4.25		8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

^{2.} Factor=10log2=3.01

^{3.} Ant 1 and Ant 2 were tested and Ant 2 was the worst case

Report No.: TW2412174-03E

Date: 2025-01-20



Page 50 of 87

EUT		Commercial Kiosk Tablet]	Model		INF431	
Mode	;	802.11n HT40 mcs0 T			Tes	st Voltage	120V~		
Temperat	ture		24 deg. C,		Н	umidity		56% RH	
Channel	_	uency [Hz]	Ant 2 Power Spectral Density	Factor		otal Power Spectral Density-MIMO (dBm/10kHz)		Limit (dBm/3kHz)	Pass/ Fail
3	24	122	-12.23	3.01		-9.22		8	Pass
6	24	137	-14.57	3.01		-11.56		8	Pass
9	24	152	-13.96	3.01		-10.95		8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

^{2.} Factor=10log2=3.01

^{3.} Ant 1 and Ant 2 were tested and Ant 2 was the worst case

Page 51 of 87


Report No.: TW2412174-03E

Date: 2025-01-20



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

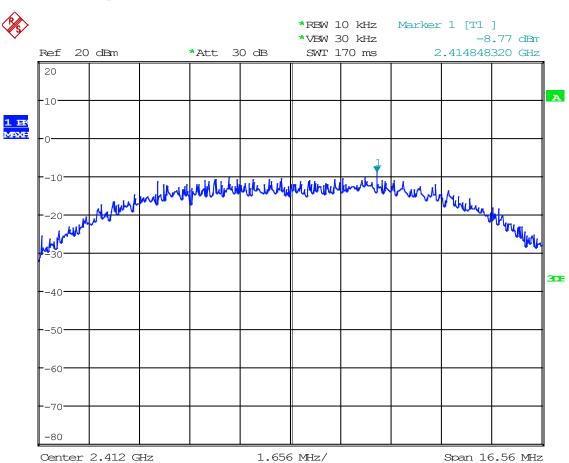

Date: 16.JAN.2025 15:01:52


Page 52 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



2. 802.11b at 11Mbps at CH06

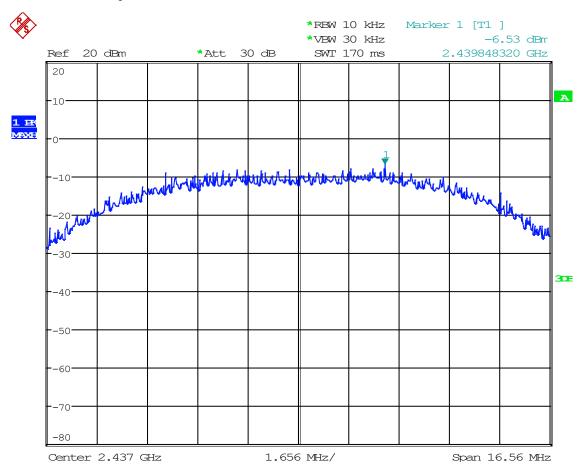

Date: 16.JAN.2025 15:01:08


Page 53 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



3. 802.11b at 11Mbps of CH11

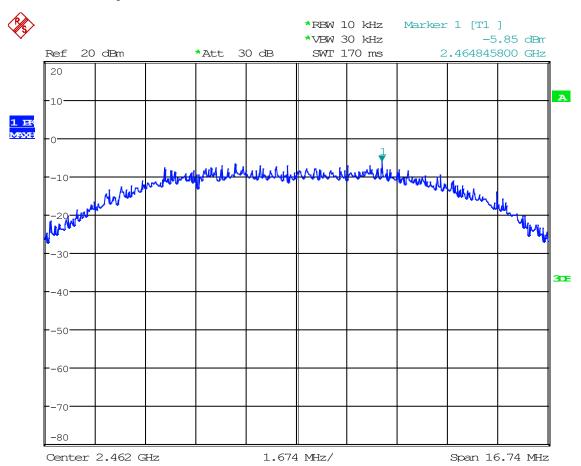

Date: 16.JAN.2025 14:59:08


Page 54 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



4. 802.11b at 1Mbps of CH1

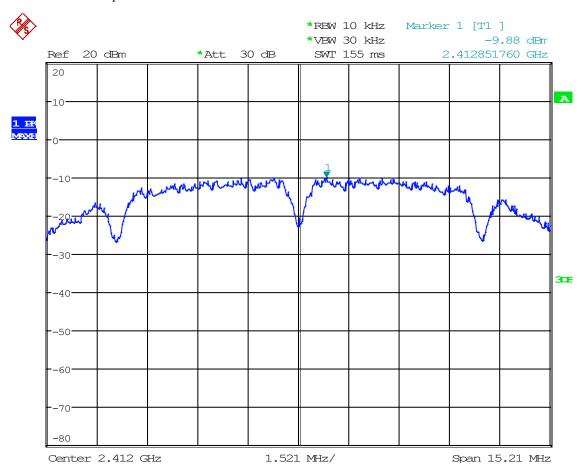

Date: 16.JAN.2025 14:45:53


Page 55 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



5. 802.11b at 1Mbps of CH6

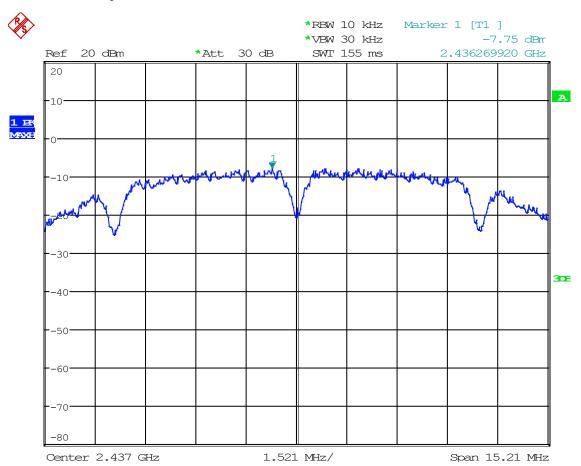

Date: 16.JAN.2025 14:49:45


Page 56 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



6. 802.11b at 1Mbps of CH11

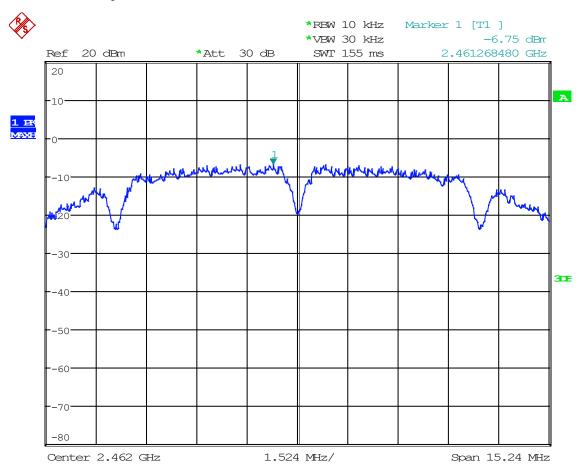

Date: 16.JAN.2025 14:52:58


Page 57 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



7. 802.11g at 6Mbps of CH1

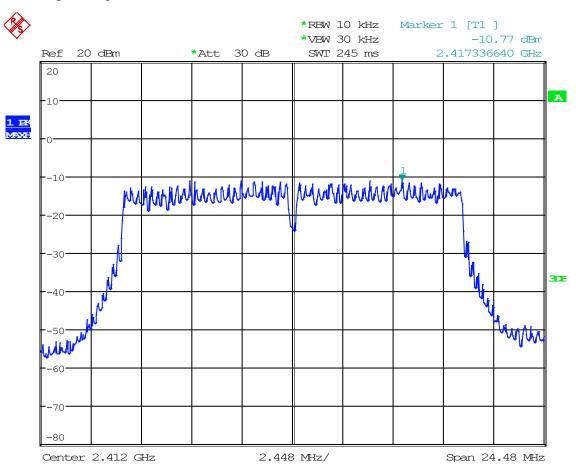

Date: 16.JAN.2025 15:04:12


Page 58 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



8. 802.11g at 6Mbps of CH6

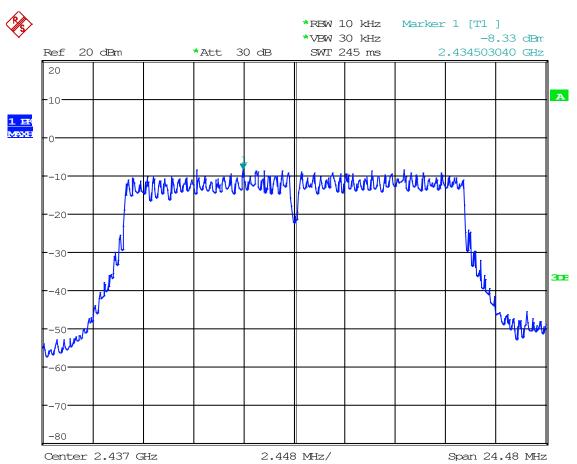

Date: 16.JAN.2025 15:04:58


Page 59 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



9. 802.11g at 6Mbps of CH11

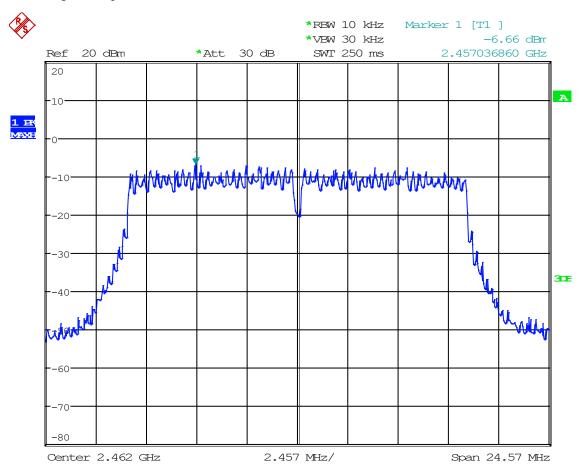

Date: 16.JAN.2025 15:07:44


Page 60 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



10. 802.11n at HT20 of CH01

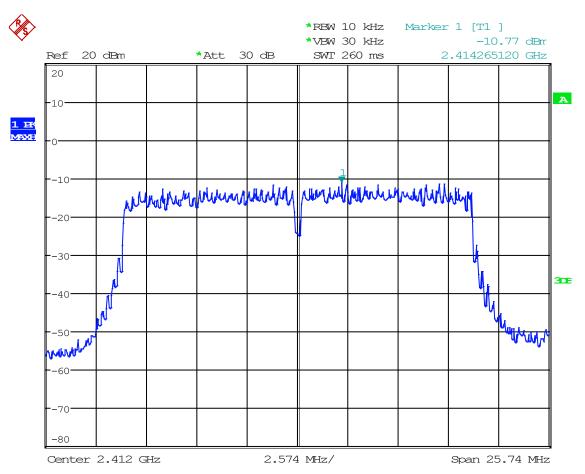

Date: 16.JAN.2025 15:12:47


Page 61 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



11. 802.11n at HT20 of CH06

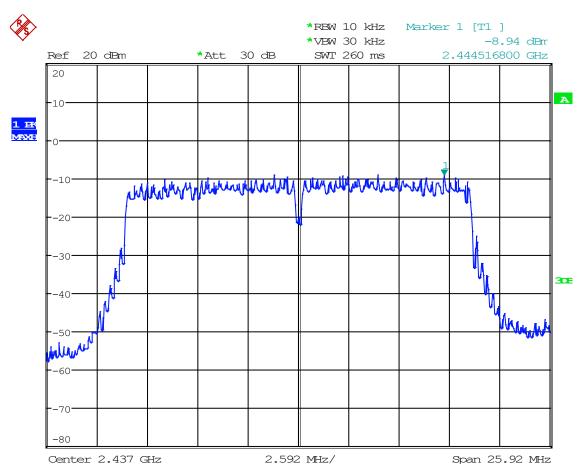

Date: 16.JAN.2025 15:10:24


Page 62 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



12. 802.11n at HT20 of CH11

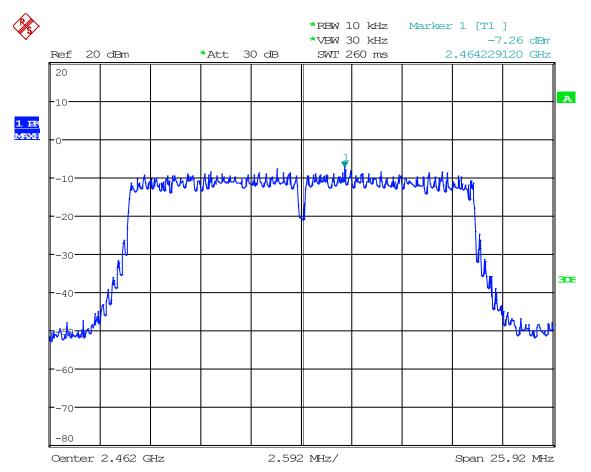

Date: 16.JAN.2025 15:09:22


Page 63 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



13. 802.11n at HT40 of CH03

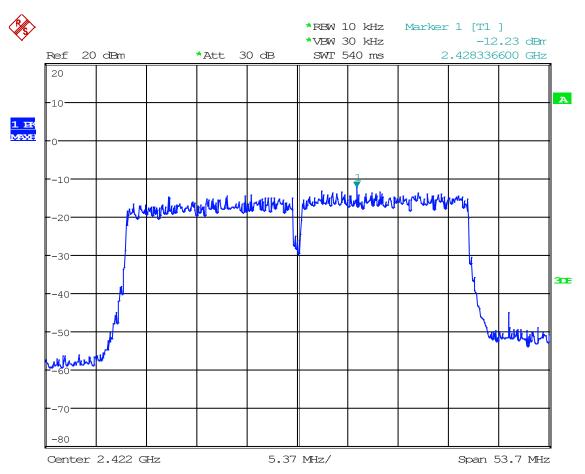

Date: 16.JAN.2025 14:37:34


Page 64 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



14. 802.11n at HT40 of CH06

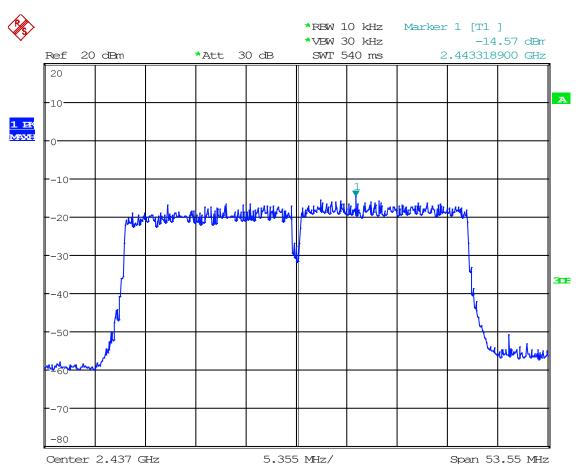

Date: 16.JAN.2025 14:30:19


Page 65 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



15. 802.11n at HT40 of CH09

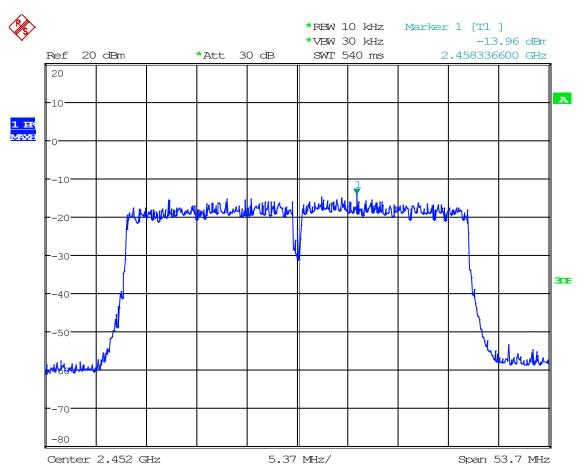

Date: 16.JAN.2025 14:21:17

Report No.: TW2412174-03E


Date: 2025-01-20



Page 66 of 87

10.1 Test Setup for band edge

10 Out of Band Measurement



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used ANT 1 and ANT 2 mode all have been tested and only worse case is reported.

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

- 3. ANT 1 and ANT 2 mode all have been tested for 802.11b &11g, and only worse case is reported.
- 4. For 802.11n, Ant 1 and Ant 2 transmit Simultaneously.

Report No.: TW2412174-03E Page 67 of 87

Date: 2025-01-20




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

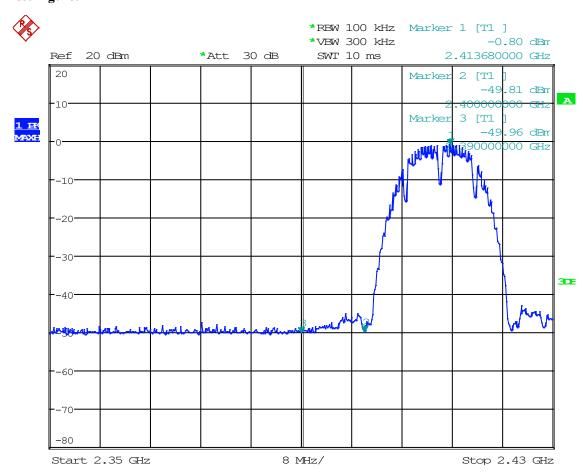

Date: 16.JAN.2025 15:27:59

Page 68 of 87

Report No.: TW2412174-03E

Date: 2025-01-20




CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

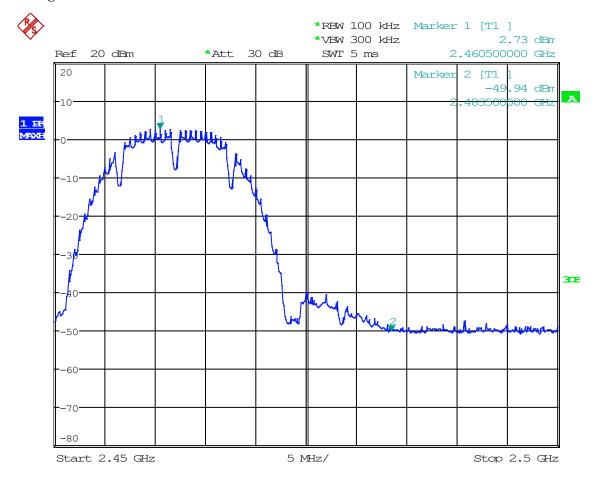

Date: 16.JAN.2025 15:34:26

Page 69 of 87

Report No.: TW2412174-03E

Date: 2025-01-20




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

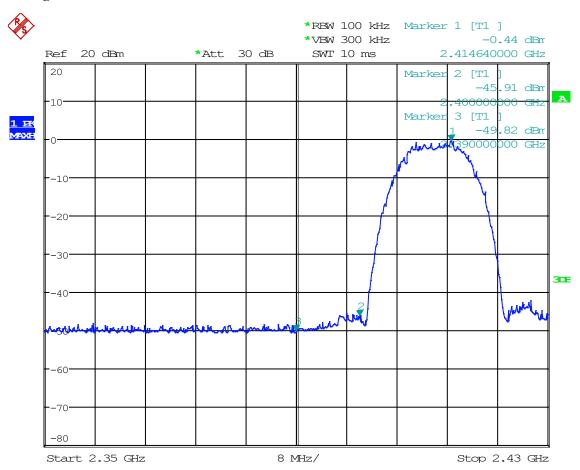

Date: 16.JAN.2025 15:29:55

Page 70 of 87 Report No.: TW2412174-03E

Date: 2025-01-20




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

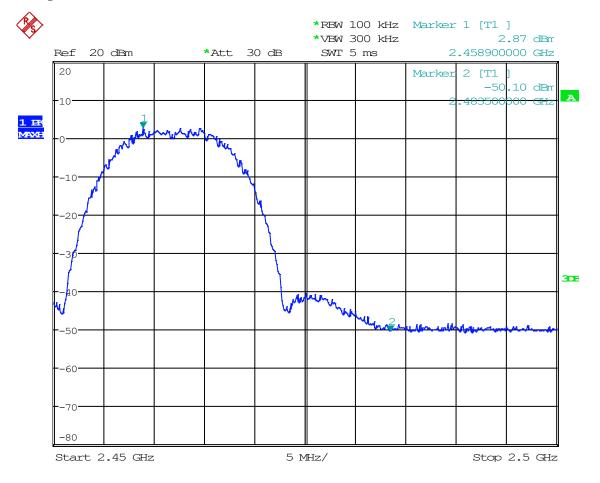

Date: 16.JAN.2025 15:36:31

Page 71 of 87 Report No.: TW2412174-03E

Date: 2025-01-20




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

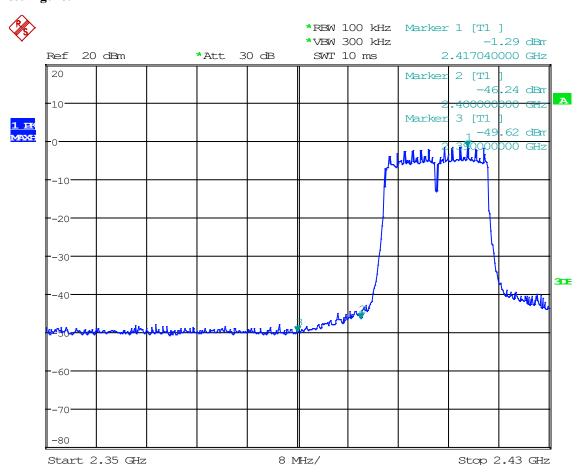

Date: 16.JAN.2025 15:25:42

Page 72 of 87 Report No.: TW2412174-03E

Date: 2025-01-20




CH11 at 6Mbps

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

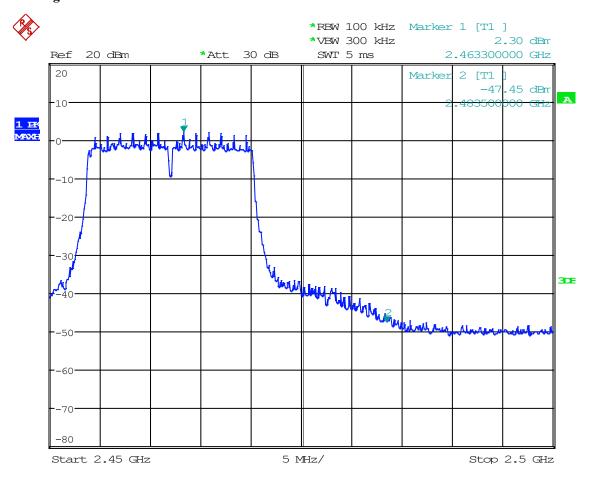

Date: 16.JAN.2025 15:37:39

Page 73 of 87 Report No.: TW2412174-03E

Date: 2025-01-20




For 802.11n (HT20) mode

CH01 at mcs0

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

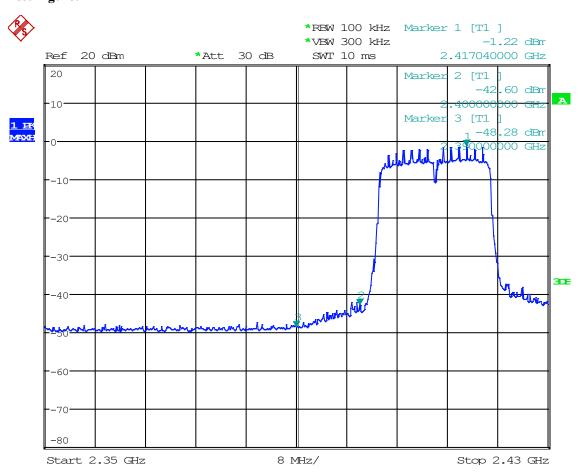

Date: 16.JAN.2025 15:23:38

Page 74 of 87 Report No.: TW2412174-03E

Date: 2025-01-20




CH11 at mcs0

10.4 Band-edge Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature 24 deg. C,		Humidity	56% RH
Test Result:			PK

Test Figure:

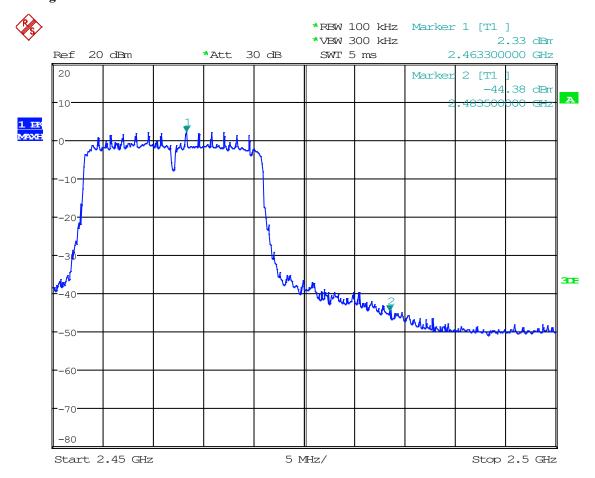

Date: 16.JAN.2025 15:39:06

Page 75 of 87 Report No.: TW2412174-03E

Date: 2025-01-20




For 802.11n (HT40) mode

CH03 at mcs0

10.4 Band-edge and Restricted band Measurement

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

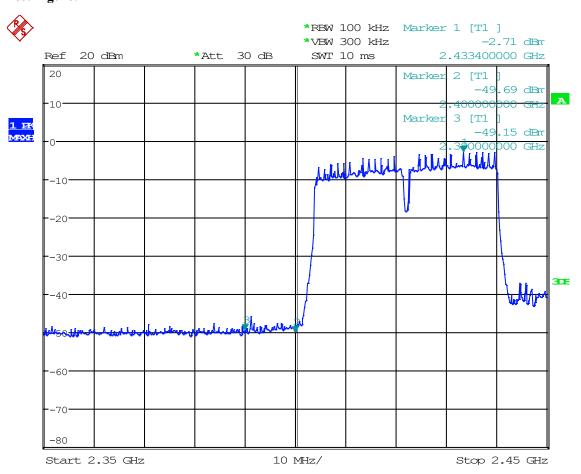

Date: 16.JAN.2025 15:31:13

Page 76 of 87 Report No.: TW2412174-03E

Date: 2025-01-20




CH09 at mcs0

Band-edge and Restricted band Measurement 10.4

EUT	Commercial Kiosk Tablet	Model	INF431
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

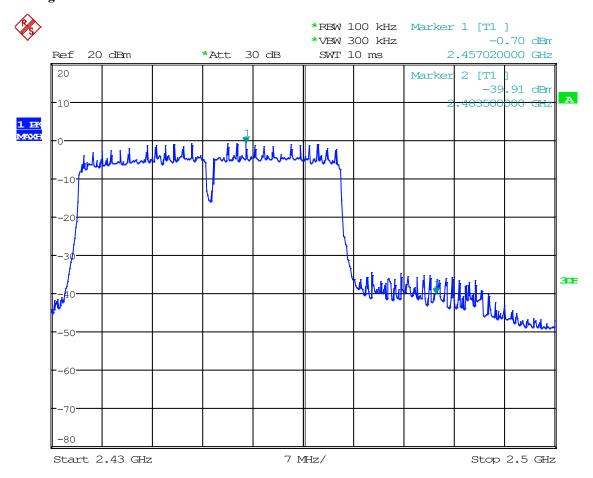

Date: 16.JAN.2025 15:32:41

Report No.: TW2412174-03E Page 77 of 87

Date: 2025-01-20



10.5 Restricted band Measurement

EUT	Commercial Kiosk Tablet				odel	INF431	
Mode	Kee	Keeping Transmitting			/oltage	120V~	
Temperature		24 deg. C,		Hun	nidity	56% RH	
Test Result:		Pass				PK	
802.11b mode, Low Channel, Horizontal							
2390	PK (dBμV/m)	39.53	т:			$74(dB\mu V/m)$	
	AV (dBμV/m)		Lli	nit		$54(dB\mu V/m)$	
		802.11b mode, Low	Channel,	Vertical			
2390	PK (dBμV/m)	41.97	т.	,		$74(dB\mu V/m)$	
	AV (dBμV/m)		Lii	nit		$54(dB\mu V/m)$	

Total Technical Cana Measurement							
EUT	Commercial Kiosk Tablet				odel	INF431	
Mode	Ke	eeping Transmitting		Test Voltage		120V~	
Temperature		24 deg. C,		Hur	nidity	56% RH	
Test Result:		Pass				PK	
802.11b mode, High Channel, Horizontal							
2483.5	PK (dBμV/m)	39.68	т.	٠,		$74(dB\mu V/m)$	
	AV (dBμV/m)		Lim	1τ		$54(dB\mu V/m)$	
		802.11b mode, High	Channel, V	/ertical			
2483.5	PK (dBμV/m)	37.23	Limit			74(dBμV/m)	
	AV (dBμV/m)		Lim	Ιί		54(dBμV/m)	

Report No.: TW2412174-03E Page 78 of 87

Date: 2025-01-20



10.5 Restricted band Measurement

EUT	Commercial Kiosk Tablet				odel	INF431
Mode	Kee	eping Transmitting		Test V	/oltage	120V~
Temperature		24 deg. C,		Hun	nidity	56% RH
Test Result:		Pass		Det	ector	PK
802.11g mode, Low Channel, Horizontal						
2390	PK (dBµV/m)	38.31	т:.			$74(dB\mu V/m)$
	AV (dBμV/m)		Lli	mit		54(dBµV/m)
		802.11g mode, Low	Channel,	Vertical		
2390	PK (dBμV/m)	42.51	т:.	Limit		74(dBµV/m)
	AV (dBμV/m)		Lli	IIII		$54(dB\mu V/m)$

10.0 Restricted out a redistrement							
EUT	Commercial Kiosk Tablet				odel	INF431	
Mode	Ke	eeping Transmitting		Test Voltage		120V~	
Temperature		24 deg. C,		Huı	nidity	56% RH	
Test Result:		Pass				PK	
802.11g mode, High Channel, Horizontal							
2483.5	PK (dBμV/m)	39.76	т.	•,		$74(dB\mu V/m)$	
	AV (dBμV/m)		Lim	Limit		$54(dB\mu V/m)$	
		802.11g mode, High	Channel, V	Vertical			
2483.5	PK (dBμV/m)	40.75	Limit			74(dBµV/m)	
	AV (dBμV/m)		Limi	Il		54(dBμV/m)	

Report No.: TW2412174-03E Page 79 of 87

Date: 2025-01-20



10.5 Restricted band Measurement

EUT	Commercial Kiosk Tablet			Model		INF431	
Mode	Kee	eping Transmitting		Test V	/oltage	120V~	
Temperature		24 deg. C,		Hun	nidity	56% RH	
Test Result:		Pass		Det	ector	PK	
	802.11n HT20 mode, Low Cha						
2390	PK (dBµV/m)	41.36	т:.	nit		$74(dB\mu V/m)$	
	AV (dBμV/m)		LII	mı		$54(dB\mu V/m)$	
	8	302.11n HT20 mode, Lo	ow Chanr	nel, Verti	cal		
2390	PK (dBμV/m)	42.67	т :.	Limit		74(dBµV/m)	
	AV (dBμV/m)		Lii	IIII		$54(dB\mu V/m)$	

EUT	Com	Commercial Kiosk Tablet				INF431	
Mode	Ke	Keeping Transmitting			Voltage	120V~	
Temperature		24 deg. C,		Hur	nidity	56% RH	
Test Result:		Pass				PK	
802.11n HT20 mode, High Channel, Horizontal							
2483.5	PK (dBµV/m)	39.31	т:	:4		$74(dB\mu V/m)$	
	AV (dBμV/m)		Lim	Ιτ		$54(dB\mu V/m)$	
	8	302.11n HT20 mode, Hi	igh Channe	el, Verti	cal		
2483.5	PK (dBμV/m)	38.18	Lim	:.		74(dBμV/m)	
	AV ($dB\mu V/m$)		LIIII	Il		$54(dB\mu V/m)$	

Page 80 of 87

Report No.: TW2412174-03E


Date: 2025-01-20



10.5 Restricted band Measurement

EUT	Comi	M	odel	INF431		
Mode	Kee	eping Transmitting		Test	Voltage	120V~
Temperature		24 deg. C,		Hui	nidity	56% RH
Test Result:		Pass		De	tector	PK
	802.11n HT40 mode, Low Chan				ntal	
2390	PK (dBμV/m)	39.62	т:.			$74(dB\mu V/m)$
	AV (dBμV/m)		Lli	mit		54(dBμV/m)
		802.11n HT40 mode, L	ow Chan	nel Vertic	al	
2390	PK (dBμV/m)	43.44	т.:.	imit		74(dBμV/m)
	AV (dBμV/m)		Lli	mı		54(dBμV/m)

Test Plots

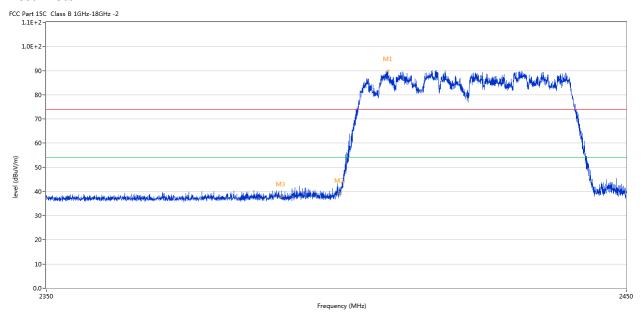

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2408.385	89.95	-3.57	74.0	15.95	Peak	81.00	100	Horizontal	N/A
2	2400.000	39.62	-3.57	74.0	-34.38	Peak	84.00	100	Horizontal	Pass
3	2390.000	38.01	-3.53	74.0	-35.99	Peak	85.80	100	Horizontal	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 81 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



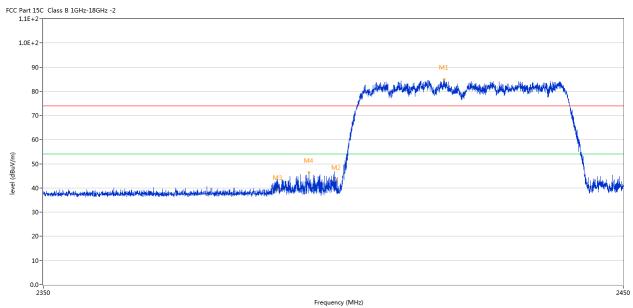


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2418.658	84.89	-3.57	74.0	10.89	Peak	175.00	100	Vertical	N/A
2	2400.000	43.44	-3.57	74.0	-30.56	Peak	95.50	100	Vertical	Pass
3	2390.000	39.31	-3.53	74.0	-34.69	Peak	33.40	100	Vertical	Pass
4	2395.264	46.37	-3.55	74.0	-27.63	Peak	98.00	100	Vertical	Pass

Report No.: TW2412174-03E Page 82 of 87

Date: 2025-01-20



EUT	Com	mercial Kiosk Tablet	Model		INF431				
Mode	Ke	eeping Transmitting	Test	Voltage	120V~				
Temperature		24 deg. C,	Humidity		56% RH				
Test Result:		Pass	De	etector	PK				
802.11n HT40 mode, High Channel, Horizontal									
2483.5	PK (dBμV/m) 41.77				$74(dB\mu V/m)$				
	AV (dBμV/m)		Lim	Limit		$54(dB\mu V/m)$			
802.11n HT40 mode, High Channel, Vertical									
2483.5	PK (dBμV/m)	38.41	т.	٠,		74(dBμV/m)			
	AV (dBμV/m)		Limit			$54(dB\mu V/m)$			

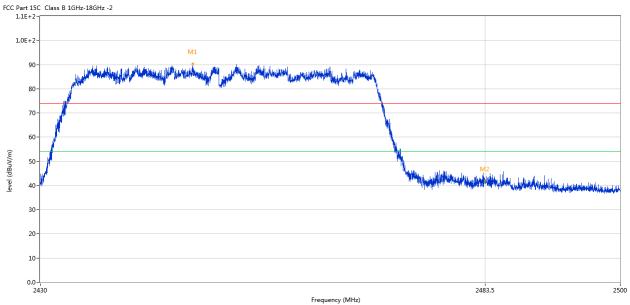


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2448.213	90.34	-3.57	74.0	16.34	Peak	263.00	100	Horizontal	N/A
2	2483.500	41.77	-3.57	74.0	-32.23	Peak	264.44	100	Horizontal	Pass

Page 83 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



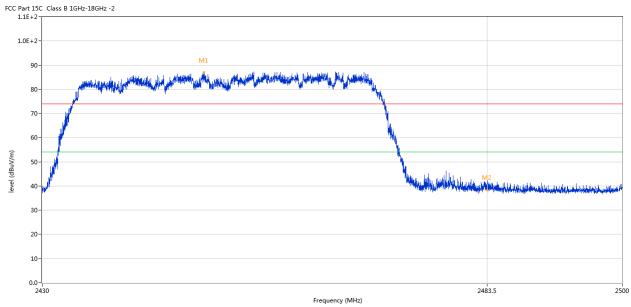

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2449.280	86.96	-3.57	74.0	12.96	Peak	176.00	100	Vertical	N/A
2	2483.500	38.41	-3.57	74.0	-35.59	Peak	91.22	100	Vertical	Pass

Report No.: TW2412174-03E

Date: 2025-01-20



Page 84 of 87

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Two Dipole antennas used. The gain of the antenna is 1.39dBi for each one.

Report No.: TW2412174-03E Page 85 of 87

Date: 2025-01-20




12.0 FCC ID Label

FCC ID: 2AACS-INF431

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

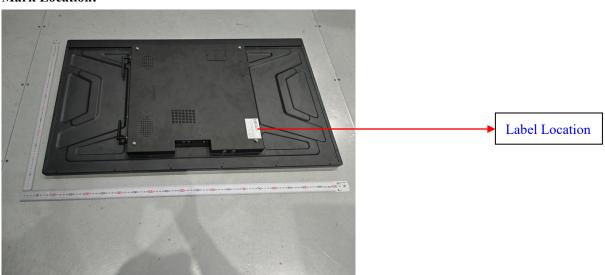

Page 86 of 87

Report No.: TW2412174-03E

Date: 2025-01-20



13.0 **Photo of testing**

Conducted Emission Test Setup:




Report No.: TW2412174-03E

Date: 2025-01-20



Radiated Emission Test Setup:

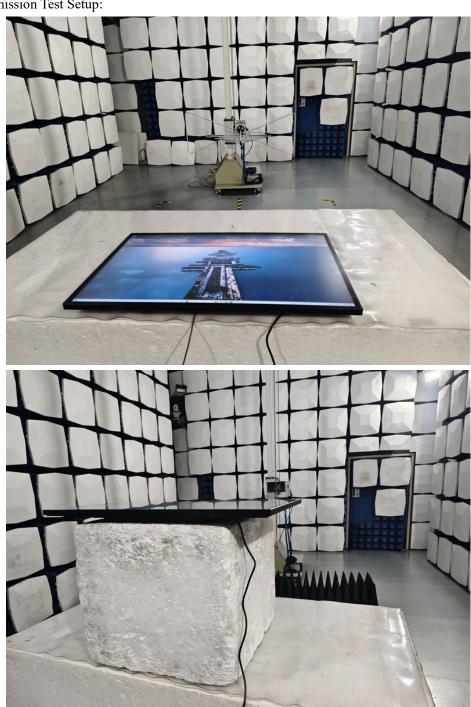

Photographs - EUT

Please refer test report TW2412174-01

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.