

FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nan shan District, Shenzhen,
518057 China

FCC ID: YAMHP6XXVHFS


Report Type: Original Report	Product Type: Digital Portable Radio
Report Number: <u>DG2210701-26543E-00C</u>	
Report Date: <u>2021-08-02</u>	
Reviewed By:	Gavin Xu RF Engineer 
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
TECHNICAL SPECIFICATION.....	3
OBJECTIVE	3
TEST METHODOLOGY.....	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
DECLARATIONS	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EQUIPMENT MODIFICATIONS.....	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	5
SUPPORT CABLE LIST AND DETAILS.....	5
BLOCK DIAGRAM OF TEST SETUP	5
TEST EQUIPMENT LIST	6
ENVIRONMENTAL CONDITIONS	6
SUMMARY OF TEST RESULTS	7
2 - RF OUTPUT POWER	8
APPLICABLE STANDARD.....	8
TEST PROCEDURE.....	8
TEST DATA.....	8
3 - MODULATION CHARACTERISTIC	14
APPLICABLE STANDARD.....	14
TEST PROCEDURE.....	14
TEST DATA.....	14
4 – OCCUPIED BANDWIDTH & EMISSION MASK.....	19
APPLICABLE STANDARD.....	19
TEST PROCEDURE.....	19
TEST DATA.....	19
5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	29
APPLICABLE STANDARD.....	29
TEST PROCEDURE.....	29
TEST DATA.....	29
6 - RADIATED SPURIOUS EMISSIONS.....	34
APPLICABLE STANDARD.....	34
TEST PROCEDURE.....	34
TEST DATA.....	34
7 - FREQUENCY STABILITY	40
APPLICABLE STANDARD.....	40
TEST PROCEDURE.....	40
TEST DATA.....	40
8 - TRANSIENT FREQUENCY BEHAVIOR.....	44
APPLICABLE STANDARD.....	44
TEST PROCEDURE.....	44
TEST DATA.....	45

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name:		Digital Portable Radio
Test Model:		HP682 VHF
Multiple Model:		HP685 VHF, HP686 VHF, HP688 VHF, HP602 VHF, HP605 VHF, HP606 VHF, HP608 VHF, HDP682 VHF, HDP685 VHF, HDP686 VHF, HDP688 VHF, HDP602 VHF, HDP605 VHF, HDP606 VHF, HDP608 VHF
Rated Input Voltage:		DC 7.7V from Battery, DC 12V charging from Charger Base
Serial Number:		HP682 VHF: DG2210701-26543E-RF-S1 HP602 VHF: DG2210701-26543E-RF-S2
Adapter Information	Model:	HKA01212010-XQ
	Input:	AC 100-240V 50/60Hz 0.5A
	Output:	DC 12.0V 1.0A
EUT Received Date:		2021.7.2
EUT Received Status:		Good

Technical Specification

Operation Frequency Range (MHz):	136-174
Rated RF Output Power (Conducted) (W):	High power level: 5 Low power level: 1
Modulation Type:	FM, 4FSK
Channel Spacing (kHz):	12.5/25

Objective

This test report is prepared on behalf of **Hytera Communications Corporation Limited** in accordance with Part 2, and Part 22,74,80 and 90 of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with:

the Code of federal Regulations Title 47, Part 2, Part 22, Part 74, Part 80 and Part 90

ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

TIA-603-E-2016, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software

No software was tested in test.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Wenschel	Termination	1440	MD477

Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

Block Diagram of Test Setup

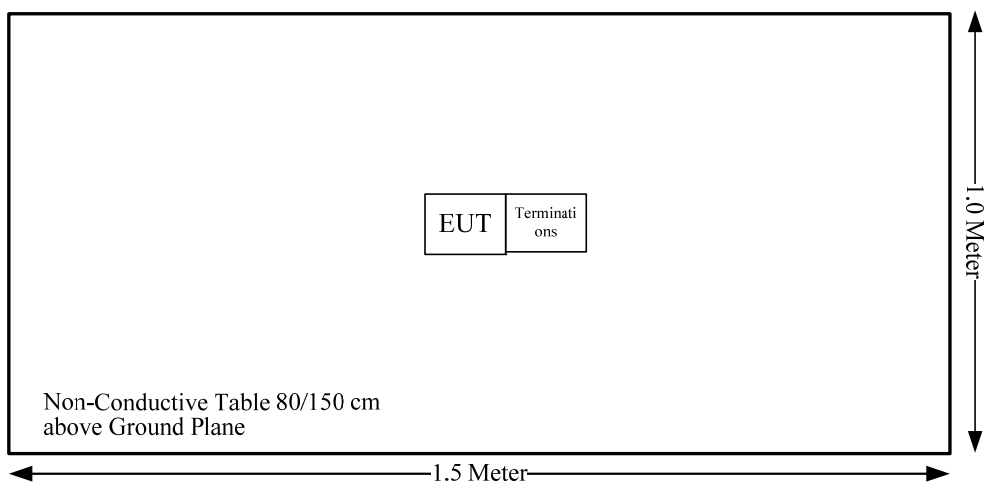

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emissions below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Radiated emissions above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-07	2022-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2020-09-05	2021-09-05
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2020-09-12	2021-09-12
R&S	Spectrum Analyzer	FSV40	101474	2021-07-06	2022-07-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010013	2020-09-05	2021-09-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2020-09-05	2021-09-05
Weinschel	Coaxial Attenuators	53-20-34	LN749	2020-09-06	2021-09-06
E-Microwave	Coaxial Attenuators	EMCA40-200SN-6	OE01201046	2020-09-06	2021-09-06
HP	RF Communications Test Set	8920A	3438A05201	2021-07-06	2022-07-05
BACL	TEMP&HUMI Test Chamber	BTH-150	30022	2021-02-24	2022-02-23
UNI-T	Multimeter	UT39A	M130199938	2020-08-25	2021-08-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Test Item:	RF Conducted	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	25.4~29.6℃	26.2℃	29.1℃
Relative Humidity:	43~59 %	38%	27%
ATM Pressure:	99.5~100.3 kPa	100.2kPa	100.3 kPa
Tester:	Jack Zou	Johnson Huang	Lee Li
Test Date:	2021.07.15~2021.08.02	2021.07.22	2021.07.15

SUMMARY OF TEST RESULTS

S/N	FCC Rules	Description of Test	Results
1	§1.1310 and §2.1093	RF Exposure	Compliance*
2	§2.1046; § 22.727; §80.215; §74.461; §90.205	RF Output Power	Compliance
3	§2.1047	Modulation Characteristic	Compliance
4	§2.1049; §22.357; § 22.731; §74.462; §80.205; §80.207 §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
5	§2.1051; §22.861; §74.462; §80.211; §90.210	Spurious Emission at Antenna Terminal	Compliance
6	§2.1053; §22.861; §74.462; §80.211; §90.210	Spurious Radiated Emissions	Compliance
7	§2.1055; § 22.355; §74.464; §80.209; §90.213	Frequency Stability	Compliance
8	§90.214	Transient Frequency Behavior	Compliance

Note:

Compliance*: Please refer to the SAR report: DG2210701-26543E-20A.

2 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, § 22.727, §74.461, §80.215 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)		Note
				High Power Level	Low Power Level	High Power Level	Low Power Level	
12.5kHz	FM	Low	136.0125	37.28	30.24	37.78	30.79	FCC
		Middle	155.7525	37.44	30.25	37.78	30.79	FCC Part 90
		High	173.9875	37.39	30.14	37.78	30.79	FCC
		Additional	150.8125	37.49	30.38	37.78	30.79	FCC Part 22
		Additional	161.1	37.38	30.37	37.78	30.79	FCC Part 74
	4FSK	Low	136.0125	37.36	30.32	37.78	30.79	FCC
		Middle	155.7525	37.42	30.20	37.78	30.79	FCC Part 90
		High	173.9875	37.48	30.20	37.78	30.79	FCC
		Additional	150.8125	37.56	30.38	37.78	30.79	FCC Part 22
		Additional	161.1	37.41	30.43	37.78	30.79	FCC Part 74
25kHz	FM	Additional	150.8125	37.49	30.33	37.78	30.79	FCC Part 22
		Additional	154.0125	37.52	30.34	37.78	30.79	FCC Part 80
		Additional	161.1	37.36	30.38	37.78	30.79	FCC Part 74

Note: The high rated power level is 5W(37dBm), and low rated power level is 1 W(30dBm).

The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.


FM, 12.5kHz:

Low Channel, 136.0125 MHz High Power

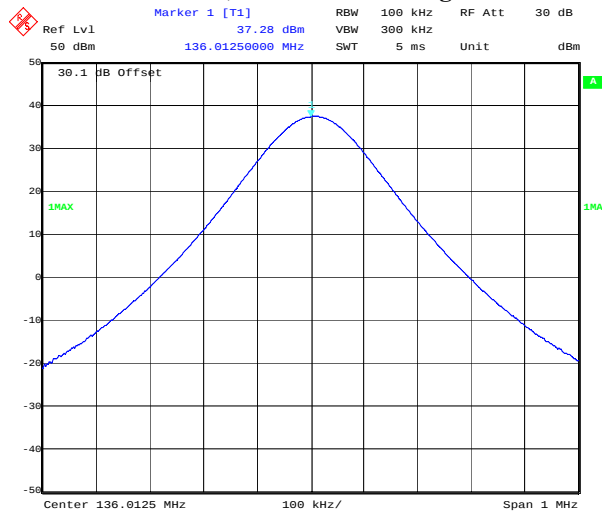


Date: 15.JUL.2021 22:43:45

Low Channel, 136.0125 MHz Low Power

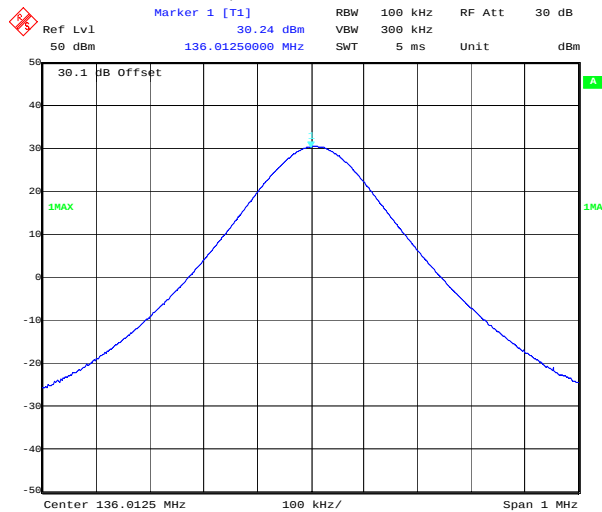


Date: 27.JUL.2021 00:33:23

Part 90, Middle Channel, 155.7525 MHz High Power

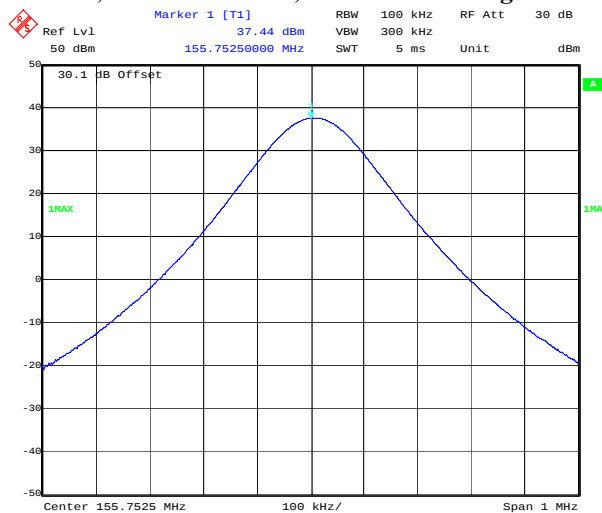


Date: 15.JUL.2021 22:49:28

Part 90, Middle Channel, 155.7525 MHz Low Power

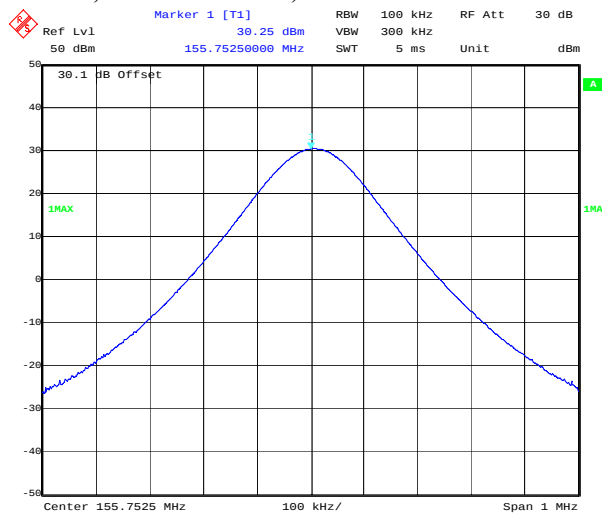


Date: 15.JUL.2021 22:49:53

High Channel, 173.9875 MHz High Power

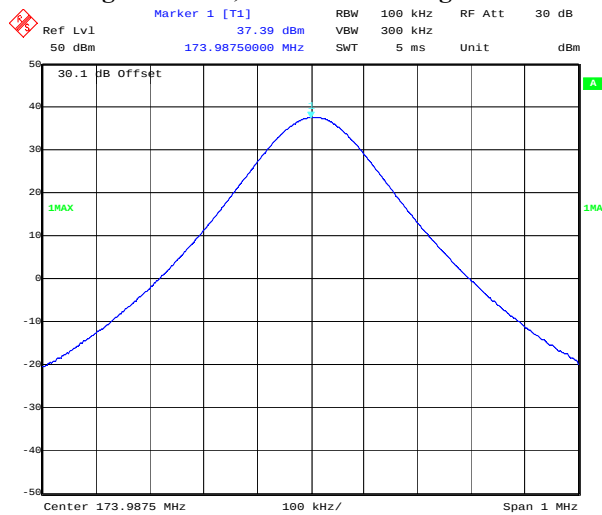


Date: 15.JUL.2021 22:54:29

High Channel, 173.9875 MHz Low Power

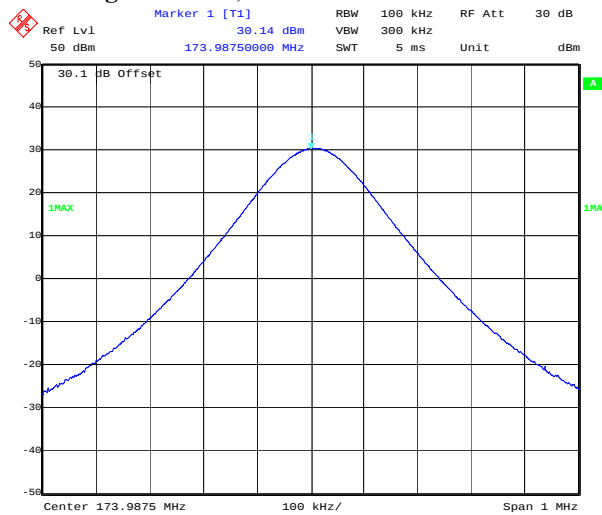


Date: 15.JUL.2021 22:54:49

Part 22, Additional Channel, 150.8125 MHz High Power

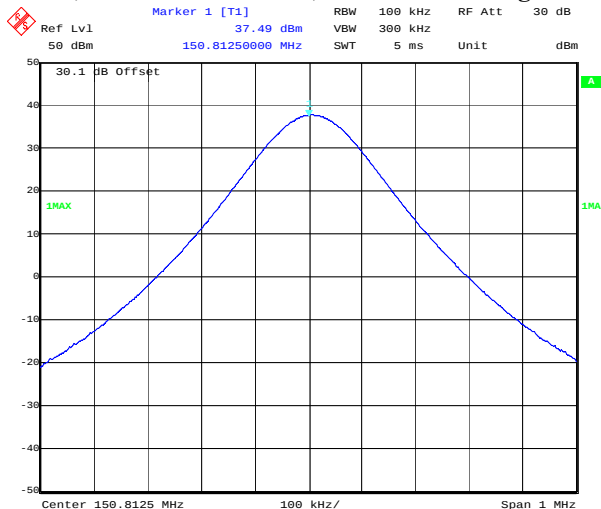


Date: 15.JUL.2021 23:03:35

Part 22, Additional Channel, 150.8125 MHz Low Power

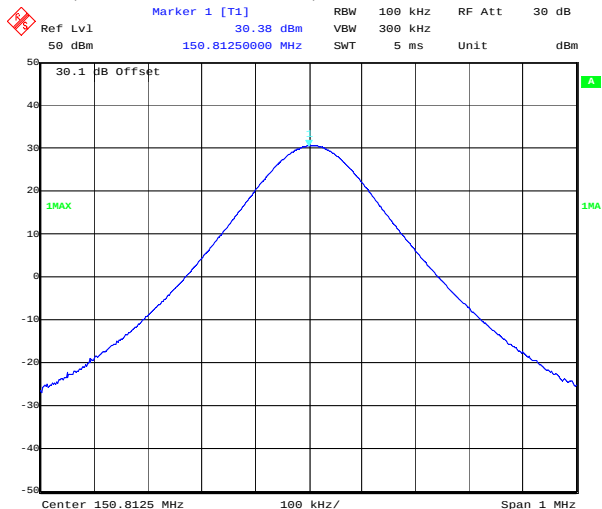


Date: 15.JUL.2021 23:00:39

Part 74, Additional Channel, 161.1 MHz High Power

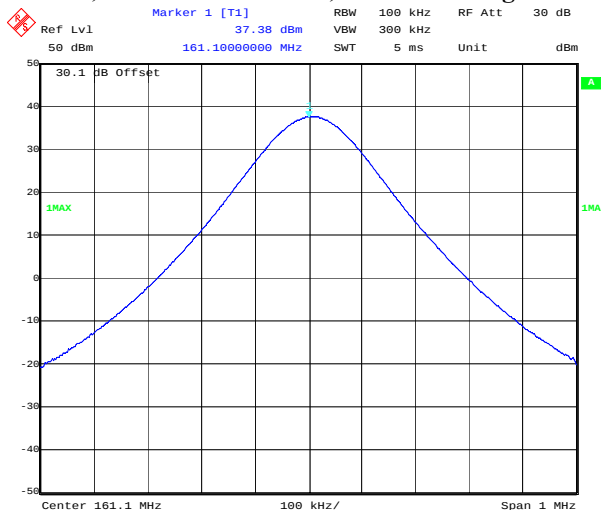

Date: 15.JUL.2021 22:57:09


Part 74, Additional Channel, 161.1 MHz Low Power

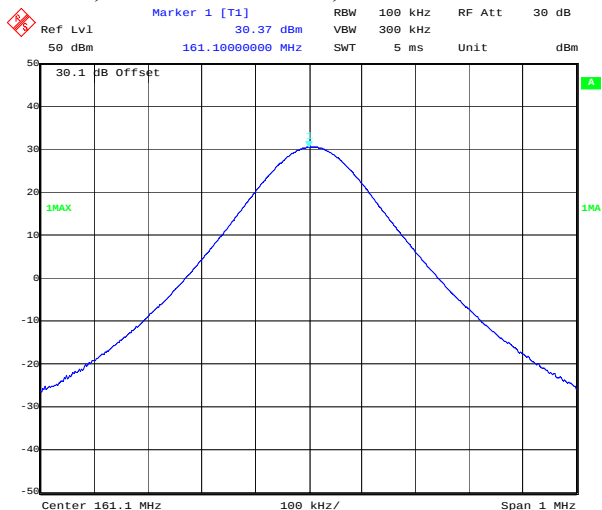

Date: 15.JUL.2021 22:57:28


4FSK, 12.5kHz:

Low Channel, 136.0125 MHz High Power

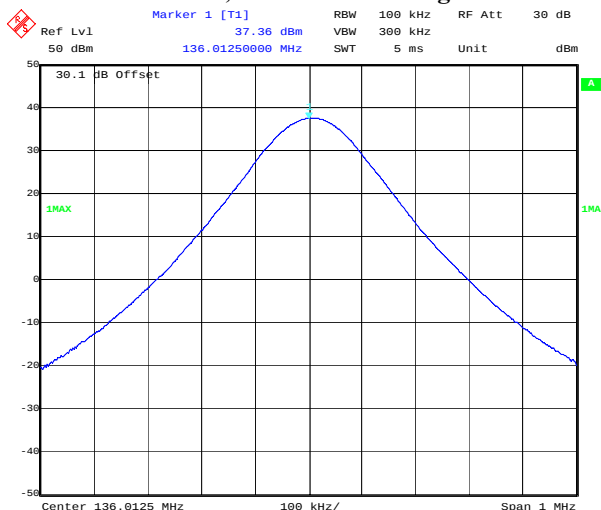


Date: 15.JUL.2021 23:05:37

Low Channel, 136.0125 MHz Low Power

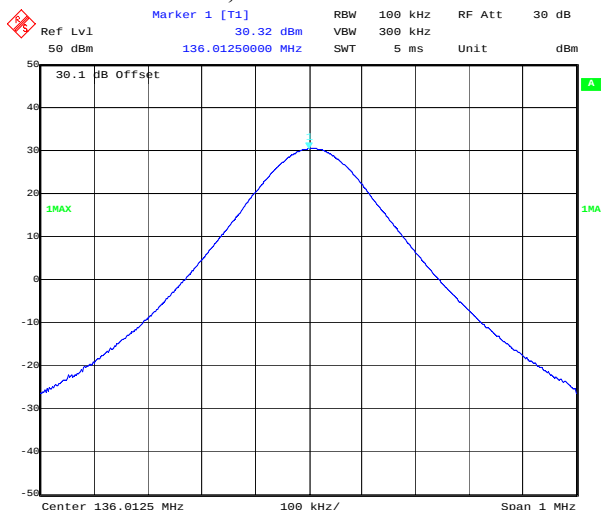


Date: 15.JUL.2021 23:06:01

Part 90, Middle Channel, 155.7525 MHz High Power

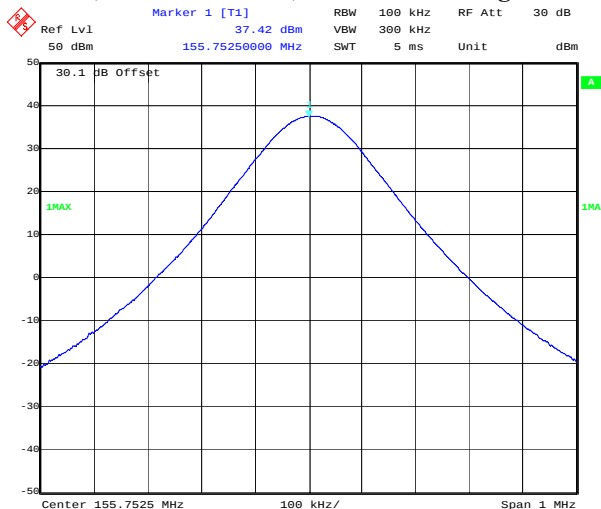


Date: 15.JUL.2021 23:07:20

Part 90, Middle Channel, 155.7525 MHz Low Power

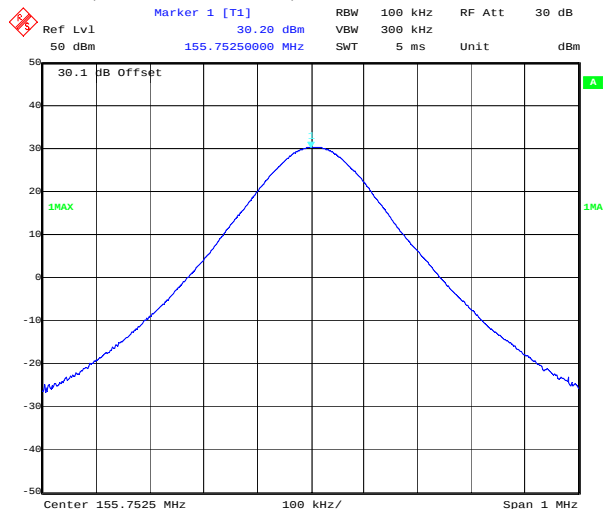


Date: 15.JUL.2021 23:06:55

High Channel, 173.9875MHz High Power

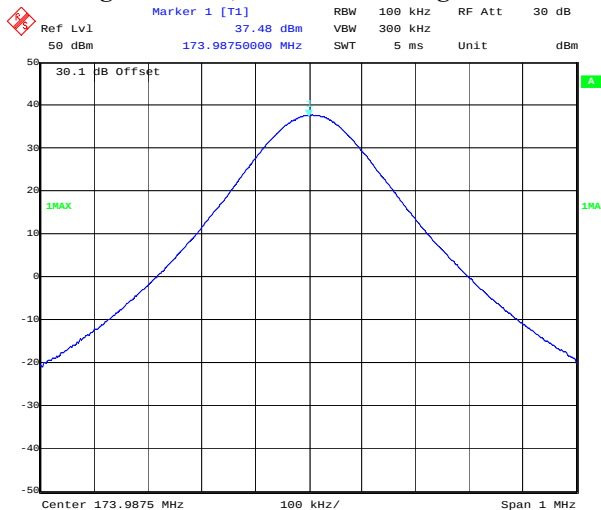


Date: 15.JUL.2021 23:08:04

High Channel, 173.9875 MHz Low Power

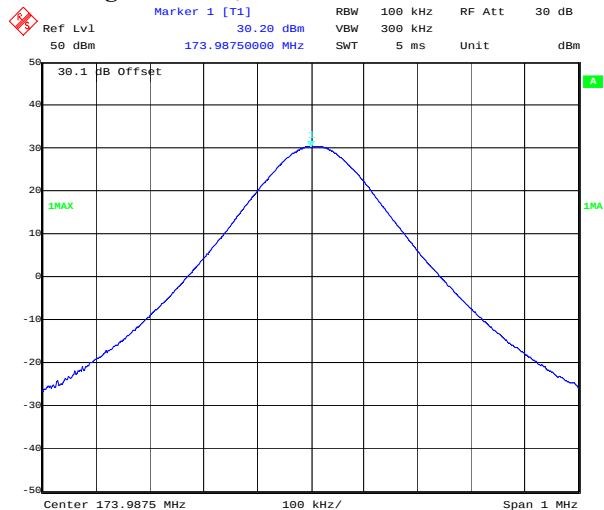


Date: 15.JUL.2021 23:08:27

Part 22, Additional Channel, 150.8125 MHz High Power

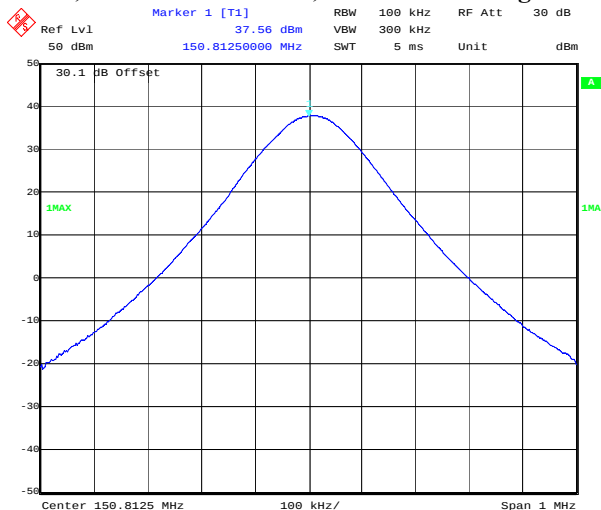


Date: 15.JUL.2021 23:10:28

Part 22, Additional Channel, 150.8125 MHz Low Power

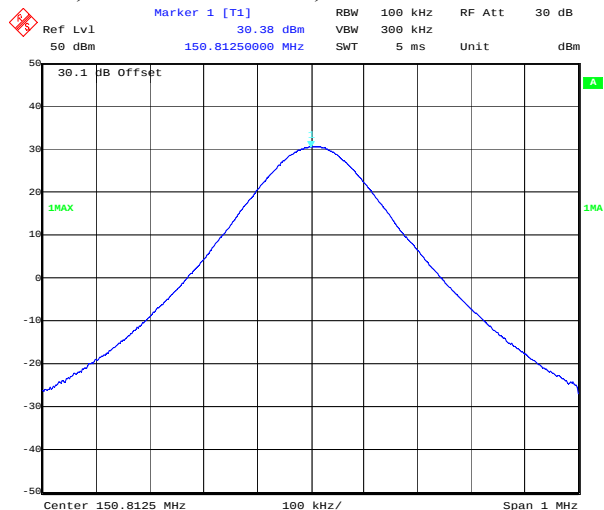


Date: 15.JUL.2021 23:10:47

Part 74, Additional Channel, 161.1 MHz High Power

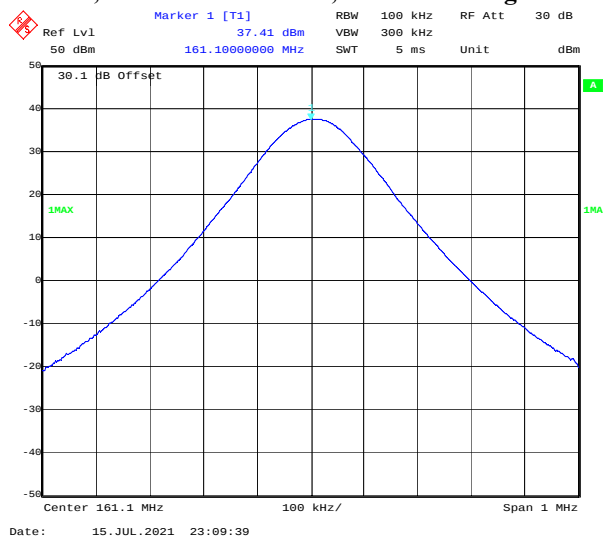


Part 74, Additional Channel, 161.1 MHz Low Power

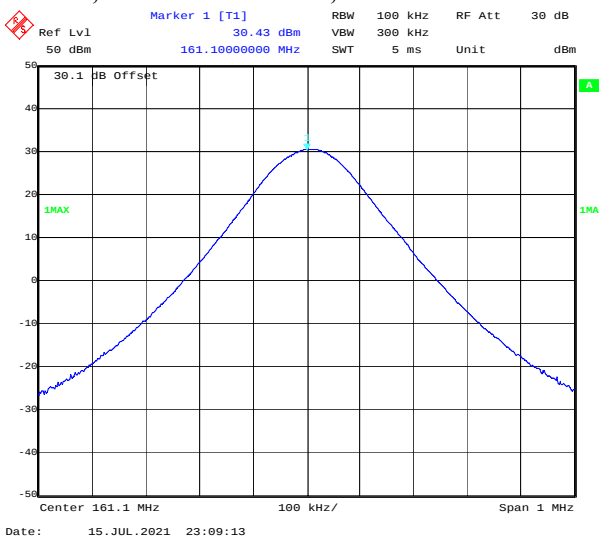


FM, 25kHz:


Part 22, Additional Channel, 150.8125 MHz High Power

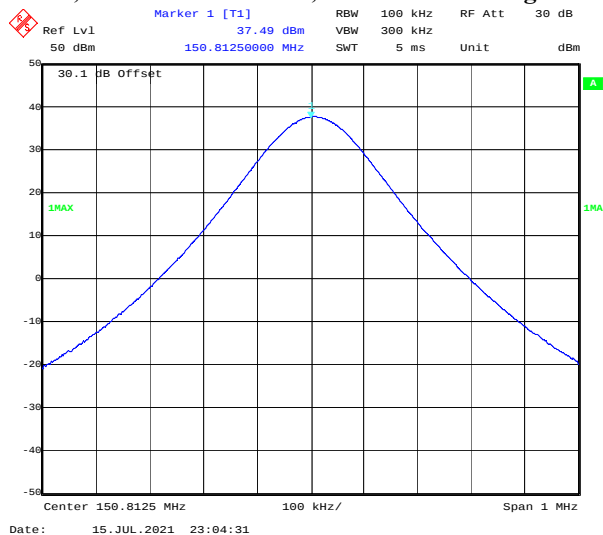


Part 22, Additional Channel, 150.8125 MHz Low Power

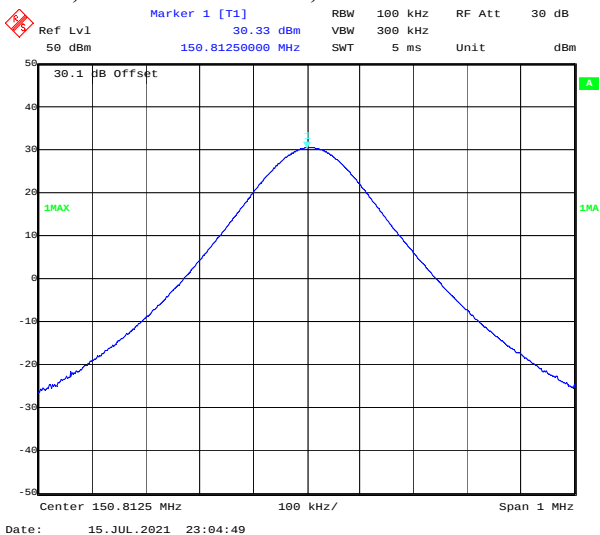


Part 80, Additional Channel, 154.0125 MHz High Power

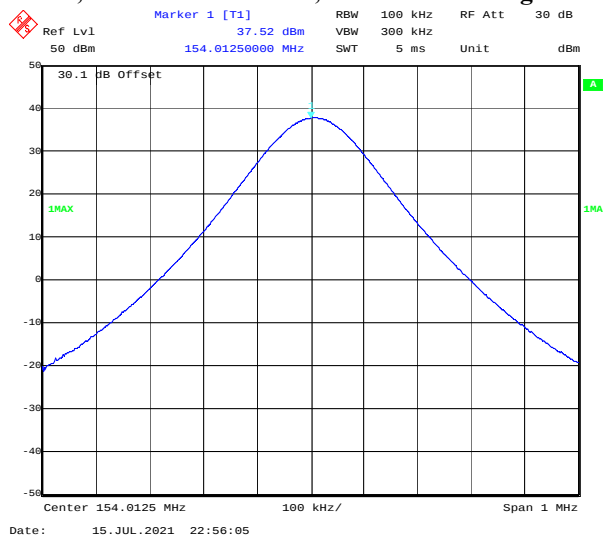


Part 80, Additional Channel, 154.0125 MHz Low Power

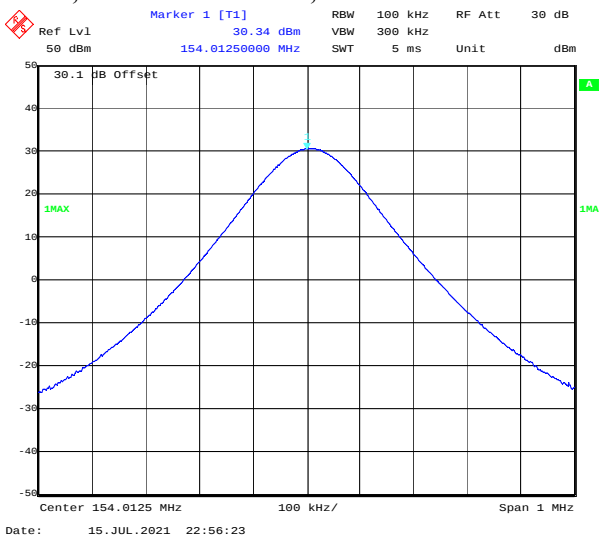

Part 74, Additional Channel, 161.1 MHz High Power

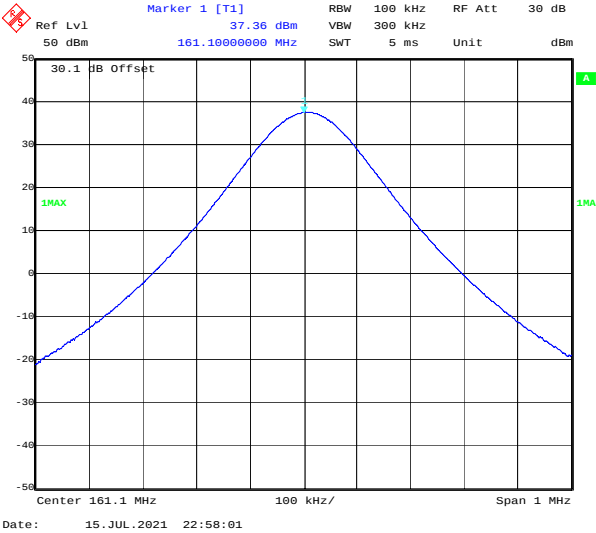

Part 74, Additional Channel, 161.1 MHz Low Power

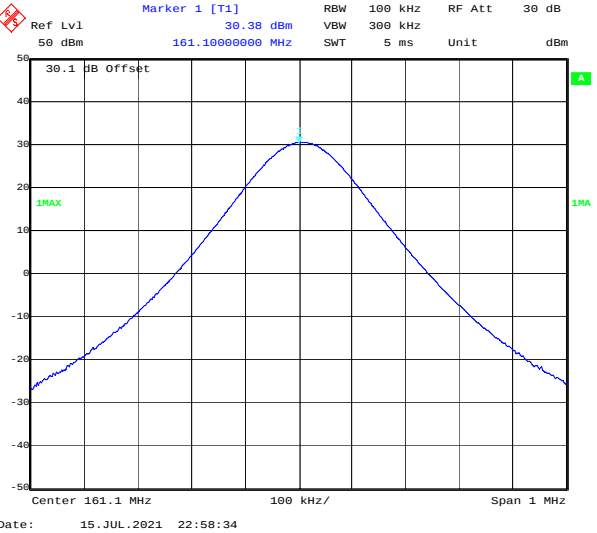

3 - MODULATION CHARACTERISTIC

Applicable Standard

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA-603-E 2.2.3



Test Data

Test Mode: Transmitting

Test Result: Compliance.


Please refer to the following tables and plots.

Audio Frequency Response – High Power

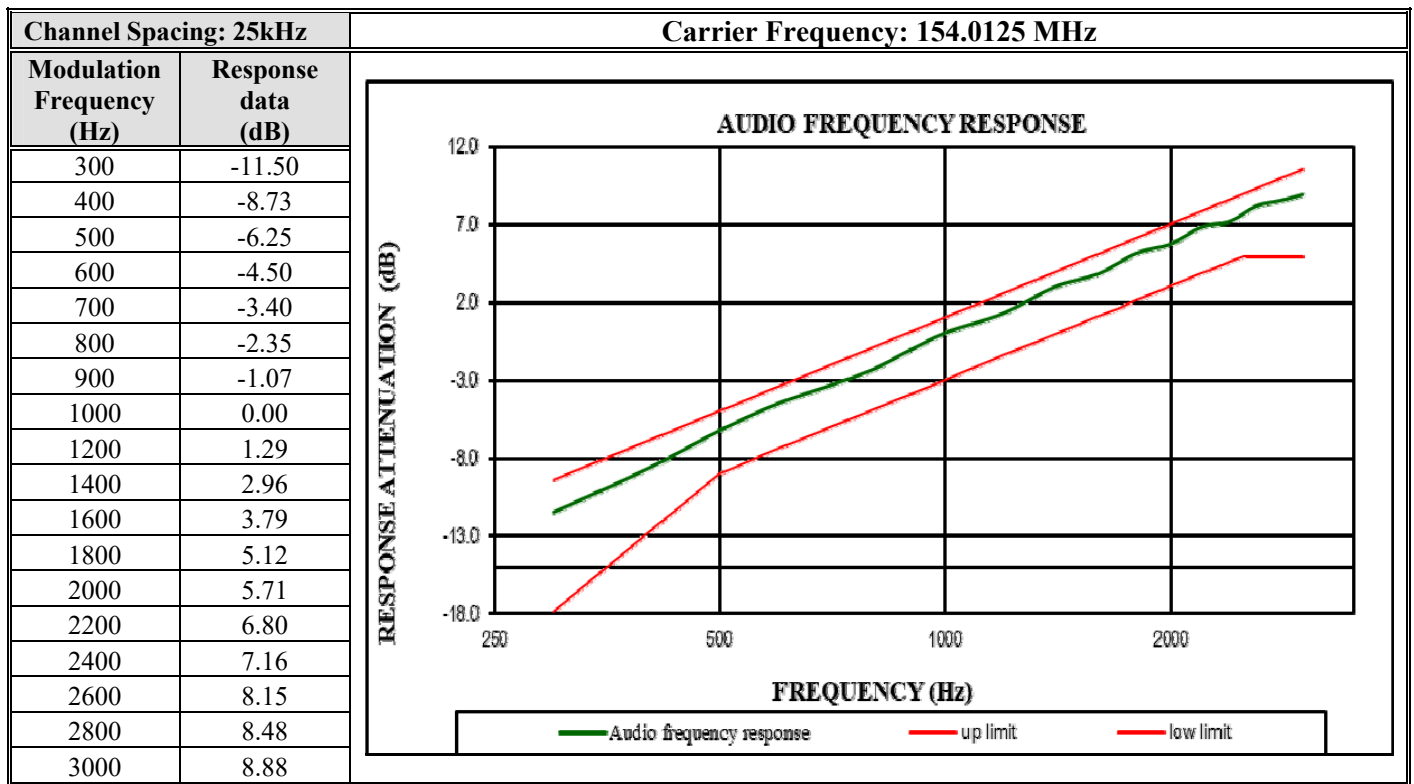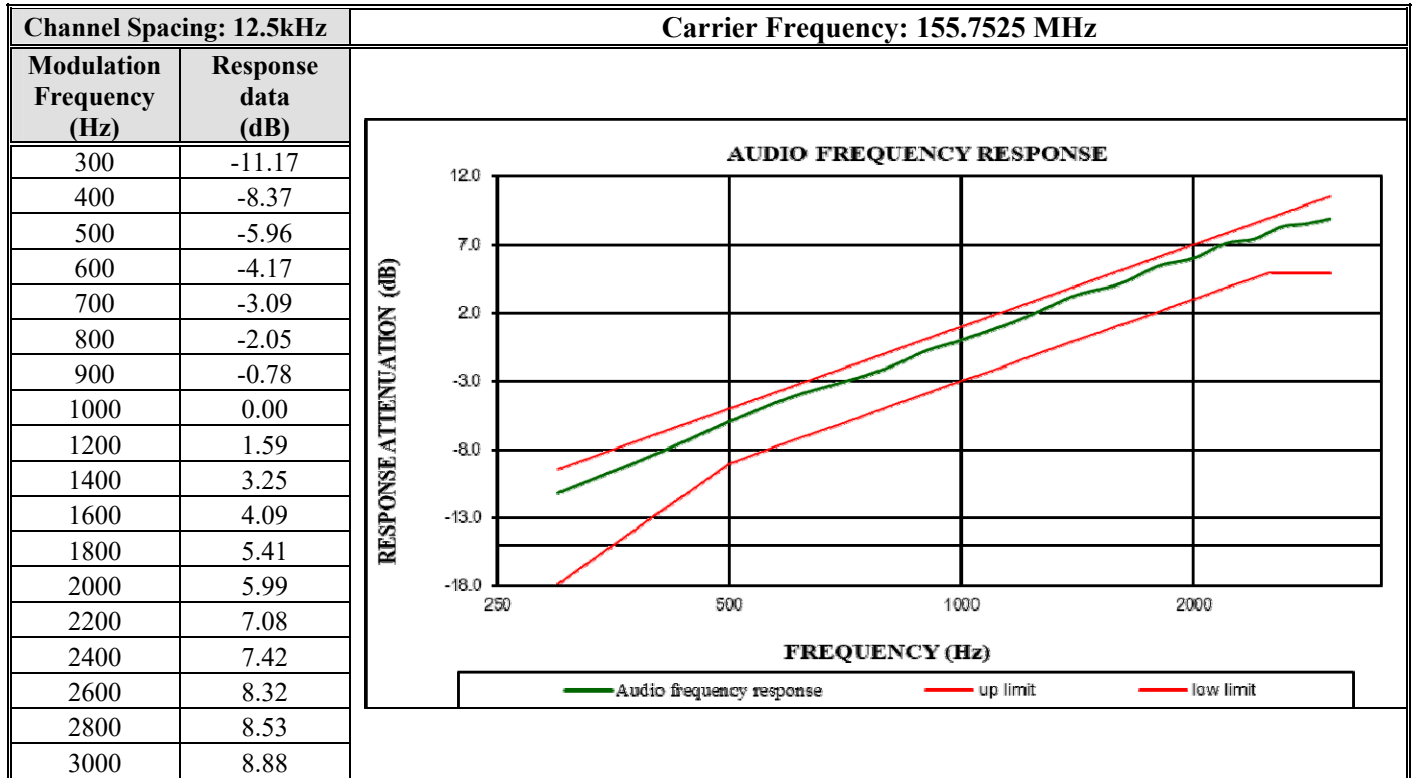


Modulation Limiting – High Power



Channel Spacing: 12.5kHz		Carrier Frequency: 155.7525 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	0.733	0.141	0.724	0.135	2.5
400	0.957	0.149	0.947	0.141	2.5
500	1.221	0.171	1.201	0.164	2.5
600	1.473	0.192	1.465	0.182	2.5
700	1.637	0.203	1.623	0.195	2.5
800	1.842	0.211	1.826	0.198	2.5
900	2.082	0.236	2.075	0.222	2.5
1000	2.362	0.241	2.336	0.234	2.5
1200	2.364	0.263	2.349	0.254	2.5
1400	2.351	0.297	2.342	0.283	2.5
1600	2.363	0.315	2.337	0.308	2.5
1800	2.365	0.342	2.336	0.335	2.5
2000	2.361	0.361	2.333	0.355	2.5
2200	2.311	0.406	2.302	0.397	2.5
2400	2.294	0.433	2.286	0.423	2.5
2600	2.263	0.486	2.252	0.447	2.5
2800	2.241	0.461	2.234	0.452	2.5
3000	2.142	0.482	2.119	0.475	2.5

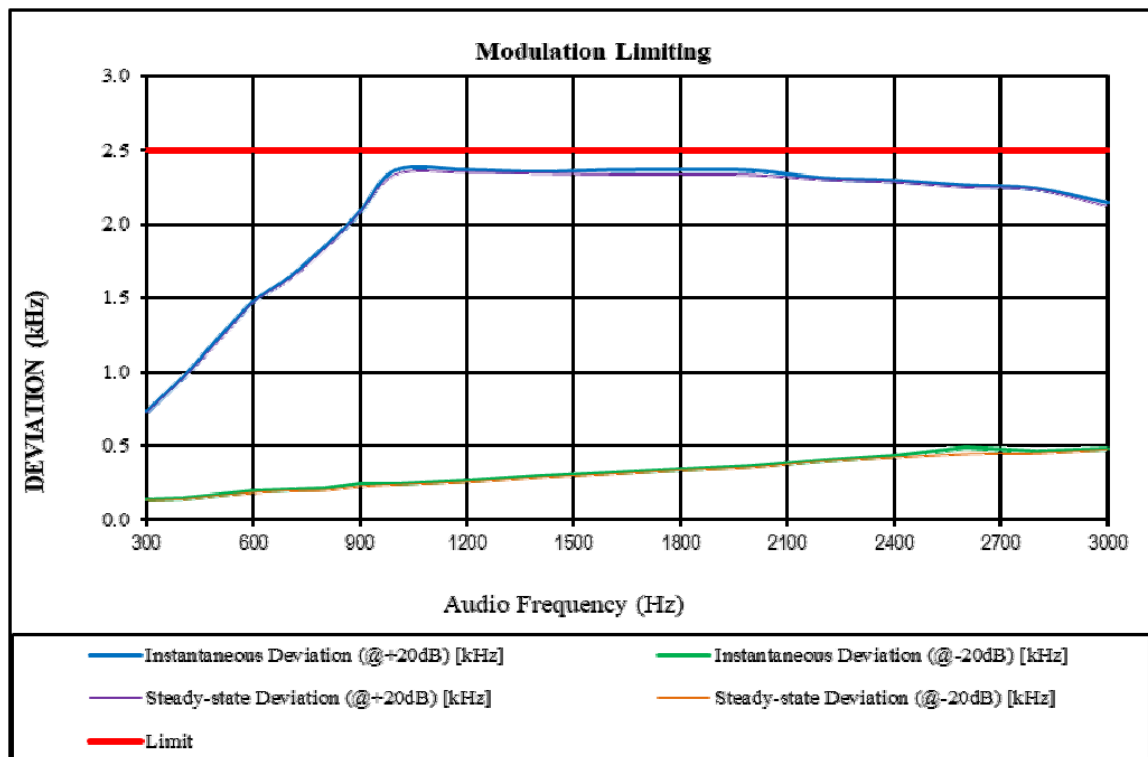

Channel Spacing: 25kHz		Carrier Frequency: 154.0125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.369	0.192	1.363	0.187	5
400	1.823	0.204	1.811	0.198	5
500	2.336	0.241	2.321	0.239	5
600	2.811	0.272	2.803	0.265	5
700	3.294	0.293	3.285	0.288	5
800	3.706	0.317	3.696	0.311	5
900	4.252	0.356	4.246	0.346	5
1000	4.633	0.393	4.625	0.386	5
1200	4.641	0.435	4.631	0.425	5
1400	4.634	0.508	4.626	0.499	5
1600	4.624	0.554	4.613	0.543	5
1800	4.597	0.627	4.593	0.619	5
2000	4.575	0.657	4.565	0.648	5
2200	4.531	0.732	4.522	0.721	5
2400	4.501	0.756	4.493	0.748	5
2600	4.493	0.823	4.483	0.815	5
2800	4.495	0.869	4.492	0.858	5
3000	4.323	0.892	4.317	0.888	5

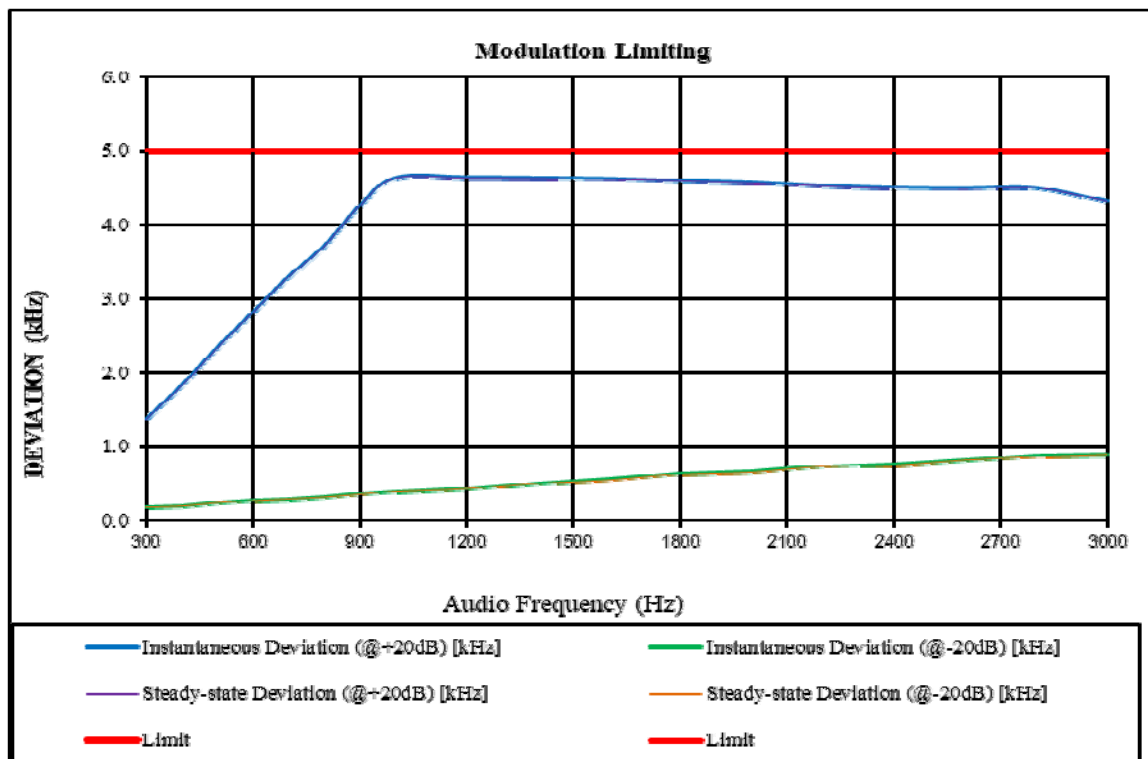

Audio Frequency Low Pass Filter Response – High Power

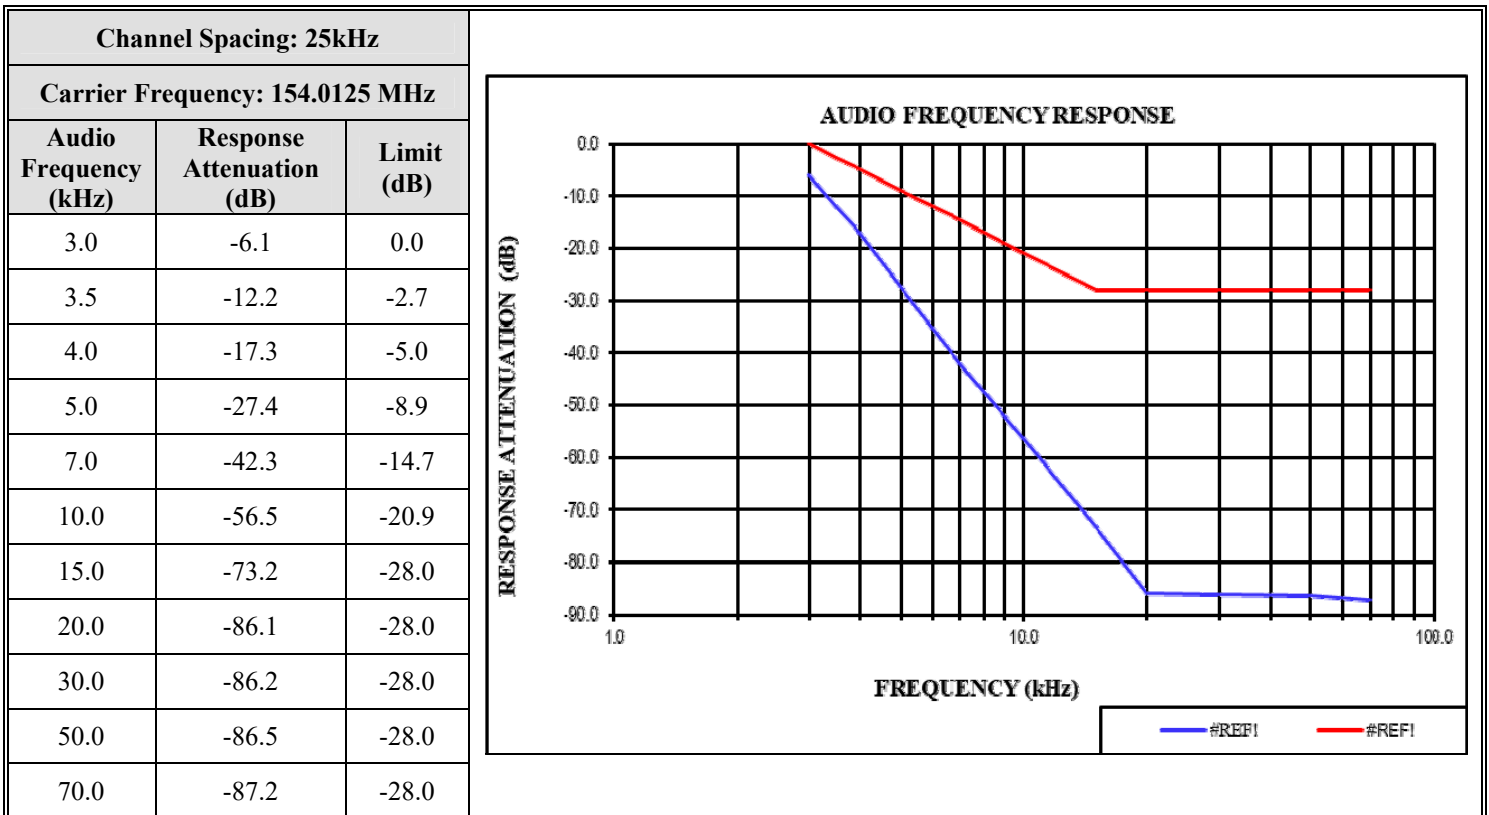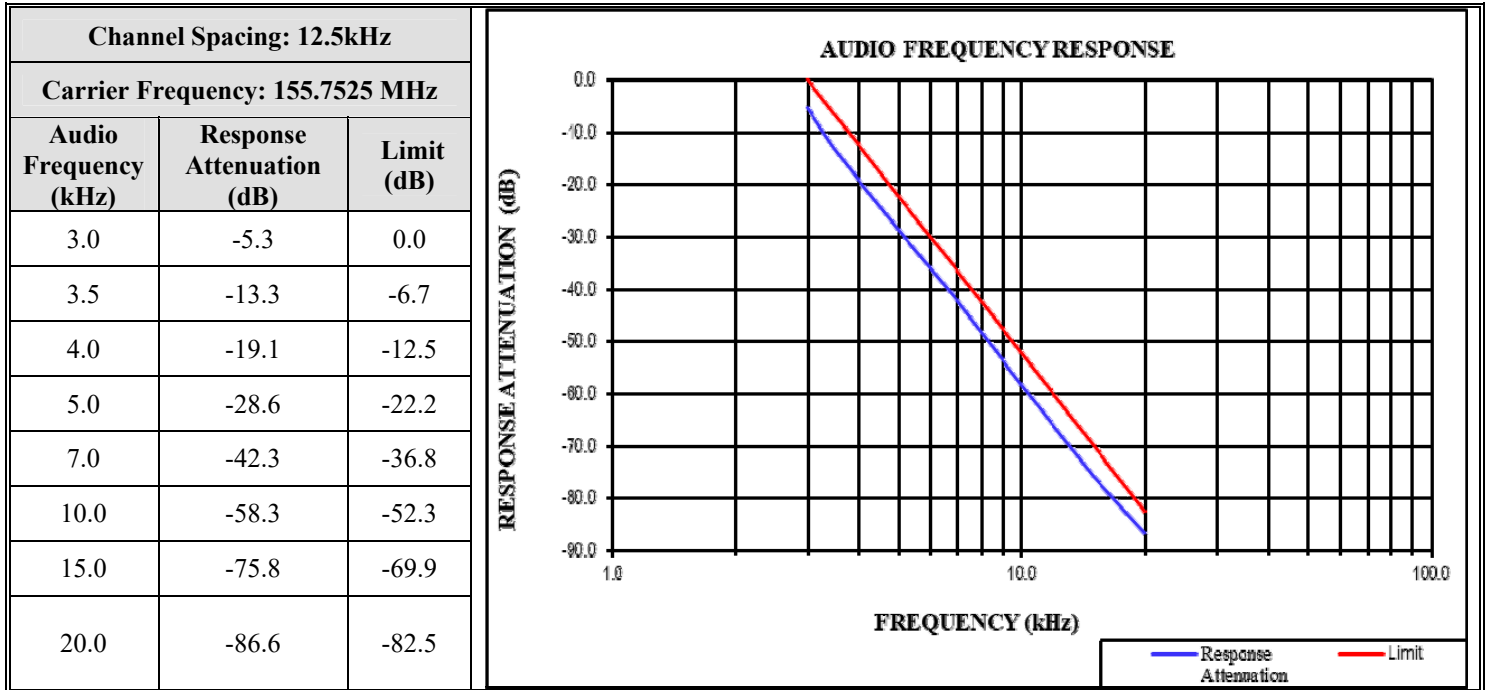

4 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, §80.205, §80.207, §90.209 and §90.210

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Test Mode	Test Channel	Test Frequency (MHz)	High Power Level		Low Power Level		Note
			99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	
FM 12.5kHz	Low	136.0125	9.986	10.420	9.986	10.420	FCC
	Middle	155.7525	9.986	10.420	9.986	10.420	Part 90
	High	173.9875	9.986	10.347	9.986	10.347	FCC
	Additional	150.8125	9.986	10.420	9.986	10.420	Part 22
	Additional	161.1	9.986	10.347	9.986	10.347	Part 74
4FSK 12.5kHz	Low	136.0125	7.453	9.986	7.742	10.058	FCC
	Middle	155.7525	7.598	9.551	7.453	9.551	Part 90
	High	173.9875	7.598	10.130	7.525	9.768	FCC
	Additional	150.8125	7.598	9.262	7.381	9.262	Part 22
	Additional	161.1	7.598	9.913	7.598	9.768	Part 74
FM 25kHz	Additional	150.8125	14.906	15.920	14.834	15.920	Part 22
	Additional	154.0125	14.834	16.100	14.834	16.100	Part 80
	Additional	161.1	14.834	16.100	14.834	16.100	Part 74

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 7K60F1D and 7K60F1E


The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.


Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

4FSK, 12.5kHz, High Power:

Low Channel

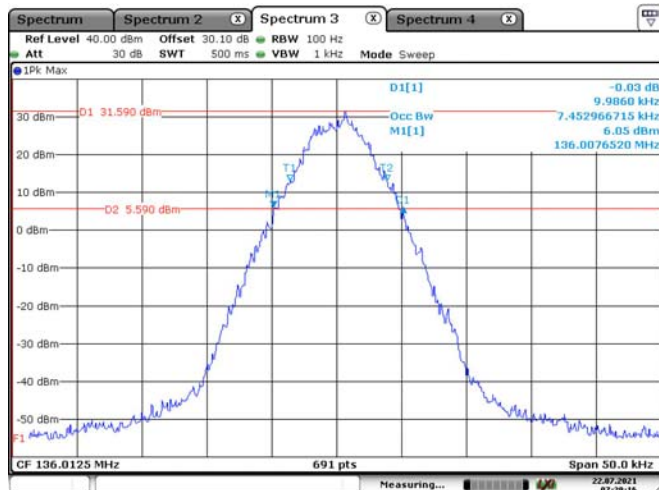


Date: 22.JUL.2021 07:29:17

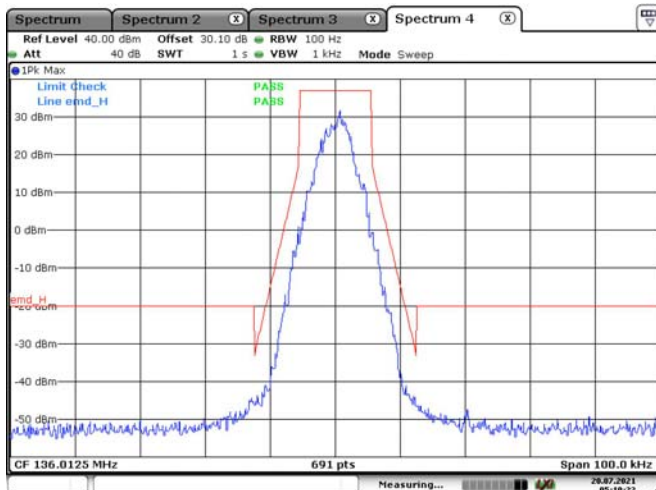


Date: 20.JUL.2021 05:10:22

Middle Channel

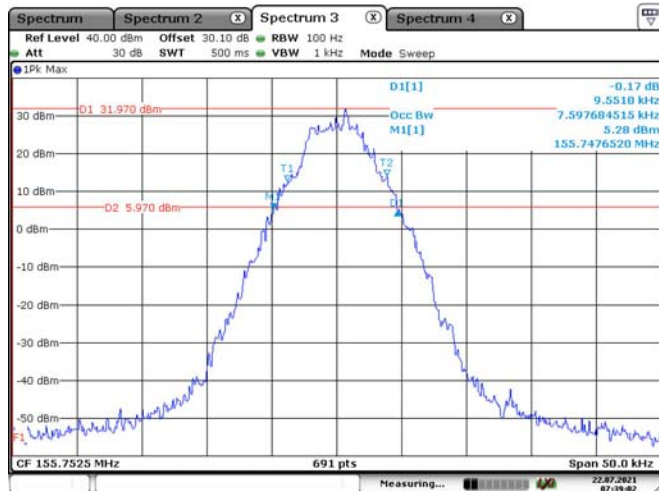


Date: 22.JUL.2021 07:39:03

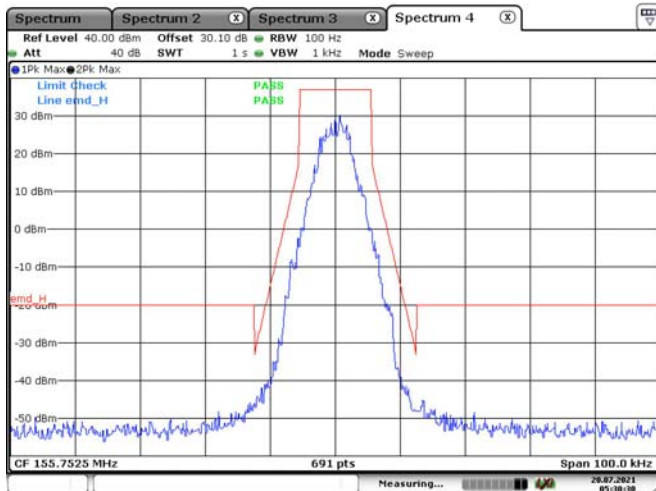


Date: 20.JUL.2021 05:30:30

High Channel


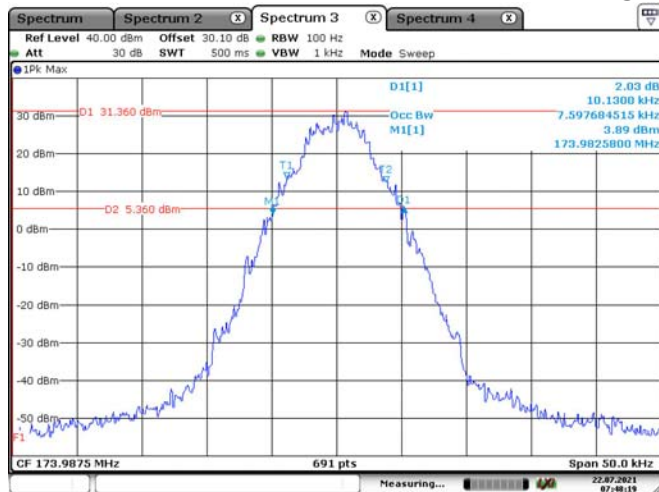


Date: 22.JUL.2021 07:48:20


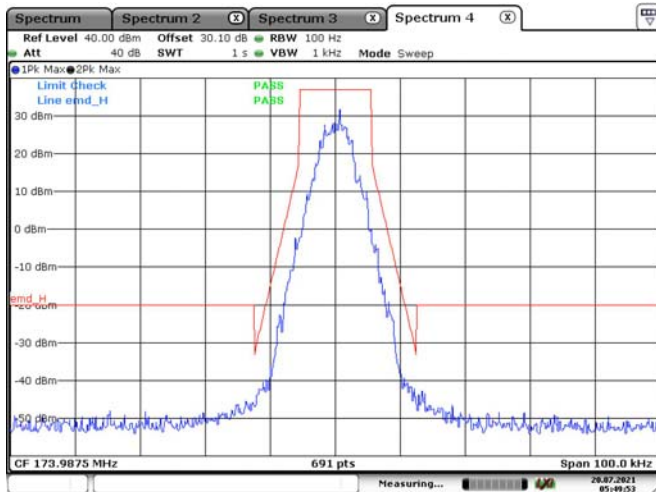


Date: 20.JUL.2021 05:49:53

Additional Channel Part 74, 161.1 MHz

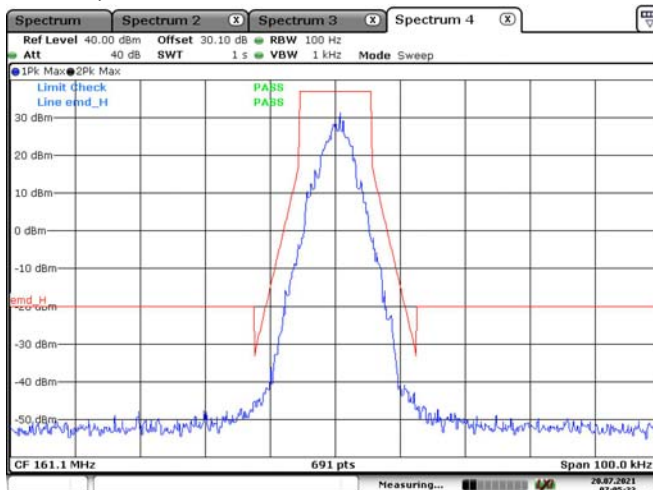
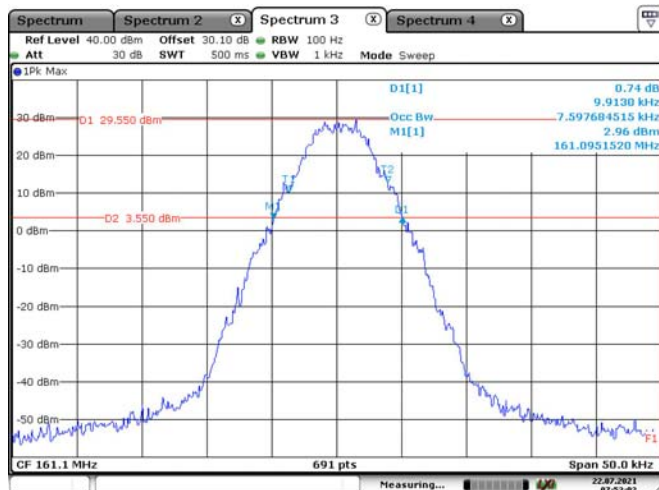


Additional Channel Part 22, 150.8125 MHz

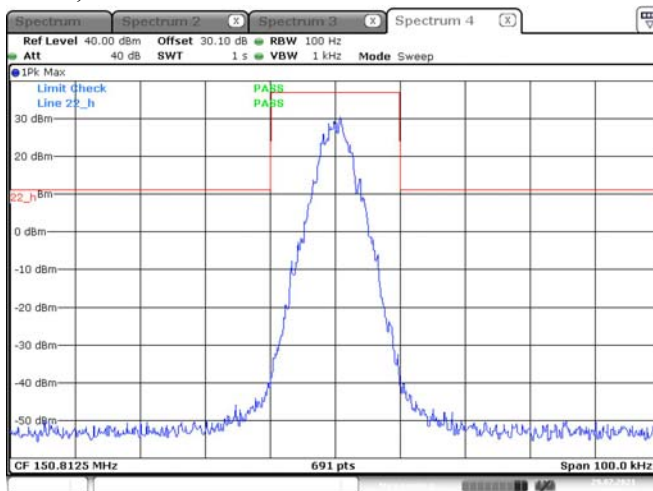
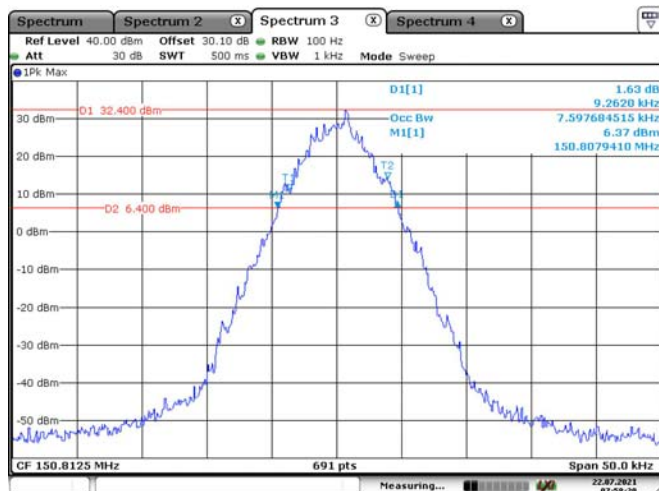


4FSK, 12.5kHz, Low Power:



Low Channel

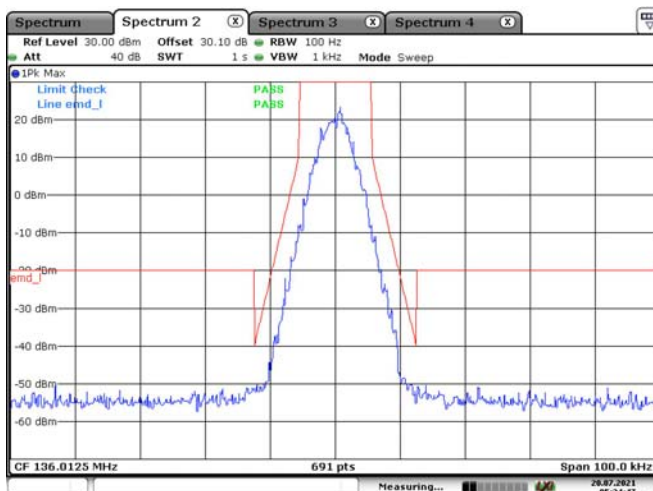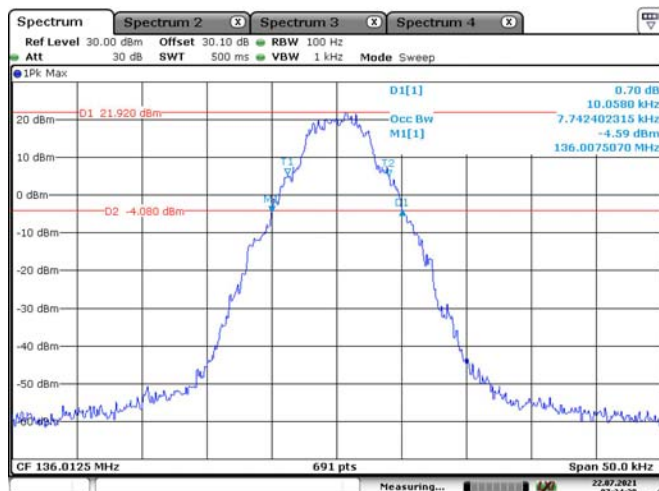



Middle Channel

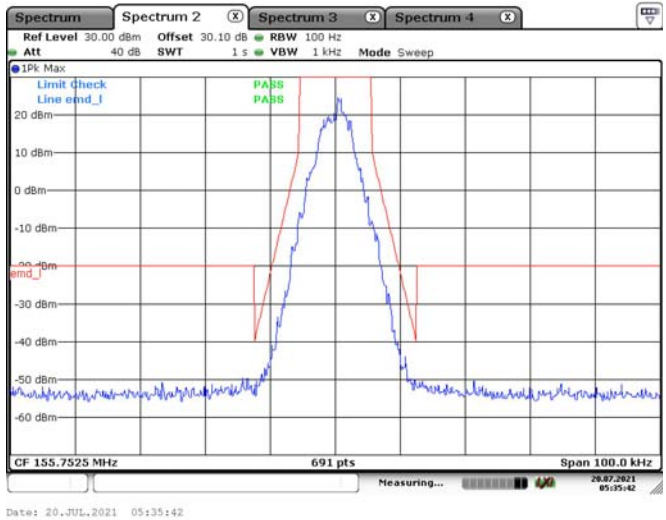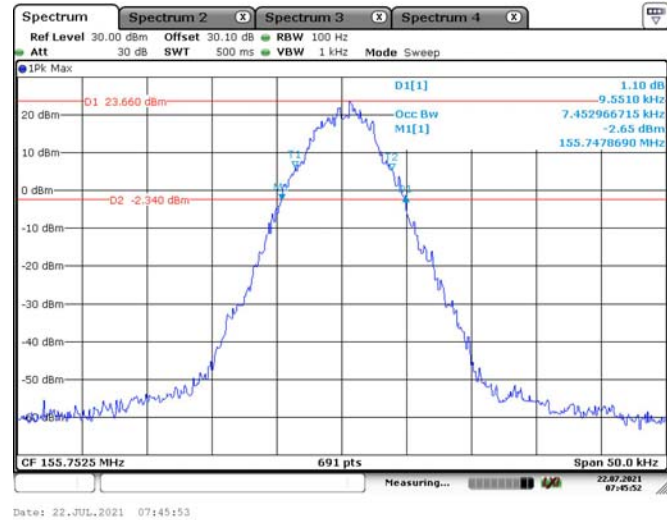


High Channel

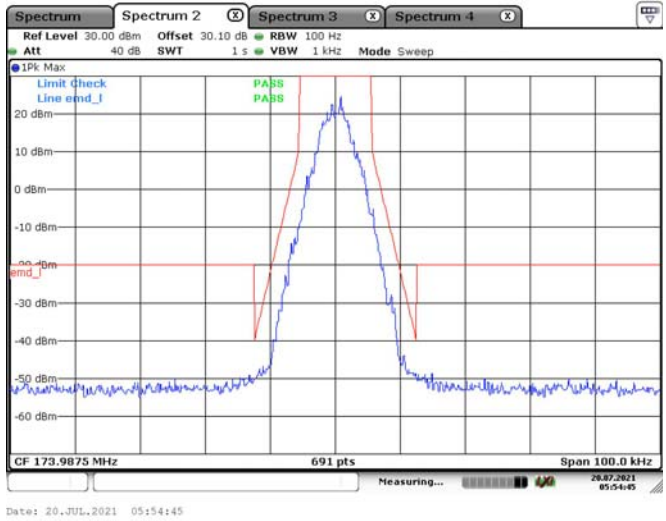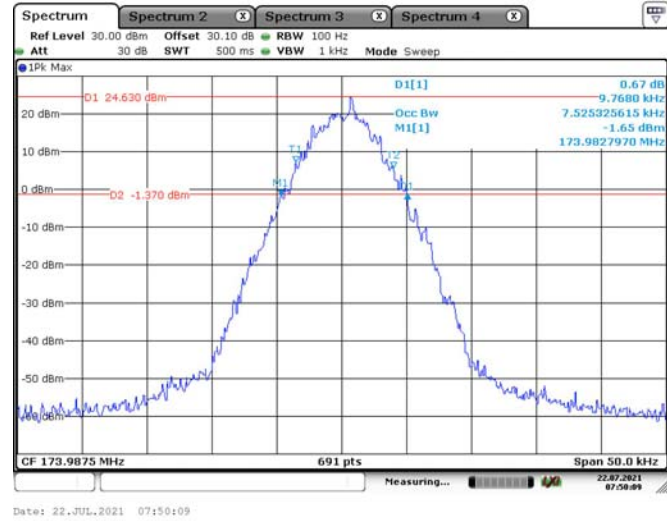


Additional Channel Part 74, 161.1 MHz

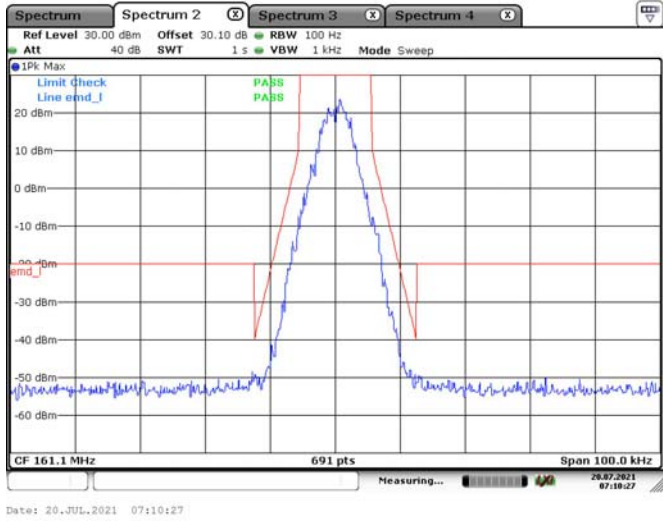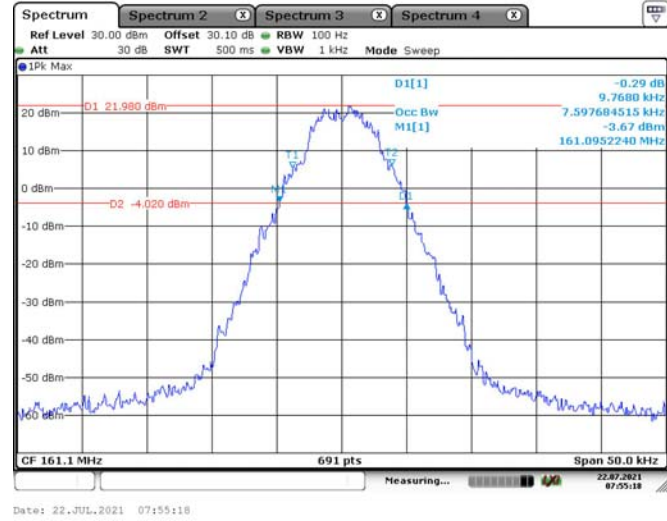

Additional Channel Part 22, 150.8125 MHz

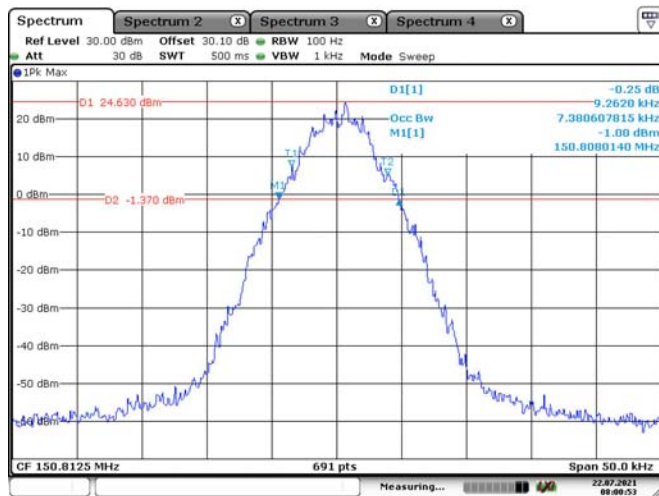


Date: 22.JUL.2021 08:00:54

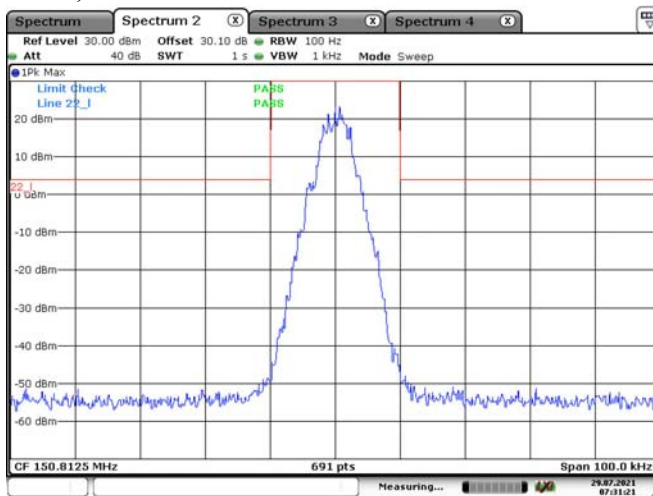


Date: 29.JUL.2021 07:31:21

FM, 12.5kHz, High Power:

Low Channel

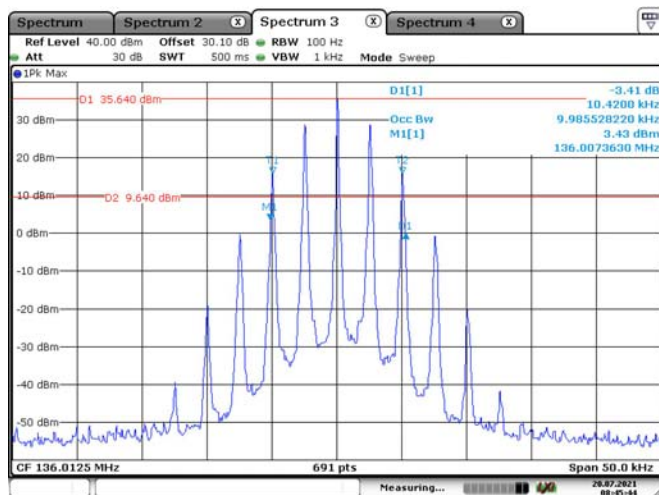


Date: 20.JUL.2021 08:45:44

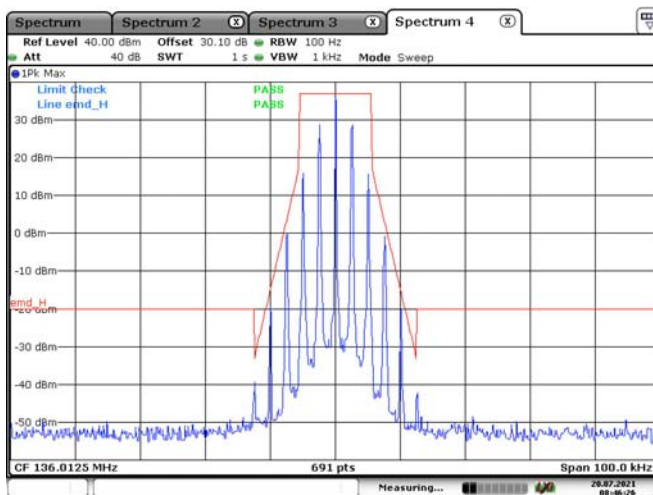


Date: 20.JUL.2021 08:46:26

Middle Channel

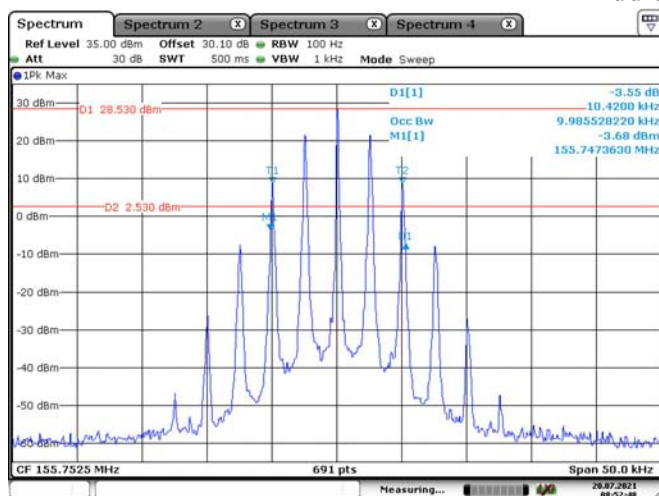


Date: 20.JUL.2021 08:52:48

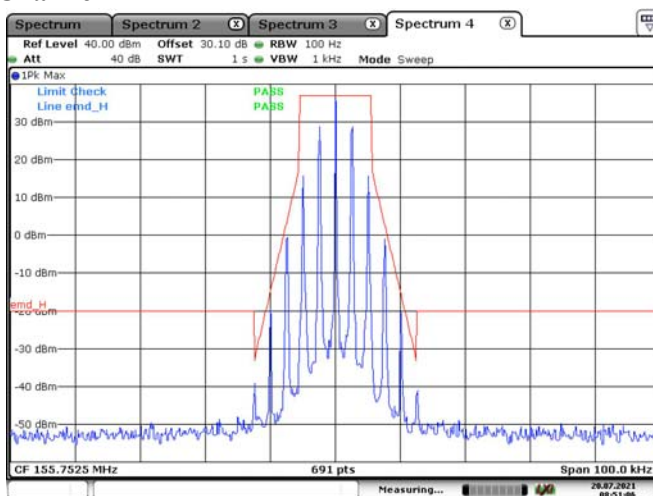


Date: 20.JUL.2021 08:51:06

High Channel

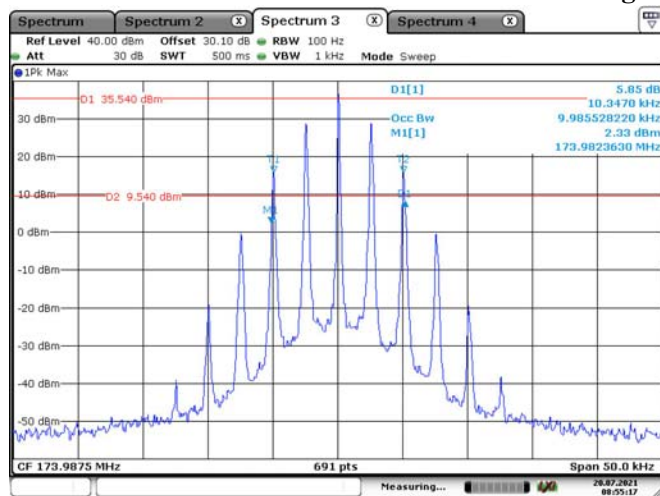


Date: 20.JUL.2021 08:55:18

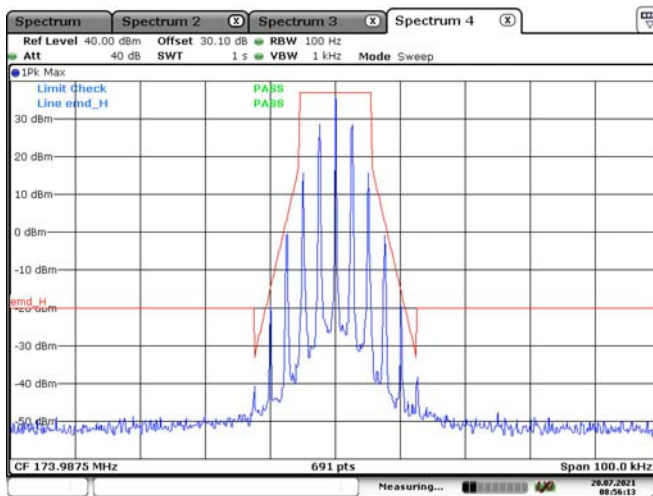


Date: 20.JUL.2021 08:56:14

Additional Channel Part 74, 161.1MHz

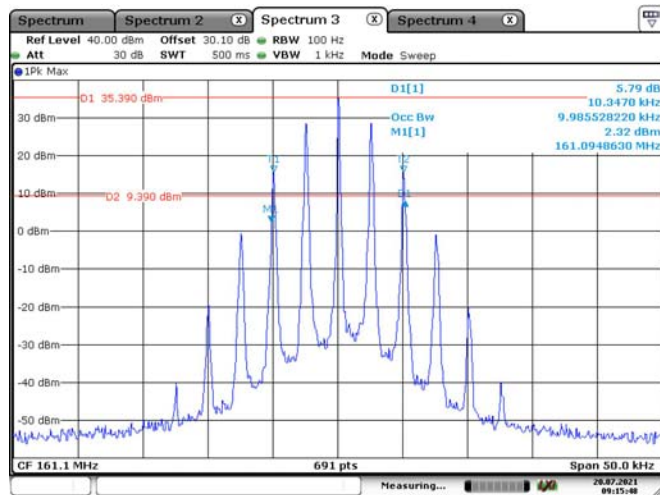


Date: 20.JUL.2021 09:15:49

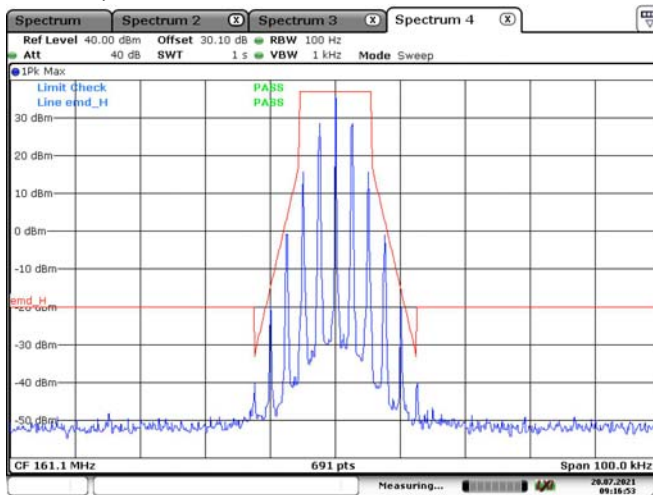


Date: 20.JUL.2021 09:16:54

Additional Channel Part 22, 150.8125 MHz

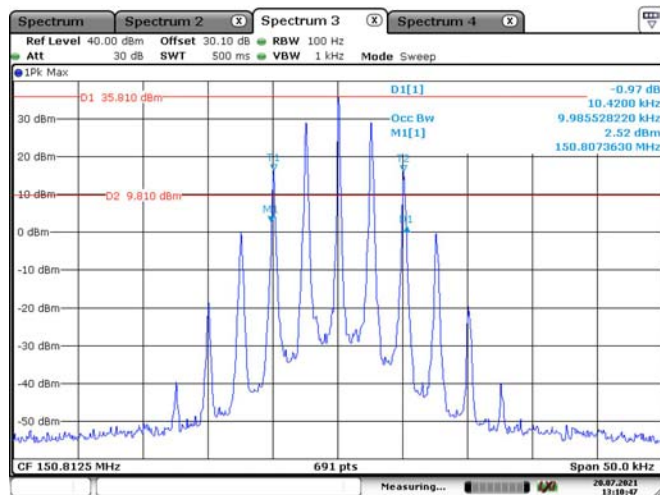



Date: 20.JUL.2021 13:10:47

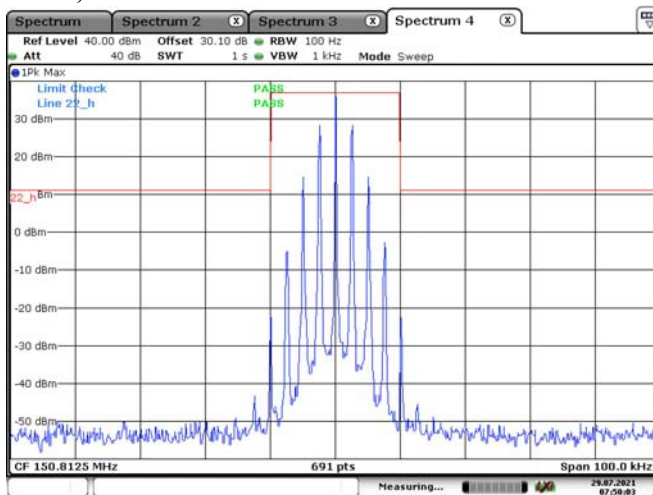



Date: 29.JUL.2021 07:50:03

FM, 12.5kHz, Low Power:



Low Channel

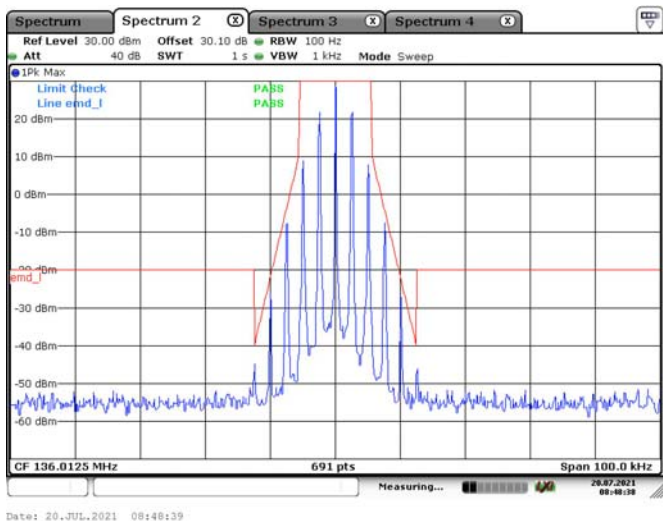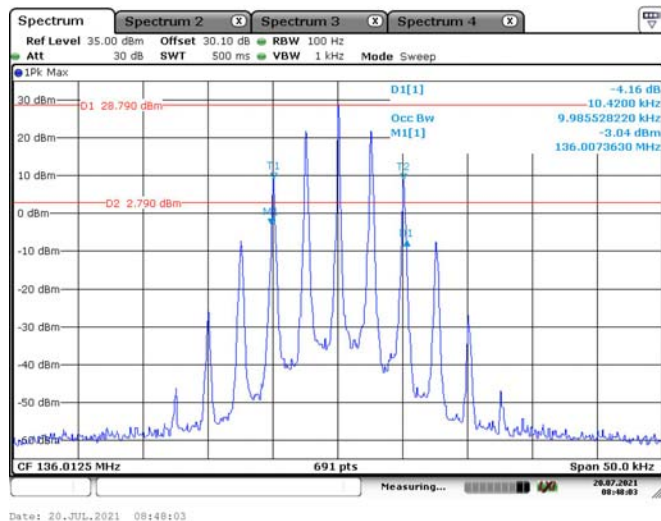

Middle Channel

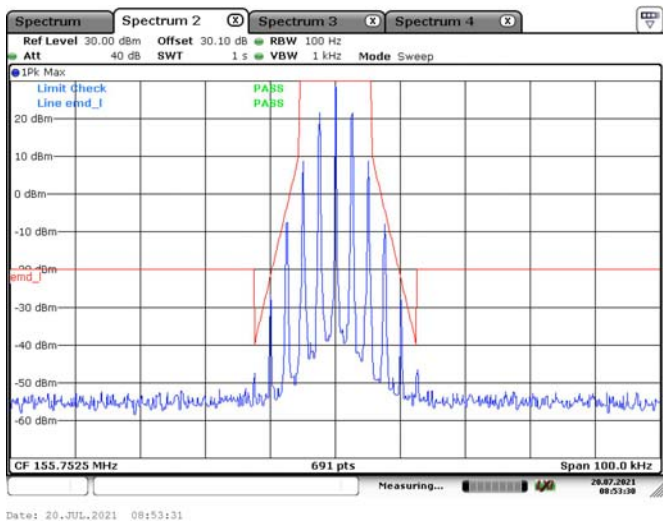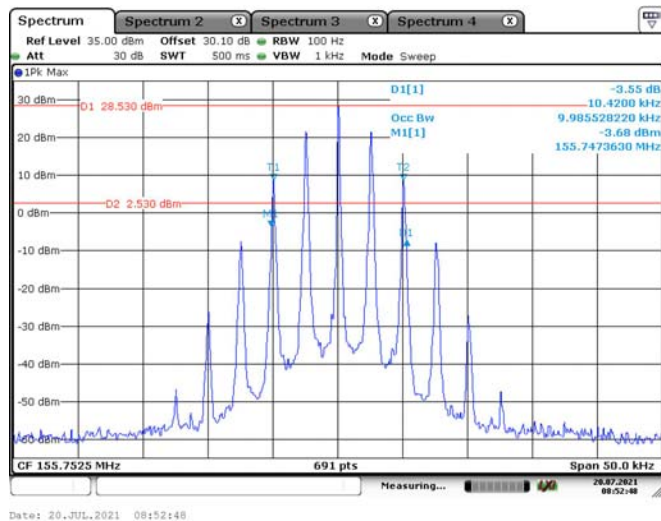

High Channel

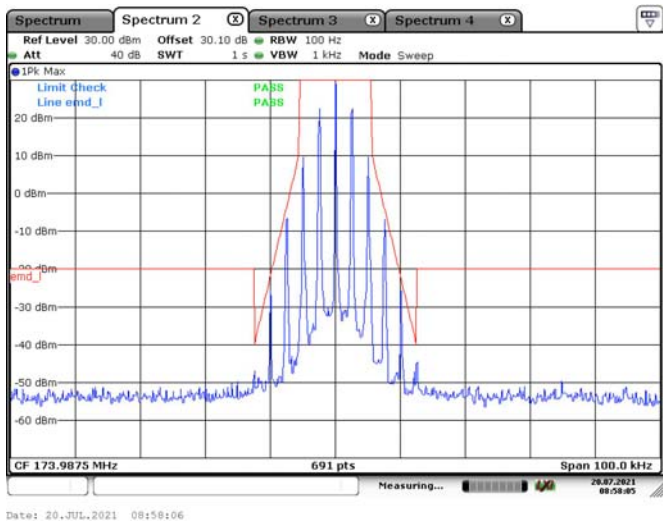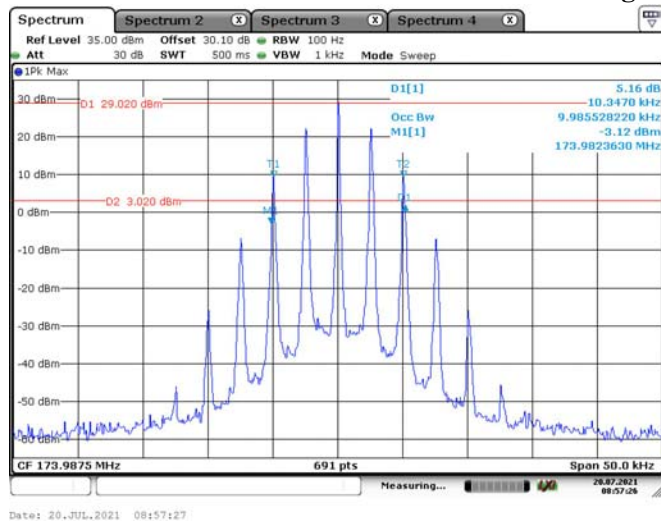

Spectrum **Spectrum 2** **Spectrum 3** **Spectrum 4**

Ref Level 35.00 dBm Offset 30.10 dB RBW 100 Hz
 Att 30 dB SWT 500 ms VBW 1 kHz Mode Sweep

● 1Pk Max

30 dBm 01 28.130 dBm 3.45 dBm
 20 dBm 10.3470 kHz
 10 dBm Occ BW 9.985528220 kHz
 0 dBm M1[1] -3.63 dBm
 -10 dBm 161.0948630 MHz
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm

CF 161.1 MHz 691 pts Span 50.0 kHz

Measuring... 20.07.2021 09:18:11

Spectrum 1 Spectrum 2 Spectrum 3 Spectrum 4

Ref Level 30.00 dBm Offset 30.10 dB RBW 100 Hz

Att 40 dB SWT 1 s VBW 1 kHz Mode Sweep

1Pk Max

Limit Check
Line end_f

PASS
PASS

20 dBm
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm

CF 161.1 MHz 691 pts Span 100.0 kHz

Measuring... 28.07.2021 09:19:04

Spectrum **Spectrum 2** **Spectrum 3** **Spectrum 4**

Ref Level 35.00 dBm Offset 30.10 dB RBW 100 Hz
Att 30 dB SWT 500 ms VBW 1 kHz Mode Sweep

1Pk Max

30 dBm D1 28.670 dBm
20 dBm
10 dBm
0 dBm D2 2.670 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm

691 pts Span 50.0 kHz

CF 150.8125 MHz

Measuring... 20.87.2021 11:11:38

The screenshot shows a spectrum analyzer interface with the following settings and display:

- Top Panel:** Four tabs are visible: "Spectrum", "Spectrum 2", "Spectrum 3", and "Spectrum 4". The "Spectrum" tab is active.
- Parameters:**
 - Ref Level: 30.00 dBm
 - Offset: 30.10 dB
 - RBW: 100 Hz
 - Att: 40 dB
 - SWT: 1 s
 - VBW: 1 kHz
 - Mode: Sweep
- Limit Check:** A red line is drawn across the plot at approximately -22 dBm, labeled "Limit Check Line 22_1".
- Plot:** The main display shows a blue trace of the signal spectrum. The y-axis represents power in dBm, ranging from -60 dBm to 20 dBm. The x-axis represents frequency in MHz, with a center frequency (CF) of 150.8125 MHz and a span of 100.0 kHz. The signal shows a series of peaks, with the highest peak reaching approximately 20 dBm.
- Bottom Panel:**
 - CF: 150.8125 MHz
 - 691 pts
 - Span 100.0 kHz
 - Measuring... (with a progress bar)
 - Date/Time: 29.07.2021 07:29:29

The screenshot shows a spectrum analyzer interface with the following details:

- Top Panel:** Four tabs labeled "Spectrum", "Spectrum 2", "Spectrum 3", and "Spectrum 4". The "Spectrum" tab is active.
- Parameters:**
 - Ref Level: 40.00 dBm
 - Offset: 30.10 dB
 - RBW: 300 Hz
 - Att: 30 dB
 - SWT: 139 ms
 - VBW: 3 kHz
 - Mode: Sweep
- Left Panel:** A vertical scale from -50 dBm to 30 dBm in 10 dB increments. A "1Pk Max" button is at the top.
- Main Display:** A spectral plot with a blue trace showing a signal. Two horizontal red lines are present:
 - D1: 33.550 dBm
 - D2: 7.650 dBm
- Right Panel:** A list of measurements:
 - D1[1]: -7.00 dB
 - Occ BW: 16.100 kHz
 - M1[1]: 14.833574530 kHz
 - M2: 2.66 dBm
 - M3: 154.004540 MHz
- Bottom Panel:**
 - CF: 154.0125 MHz
 - 691 pts
 - Span: 125.0 kHz
 - Measuring... (with a progress bar)
 - 28.87.2821
 - 11/19/24

Spectrum 4

Ref Level 40.00 dBm Offset 30.10 dB RBW 300 kHz
 Att 40 dB SWT 139 ms VBW 3 kHz Mode Sweep

1Pk Max

Limit check
 Line EMB_h

PASS
 PASS


30 dBm
 20 dBm
 10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm

CF 154.0125 MHz 691 pts Span 125.0 kHz


Measuring... 28.07.2021 11:01:06

Page 26 of 45

Additional Channel Part 74, 161.1 MHz

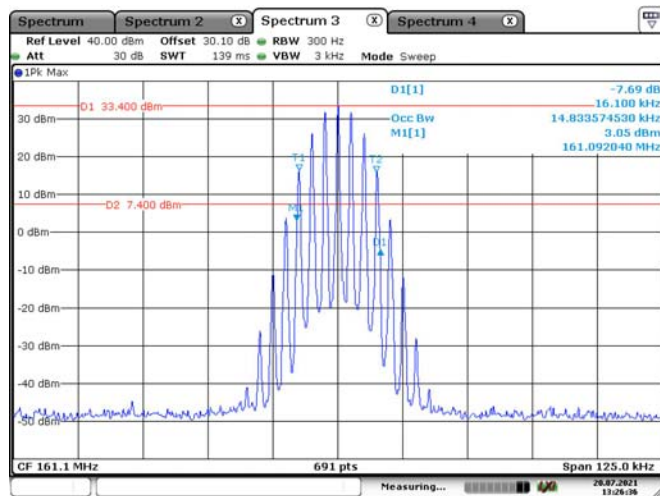


Date: 20.JUL.2021 13:26:36

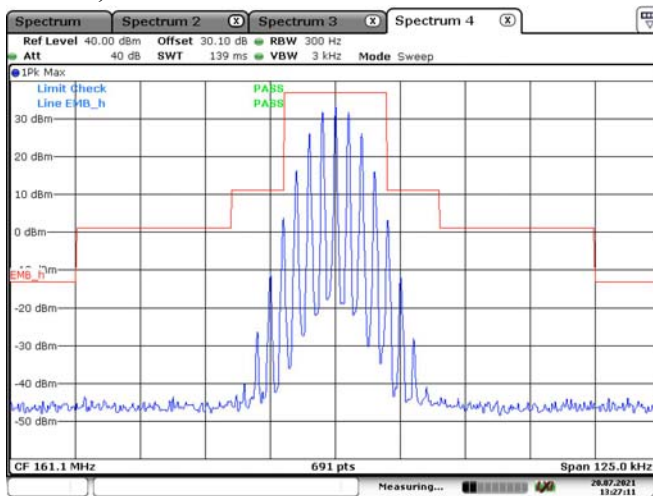


Date: 20.JUL.2021 13:27:11

Additional Channel Part 22, 150.8125 MHz

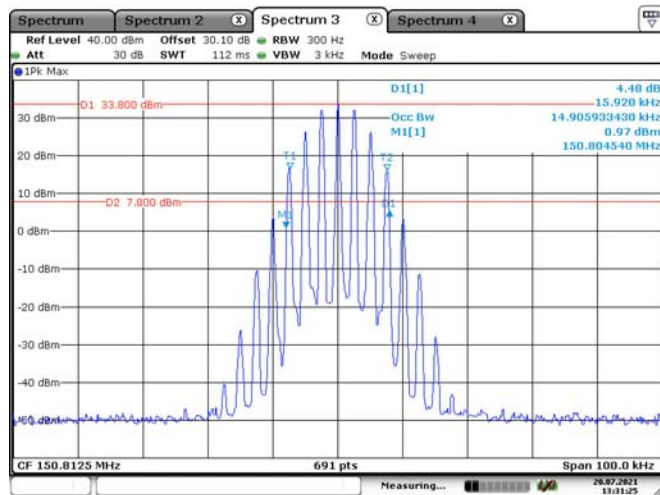


Date: 20.JUL.2021 13:31:25

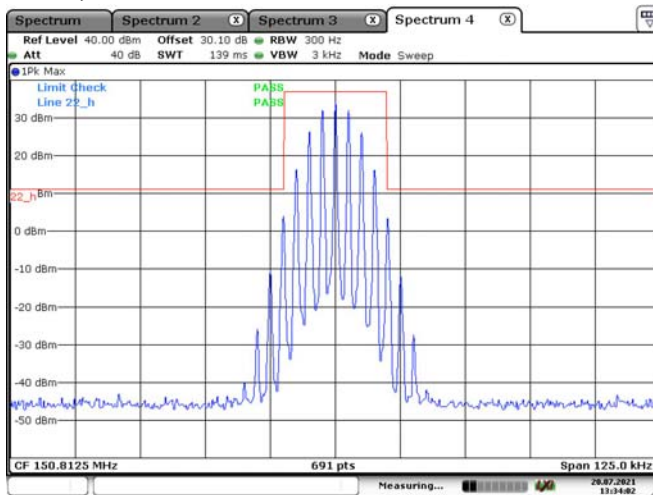


Date: 20.JUL.2021 13:34:02

FM, 25 kHz, Low Power:

Additional Channel Part 80, 154.0125 MHz


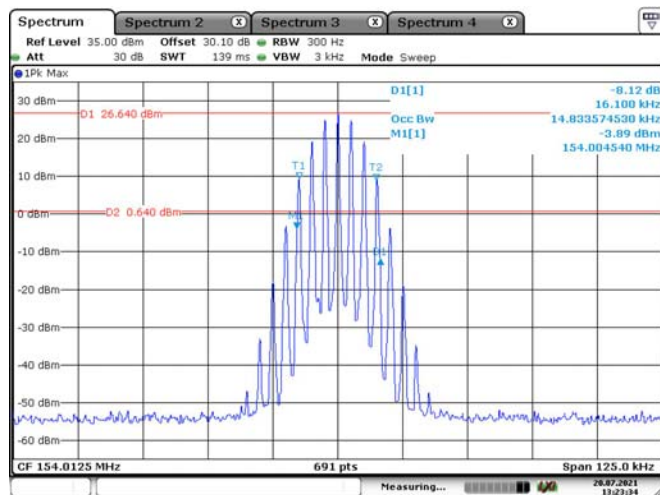


Date: 20.JUL.2021 13:23:35


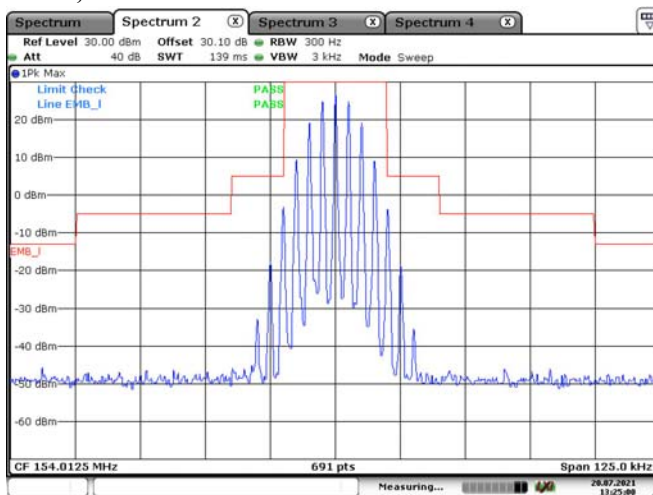


Date: 20.JUL.2021 13:25:01

Additional Channel Part 74, 161.1 MHz

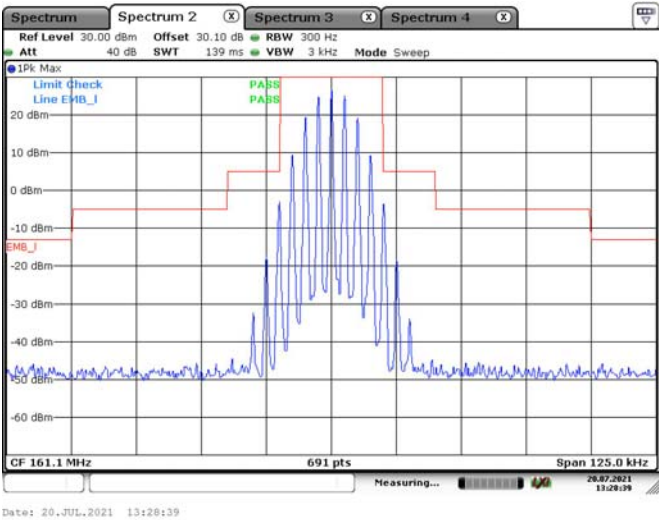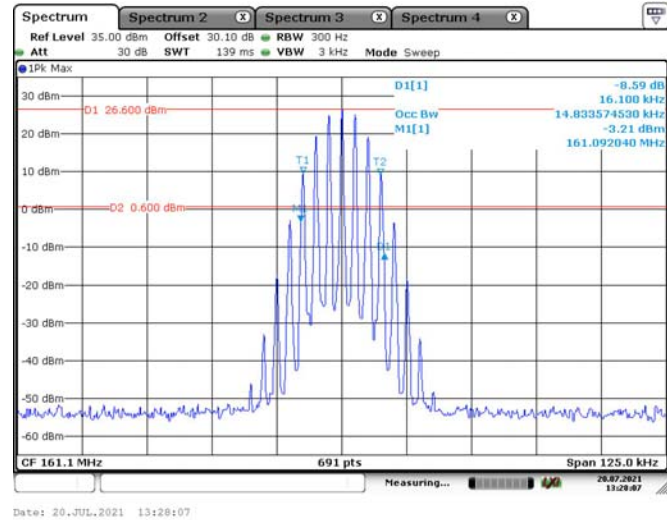

Additional Channel Part 22, 150.8125 MHz

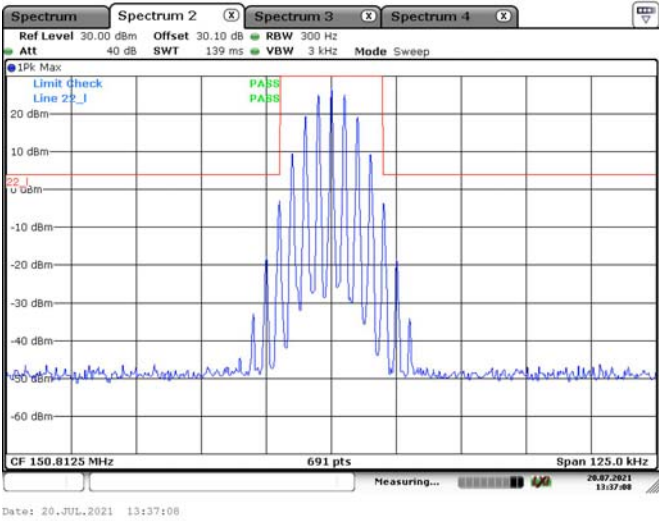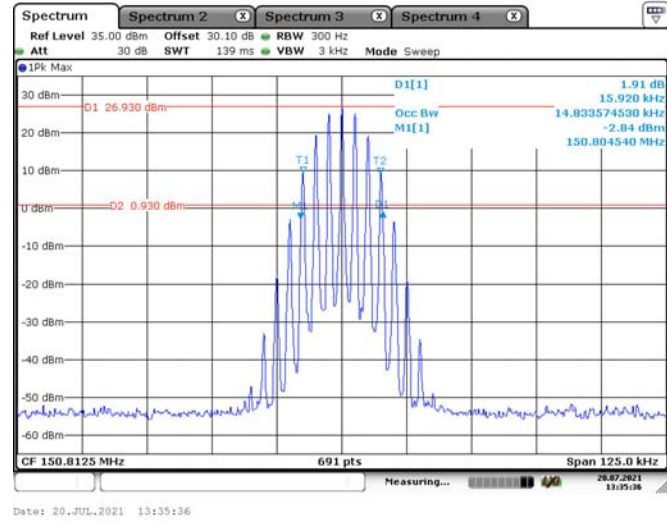

5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051, §22.861, §74.462, §80.211, and §90.210

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.


Test Data

Test Mode: Transmitting


Test Result: Compliance. Please refer to following plots.

FM, 12.5kHz:

Low Channel, 136.0125 MHz

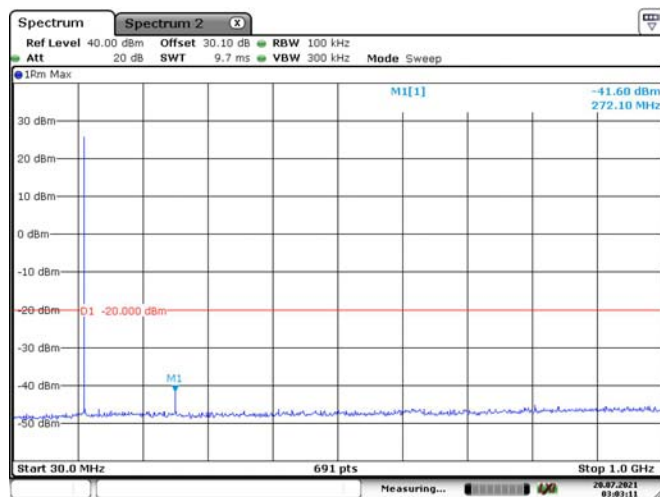


Date: 20.JUL.2021 03:03:12

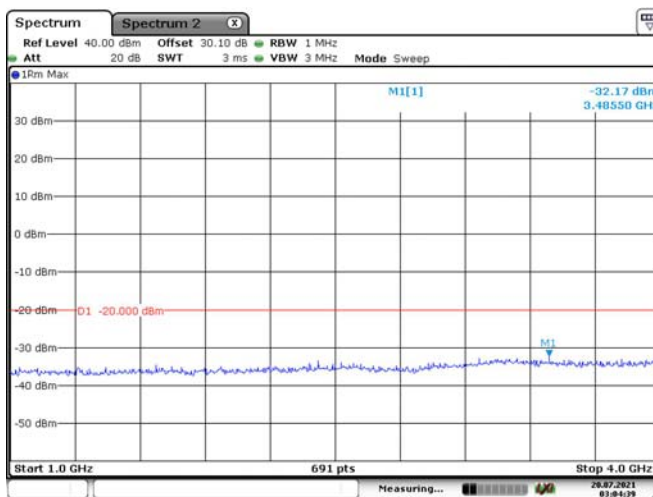


Date: 20.JUL.2021 03:04:40

Middle Channel, 155.7525 MHz


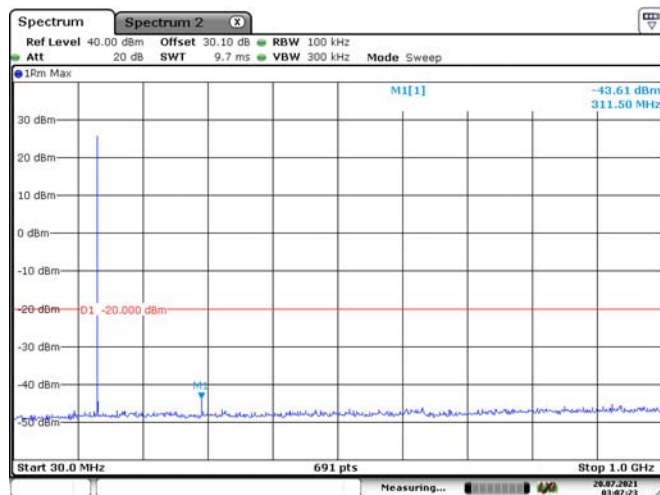


Date: 20.JUL.2021 03:07:24

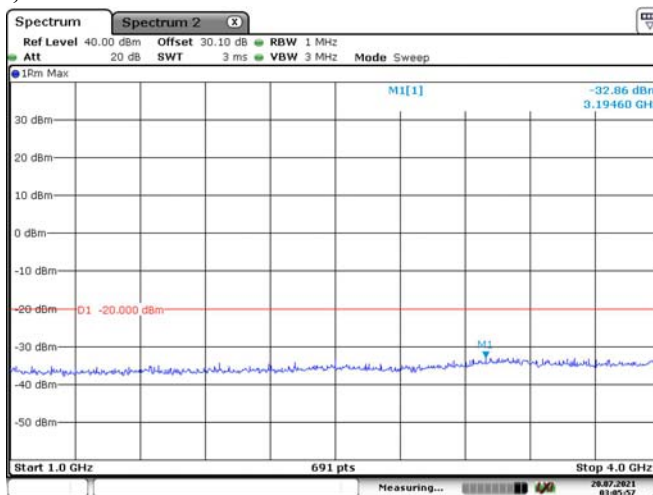



Date: 20.JUL.2021 03:05:58

High Channel, 173.9875 MHz

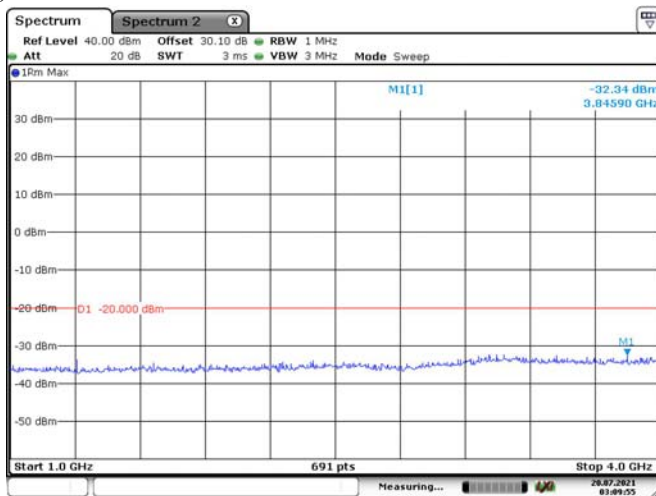
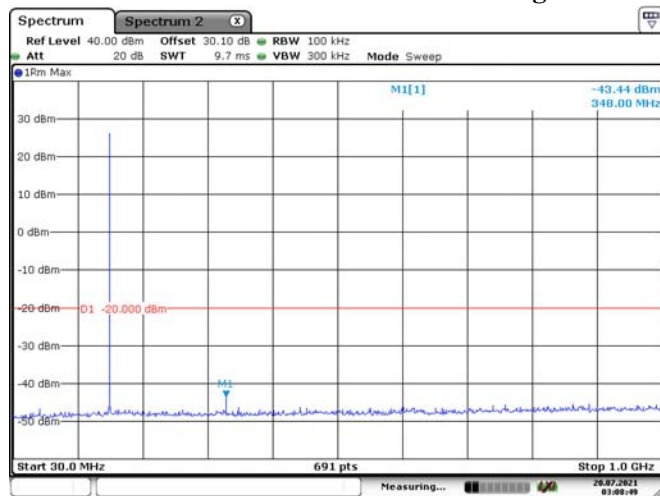


4FSK, 12.5kHz:


Low Channel, 136.0125 MHz

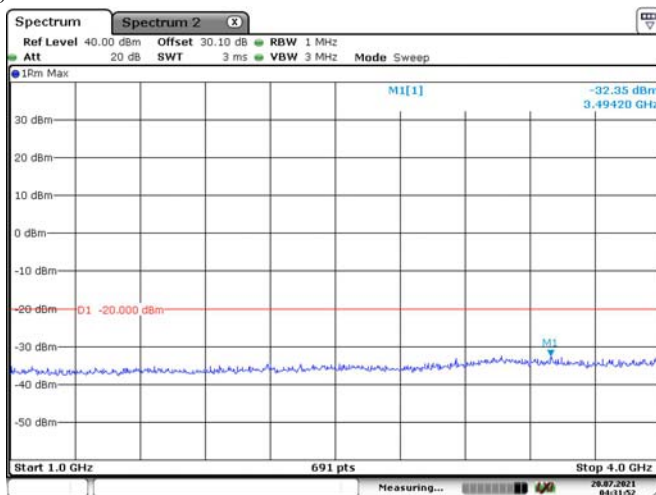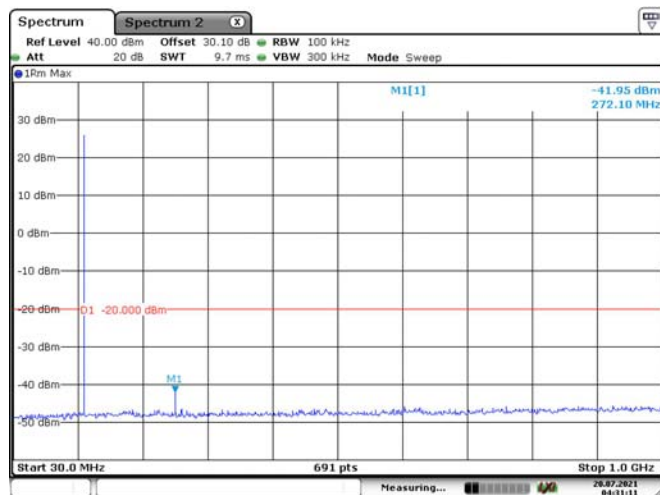

Middle Channel, 155.7525 MHz

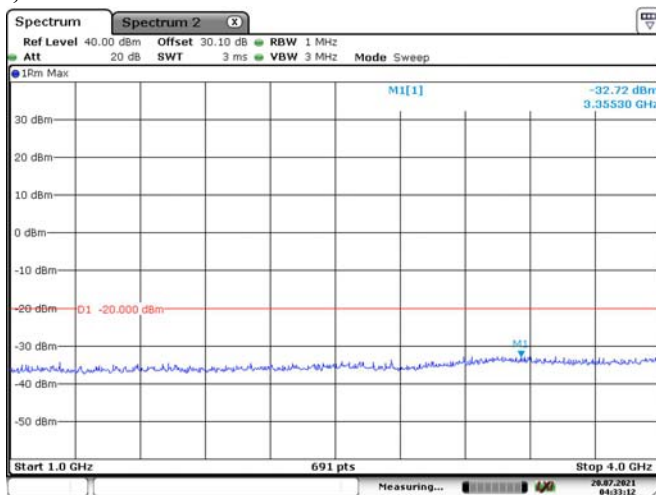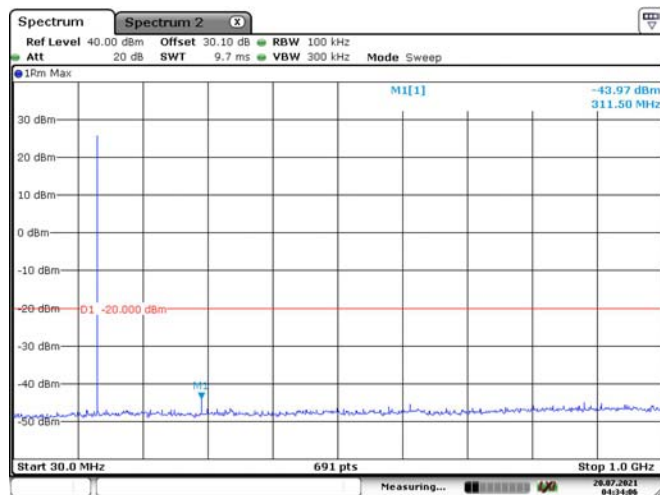


High Channel, 173.9875 MHz

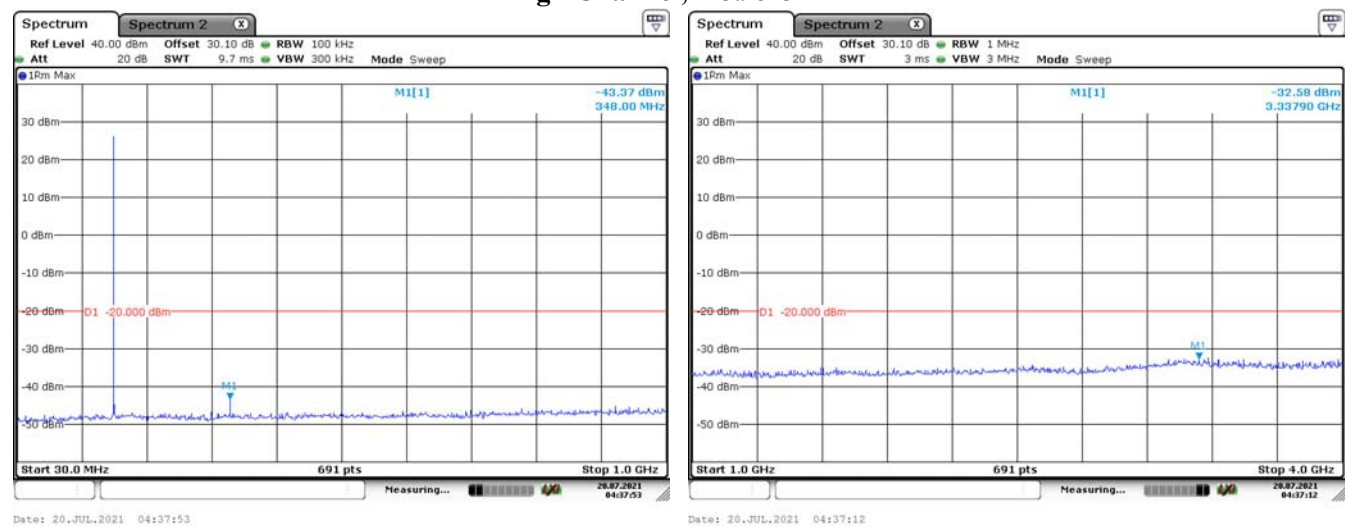


Part 80:

FM, 25kHz, 154.0125 MHz

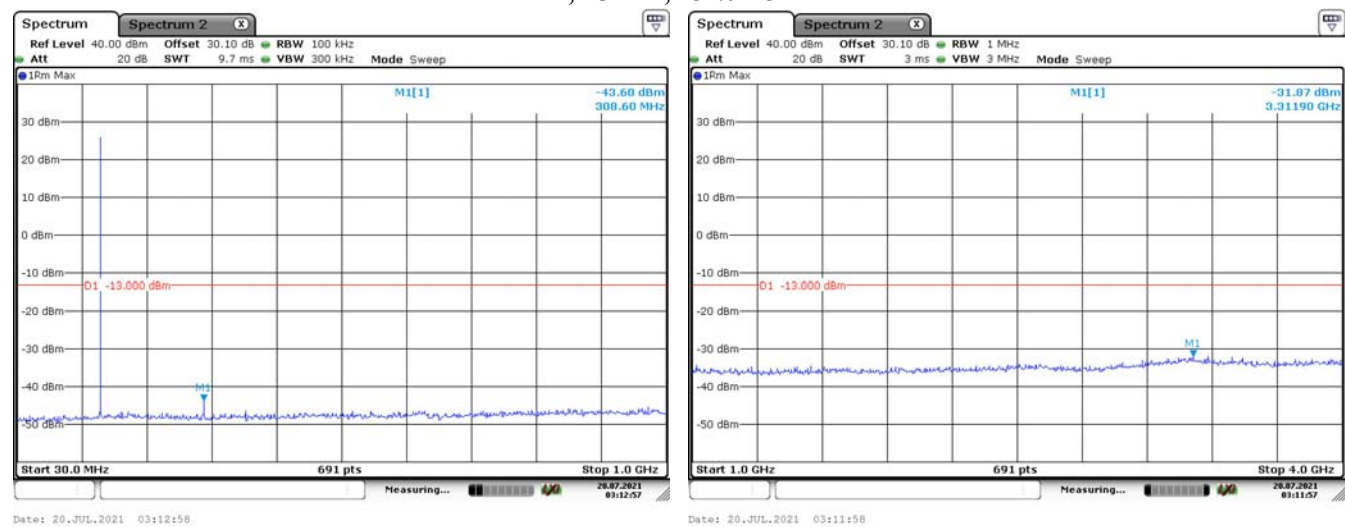


Part 74:


FM, 12.5kHz, 161.1 MHz

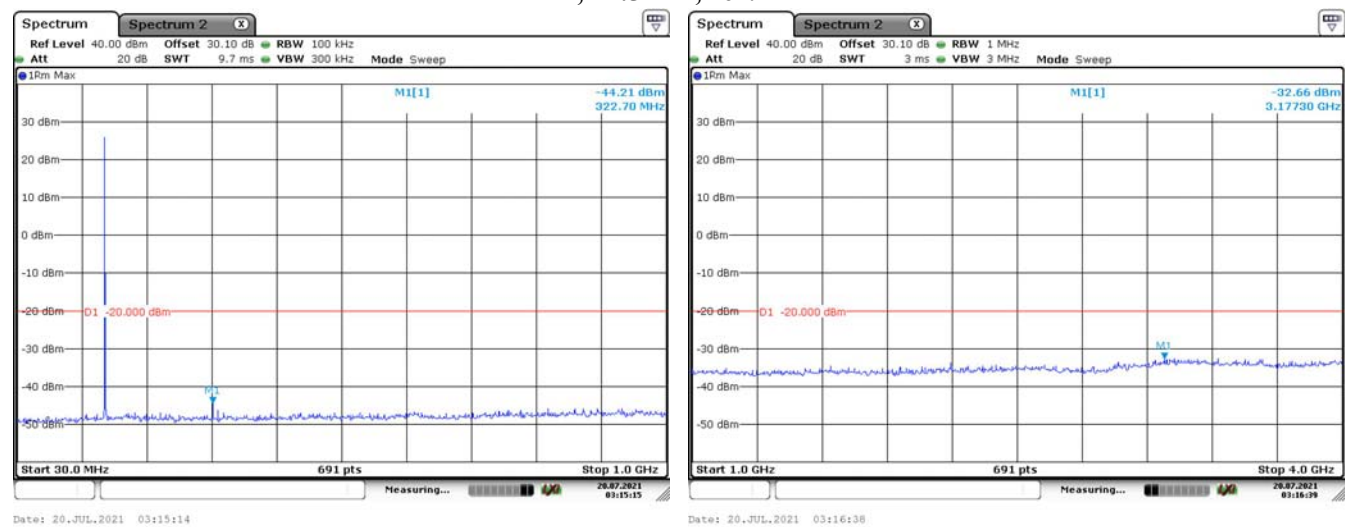

FM, 25kHz, 161.1 MHz

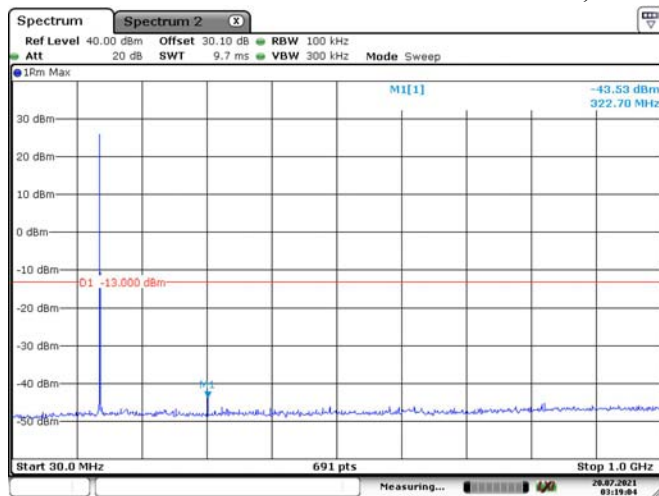


Date: 20.JUL.2021 03:19:04

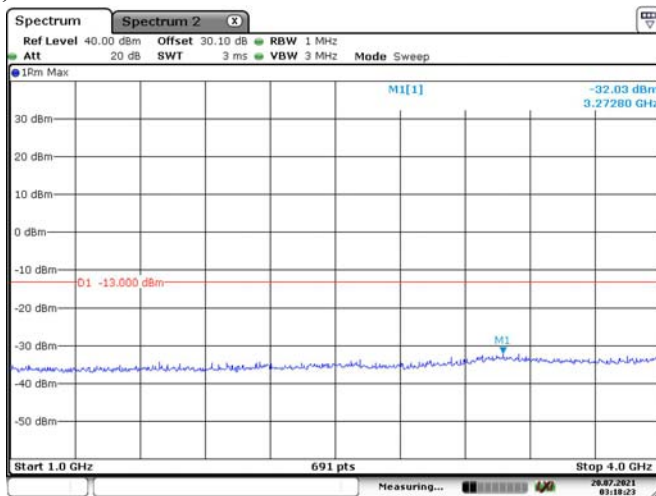


Date: 20.JUL.2021 03:18:23

4FSK, 12.5kHz, 161.1 MHz

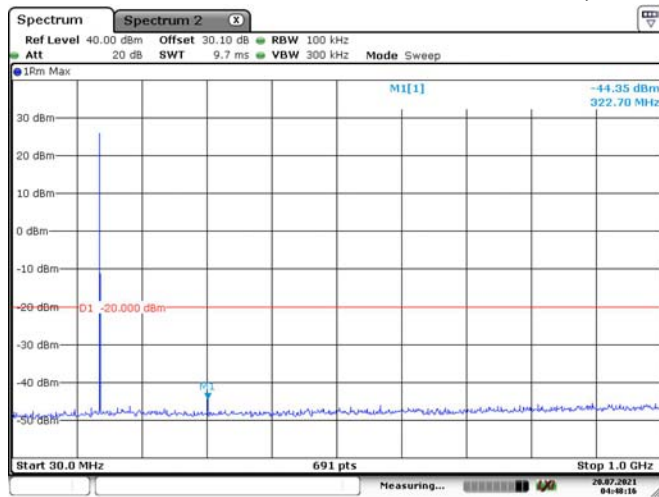


Date: 20.JUL.2021 04:48:16

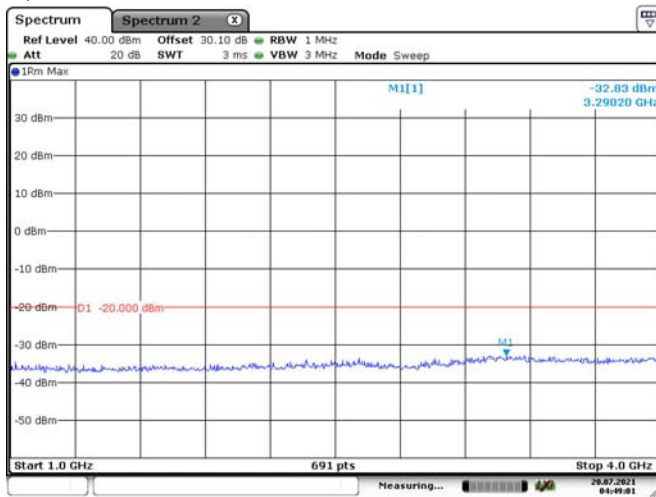


Date: 20.JUL.2021 04:49:01

Part 22:

FM, 12.5kHz, 150.8125 MHz


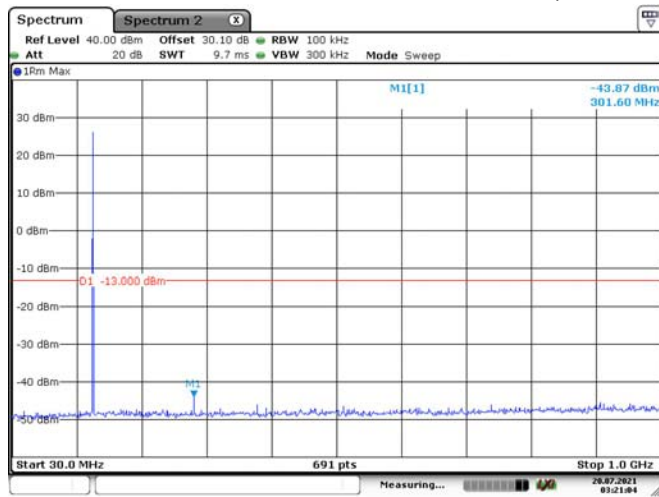


Date: 20.JUL.2021 03:21:03


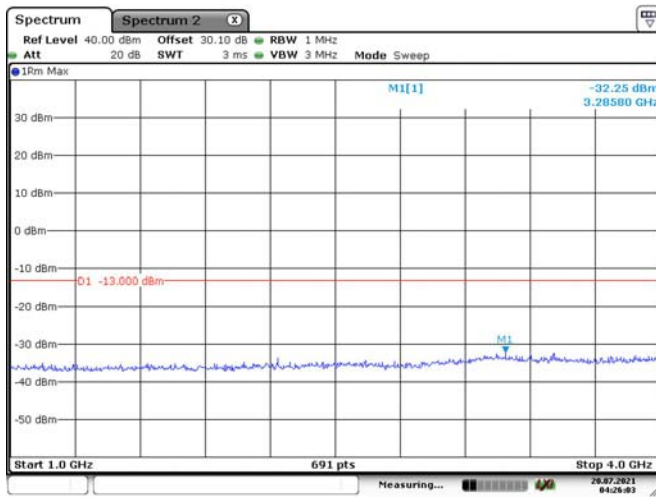


Date: 20.JUL.2021 04:26:03

FM,25kHz, 150.8125 MHz

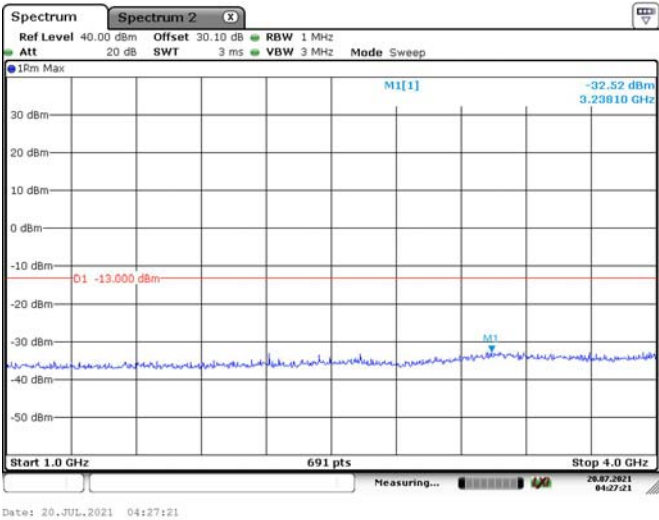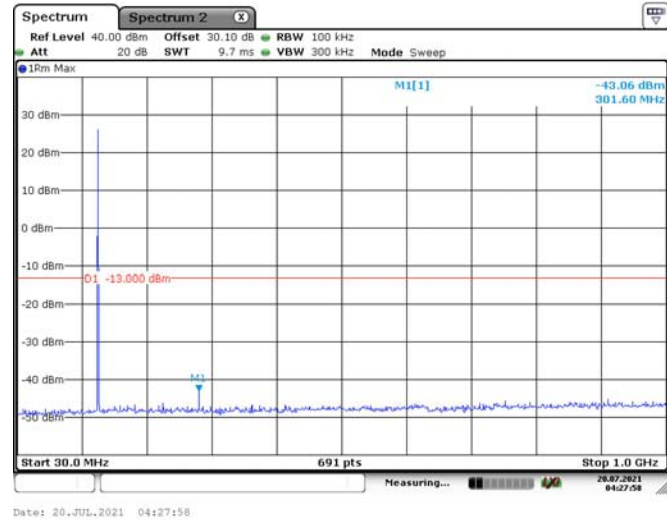

4FSK, 12.5kHz, 150.8125 MHz

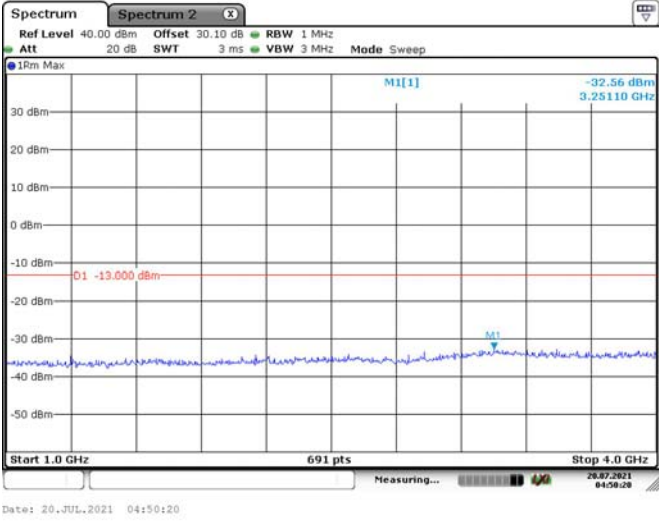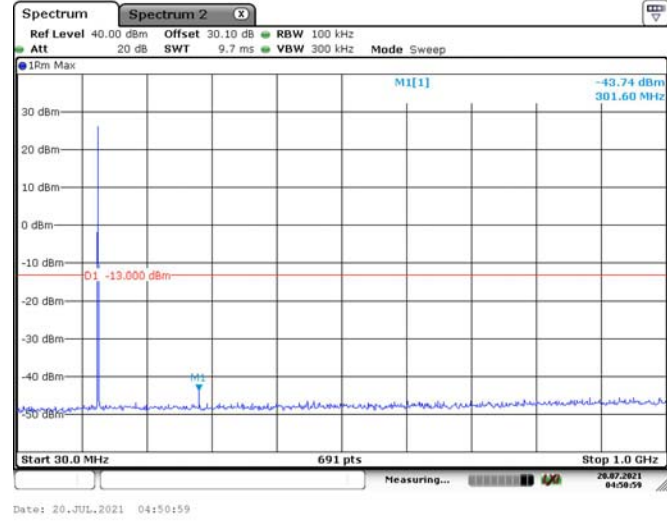

6 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, §80.211 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Test Data

Test Mode: Transmitting

Test Result: Compliance.

Test performed at high power level with Band Rejector Filter, *please refer to the following table.*

30MHz - 2GHz:*(Model HP682 VHF was the worst case)*

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 136.0125MHz-12.5 kHz								
272.50	H	48.19	-60.81	0.00	0.29	-61.10	-20.00	41.10
272.50	V	45.82	-61.71	0.00	0.29	-62.00	-20.00	42.00
1088.10	H	37.56	-66.28	7.46	0.99	-59.81	-20.00	39.81
1088.10	V	38.73	-65.53	7.46	0.99	-59.06	-20.00	39.06
1224.11	H	37.42	-65.76	7.54	1.11	-59.33	-20.00	39.33
1224.11	V	36.75	-67.48	7.54	1.11	-61.05	-20.00	41.05
1360.13	H	36.85	-66.70	8.72	1.20	-59.18	-20.00	39.18
1360.13	V	41.29	-62.98	8.72	1.20	-55.46	-20.00	35.46
4FSK, Frequency: 136.0125MHz-12.5 kHz								
262.80	H	54.49	-54.63	0.00	0.28	-54.91	-20.00	34.91
241.46	V	43.84	-63.88	0.00	0.25	-64.13	-20.00	44.13
1088.10	H	37.72	-66.12	7.46	0.99	-59.65	-20.00	39.65
1088.10	V	38.89	-65.37	7.46	0.99	-58.90	-20.00	38.90
1224.11	H	37.58	-65.60	7.54	1.11	-59.17	-20.00	39.17
1224.11	V	36.91	-67.32	7.54	1.11	-60.89	-20.00	40.89
1360.13	H	37.42	-66.13	8.72	1.20	-58.61	-20.00	38.61
1360.13	V	41.45	-62.82	8.72	1.20	-55.30	-20.00	35.30
FM, Frequency: 155.7525MHz-12.5 kHz								
311.30	H	50.49	-57.95	0.00	0.32	-58.27	-20.00	38.27
311.30	V	42.23	-64.44	0.00	0.32	-64.76	-20.00	44.76
1090.27	H	38.61	-65.23	7.45	0.99	-58.77	-20.00	38.77
1090.27	V	38.93	-65.33	7.45	0.99	-58.87	-20.00	38.87
1246.02	H	37.64	-65.72	7.76	1.14	-59.10	-20.00	39.10
1246.02	V	37.26	-67.11	7.76	1.14	-60.49	-20.00	40.49
1401.77	H	37.39	-66.03	9.01	1.20	-58.22	-20.00	38.22
1401.77	V	38.16	-65.85	9.01	1.20	-58.04	-20.00	38.04
1557.53	H	37.95	-66.78	9.85	0.96	-57.89	-20.00	37.89
1557.53	V	38.00	-67.12	9.85	0.96	-58.23	-20.00	38.23
4FSK, Frequency:155.7525MHz-12.5 kHz								
262.80	H	51.94	-57.18	0.00	0.28	-57.46	-20.00	37.46
235.64	V	42.84	-64.70	0.00	0.24	-64.94	-20.00	44.94
1090.27	H	38.19	-65.65	7.45	0.99	-59.19	-20.00	39.19
1090.27	V	38.42	-65.84	7.45	0.99	-59.38	-20.00	39.38
1246.02	H	37.26	-66.10	7.76	1.14	-59.48	-20.00	39.48
1246.02	V	36.84	-67.53	7.76	1.14	-60.91	-20.00	40.91
1401.77	H	36.97	-66.45	9.01	1.20	-58.64	-20.00	38.64
1401.77	V	37.78	-66.23	9.01	1.20	-58.42	-20.00	38.42
1557.53	H	37.53	-67.20	9.85	0.96	-58.31	-20.00	38.31
1557.53	V	37.55	-67.57	9.85	0.96	-58.68	-20.00	38.68

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 173.9875MHz-12.5 kHz								
348.16	H	53.04	-54.71	0.00	0.34	-55.05	-20.00	35.05
348.16	V	40.52	-65.09	0.00	0.34	-65.43	-20.00	45.43
1043.93	H	37.24	-66.59	7.68	0.86	-59.77	-20.00	39.77
1043.93	V	37.29	-67.05	7.68	0.86	-60.23	-20.00	40.23
1217.91	H	36.93	-66.20	7.48	1.11	-59.83	-20.00	39.83
1217.91	V	36.55	-67.64	7.48	1.11	-61.27	-20.00	41.27
1391.90	H	36.59	-66.83	8.94	1.20	-59.09	-20.00	39.09
1391.90	V	36.78	-67.27	8.94	1.20	-59.53	-20.00	39.53
1565.89	H	36.19	-68.52	9.90	0.91	-59.53	-20.00	39.53
1565.89	V	35.82	-69.32	9.90	0.91	-60.33	-20.00	40.33
1739.88	H	37.84	-66.08	10.92	0.72	-55.88	-20.00	35.88
1739.88	V	36.71	-67.81	10.92	0.72	-57.61	-20.00	37.61
4FSK, Frequency:173.9875MHz-12.5 kHz								
241.46	H	55.85	-53.59	0.00	0.25	-53.84	-20.00	33.84
241.46	V	43.34	-64.38	0.00	0.25	-64.63	-20.00	44.63
1043.93	H	38.01	-65.82	7.68	0.86	-59.00	-20.00	39.00
1043.93	V	39.18	-65.16	7.68	0.86	-58.34	-20.00	38.34
1217.91	H	37.87	-65.26	7.48	1.11	-58.89	-20.00	38.89
1217.91	V	37.26	-66.93	7.48	1.11	-60.56	-20.00	40.56
1391.90	H	37.29	-66.13	8.94	1.20	-58.39	-20.00	38.39
1391.90	V	39.61	-64.44	8.94	1.20	-56.70	-20.00	36.70
1565.89	H	36.94	-67.77	9.90	0.91	-58.78	-20.00	38.78
1565.89	V	37.05	-68.09	9.90	0.91	-59.10	-20.00	39.10
1739.88	H	36.94	-66.98	10.92	0.72	-56.78	-20.00	36.78
1739.88	V	37.05	-67.47	10.92	0.72	-57.27	-20.00	37.27

Part 80

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 154.0125MHz-25 kHz								
307.42	H	51.22	-57.29	0.00	0.32	-57.61	-13.00	44.61
307.42	V	41.48	-65.30	0.00	0.32	-65.62	-13.00	52.62
1078.09	H	37.82	-66.02	7.51	0.96	-59.47	-13.00	46.47
1078.09	V	38.99	-65.29	7.51	0.96	-58.74	-13.00	45.74
1232.10	H	37.68	-65.56	7.62	1.12	-59.06	-13.00	46.06
1232.10	V	37.01	-67.27	7.62	1.12	-60.77	-13.00	47.77
1386.11	H	37.16	-66.29	8.90	1.20	-58.59	-13.00	45.59
1386.11	V	37.42	-66.67	8.90	1.20	-58.97	-13.00	45.97
1540.13	H	36.75	-68.02	9.74	1.08	-59.36	-13.00	46.36
1540.13	V	36.86	-68.21	9.74	1.08	-59.55	-13.00	46.55

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 161.1MHz-12.5 kHz								
321.00	H	50.18	-58.08	0.00	0.32	-58.40	-20.00	38.40
321.00	V	38.86	-67.53	0.00	0.32	-67.85	-20.00	47.85
1127.70	H	37.69	-65.91	7.37	1.04	-59.58	-20.00	39.58
1127.70	V	38.86	-65.34	7.37	1.04	-59.01	-20.00	39.01
1288.80	H	37.55	-66.16	8.19	1.18	-59.15	-20.00	39.15
1288.80	V	36.88	-67.75	8.19	1.18	-60.74	-20.00	40.74
1449.90	H	36.97	-67.15	9.25	1.27	-59.17	-20.00	39.17
1449.90	V	37.29	-67.18	9.25	1.27	-59.20	-20.00	39.20
1611.00	H	36.62	-67.91	10.18	0.69	-58.42	-20.00	38.42
1611.00	V	36.73	-68.40	10.18	0.69	-58.91	-20.00	38.91
FM, Frequency: 161.1MHz-25 kHz								
321.20	H	50.82	-57.44	0.00	0.32	-57.76	-13.00	44.76
321.20	V	41.45	-64.93	0.00	0.32	-65.25	-13.00	52.25
1127.70	H	37.94	-65.66	7.37	1.04	-59.33	-13.00	46.33
1127.70	V	39.11	-65.09	7.37	1.04	-58.76	-13.00	45.76
1288.80	H	37.83	-65.88	8.19	1.18	-58.87	-13.00	45.87
1288.80	V	37.13	-67.50	8.19	1.18	-60.49	-13.00	47.49
1449.90	H	37.22	-66.90	9.25	1.27	-58.92	-13.00	45.92
1449.90	V	37.54	-66.93	9.25	1.27	-58.95	-13.00	45.95
1611.00	H	36.87	-67.66	10.18	0.69	-58.17	-13.00	45.17
1611.00	V	36.98	-68.15	10.18	0.69	-58.66	-13.00	45.66

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 161.1MHz-12.5 kHz								
262.80	H	54.43	-54.69	0.00	0.28	-54.97	-20.00	34.97
241.46	V	42.90	-64.82	0.00	0.25	-65.07	-20.00	45.07
1127.70	H	37.31	-66.29	7.37	1.04	-59.96	-20.00	39.96
1127.70	V	38.48	-65.72	7.37	1.04	-59.39	-20.00	39.39
1288.80	H	37.17	-66.54	8.19	1.18	-59.53	-20.00	39.53
1288.80	V	36.59	-68.04	8.19	1.18	-61.03	-20.00	41.03
1449.90	H	36.59	-67.53	9.25	1.27	-59.55	-20.00	39.55
1449.90	V	36.91	-67.56	9.25	1.27	-59.58	-20.00	39.58
1611.00	H	36.24	-68.29	10.18	0.69	-58.80	-20.00	38.80
1611.00	V	36.35	-68.78	10.18	0.69	-59.29	-20.00	39.29

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 150.8125MHz-12.5 kHz								
301.63	H	45.43	-63.19	0.00	0.31	-63.50	-13.00	50.50
301.63	V	40.13	-66.81	0.00	0.31	-67.12	-13.00	54.12
1055.69	H	38.36	-65.47	7.62	0.90	-58.75	-13.00	45.75
1055.69	V	39.17	-65.15	7.62	0.90	-58.43	-13.00	45.43
1206.50	H	38.02	-65.01	7.37	1.10	-58.74	-13.00	45.74
1206.50	V	37.01	-67.11	7.37	1.10	-60.84	-13.00	47.84
1357.31	H	37.08	-66.49	8.70	1.20	-58.99	-13.00	45.99
1357.31	V	37.16	-67.13	8.70	1.20	-59.63	-13.00	46.63
1508.13	H	37.23	-67.60	9.55	1.30	-59.35	-13.00	46.35
1508.13	V	36.84	-68.13	9.55	1.30	-59.88	-13.00	46.88
FM, Frequency: 150.8125MHz-25 kHz								
301.63	H	45.51	-63.11	0.00	0.31	-63.42	-13.00	50.42
301.63	V	38.93	-68.01	0.00	0.31	-68.32	-13.00	55.32
1055.69	H	36.88	-66.95	7.62	0.90	-60.23	-13.00	47.23
1055.69	V	38.05	-66.27	7.62	0.90	-59.55	-13.00	46.55
1206.50	H	36.95	-66.08	7.37	1.10	-59.81	-13.00	46.81
1206.50	V	36.39	-67.73	7.37	1.10	-61.46	-13.00	48.46
1357.31	H	36.16	-67.41	8.70	1.20	-59.91	-13.00	46.91
1357.31	V	36.55	-67.74	8.70	1.20	-60.24	-13.00	47.24
1508.13	H	36.31	-68.52	9.55	1.30	-60.27	-13.00	47.27
1508.13	V	35.92	-69.05	9.55	1.30	-60.80	-13.00	47.80

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 150.8125MHz-12.5 kHz								
262.80	H	54.83	-54.29	0.00	0.28	-54.57	-13.00	41.57
241.46	V	42.79	-64.93	0.00	0.25	-65.18	-13.00	52.18
1055.69	H	37.46	-66.37	7.62	0.90	-59.65	-13.00	46.65
1055.69	V	38.51	-65.81	7.62	0.90	-59.09	-13.00	46.09
1206.50	H	37.25	-65.78	7.37	1.10	-59.51	-13.00	46.51
1206.50	V	36.49	-67.63	7.37	1.10	-61.36	-13.00	48.36
1357.31	H	36.67	-66.90	8.70	1.20	-59.40	-13.00	46.40
1357.31	V	36.40	-67.89	8.70	1.20	-60.39	-13.00	47.39
1508.13	H	36.34	-68.49	9.55	1.30	-60.24	-13.00	47.24
1508.13	V	36.43	-68.54	9.55	1.30	-60.29	-13.00	47.29

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

7 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, §80.209 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Test Mode: Transmitting

Test Result: Compliance. *Please refer to following tables.*

FCC Part 90:

FM,12.5kHz, Reference Frequency: 155.7525 MHz, Limit: ±5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	155.752580	0.51
-20		155.752580	0.51
-10		155.752579	0.51
0		155.752576	0.49
10		155.752580	0.52
20		155.752558	0.37
30		155.752567	0.43
40		155.752568	0.43
50		155.752564	0.41
20	6.5	155.752582	0.53
20	8.8	155.752579	0.51

4FSK, 12.5kHz, Reference Frequency: 155.7525MHz, Limit: ±5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	155.752509	0.06
-20		155.752525	0.16
-10		155.752515	0.10
0		155.752523	0.15
10		155.752527	0.17
20		155.752500	0.00
30		155.752513	0.08
40		155.752509	0.06
50		155.752510	0.06
20	6.5	155.752503	0.02
20	8.8	155.752528	0.18

FCC Part 80:

FM,25kHz, Reference Frequency: 154.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	154.012576	0.49
-20		154.012570	0.45
-10		154.012587	0.56
0		154.012560	0.39
10		154.012567	0.43
20		154.012558	0.38
30		154.012580	0.52
40		154.012566	0.43
50		154.012574	0.48
20	6.5	154.012563	0.41
20	8.8	154.012567	0.43

FCC Part 74:

FM, 12.5kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	161.100059	0.37
-20		161.100074	0.46
-10		161.100068	0.42
0		161.100063	0.39
10		161.100070	0.44
20		161.100058	0.36
30		161.100073	0.46
40		161.100063	0.39
50		161.100064	0.40
20	6.5	161.100067	0.42
20	8.8	161.100088	0.54

4FSK, 12.5kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	161.100087	0.54
-20		161.100075	0.46
-10		161.100095	0.59
0		161.100085	0.52
10		161.100081	0.50
20		161.100073	0.45
30		161.100084	0.52
40		161.100096	0.60
50		161.100082	0.51
20	6.5	161.100082	0.51
20	8.8	161.100083	0.51

FM, 25kHz, Reference Frequency: 161.1 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	161.100060	0.37
-20		161.100070	0.44
-10		161.100067	0.41
0		161.100086	0.53
10		161.100065	0.40
20		161.100058	0.36
30		161.100063	0.39
40		161.100073	0.45
50		161.100078	0.48
20	6.5	161.100070	0.44
20	8.8	161.100061	0.38

FCC Part 22:

FM, 12.5kHz, Reference Frequency: 150.8125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	150.812584	0.56
-20		150.812565	0.43
-10		150.812580	0.53
0		150.812562	0.41
10		150.812584	0.55
20		150.812558	0.38
30		150.812569	0.45
40		150.812582	0.55
50		150.812568	0.45
20	6.5	150.812586	0.57
20	8.8	150.812585	0.56

4FSK, 12.5kHz, Reference Frequency: 150.8125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	150.812728	1.51
-20		150.812743	1.61
-10		150.812741	1.60
0		150.812727	1.51
10		150.812729	1.52
20		150.812717	1.44
30		150.812745	1.62
40		150.812746	1.63
50		150.812744	1.61
20	6.5	150.812741	1.59
20	8.8	150.812730	1.53

FM, 25kHz, Reference Frequency: 150.8125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.7	150.812579	0.53
-20		150.812574	0.49
-10		150.812567	0.45
0		150.812559	0.39
10		150.812564	0.43
20		150.812558	0.38
30		150.812579	0.53
40		150.812586	0.57
50		150.812561	0.41
20	6.5	150.812581	0.54
20	8.8	150.812562	0.41


8 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

Regulations: FCC §90.214

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

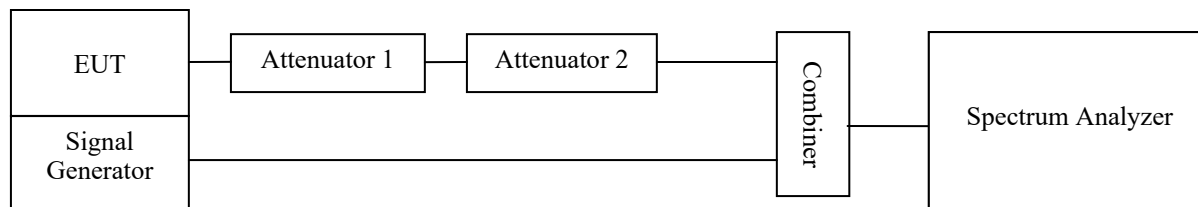


Test Data

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots.

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	5(t ₁)	±12.5 kHz	Pass
	20(t ₂)	±6.25 kHz	
	5(t ₃)	±12.5 kHz	

155.7525_Turn On

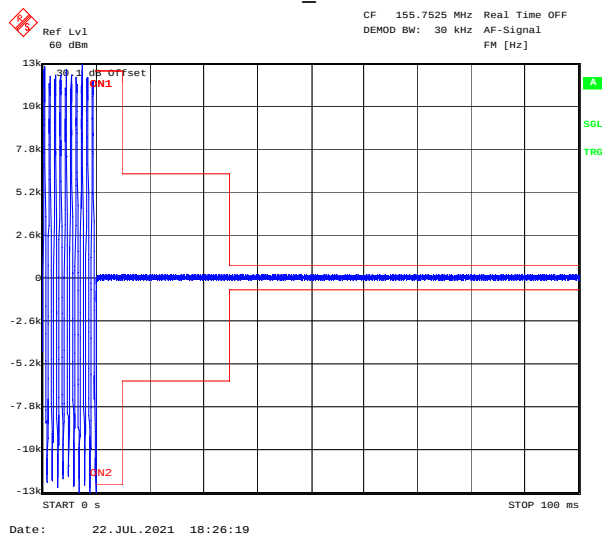

155.7525_Turn Off

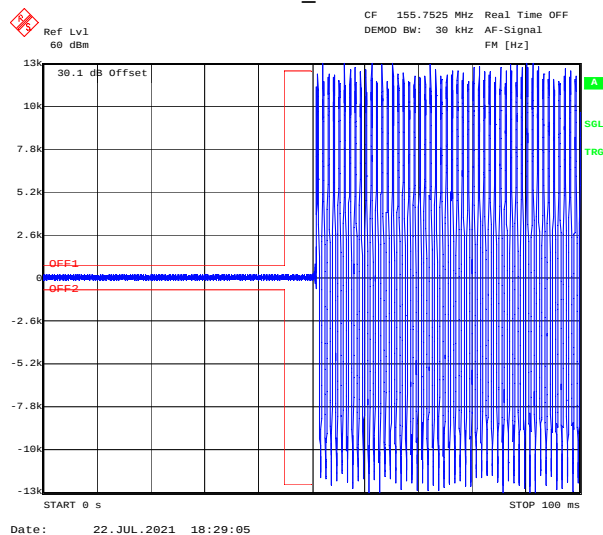

***** END OF REPORT *****