

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	13	0.0156	2.5
0		12	0.0144	2.5
10		17	0.0204	2.5
20		14	0.0168	2.5
30		13	0.0156	2.5
40		9	0.0108	2.5
50		17	0.0204	2.5
55		17	0.0204	2.5
25	4.2	17	0.0204	2.5
	3.2	12	0.0144	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	15	0.0080	2.5
0		11	0.0059	2.5
10		14	0.0074	2.5
20		14	0.0074	2.5
30		15	0.0080	2.5
40		14	0.0074	2.5
50		16	0.0085	2.5
55		18	0.0096	2.5
25	4.2	17	0.0090	2.5
	3.2	18	0.0096	2.5

RMC:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	18	0.0216	2.5
0		14	0.0168	2.5
10		17	0.0204	2.5
20		15	0.0180	2.5
30		17	0.0204	2.5
40		14	0.0168	2.5
50		18	0.0216	2.5
55		17	0.0204	2.5
25	4.2	21	0.0251	2.5
	3.2	18	0.0216	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	22	0.0117	2.5
0		15	0.0080	2.5
10		16	0.0085	2.5
20		13	0.0069	2.5
30		13	0.0069	2.5
40		16	0.0085	2.5
50		19	0.0101	2.5
55		18	0.0096	2.5
25	4.2	18	0.0096	2.5
	3.2	17	0.0090	2.5

UMTS-FDD Band IV (Part 27)

Middle Channel, $f_0 = 1733$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.85	20	0.0240	2.5
0		14	0.0168	2.5
10		15	0.0180	2.5
20		14	0.0168	2.5
30		17	0.0204	2.5
40		14	0.0168	2.5
50		22	0.0263	2.5
55		18	0.0216	2.5
25	4.4	17	0.0204	2.5
	3.6	19	0.0228	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/14/2017	09/13/2018	☒
Power Splitter	1#	1#	08/30/2017	08/29/2018	☒
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	☒
Temperature/Humidity Chamber	UHL-270	001	10/07/2017	10/06/2018	☒
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	☒
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/15/2017	09/14/2018	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	☒
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/19/2017	09/18/2018	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/22/2017	09/21/2018	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/15/2017	09/14/2018	☒
Power Amplifier	SMC150D	R1553-0313	03/08/2017	03/07/2018	☒
Power Amplifier	S41-25D	R1553-0314	05/26/2017	05/25/2018	☒

Tunable Notch Filter	3NF-800/1000-S	AA4	08/30/2017	08/29/2018	☒
Tunable Notch Filter	3NF-1000/2000-S	AM 4	08/30/2017	08/29/2018	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View



EUT - Front View



EUT - Rear View




EUT - Top View



EUT - Bottom View



EUT - Left View

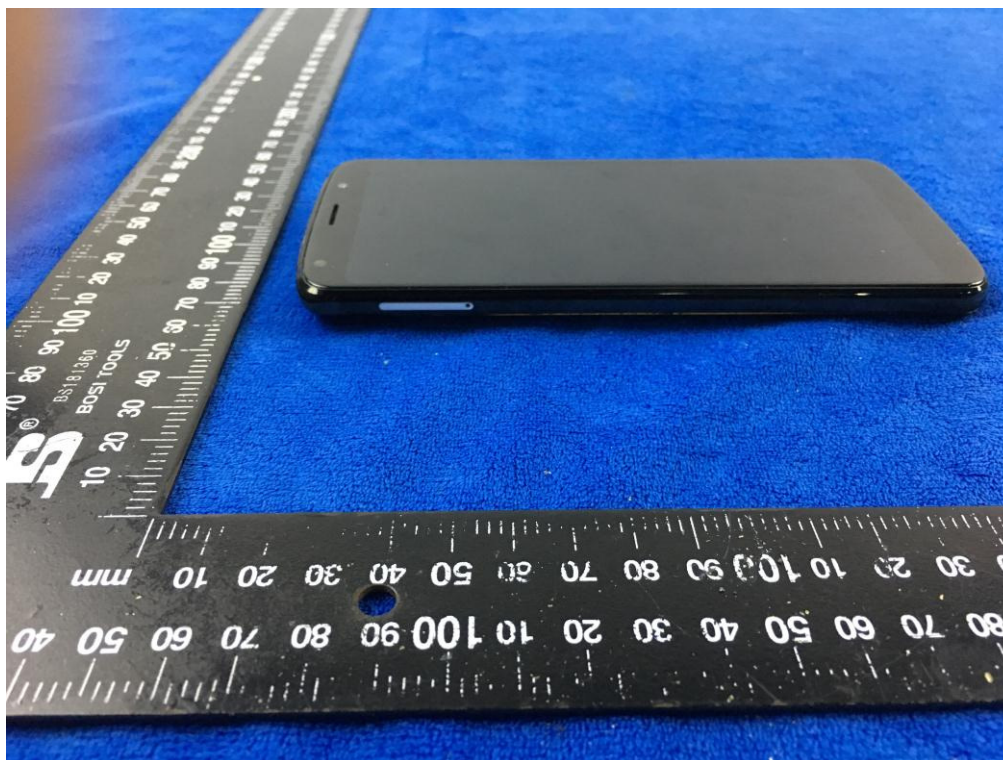


EUT - Right View







Battery - Front View

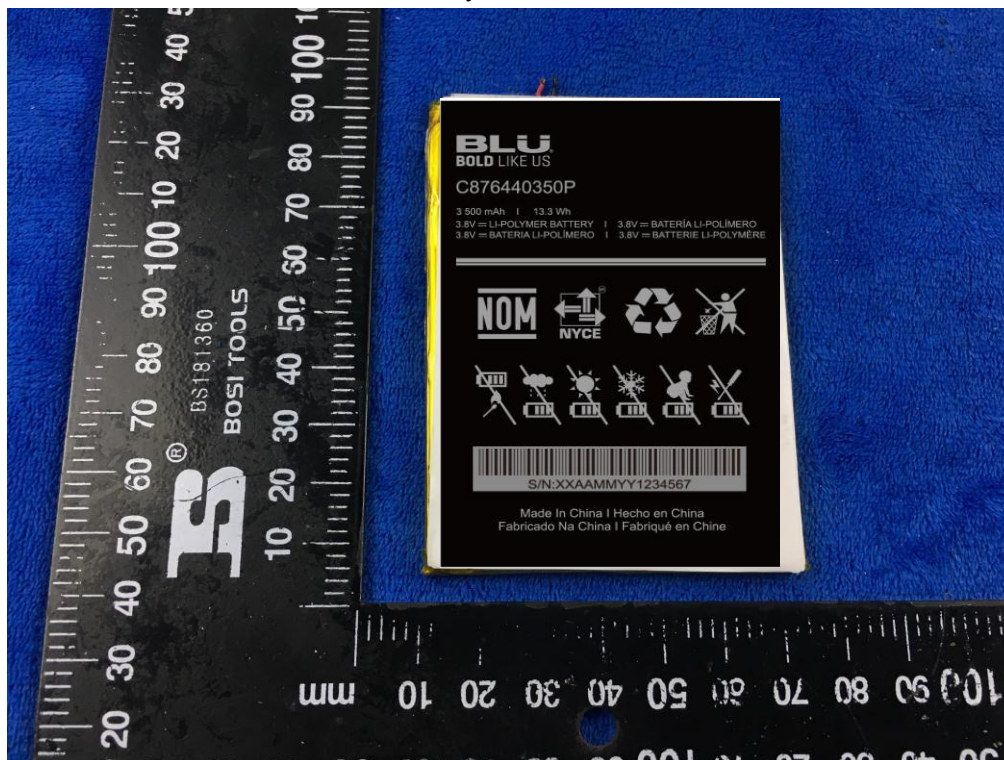


Battery - Rear View

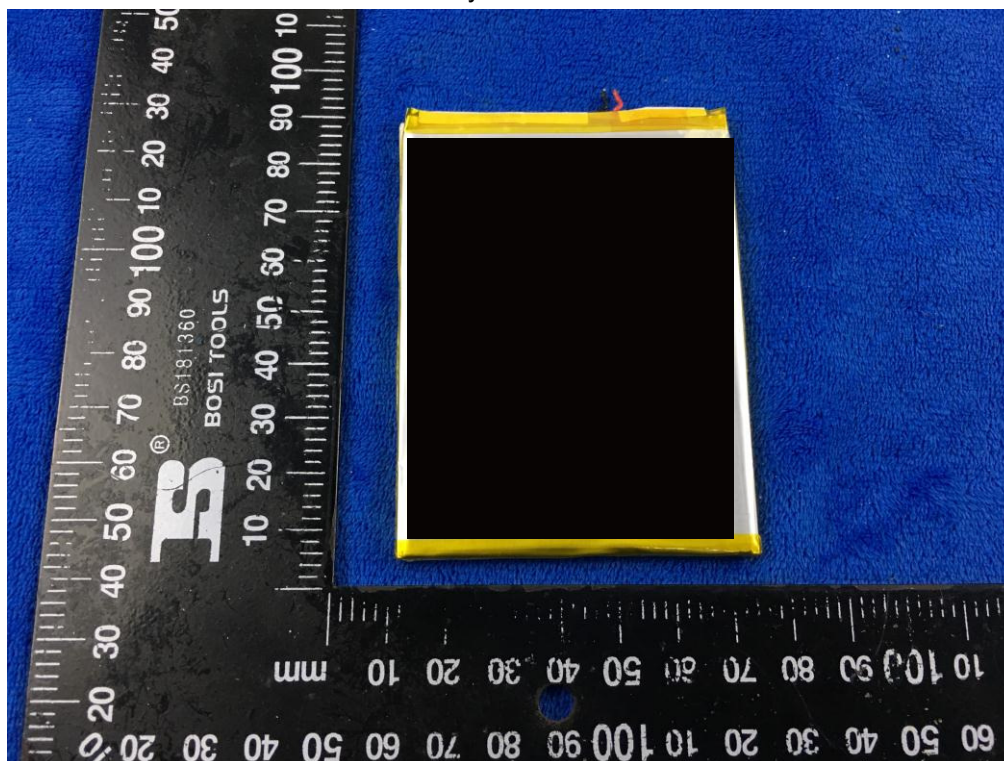


Mainboard with Shielding - Front View

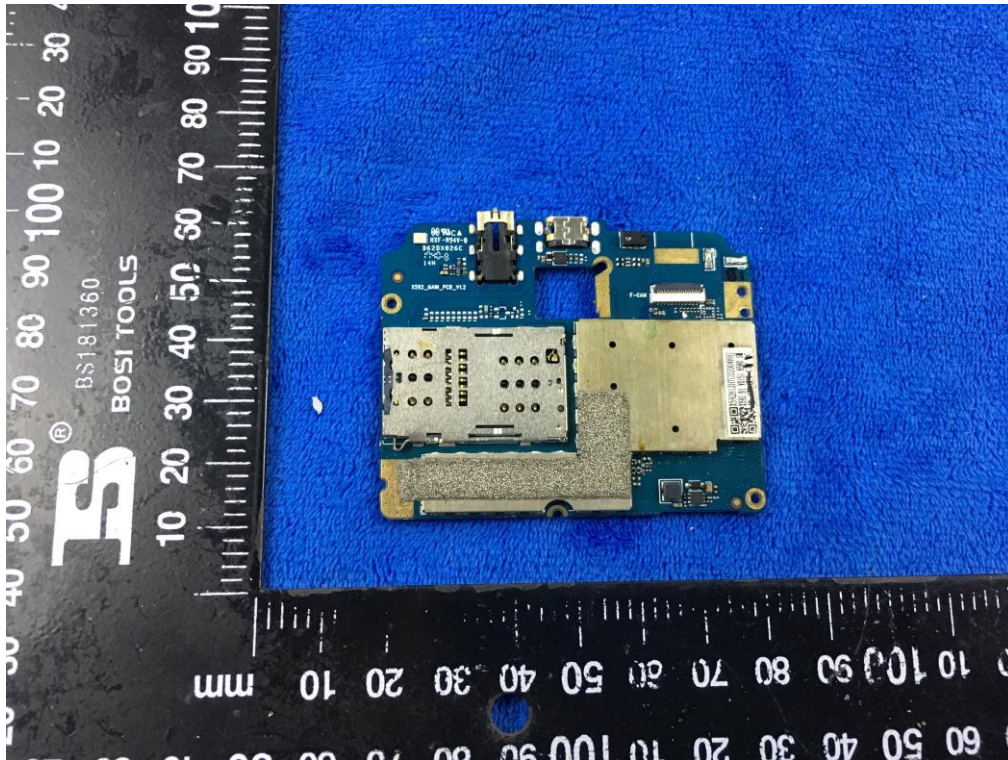


Mainboard without Shielding - Front View

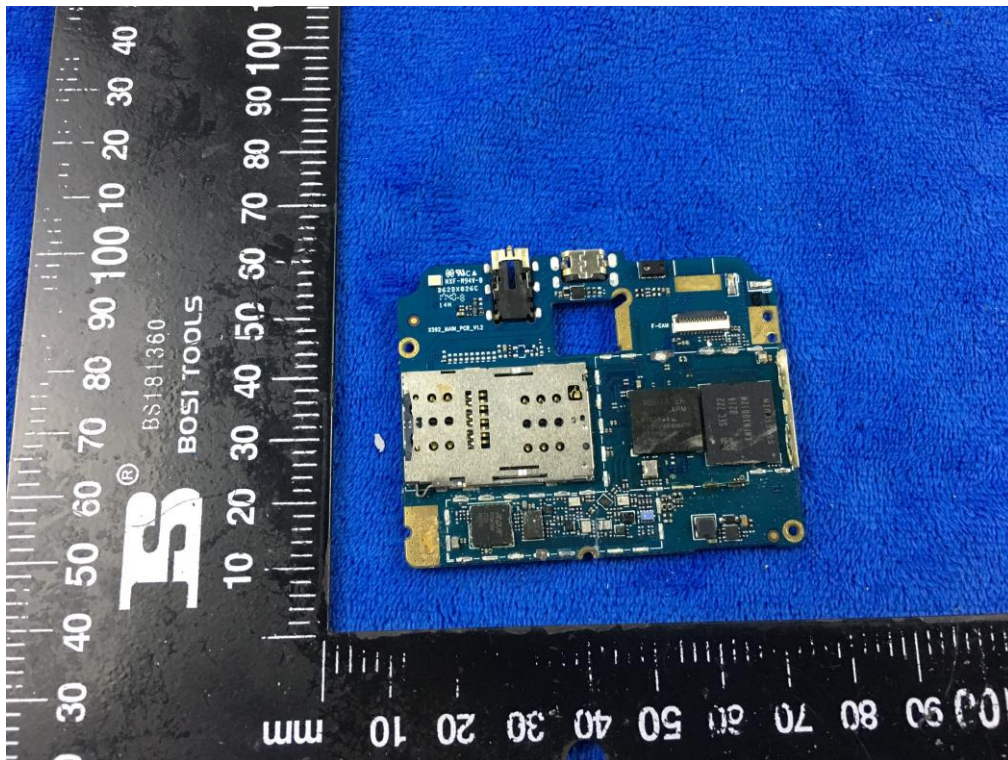

Mainboard with Shielding – Rear View

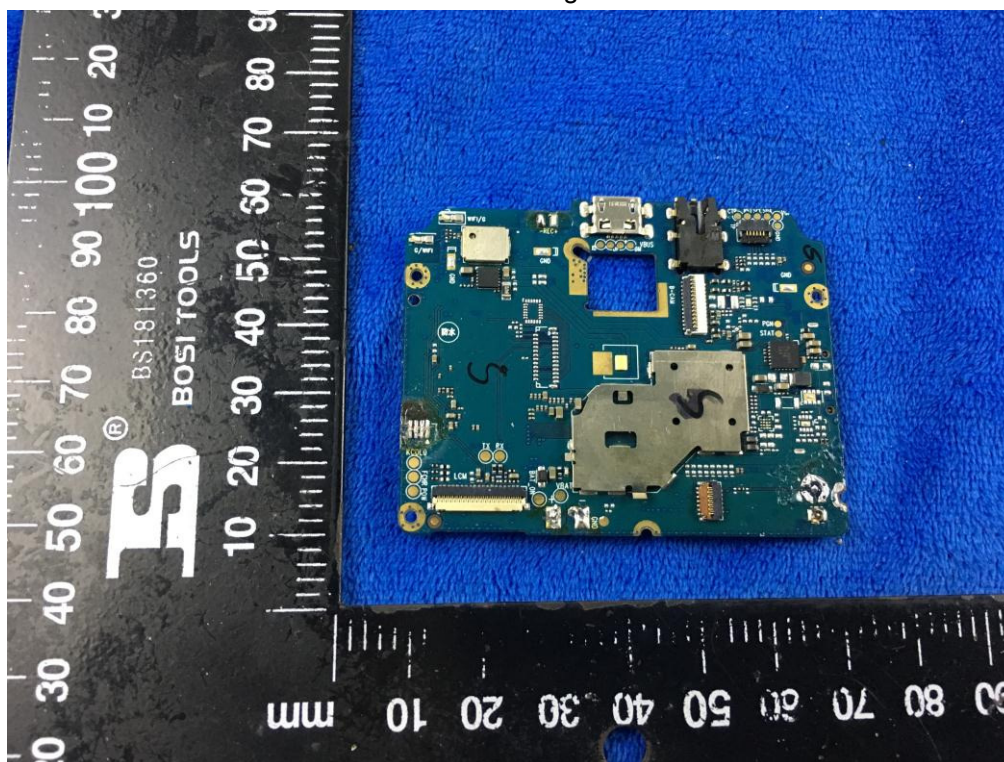

Mainboard without Shielding – Rear View

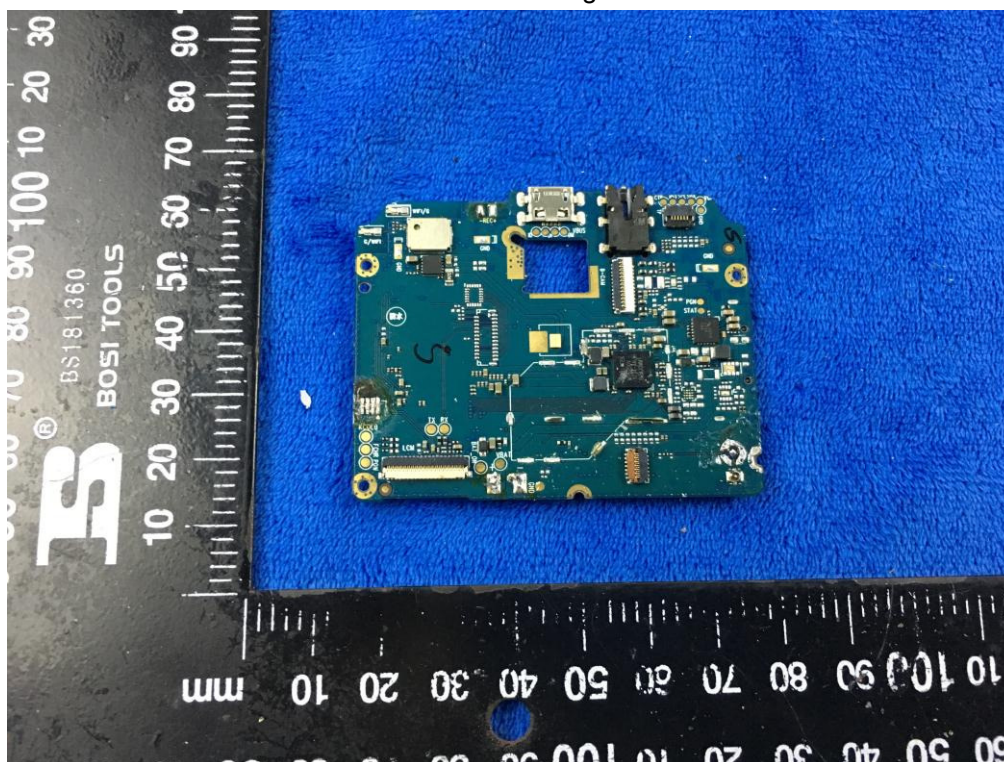

LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD Antenna View




WIFI/BT/BLE/GPS - Antenna View



RXD - Antenna View



Annex B.iii. Photograph: Test Setup Photo

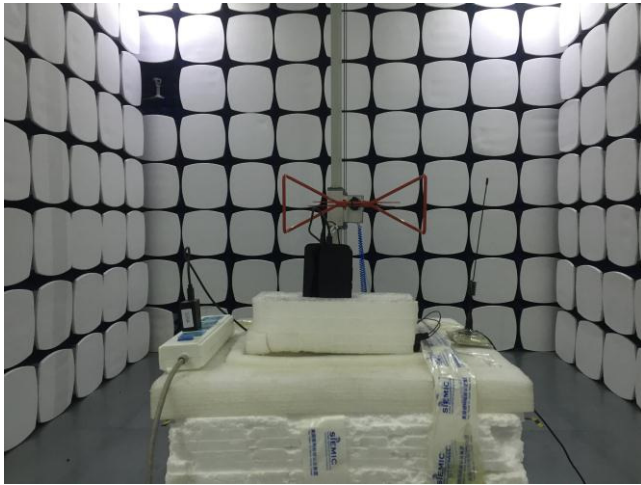

Radiated Spurious Emissions Test Setup Below 1GHz




Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

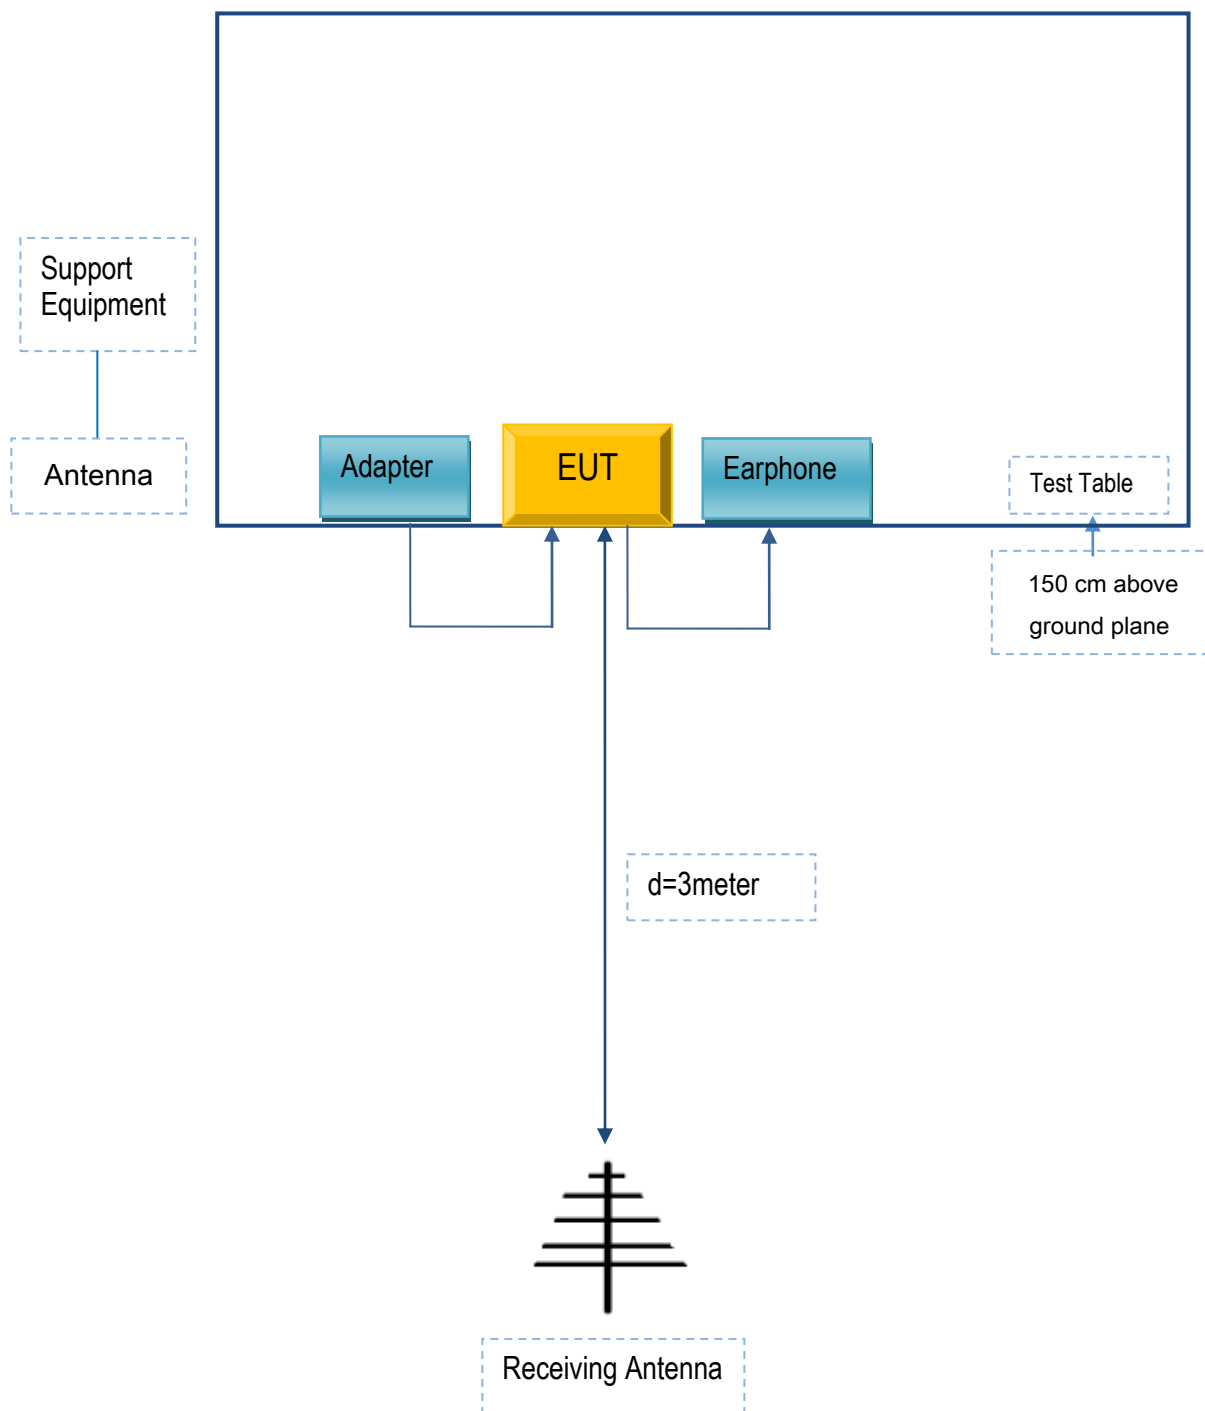

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products, Inc.	Adapter	TPA-46050200UU	N/A
N/A	Earphone	N/A	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A