

FCC Test Report

FCC ID: 2AX4YCS1

Product: HEALTH DETECTION SMARTWATCH
Trade Mark: DOOGEE
Model Number: CS1
Family Model: V10, CS1 Pro, CS1 GPS
Report No.: STR201029002002E

Prepared for
Shenzhen DOOGEE Hengtong Technology CO.,LTD
B,2F,Silicon Valley Power Digital Industrial Park,Dafu Industrial
Zone,GuanlanAobei Community,Shenzhen,China

Prepared by
Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China
Tel. 400-800-6106, 0755-3699 5508
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address : B,2F,Silicon Valley Power Digital Industrial Park,Dafu Industrial Zone,GuanlanAobei Community,Shenzhen,China
Manufacturer's Name : Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address : B,2F,Silicon Valley Power Digital Industrial Park,Dafu Industrial Zone,GuanlanAobei Community,Shenzhen,China

Product description

Product name : HEALTH DETECTION SMARTWATCH
Model and/or type reference : CS1
Family Model : V10, CS1 Pro, CS1 GPS
FCC Part15B

Standards : ANSI C63.4:2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests : 29 Oct. 2020 ~ 17 Nov, 2020
Date of Issue : 17 Nov, 2020
Test Result : Pass

Date of Test : 29 Oct. 2020 ~ 17 Nov, 2020

Testing Engineer : (Signature) (Allen Liu)

Technical Manager : (Signature) (Jason Chen)

Authorized Signatory : (Signature) (Alex Li)

Table of Contents**Page**

1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
3.2.2 TEST PROCEDURE	15
3.2.3 TEST SETUP	16
3.2.4 TEST RESULTS	17
3.2.5 TEST RESULTS(1000~18000MHz)	19

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B ANSI C63.4: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd
 Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.
 FCC Registration Number:463705; IC Registration Number:9270A-1
 CNAS Registration Number:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
NTEKA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~12.4GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	HEALTH DETECTION SMARTWATCH	
Trade Mark	DOOGEE	
Model Name	CS1	
Family Model	V10, CS1 Pro, CS1 GPS	
Model Difference	All the model are the same circuit and RF module, except the Model names.	
Product Description	The EUT is a HEALTH DETECTION SMARTWATCH.	
	Connecting I/O port:	Micro USB
	Operation Frequency:	2.568GHz
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Power Source	DC 3.7V/ 200mAh from battery or DC 5V from usb port	
Adapter	N/A	
HW Version	N/A	
SW Version	N/A	

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	charging
Mode 2	working


For Conducted Test	
Final Test Mode	Description
Mode 1	charging
Mode 2	working

For Radiated Test	
Final Test Mode	Description
Mode 1	charging
Mode 2	working


Note: Final Test Mode: Through Pre-scan, find the mode 1 is the worst case. Only the worst case mode is recorded in the report.

2.2 DESCRIPTION OF TEST SETUP

CE



RE

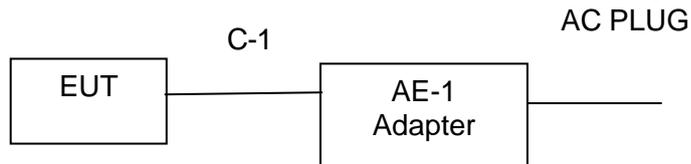

2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	NO	0.8m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.4 MEASUREMENT INSTRUMENTS LIST

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2020.05.11	2021.05.10	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2020.05.11	2021.05.10	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2020.05.11	2021.05.10	1 year
8	Amplifier	EMC	EMC051835SE	980246	2020.07.12	2021.07.11	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
10	Power Meter	DARE	RPR3006W	15I00041SNO84	2020.07.12	2021.07.11	1 year
11	Power Sensor	R&S	URV4-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2020.07.12	2021.07.11	1 year
13	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2020.04.11	2021.04.10	1 year

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.04.11	2021.04.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

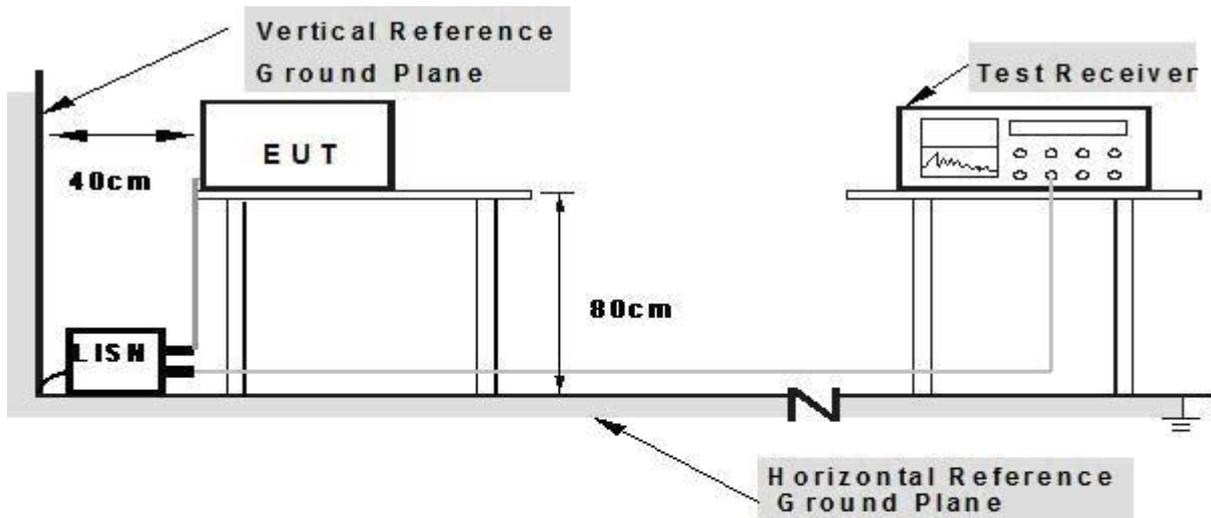

**Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


3.1.5 TEST RESULTS

EUT:	HEALTH DETECTION SMARTWATCH	Model Name. :	CS1
Temperature:	24°C	Relative Humidity:	57%
Pressure:	1010hPa	Test Date:	2020-11-02
Test Mode:	Mode 1	Phase :	L
Test Voltage:	DC 5V from adapter AC120V/60Hz		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.6018	32.29	9.55	41.84	56	-14.16	QP
0.6018	21.78	9.55	31.33	46	-14.67	AVG
0.758	27.91	9.55	37.46	56	-18.54	QP
0.758	17.9	9.55	27.45	46	-18.55	AVG
1.4778	29.48	9.56	39.04	56	-16.96	QP
1.4778	20.09	9.56	29.65	46	-16.35	AVG
1.9979	31.15	9.58	40.73	56	-15.27	QP
1.9979	20.86	9.58	30.44	46	-15.56	AVG
2.414	29.84	9.58	39.42	56	-16.58	QP
2.414	20	9.58	29.58	46	-16.42	AVG
3.5739	28.47	9.6	38.07	56	-17.93	QP
3.5739	19.14	9.6	28.74	46	-17.26	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

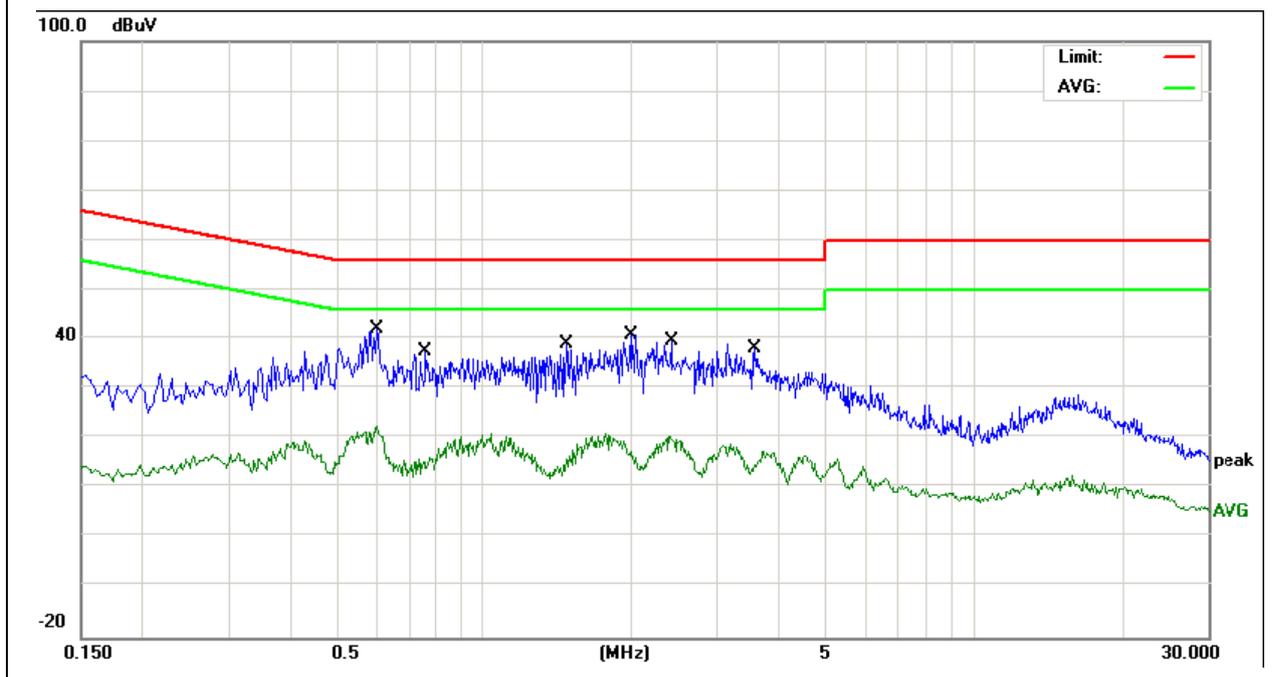


EUT:	HEALTH DETECTION SMARTWATCH	Model Name. :	CS1
Temperature:	24 °C	Relative Humidity:	57%
Pressure:	1010hPa	Test Date:	2020-11-02
Test Mode:	Mode 1	Phase :	N
Test Voltage:	DC 5V from adapter AC120V/60Hz		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.458	30.44	9.54	39.98	56.73	-16.75	QP
0.458	19.79	9.54	29.33	46.73	-17.4	AVG
0.5897	34.06	9.54	43.6	56	-12.4	QP
0.5897	23.48	9.54	33.02	46	-12.98	AVG
0.93	28.39	9.55	37.94	56	-18.06	QP
0.93	17.9	9.55	27.45	46	-18.55	AVG
2.0059	26.83	9.57	36.4	56	-19.6	QP
2.0059	16.98	9.57	26.55	46	-19.45	AVG
3.0779	27.1	9.59	36.69	56	-19.31	QP
3.0779	16.99	9.59	26.58	46	-19.42	AVG
4.3498	26.19	9.61	35.8	56	-20.2	QP
4.3498	15.83	9.61	25.44	46	-20.56	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

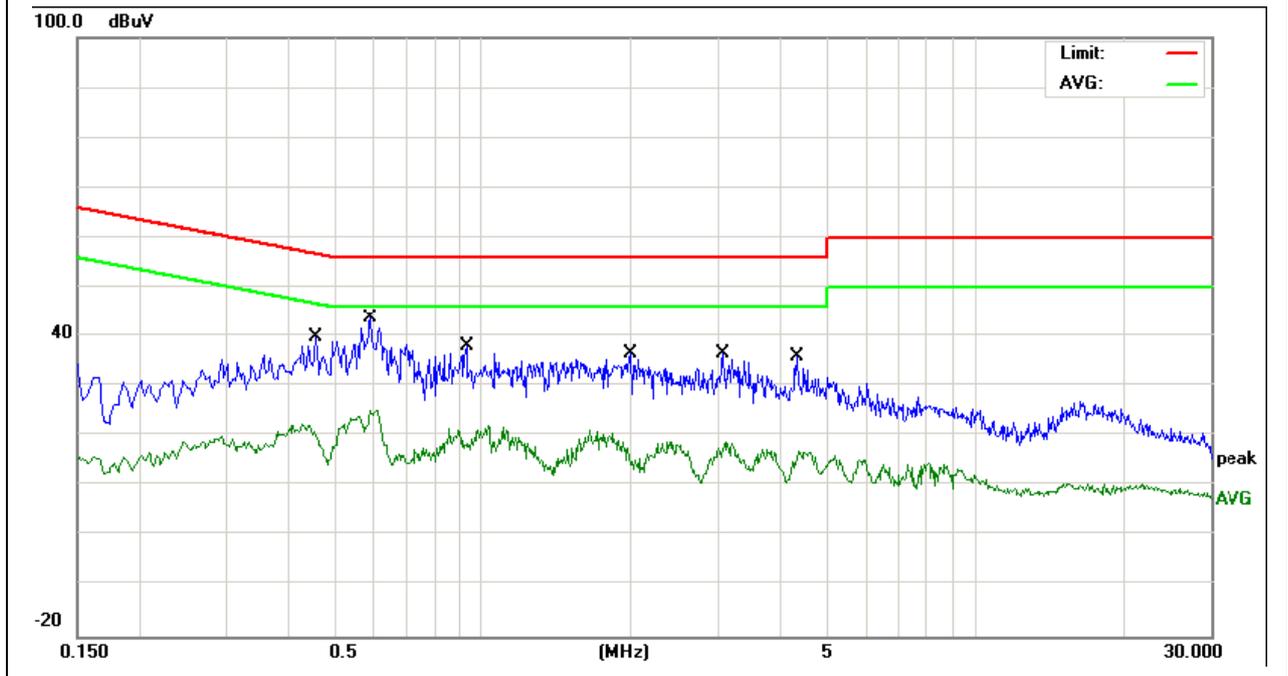

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

Test Arrangement for Radiated Emissions above 1 GHz.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength.Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Avg	1 MHz	10 Hz

3.2.3 TEST SETUP

For Radiated Emission 30~1000MHz

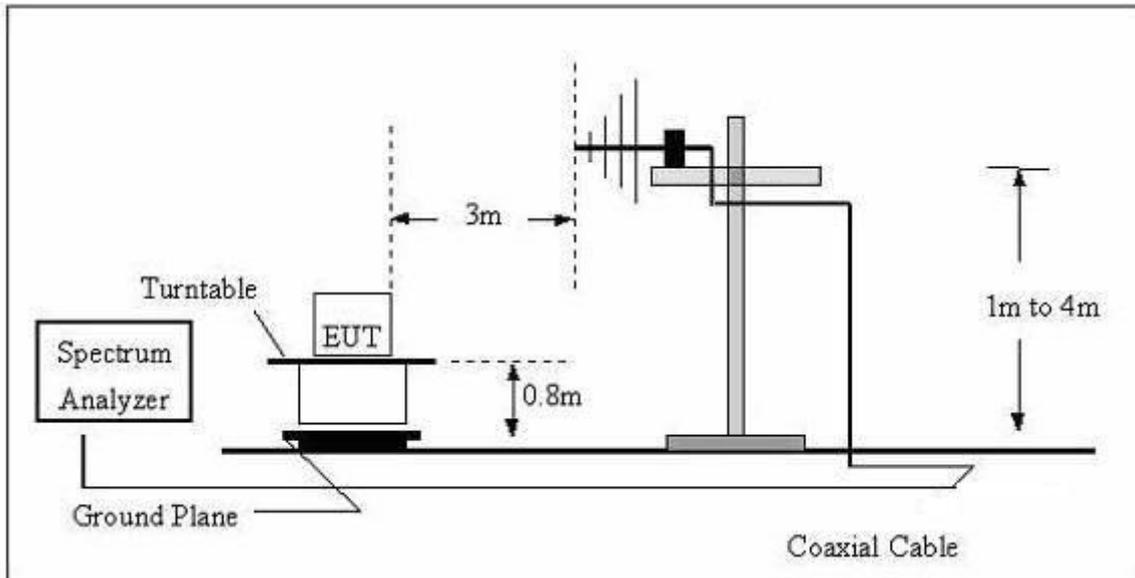

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

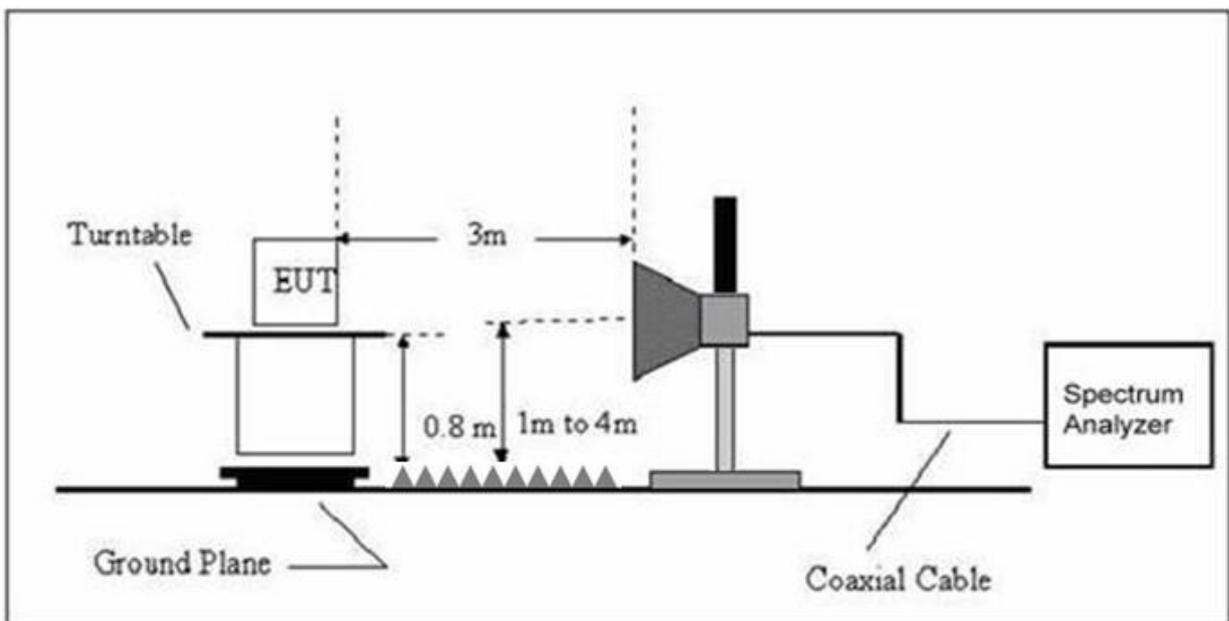


3.2.4 TEST RESULTS

TEST RESULTS (30~1000 MHz)

EUT:	HEALTH DETECTION SMARTWATCH	Model Name:	CS1
Temperature:	23 °C	Relative Humidity:	57%
Pressure:	1010 hPa	Test Date :	2020-11-02
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V from adapter AC120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	140.8351	15.85	12.35	28.2	43.5	-15.3	QP
H	312.1794	12.9	15.37	28.27	46	-17.73	QP
H	410.3824	10.02	17.95	27.97	46	-18.03	QP
H	549.0195	6.29	22.53	28.82	46	-17.18	QP
H	768.7481	7.87	24.86	32.73	46	-13.27	QP
H	916.0687	10.15	26.98	37.13	46	-8.87	QP

Remark:
Factor = Antenna Factor + Cable Loss - Amplifier.

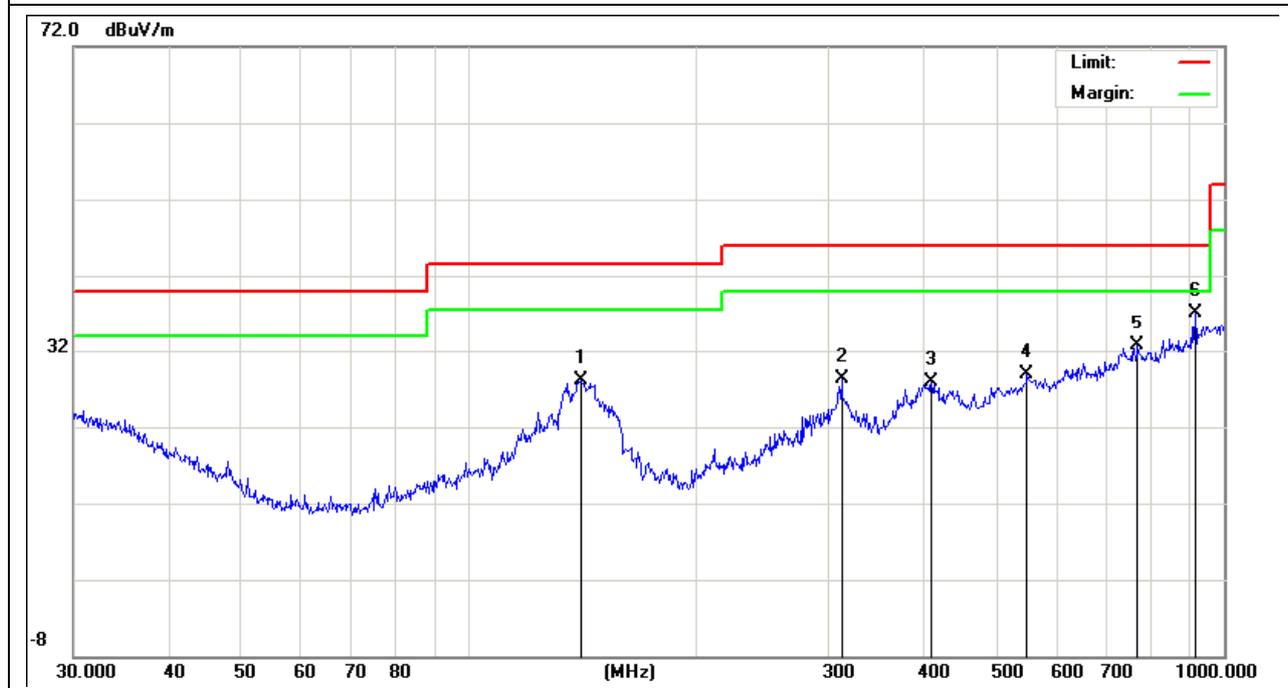


EUT:	HEALTH DETECTION SMARTWATCH	Model Name :	CS1
Temperature:	23 °C	Relative Humidity:	57%
Pressure:	1010 hPa	Test Date :	2020-11-02
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V from adapter AC120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	49.3594	15.31	9.69	25	40	-15	QP
V	60.9176	17.43	5.93	23.36	40	-16.64	QP
V	128.113	15.36	12.41	27.77	43.5	-15.73	QP
V	287.9904	8.52	14.32	22.84	46	-23.16	QP
V	397.6334	5.78	17.77	23.55	46	-22.45	QP
V	564.6389	7.11	22.12	29.23	46	-16.77	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

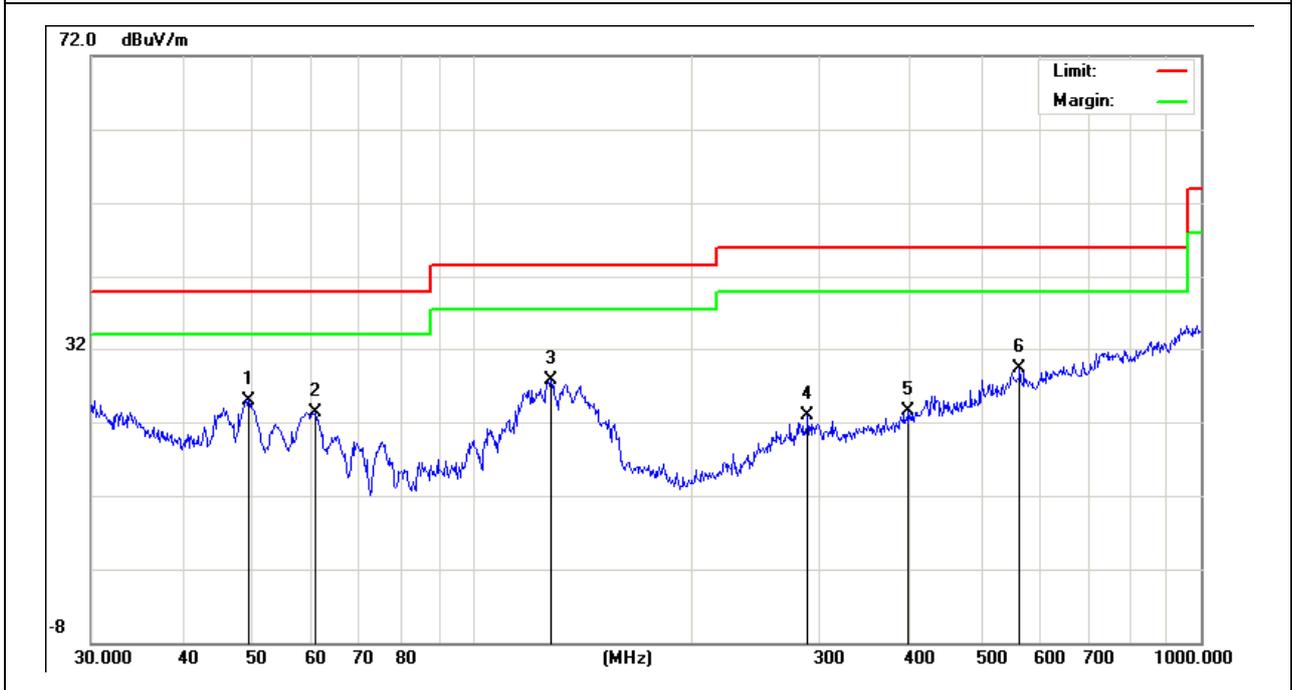

3.2.5 TEST RESULTS(1000~18000MHz)

EUT:	HEALTH DETECTION SMARTWATCH	Model Name :	CS1
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2020-11-02
Test Mode :	Mode 1		
Test Power :	DC 5V from adapter AC120V/60Hz		

All the modulation modes have been tested, and the worst result was report as below:

the modulation modes have been tested, and the worst result was report as below:

Polar (H/V)	Frequency	Reading	Correct	Result	Limit	Over Limit	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
V	1131.98	42.38	2.12	44.50	74.00	-29.5	peak
V	1131.98	32.78	2.12	34.90	54.00	-19.1	AVG
V	1599.48	41.51	3.52	45.03	74.00	-28.97	peak
V	1599.48	31.82	3.52	35.34	54.00	-18.66	AVG
V	1981.98	40.24	6.29	46.53	74.00	-27.47	peak
V	1981.98	30.71	6.29	37.00	54.00	-17	AVG
V	2321.98	40.94	4.65	45.59	74.00	-28.41	peak
V	2321.98	30.69	4.65	35.34	54.00	-18.66	AVG
V	3724.48	36.84	10.36	47.20	74.00	-26.8	peak
V	3724.48	26.77	10.36	37.13	54.00	-16.87	AVG
V	4276.98	38.06	12.38	50.44	74.00	-23.56	peak
V	4276.98	27.51	12.38	39.89	54.00	-14.11	AVG
H	1089.48	42.17	2.08	44.25	74.00	-29.75	peak
H	1089.48	31.90	2.08	33.98	54.00	-20.02	AVG
H	1344.48	42.29	2.41	44.70	74.00	-29.3	peak
H	1344.48	32.80	2.41	35.21	54.00	-18.79	AVG
H	1939.48	40.65	5.82	46.47	74.00	-27.53	peak
H	1939.48	30.85	5.82	36.67	54.00	-17.33	AVG
H	2789.48	40.59	6.04	46.63	74.00	-27.37	peak
H	2789.48	29.87	6.04	35.91	54.00	-18.09	AVG
H	4106.98	39.03	11.52	50.55	74.00	-23.45	peak
H	4106.98	28.35	11.52	39.87	54.00	-14.13	AVG
H	4871.98	36.27	13.4	49.67	74.00	-24.33	peak
H	4871.98	26.94	13.4	40.34	54.00	-13.66	AVG

Remark:

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

Note: Only the worst results data points are reported in the report.

END OF REPORT