



REPORT No.: SZ24120366E01

# TEST REPORT

**APPLICANT** : BLU Products, Inc.

**PRODUCT NAME** : Smart Phone

**MODEL NAME** : A160

**BRAND NAME** : BLU

**FCC ID** : YHLBLU160LW

**STANDARD(S)** : 47 CFR Part 15 Subpart B

**RECEIPT DATE** : 2025-02-11

**TEST DATE** : 2025-02-14 to 2025-02-17

**ISSUE DATE** : 2025-03-13

Edited by: Chen Bilian  
Chen Bilian(Rapporteur)

Approved by: Xiao Xiong  
Xiao Xiong(Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

Shenzhen Morlab Communications Technology Co., Ltd.  
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555  
Http://www.morlab.cn

Fax: 86-755-36698525  
E-mail: service@morlab.cn





# DIRECTORY

<b>1. Technical Information</b>	<b>3</b>
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
<b>2. Test Results</b>	<b>5</b>
2.1. Applied Reference Documents	5
2.2. EUT Setup and Operating Conditions	6
<b>3. 47 CFR Part 15B Requirements</b>	<b>8</b>
3.1. Conducted Emission	8
3.2. Radiated Emission	12
<b>Annex A Test Uncertainty</b>	<b>19</b>
<b>Annex B Testing Laboratory Information</b>	<b>20</b>

Change History		
Version	Date	Reason for Change
1.0	2025-03-13	First edition



# 1. Technical Information

**Note:** Provide by applicant

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	BLU Products, Inc.
<b>Applicant Address:</b>	8600 NW 36th Street, Suite #300 Miami, FL 33166, USA
<b>Manufacturer:</b>	BLU Products, Inc.
<b>Manufacturer Address:</b>	8600 NW 36th Street, Suite #300 Miami, FL 33166, USA

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Smart Phone	
<b>EUT No.:</b>	5#	
<b>Hardware Version:</b>	A571-MB-V6.0	
<b>Software Version:</b>	BLU_A160LL_V01_20250214	
<b>Tx Frequency:</b>	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz Bluetooth: 2402 MHz ~ 2480 MHz	
<b>Rx Frequency:</b>	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 7: 2620 MHz ~ 2690 MHz Bluetooth: 2402 MHz ~ 2480 MHz FM: 87.5 MHz ~ 108 MHz	
<b>Accessory:</b>	<b>AC Adapter</b>	
	<b>Brand Name:</b>	BLU



	Model No.:	US-DC-0550
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	100-240V~50/60Hz, 0.15A
	Rated Output:	5V=550mA
	Manufacturer:	ShenZhen East Sun Electronic CO., LTD
	<b>Battery</b>	
	Brand Name:	BLU
	Model No.:	C664460200L
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	2000mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2V
	Manufacturer:	HuNan ADF Alternative Energy Technology Co.,Ltd

**Note:**

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.

## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination Remark
1	15.107	Conducted Emission	2025.02.14	Fan Shengquan	PASS	No deviation
2	15.109	Radiated Emission	2025.02.17	Wang Deyong	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 2.2. EUT Setup and Operating Conditions

Note: All of the following test modes are tested in all the test items.

Test Item	
<b>Radiated Emission</b>	
Mode 1 :	EUT + GSM850 Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 2 :	EUT + GSM1900 Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 3 :	EUT + WCDMA Band II Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 4 :	EUT + WCDMA Band V Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 5 :	EUT + LTE Band 2 Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 6 :	EUT + LTE Band 4 Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 7 :	EUT + LTE Band 5 Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 8 :	EUT + LTE Band 7 Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Rear Camera Mode
Mode 9 :	EUT + WCDMA Band II Idle + Bluetooth Idle + Battery + USB Cable + Earphone + PC + SD Card + Data Transmission Mode (EUT to PC)
<b>Mode 10 :</b>	<b>EUT + WCDMA Band II Idle + Bluetooth Idle + Battery + USB Cable + Earphone + PC + SD Card + Data Transmission Mode (PC to EUT)</b>
Mode 11 :	EUT + FM Rx + Battery + AC Adapter + SD Card + Earphone + FM Mode
Mode 12 :	EUT + LTE Band 2 Idle + Bluetooth Idle + Battery + AC Adapter + SD Card + Earphone + Play 1kHz Audio Mode
<b>Conducted Emission</b>	
Mode 13 :	EUT + GSM850 Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode
Mode 14 :	EUT + GSM1900 Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode
Mode 15 :	EUT + WCDMA Band II Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode
Mode 16 :	EUT + WCDMA Band V Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode



Mode 17 :	EUT + LTE Band 2 Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode
Mode 18 :	EUT + LTE Band 4 Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode
Mode 19 :	EUT + LTE Band 5 Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode
Mode 20 :	EUT + LTE Band 7 Idle + Bluetooth Idle + Battery + AC Adapter + Earphone + Rear Camera Mode
<b>Mode 21 :</b>	<b>EUT + WCDMA Band II Idle + Bluetooth Idle + Battery + PC + PC Adapter + USB Cable + Earphone + Indirect Supply Mode</b>

**Remark:**

The above test mode in boldface (Mode 21) was the worst case of conducted emission test, only the test data of this mode was reported. The above test mode in boldface (Mode 10) was the worst case of radiated emission test, only the test data of this mode was reported.

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

## 3. 47 CFR Part 15B Requirements

### 3.1. Conducted Emission

#### 3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

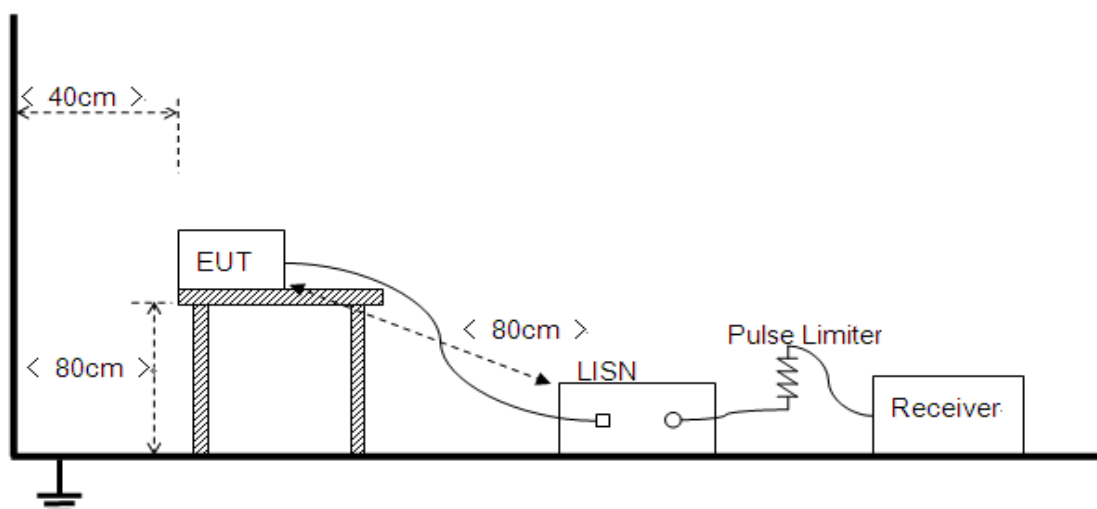





The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.

### 3.1.3. Test Result

Set RBW=9 kHz, VBW=30 kHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R [\text{dB}\mu\text{V}] + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}} [\text{dB}]$$


$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage Division Factor of LISN


$L_{\text{Cable loss}}$ : Correction Factor Contains Pulse Limiter and Cable

During the test, the total correction Factor  $L_{\text{Cable loss}}$  and  $A_{\text{Factor}}$  were built in test software.

## A. Test Plot and Suspicious Points:

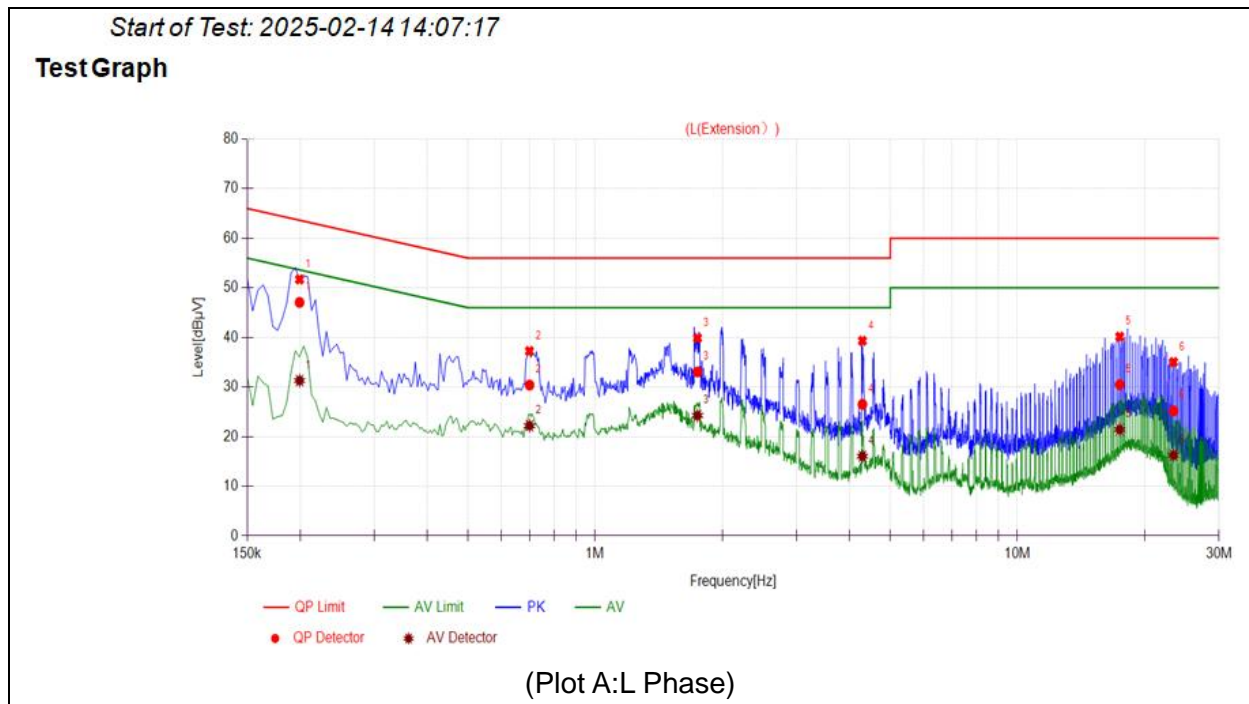

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.1995	47.07	31.31	63.63	53.63	Line	PASS
2	0.6990	30.41	22.21	56.00	46.00		PASS
3	1.7475	33.05	24.26	56.00	46.00		PASS
4	4.2943	26.51	16.05	56.00	46.00		PASS
5	17.4649	30.48	21.43	60.00	50.00		PASS
6	23.4182	25.20	16.26	60.00	50.00		PASS

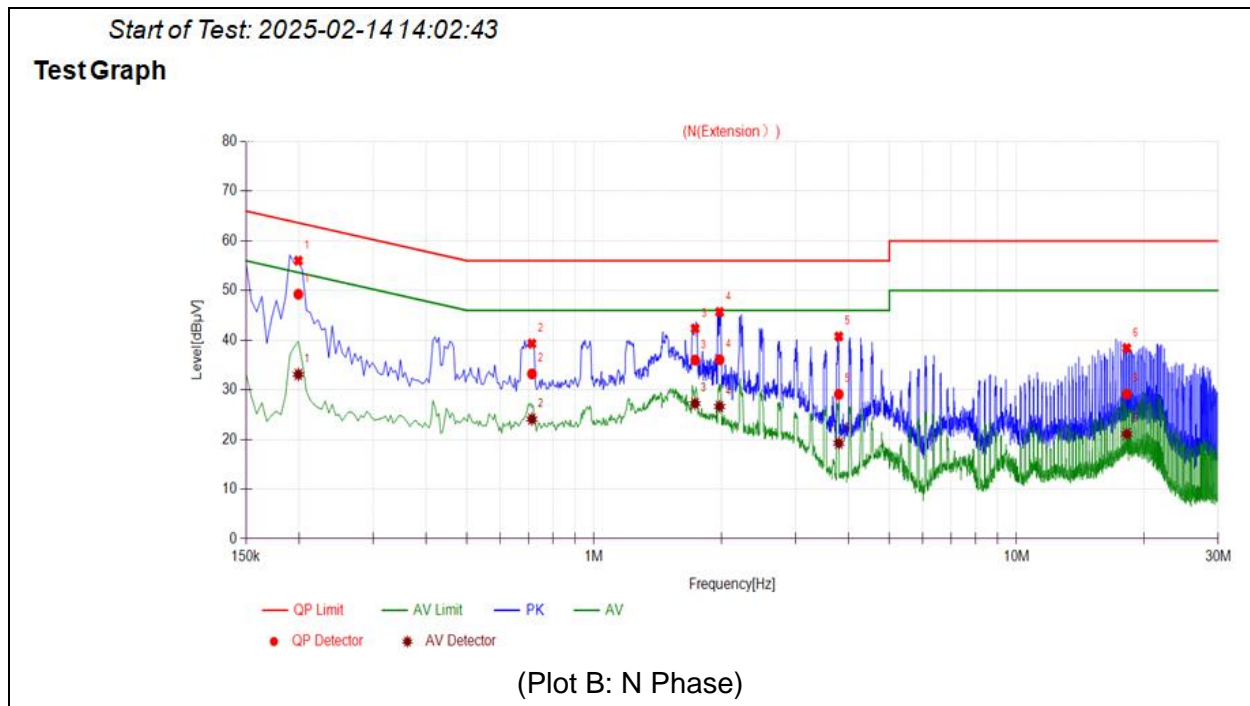

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.1995	49.25	33.10	63.63	53.63	Neutral	PASS
2	0.7125	33.21	24.10	56.00	46.00		PASS
3	1.7339	35.99	27.24	56.00	46.00		PASS
4	1.9817	36.06	26.64	56.00	46.00		PASS
5	3.7950	29.10	19.25	56.00	46.00		PASS
6	18.2298	29.13	21.10	60.00	50.00		PASS



## 3.2. Radiated Emission

### 3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency Range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	( $\mu\text{V/m}$ )	(dB $\mu\text{V/m}$ )
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB $\mu\text{V/m}$  is calculated by 20log Emission Level( $\mu\text{V/m}$ ).


### 3.2.2. Frequency Range of Measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705–108 .....	1000.
108–500 .....	2000.
500–1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

### 3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to 1GHz

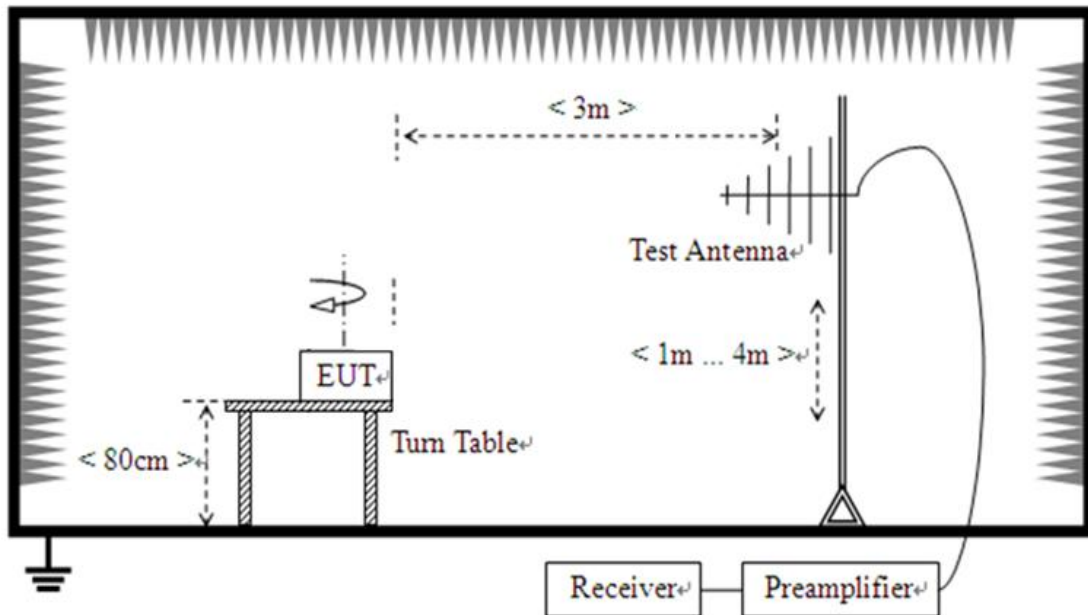

- 2) For radiated emissions above 1GHz

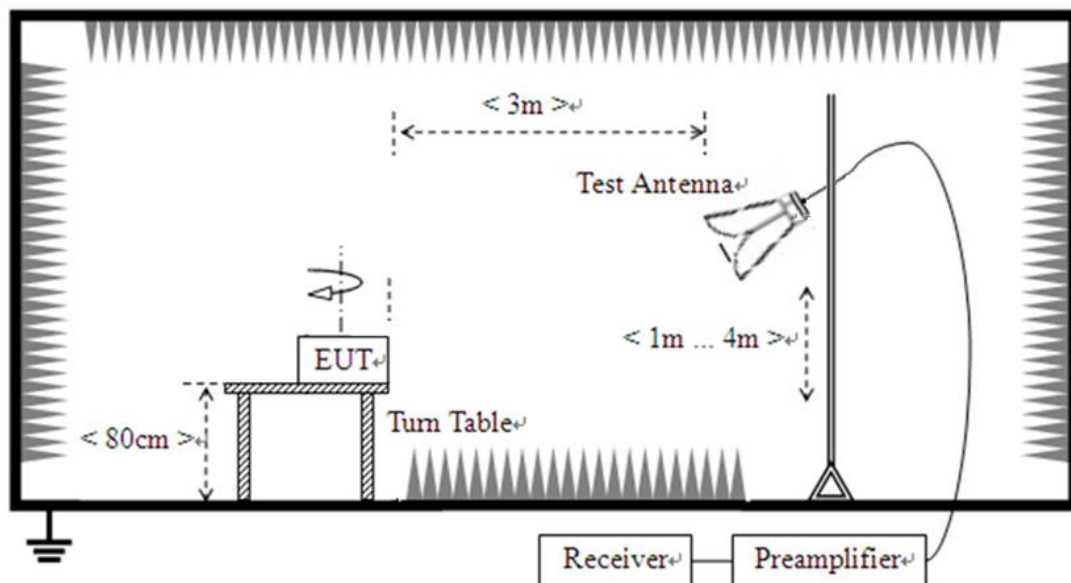



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

For measurements below 1GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video bandwidth is set to 3MHz for peak measurements and as applicable for average measurements.

### 3.2.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of emissions which (6GHz-12.5GHz) are attenuated more than 20 dB below the permissible value need not be reported.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R \text{ [dB}\mu\text{V]} + A_T \text{ [dB]} + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna


$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

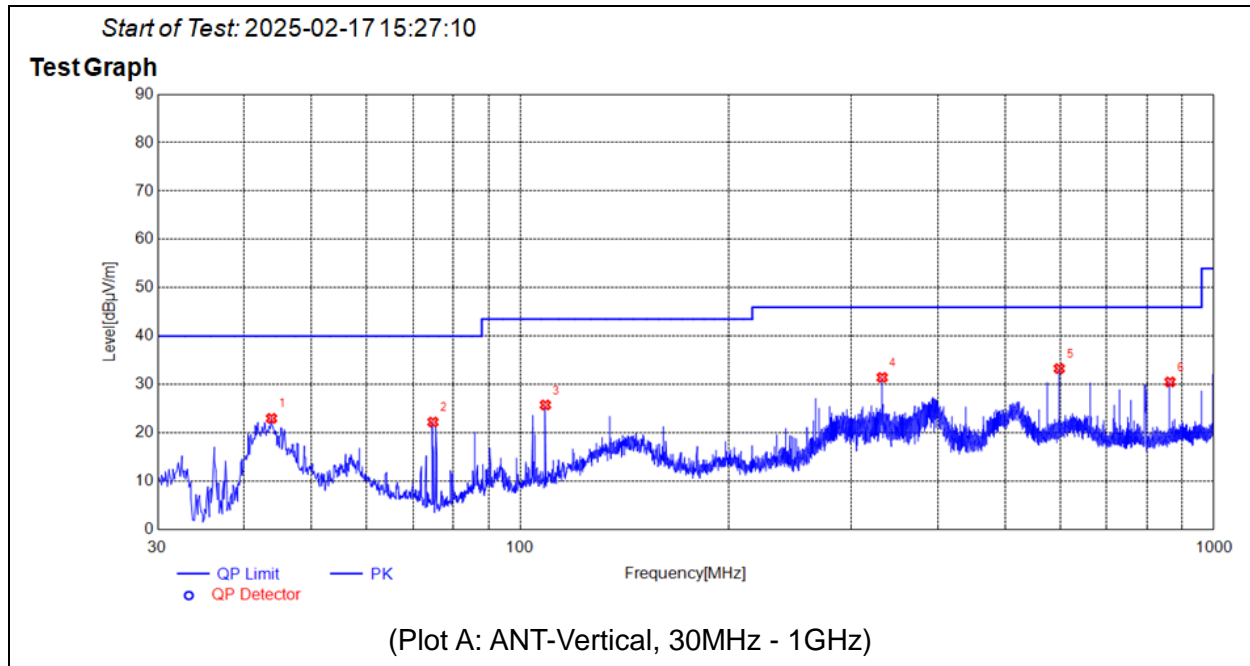


No.	Fre. MHz	PK dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	43.7754	23.00	N.A	N.A	N.A	40.00	N.A	V	PASS
2	74.8185	22.25	N.A	N.A	N.A	40.00	N.A	V	PASS
3	108.6749	25.78	N.A	N.A	N.A	43.50	N.A	V	PASS
4	332.4762	31.46	N.A	N.A	N.A	46.00	N.A	V	PASS
5	598.4768	33.30	N.A	N.A	N.A	46.00	N.A	V	PASS
6	864.4774	30.53	N.A	N.A	N.A	46.00	N.A	V	PASS



Start of Test: 2025-02-17 15:31:16


## Test Graph

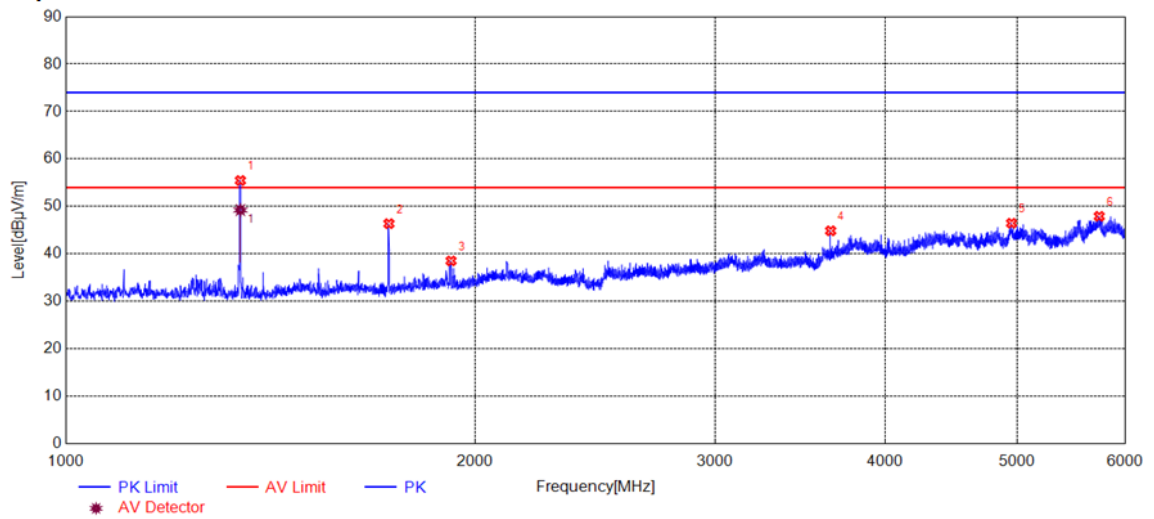


(Plot B: ANT-Vertical, 1GHz - 6GHz)

No.	Fre. MHz	PK dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	1344.0000	55.47	N.A	49.25	74.00	N.A	54.00	V	PASS
2	1728.0000	46.38	N.A	N.A	74.00	N.A	54.00	V	PASS
3	1919.5000	38.54	N.A	N.A	74.00	N.A	54.00	V	PASS
4	3648.0000	44.87	N.A	N.A	74.00	N.A	54.00	V	PASS
5	4954.0000	46.47	N.A	N.A	74.00	N.A	54.00	V	PASS
6	5746.5000	47.93	N.A	N.A	74.00	N.A	54.00	V	PASS



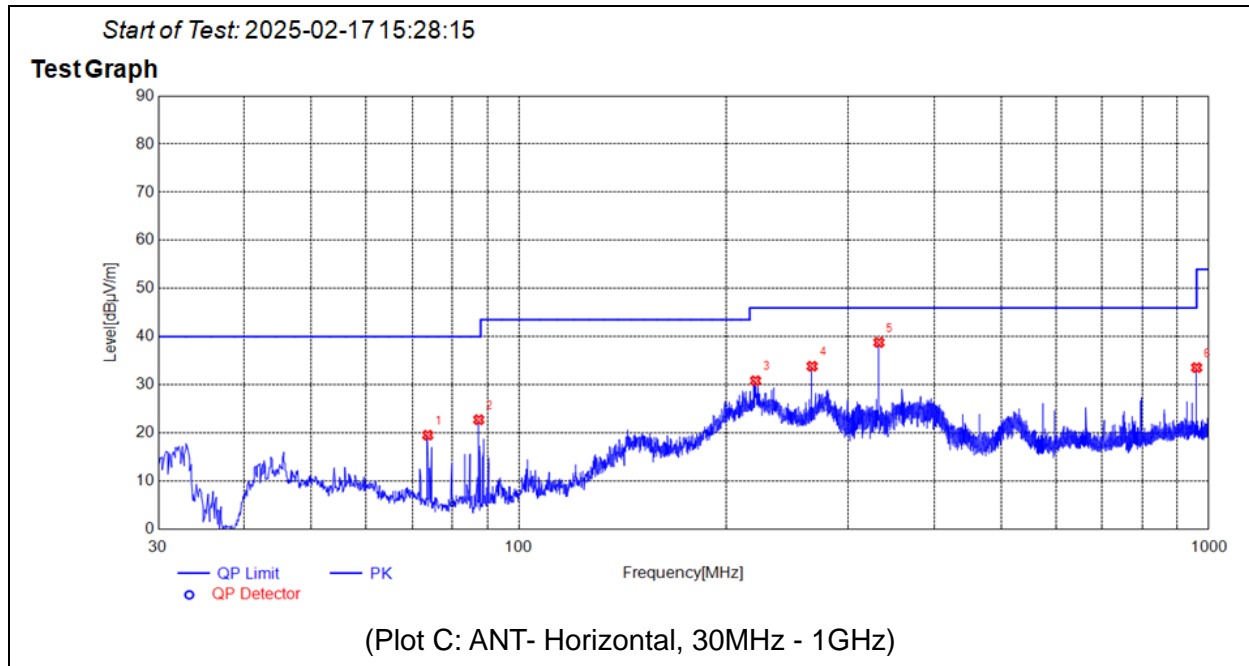

No.	Fre. MHz	PK dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	73.7514	19.55	N.A	N.A	N.A	40.00	N.A	H	PASS
2	87.4297	22.76	N.A	N.A	N.A	40.00	N.A	H	PASS
3	220.2360	30.86	N.A	N.A	N.A	46.00	N.A	H	PASS
4	266.0246	33.87	N.A	N.A	N.A	46.00	N.A	H	PASS
5	332.4762	38.80	N.A	N.A	N.A	46.00	N.A	H	PASS
6	960.0320	33.58	N.A	N.A	N.A	54.00	N.A	H	PASS

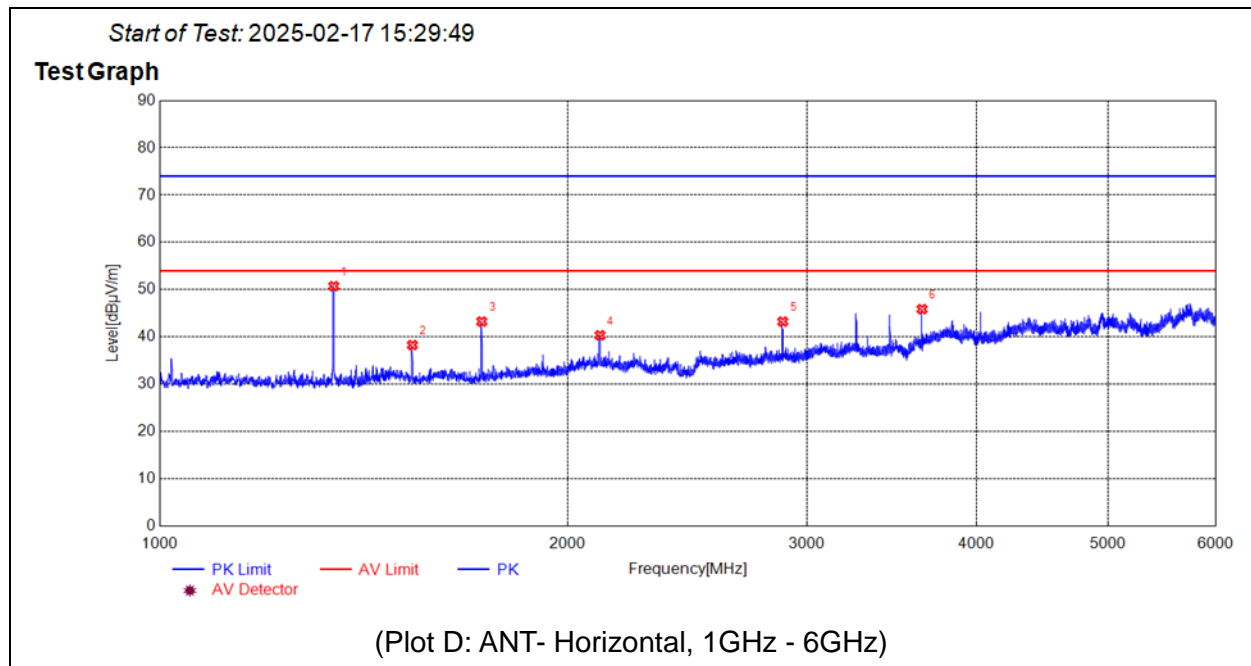

No.	Fre. MHz	PK dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	1344.0000	50.74	N.A	N.A	74.00	N.A	54.00	H	PASS
2	1536.0000	38.29	N.A	N.A	74.00	N.A	54.00	H	PASS
3	1728.0000	43.26	N.A	N.A	74.00	N.A	54.00	H	PASS
4	2112.0000	40.36	N.A	N.A	74.00	N.A	54.00	H	PASS
5	2880.0000	43.24	N.A	N.A	74.00	N.A	54.00	H	PASS
6	3648.0000	45.89	N.A	N.A	74.00	N.A	54.00	H	PASS



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9kHz-150kHz	±3.3dB
	150kHz-30MHz	±2.8dB

### Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.04dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Accreditation Certificate

<b>Accredited Testing Laboratory:</b>	The FCC designation number is CN1192. Test firm registration number is 226174. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

### 4. Test Software Utilized

Model	Version Number	Producer
TS+ -[JS32-RE]	Version 2.5.0.6	Tonscend
TS+ -[ JS32-CE]	Version 2.5.0.0	Tonscend

**5. Test Equipments Utilized**

Description	Model	Serial No.	Manufacturer	Cal. Date	Due. Date
Bi-Log Antenna	VULB 9163	9163-519	SCHWARZBECK	2024/6/22	2025/6/21
Horn Antenna	BBHA 9120D	01774	SCHWARZBECK	2024/6/22	2025/6/21
Receiver	N9038A	MY541300 16	Agilent	2025/1/10	2026/1/9
Preamplifier	S020180L3203	61171/611 72	LUCIX CORP.	2024/5/30	2025/5/29
Preamplifier	S10M100L3802	46732	LUCIX CORP.	2024/5/30	2025/5/29
RF Coaxial Cable	PE330	MRE001	Pasternack	N/A	N/A
RF Coaxial Cable	CLU18	MRE002	Pasternack	N/A	N/A
RF Coaxial Cable	CLU18	MRE003	Pasternack	N/A	N/A
RF Coaxial Cable	BNC	MRE04	Qualwave	N/A	N/A
Receiver	ESPI	101052	R&S	2024/6/3	2025/6/2
LISN	NSLK 8127	8127449	Schwarzbeck	2025/1/9	2026/1/8
10dB Pulse Limiter	VTSD 9561-F	VTSD 9561 F-B #206	SCHWARZBECK	2024/5/30	2025/5/29
System Simulator	CMW500	152038	R&S	2024/9/11	2025/9/10

**6. Ancillary Equipment Utilized**

Description	Model	Serial No.	Manufacturer
SD Card	31696-002.A00LF	SDCS2/32GB	Kingston
Earphone	N/A	N/A	OPPO
USB Cable	N/A	SZ24120312 15#	N/A
PC	A1370	C2QJJ1X1DRVD	APPLE
PC	E740C	PF-ORVKN9	LENOVO
PC Adapter	SA10E75791	SA10M42529	LENOVO

\_\_\_\_\_ END OF REPORT \_\_\_\_\_