

**Appendix E. Supplemental RF Exposure Tests Results****SAR test result**

1. The test data is selected according to the worst case SAR configuration per cellular technology.
2. The test data is to demonstrate the device is in compliance with FCC requirements at 25mm when all power reduction mechanisms are OFF. The worst case body SAR at 10mm was used for simultaneous transmission SAR analysis since they are more conservative than the 25mm SAR.

Band	Mode	Test Position	Gap (mm)	Brick/Gun Type	Power State	Ch.	Freq. (MHz)	SKU	Battery	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WCDMA IV_Ant 1	RMC 12.2Kbps	Back	25mm	Brick	DSI 0	1513	1752.6	SKU9	Battery1	24.56	25.00	1.107	0.11	0.313	0.346

Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Brick/Gun Type	Power State	Ch.	Freq. (MHz)	SKU	Battery	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
LTE Band 66_Ant 1	20M	QPSK	1	0	Back	25mm	Brick	DSI 0	132072	1720	SKU9	Battery1	25.39	25.70	1.074	-0.05	0.337	0.362

Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Brick/Gun Type	Power State	Ch.	Freq. (MHz)	SKU	Battery	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
FR1 n77_Ant 8	100M	BPSK	1	1	Right Side	25mm	Gun	DSI 0	656000	3840	SKU6+1	SKU6+1	24.70	25.00	1.072	-0.02	0.656	0.703

Band	Mode	Test Position	Gap (mm)	Antenna	Brick / Gun Type	Power State	Ch.	Freq. (MHz)	SKU	Battery	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN2.4GHz	802.11b 1Mbps	Right Side	25mm	Ant 6+7(6)	Brick	CTL	11	2462	SKU 9	Battery1	20.12	20.50	1.091	98.05	1.020	-0.03	0.158	0.176
WLAN2.4GHz	802.11b 1Mbps	Right Side	25mm	Ant 6+7(6)	Gun	CTL	11	2462	SKU 11	Battery1	20.12	20.50	1.091	98.05	1.020	0.14	0.196	0.218
WLAN5GHz	802.11a 6Mbps	Left Side	25mm	Ant 6+7(6)	Brick	CTL	165	5825	SKU 9	Battery1	21.29	21.50	1.050	99.2	1.008	-0.05	1.010	1.069
WLAN5GHz	802.11a 6Mbps	Left Side	25mm	Ant 6+7(6)	Gun	CTL	165	5825	SKU 11	Battery1	21.29	21.50	1.050	99.2	1.008	-0.01	1.040	1.100
WLAN6GHz	802.11ax-HE160 MCS0	Right Side	25mm	Ant 6+7(7)	Brick	CTL	47	6185	SKU 9	Battery1	18.21	18.50	1.069	99.37	1.006	0.07	0.234	0.252
WLAN6GHz	802.11ax-HE160 MCS0	Right Side	25mm	Ant 6+7(7)	Gun	CTL	47	6185	SKU 11	Battery1	18.21	18.50	1.069	99.37	1.006	-0.18	0.375	0.403

Band	Mode	Test Position	Gap (mm)	Antenna	SKU	Battery	Brick / Gun Type	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Grid Step (A)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m^2)	Scaled Normal psPD (W/m^2)	Total psPD (W/m^2)	Scaled Total psPD (W/m^2)
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery1	Brick	15	6025	18.07	18.50	99.42	0.0625	1.5535	-0.02	4.12	7.11	4.32	7.45
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery1	Brick	47	6185	18.21	18.50	99.42	0.0625	1.5535	-0.13	3.03	5.06	3.5	5.85
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery1	Brick	111	6505	16.08	16.50	98.45	0.0625	1.5535	0	1.36	2.36	1.46	2.54
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery1	Brick	143	6665	16.47	16.50	98.40	0.0625	1.5535	0.02	1.75	2.78	1.92	3.05
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery1	Brick	207	6985	15.80	16.00	98.45	0.0625	1.5535	-0.11	0.815	1.35	0.877	1.45
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery2	Brick	47	6185	18.21	18.50	99.42	0.0625	1.5535	-0.18	2.76	4.61	3.23	5.40
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery3	Brick	47	6185	18.21	18.50	99.42	0.0625	1.5535	0.1	2.71	4.53	3.12	5.21
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU9	Battery4	Brick	47	6185	18.21	18.50	99.42	0.0625	1.5535	0.12	2.8	4.68	3.25	5.43
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU11	Battery1	Gun	15	6025	18.07	18.50	99.42	0.0625	1.5535	-0.06	4.14	7.14	4.33	7.47
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU11	Battery1	Gun	47	6185	18.21	18.50	99.42	0.0625	1.5535	0.01	2.88	4.81	3.13	5.23
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU11	Battery1	Gun	111	6505	16.08	16.50	98.45	0.0625	1.5535	0.11	1.73	3.01	1.79	3.11
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU11	Battery1	Gun	143	6665	16.47	16.50	99.74	0.0625	1.5535	0.03	1.41	2.21	1.63	2.56
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU11	Battery1	Gun	207	6985	15.80	16.00	98.45	0.0625	1.5535	-0.17	2.78	4.59	2.81	4.64
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU3	Battery2	Gun	15	6025	18.07	18.50	99.42	0.0625	1.5535	0.08	3.85	6.64	4.12	7.11
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU6	Battery3	Gun	15	6025	18.07	18.50	99.42	0.0625	1.5535	-0.17	3.96	6.83	4.22	7.28
WLAN6GHz	802.11ax-HE160 MCS0	Left Side	25mm	Ant 6+7(7)	SKU10	Battery4	Gun	15	6025	18.07	18.50	99.42	0.0625	1.5535	-0.03	3.81	6.57	4.05	6.99

## Appendix E. Power reduction mechanism verification

According to the May 2017 TCBC Workshop, Demonstration of proper functioning of the detection and triggering mechanisms to support the corresponding RF exposure conditions. The verification is through a base station simulator is used to establish a conducted RF connection and monitor output power under different operating conditions related to the power reduction mechanisms. Detail of power reduction mechanisms referring to Operational Description

### 1. Power verification procedure

- Establish data connection monitor hotspot power state for GSM/UMST/LTE/FR1/WiFi
- Establish data connection monitor body worn power state for GSM/UMST/LTE/FR1/WiFi, Body Detect mechanism was performed for the in-hand and on a stationary object (placed on a table)
- This device incorporates the Smart Transmit algorithm feature and through under varying Tx power transmission scenarios in real-time to maintain the time-averaged Tx power compliant with RF exposure requirement.
- In this power validation purpose is to demonstrate of proper functioning of the detection and triggering mechanisms to support the corresponding RF exposure conditions. In order to avoid real-time TX power varying may affect monitor output power related to the power reduction mechanisms, therefore power reduction verification would be disabled WWAN time average SAR feature.
- Verification performed for each technology to demonstrate that the power reduction applies for both technology and call origination.

### 2. Test setup for measuring power



Figure 1

### 3. Verification output Power Results

#### Hotspot exposure condition

Hotspot exposure condition		Output Power for data connection	
Wifi Status		ON	
Power state		WWAN DSI 3 WIFI status 3	
Wireless	Antenna	Measured (dBm)	Max. Tune-up (dBm)
Technology			
WCDMA II	Ant 1	19.5	21.0
LTE Band 7	Ant 5	20.1	22.5
NR SA n25	Ant 1	19.5	21.5

Hotspot exposure condition		Output Power (data connection)			
		G-Sensor status			
Power state		WWAN Off (NoDBS,Set1)		WWAN On(NoDBS,Set5)	
Wireless technology	Antenna	Measured (dBm)	Target power(dBm)	Measured (dBm)	Target power(dBm)
802.11g 1Mbps CH6	(Ant6+7)Ant 6	17.5	18.0 ±1.5db	15.1	16.0 ±1.5db
	(Ant6+7)Ant 7	18.6	18.0 ±1.5db	16.4	16.0 ±1.5db
802.11a 6Mbps CH157	(Ant6+7)Ant 6	15.7	16.0 ±1.5db	12.6	14.0 ±1.5db
	(Ant6+7)Ant 7	16.9	16.0 ±1.5db	13.2	14.0 ±1.5db

#### Body worn exposure condition

Body worn exposure condition		Output Power for data connection			
Wifi Status		OFF		ON	
Power state		WWAN DSI 1 WIFI status 1		WWAN DSI 1 WIFI status 3	
Wireless	Antenna	Measured (dBm)	Max. Tune-up (dBm)	Measured (dBm)	Max. Tune-up (dBm)
Technology					
WCDMA II	Ant 1	22.4	23.9	19.5	21.0
LTE Band 25	Ant 1	22.6	24.7	19.8	22.0
NR SA n25	Ant 1	21.9	23.9	19.4	21.6


Body worm exposure condition		Output Power (data connection)			
		G-Sensor status (No-DBS,Set2)			
Power state		WWAN Off		WWAN On	
Wireless technology	Antenna	Measured (dBm)	Target power(dBm)	Measured (dBm)	Target power(dBm)
802.11g 1Mbps CH6	(Ant6+7)Ant 6	17.6	17.5 ±1.5db	17.4	17.5 ±1.5db
	(Ant6+7)Ant 7	18.7	17.5 ±1.5db	18.5	17.5 ±1.5db
802.11a 6Mbps CH157	(Ant6+7)Ant 6	15.8	15.0 ±1.5db	15.6	15.0 ±1.5db
	(Ant6+7)Ant 7	15.7	15.0 ±1.5db	15.7	15.0 ±1.5db

#### Free Space exposure condition

Free Space exposure condition		Output Power for data connection			
Wifi Status		OFF		ON	
Power state		WWAN DSI 0 WIFI status 1		WWAN DSI 0 WIFI status 3	
Wireless	Antenna	Measured (dBm)	Max. Tune-up (dBm)	Measured (dBm)	Max. Tune-up (dBm)
Technology					
LTE Band 25	Ant 1	24.3	25.7	24.2	25.7

#### 4. Motion Time vs Power verification

- Body Detect mechanism will be performed for the in-hand and on a stationary object (placed on a table).
- Verify the functionality of the motion sensor by measuring the output power in the following steps.

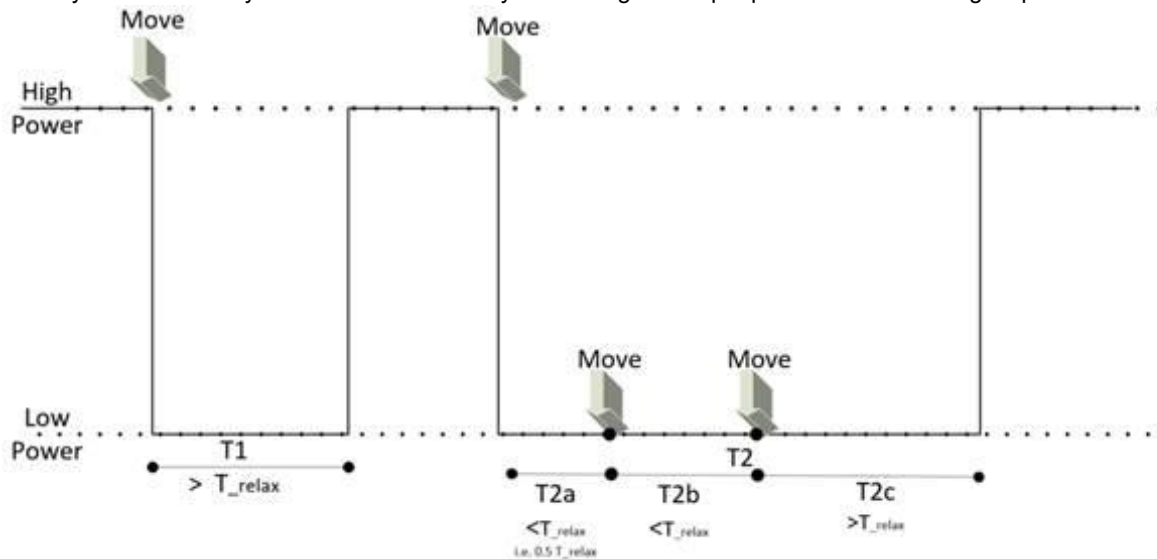

**Figure 1 Illustration of the procedure for the validation of the power reduction**

The device is embedded with motion sensors only, no proximity sensors are installed.

- Placed on a table:** Make the DUT transmit with the maximum output power by using a base station simulator.
  - Confirm that motion sensor is not triggered by letting the DUT remain stationary with no movements for the period  $T_{relax}$  for the motion sensor to reach stationary state.
  - Record  $P_{step1}$  (high power)
- In-hand:** Move the DUT to trigger the motion sensor. Apply the motion of the DUT with respect to movements in intended and reasonably foreseeable use conditions of the DUT.
  - Record  $P_{step2}$  (low power)
- For the validation of  $T_{relax}$ , wait a time period  $T_1 > T_{relax}$  and confirm DUT restores to high power ( $P_{step1}$ ).
- Move the DUT to trigger the motion sensor.
- Move DUT within  $T_{relax}$  to ensure  $T_{relax}$  resets when DUT is in motion.  
 DUT can be moved once or twice within  $T_{relax}$ , (after time periods  $T_{2a}$  and  $T_{2b}$  in Figure 1.) followed by waiting for a time period greater than  $T_{relax}$  (time period  $T_{2c}$  in Figure 1.) for DUT to restore high power. The total time duration of this step is  $T_2$ , and the power during the whole period  $T_2$  shall be reduced (low power –  $P_{step2}$ ).

**WLAN OFF**

Exposure Condition		Output Power (data connection) (dBm)											
		Stationary Placed on a table		In hand		Stationary Placed on a table		In hand				Stationary Placed on a table	
Power state		Full Power $P_{step1}$		Low Power $P_{step2}$		Full Power $P_{step1} \& T_1 > T_{relax}$		Low Power $P_{step2} \& T_{2a} < T_{relax}$		Low Power $P_{step2} \& T_{2b} < T_{relax}$		Full Power $P_{step1} \& T_{2c} > T_{relax}$	
Wireless technology	Antenna	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up
LTE Band 25	Ant 1	24.1	25.7	22.4	24.7	24.2	25.7	22.3	24.7	22.3	24.7	24.2	25.7

**WLAN ON**

Exposure Condition		Output Power (data connection) (dBm)											
		Stationary Placed on a table		In hand		Stationary Placed on a table		In hand				Stationary Placed on a table	
Power state		Full Power $P_{step1}$		Low Power $P_{step2}$		Full Power $P_{step1} \& T_1 > T_{relax}$		Low Power $P_{step2} \& T_{2a} < T_{relax}$		Low Power $P_{step2} \& T_{2b} < T_{relax}$		Full Power $P_{step1} \& T_{2c} > T_{relax}$	
Wireless technology	Antenna	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up
LTE Band 25	Ant 1	24.0	25.7	19.6	22.0	24.2	25.7	19.7	22.0	19.7	22.0	24.0	25.7

Exposure Condition		Output Power (data connection) (dBm)											
		Stationary Placed on a table		In hand		Stationary Placed on a table		In hand				Stationary Placed on a table	
Power state		Full Power $P_{step1}$		Low Power $P_{step2}$		Full Power $P_{step1} \& T_1 > T_{relax}$		Low Power $P_{step2} \& T_{2a} < T_{relax}$		Low Power $P_{step2} \& T_{2b} < T_{relax}$		Full Power $P_{step1} \& T_{2c} > T_{relax}$	
Wireless technology	Antenna	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up
802.11g 6Mbps,CH6	(Ant6+7) Ant 6	19.0	19±1.5db	18.0	17.5±1.5db	19.0	19±1.5db	18.1	17.5±1.5db	18.2	17.5±1.5db	19.0	19±1.5db
	(Ant6+7) Ant 7	20.1	19±1.5db	18.9	17.5±1.5db	20.2	19±1.5db	18.9	17.5±1.5db	18.9	17.5±1.5db	20.1	19±1.5db

Exposure Condition		Output Power (data connection) (dBm)			
		Stationary Placed on a table (Display on and Hotspot off)		Stationary Placed on a table (Display off and Hotspot off)	
Power state		Full Power $P_{step1}$		Low Power $P_{step1}$	
Wireless technology	Antenna	Measured	Max. Tune-up	Measured	Max. Tune-up
802.11g 6Mbps,CH6	(Ant6+7)Ant 6	19.1	19±1.5db	18.0	17.5±1.5db
	(Ant6+7)Ant 7	20.2	19±1.5db	18.9	17.5±1.5db
LTE Band 25	Ant 1	24.1	25.7	22.5	24.7